


MEASURING EQUIPMENT



How to Measure Static?

The range of Meech measuring equipment has been designed to provide accurate readings of electrical charges, the performance (both AC and DC) and the surface resistivity. These hand held devices are easy to use and vitally important to diagnosing static control issues.

The chart on the right shows the Triboelectric Series. This is a list of materials, showing which have a greater tendency to become positively charged (+) and which have greater tendency to become negatively charged (-). This is an extremely useful tool to determine which combinations of materials create the most static electricity.

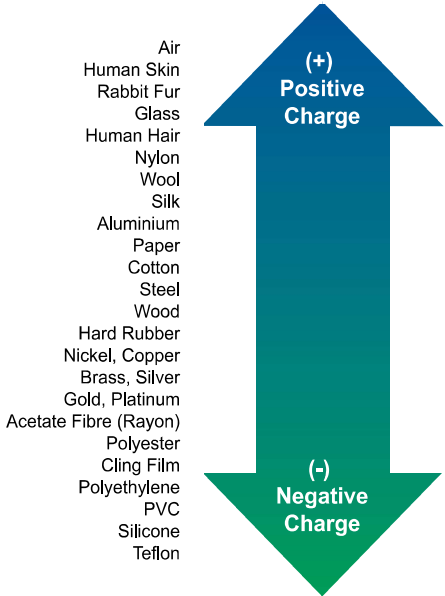


983v2 Static Locator

The 983v2 Static Locator provides accurate measurement of electrostatic charges. Its design enables fast response, low drift and ease of operation. The 983v2 can operate in “Continuous” or “Peak Hold” mode to record changes in the level of charge or the highest charge detected respectively.

- In-built distance meter gives clear indication of optimum working range for consistent accurate readings.
- Compact design, easily fits into one hand and is hard wearing.
- Large easy to read LCD screen.

Technical Characteristics

Measurement range	-200kV to +200kV
Accuracy	+/- 5%
Battery	2 x AA alkaline
Dimensions (H x W x D)	143 x 81 x 25mm
Weight	200g

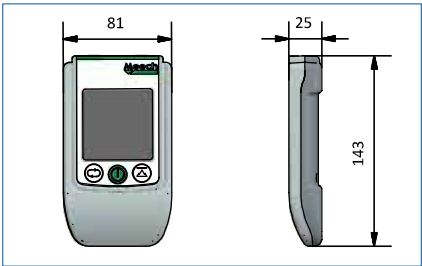




984v2 Ion Sensor

The 984v2 Ion Sensor is a device used for checking the performance of both AC and DC powered static elimination bars. Indicator lights confirm the presence of ions, and in the case of a DC power source, their polarity. Regular monitoring of installations with the 984v2 will indicate when bars require cleaning or other maintenance work.

- Simple to operate and will provide reproducible results.
- Avoids the need to remove the ionising bar for testing.
- Can be used on a range of both Meech and non-Meech AC and DC equipment.

Technical Characteristics

Indicator LEDs	Easy to operate
Battery	2 x AA alkaline
Dimensions	142x 81 x 25mm

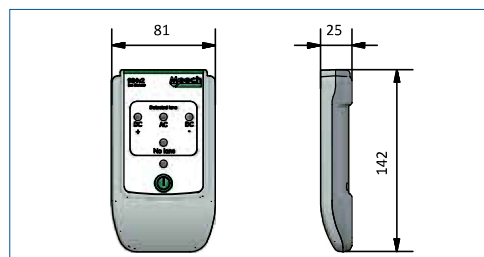


990SRM Surface Resistance Meter

The 990SRM is a convenient, pocket-sized meter for measurement of surface resistivity and resistance to ground. It is a useful tool for testing materials for static charging applications and for diagnosing static electricity related problems.

- Measurement range of 10^3 to 10^{12} Ohms per square.
- Accuracy of $\pm \frac{1}{2}$ Decade.

Technical Characteristics

Accuracy	+/-10%
Battery	9V
Dimensions	61 x 26 x 96mm
Weight	170g
Battery life	Over 40 hours of continuous use
Display	LED's- one per decade

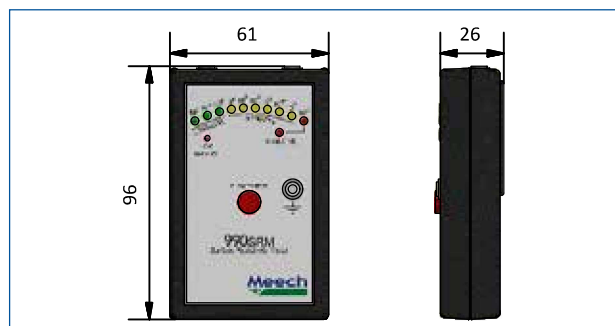

Options for Measuring Equipment



983v2 & 984v2 Test Kit

The 983v2 & 984v2 test kit gives operators & maintenance staff the ability to diagnose static related issues and monitor the performance of their ionising equipment. The test kit features both the 983V2 and 984V2 in an easy to carry, hard-wearing case.