


FCC Part 15C Test Report

FCC ID: 2AA4B51809836

Product Name: L4 PowerSound Lamp
Trademark: N/A
Model Number: 51809836
L4, DC-1143
Prepared For: SHENZHEN E-WONDERLAND ELECTRONIC CO.,LTD
Address: D501, Zhihui Chuangxin Center Qianjin Rd 2, Bao'an District ,
Shenzhen, China
Manufacturer: SHENZHEN MUSOS ELECTRONIC CO.,LTD
Address: Floor5, No.6, PuyuweiRoad, Shangliao, ShajingTown, Baoan
District, Shenzhen, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial,
Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an
District, Shenzhen, China
Sample tested Date: Jan. 07, 2019 - Jan. 17, 2019
Issue Date: Jan. 17, 2019
Report No.: BCTC-FY190100072E
Test Standards: FCC Part15.249
ANSI C63.10-2013

Prepared by(Engineer): Amou Zhang
Reviewer(Supervisor): Eric Yang
Approved(Manager): Carson Zhang

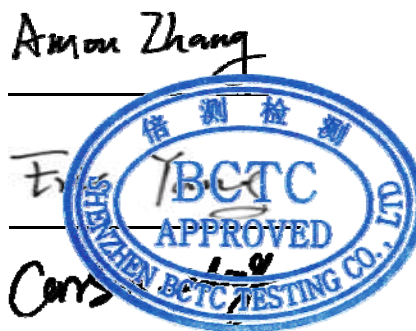

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

| Table of Contents | Page |
|---|-------------|
| 1 . VERSION | 4 |
| 2 . SUMMARY OF TEST RESULTS | 4 |
| 2.1 TEST FACILITY | 4 |
| 2.2 MEASUREMENT UNCERTAINTY | 5 |
| 3 . GENERAL INFORMATION | 6 |
| 3.1 GENERAL DESCRIPTION OF EUT | 6 |
| 3.2 DESCRIPTION OF TEST MODES | 7 |
| 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING | 7 |
| 3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 7 |
| 3.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) | 8 |
| 3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS | 9 |
| 4 . EMC EMISSION TEST | 10 |
| 4.1 CONDUCTED EMISSION MEASUREMENT | 10 |
| 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS | 10 |
| 4.1.2 TEST PROCEDURE | 11 |
| 4.1.3 DEVIATION FROM TEST STANDARD | 11 |
| 4.1.4 TEST SETUP | 11 |
| 4.1.5 EUT OPERATING CONDITIONS | 11 |
| 4.2 RADIATED EMISSION MEASUREMENT | 14 |
| 4.2.1 RADIATED EMISSION LIMITS | 14 |
| 4.2.2 TEST PROCEDURE | 15 |
| 4.2.3 DEVIATION FROM TEST STANDARD | 15 |
| 4.2.4 TEST SETUP | 16 |
| 4.2.5 EUT OPERATING CONDITIONS | 17 |
| 4.2.6 TEST RESULTS | 18 |
| 5 . BANDWIDTH TEST | 25 |
| 5.1 APPLIED PROCEDURES / LIMIT | 25 |
| 5.1.1 TEST PROCEDURE | 25 |
| 5.1.2 DEVIATION FROM STANDARD | 25 |
| 5.1.3 TEST SETUP | 25 |
| 5.1.4 EUT OPERATION CONDITIONS | 25 |
| 5.1.5 TEST RESULTS | 26 |
| 6 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE | 31 |
| 6.1 DEVIATION FROM STANDARD | 31 |
| 6.2 TEST SETUP | 31 |
| 6.3 EUT OPERATION CONDITIONS | 31 |
| 6.4 TEST RESULTS | 32 |

| Table of Contents | Page |
|--------------------------------|-------------|
| 7 . ANTENNA REQUIREMENT | 37 |
| 7.1 STANDARD REQUIREMENT | 37 |
| 7.2 EUT ANTENNA | 37 |
| 8 . EUT TEST PHOTO | 38 |
| 9 . EUT PHOTO | 40 |

1. VERSION

| Report No. | Issue Date | Description | Approved |
|-------------------|---------------|-------------|----------|
| BCTC-FY190100072E | Jan. 17, 2019 | Original | Valid |
| | | | |

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.249) , Subpart C | | | |
|---------------------------------|--|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.207 | Conducted Emission | PASS | |
| 15.249 | Fundamental & Radiated Spurious Emission Measurement | PASS | |
| 15.249 | Bandwidth | PASS | |
| 15.205 | Band Edge Emission | PASS | |
| 15.203 | Antenna Requirement | PASS | |

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add.: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

| No. | Item | Uncertainty |
|-----|--|-------------|
| 1 | 3m camber Radiated spurious emission(30MHz-1GHz) | U=4.3dB |
| 2 | 3m chamber Radiated spurious emission(1GHz-18GHz) | U=4.5dB |
| 3 | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=3.34dB |
| 4 | Conducted Adjacent channel power | U=1.38dB |
| 5 | Conducted output power uncertainty Above 1G | U=1.576dB |
| 6 | Conducted output power uncertainty below 1G | U=1.28dB |
| 7 | humidity uncertainty | U=5.3% |
| 8 | Temperature uncertainty | U=0.59℃ |
| 9 | Radiated disturbance(30MHz-1000MHz) | U=4.8dB |
| 10 | Radiated disturbance(1GHz-6GHz) | U=4.9dB |
| 11 | Radiated disturbance(1GHz-18GHz) | U=5.0dB |

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | | | | | | | | | | | |
|-------------------------|--|----------------------|---------------|------------------|----------------|-------------------------|----------|-------------------|-------|----------------------|--------------------|
| Equipment | L4 PowerSound Lamp | | | | | | | | | | |
| Trade Name | N/A | | | | | | | | | | |
| Model Name | 51809836 | | | | | | | | | | |
| Serial Model | L4, DC-1143 | | | | | | | | | | |
| Model Difference | All the model are the same circuit and RF module, Only for different Model name. | | | | | | | | | | |
| Product Description | <table border="1"> <tr> <td>Operation Frequency:</td><td>2402~2480 MHz</td></tr> <tr> <td>Modulation Type:</td><td>GFSK,PI/4 DPSK</td></tr> <tr> <td>Bit Rate of Transmitter</td><td>1M/2Mbps</td></tr> <tr> <td>Number Of Channel</td><td>79 CH</td></tr> <tr> <td>Antenna Designation:</td><td>Please see Note 3.</td></tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p> | Operation Frequency: | 2402~2480 MHz | Modulation Type: | GFSK,PI/4 DPSK | Bit Rate of Transmitter | 1M/2Mbps | Number Of Channel | 79 CH | Antenna Designation: | Please see Note 3. |
| Operation Frequency: | 2402~2480 MHz | | | | | | | | | | |
| Modulation Type: | GFSK,PI/4 DPSK | | | | | | | | | | |
| Bit Rate of Transmitter | 1M/2Mbps | | | | | | | | | | |
| Number Of Channel | 79 CH | | | | | | | | | | |
| Antenna Designation: | Please see Note 3. | | | | | | | | | | |
| Channel List | Please refer to the Note 2. | | | | | | | | | | |
| Power supply | DC 5.0V USB from adapter | | | | | | | | | | |
| Connecting I/O Port(s) | Please refer to the User's Manual | | | | | | | | | | |

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
-

| Channel List | | | | | |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00 | 2402 | 27 | 2429 | 54 | 2456 |
| 01 | 2403 | 28 | 2430 | 55 | 2457 |
| 02 | 2404 | 29 | 2431 | 56 | 2458 |
| 03 | 2405 | 30 | 2432 | 57 | 2459 |
| 04 | 2406 | 31 | 2433 | 58 | 2460 |
| 05 | 2407 | 32 | 2434 | 59 | 2461 |
| 06 | 2408 | 33 | 2435 | 60 | 2462 |
| 07 | 2409 | 34 | 2436 | 61 | 2463 |
| 08 | 2410 | 35 | 2437 | 62 | 2464 |
| 09 | 2411 | 36 | 2438 | 63 | 2465 |
| 10 | 2412 | 37 | 2439 | 64 | 2466 |
| 11 | 2413 | 38 | 2440 | 65 | 2467 |
| 12 | 2414 | 39 | 2441 | 66 | 2468 |
| 13 | 2415 | 40 | 2442 | 67 | 2469 |
| 14 | 2416 | 41 | 2443 | 68 | 2470 |
| 15 | 2417 | 42 | 2444 | 69 | 2471 |

| | | | | | |
|----|------|----|------|----|------|
| 16 | 2418 | 43 | 2445 | 70 | 2472 |
| 17 | 2419 | 44 | 2446 | 71 | 2473 |
| 18 | 2420 | 45 | 2447 | 72 | 2474 |
| 19 | 2421 | 46 | 2448 | 73 | 2475 |
| 20 | 2422 | 47 | 2449 | 74 | 2476 |
| 21 | 2423 | 48 | 2450 | 75 | 2477 |
| 22 | 2424 | 49 | 2451 | 76 | 2478 |
| 23 | 2425 | 50 | 2452 | 77 | 2479 |
| 24 | 2426 | 51 | 2453 | 78 | 2480 |
| 25 | 2427 | 52 | 2454 | | |
| 26 | 2428 | 53 | 2455 | | |

3.

Table for Filed Antenna

| Ant. | Brand | Model Name | Antenna Type | Gain (dBi) | NOTE |
|------|-------|------------|--------------|------------|------|
| 1 | N/A | N/A | PCB antenna | 0 | |

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Test Mode | Test mode | Low channel | Middle channel | High channel |
|-----------|---|-------------|----------------|--------------|
| 1 | Transmitting(GFSK) | 2402MHz | 2441MHz | 2480MHz |
| 2 | Transmitting(Pi/4DQPSK) | 2402MHz | 2441MHz | 2480MHz |
| 3 | Transmitting (conducted emission and Radiated emission) | | | |

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test


3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS


| | | | |
|-----------|----------|----------|----------|
| Frequency | 2402 MHz | 2441 MHz | 2480 MHz |
| Channel | Low | Middle | High |

3.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test



Radiated Spurious Emission



3.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Device Type | Brand | Model | Series No. | Data Cable |
|-----|--------------------------|-------|----------|------------|------------|
| E-1 | L4 PowerSound Lamp | N/A | 51809836 | N/A | EUT |
| E-2 | Adapter | --- | BCTC005 | --- | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|---------------------|
| C1 | NO | NO | 0.8M | DC cable unshielded |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|----------------------------------|--------------|----------------|---------------|------------------|------------------|
| 1 | Spectrum Analyzer (9kHz-26.5GHz) | Agilent | E4407B | MY45109572 | 2018.06.20 | 2019.06.20 |
| 2 | Test Receiver (9kHz-7GHz) | R&S | ESRP | 101154 | 2018.06.20 | 2019.06.20 |
| 3 | Bilog Antenna (30MHz-3GHz) | SCHWARZBEC K | VULB9163 | VULB9163-942 | 2018.06.23 | 2019.06.23 |
| 4 | Horn Antenna (1GHz-18GHz) | SCHWARZBEC K | BBHA9120D | 1541 | 2018.06.23 | 2019.06.22 |
| 5 | Horn Antenna (18GHz-40GHz) | SCHWARZBEC K | BBHA9170 | 822 | 2018.08.06 | 2019.08.06 |
| 6 | Amplifier (9KHz-6GHz) | SCHWARZBEC K | BBV9744 | 9744-0037 | 2018.06.20 | 2019.06.20 |
| 7 | Amplifier (0.5GHz-18GHz) | SCHWARZBEC K | BBV9718 | 9718-309 | 2018.06.20 | 2019.06.20 |
| 8 | Amplifier (18GHz-40GHz) | MITEQ | TTA1840-35-H G | 2034381 | 2018.08.06 | 2019.08.06 |
| 9 | Loop Antenna (9KHz-30MHz) | SCHWARZBEC K | FMZB1519B | 014 | 2018.06.23 | 2019.06.23 |
| 10 | RF cables1 (9kHz-30MHz) | Huber+Suhnar | 9kHz-30MHz | B1702988-0008 | 2018.02.12 | 2019.02.12 |
| 11 | RF cables2 (30MHz-1GHz) | Huber+Suhnar | 30MHz-1GHz | 1486150 | 2018.03.27 | 2019.03.27 |
| 12 | RF cables3 (1GHz-40GHz) | Huber+Suhnar | 1GHz-40GHz | 1607106 | 2018.06.19 | 2019.06.19 |
| 13 | Power Metter | Keysight | E4419 | \ | 2018.04.15 | 2019.04.15 |
| 14 | Power Sensor (AV) | Keysight | E9300A | \ | 2018.04.15 | 2019.04.15 |
| 15 | Signal Analyzer 20kHz-26.5GHz | KEYSIGHT | N9020A | MY49100060 | 2018.07.11 | 2019.07.11 |
| 16 | Test Receiver 9kHz-40GHz | R&S | FSP40 | 100550 | 2018.06.13 | 2019.06.12 |
| 17 | D.C. Power Supply | LongWei | TPR-6405D | \ | \ | \ |
| 18 | Software | Frad | EZ-EMC | FA-03A2 RE | \ | \ |

Conduction Test equipment

| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|---------------|--------------|------------|---------------|------------------|------------------|
| 1 | Test Receiver | R&S | ESR3 | 102075 | 2018.06.20 | 2019.06.20 |
| 2 | LISN | SCHWARZBECK | NSLK8127 | 8127739 | 2018.06.19 | 2019.06.19 |
| 3 | LISN | R&S | ENV216 | 101375 | 2018.06.20 | 2019.06.20 |
| 4 | RF cables | Huber+Suhnar | 9kHz-30MHz | B1702988-0008 | 2018.02.12 | 2019.02.12 |
| 5 | Software | Frad | EZ-EMC | EMC-CON 3A1 | \ | \ |

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit (dBuV) | | Standard |
|-----------------|--------------|-----------|----------|
| | Quas -peak | Average | |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 56.00 | 46.00 | FCC |
| 5.0 -30.0 | 60.00 | 50.00 | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

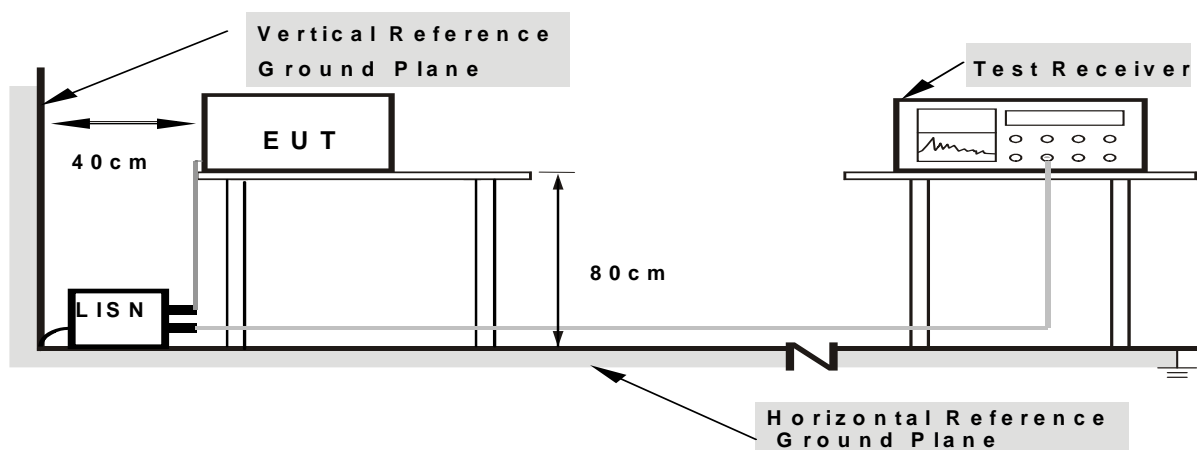

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULTS

| | | | |
|----------------|--------------------------|---------------------|--------|
| Temperature : | 25℃ | Relative Humidity : | 55% |
| Pressure : | 101kPa | Phase : | L |
| Test Voltage : | DC 5.0V USB from adapter | Test Mode : | Mode 3 |

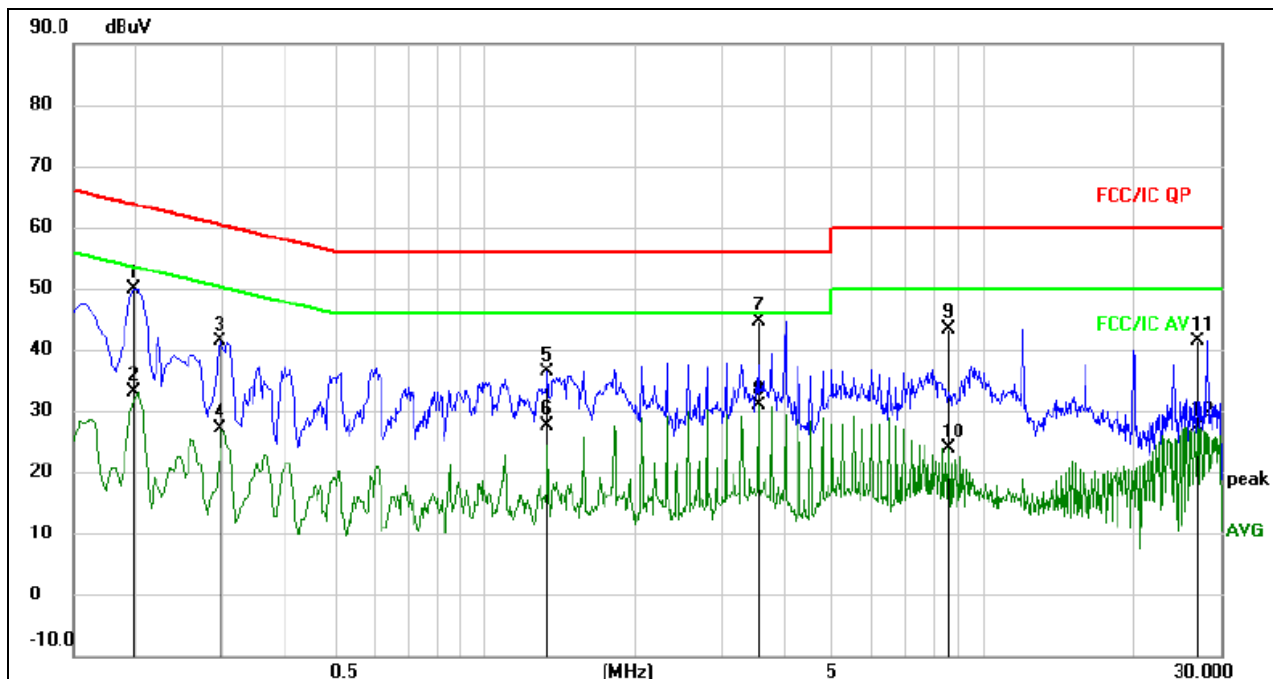


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Over | | |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
| | | MHz | Level | Factor | ment | | | Detector | Comment |
| | | | dBuV | | dBuV | dBuV | dB | | |
| 1 | | 0.1980 | 40.37 | 9.46 | 49.83 | 63.69 | -13.86 | QP | |
| 2 | | 0.1980 | 23.61 | 9.46 | 33.07 | 53.69 | -20.62 | AVG | |
| 3 | | 0.2940 | 31.92 | 9.57 | 41.49 | 60.41 | -18.92 | QP | |
| 4 | | 0.2940 | 17.67 | 9.57 | 27.24 | 50.41 | -23.17 | AVG | |
| 5 | | 1.3380 | 26.76 | 9.58 | 36.34 | 56.00 | -19.66 | QP | |
| 6 | | 1.3380 | 18.03 | 9.58 | 27.61 | 46.00 | -18.39 | AVG | |
| 7 | * | 3.5340 | 34.81 | 9.70 | 44.51 | 56.00 | -11.49 | QP | |
| 8 | | 3.5340 | 21.27 | 9.70 | 30.97 | 46.00 | -15.03 | AVG | |
| 9 | | 8.5300 | 33.69 | 9.70 | 43.39 | 60.00 | -16.61 | QP | |
| 10 | | 8.5300 | 14.17 | 9.70 | 23.87 | 50.00 | -26.13 | AVG | |
| 11 | | 26.9220 | 31.58 | 9.73 | 41.31 | 60.00 | -18.69 | QP | |
| 12 | | 26.9220 | 17.74 | 9.73 | 27.47 | 50.00 | -22.53 | AVG | |

| | | | |
|----------------|--------------------------|---------------------|--------|
| Temperature : | 25℃ | Relative Humidity : | 55% |
| Pressure : | 101kPa | Phase : | N |
| Test Voltage : | DC 5.0V USB from adapter | Test Mode : | Mode 3 |

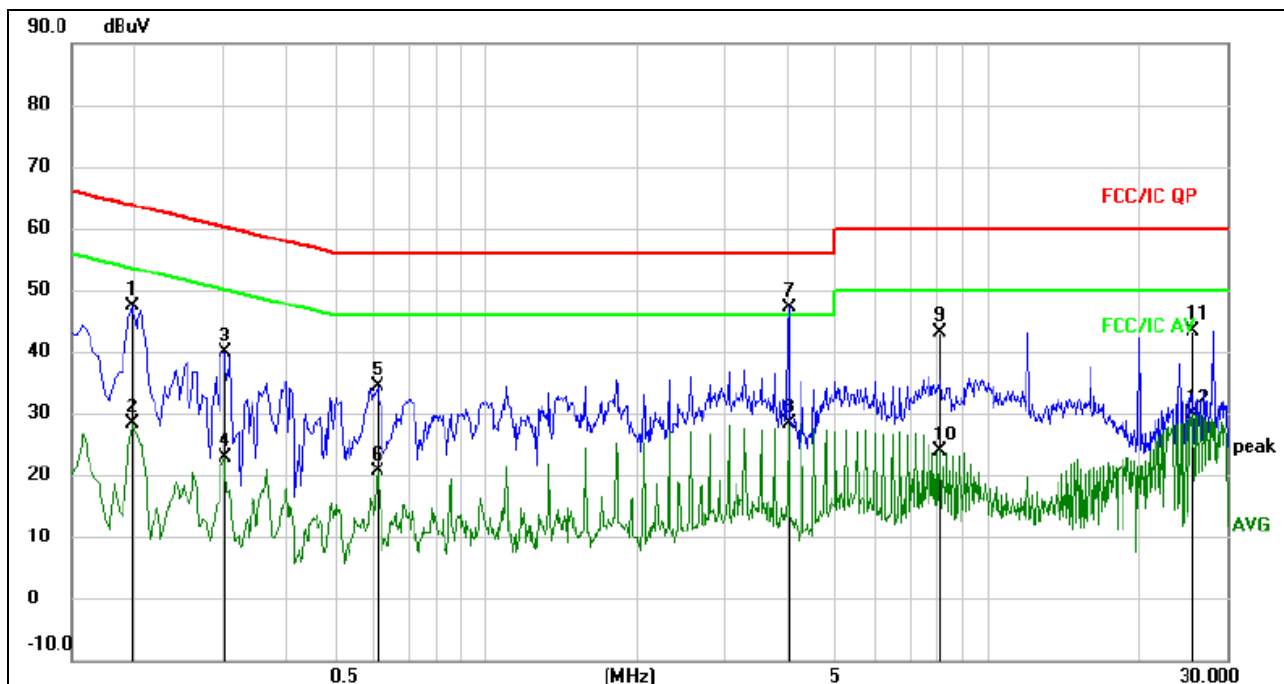

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.1980 | 37.87 | 9.46 | 47.33 | 63.69 | -16.36 | QP | |
| 2 | | 0.1980 | 18.92 | 9.46 | 28.38 | 53.69 | -25.31 | AVG | |
| 3 | | 0.3020 | 30.32 | 9.58 | 39.90 | 60.19 | -20.29 | QP | |
| 4 | | 0.3020 | 13.20 | 9.58 | 22.78 | 50.19 | -27.41 | AVG | |
| 5 | | 0.6100 | 24.31 | 9.96 | 34.27 | 56.00 | -21.73 | QP | |
| 6 | | 0.6100 | 10.62 | 9.96 | 20.58 | 46.00 | -25.42 | AVG | |
| 7 | * | 4.0180 | 37.48 | 9.73 | 47.21 | 56.00 | -8.79 | QP | |
| 8 | | 4.0180 | 18.53 | 9.73 | 28.26 | 46.00 | -17.74 | AVG | |
| 9 | | 8.0380 | 33.53 | 9.71 | 43.24 | 60.00 | -16.76 | QP | |
| 10 | | 8.0380 | 14.29 | 9.71 | 24.00 | 50.00 | -26.00 | AVG | |
| 11 | | 25.6980 | 33.68 | 9.74 | 43.42 | 60.00 | -16.58 | QP | |
| 12 | | 25.6980 | 20.19 | 9.74 | 29.93 | 50.00 | -20.07 | AVG | |

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) | |
|-----------------|------------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz) |
|---|--|
| Below 1.705 | 30 |
| 1.705 – 108 | 1000 |
| 108 – 500 | 2000 |
| 500 – 1000 | 5000 |
| Above 1000 | 5 th harmonic of the highest frequency or 40 GHz, whichever is lower |

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

4.2.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
Note:
Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

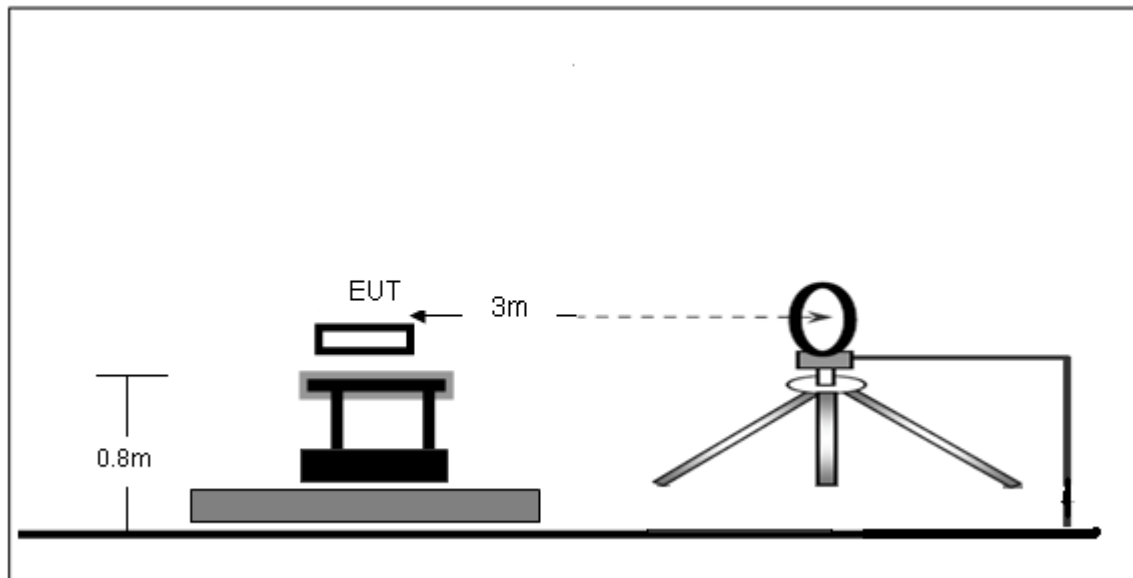

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

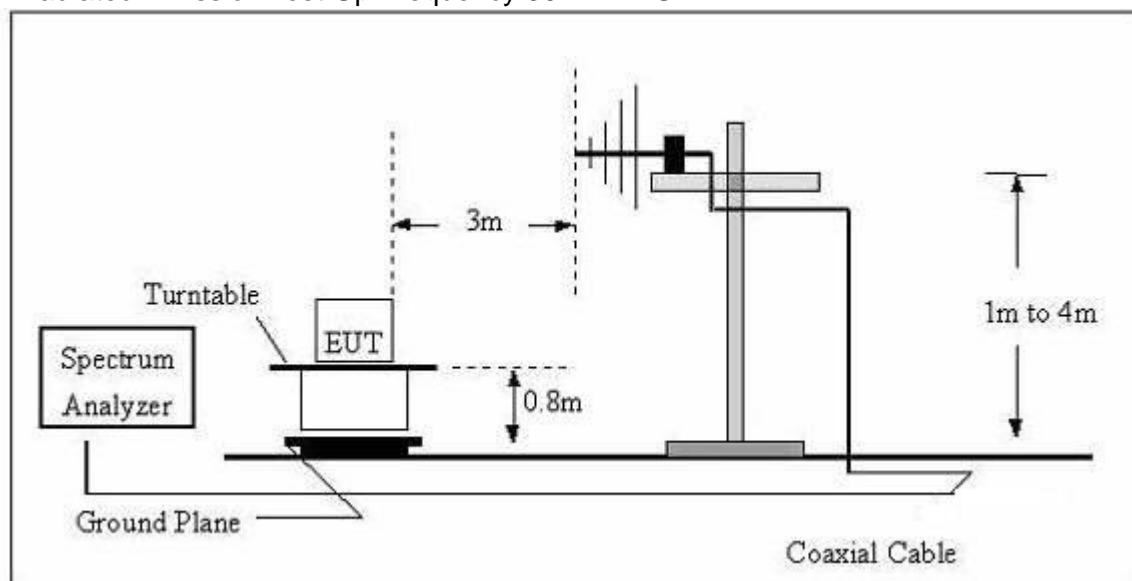

(C) Radiated Emission Test-Up Frequency Above 1GHz

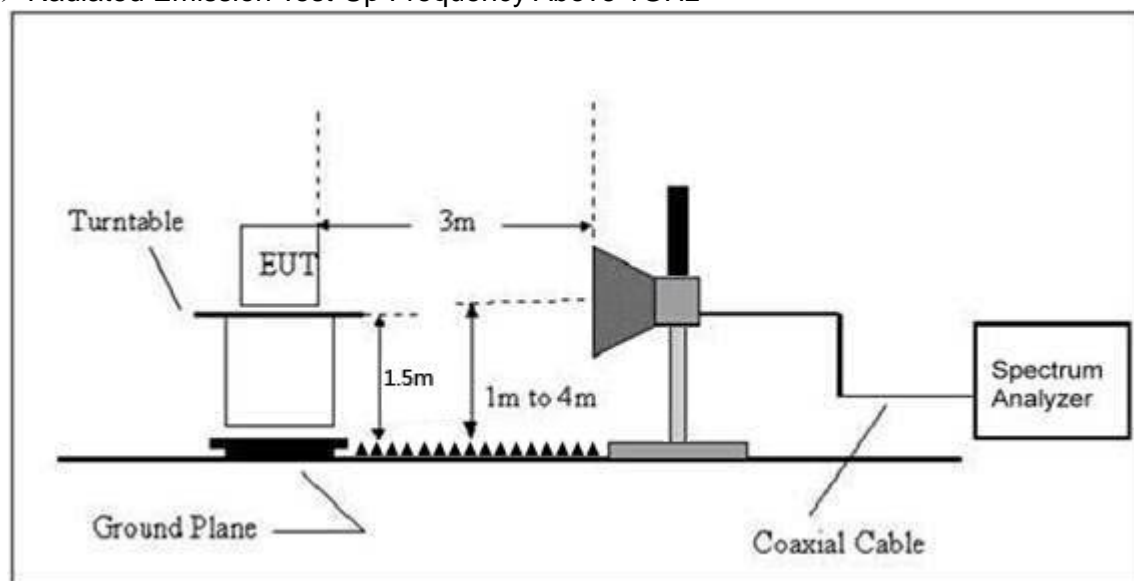

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS

Radiated Spurious Emission (Below 30MHz)

| | | | |
|----------------|--------------------------|---------------------|-----|
| Temperature : | 25℃ | Relative Humidity : | 55% |
| Pressure : | 101 kPa | Polarization : | --- |
| Test Voltage : | DC 5.0V USB from adapter | | |
| Test Mode : | Mode 3 | | |

| Freq. | Reading | Limit | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB) | P/F |
| -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | PASS |

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Radiated Spurious Emission (Between 30MHz – 1GHz)

| | | | |
|------------------------|--------------------------|---------------------|------------|
| Temperature : | 25℃ | Relative Humidity : | 55% |
| Pressure : | 101 kPa | Polarization : | Horizontal |
| Test Voltage : | DC 5.0V USB from adapter | | |
| Test Mode : (Worst) | Mode 3 | | |

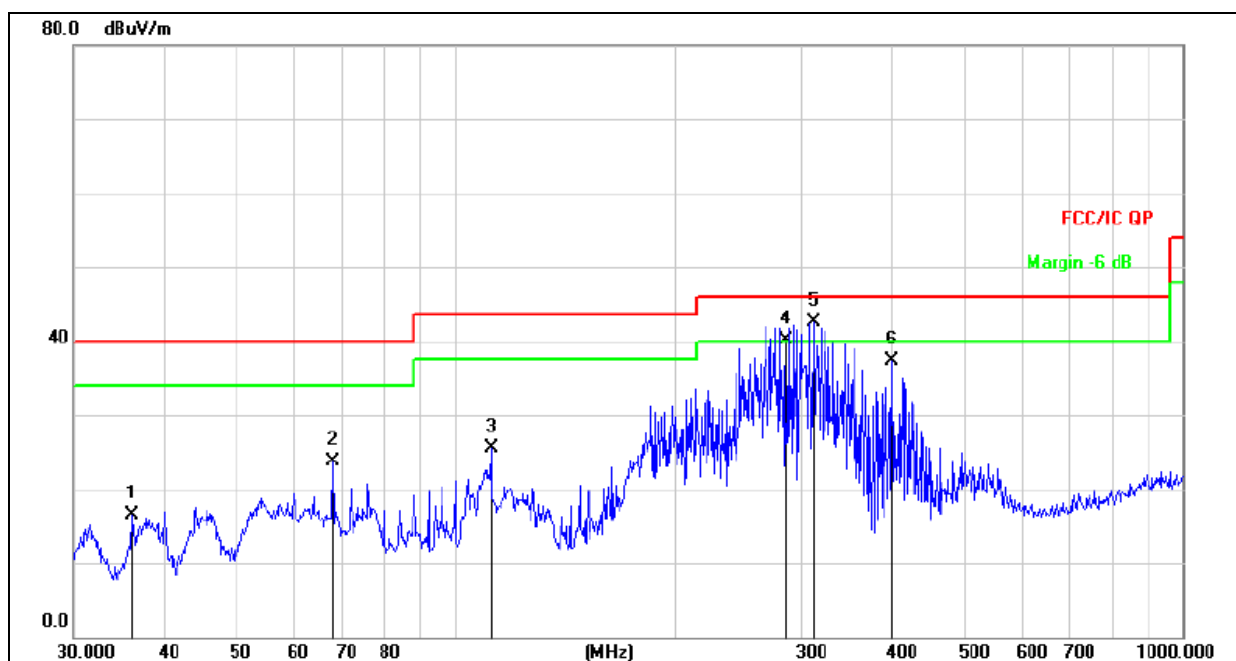


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dB/m | dB | Detector |
| 1 | | 36.0007 | 32.72 | -16.16 | 16.56 | 40.00 | -23.44 | QP |
| 2 | | 68.1512 | 41.46 | -17.77 | 23.69 | 40.00 | -16.31 | QP |
| 3 | | 112.1304 | 42.57 | -17.06 | 25.51 | 43.50 | -17.99 | QP |
| 4 | ! | 284.6080 | 54.14 | -14.08 | 40.06 | 46.00 | -5.94 | QP |
| 5 | * | 311.0867 | 55.77 | -13.30 | 42.47 | 46.00 | -3.53 | QP |
| 6 | | 399.0300 | 48.37 | -11.11 | 37.26 | 46.00 | -8.74 | QP |

| | | | |
|------------------------|--------------------------|---------------------|----------|
| Temperature : | 25℃ | Relative Humidity : | 55% |
| Pressure : | 101 kPa | Polarization : | Vertical |
| Test Voltage : | DC 5.0V USB from adapter | | |
| Test Mode : (Worst) | Mode 3 | | |

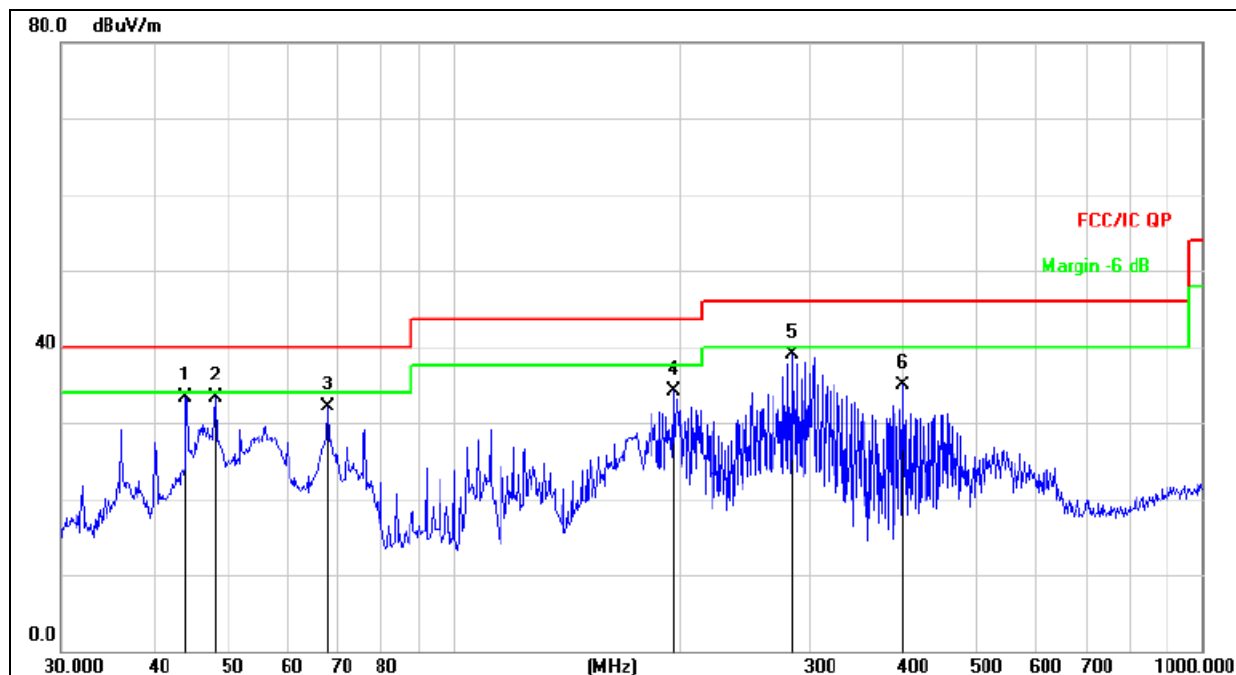

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | * | 43.9658 | 48.57 | -15.19 | 33.38 | 40.00 | -6.62 | QP |
| 2 | | 48.1626 | 48.30 | -14.95 | 33.35 | 40.00 | -6.65 | QP |
| 3 | | 68.1514 | 49.87 | -17.77 | 32.10 | 40.00 | -7.90 | QP |
| 4 | | 196.5098 | 50.66 | -16.52 | 34.14 | 43.50 | -9.36 | QP |
| 5 | | 282.9852 | 53.01 | -14.13 | 38.88 | 46.00 | -7.12 | QP |
| 6 | | 399.0302 | 46.07 | -11.11 | 34.96 | 46.00 | -11.04 | QP |

Radiated Spurious Emission (1GHz to 10th harmonics)

GFSK

| Polar (H/V) | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB/m) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------|-----------------|----------------------|--------------------|-----------------|-----------------------|-------------------------|-----------------|-------------|---------------|
| Low Channel 2402MHz | | | | | | | | | |
| V | 2402.00 | 103.43 | 38.06 | 7.42 | 20.15 | 92.94 | 114.00 | -21.06 | PK |
| V | 2402.00 | 91.21 | 38.06 | 7.42 | 20.15 | 80.72 | 94.00 | -13.28 | AV |
| V | 4804.00 | 53.04 | 38.53 | 7.78 | 23.25 | 45.54 | 74.00 | -28.46 | PK |
| V | 4804.00 | 42.64 | 38.53 | 7.78 | 23.25 | 35.14 | 54.00 | -18.86 | AV |
| V | 16132.00 | 43.51 | 38.75 | 10.36 | 26.57 | 41.69 | 74.00 | -32.31 | PK |
| H | 2402.00 | 103.48 | 38.06 | 7.42 | 20.15 | 92.99 | 114.00 | -21.01 | PK |
| H | 2402.00 | 91.63 | 38.06 | 7.42 | 20.15 | 81.14 | 94.00 | -12.86 | AV |
| H | 4804.00 | 54.33 | 38.53 | 7.78 | 23.25 | 46.83 | 74.00 | -27.17 | PK |
| H | 4804.00 | 41.98 | 38.53 | 7.78 | 23.25 | 34.48 | 54.00 | -19.52 | AV |
| H | 16132.00 | 44.12 | 38.75 | 10.36 | 26.57 | 42.30 | 74.00 | -31.70 | PK |
| Middle Channel 2441MHz | | | | | | | | | |
| V | 2441.00 | 103.62 | 38.11 | 7.44 | 20.36 | 93.31 | 114.00 | -20.69 | PK |
| V | 2441.00 | 91.63 | 38.11 | 7.44 | 20.36 | 81.32 | 94.00 | -12.68 | AV |
| V | 4882.00 | 52.43 | 38.65 | 7.8 | 23.61 | 45.19 | 74.00 | -28.81 | PK |
| V | 4882.00 | 42.10 | 38.65 | 7.8 | 23.61 | 34.86 | 54.00 | -19.14 | AV |
| V | 16132.00 | 44.11 | 38.75 | 10.36 | 26.57 | 42.29 | 74.00 | -31.71 | PK |
| H | 2441.00 | 102.29 | 38.11 | 7.44 | 20.36 | 91.98 | 114.00 | -22.02 | PK |
| H | 2441.00 | 90.21 | 38.11 | 7.44 | 20.36 | 79.90 | 94.00 | -14.10 | AV |
| H | 4882.00 | 54.30 | 38.65 | 7.8 | 23.61 | 47.06 | 74.00 | -26.94 | PK |
| H | 4882.00 | 41.81 | 38.65 | 7.8 | 23.61 | 34.57 | 54.00 | -19.43 | AV |
| H | 16132.00 | 45.03 | 38.75 | 10.36 | 26.57 | 43.21 | 74.00 | -30.79 | PK |
| High Channel 2480MHz | | | | | | | | | |
| V | 2480.00 | 103.22 | 38.17 | 7.47 | 20.51 | 93.03 | 114.00 | -20.97 | PK |
| V | 2480.00 | 90.23 | 38.17 | 7.47 | 20.51 | 80.04 | 94.00 | -13.96 | AV |
| V | 4960.00 | 51.46 | 38.69 | 7.83 | 23.83 | 44.43 | 74.00 | -29.57 | PK |
| V | 4960.00 | 41.81 | 38.69 | 7.83 | 23.83 | 34.78 | 54.00 | -19.22 | AV |
| V | 16132.00 | 43.05 | 38.75 | 10.36 | 26.57 | 41.23 | 74.00 | -32.77 | PK |
| H | 2480.00 | 103.13 | 38.17 | 7.47 | 20.51 | 92.94 | 114.00 | -21.06 | PK |
| H | 2480.00 | 91.35 | 38.17 | 7.47 | 20.51 | 81.16 | 94.00 | -12.84 | AV |
| H | 4960.00 | 54.35 | 38.69 | 7.83 | 23.83 | 47.32 | 74.00 | -26.68 | PK |
| H | 4960.00 | 42.41 | 38.69 | 7.83 | 23.83 | 35.38 | 54.00 | -18.62 | AV |
| H | 16132.00 | 44.26 | 38.75 | 10.36 | 26.57 | 42.44 | 74.00 | -31.56 | PK |

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

PI/4 DPSK

| Polar (H/V) | Frequency (MHz) | Meter Reading (dBuV) | Pre-amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB/m) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------|-----------------|----------------------|--------------------|-----------------|-----------------------|-------------------------|-----------------|-------------|---------------|
| Low Channel 2402MHz | | | | | | | | | |
| V | 2402.00 | 101.65 | 38.06 | 7.42 | 20.15 | 91.16 | 114.00 | -22.84 | PK |
| V | 2402.00 | 89.27 | 38.06 | 7.42 | 20.15 | 78.78 | 94.00 | -15.22 | AV |
| V | 4804.00 | 52.92 | 38.53 | 7.78 | 23.25 | 45.42 | 74.00 | -28.58 | PK |
| V | 4804.00 | 42.91 | 38.53 | 7.78 | 23.25 | 35.41 | 54.00 | -18.59 | AV |
| V | 16132.00 | 43.61 | 38.75 | 10.36 | 26.57 | 41.79 | 74.00 | -32.21 | PK |
| H | 2402.00 | 102.00 | 38.06 | 7.42 | 20.15 | 91.51 | 114.00 | -22.49 | PK |
| H | 2402.00 | 90.36 | 38.06 | 7.42 | 20.15 | 79.87 | 94.00 | -14.13 | AV |
| H | 4804.00 | 53.04 | 38.53 | 7.78 | 23.25 | 45.54 | 74.00 | -28.46 | PK |
| H | 4804.00 | 43.94 | 38.53 | 7.78 | 23.25 | 36.44 | 54.00 | -17.56 | AV |
| H | 16132.00 | 44.58 | 38.75 | 10.36 | 26.57 | 42.76 | 74.00 | -31.24 | PK |
| Middle Channel 2441MHz | | | | | | | | | |
| V | 2441.00 | 100.67 | 38.11 | 7.44 | 20.36 | 90.36 | 114.00 | -23.64 | PK |
| V | 2441.00 | 89.13 | 38.11 | 7.44 | 20.36 | 78.82 | 94.00 | -15.18 | AV |
| V | 4882.00 | 51.66 | 38.65 | 7.8 | 23.61 | 44.42 | 74.00 | -29.58 | PK |
| V | 4882.00 | 41.91 | 38.65 | 7.8 | 23.61 | 34.67 | 54.00 | -19.33 | AV |
| V | 16132.00 | 43.05 | 38.75 | 10.36 | 26.57 | 41.23 | 74.00 | -32.77 | PK |
| H | 2441.00 | 100.42 | 38.11 | 7.44 | 20.36 | 90.11 | 114.00 | -23.89 | PK |
| H | 2441.00 | 90.52 | 38.11 | 7.44 | 20.36 | 80.21 | 94.00 | -13.79 | AV |
| H | 4882.00 | 53.02 | 38.65 | 7.8 | 23.61 | 45.78 | 74.00 | -28.22 | PK |
| H | 4882.00 | 44.59 | 38.65 | 7.8 | 23.61 | 37.35 | 54.00 | -16.65 | AV |
| H | 16132.00 | 45.65 | 38.75 | 10.36 | 26.57 | 43.83 | 74.00 | -30.17 | PK |
| High Channel 2480MHz | | | | | | | | | |
| V | 2480.00 | 101.54 | 38.17 | 7.47 | 20.51 | 91.35 | 114.00 | -22.65 | PK |
| V | 2480.00 | 88.15 | 38.17 | 7.47 | 20.51 | 77.96 | 94.00 | -16.04 | AV |
| V | 4960.00 | 51.40 | 38.69 | 7.83 | 23.83 | 44.37 | 74.00 | -29.63 | PK |
| V | 4960.00 | 42.60 | 38.69 | 7.83 | 23.83 | 35.57 | 54.00 | -18.43 | AV |
| V | 16132.00 | 43.76 | 38.75 | 10.36 | 26.57 | 41.94 | 74.00 | -32.06 | PK |
| H | 2480.00 | 98.80 | 38.17 | 7.47 | 20.51 | 88.61 | 114.00 | -25.39 | PK |
| H | 2480.00 | 89.79 | 38.17 | 7.47 | 20.51 | 79.60 | 94.00 | -14.40 | AV |
| H | 4960.00 | 53.95 | 38.69 | 7.83 | 23.83 | 46.92 | 74.00 | -27.08 | PK |
| H | 4960.00 | 45.59 | 38.69 | 7.83 | 23.83 | 38.56 | 54.00 | -15.44 | AV |
| H | 16132.00 | 46.20 | 38.75 | 10.36 | 26.57 | 44.38 | 74.00 | -29.62 | PK |


Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


CONDUCTED EMISSION MEASUREMENT

GFSK


Low Channel 2402MHz

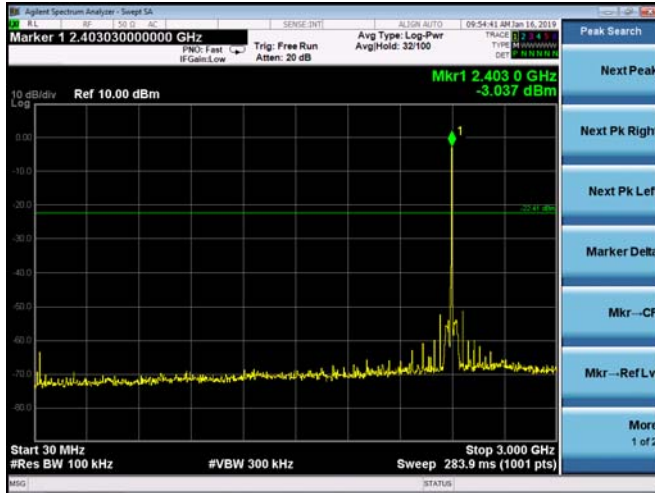

Middle Channel 2441MHz

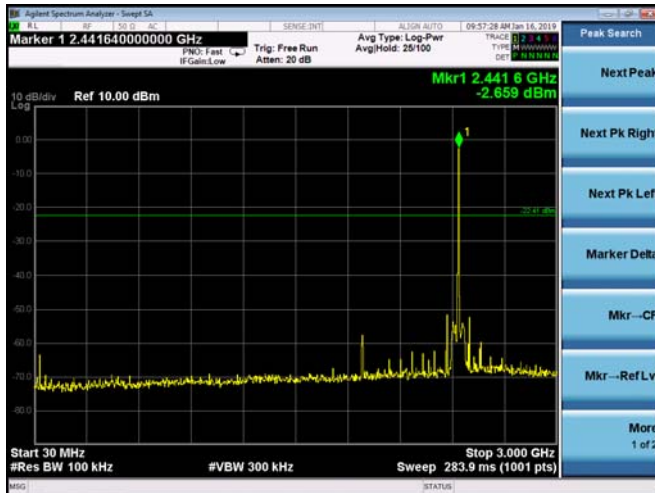


High Channel 2480MHz

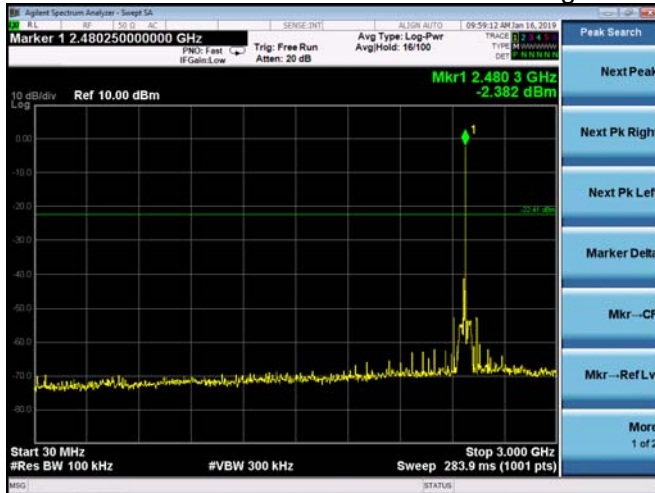


PI/4 DPSK


Low Channel 2402MHz

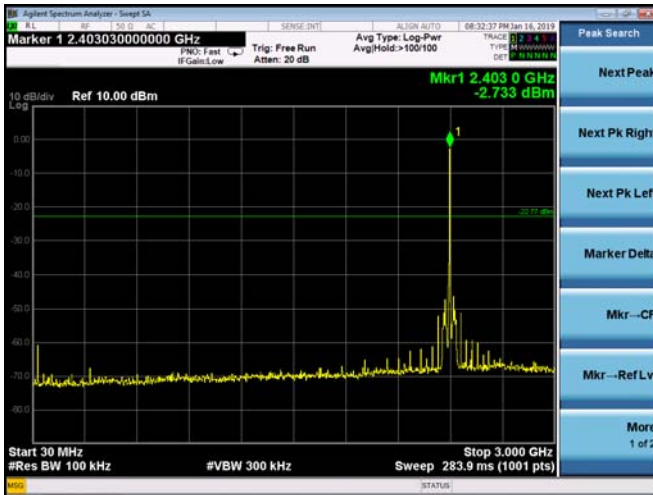

Middle Channel 2441MHz

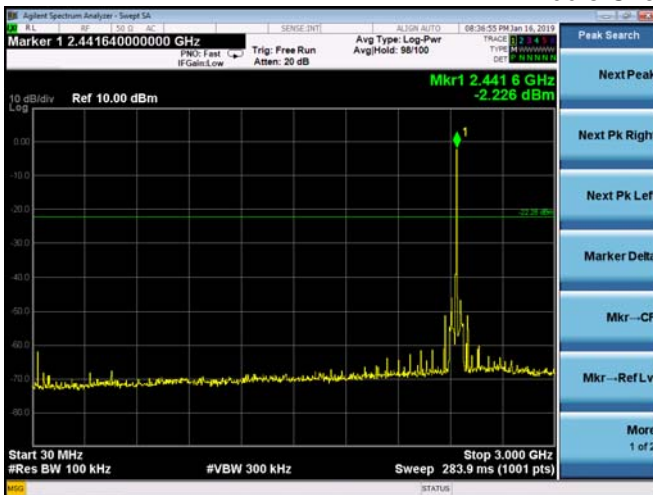

High Channel 2480MHz

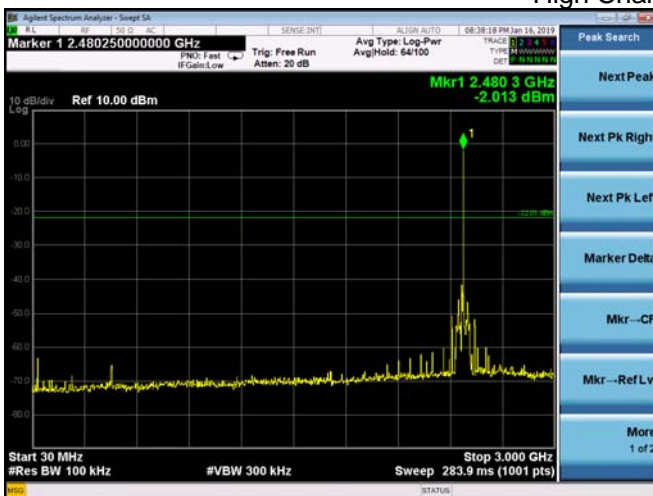

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.249) , Subpart C | | | | |
|---------------------------------|-----------|------------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.249 | Bandwidth | (20dB bandwidth) | 2400-2483.5 | PASS |

| Spectrum Parameter | Setting |
|--------------------|---|
| Attenuation | Auto |
| Span Frequency | > Measurement Bandwidth or Channel Separation |
| RB | 100KHz |
| VB | \geq RBW |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW \geq RBW, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.5 TEST RESULTS

| | | | |
|---------------|---------------|---------------------|--------------------------|
| Temperature : | 25°C | Relative Humidity : | 55% |
| Pressure : | 101 kPa | Test Voltage : | DC 5.0V USB from adapter |
| Test Mode : | CH00/CH39/C78 | | |


| | Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|-----------|----------------------|-------------|
| GFSK | 2402 MHz | 1076 | PASS |
| | 2441 MHz | 1077 | PASS |
| | 2480 MHz | 1072 | PASS |
| PI/4 DPSK | 2402 MHz | 1364 | PASS |
| | 2441 MHz | 1361 | PASS |
| | 2480 MHz | 1349 | PASS |

GFSK


CH00

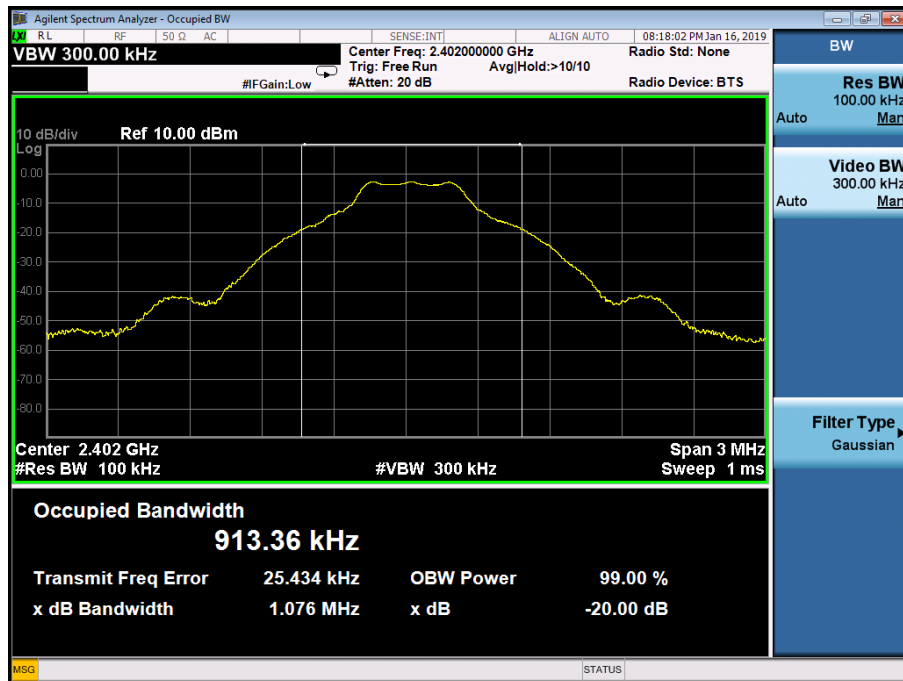

CH39

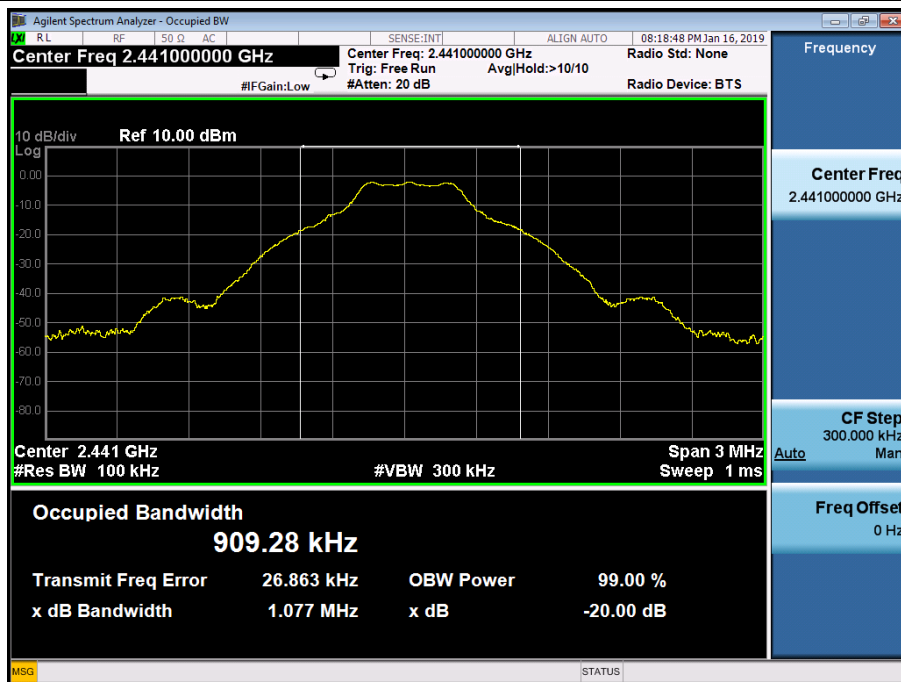


CH78

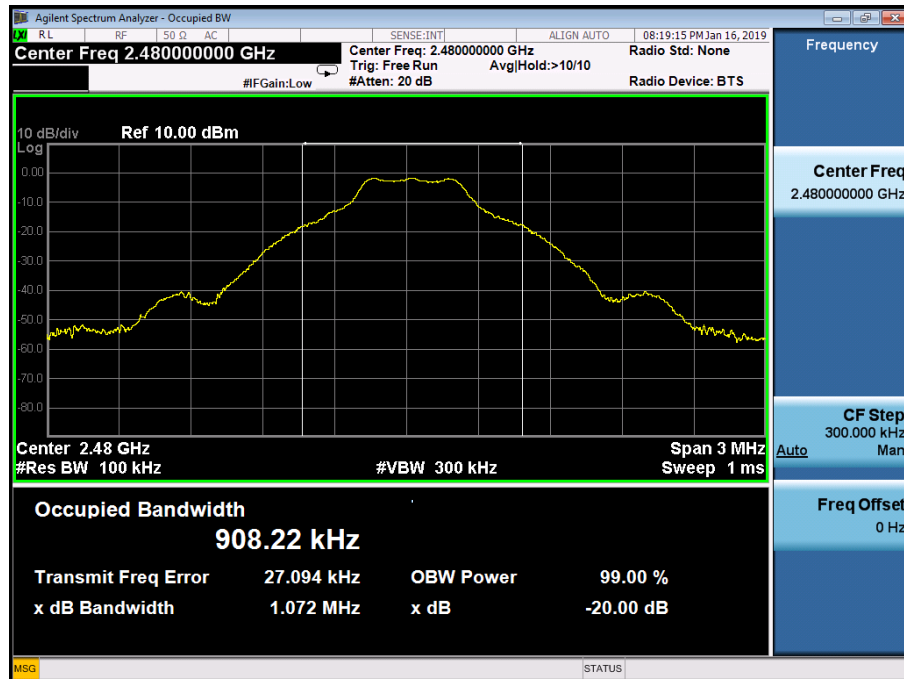



PI/4 DPSK

CH00

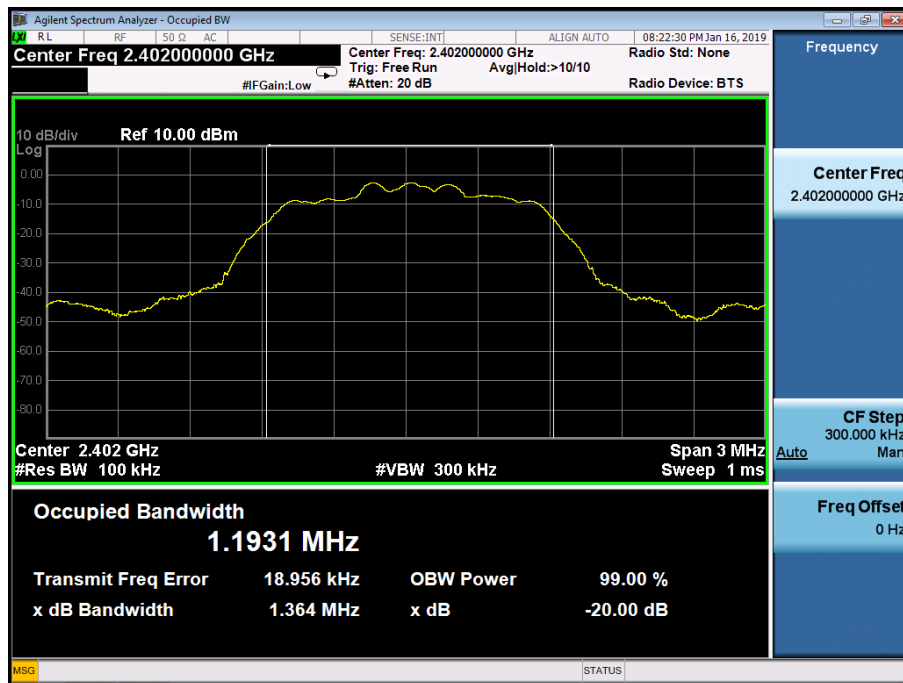

CH39

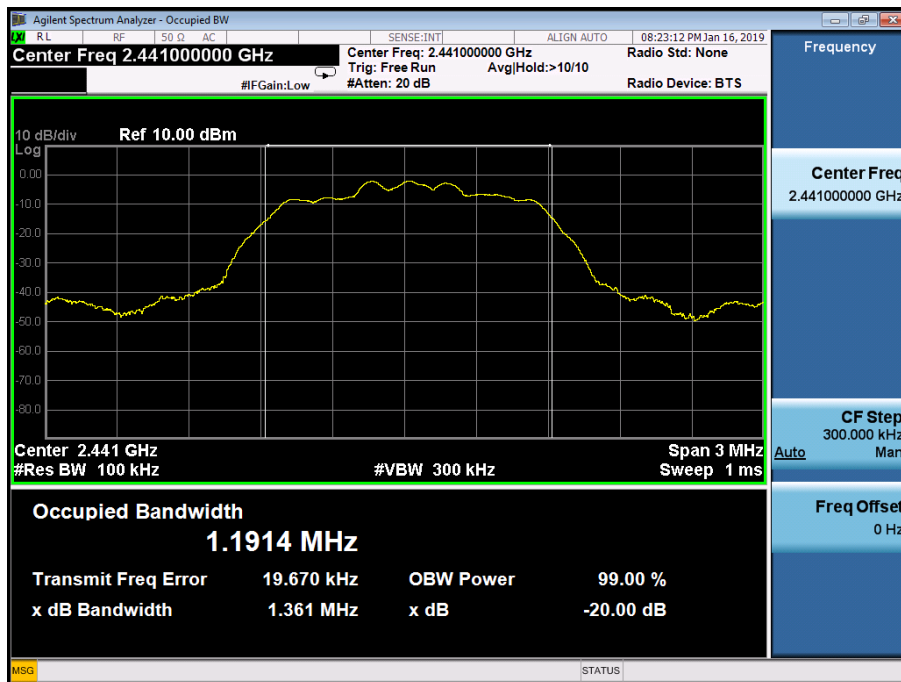

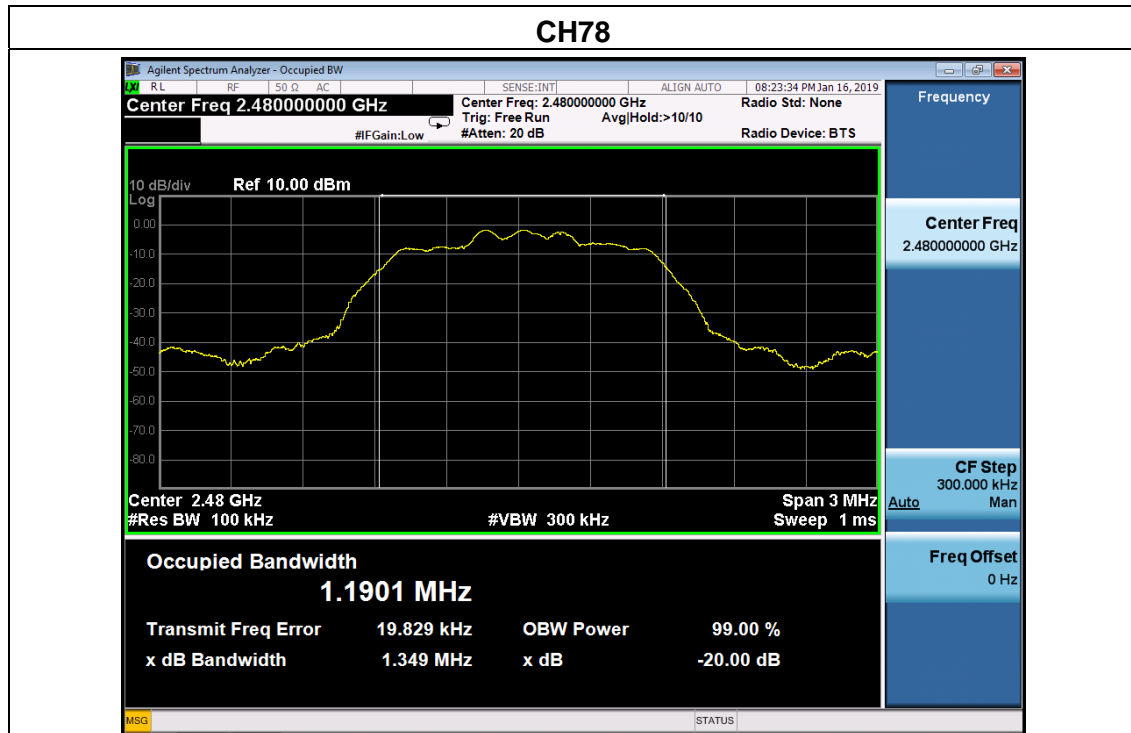

6. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) i) VBW for Peak, Quasi-peak, or Average Detector Function: $3 \times \text{RBW}$
- d) Repeat above procedures until all measured frequencies were complete.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

6.1 DEVIATION FROM STANDARD

No deviation.

6.2 TEST SETUP

6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.4 TEST RESULTS

| | | | |
|---------------|-----------|---------------------|--------------------------|
| Temperature : | 25℃ | Relative Humidity : | 55% |
| Pressure : | 101 kPa | Test Voltage : | DC 5.0V USB from adapter |
| Test Mode : | CH00/CH78 | | |


| | Polar (H/V) | Frequency (MHz) | Meter Reading (dBuV) | Pre- amplifier (dB) | Cable Loss (dB) | Antenna Factor (dB/m) | Emission evel (dBuV/m) | Limits (dBuV/m) | | Result |
|--------------|----------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|------------------------------|--------------------|-------|--------|
| | | | | | | | PK | PK | AV | |
| GFSK | Low Channel 2402MHz | | | | | | | | | |
| | H | 2390.00 | 54.50 | 38.06 | 7.42 | 20.15 | 44.01 | 74.00 | 54.00 | PASS |
| | H | 2400.00 | 59.10 | 38.06 | 7.42 | 20.15 | 48.61 | 74.00 | 54.00 | PASS |
| | V | 2390.00 | 53.79 | 38.06 | 7.42 | 20.15 | 43.30 | 74.00 | 54.00 | PASS |
| | V | 2400.00 | 59.73 | 38.06 | 7.42 | 20.15 | 49.24 | 74.00 | 54.00 | PASS |
| | High Channel 2480MHz | | | | | | | | | |
| | H | 2483.50 | 56.12 | 38.17 | 7.45 | 20.54 | 45.94 | 74.00 | 54.00 | PASS |
| | H | 2485.50 | 59.43 | 38.17 | 7.45 | 20.54 | 49.25 | 74.00 | 54.00 | PASS |
| | V | 2483.50 | 54.73 | 38.2 | 7.45 | 20.54 | 44.52 | 74.00 | 54.00 | PASS |
| | V | 2485.50 | 60.06 | 38.2 | 7.45 | 20.54 | 49.85 | 74.00 | 54.00 | PASS |
| PI/4 DPSK | Low Channel 2402MHz | | | | | | | | | |
| | H | 2390.00 | 57.18 | 38.06 | 7.42 | 20.15 | 46.69 | 74.00 | 54.00 | PASS |
| | H | 2400.00 | 59.77 | 38.06 | 7.42 | 20.15 | 49.28 | 74.00 | 54.00 | PASS |
| | V | 2390.00 | 53.84 | 38.06 | 7.42 | 20.15 | 43.35 | 74.00 | 54.00 | PASS |
| | V | 2400.00 | 58.18 | 38.06 | 7.42 | 20.15 | 47.69 | 74.00 | 54.00 | PASS |
| | High Channel 2480MHz | | | | | | | | | |
| | H | 2483.50 | 55.15 | 38.17 | 7.45 | 20.54 | 44.97 | 74.00 | 54.00 | PASS |
| | H | 2485.50 | 59.65 | 38.17 | 7.45 | 20.54 | 49.47 | 74.00 | 54.00 | PASS |
| | V | 2483.50 | 54.28 | 38.2 | 7.45 | 20.54 | 44.07 | 74.00 | 54.00 | PASS |
| | V | 2485.50 | 59.43 | 38.2 | 7.45 | 20.54 | 49.22 | 74.00 | 54.00 | PASS |

Remark:


1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

GFSK


2402MHz Horizontal

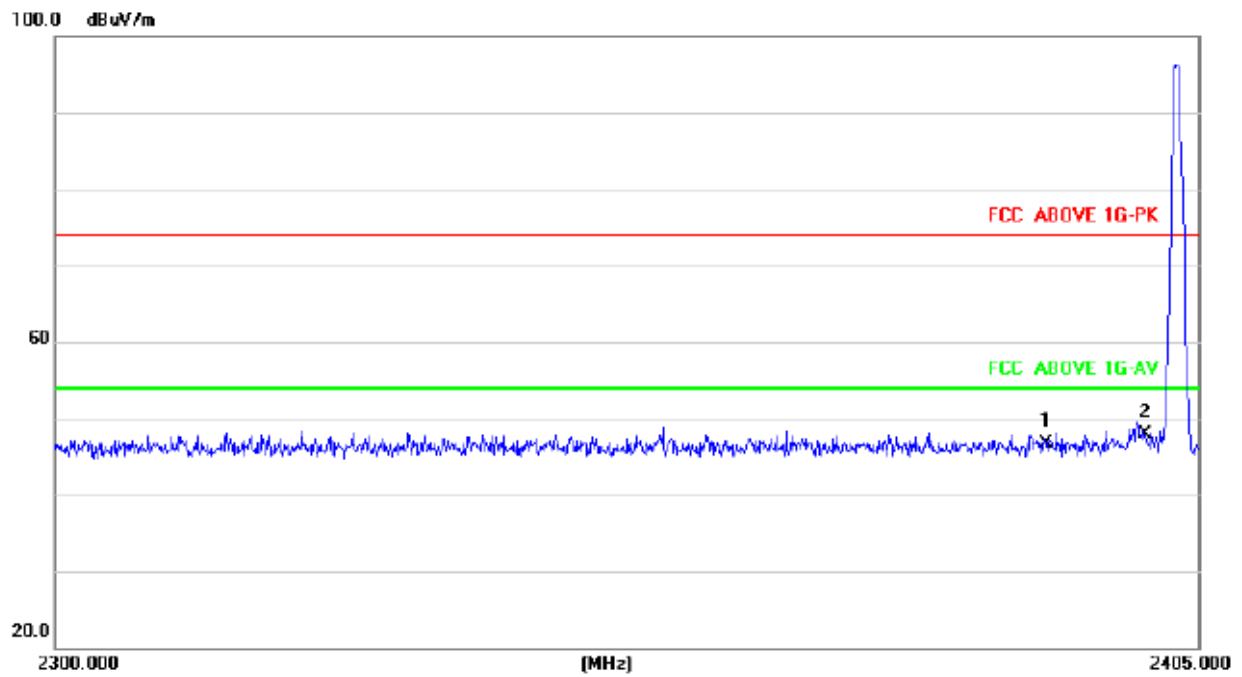


2402MHz Vertical

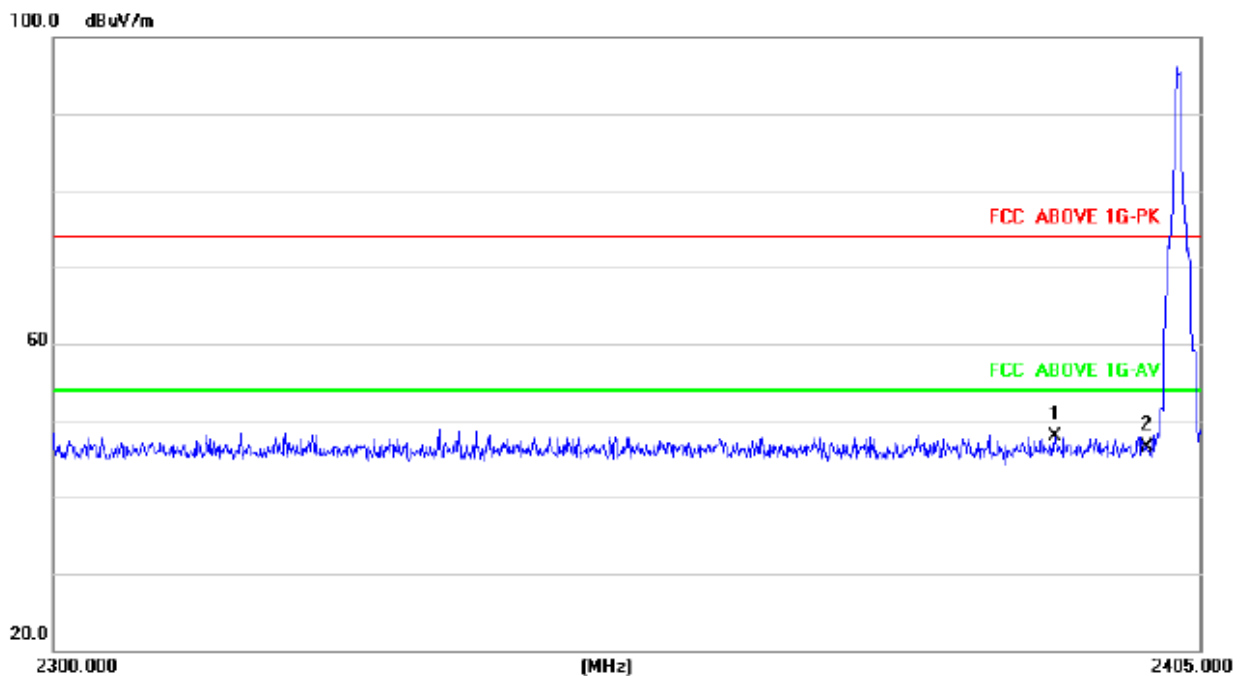

2480MHz Horizontal

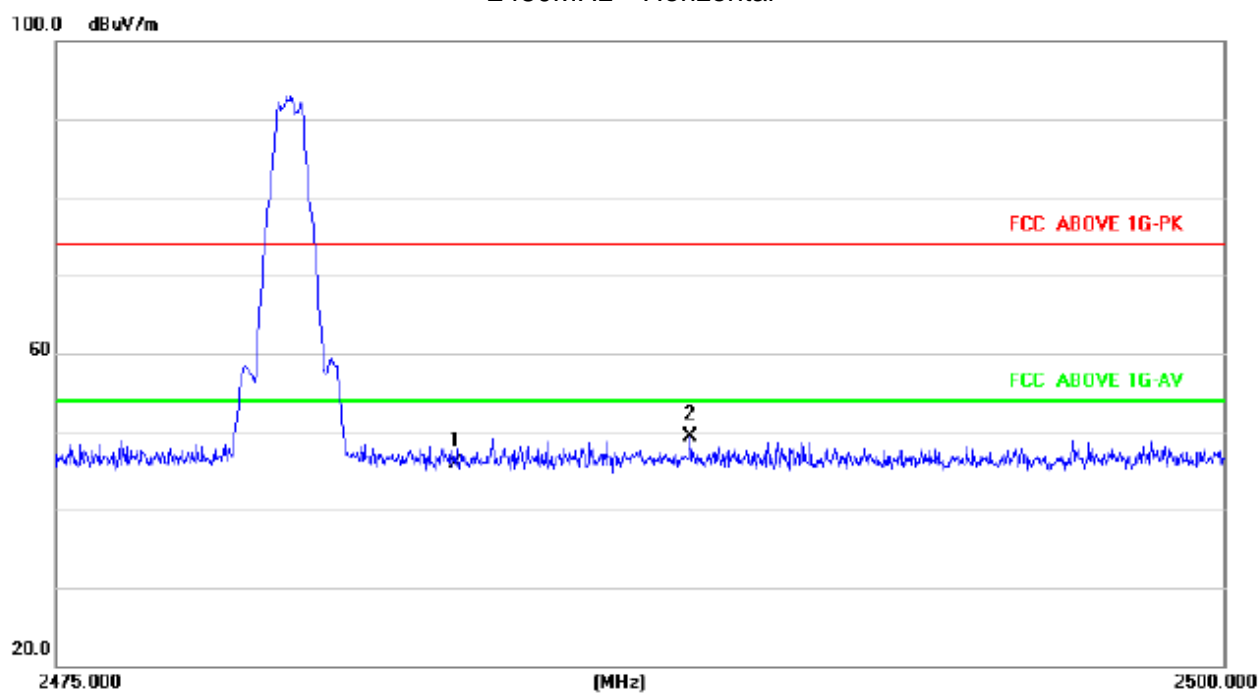


2480MHz Vertical

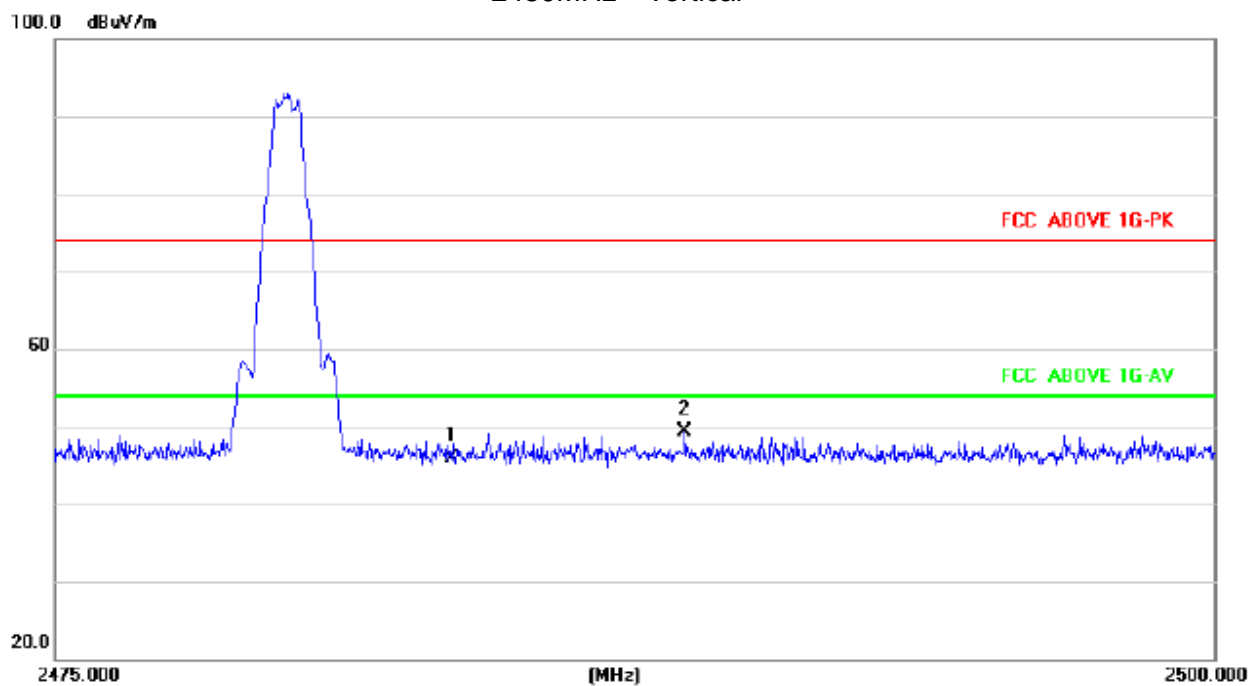


PI/4 DPSK


2402MHz Horizontal

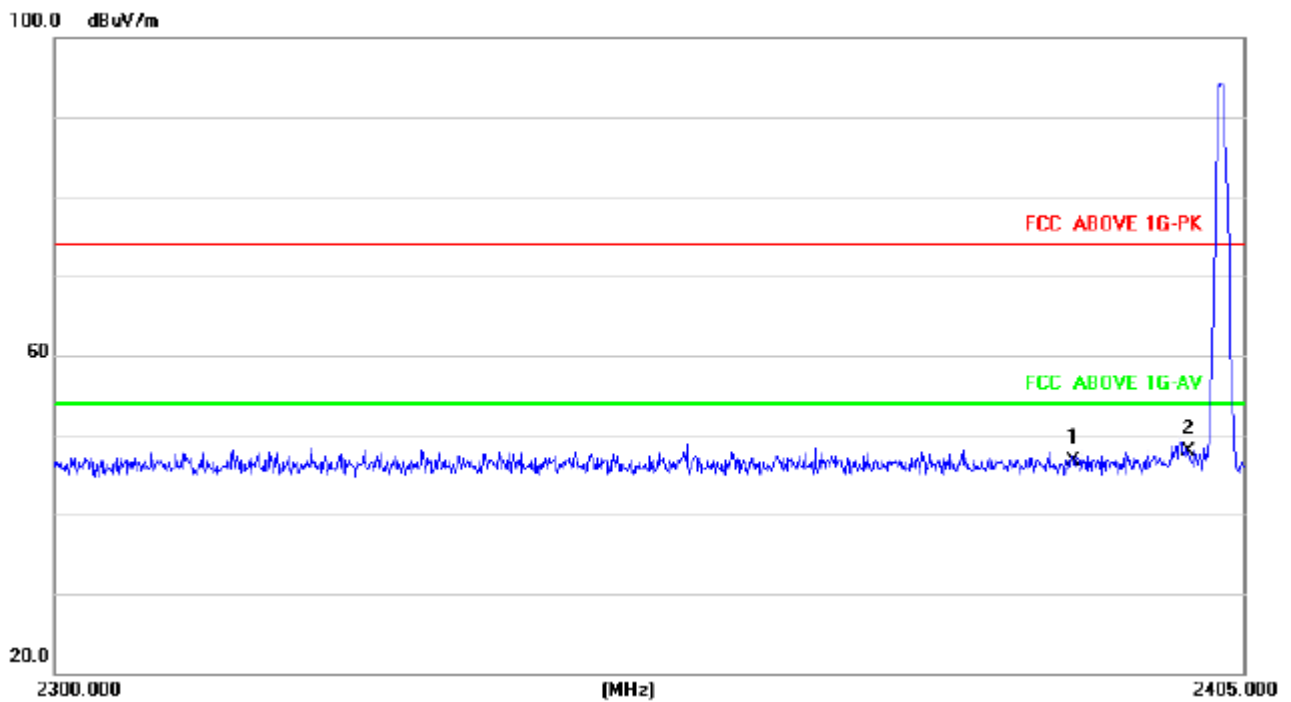


2402MHz Vertical

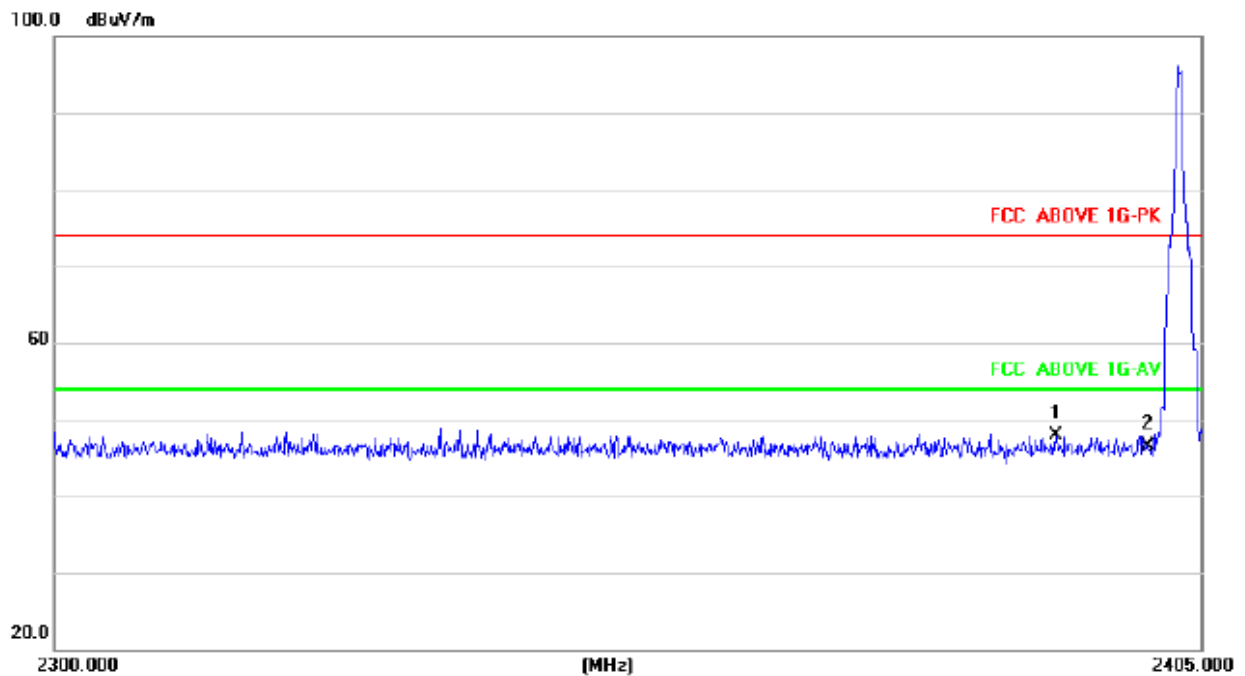

2480MHz Horizontal

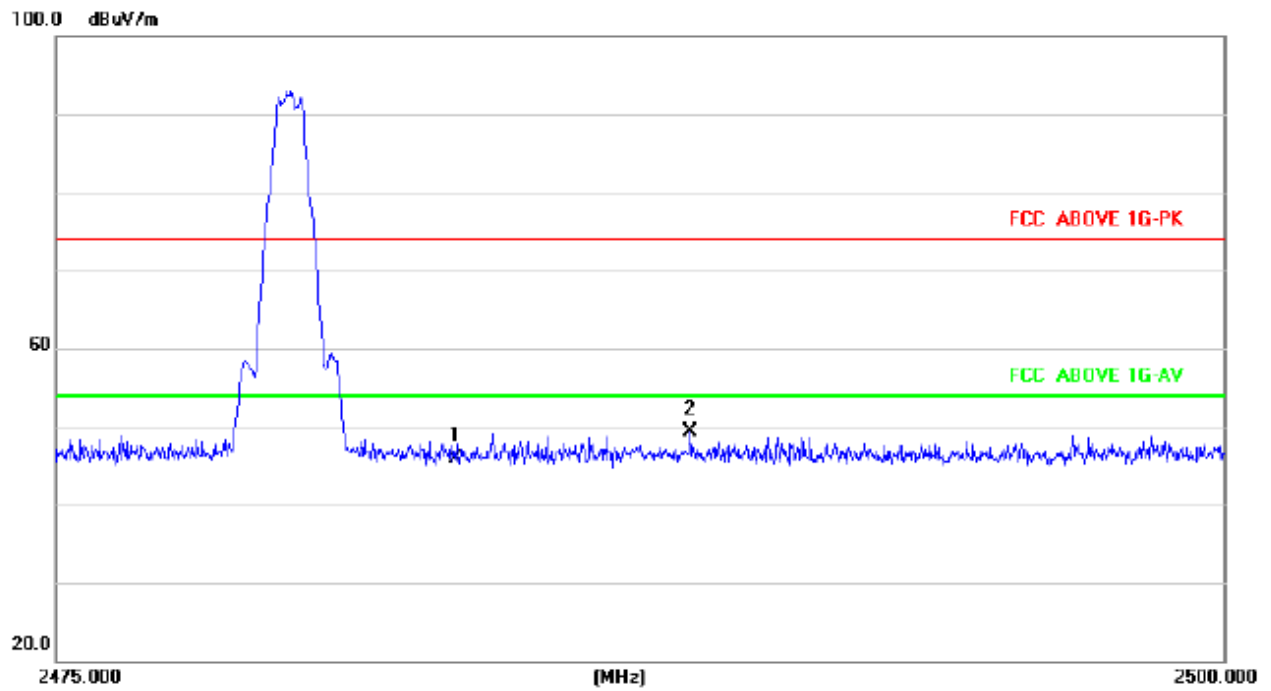

2480MHz Vertical

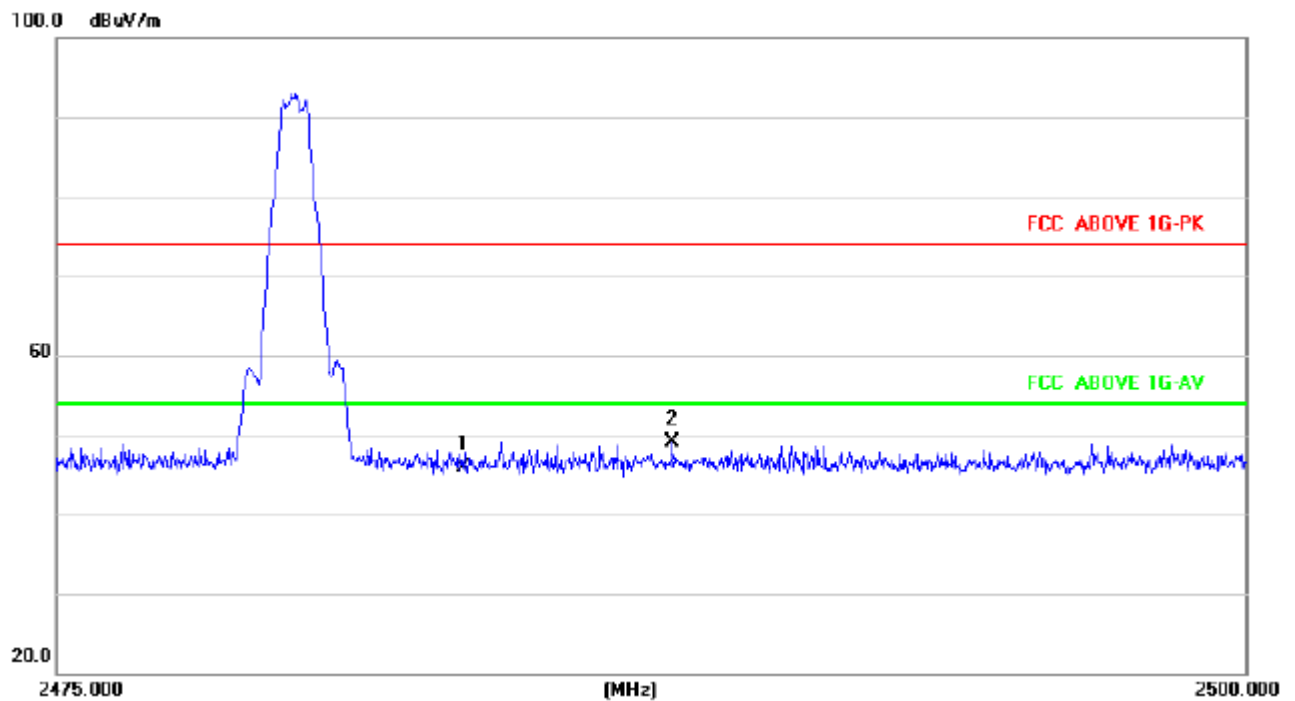

7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is PCB antenna, It complies with the standard requirement.

8. EUT TEST PHOTO


Radiated Measurement Photos



Conducted emissions



9. EUT PHOTO

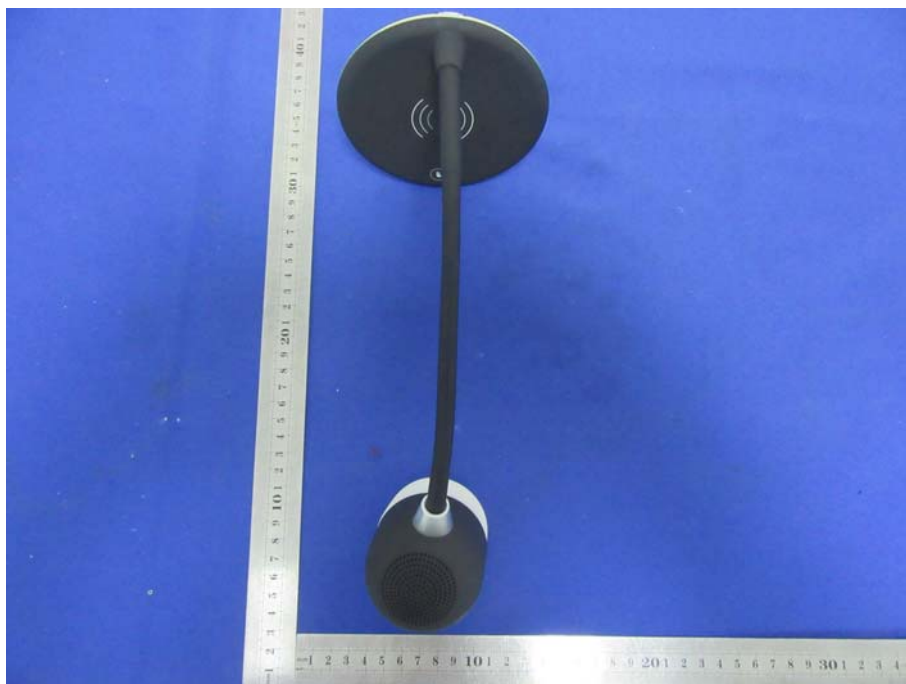

***** END OF REPORT *****