

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPARTC REQUIREMENT**

*OF*

**Vibration Speaker**

**MODEL No.: DAIDT05**

**FCC ID: 2AA9Y-DAIDT05**

**Trademark: Damson**

**REPORT NO: ES130923177E**

**ISSUE DATE: September 30, 2014**

*Prepared for*  
**Damson Limited**

**Crooked Lane, Kirk Hammerton, York, YO26 8DG, UK**

*Prepared by*  
**SHENZHEN EMTEK CO., LTD**

**Bldg 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China  
TEL: 86-755-26954280  
FAX: 86-755-26954282**

## VERIFICATION OF COMPLIANCE

Applicant:	Damson Limited Crooked Lane, Kirk Hammerton, York, YO26 8DG, UK
Manufacturer:	Newadin Industrial Co., Limited Floor 5th, Building C2, No.8, Zaohekeng Industrialarea, Jixia, Buji Town, Longgang District, Shenzhen, China
Product Description:	Vibration Speaker
Model Number:	DAIDT05
Serial Number:	N/A
Trade Mark:	Damson
File Number:	ES130923177E
Date of Test:	September 15, 2014 to September 30, 2014


### We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : September 15, 2014 to September 30, 2014

Prepared by :   
Joe Xia/Editor

Reviewer :   
June Xie/Supervisor

Approve & Authorized Signer :   
Lisa Wang/Manager

## Table of Contents

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	Product Description.....	5
1.2	Related Submittal(s) / Grant (s).....	5
1.3	Test Methodology .....	5
1.4	Special Accessories.....	5
1.5	Equipment Modifications.....	5
1.6	Test Facility.....	6
<b>2.</b>	<b>System Test Configuration.....</b>	<b>7</b>
2.1	EUT Configuration.....	7
2.2	EUT Exercise .....	7
2.3	Test Procedure.....	7
2.4	Limitation .....	7
2.5	Configuration of Tested System.....	10
2.6	Equipment Used in Tested System.....	10
2.7	Description of test modes.....	11
<b>3.</b>	<b>Summary of Test Results.....</b>	<b>12</b>
<b>4.</b>	<b>Conducted Emissions Test .....</b>	<b>13</b>
4.1	Measurement Procedure:.....	13
4.2	Test SET-UP (Block Diagram of Configuration).....	13
4.3	Measurement Equipment Used: .....	13
4.4	Conducted Emission Limit.....	13
4.5	Measurement Result:.....	14
<b>5.</b>	<b>Radiated Emission Test .....</b>	<b>16</b>
5.1	Measurement Procedure .....	16
5.2	Test SET-UP (Block Diagram of Configuration).....	17
5.3	Measurement Equipment Used: .....	18
5.4	Measurement Result.....	19
<b>6.</b>	<b>Channel Separation test .....</b>	<b>28</b>
6.1	Measurement Procedure .....	28
6.2	Test SET-UP (Block Diagram of Configuration).....	28
6.3	Measurement Equipment Used: .....	28
6.4	Measurement Results: .....	28
<b>7.</b>	<b>20dB Bandwidth test.....</b>	<b>35</b>
7.1	Measurement Procedure .....	35
7.2	Test SET-UP (Block Diagram of Configuration).....	35
7.3	Measurement Equipment Used: .....	35
7.4	Measurement Results: .....	35

<b>8.</b>	<b>Quantity of Hopping Channel Test .....</b>	<b>42</b>
8.1	Measurement Procedure .....	42
8.2	Test SET-UP (Block Diagram of Configuration).....	42
8.3	Measurement Equipment Used: .....	42
8.4	Measurement Results: .....	42
<b>9.</b>	<b>Time of Occupancy (Dwell Time) test.....</b>	<b>43</b>
9.1	Measurement Procedure .....	43
9.2	Test SET-UP (Block Diagram of Configuration).....	43
9.3	Measurement Equipment Used: .....	43
9.4	Measurement Results: .....	43
<b>10.</b>	<b>MAX IMUM PEAK OUTPUT POWER TEST .....</b>	<b>46</b>
10.1	Measurement Procedure .....	46
10.2	Test SET-UP (Block Diagram of Configuration).....	46
10.3	Measurement Equipment Used: .....	46
10.4	Measurement Results: .....	46
<b>11.</b>	<b>Band EDGE test .....</b>	<b>48</b>
11.1	Measurement Procedure .....	48
11.2	Test SET-UP (Block Diagram of Configuration).....	48
11.3	Measurement Equipment Used: .....	48
11.4	Measurement Results: .....	48
<b>12.</b>	<b>Antenna Port Emission.....</b>	<b>55</b>
12.1	Test Equipment .....	55
12.2	Measuring Instruments and setting .....	55
12.3	Test Procedures .....	55
12.4	Block Diagram of Test setup.....	55
12.5	Test Result.....	55
<b>13.</b>	<b>Antenna Application.....</b>	<b>59</b>
13.1	Antenna requirement .....	59
13.2	Result.....	59

## 1. GENERAL INFORMATION

### 1.1 Product Description

The EUT is a short range, lower power a Device. It is designed by way of utilizing the GFSK,  $\pi/4$ -DQPSK and 8DPSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402-2480MHz
- B). Modulation: GFSK,  $\pi/4$ -DQPSK, 8DPSK
- C). Number of Channel: 79
- D). Channel space: 1MHz
- E). RF Output Power: 4.00dBm
- F). BIT Rate of Transmission: 1Mbps, 2Mbps, 3Mbps
- G). Antenna Type: PCB antenna
- H). Antenna GAIN: 0dBi
- I). Power Supply: 3.7V (Internal rechargeable lithium battery) or DC 5V from USB

### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AA9Y-DAIDT05 filing to comply with Section 15.247 of the FCC Part 15 Subpart C Rules.

### 1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009) and FCC Public Notice DA 00-705. Radiated testing was performed at an antenna to EUT distance 3 meters.

### 1.4 Special Accessories

Not available for this EUT intended for grant.

### 1.5 Equipment Modifications

Not available for this EUT intended for grant.

## 1.6 Test Facility

### Site Description

#### EMC Lab.

: Accredited by CNAS, 2013.10.29  
The certificate is valid until 2016.10.28  
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01:2006(identical to ISO/IEC17025: 2005)  
The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2010.5.25  
The Laboratory has been assessed according to the requirements ISO/IEC 17025

Accredited by FCC, October 28, 2010  
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 5, 2010  
The Certificate Registration Number is 4480A-2.

#### Name of Firm

: SHENZHEN EMTEK CO., LTD

#### Site Location

: Bldg 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

### 2.4 Limitation

#### (1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

		<b>20dB Bandwidth</b>			
<b>Frequency</b>	<b>Limit(kHz)</b>				
<b>Range(MHz)</b>	<b>Quantity of Hopping Channel</b>	<b>50</b>	<b>25</b>	<b>15</b>	<b>75</b>
	902-928	<250	>250	NA	NA
	2400-2483.5	NA	NA	>1000	<1000

### (3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

<b>Frequency</b>	<b>Limit(Quantity of Hopping Channel)</b>			
	<b>20dB</b>	<b>20dB</b>	<b>20dB</b>	<b>20dB</b>
<b>Range (MHz)</b>	<b>bandwidth</b>	<b>bandwidth</b>	<b>bandwidth</b>	<b>bandwidth</b>
	<b>&lt;250kHz</b>	<b>&gt;250 kHz</b>	<b>&lt;1MHz</b>	<b>&gt;1M Hz</b>
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

### (4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

<b>Frequency Range</b>	<b>LIMIT(rms)</b>		
	<b>20dB bandwidth</b>	<b>20dB</b>	<b>20dB bandwidth</b>
<b>(MHz)</b>	<b>&lt;250kHz(50Channel)</b>	<b>bandwidth &gt;250kHz(25Channel)</b>	<b>&lt;1MHz(75Channel)</b>
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

**Note:** The “()”is all channel’s average time of occupancy.

### (5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

		<b>LIMIT(W)</b>			
<b>Frequency</b>	<b>Quantity of</b>				
<b>Range (MHz)</b>	<b>Hopping</b>	<b>50</b>	<b>25</b>	<b>15</b>	<b>75</b>
	<b>Channel</b>				
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)



#### (6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

#### (7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## (8) Radiated Emission


FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
0.009~0.490	2400/F(KHz)	300	See the remark
0.490~1.705	2400/F(KHz)	30	
1.705~30.0	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in  $\text{dB}\mu\text{V/m}=20 \log (\mu\text{V/m})$   
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
3. Distance extrapolation factor  $=40 \log (\text{Specific distance/ test distance})(\text{dB})$ ;  
Limit line=Specific limits( $\text{dB}\mu\text{V}$ ) + distance extrapolation factor.

## 2.5 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**



## 2.6 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Vibration Speaker	Damson	DAIDT05	2AA9Y-DAIDT05	N/A	<b>EUT</b>
2.	Travel Charger	N/A	S003FU0500050	N/A	N/A	

### Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

## 2.7 Description of test modes

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK have been tested . 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

### 3. Summary of Test Results


<b>FCC Rule</b>	<b>Description Of Test</b>	<b>Result</b>
15.247(a)(1)	Channel Separation test	Pass
15.247(a)(1)	20dB Bandwidth	Pass
15.247(a)(1)	Quantity of Hopping Channel	Pass
15.247(a)(1)	Time of Occupancy (Dwell Time)	Pass
15.247(b)(1)	Max Peak output Power test	Pass
15.247(d)	Band edge test	Pass
15.207	AC Power Conducted Emission	Pass
15.247(d)	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
15.203&15.247(b)	Antenna Application	Pass

## 4. Conducted Emissions Test

### 4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 4.2 Test SET-UP (Block Diagram of Configuration)



### 4.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/17/2014	05/16/2015
50ΩCoaxial Switch	Anritsu	MP59B	M20531	05/17/2014	05/16/2015

### 4.4 Conducted Emission Limit


#### (7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 4.5 Measurement Result:

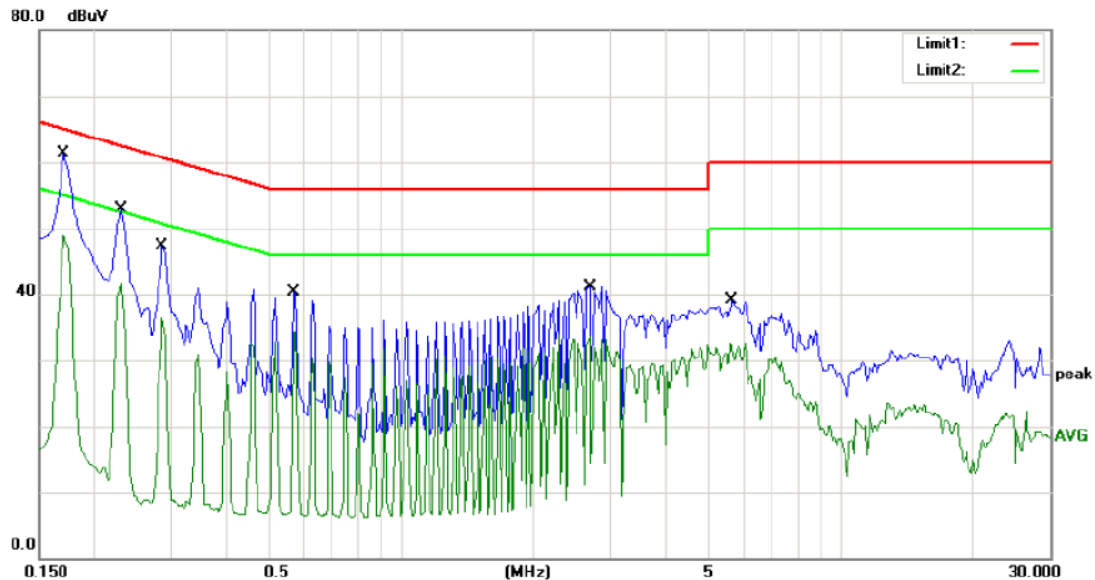

Site Conduction #2

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 class B\_QP

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Vibration Speaker


M/N: DAIDT05

Mode: ON

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1700	61.38	0.00	61.38	64.96	-3.58	QP	
2		0.1700	48.88	0.00	48.88	54.96	-6.08	AVG	
3		0.2300	52.81	0.00	52.81	62.45	-9.64	QP	
4		0.2300	41.71	0.00	41.71	52.45	-10.74	AVG	
5		0.2850	47.37	0.00	47.37	60.67	-13.30	QP	
6		0.2850	36.42	0.00	36.42	50.67	-14.25	AVG	
7		0.5700	40.25	0.00	40.25	56.00	-15.75	QP	
8		0.5700	34.25	0.00	34.25	46.00	-11.75	AVG	
9		2.6900	41.16	0.00	41.16	56.00	-14.84	QP	
10		2.6900	33.75	0.00	33.75	46.00	-12.25	AVG	
11		5.6700	39.17	0.00	39.17	60.00	-20.83	QP	
12		5.6700	32.43	0.00	32.43	50.00	-17.57	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator:

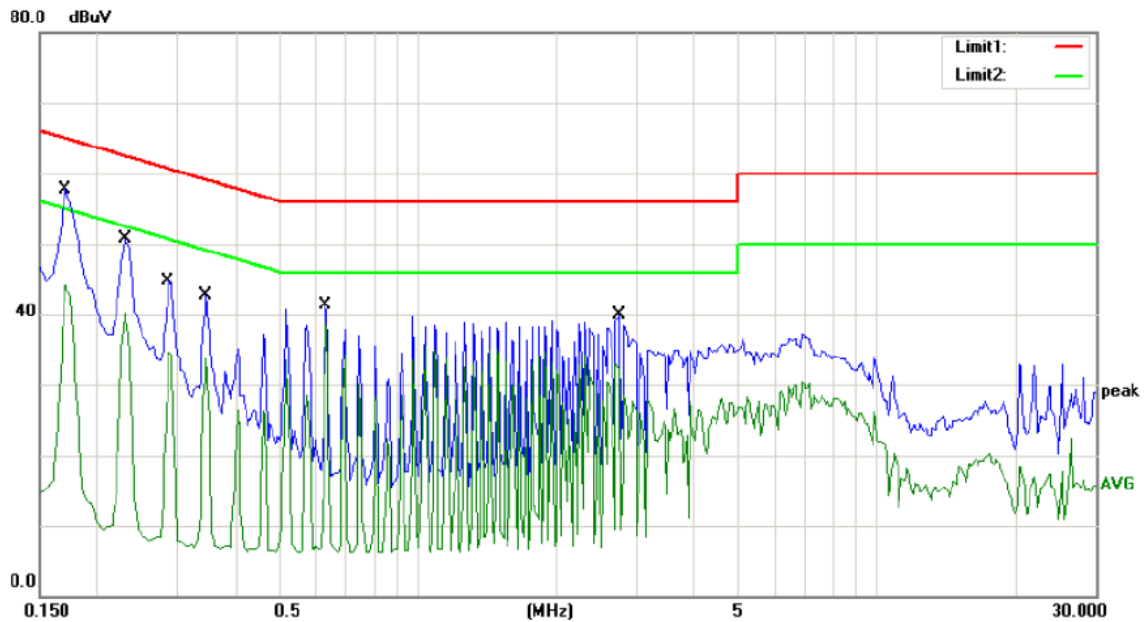

Site Conduction #2

Phase: **N**

Temperature: 22

Limit: (CE)FCC PART 15 class B\_QP

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Vibration Speaker

M/N: DAIDT05

Mode: ON

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1700	57.77	0.00	57.77	64.96	-7.19	QP	
2		0.1700	44.15	0.00	44.15	54.96	-10.81	AVG	
3		0.2300	50.66	0.00	50.66	62.45	-11.79	QP	
4		0.2300	40.01	0.00	40.01	52.45	-12.44	AVG	
5		0.2850	44.79	0.00	44.79	60.67	-15.88	QP	
6		0.2850	34.72	0.00	34.72	50.67	-15.95	AVG	
7		0.3450	42.62	0.00	42.62	59.08	-16.46	QP	
8		0.3450	33.73	0.00	33.73	49.08	-15.35	AVG	
9		0.6300	41.32	0.00	41.32	56.00	-14.68	QP	
10	*	0.6300	38.83	0.00	38.83	46.00	-7.17	AVG	
11		2.7600	39.91	0.00	39.91	56.00	-16.09	QP	
12		2.7600	32.93	0.00	32.93	46.00	-13.07	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator:

## 5. Radiated Emission Test

### 5.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30 MHz to 1GHz setting resolution bandwidth 120 kHz and video bandwidth 300kHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	120kHz
VB	300kHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold


When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold




## 5.2 Test SET-UP (Block Diagram of Configuration)


### (A) Radiated Emission Test Set-Up, Frequency Below 30MHz

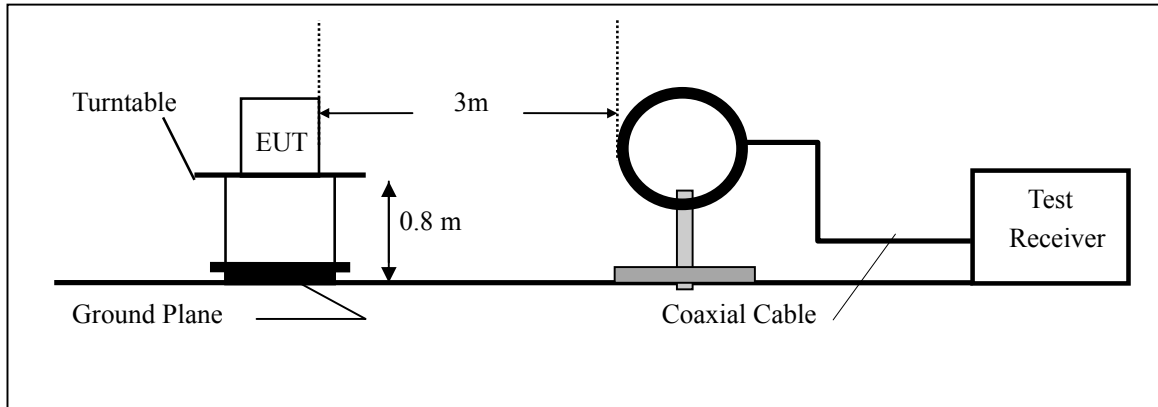

### (B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

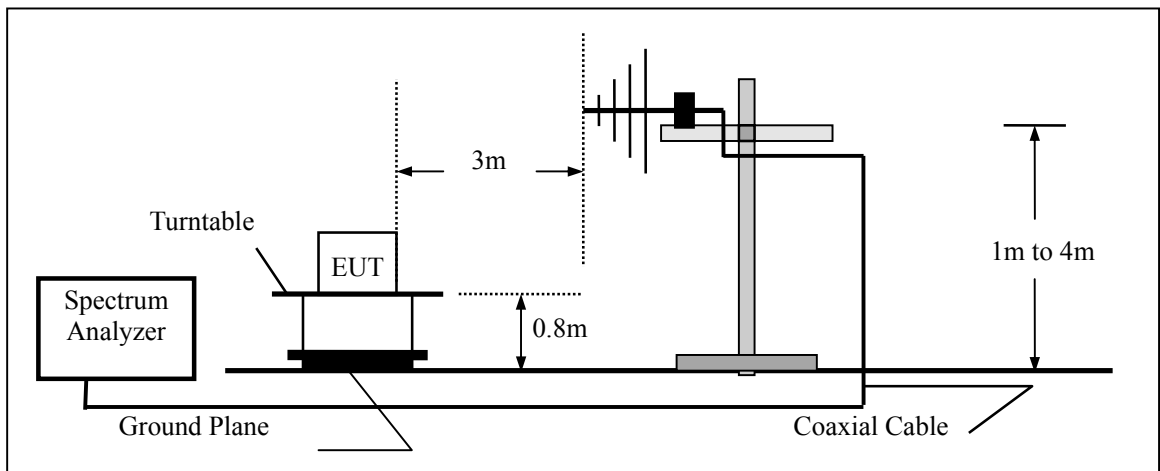

### (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

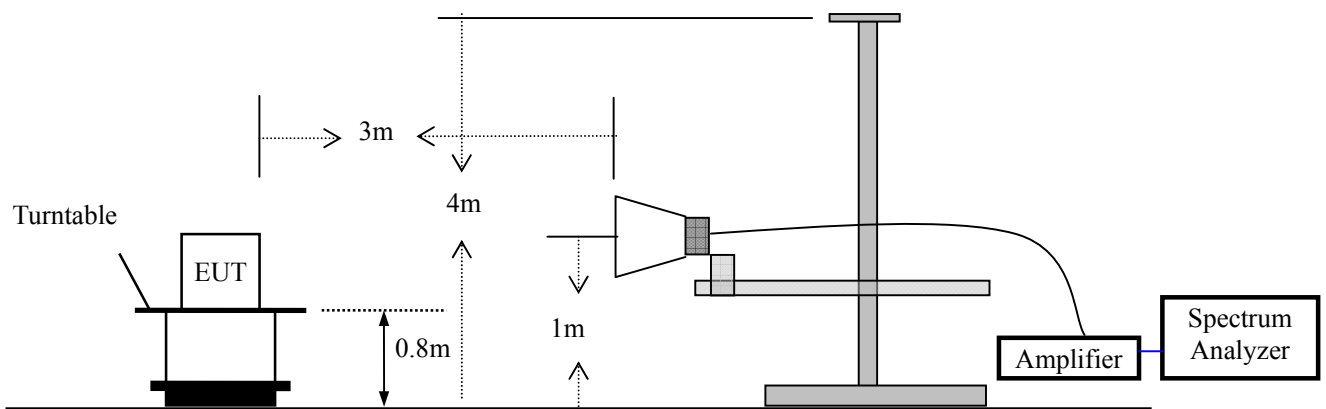


### 5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/17/2014	05/16/2015
Spectrum Analyzer	HP	E4407B	839840481	05/17/2014	05/16/2015
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014	05/16/2015

#### **5.4 Measurement Result**

All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and all modulation methods do not exceed the above mentioned limits.

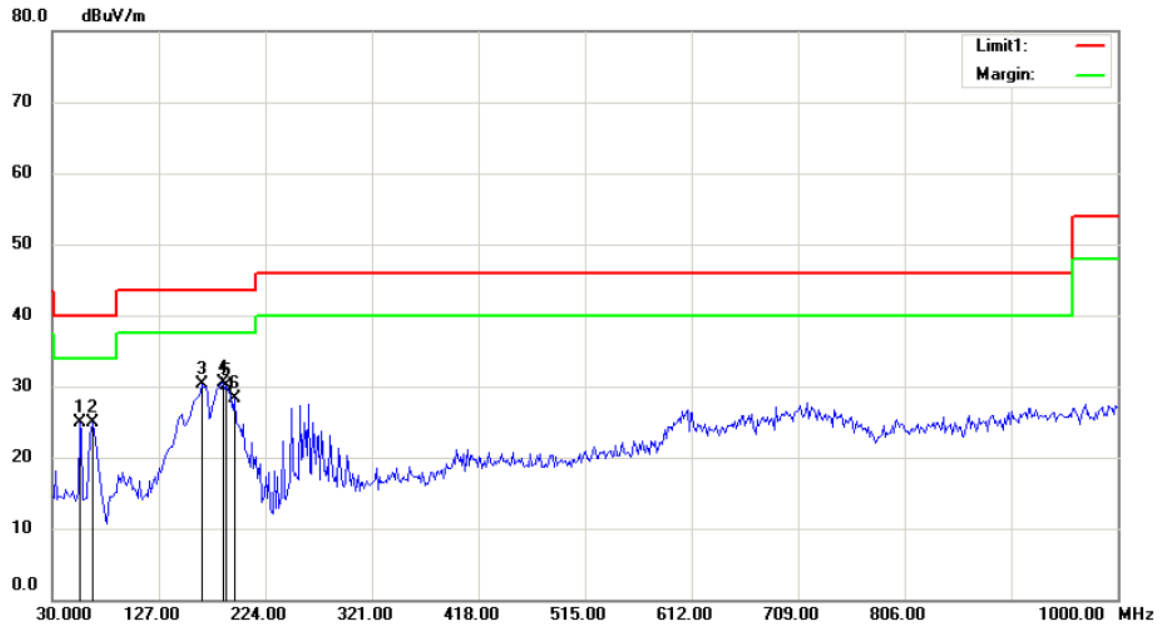

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Vibration Speaker

M/N: DAIDT05


Mode:2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		54.8717	11.21	13.76	24.97	40.00	-15.03	QP		
2		67.3076	14.33	10.60	24.93	40.00	-15.07	QP		
3		166.7948	18.87	11.43	30.30	43.50	-13.20	QP		
4	*	185.4487	17.73	12.78	30.51	43.50	-12.99	QP		
5		188.5576	17.07	13.06	30.13	43.50	-13.37	QP		
6		196.3301	15.09	13.26	28.35	43.50	-15.15	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

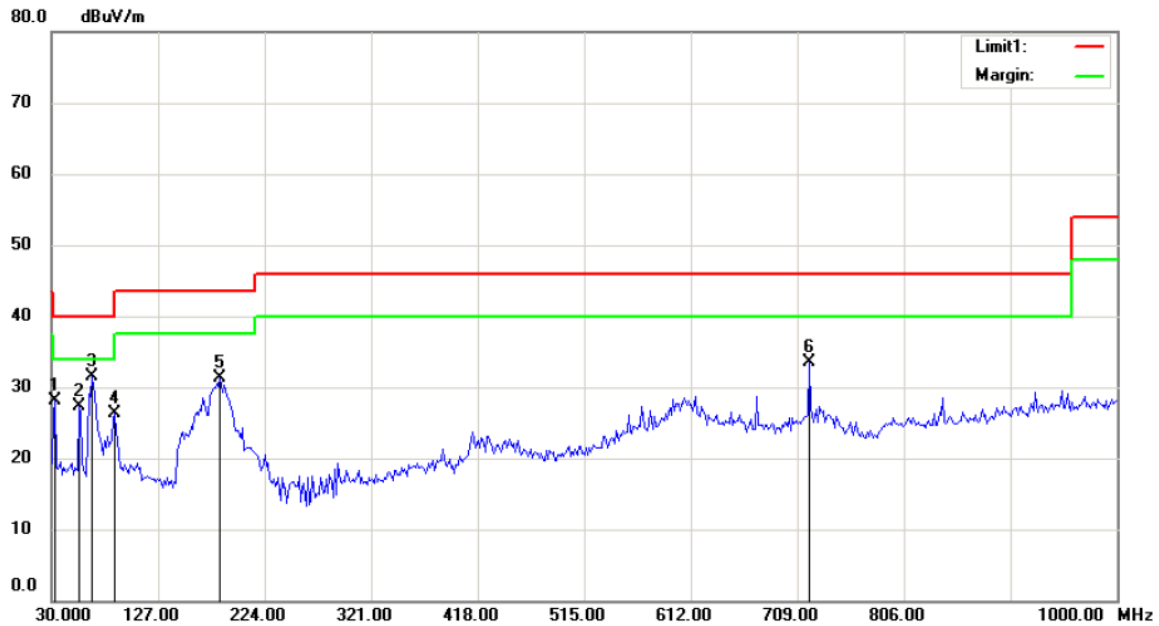

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Vibration Speaker

M/N: DAIDT05


Mode:2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.1090	15.40	12.67	28.07	40.00	-11.93	QP		
2		54.8717	13.66	13.72	27.38	40.00	-12.62	QP		
3	*	67.3076	20.84	10.60	31.44	40.00	-8.56	QP		
4		87.5160	14.11	12.10	26.21	40.00	-13.79	QP		
5		183.8942	18.56	12.66	31.22	43.50	-12.28	QP		
6		720.1923	8.24	25.17	33.41	46.00	-12.59	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

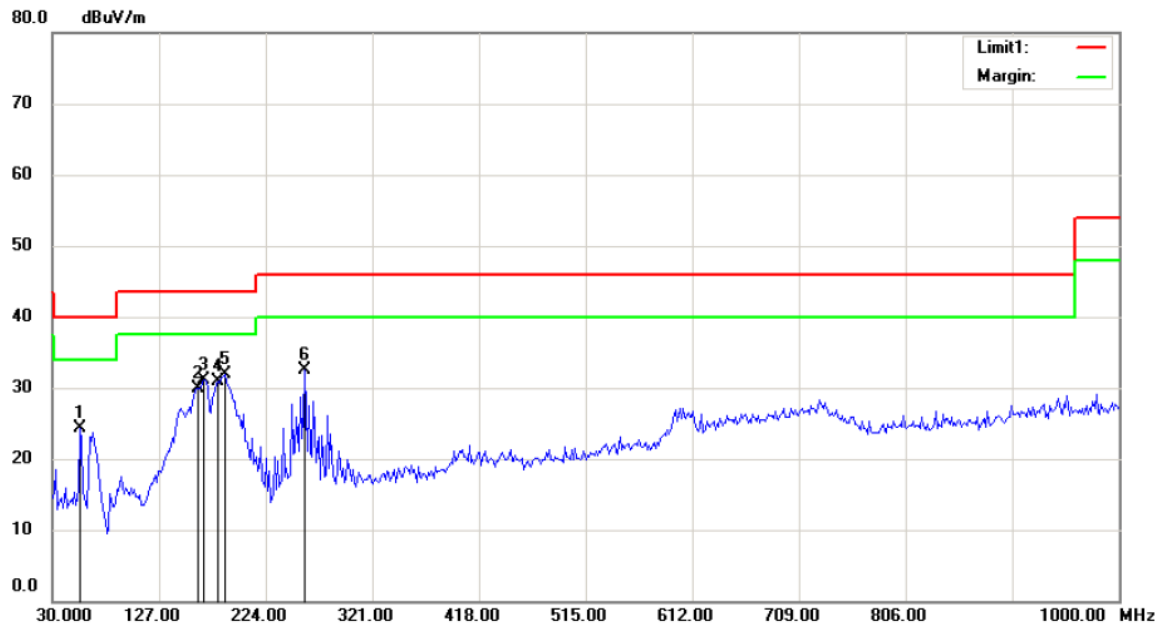

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Vibration Speaker

M/N: DAIDT05


Mode:2441

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		54.8717	10.55	13.76	24.31	40.00	-15.69	QP		
2		162.1314	18.62	11.24	29.86	43.50	-13.64	QP		
3		168.3493	19.68	11.48	31.16	43.50	-12.34	QP		
4		180.7852	18.56	12.36	30.92	43.50	-12.58	QP		
5	*	187.0032	19.02	12.92	31.94	43.50	-11.56	QP		
6		260.0641	17.37	15.15	32.52	46.00	-13.48	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

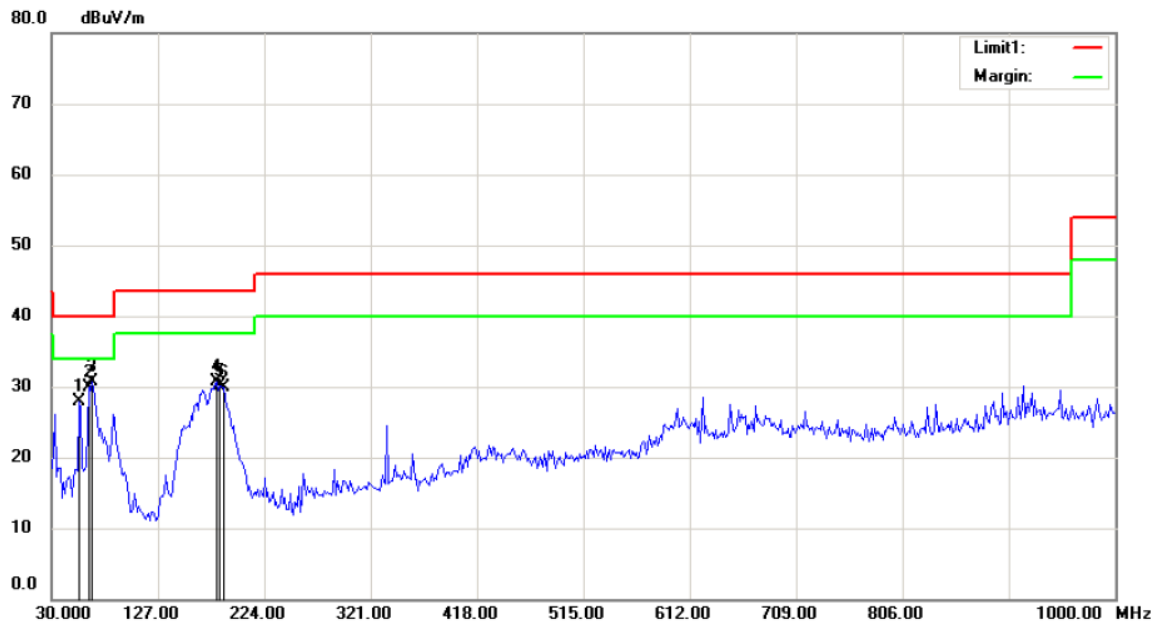


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 24 C  
Limit: ( RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %  
EUT: Vibration Speaker  
M/N: DAIDT05  
Mode:2441  
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		54.8717	14.27	13.72	27.99	40.00	-12.01	QP		
2		64.1987	18.12	11.83	29.95	40.00	-10.05	QP		
3	*	67.3076	20.19	10.60	30.79	40.00	-9.21	QP		
4		180.7852	18.26	12.38	30.64	43.50	-12.86	QP		
5		183.8942	17.45	12.66	30.11	43.50	-13.39	QP		
6		187.0032	16.94	12.95	29.89	43.50	-13.61	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

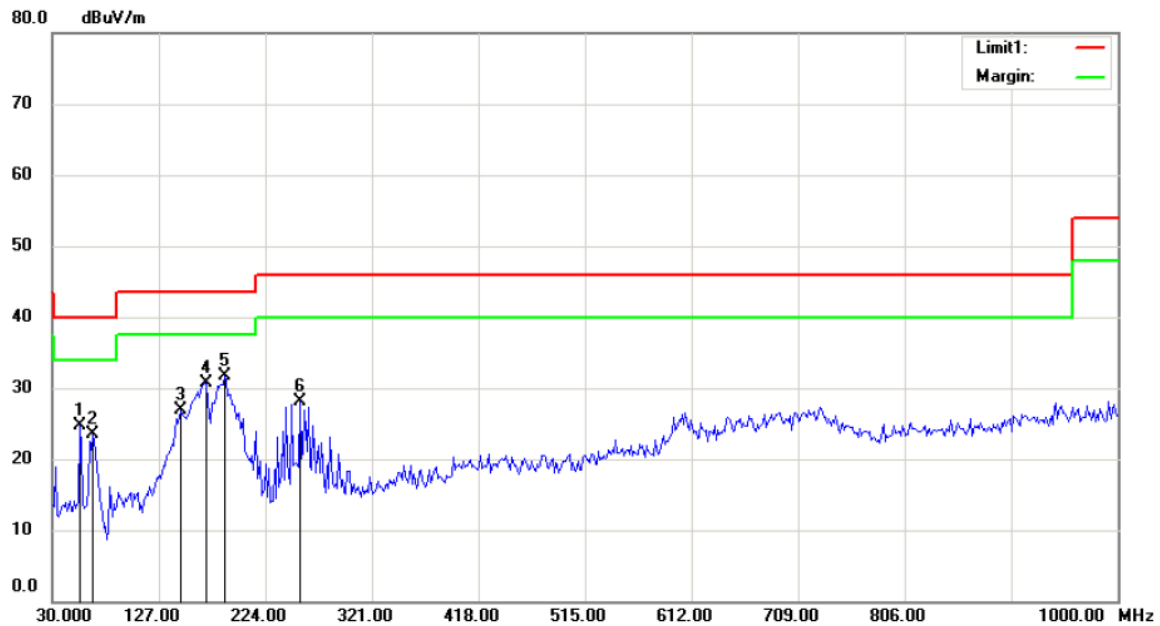

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Vibration Speaker

M/N: WP0101

Mode:2480


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		54.8718	10.98	13.76	24.74	40.00	-15.26	QP		
2		67.3077	12.95	10.60	23.55	40.00	-16.45	QP		
3		146.5864	16.28	10.70	26.98	43.50	-16.52	QP		
4		169.9038	19.24	11.55	30.79	43.50	-12.71	QP		
5	*	187.0032	18.86	12.92	31.78	43.50	-11.72	QP		
6		255.4006	13.02	15.02	28.04	46.00	-17.96	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK



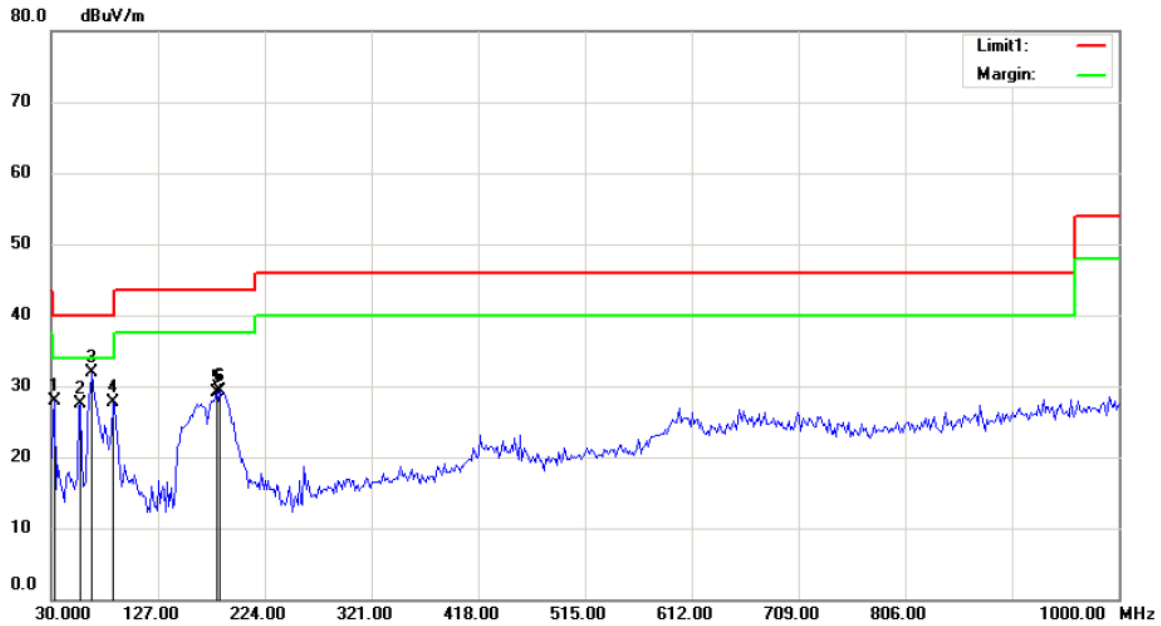

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 24 C

Limit: ( RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Vibration Speaker

M/N: DAIDT05

Mode:2480

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		33.1090	15.24	12.67	27.91	40.00	-12.09	QP		
2		56.4262	13.84	13.63	27.47	40.00	-12.53	QP		
3	*	67.3076	21.35	10.60	31.95	40.00	-8.05	QP		
4		85.9615	16.05	11.60	27.65	40.00	-12.35	QP		
5		180.7852	16.70	12.38	29.08	43.50	-14.42	QP		
6		183.8942	16.74	12.66	29.40	43.50	-14.10	QP		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

Operation Mode: CH1: 2402MHz Test Date : October 7, 2013  
Frequency Range: 1-25GHz Temperature : 25°C  
Test Result: PASS Humidity : 55 %  
Measured Distance: 3m Test By: KL  
Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4803.84	V	58.57	31.83	74.00	54.00	-15.43	-22.17
7205.90	V	59.89	32.38	74.00	54.00	-14.11	-21.62
9607.78	V	59.69	35.67	74.00	54.00	-14.31	-18.33
4803.76	H	56.07	33.48	74.00	54.00	-17.93	-20.52
7205.76	H	59.47	32.64	74.00	54.00	-14.53	-21.36
9607.67	H	58.18	34.75	74.00	54.00	-15.82	-19.25

**No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.**

- Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: CH40: 2441MHz Test Date : October 7, 2013  
Frequency Range: 1-25GHz Temperature : 25°C  
Test Result: PASS Humidity : 55 %  
Measured Distance: 3m Test By: KL  
Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4881.74	V	59.88	35.11	74.00	54.00	-14.12	-18.89
7322.78	V	59.39	35.77	74.00	54.00	-14.61	-18.23
9763.66	V	58.40	34.29	74.00	54.00	-15.60	-19.71
4881.73	H	57.35	36.38	74.00	54.00	-16.65	-17.62
7322.77	H	56.85	35.73	74.00	54.00	-17.15	-18.27
9763.71	H	60.09	38.91	74.00	54.00	-13.91	-15.09

**No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.**

- Note:** (1) All Readings are Peak Value and AV.  
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: CH79: 2480MHz Test Date : October 7, 2013  
Frequency Range: 1-25GHz Temperature : 25°C  
Test Result: PASS Humidity : 55 %  
Measured Distance: 3m Test By: KL  
Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4959.64	V	58.58	36.16	74.00	54.00	-15.42	-17.84
7439.62	V	60.59	35.10	74.00	54.00	-13.41	-18.90
9919.68	V	59.64	38.34	74.00	54.00	-14.36	-15.66
4959.64	H	58.02	35.14	74.00	54.00	-15.98	-18.86
7439.63	H	59.94	39.04	74.00	54.00	-14.06	-14.96
9919.63	H	57.33	35.13	74.00	54.00	-16.67	-18.87

**No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.**


- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
  - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 6. Channel Separation test

### 6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 6.2 Test SET-UP (Block Diagram of Configuration)



### 6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

### 6.4 Measurement Results:


The following table is the setting of spectrum analyzer.



EMI Test Receiver	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

All the modes GFSK,  $\pi/4$ -DQPSK,8DPSK have been tested and the result were recorded in the following pages and the others modulation methods do not exceed the limits.  
Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	Jack	Temperature :	25°C
Test Result:	PASS	Humidity :	55 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 20dB Down BW(kHz)
1	2402	1000.00	> 858.518
40	2441	1000.00	> 861.423
79	2480	1000.00	> 849.145


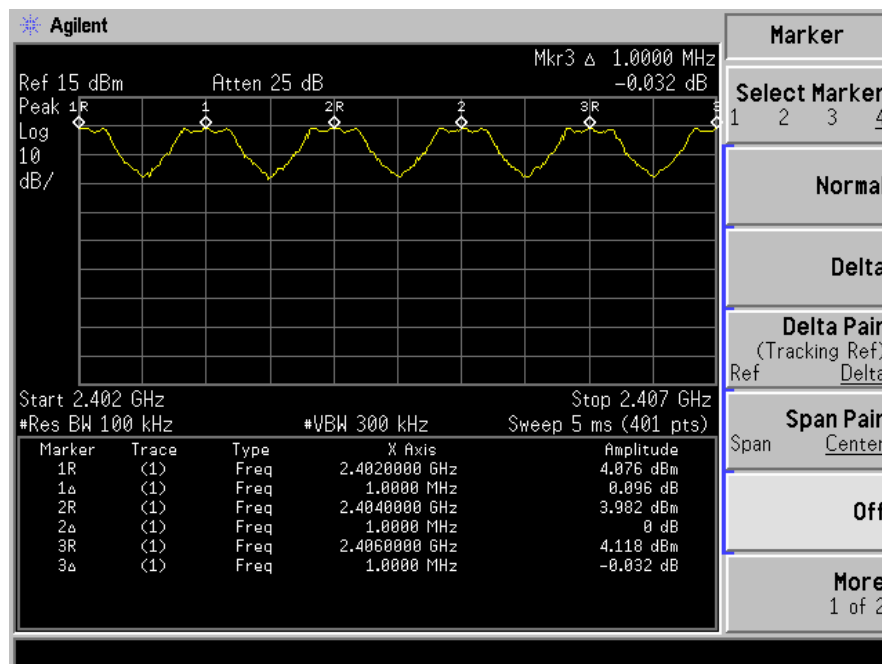


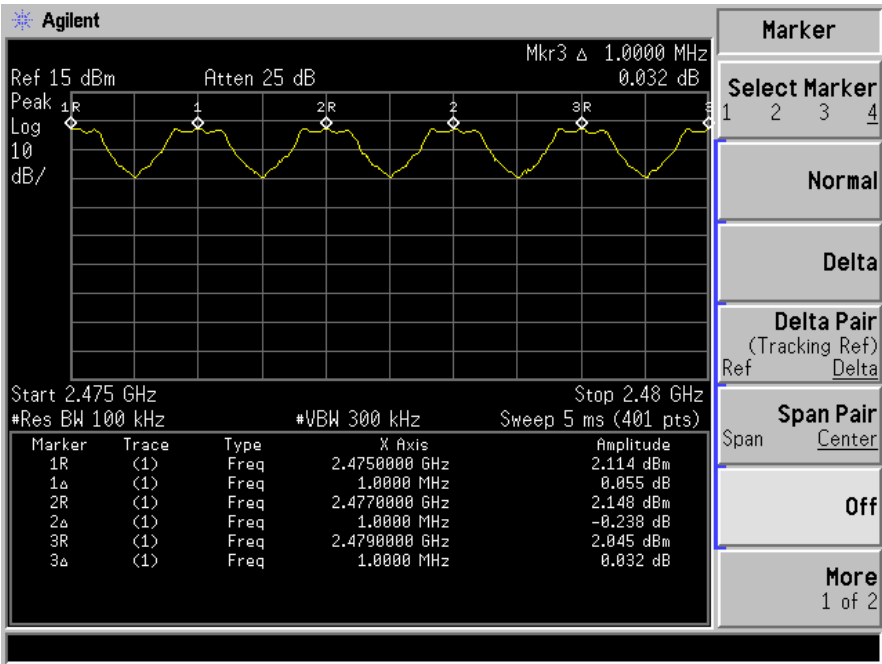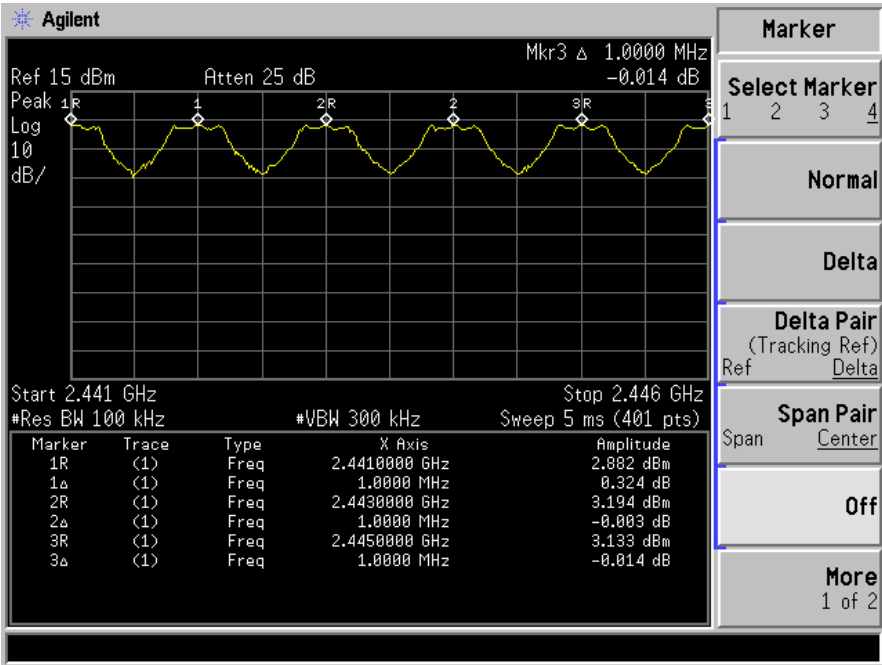

Spectrum Detector: PK Test Date : September 25, 2014  
 Test By: Jack Temperature : 25°C  
 Test Result: PASS Humidity : 55 %  
 Modulation: 1/4  $\pi$  DQPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	>804.00
40	2441	1000.00	>808.00
79	2480	1000.00	>812.00

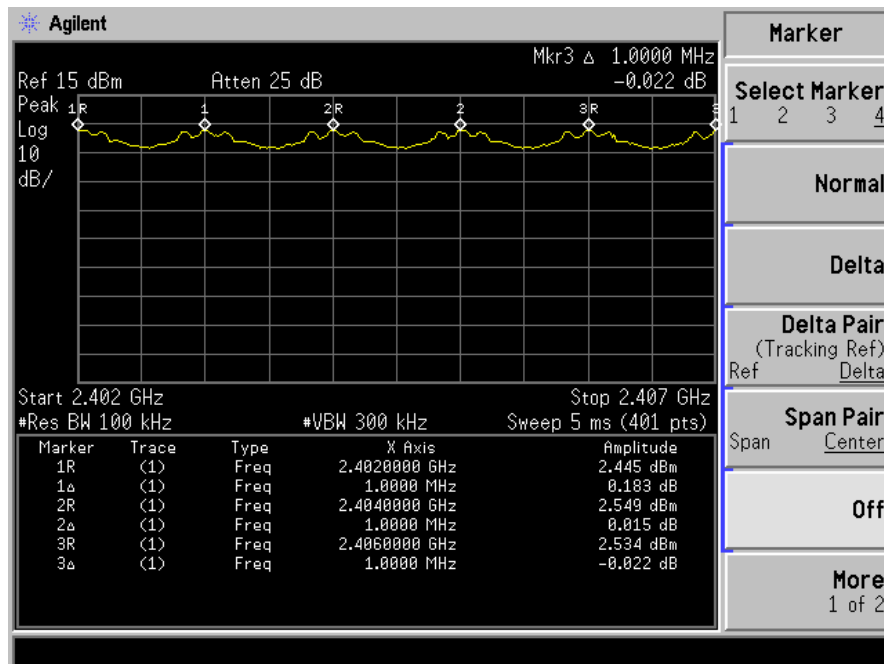


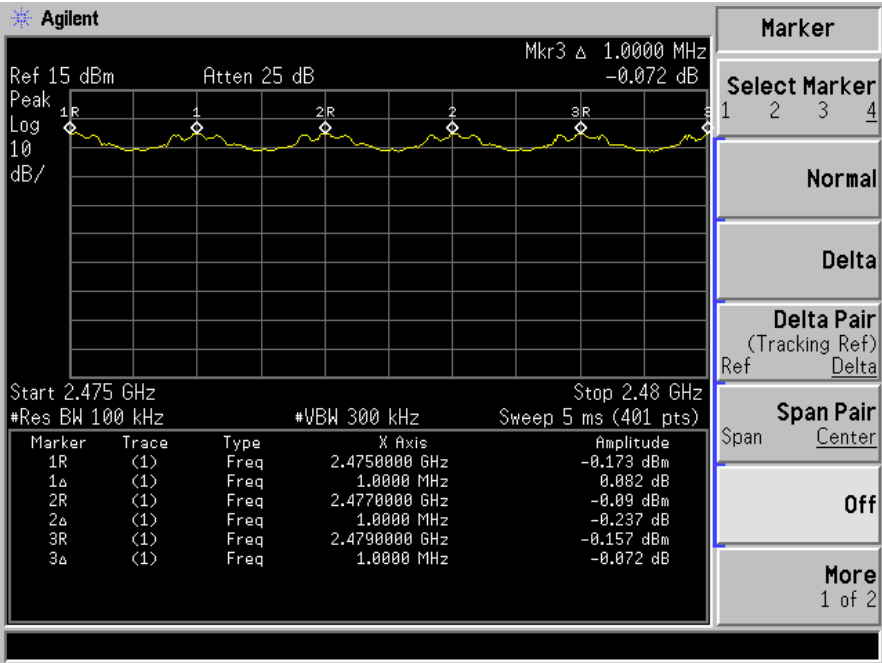
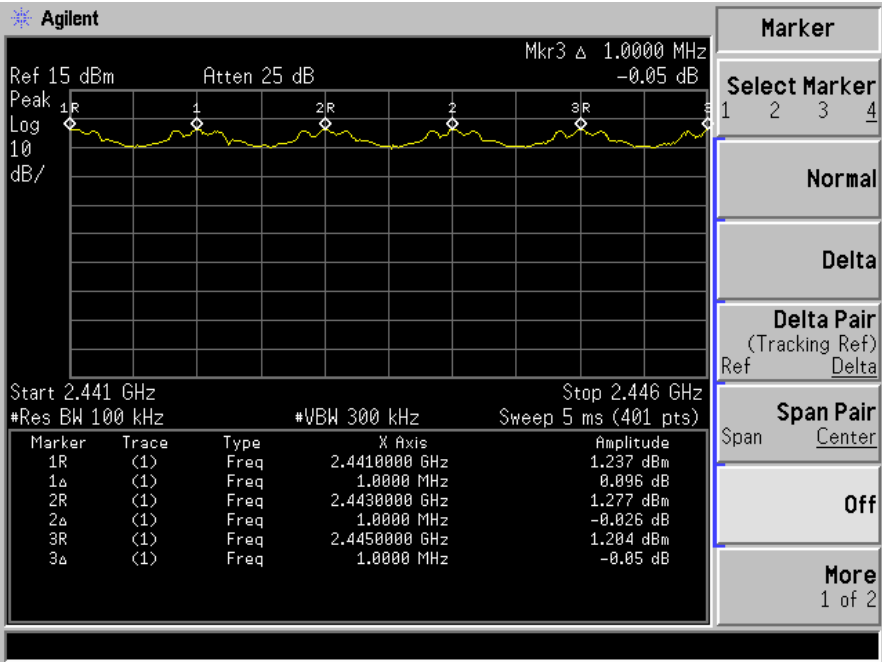




Spectrum Detector: PK Test Date : September 25, 2014  
 Test By: Jack Temperature : 25°C  
 Test Result: PASS Humidity : 55 %  
 Modulation: 8DPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	>807.33
40	2441	1000.00	>806.67
79	2480	1000.00	>803.33

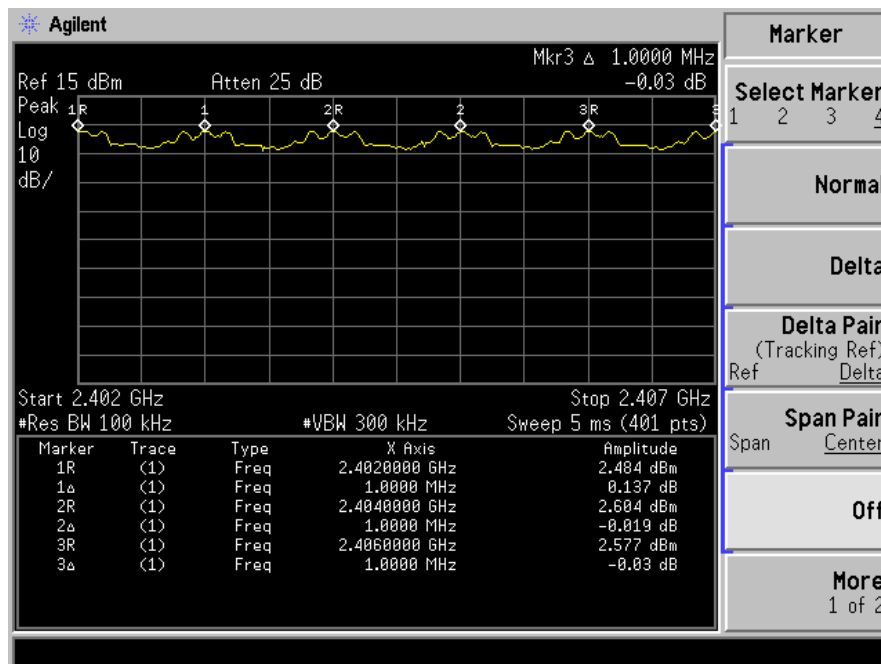

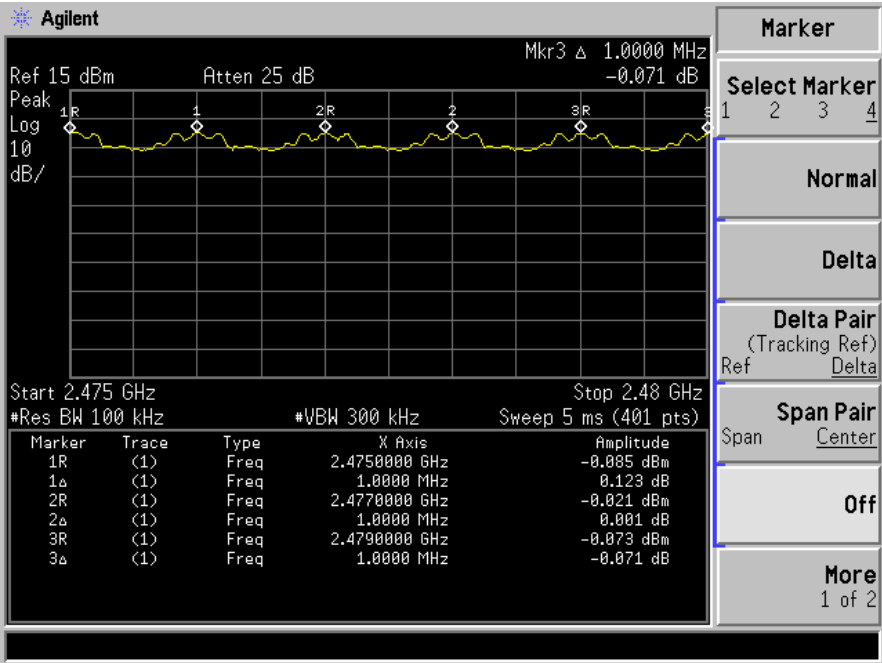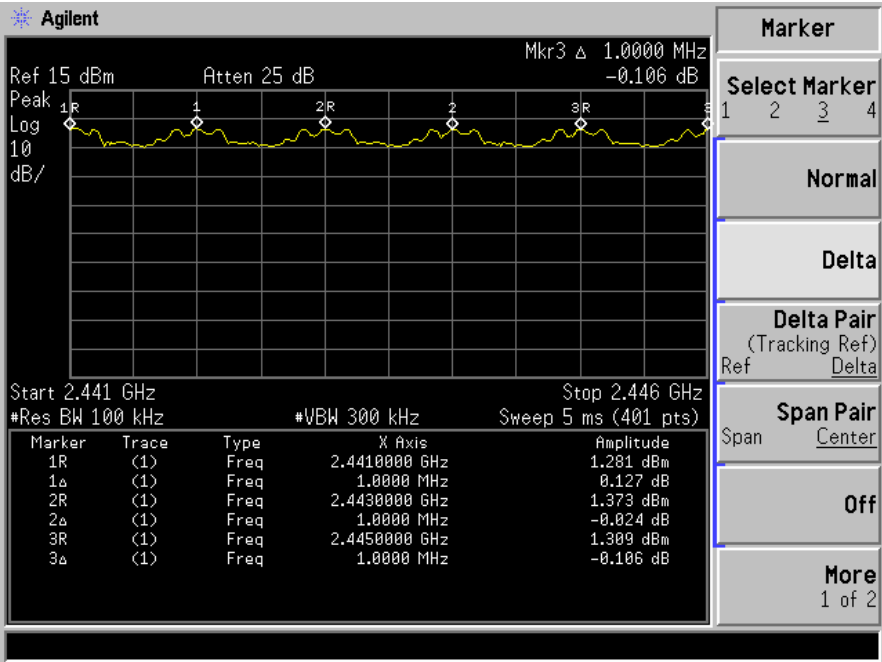


## 7. 20dB Bandwidth test

### 7.1 Measurement Procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Make the measurement with the spectrum analyzer 's resolution bandwidth (RBW) = 30 kHz. Set the Video bandwidth (VBW) = 100 kHz. In order to make an accurate measurement The 20dB bandwidth.
4. Measure and record the results in the test report.

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

### 7.4 Measurement Results:

The following table is the setting of spectrum analyzer.

EMI Test Receiver	Setting
Attenuation	Auto
Span	3MHz
RB	30kHz
VB	100kHz
Detector	Peak
Trace	Max hold


All the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK have been tested and the result recorded in the following pages.



#### 7.4.1. 20dB Bandwidth test data Chart:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	Jack	Temperature :	25°C
Test Result:	PASS	Humidity :	55 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	858.518
40	2441	861.423
79	2480	849.145


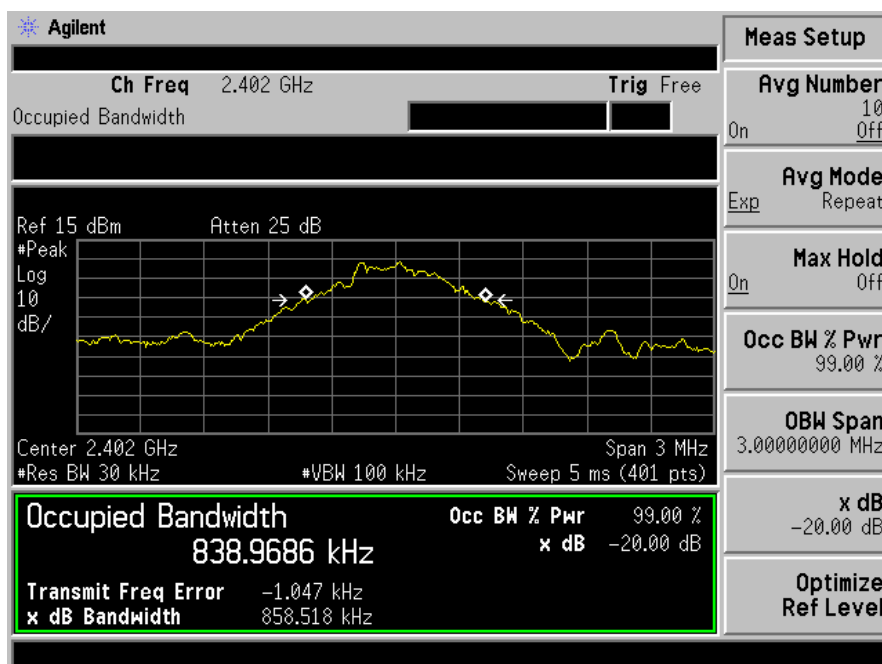


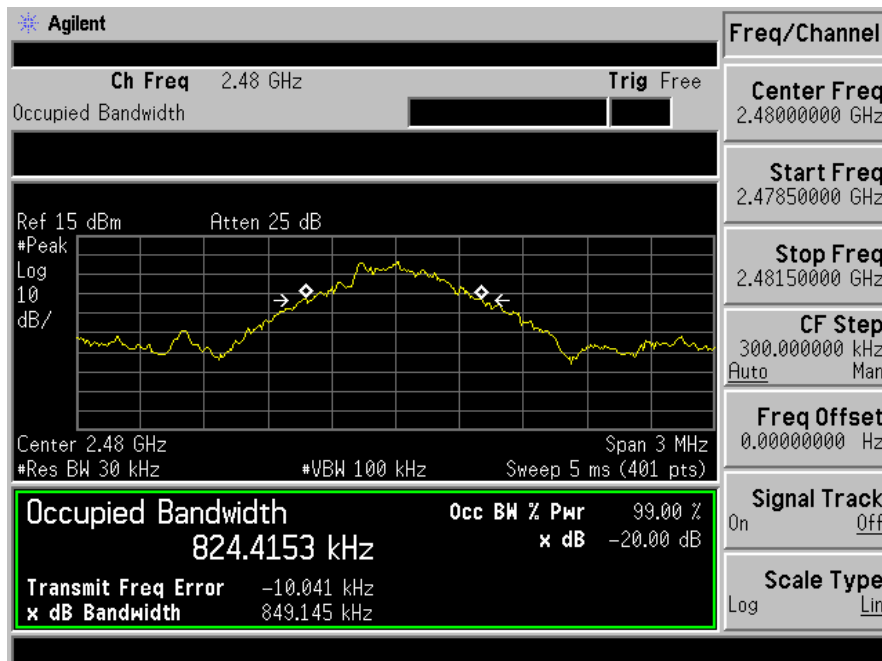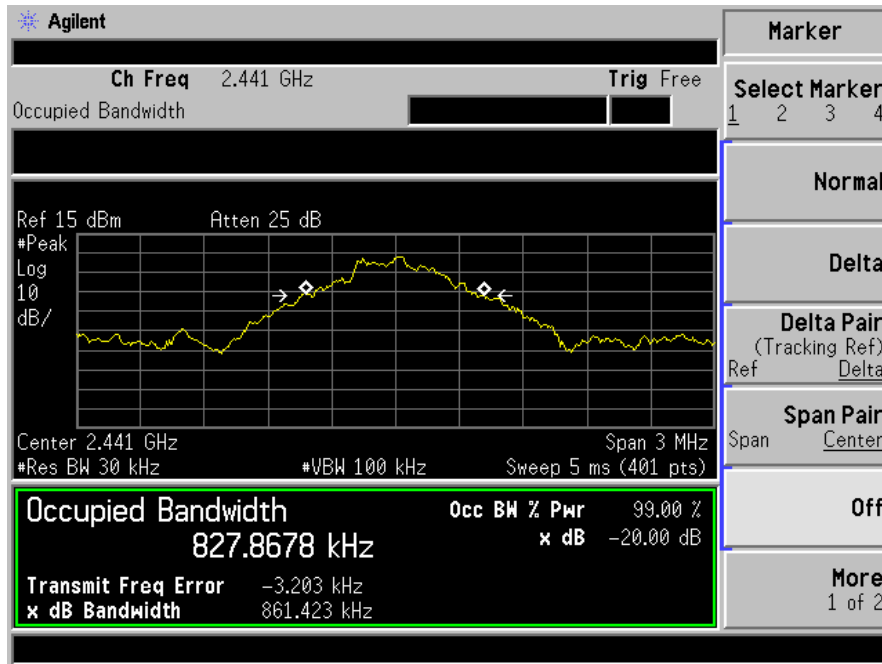

Spectrum Detector: PK Test Date : September 25, 2014  
 Test By: Jack Temperature : 25°C  
 Test Result: PASS Humidity : 55 %  
 Modulation:  $\pi/4$ -DQPSK


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1206.00
40	2441	1212.00
79	2480	1218.00

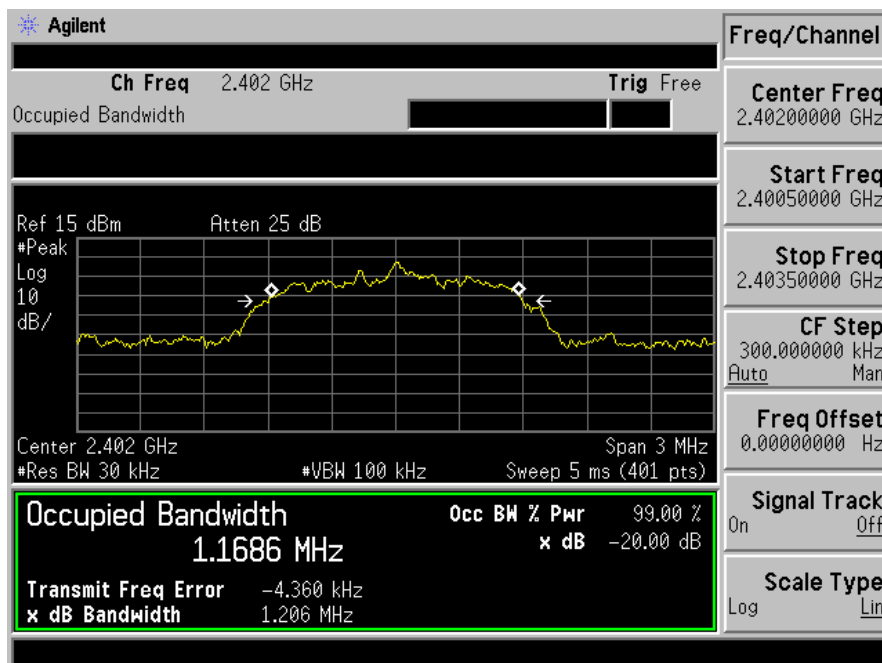

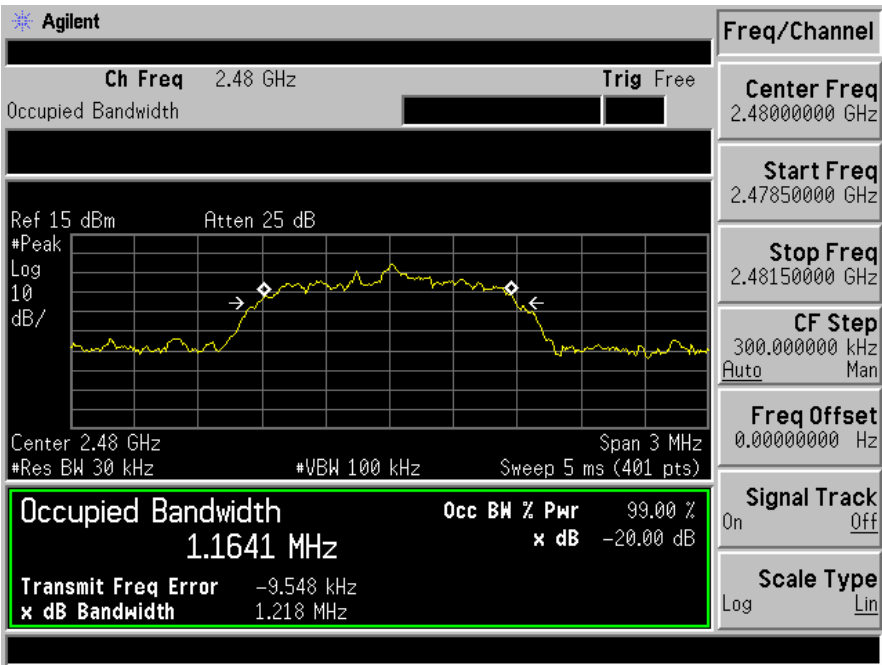
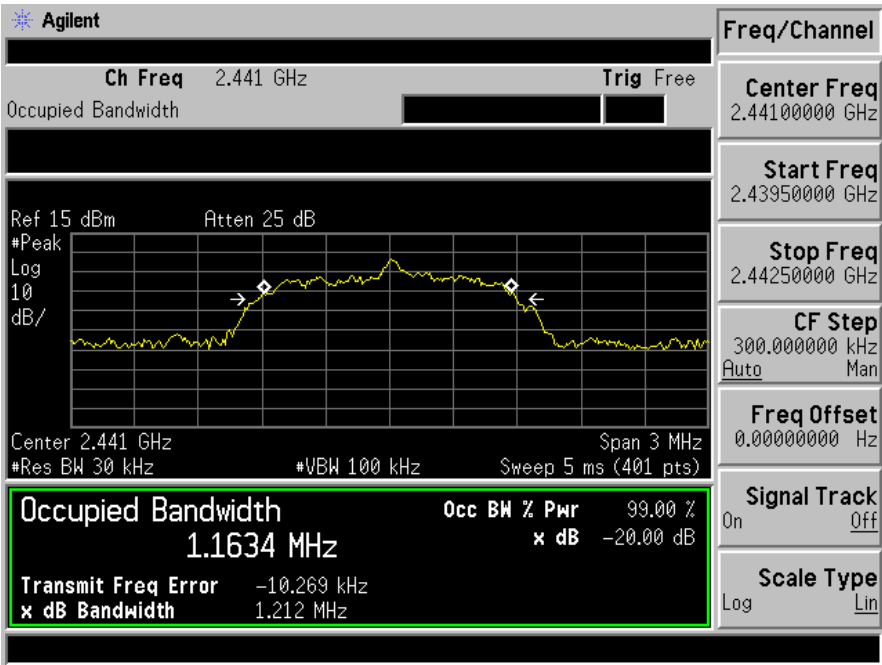


Spectrum Detector: PK Test Date : September 25, 2014  
Test By: Jack Temperature : 25°C  
Test Result: PASS Humidity : 55 %  
Modulation: 8DPSK

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1211.00
40	2441	1210.00
79	2480	1205.00

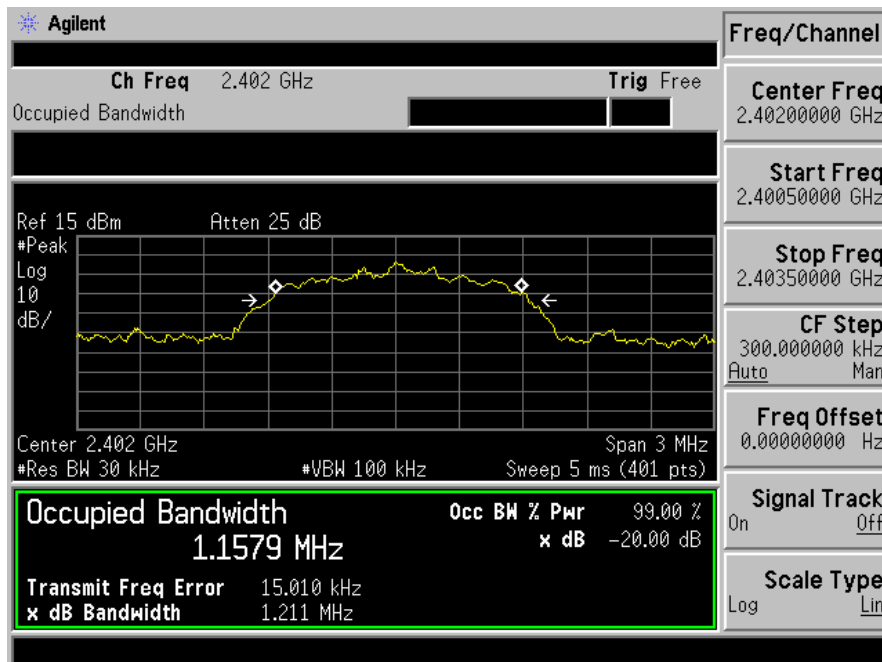



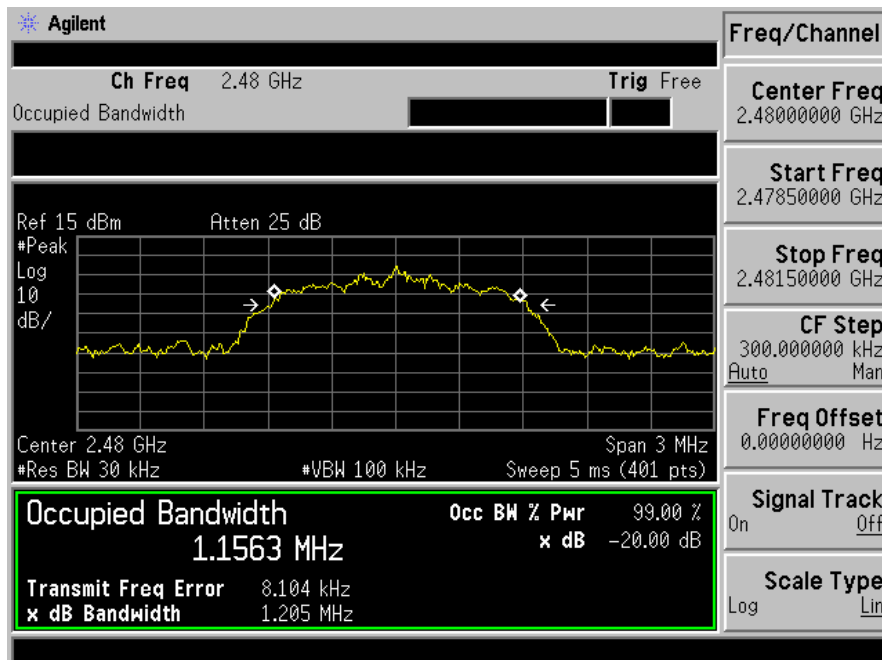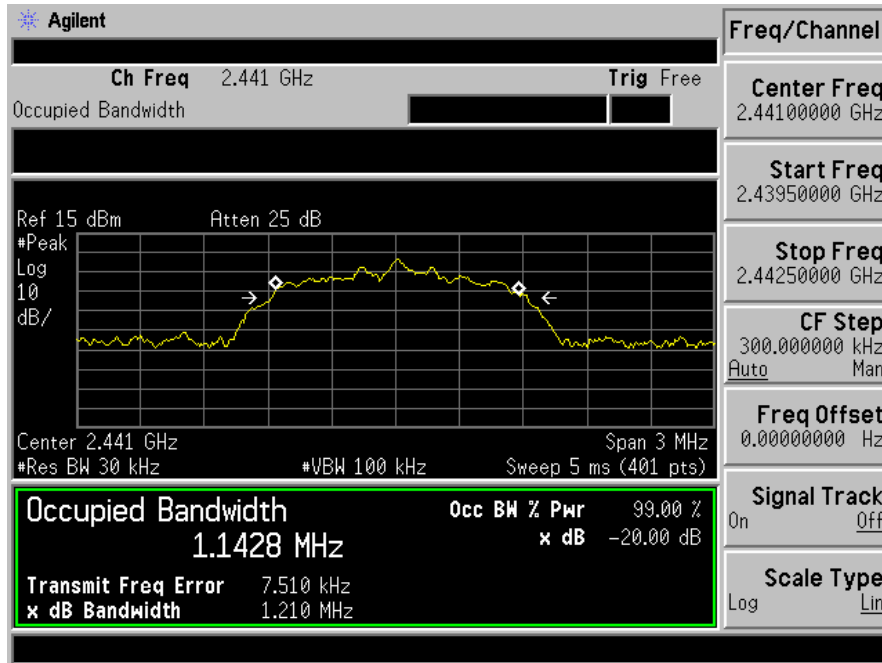

## 8. Quantity of Hopping Channel Test

### 8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

### 8.4 Measurement Results:

All the modulation modes were tested the data of the mode (GFSK) is recorded as below.

Spectrum Detector: PK                      Test Date : September 25, 2014  
Test By: Jack                      Temperature : 25°C  
Test Result: PASS                      Humidity : 55 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480	79	> 15

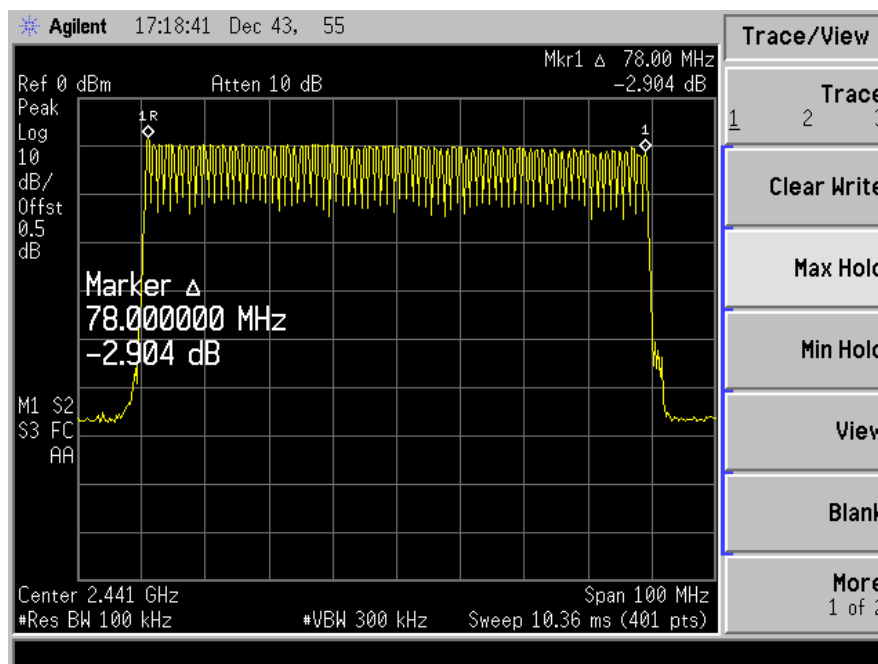


## 9. Time of Occupancy (Dwell Time) test

### 9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

### 9.2 Test SET-UP (Block Diagram of Configuration)



### 9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015


### 9.4 Measurement Results:

All the modulation modes were tested and the data of the GFSK mode are recorded in the following pages. Low, Middle and Highest channels have been tested, the worst test data channel 2402 were recorded in this report, all modulation methods do not exceed the above mentioned limits.


Spectrum Detector:	PK	Test Date :	September 25, 2014
Test By:	Jack	Temperature :	25°C
Test Result:	PASS	Humidity :	55 %

Mode	Number of transmission in a 31.6( 79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.390	124.80	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.650	264.00	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.923	311.80	400


DH1

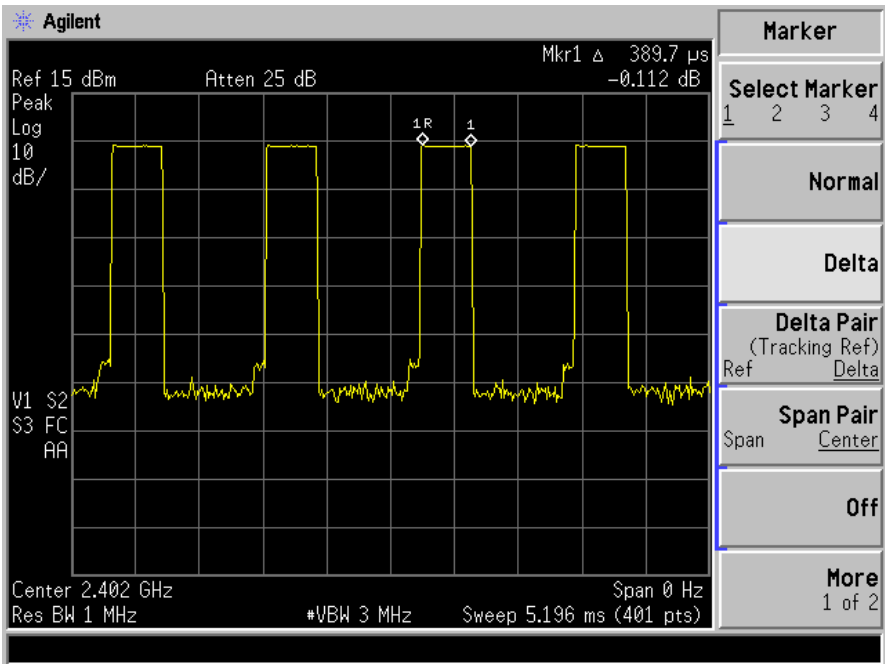

DH3

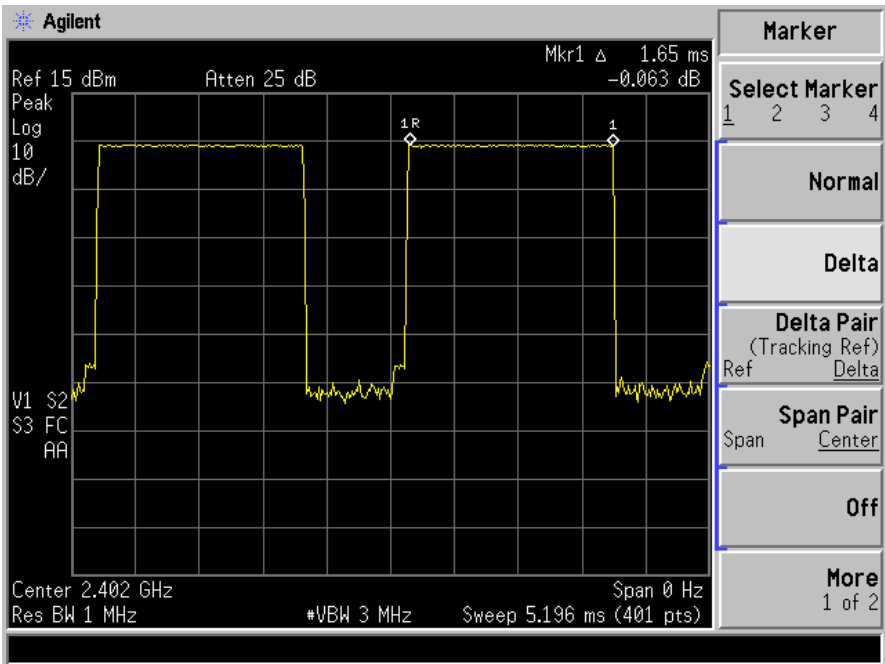

DH5

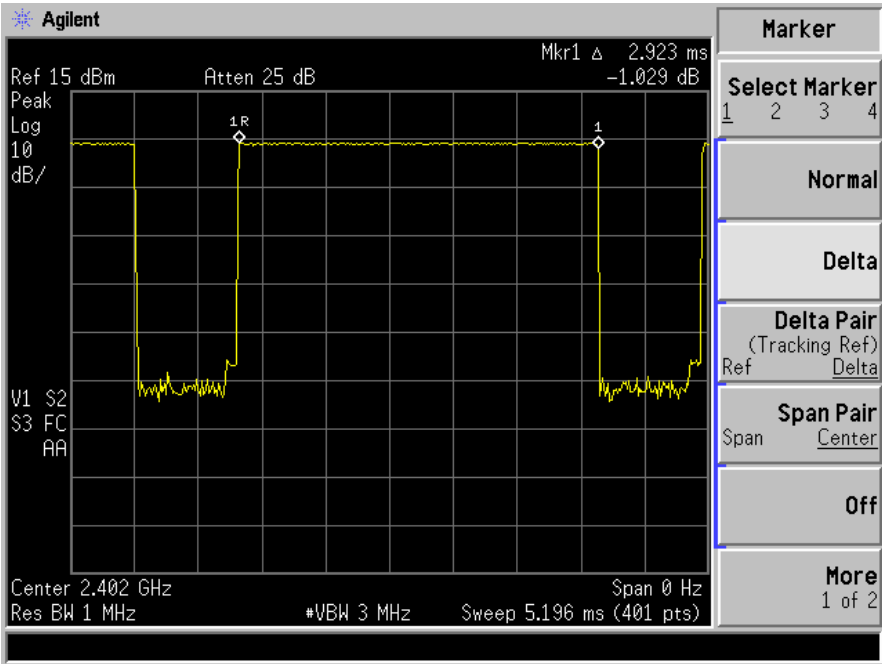


## 10. MAXIMUM PEAK OUTPUT POWER TEST

### 10.1 Measurement Procedure

- The testing follows FCC public Notice DA 00-705 Measurement Guidelines.
- The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- Set to the maximum output power setting and enable the EUT transmit continuously.
- Measure the conducted output power with cable loss and record the results in the test report.
- Measure and record the results in the report.

### 10.2 Test SET-UP (Block Diagram of Configuration)



### 10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power meter	Boonton	4232A	29001	05/17/2014	05/16/2015
Power sensor	Boonton	51011-EMC	31184	05/17/2014	05/16/2015

### 10.4 Measurement Results:

All the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK have been tested and the result recorded in the following pages and the others modulation methods do not exceed the limits.

Spectrum Detector: PK                      Test Date : September 25, 2014  
Test By: Jack                                  Temperature : 25°C  
Test Result: PASS                          Humidity : 55 %  
Modulation: GFSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	4.00	1000mW	PASS
40	2441.00	3.14	1000mW	PASS
79	2480.00	1.94	1000mW	PASS

Spectrum Detector: PK Test Date : September 25, 2014  
 Test By: Jack Temperature : 25°C  
 Test Result: PASS Humidity : 55 %  
 Modulation:  $\pi/4$ -DQPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	2.89	125mW	PASS
40	2441.00	1.57	125mW	PASS
79	2480.00	0.08	125mW	PASS

Spectrum Detector: PK Test Date : September 25, 2014  
 Test By: Jack Temperature : 25°C  
 Test Result: PASS Humidity : 55 %  
 Modulation: 8DPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	2.95	125mW	PASS
40	2441.00	1.92	125mW	PASS
79	2480.00	0.37	125mW	PASS

## 11. Band EDGE test

### 11.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

### 11.2 Test SET-UP (Block Diagram of Configuration)

As 5.2 Test set up (B) and (C)


### 11.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.

### 11.4 Measurement Results:

All the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK and hopping mode have been tested and the result recorded in the following pages and the others modulation methods do not exceed the limits.



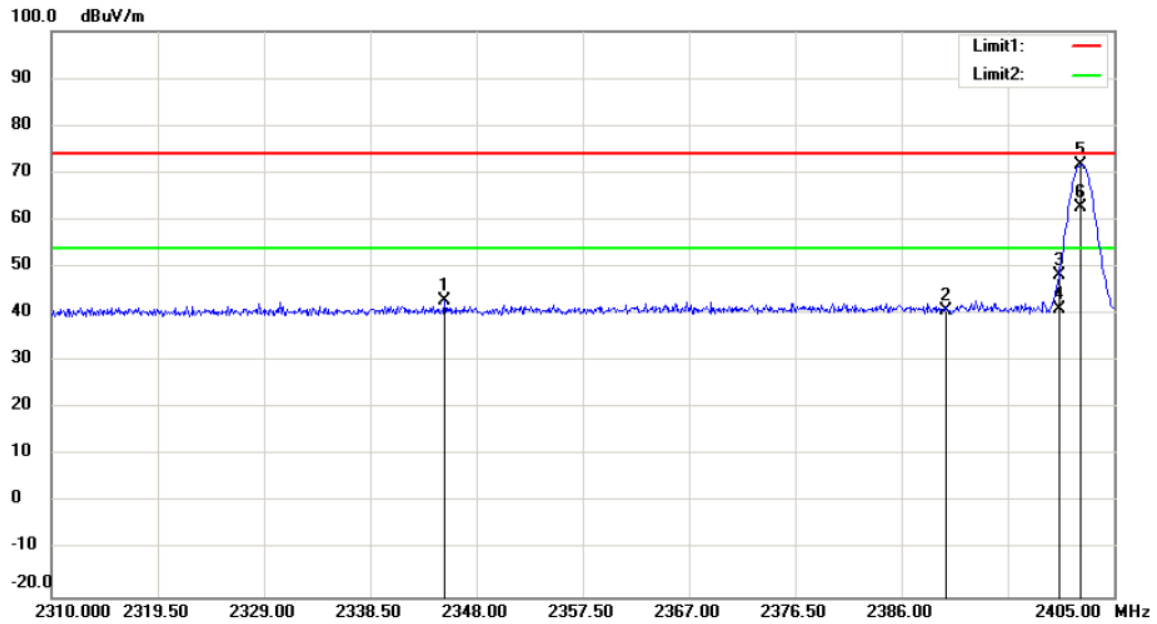

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: ( RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT:Vibration Speaker

M/N:DAIDT05


Mode:2402

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	PK/AV	Antenna Height cm	Table Degree degree	Comment
1		2345.150	50.43	-7.58	42.85	74.00	-31.15	peak			
2		2390.000	47.93	-7.18	40.75	74.00	-33.25	peak			
3		2400.000	55.33	-7.09	48.24	74.00	-25.76	peak			
4		2400.000	48.21	-7.09	41.12	54.00	-12.88	AVG			
5		2402.055	78.83	-7.07	71.76	74.00	-2.24	peak			
6	*	2402.055	69.85	-7.07	62.78	54.00	8.78	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

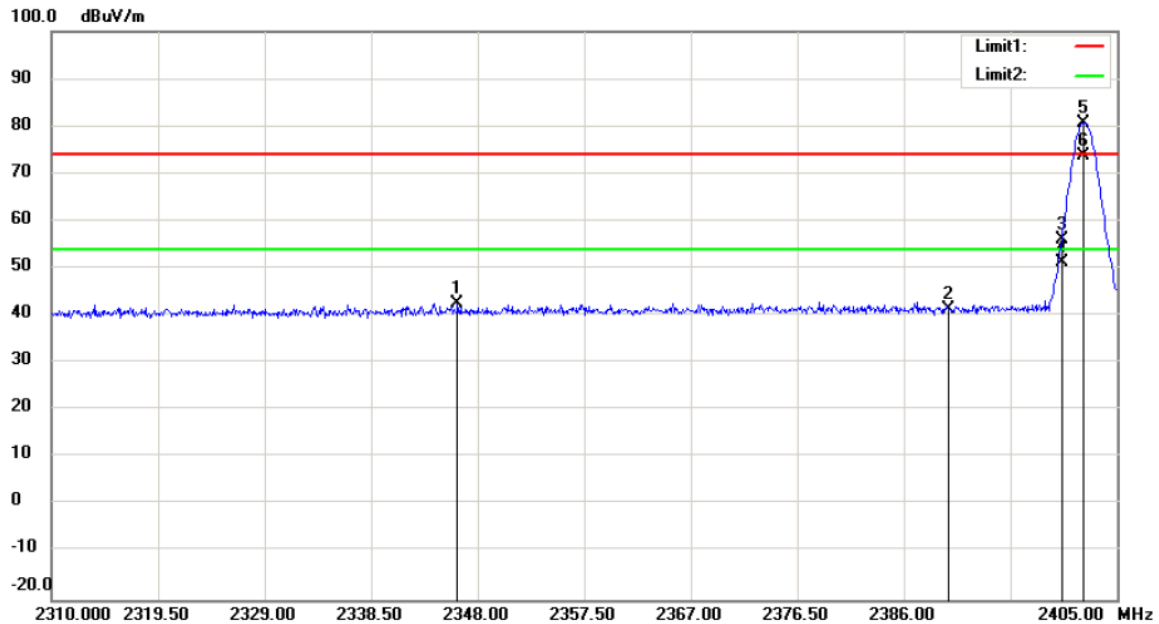

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 24 C

Limit: ( RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT:Vibration Speaker

M/N: DAIDT05


Mode:2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2346.195	50.13	-7.57	42.56	74.00	-31.44			peak
2		2390.000	48.43	-7.18	41.25	74.00	-32.75			peak
3		2400.000	63.03	-7.09	55.94	74.00	-18.06			peak
4		2400.000	58.43	-7.09	51.34	54.00	-2.66			AVG
5	X	2402.000	87.68	-7.07	80.61	74.00	6.61			peak
6	*	2402.055	80.68	-7.07	73.61	54.00	19.61			AVG

\*:Maximum data x:Over limit !:over margin

Operator: KK

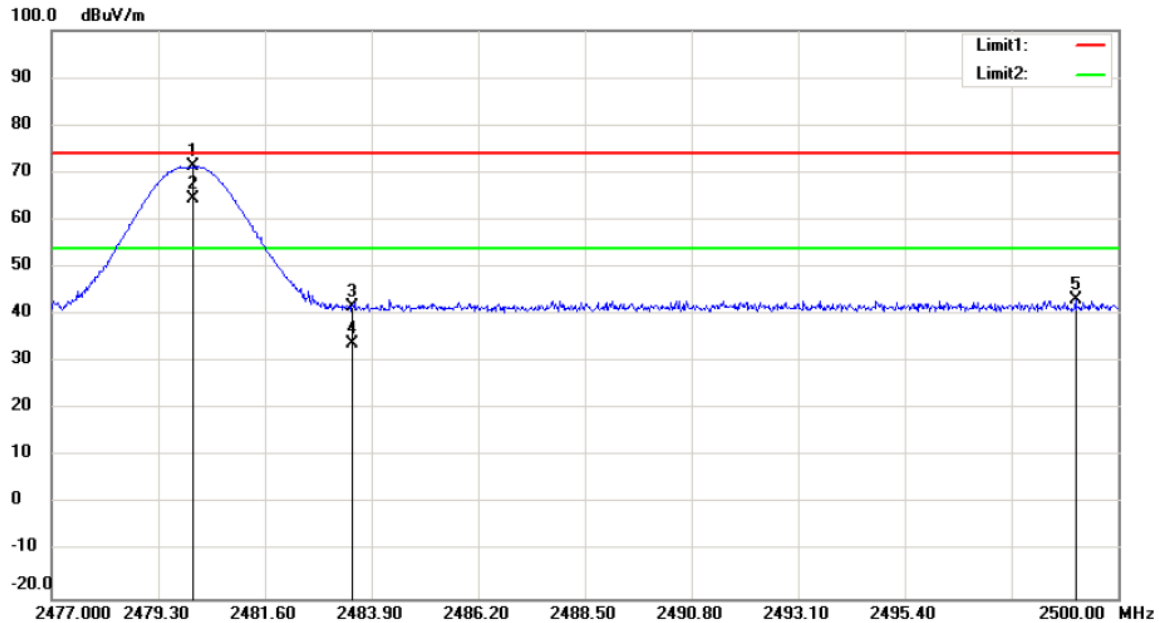

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT:Vibration Speaker

M/N:DAIDT05


Mode:2480

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	PK/AV	Antenna Height cm	Table Degree degree	Comment
1		2480.036	77.67	-6.39	71.28	74.00	-2.72	peak			
2	*	2480.036	70.85	-6.39	64.46	54.00	10.46	AVG			
3		2483.500	47.88	-6.36	41.52	74.00	-32.48	peak			
4		2483.500	40.35	-6.36	33.99	54.00	-20.01	AVG			
5		2499.080	49.36	-6.22	43.14	74.00	-30.86	peak			

\*:Maximum data x:Over limit l:over margin

Operator: KK

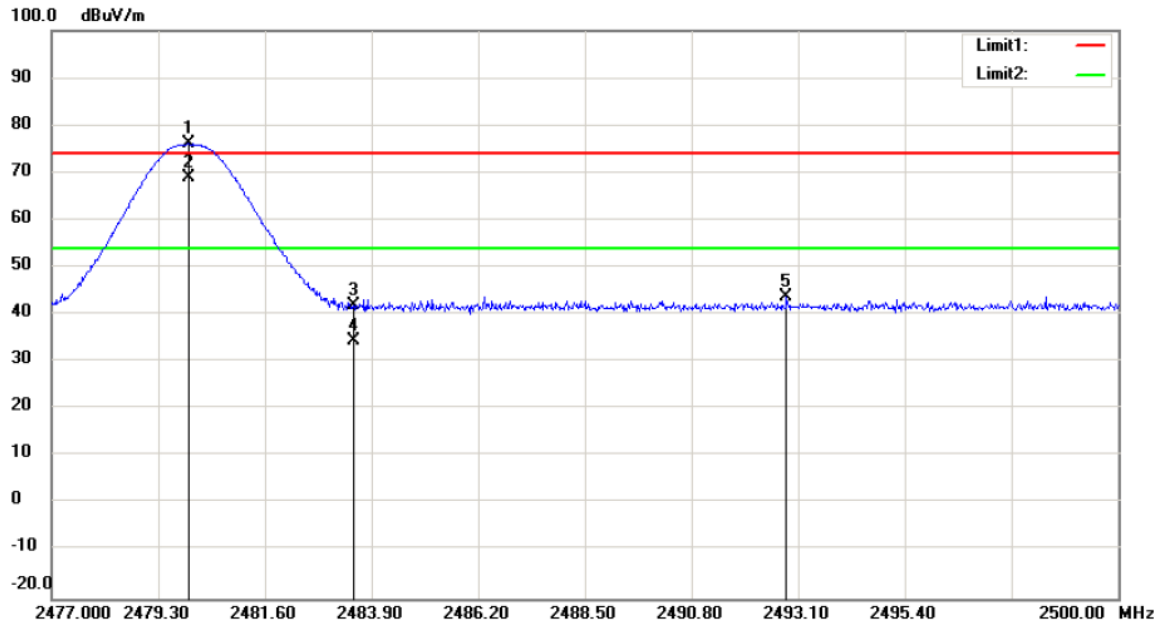

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT:Vibration Speaker

M/N:DAIDT05


Mode:2480

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	PK/AV	Antenna Height cm	Table Degree degree	Comment
1	X	2479.944	82.59	-6.39	76.20	74.00	2.20	peak			
2	*	2479.944	75.25	-6.39	68.86	54.00	14.86	AVG			
3		2483.500	48.21	-6.36	41.85	74.00	-32.15	peak			
4		2483.500	40.69	-6.36	34.33	54.00	-19.67	AVG			
5		2492.847	50.08	-6.27	43.81	74.00	-30.19	peak			

\*:Maximum data x:Over limit !:over margin

Operator: KK

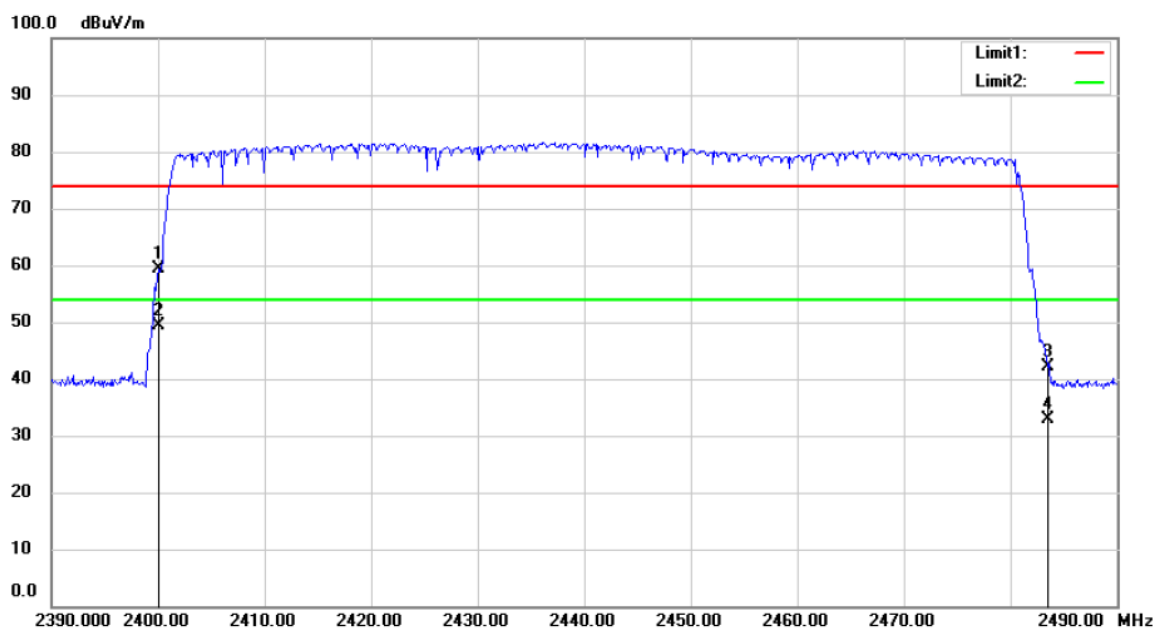


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15 CLASS B Power:AC 120V/60Hz Humidity: 53 %  
 EUT:Vibration Speaker  
 M/N:DAIDT05  
 Mode:HOPPING  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2400.000	82.44	-23.06	59.38	74.00	-14.62	PK/AV		peak
2	*	2400.000	72.36	-23.06	49.30	54.00	-4.70	AVG		
3		2483.500	64.69	-22.62	42.07	74.00	-31.93	peak		
4		2483.500	55.42	-22.62	32.80	54.00	-21.20	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

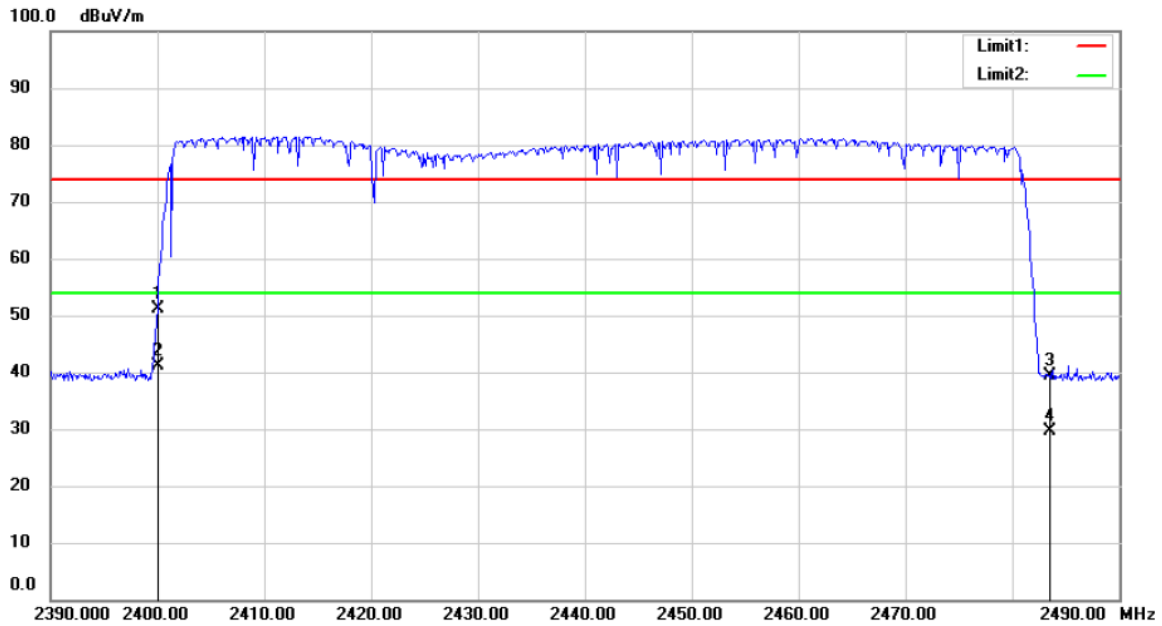

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power:AC 120V/60Hz

Humidity: 53 %

EUT:Vibration Speaker

M/N:DAIDT05

Mode:HOPPING

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	PK/AV	Antenna Height cm	Table Degree degree	Comment
1		2400.000	74.29	-23.06	51.23	74.00	-22.77	peak			
2	*	2400.000	64.26	-23.06	41.20	54.00	-12.80	AVG			
3		2483.500	61.99	-22.62	39.37	74.00	-34.63	peak			
4		2483.500	52.22	-22.62	29.60	54.00	-24.40	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

## 12. Antenna Port Emission

### 12.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

### 12.2 Measuring Instruments and setting

All the modulation modes were tested and the data of the GFSK mode are recorded in the following pages and the others modulation methods do not exceed the limits.


The following table is the setting of spectrum analyzer.

EMI Test Receiver	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

### 12.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels, the limit was determined by attenuation 20dB of the RF peak power output.

### 12.4 Block Diagram of Test setup





### 12.5 Test Result

PASS.



All the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK have been tested and the worst result recorded in the following pages and the others modulation methods do not exceed the limits.

TX 2402MHz

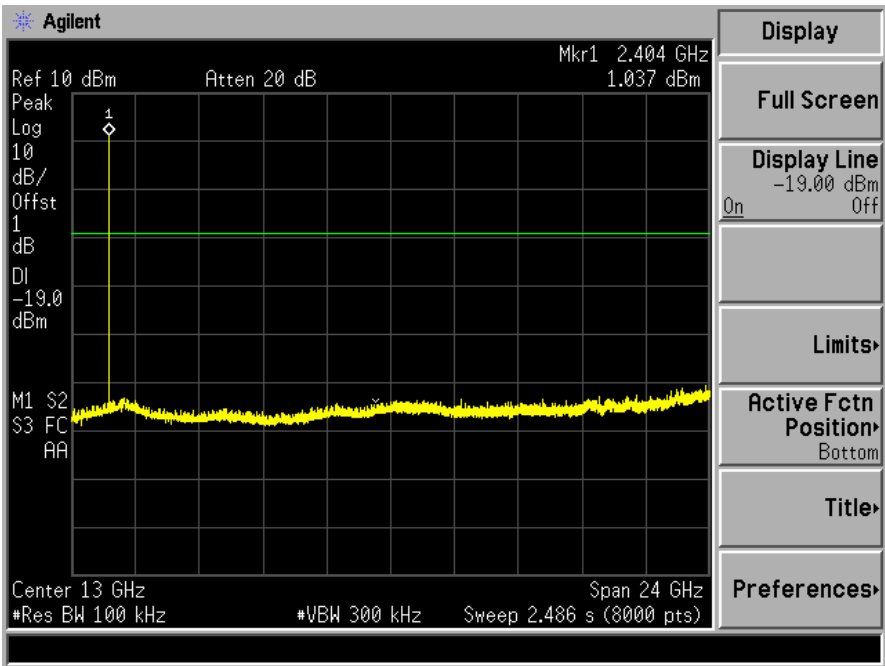
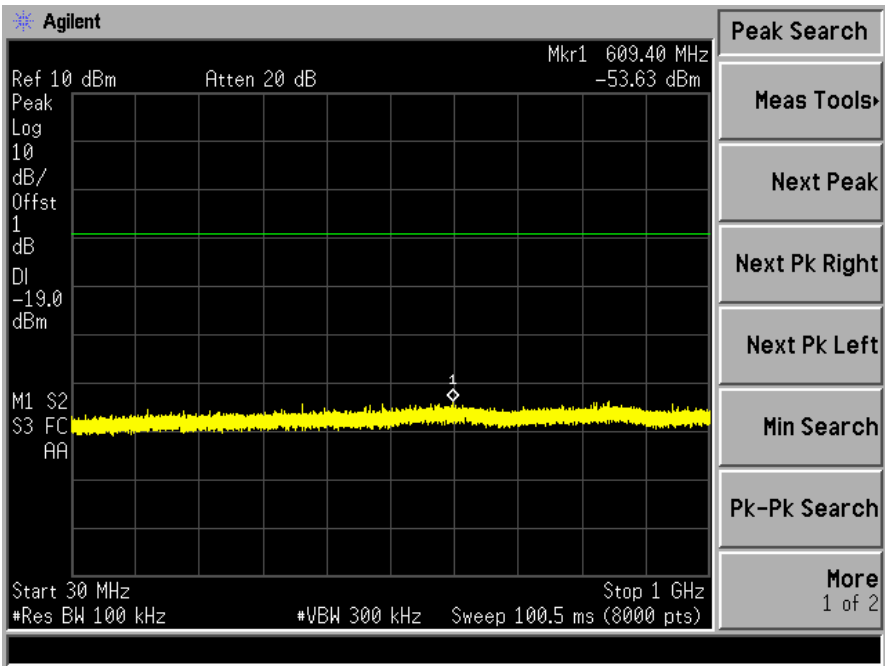




TX 2441MHz

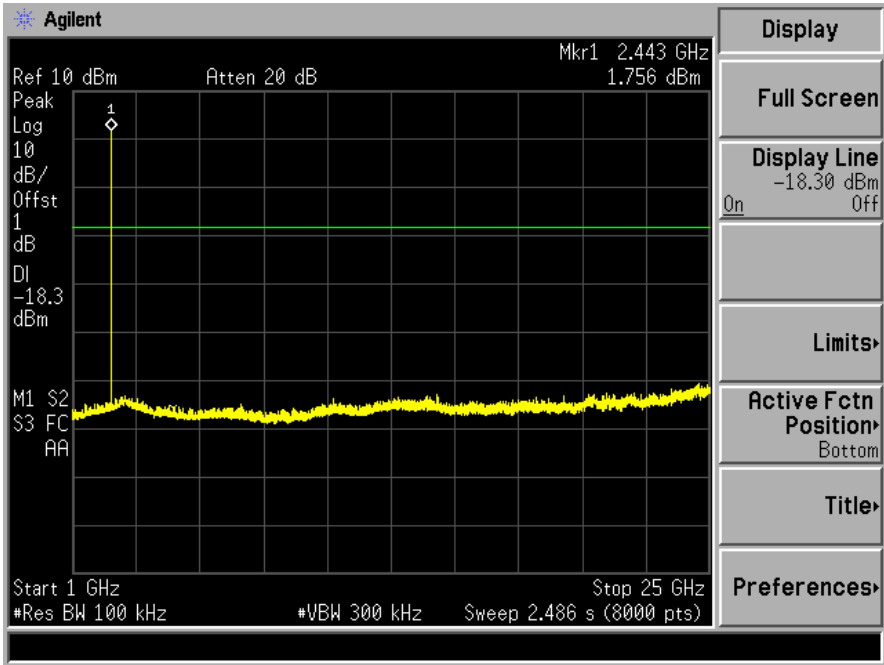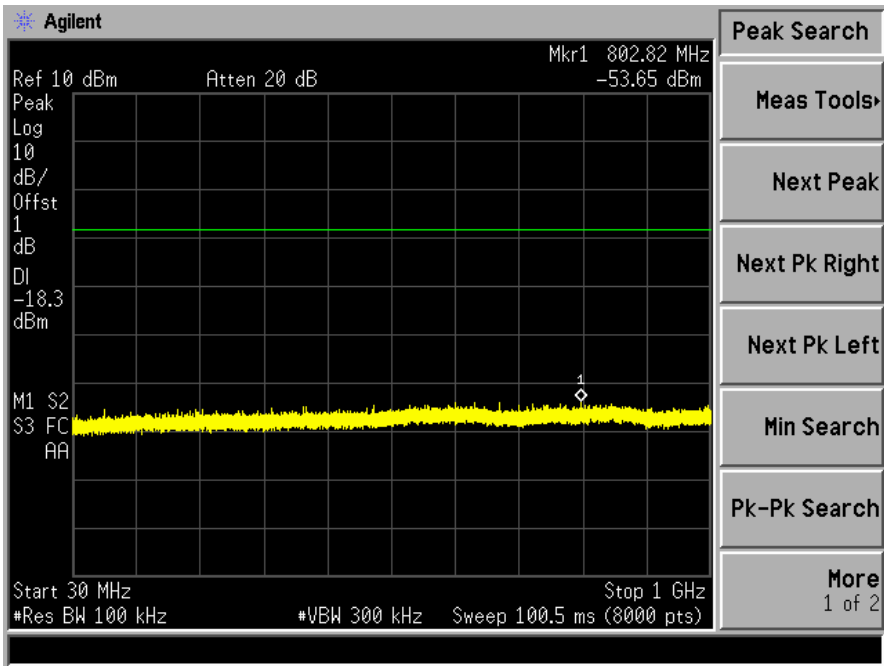

TX 2480MHz

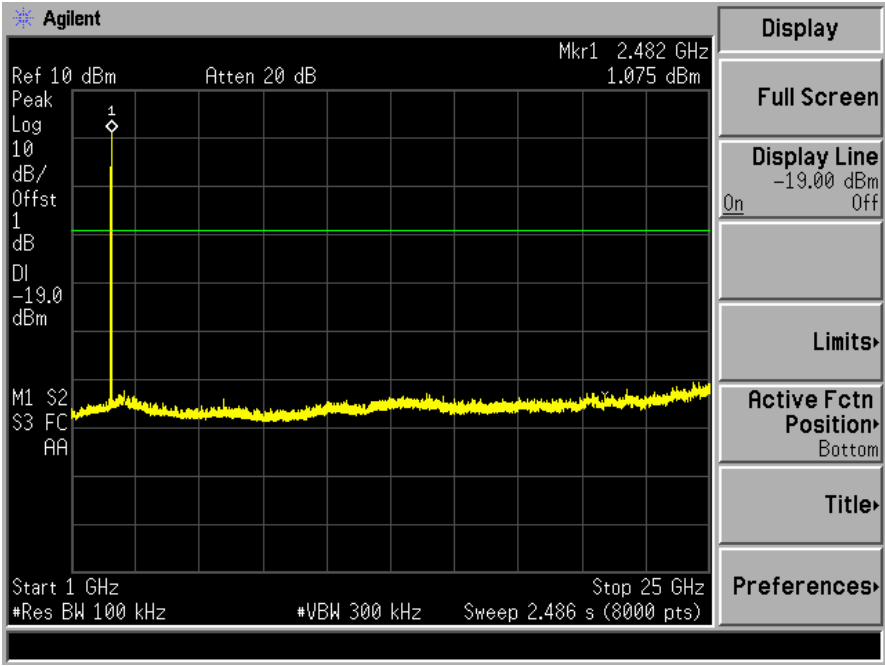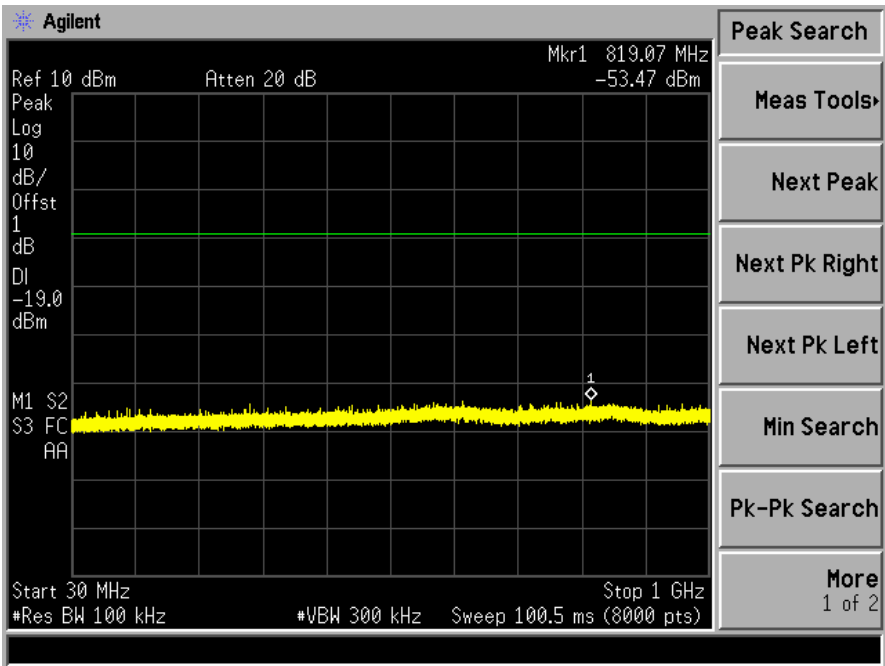

## **13. Antenna Application**

### **13.1 Antenna requirement**

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **13.2 Result**

The EUT's antenna integrated on PCB, The antenna's gain is 0dBi and meets the requirement.