

FCC REPORT

Applicant: Shenzhen Yuwei Information And Technology Development Co., Ltd.

Address of Applicant: 6F, Taike Bld., 2 Taike Rd., Futian, Shenzhen, P.R. China

Equipment Under Test (EUT)

Product Name: AVL GNNS Terminal

Model No.: YW3000-XQ, YW3000-X, YW3000-Y, YW7201, YW6204, YW6201, P1621

FCC ID: 2AADKYW3000-XQ

Applicable standards: FCC CFR Title 47 Part 2: 2012
FCC CFR Title 47 Part22 Subpart H: 2012
FCC CFR Title 47 Part24 Subpart E: 2012

Date of sample receipt: May 16, 2013

Date of Test: May 16-21, 2013

Date of report issued: May 21, 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	May 21, 2013	Original

Prepared By:

hank. yan.

Date:

May 21, 2013

Project Engineer

Check By:

Hans. Hu

Date:

May 21, 2013

Reviewer

3 Contents

Page

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF EUT	5
5.3	TEST MODE	7
5.4	RELATED SUBMITTAL(S) / GRANT (S)	7
5.5	TEST METHODOLOGY	7
5.6	TEST FACILITY	7
5.7	TEST LOCATION	7
6	TEST INSTRUMENTS LIST	8
7	SYSTEM TEST CONFIGURATION	9
7.1	EUT CONFIGURATION	9
7.2	EUT EXERCISE	9
7.3	CONFIGURATION OF TESTED SYSTEM	9
7.4	DESCRIPTION OF TEST MODES	9
7.5	CONDUCTED PEAK OUTPUT POWER	10
7.6	OCCUPY BANDWIDTH	12
7.7	MODULATION CHARACTERISTIC	17
7.8	OUT OF BAND EMISSION AT ANTENNA TERMINALS	17
7.9	ERP, EIRP MEASUREMENT	26
7.10	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	30
7.11	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	35
7.12	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	37
8	TEST SETUP PHOTO	38
9	EUT CONSTRUCTIONAL DETAILS	39

4 Test Summary

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917 Part 24.238	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Shenzhen Yuwei Information And Technology Development Co., Ltd.
Address of Applicant:	6F, Taike Bld., 2 Taike Rd., Futian, Shenzhen, P.R. China
Manufacturer:	Shenzhen Yuwei Information And Technology Development Co., Ltd.
Address of Manufacturer:	6F, Taike Bld., 2 Taike Rd., Futian, Shenzhen, P.R. China

5.2 General Description of EUT

Product Name:	AVL GNNS Terminal
Model No.:	YW3000-XQ, YW3000-X, YW3000-Y, YW7201, YW6204, YW6201, P1621
Remark:	Only the model No. YW3000-XQ was tested. YW3000-X, YW3000-Y, YW7201, YW6204, YW6201, P1621 and YW3000-XQ are identical in the same interior structure, electrical circuits, components and appearance. The only differences are the model name and appearance color for commercial purpose.
Operation Frequency Range:	GSM/GPRS 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz
IMEI:	350057693841864
Software Version:	P2202_V2.0
Hardware Version:	P2202_V1.1
Antenna Gain:	GSM850: 2.15dBi PCS1900: 2.15dBi
Antenna Type:	Unique antenna(Revised SMA connector)
Power Supply:	DC 10~60V

Operation Frequency List:

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...
250	848.60	809	1909.60
251	848.80	810	1909.80

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
	Channel	Frequency(MHz)		Channel	Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80

5.3 Test mode

Communicate mode (GSM850)	Keep the EUT in communicating mode on GSM850 band.
Communicate mode (PCS1900)	Keep the EUT in communicating mode on PCS1900 band.
Data mode (GSM850)	Keep the EUT in GPRS mode on GSM850 band.
Data mode (PCS1900)	Keep the EUT in GPRS mode on PCS1900 band.

5.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

5.5 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. to ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

- **Industry Canada (IC) —Registration No.: 9079A-1**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2013	Mar. 28 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 24 2013	Feb. 23 2014
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2012	June 28 2013
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2013	Mar. 27 2014
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	Mar. 30 2013	Mar. 29 2014
9	Coaxial Cable	GTS	N/A	GTS211	Mar. 30 2013	Mar. 29 2014
10	Coaxial cable	GTS	N/A	GTS210	Mar. 30 2013	Mar. 29 2014
11	Coaxial Cable	GTS	N/A	GTS212	Mar. 30 2013	Mar. 29 2014
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
14	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Mar. 30 2013	Mar. 29 2014
15	Band filter	Amindeon	82346	GTS219	Mar. 30 2013	Mar. 29 2014
16	Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	May 10 2013	May 09 2014
17	Signal Generator	Rohde & Schwarz	SML03	GTS236	May 10 2013	May 09 2014
18	Temp. Humidity/ Barometer	Oregon Scientific	BA-888	GTS248	May 10 2013	May 09 2014
19	D.C. Power Supply	Instek	PS-3030	GTS232	NA	NA
20	Splitter	Agilent	11636B	GTS237	May 10 2013	May 09 2014
21	Power meter	Rohde & Schwarz	NRVS	GTS238	May 10 2013	May 09 2014

7 System test configuration


7.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

7.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.


7.3 Configuration of Tested System

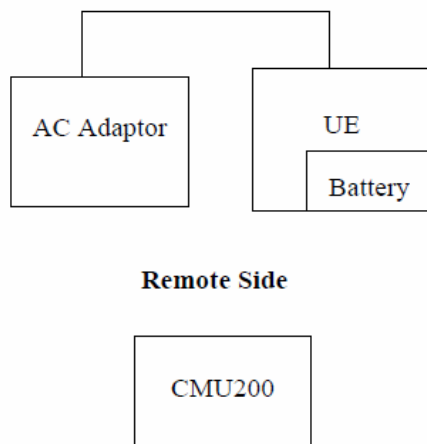

7.4 Description of test modes

The EUT has been tested under operating condition.
EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.
The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for both GSM/PCS with power adaptors, earphone and Data cable. The worst-case H mode for GSM 850 band, PCS1900 band.


7.5 Conducted Peak Output Power

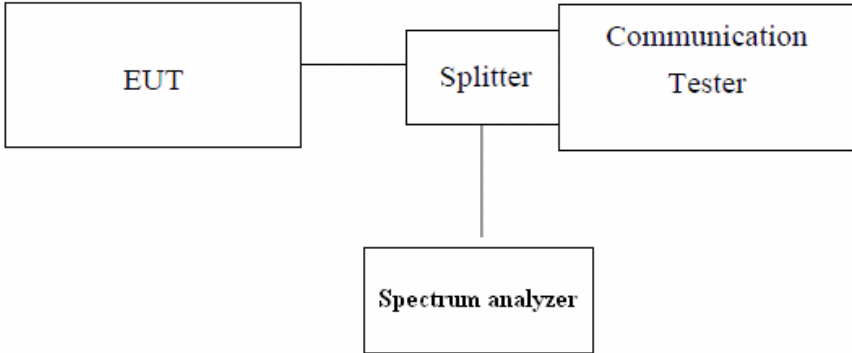Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850 7W PCS1900 2W
Test setup:	 <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the power meter. Transmitter output was read off the power meter in dBm.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

EUT Mode	Channel	Frequency (MHz)	PK power (dBm)	Limit(dBm)	Result
GSM 850	128	824.20	33.73	38.45	Pass
	190	836.60	33.83		
	251	848.80	33.90		
PCS 1900	512	1850.20	30.56	33.00	Pass
	661	1880.00	30.27		
	810	1909.80	30.18		
GPRS 850 (1 Uplink slot)	128	824.20	33.14	38.45	Pass
	190	836.60	33.27		
	251	848.80	33.30		
GPRS 1900 (1 Uplink slot)	512	1850.20	29.28	33.00	Pass
	661	1880.00	29.03		
	810	1909.80	28.91		
GPRS 850 (2 Uplink slot)	128	824.20	32.72	38.45	Pass
	190	836.60	32.76		
	251	848.80	32.79		
GPRS 1900 (2 Uplink slot)	512	1850.20	29.40	33.00	Pass
	661	1880.00	29.39		
	810	1909.80	29.35		
GPRS 850 (3 Uplink slot)	128	824.20	31.05	38.45	Pass
	190	836.60	31.09		
	251	848.80	31.14		
GPRS 1900 (3 Uplink slot)	512	1850.20	27.70	33.00	Pass
	661	1880.00	27.70		
	810	1909.80	27.65		
GPRS 850 (4 Uplink slot)	128	824.20	29.91	38.45	Pass
	190	836.60	29.95		
	251	848.80	29.98		
GPRS 1900 (4 Uplink slot)	512	1850.20	26.64	33.00	Pass
	661	1880.00	26.64		
	810	1909.80	26.62		

7.6 Occupy Bandwidth

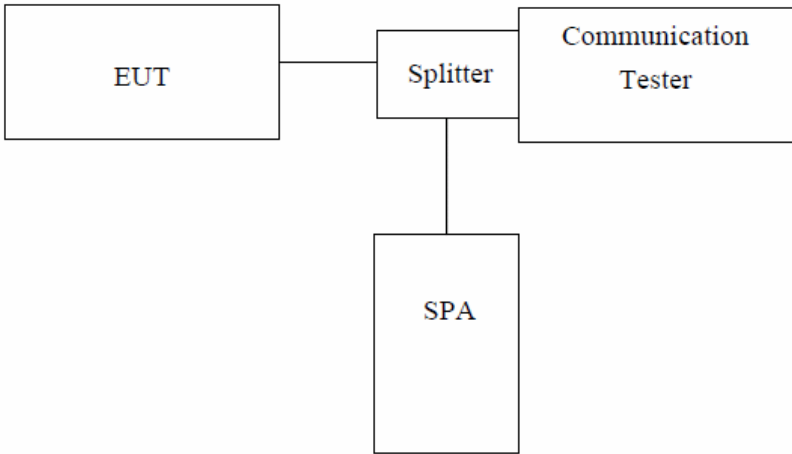
Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1049
Test setup:	 <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details. Base on the conducted power, we just selected the communication mode (worst case) to perform the test.
Test results:	Pass

Measurement Data


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
GSM 850	128	824.20	246	316
	190	836.60	242	314
	251	848.80	250	318
PCS 1900	512	1850.20	246	312
	661	1880.00	248	318
	810	1909.80	244	320

Test plot as follows:


Test Item:	99% Occupy bandwidth	Test Mode:	GSM850
------------	----------------------	------------	--------

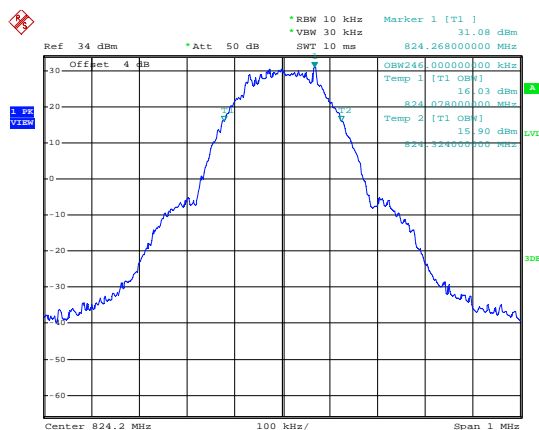

Lowest channel

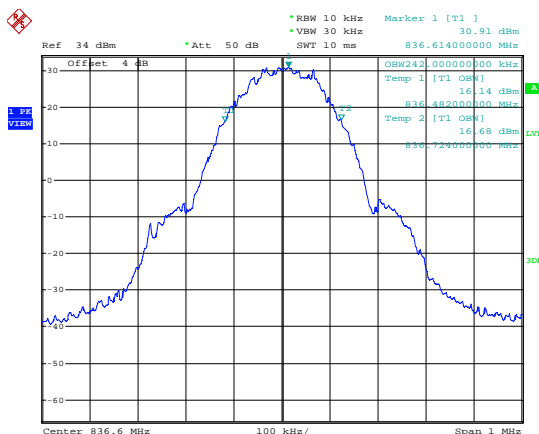


Middle channel

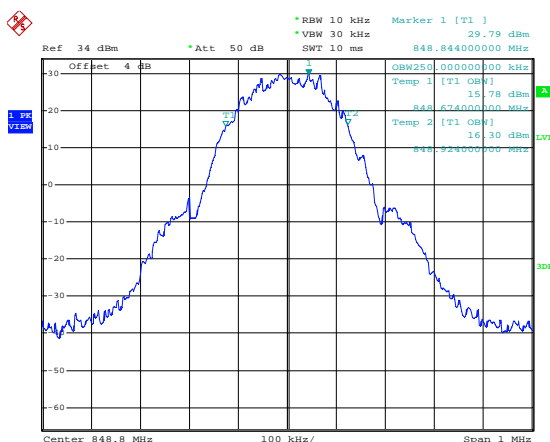


Highest channel:


Test Item:	99% Occupy bandwidth	Test Mode:	PCS1900
------------	----------------------	------------	---------

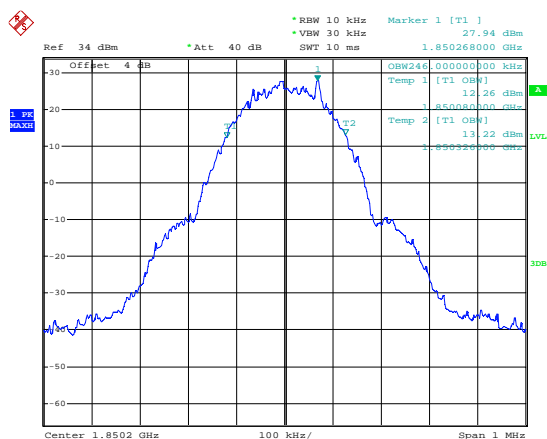

Lowest channel

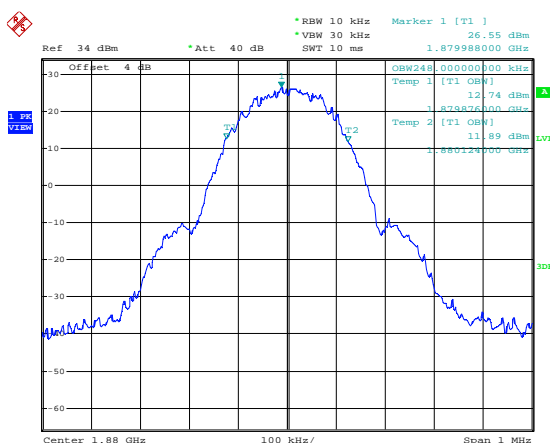


Middle channel

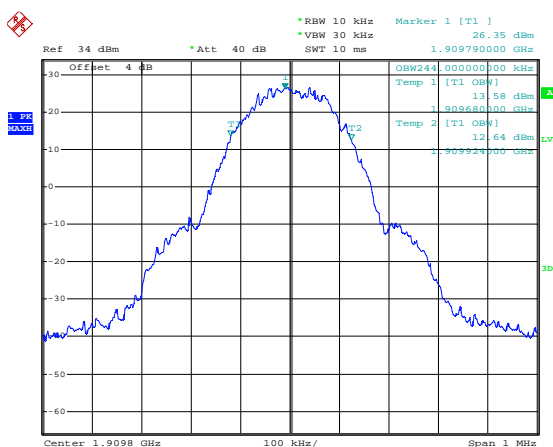


Highest channel:


Test Item:	-26dB bandwidth	Test Mode:	GSM850
------------	-----------------	------------	--------

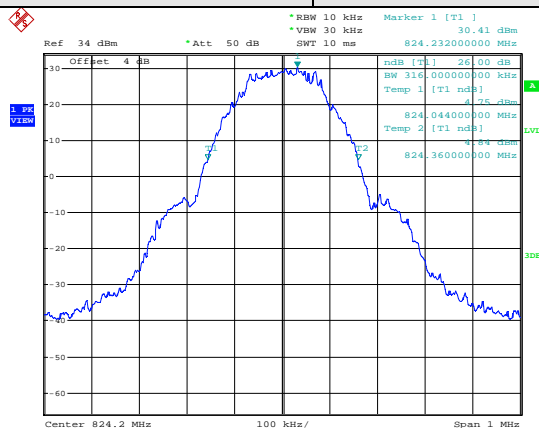

Lowest channel

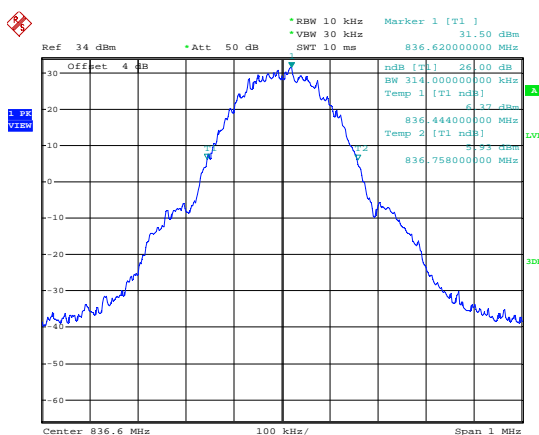


Middle channel

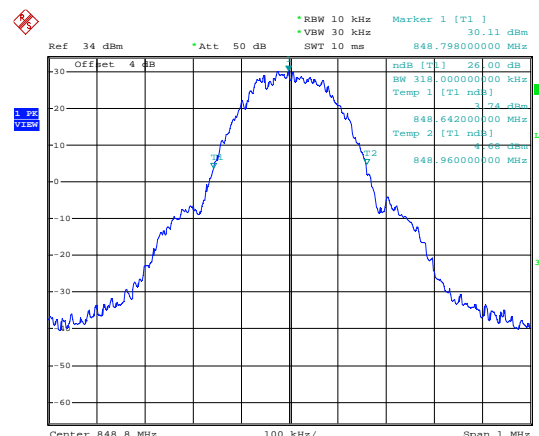


Highest channel:


Test Item:	-26dB bandwidth	Test Mode:	PCS1900
------------	-----------------	------------	---------

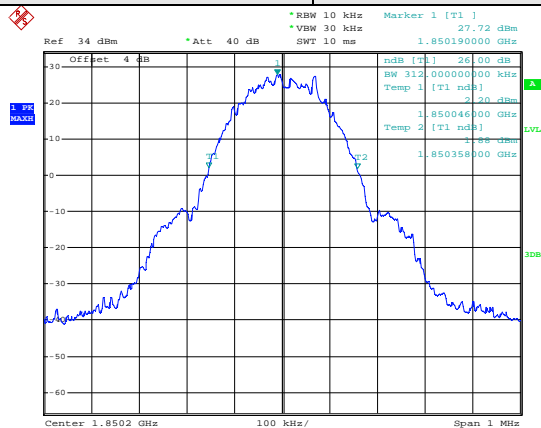

Lowest channel

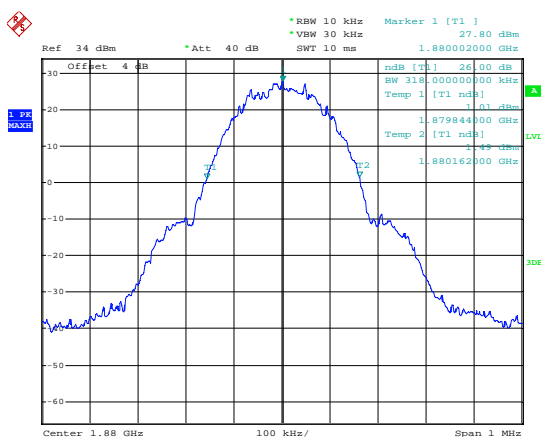

Middle channel

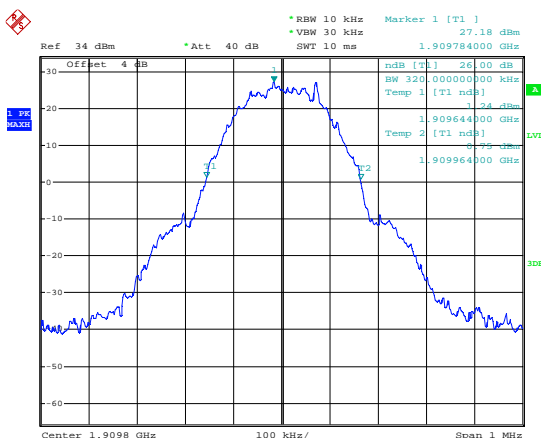


Highest channel:

7.7 Modulation characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


7.8 Out of band emission at antenna terminals

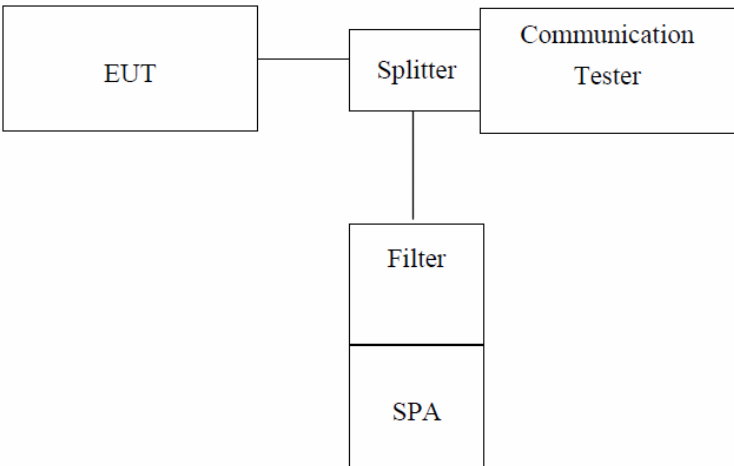Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1051
Limit:	-13dBm
Test setup:	 <p><i>Note: Measurement setup for testing on Antenna connector</i></p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details. Base on the conducted power, we just selected the communication mode (worst case) to perform the test.
Test results:	Pass


Test plot as follows:

Spurious emission

Test Mode:	GSM850	Test Channel:	Lowest channel
------------	--------	---------------	----------------

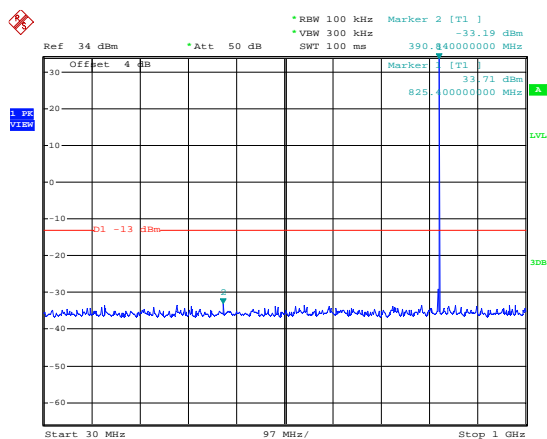


30MHz~1GHz

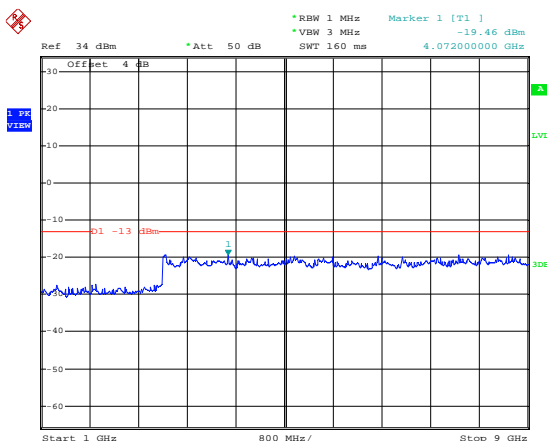


1GHz~9GHz

Test Mode:	GSM850	Test Channel:	Middle channel
------------	--------	---------------	----------------

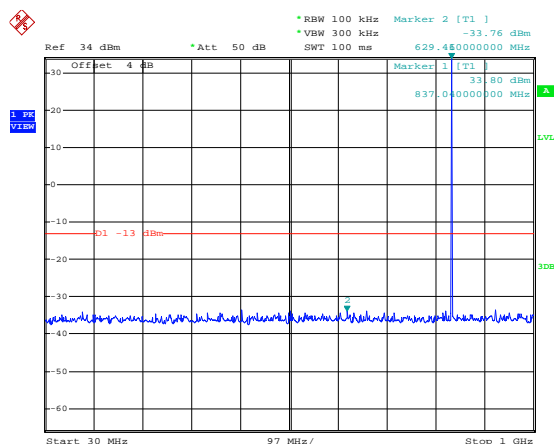


30MHz~1GHz

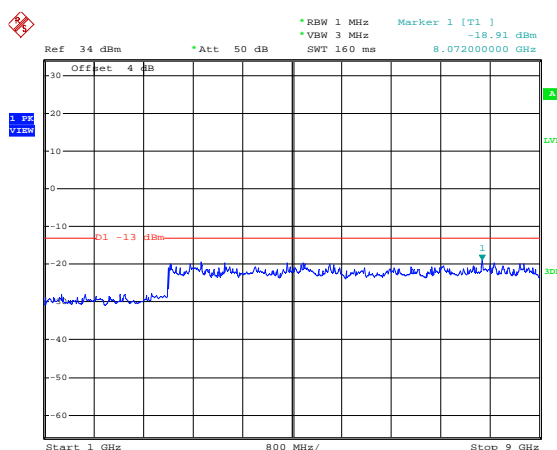


1GHz~9GHz

Test Mode:	GSM850	Test Channel:	Highest channel
------------	--------	---------------	-----------------

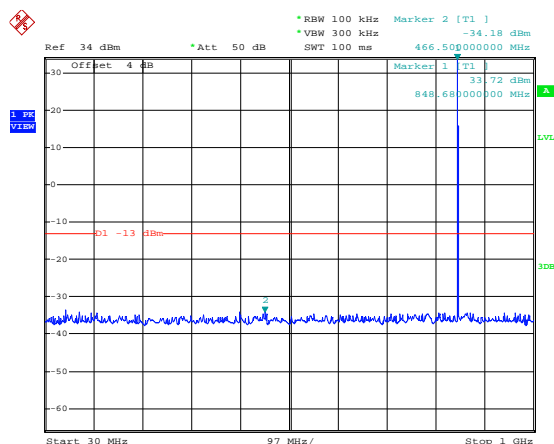


30MHz~1GHz

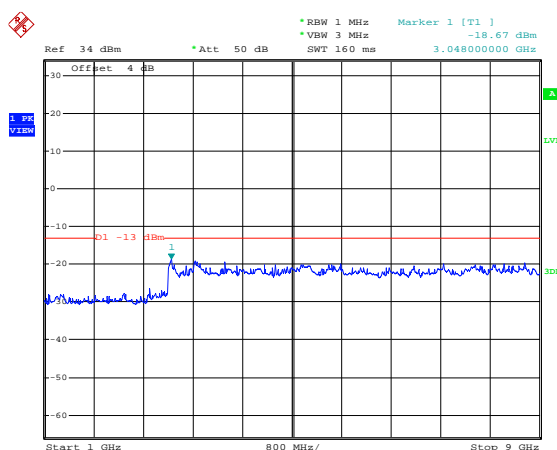


1GHz~9GHz


Test Mode:	PCS1900	Test Channel:	Lowest channel
------------	---------	---------------	----------------

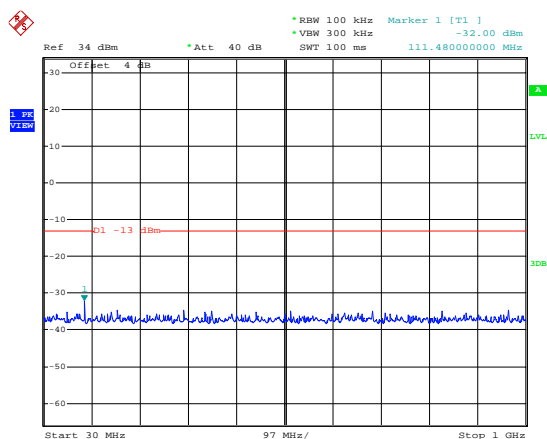

30MHz~1GHz

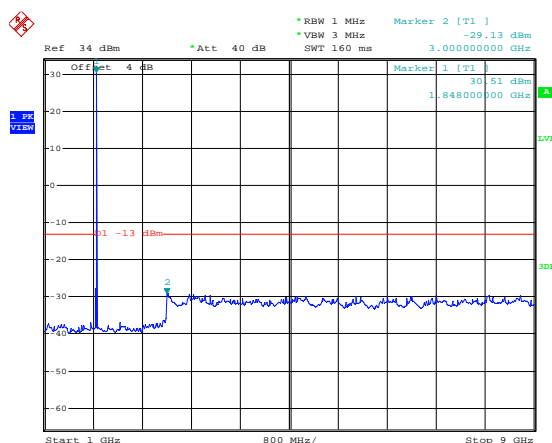


1GHz~9GHz

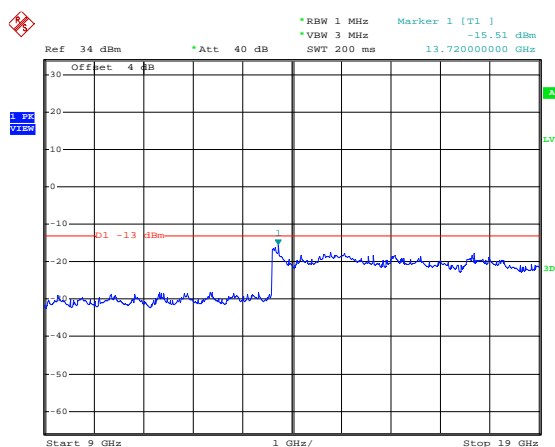


9GHz~19GHz


Test Mode:	PCS1900	Test Channel:	Middle channel
------------	---------	---------------	----------------

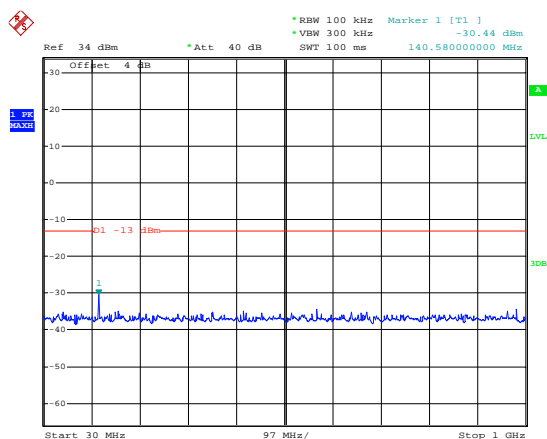

30MHz~1GHz

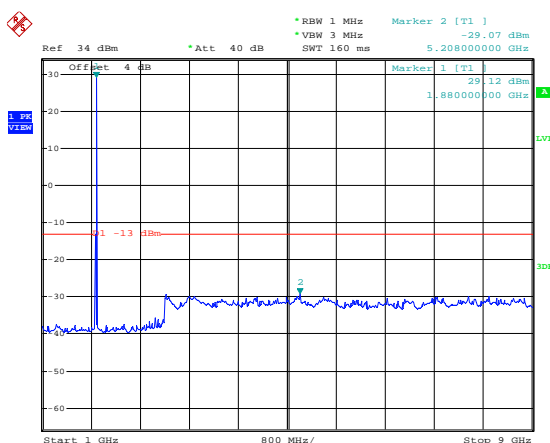


1GHz~9GHz

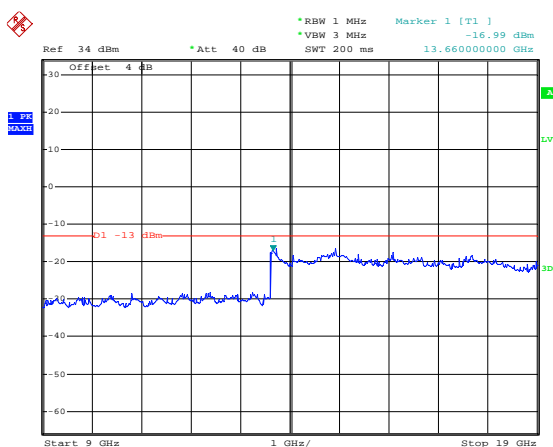


9GHz~19GHz

Test Mode:	PCS1900	Test Channel:	Highest channel
------------	---------	---------------	-----------------

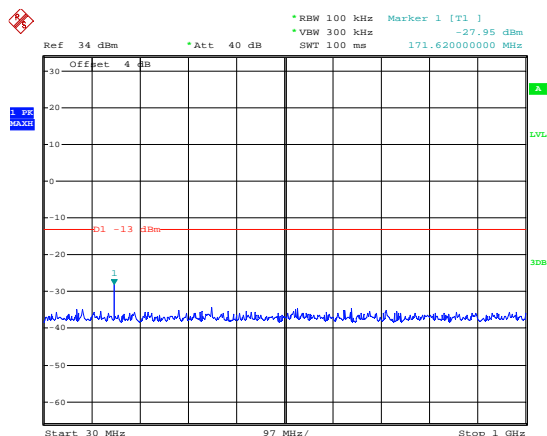


30MHz~1GHz

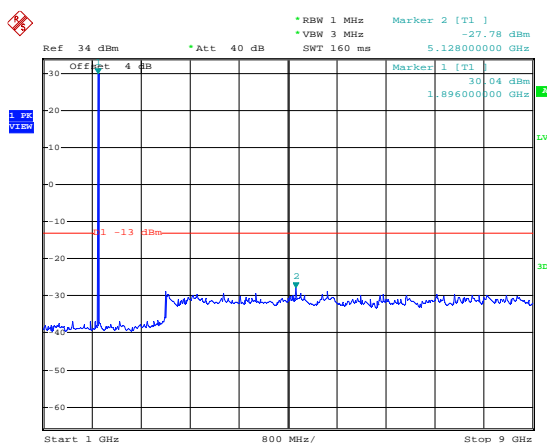

Date: 13.DEC.2011 07:45:25


1GHz~9GHz

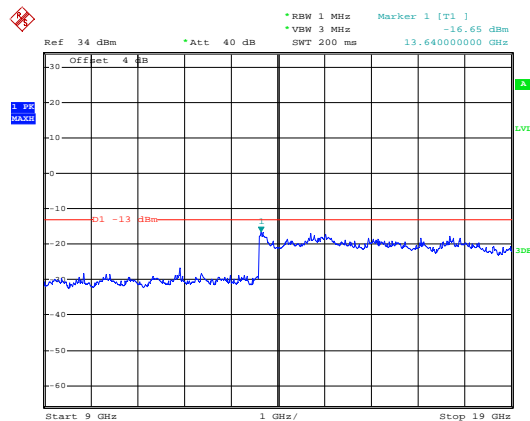


9GHz~19GHz

Band edge emission:

Test Mode:	GSM850
------------	--------

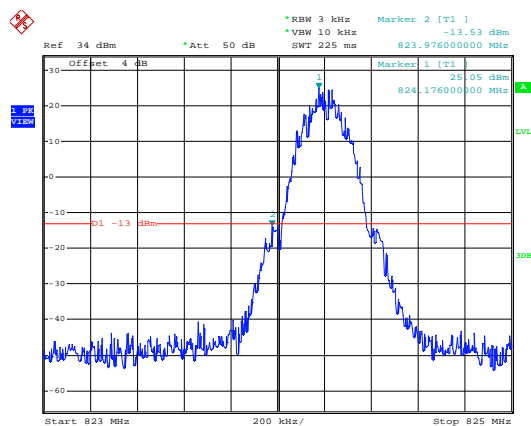


Lowest channel

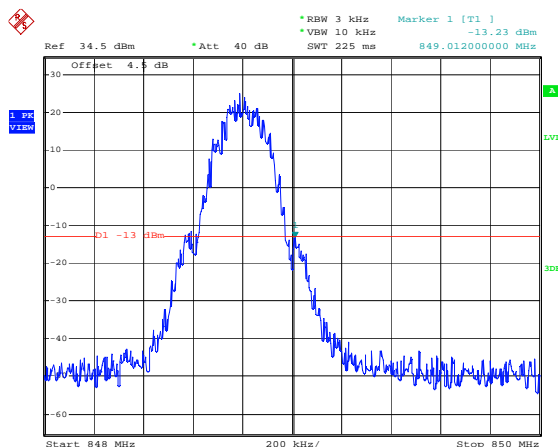


Highest channel

Test Mode:	PCS1900
------------	---------



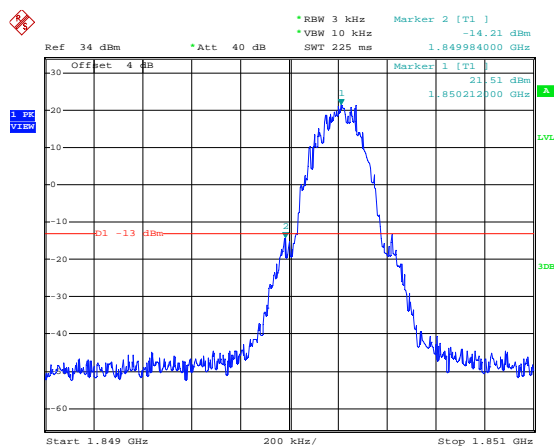


Lowest channel

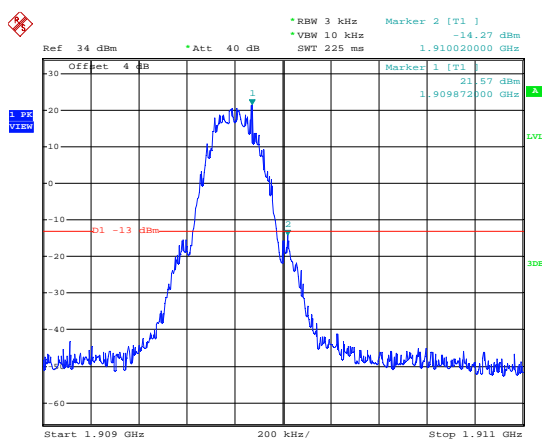

Highest channel

7.9 ERP, EIRP Measurement

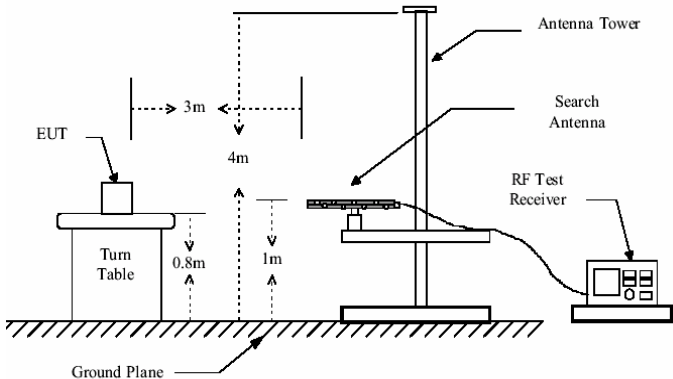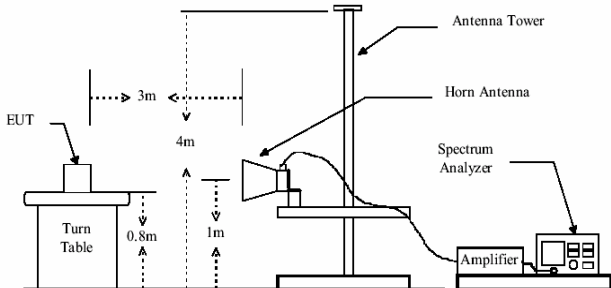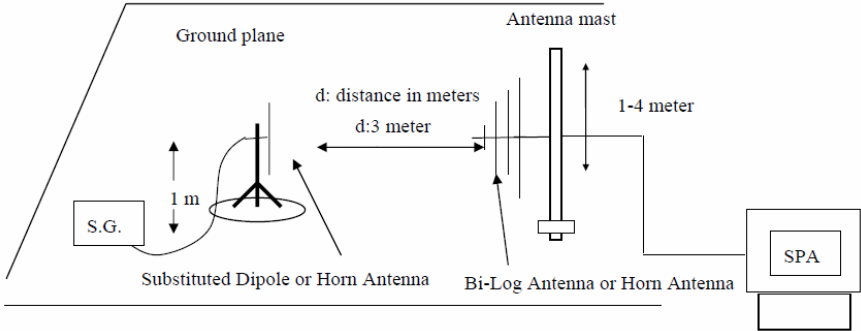Test Requirement:	FCC part22.913(a) and FCC part24.232(b)
Test Method:	FCC part2.1046
Limit:	GSM850 7W ERP PCS1900 2W EIRP
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 




Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details. Base on the conducted power, we just selected the communication mode (worst case) to perform the test.
Test results:	Pass

Measurement Data

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850	Lowest	H	V	32.79	38.45	Pass
			H	32.55		
		E1	V	30.08		
			H	31.67		
		E2	V	29.59		
			H	29.82		
	Middle	H	V	32.63	38.45	Pass
			H	30.85		
		E1	V	29.01		
			H	29.98		
		E2	V	28.32		
			H	28.97		
	Highest	H	V	32.89	38.45	Pass
			H	31.54		
		E1	V	30.58		
			H	30.77		
		E2	V	28.92		
			H	32.79		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900	Lowest	H	V	29.33	33.00	Pass
			H	27.90		
		E1	V	26.90		
			H	27.75		
		E2	V	25.83		
			H	26.48		
	Middle	H	V	29.31	33.00	Pass
			H	28.29		
		E1	V	27.26		
			H	27.78		
		E2	V	26.76		
			H	27.06		
	Highest	H	V	29.41	33.00	Pass
			H	29.40		
		E1	V	27.83		
			H	28.66		
		E2	V	26.26		
			H	29.33		

7.10 Field strength of spurious radiation measurement

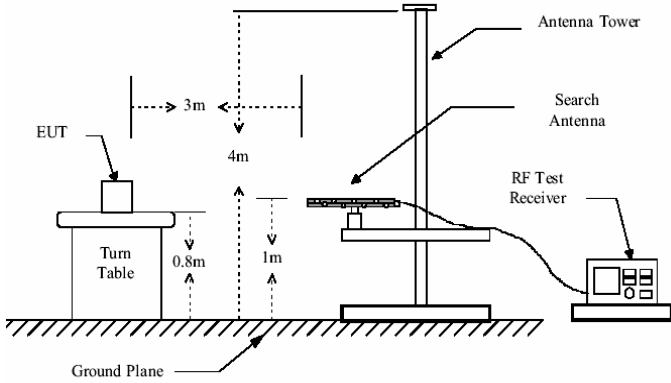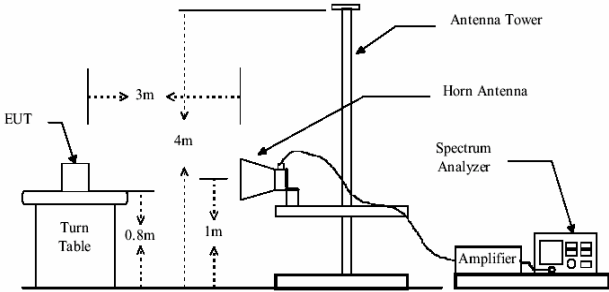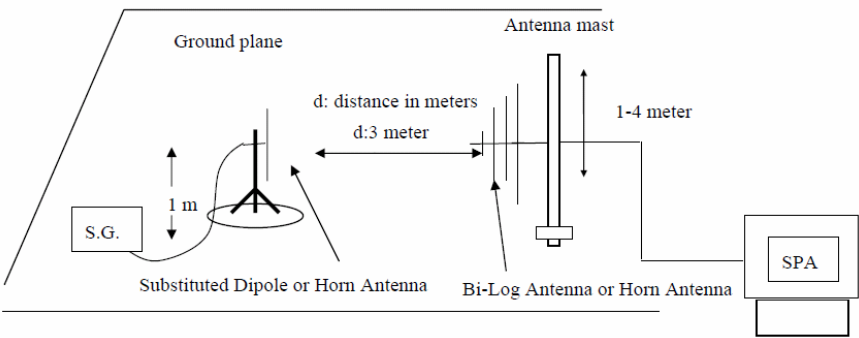Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1053
Limit:	-13dBm
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p> 

Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details. Base on the conducted power, we just selected the communication mode (worst case) to perform the test.
Test results:	Pass

Measurement Data

Test mode:	GSM850		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1680.50	Vertical	-37.14	-13.00	Pass
2479.00	V	-36.16		
3298.00	V	-39.63		
4126.00	V	-38.58		
4948.00	V	---		
5770.00	V	---		
1680.50	Horizontal	-37.26	-13.00	Pass
2479.00	H	-32.16		
3298.00	H	-33.99		
4126.00	H	-42.61		
4948.00	H	---		
5770.00	H	---		
Test mode:	GSM850		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1679.00	Vertical	-34.36	-13.00	Pass
2512.00	V	-34.82		
3358.00	V	-38.00		
4186.00	V	-43.65		
5020.00	V	---		
5858.00	V	---		
1679.00	Horizontal	-32.40	-13.00	Pass
2512.00	H	-35.88		
3358.00	H	-37.07		
4186.00	H	-42.34		
5020.00	H	---		
5858.00	H	---		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	GSM850		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1698.00	Vertical	-34.44	-13.00	Pass
2550.00	V	-32.48		
3398.00	V	-36.62		
4246.00	V	-38.33		
5094.00	V	---		
5942.00	V	---		
1698.00	Horizontal	-37.44	-13.00	Pass
2550.00	H	-37.87		
3398.00	H	-39.71		
4246.00	H	-45.91		
5094.00	H	---		
5942.00	H	---		
Test mode:	PCS1900		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3800.00	Vertical	-39.51	-13.00	Pass
5566.00	V	-38.90		
7400.00	V	-40.28		
9256.00	V	-42.38		
11106.00	V	---		
12955.00	V	---		
3800.00	Horizontal	-38.47	-13.00	Pass
5566.00	H	-40.18		
7400.00	H	-40.25		
9256.00	H	-44.35		
11106.00	H	---		
12955.00	H	---		

Remark:


1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	PCS1900		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3780.00	Vertical	-38.08	-13.00	Pass
5646.00	V	-34.92		
7528.00	V	-35.17		
9446.00	V	-37.04		
11280.00	V	---		
13160.00	V	---		
3780.00	Horizontal	-38.39	-13.00	Pass
5646.00	H	-42.56		
7528.00	H	-41.19		
9446.00	H	-37.31		
11280.00	H	---		
13160.00	H	---		
Test mode:	PCS1900		Test channel:	Highest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3820.00	Vertical	-40.64	-13.00	Pass
5730.00	V	-37.99		
7645.00	V	-32.77		
9552.00	V	-36.19		
11460.00	V	---		
13370.00	V	---		
3820.00	Horizontal	-42.09	-13.00	Pass
5730.00	H	-36.99		
7645.00	H	-37.83		
9552.00	H	-37.09		
11460.00	H	---		
13370.00	H	---		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.


7.11 Frequency stability V.S. Temperature measurement

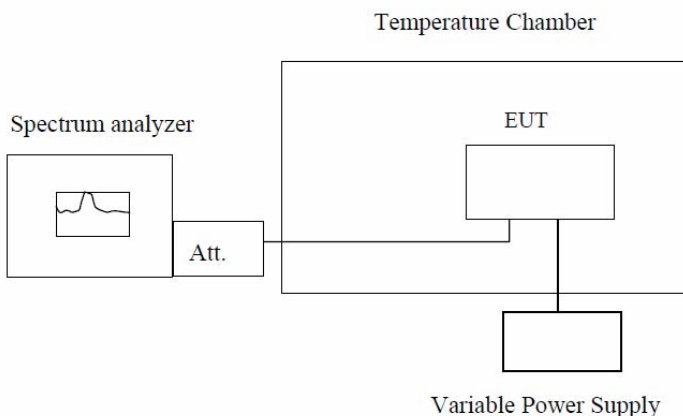Test Requirement:	FCC Part2.1055(a)(1)(b)
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	 <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details. Base on the conducted power, we just selected the communication mode (worst case) to perform the test.
Test results:	Pass

Measurement Data

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12.0	-30	41	0.0490	2.5	Pass
	-20	40	0.0478		
	-10	39	0.0466		
	0	33	0.0394		
	10	32	0.0383		
	20	27	0.0323		
	30	34	0.0406		
	40	35	0.0418		
	50	37	0.0442		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12.0	-30	47	0.0250	2.5	Pass
	-20	46	0.0245		
	-10	44	0.0234		
	0	43	0.0229		
	10	40	0.0213		
	20	41	0.0218		
	30	42	0.0223		
	40	45	0.0239		
	50	40	0.0213		

7.12 Frequency stability V.S. Voltage measurement

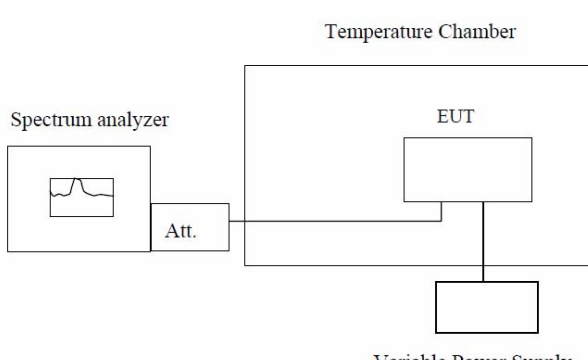Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	 <p>Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. Set chamber temperature to 25 °C . Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass



Measurement Data

Measurement Data


Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.8	26	0.0311	2.5	Pass
	12.0	28	0.0335		
	10.8	30	0.0359		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	13.8	37	0.0197	2.5	Pass
	12.0	42	0.0223		
	10.8	39	0.0207		



8 Test Setup Photo


Radiated Emission

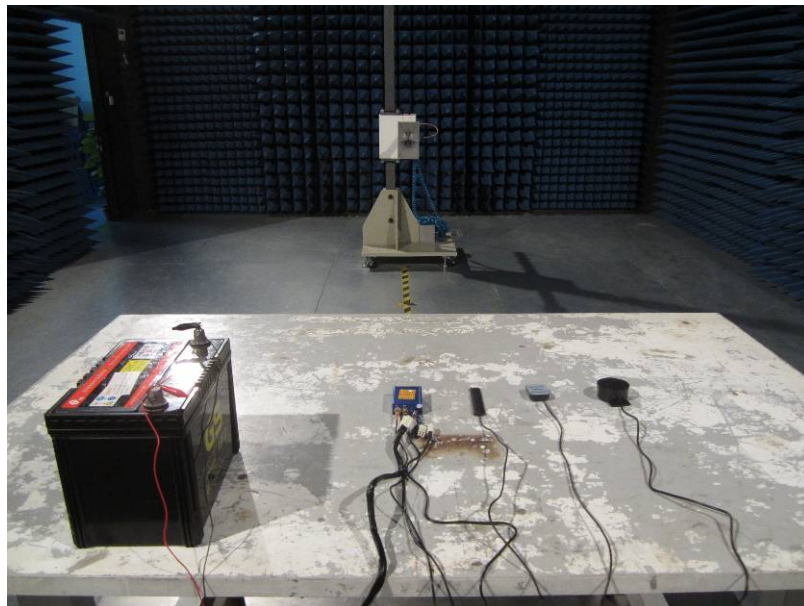
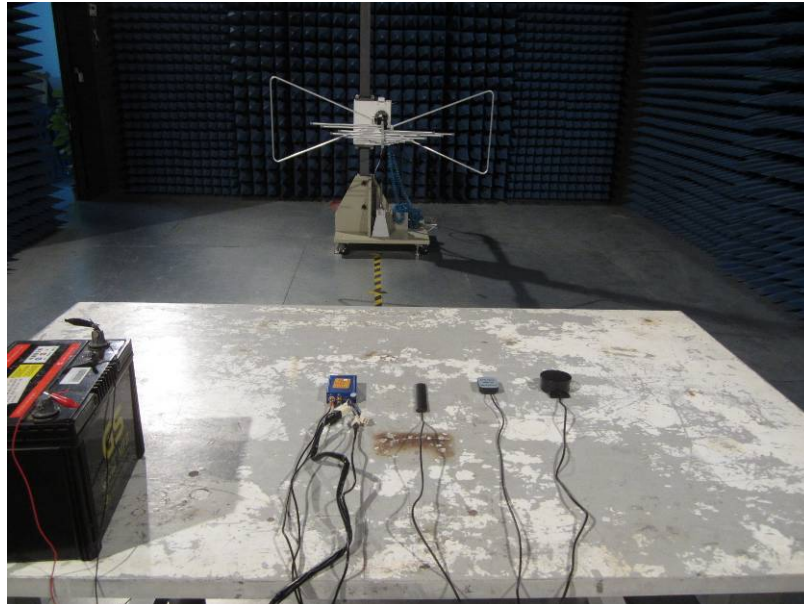




9 EUT Constructional Details

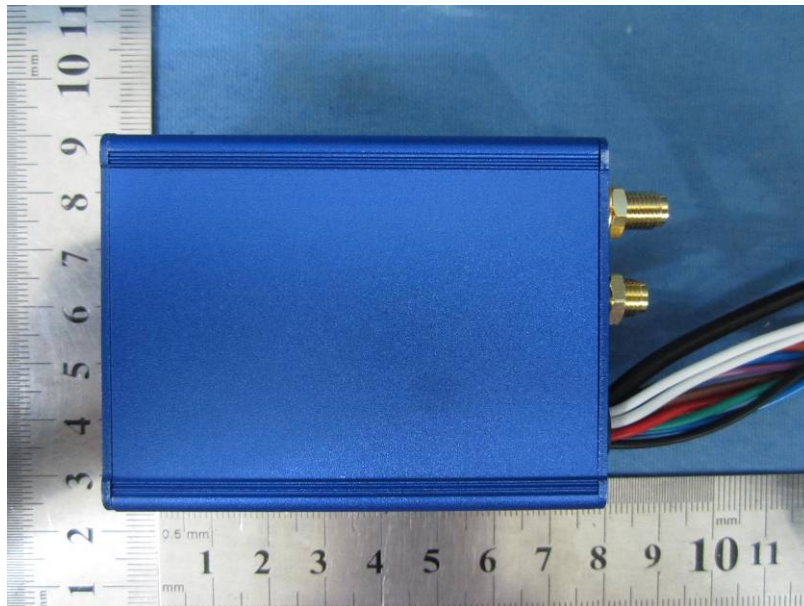

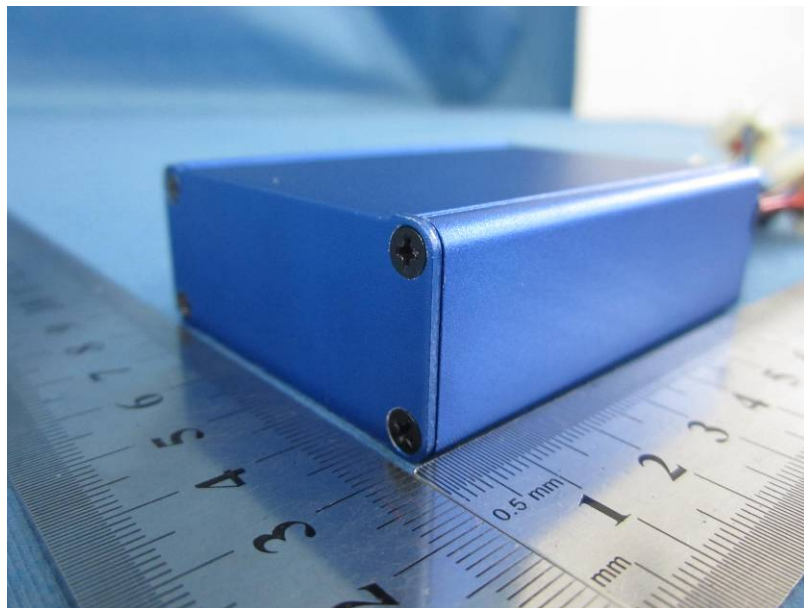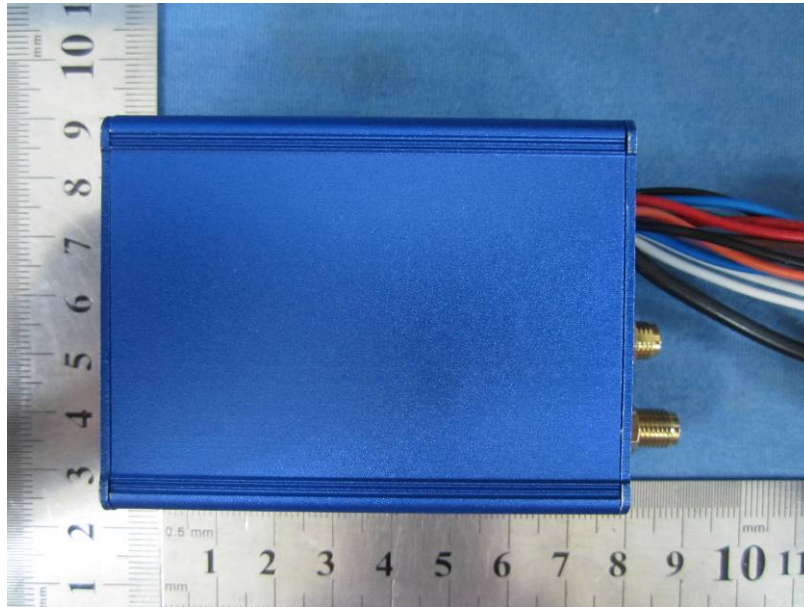

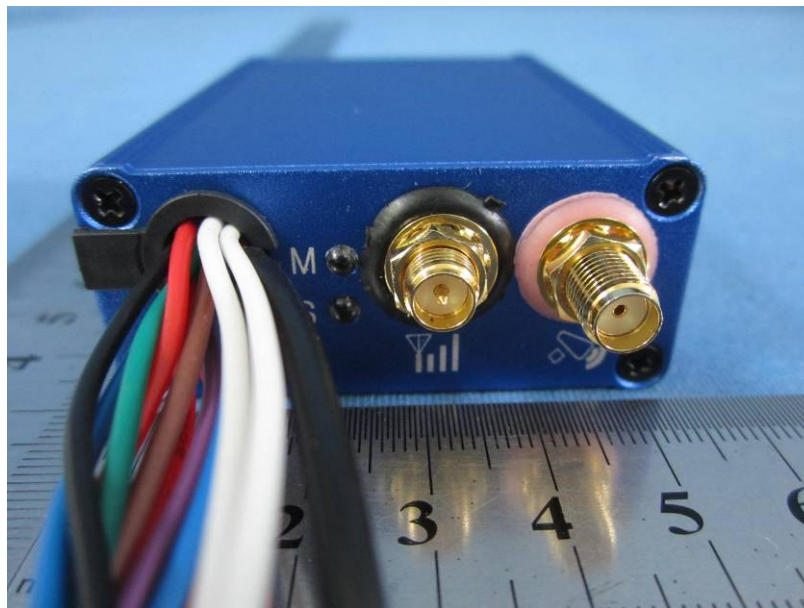

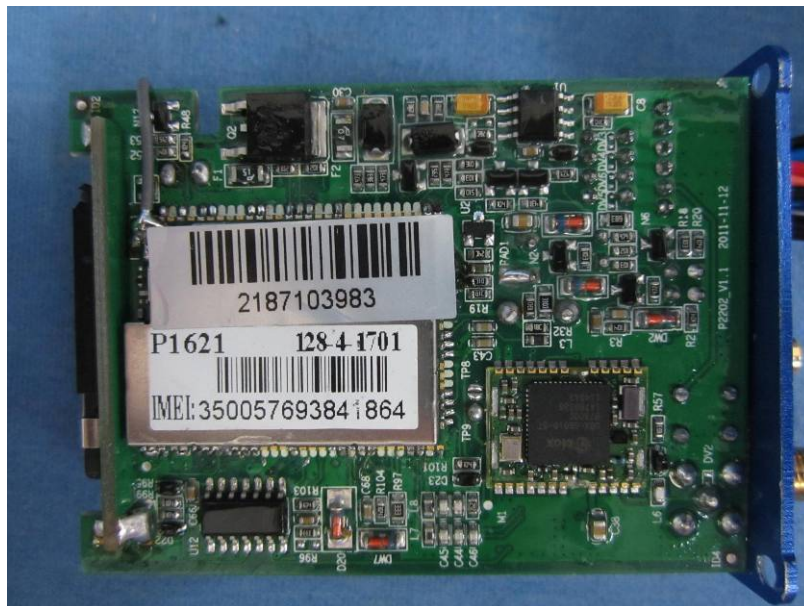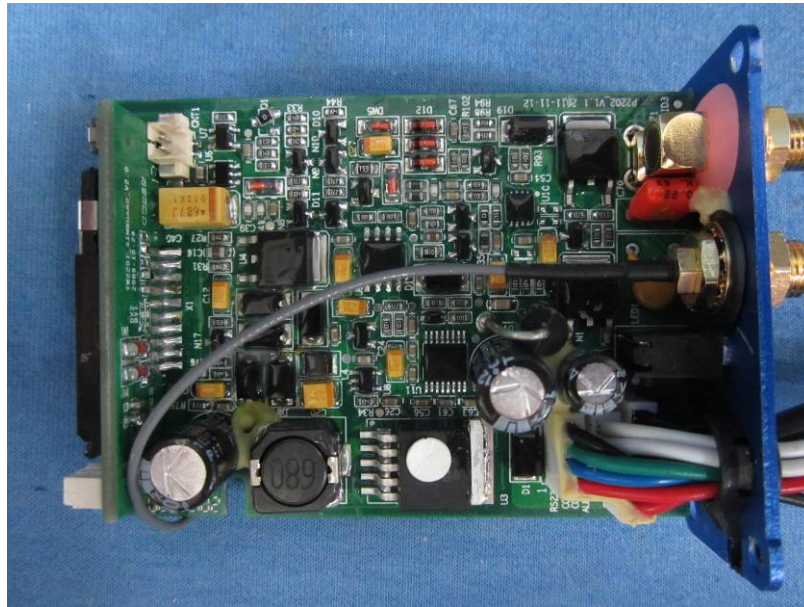

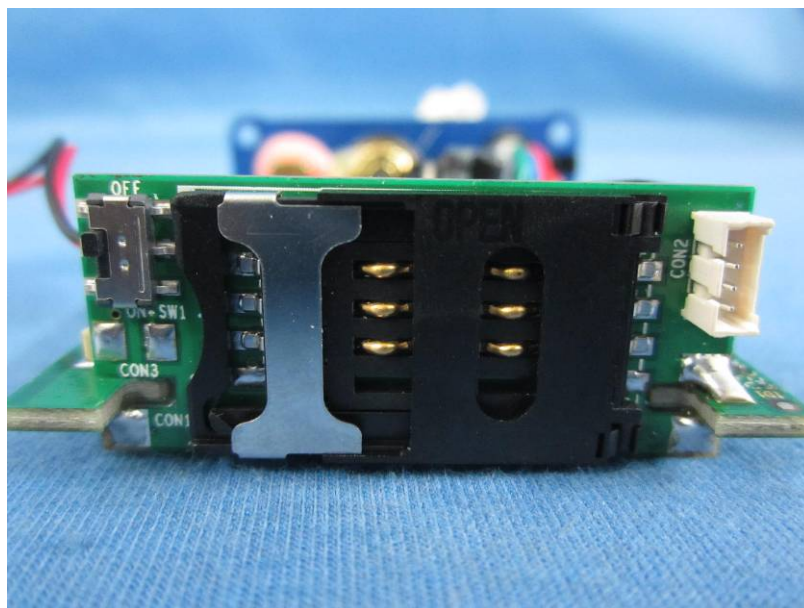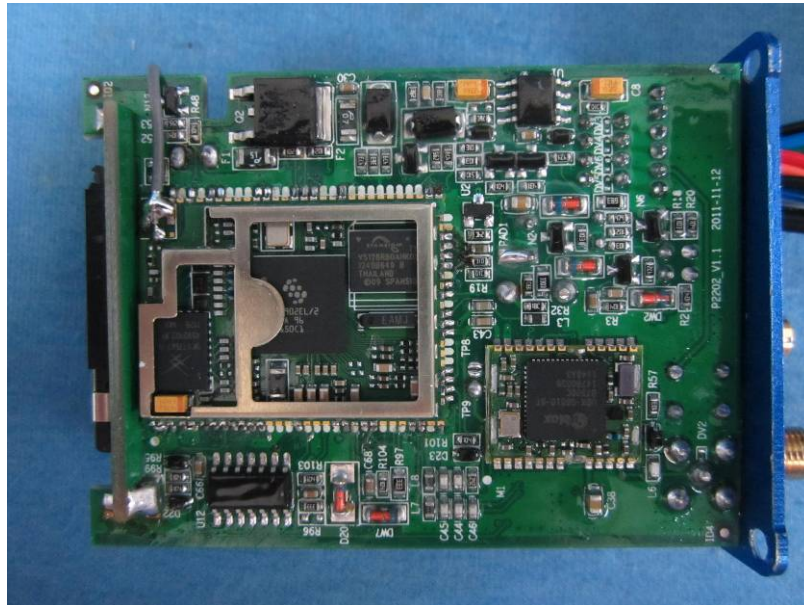



-----end-----