


FCC RF Test Report

APPLICANT : Phylode Inc.
EQUIPMENT : BLE Wristband
BRAND NAME : Phylode
MODEL NAME : W/Me
FCC ID : 2AAE7-WME-0001
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 22, 2013 and completely tested on Jun. 07, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : 2AAE7-WME-0001

Page Number : 1 of 49

Report Issued Date : Jun. 11, 2013

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Testing Site	6
1.7 Applied Standards	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Descriptions of Test Mode	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example	11
3 TEST RESULT	12
3.1 6dB Bandwidth Measurement	12
3.2 Peak Output Power Measurement	15
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	23
3.5 Radiated Band Edges and Spurious Emission Measurement	29
3.6 AC Conducted Emission Measurement	43
3.7 Antenna Requirements	47
4 LIST OF MEASURING EQUIPMENT	48
5 UNCERTAINTY OF EVALUATION	49
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR352267	Rev. 01	Initial issue of report	Jun. 11, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.52 dB at 2483.500 MHz
3.6	15.207	RSS-210 Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 6.70 dB at 0.182 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Phyode Inc.

126 Brenton court., Mountain View, CA 94043

1.2 Manufacturer

Foxconn International Holdings Ltd

No.4, Mingsheng St., Tu-Cheng Dist., New Taipei City 23679, Taiwan

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	BLE Wristband
Brand Name	Phyode
Model Name	W/Me
FCC ID	2AAE7-WME-0001
EUT supports Radios application	Bluetooth 4.0
HW Version	PR3
SW Version	V019
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	-0.06 dBm (0.0010 W)
Antenna Type	PIFA Antenna type with gain 1.10 dBi
Type of Modulation	Bluetooth 4.0 - LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH07-HY	722060/4086B-1

The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	-0.06 dBm
Ch19	2440MHz	-0.44 dBm
Ch39	2480MHz	-0.89 dBm

- a. The EUT has been associated with peripherals pursuant to ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 :EUT Charging from Notebook

2.3 Connection Diagram of Test System

<Bluetooth 4.0 – LE Tx Mode>

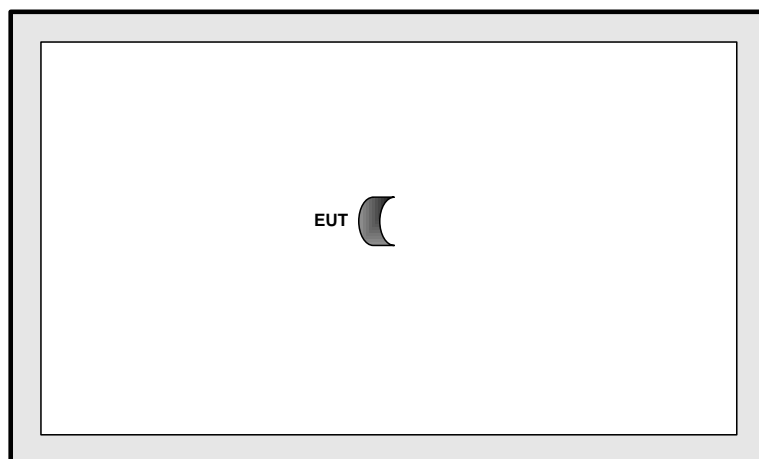

<AC Conducted Emission Mode>

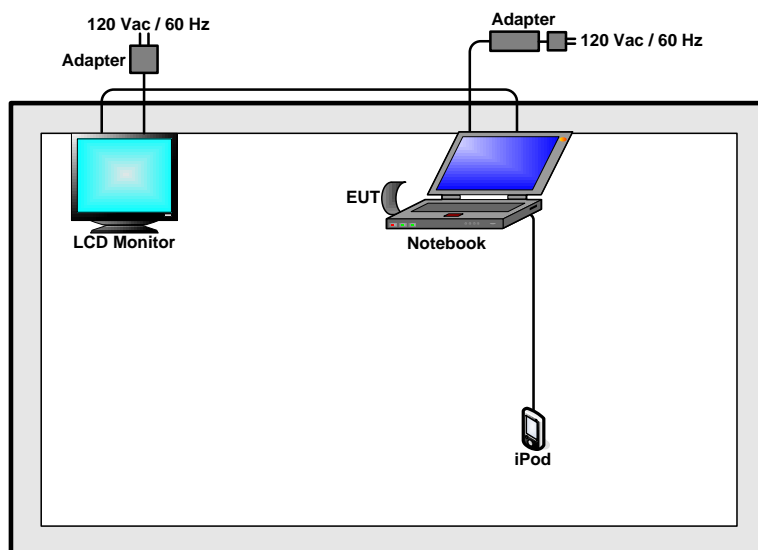

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
2.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	LCD Monitor	DELL	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth 4.0 – LE function, press the button to choose "BT", and press for few seconds on the EUT directly. Then, the EUT will get into the engineering modes for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

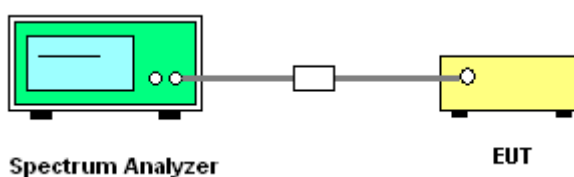


3.1.5 Test Result of 6dB Bandwidth


Test Mode :	Bluetooth 4.0 - LE	Temperature :	22-25°C
Test Engineer :	Book Lin	Relative Humidity :	51-55%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.68	0.5	Pass
19	2440	0.69	0.5	Pass
39	2480	0.70	0.5	Pass


6 dB Bandwidth Plot on Channel 00

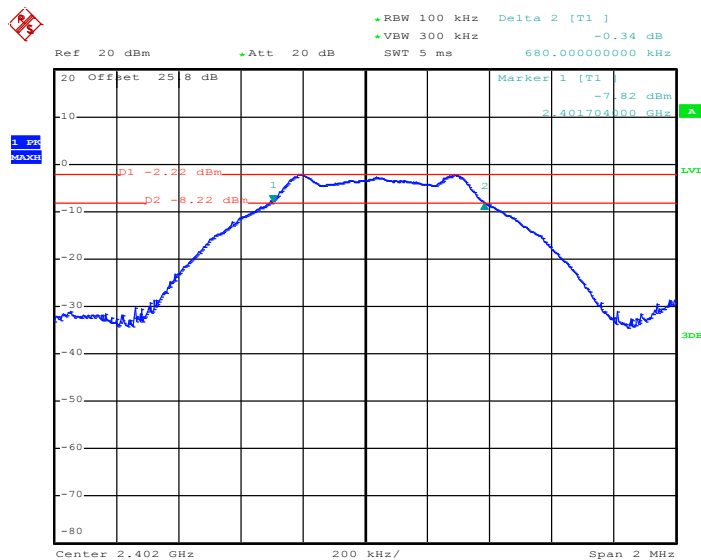

Date: 7.JUN.2013 14:04:03

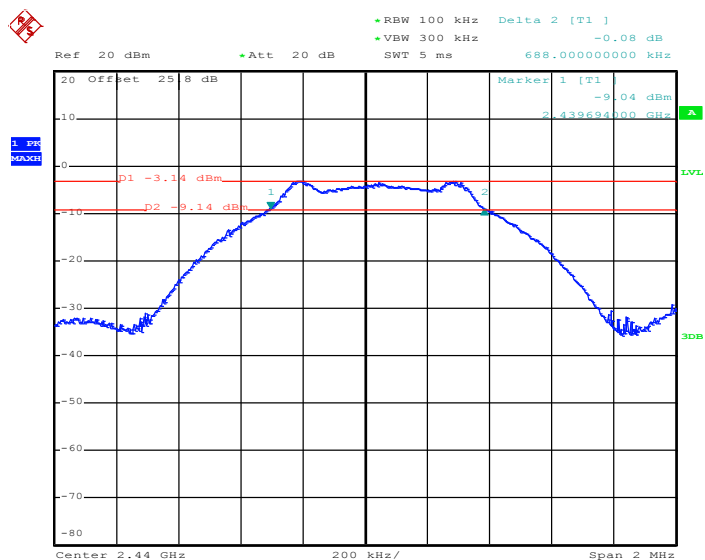6 dB Bandwidth Plot on Channel 19


Date: 7.JUN.2013 14:08:02

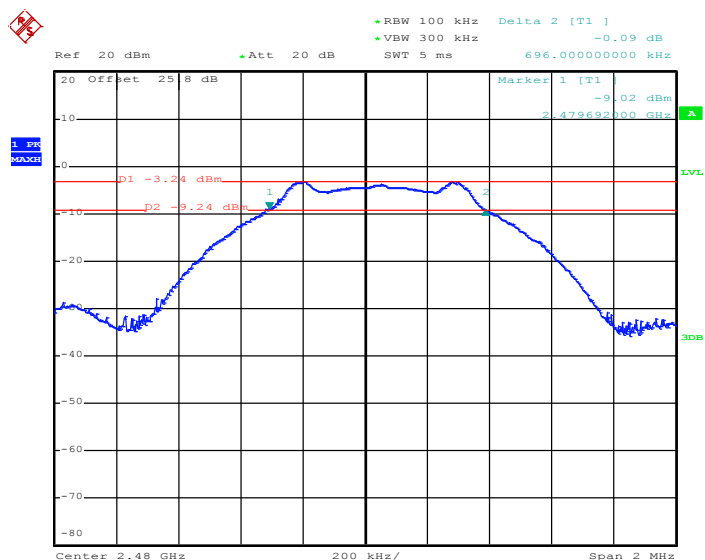6 dB Bandwidth Plot on Channel 39


Date: 7.JUN.2013 14:10:33

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

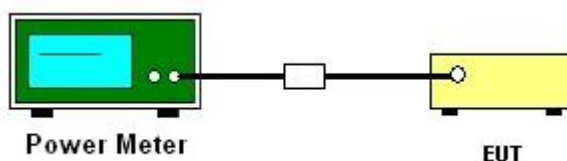

3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22-25°C
Test Engineer :	Book Lin	Relative Humidity :	51-55%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	-0.06	30.00	Pass
19	2440	-0.44	30.00	Pass
39	2480	-0.89	30.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100KHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

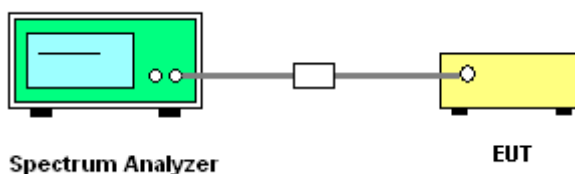

3.3.5 Test Result of Power Spectral Density


Test Mode :	Bluetooth 4.0 - LE	Temperature :	22-25°C
Test Engineer :	Book Lin	Relative Humidity :	51-55%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3kHz)	Pass/Fail
		PSD/100kHz (dBm)	PSD/3kHz (dBm)		
00	2402	-2.28	-14.31	8	Pass
19	2440	-4.50	-16.44	8	Pass
39	2480	-3.20	-15.42	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.


3.3.6 Test Result of Power Spectral Density Plots (100kHz)

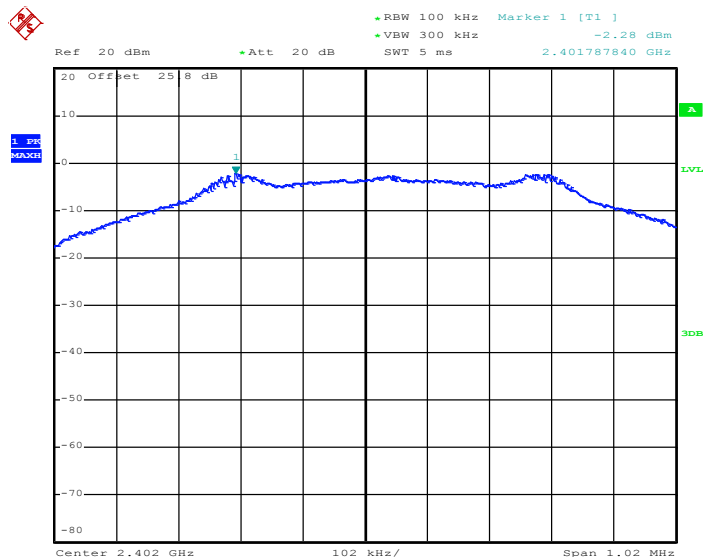PSD 100kHz Plot on Channel 00


Date: 7.JUN.2013 14:05:00

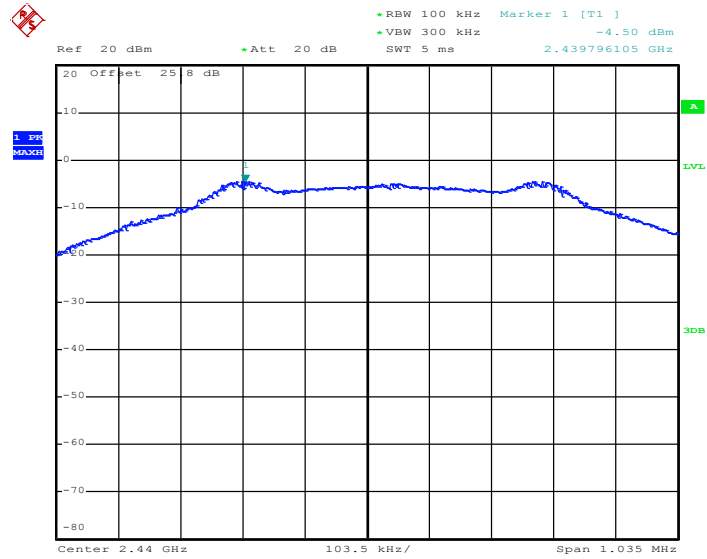PSD 100kHz Plot on Channel 19


Date: 7.JUN.2013 14:08:35

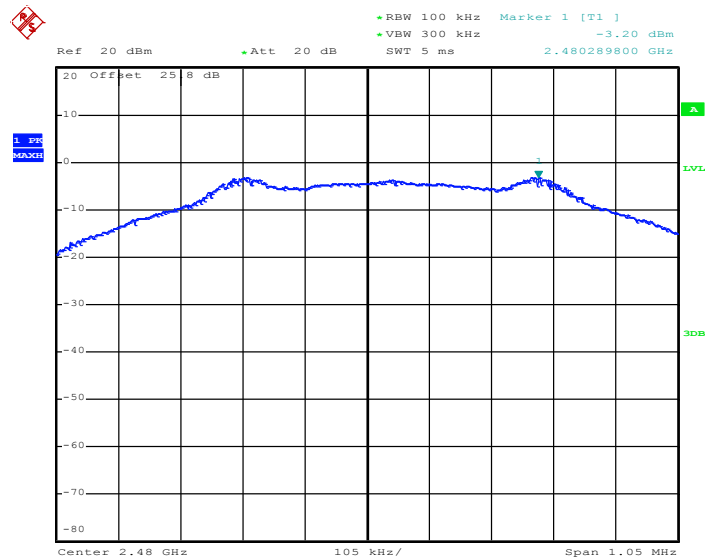
PSD 100kHz Plot on Channel 39


Date: 7.JUN.2013 14:11:07




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

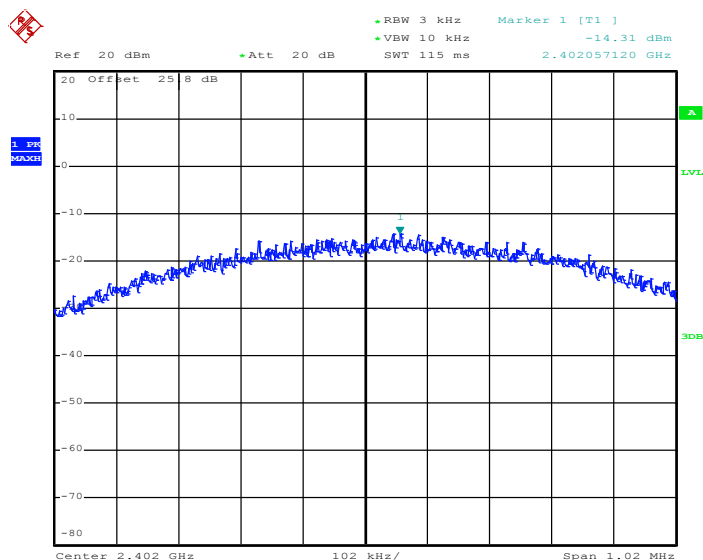


Date: 7.JUN.2013 14:04:24

PSD 3kHz Plot on Channel 19

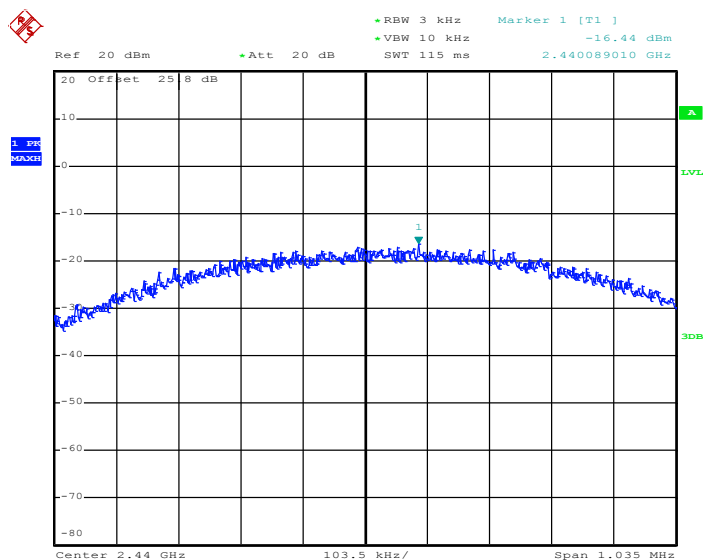

Date: 7.JUN.2013 14:08:25

PSD 3kHz Plot on Channel 39

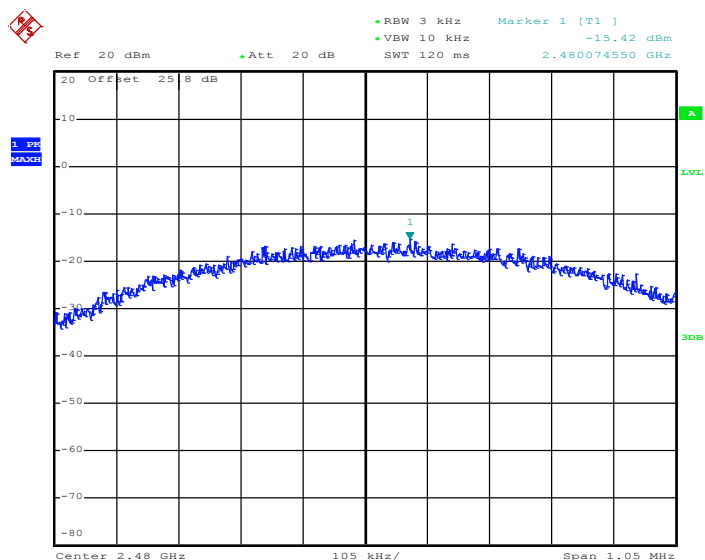

Date: 7.JUN.2013 14:10:56

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

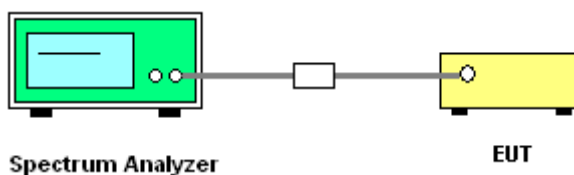

3.4.5 Test Result of Conducted Band Edges

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22-25°C
Test Channel :	00 and 39	Relative Humidity :	51-55%
		Test Engineer :	Book Lin

Low Band Edge Plot on Channel 00

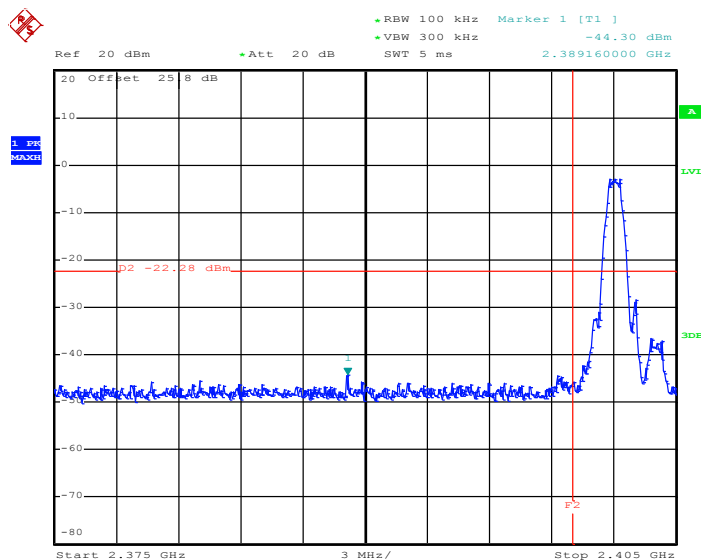

Date: 7.JUN.2013 14:05:19



Ref 20 dBm Att 20 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -45.59 dBm

2.493120000 GHz

20 Offset 25 dB

10

0

-10

-20

-30

-40

-50

-60

-70

-80

Start 2.475 GHz 3 MHz/ Stop 2.505 GHz

1. Freq SEARCH

P2 -23.2 dBm

F1

1


2.493120000 GHz

Date: 7.JUN.2013 14:11:39

3.4.6 Test Result of Conducted Spurious Emission


Test Mode :	Bluetooth 4.0 - LE	Temperature :	22-25°C
Test Channel :	00	Relative Humidity :	51-55%
		Test Engineer :	Book Lin

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

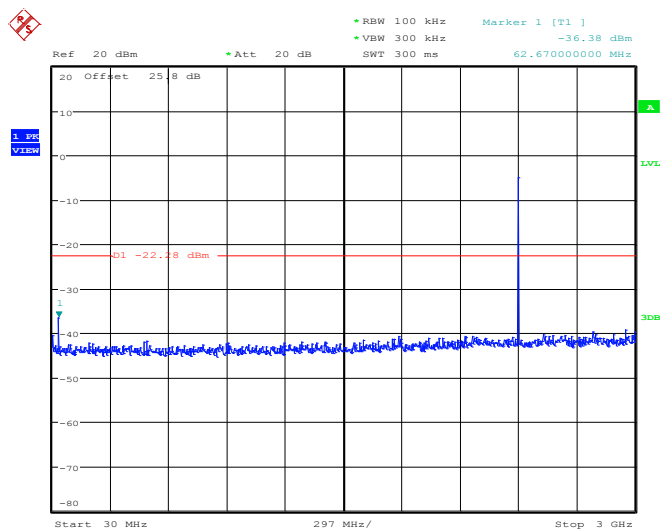

Date: 7.JUN.2013 15:15:56

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

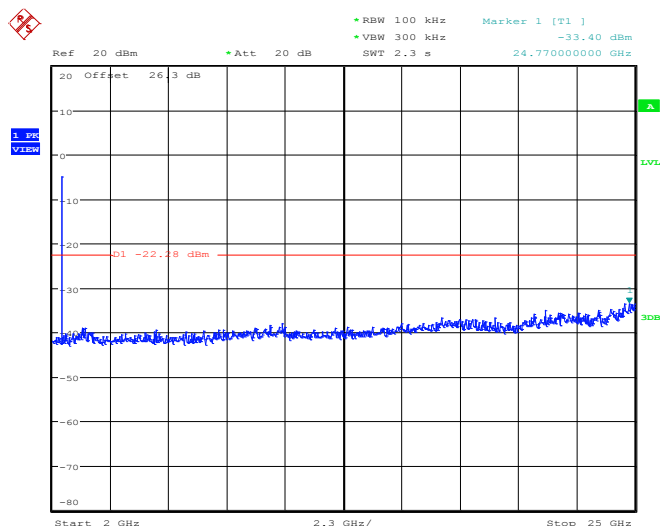


Date: 7.JUN.2013 15:16:14




Test Mode :	Bluetooth 4.0 - LE	Temperature :	22-25°C
Test Channel :	19	Relative Humidity :	51-55%
		Test Engineer :	Book Lin

**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19**

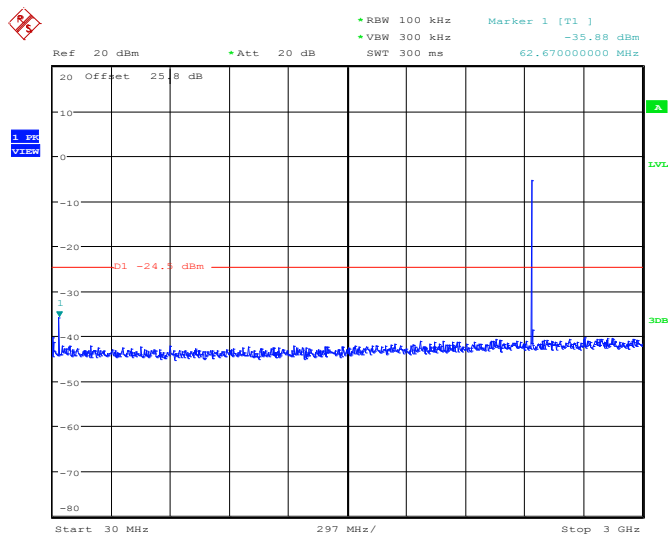

Date: 7.JUN.2013 15:19:01

**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19**

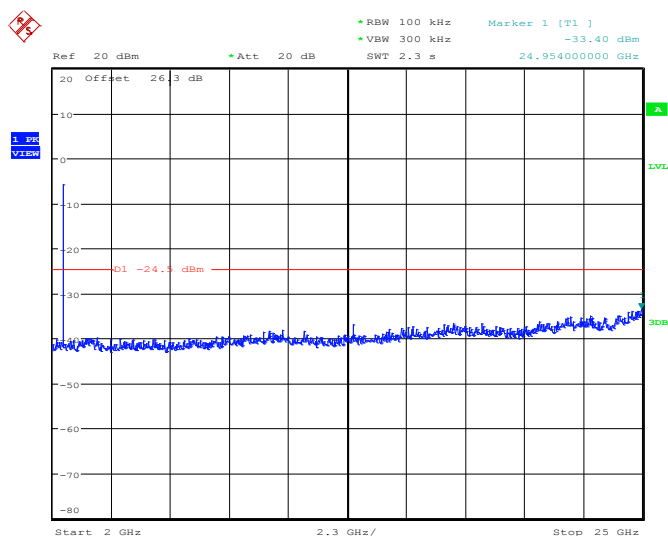


Date: 7.JUN.2013 15:19:19




Test Mode :	Bluetooth 4.0 - LE	Temperature :	22-25°C
Test Channel :	39	Relative Humidity :	51-55%
		Test Engineer :	Book Lin

**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39**

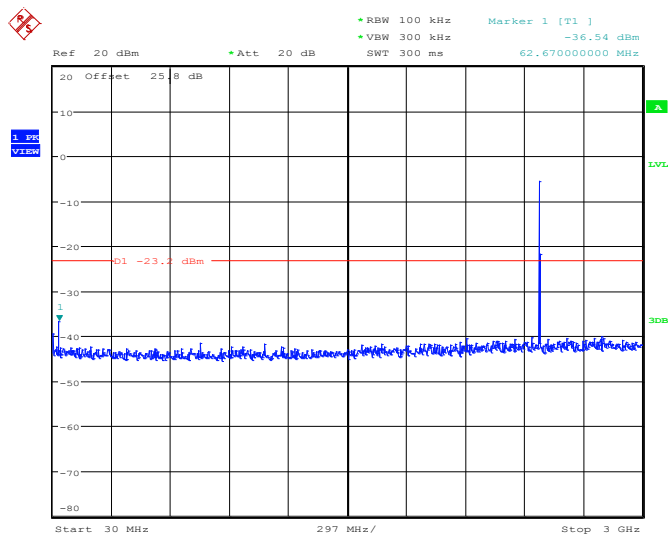

Date: 7,JUN.2013 15:19:47

**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39**

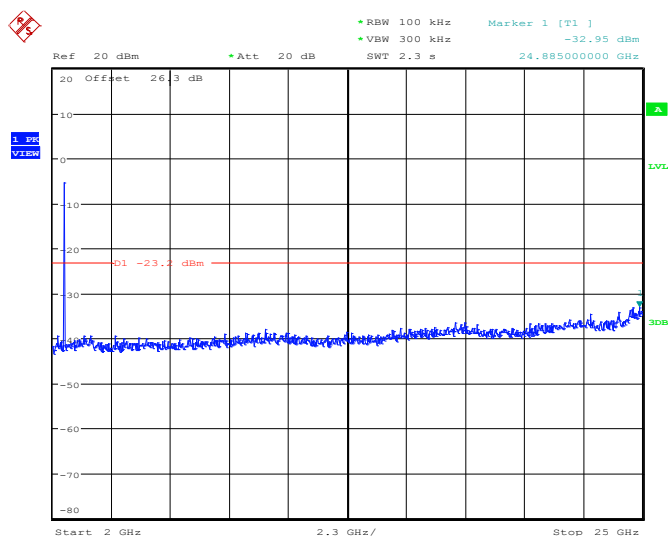

Date: 7,JUN.2013 15:20:05

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:

 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(μ s)	1/T(kHz)	VBW Setting
Bluetooth 4.0 - LE	100	-	-	10Hz

Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

Marker-Delta method :

- (1) Set RBW = 1 MHz, VBW = 3 MHz, peak detector.

Repeat the measurement with an average detector, use RBW = 1MHz

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW $\geq 1/T$, when duty cycle is less than 98 percent


- (2) Set span = 10MHz, that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set RBW = 100KHz, 1% of the total span. Set VBW = 100KHz \geq RBW.

- (3) Subtract the delta measured in step (2) from the field strengths measured in step (1).


The resultant field strengths (peak/average) are then used to determine band-edge compliance as required by Section 15.205.

3.5.4 Test Setup


For radiated emissions below 30MHz

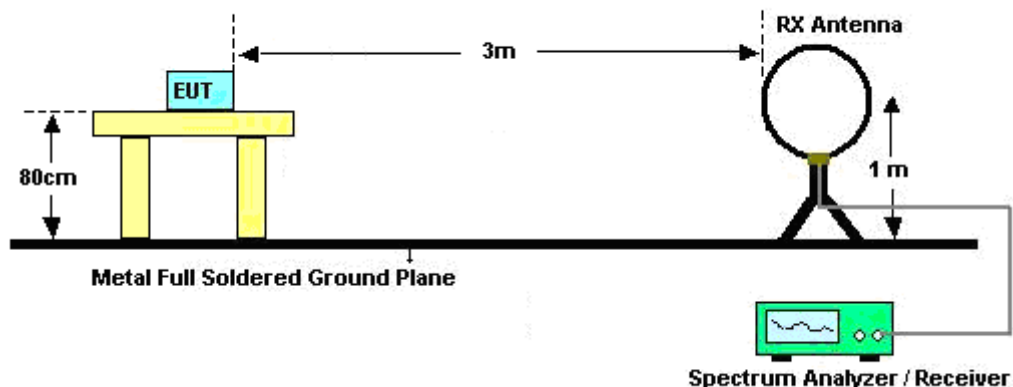

For radiated emissions from 30MHz to 1GHz

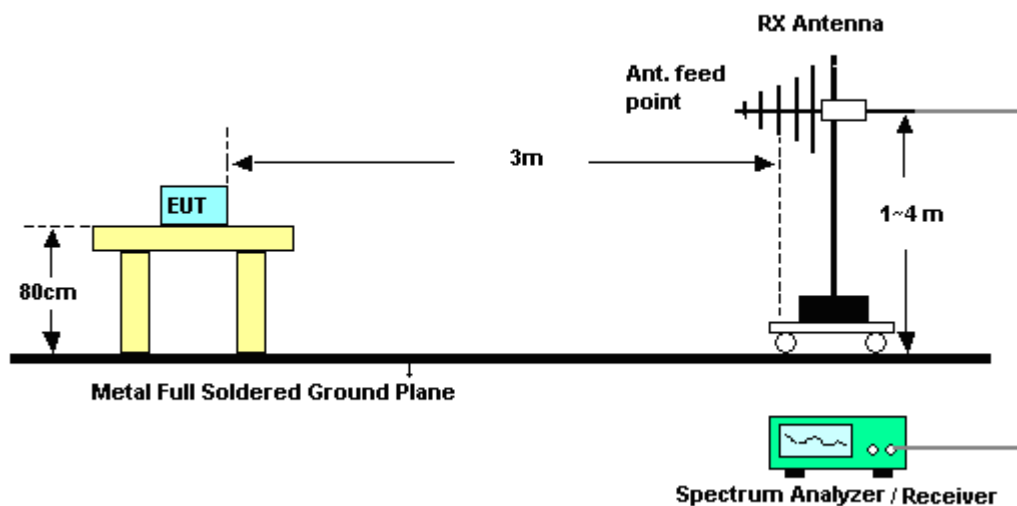

For radiated emissions above 1GHz

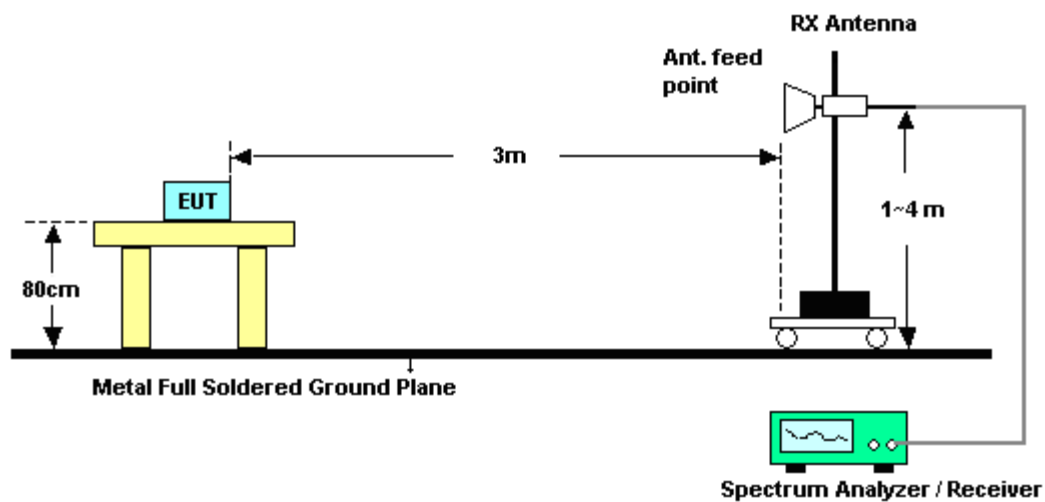

3.5.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	51~53%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dB μ V /m)	Over Limit (dB)	Limit Line (dB μ V /m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2319.18	47.75	-26.25	74	42.94	32.23	6.8	34.22	178	126	Peak
2338.08	35.25	-18.75	54	30.39	32.24	6.84	34.22	178	126	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dB μ V /m)	Over Limit (dB)	Limit Line (dB μ V /m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2365.8	46.92	-27.08	74	42.05	32.26	6.88	34.27	100	350	Peak
2338.26	33.9	-20.1	54	29.04	32.24	6.84	34.22	100	350	Average

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
		Test Engineer :	Eric Shih

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.53	59	-15	74	53.99	32.38	7.06	34.43	110	117	Peak
2483.5	53.38	*-0.62	54	48.37	32.38	7.06	34.43	110	117	Average
2483.5	44.27	-29.73	74	-	-	-	-	-	-	Peak
2483.5	43.48	-10.52	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	94.81	50.54	44.27	74	-29.73	Pass
Average	94.02	50.54	43.48	54	-10.52	Pass

Note:

1. Measurement result = Maximum field strength – Delta result
2. *Delta-Marker Method is used for the 2483.5MHz average measurement as described in the test procedure of this report and the test result is under 10.52dB.

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	54.33	-19.67	74	49.32	32.38	7.06	34.43	100	359	Peak
2483.5	47.83	*-6.17	54	42.82	32.38	7.06	34.43	100	359	Average
2483.5	43.39	-30.61	74	-	-	-	-	-	-	Peak
2483.5	42.63	-11.37	54	-	-	-	-	-	-	Average


Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	89.17	45.78	43.39	74	-30.61	Pass
Average	88.41	45.78	42.63	54	-11.37	Pass

Note:

1. Measurement result = Maximum field strength – Delta result
2. *Delta-Marker Method is used for the 2483.5MHz average measurement as described in the test procedure of this report and the test result is under 11.37dB.

Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal

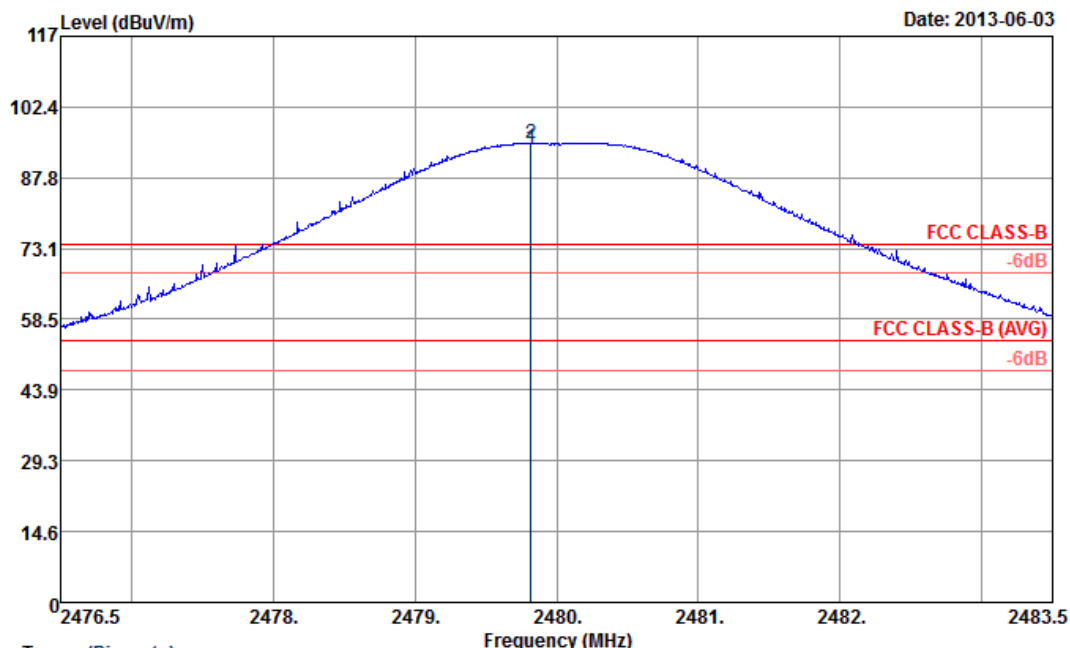

Trace: (Discrete)


Site : 03CH07-HY
Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Project : FR 352267

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2479.82	94.02	40.02	54.00	89.01	32.38	7.06	34.43	110	117	Average
2 *	2479.82	94.81	20.81	74.00	89.80	32.38	7.06	34.43	110	117	Peak

* Maximum field strength of the fundamental emission



Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal

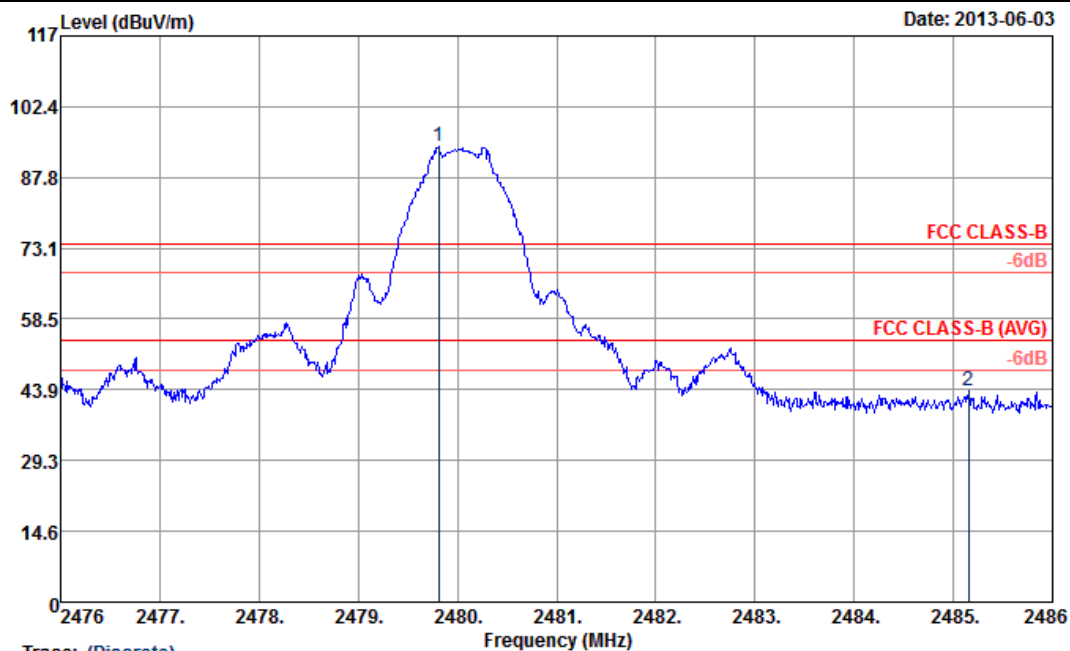


Trace: (Discrete)

Site : 03CH07-HY
 Condition : FCC CLASS-B 3m HF-ANT_120823 HORIZONTAL
 : RBW:100.000KHz VBW:300.000KHz SWT:Auto
 Project : FR 352267

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	cm	deg
1 *	2479.81	94.09	20.09	74.00	89.08	32.38	7.06	34.43	110	117 Peak
2	2485.15	43.55	-30.45	74.00	38.54	32.38	7.06	34.43	110	117 Peak


* Marker-Delta Method (RBW/VBW=100KHz): 50.54 dB , single carrier Mode

Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical

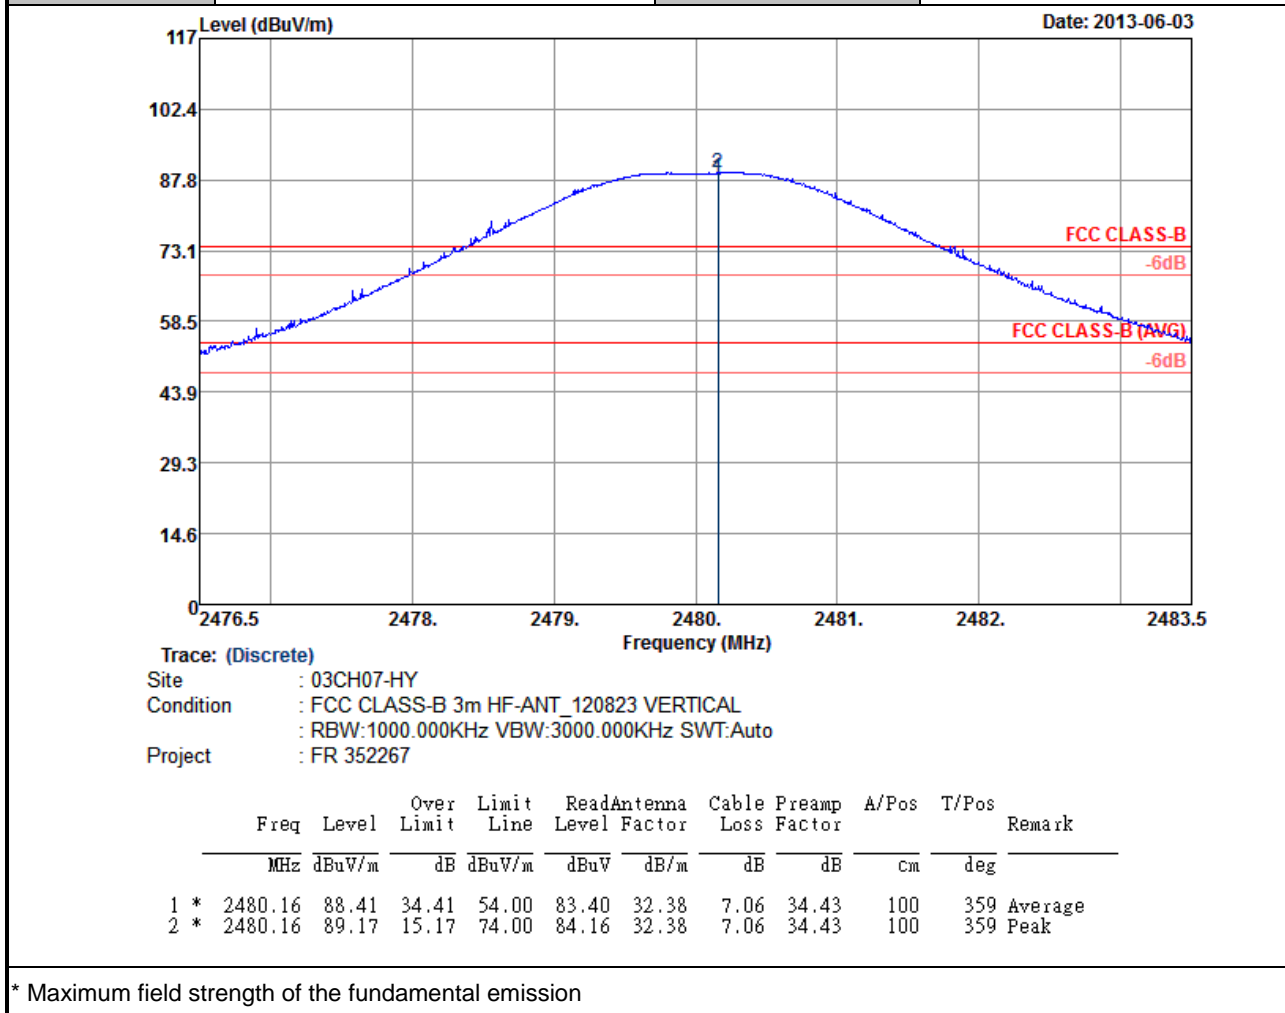



Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical

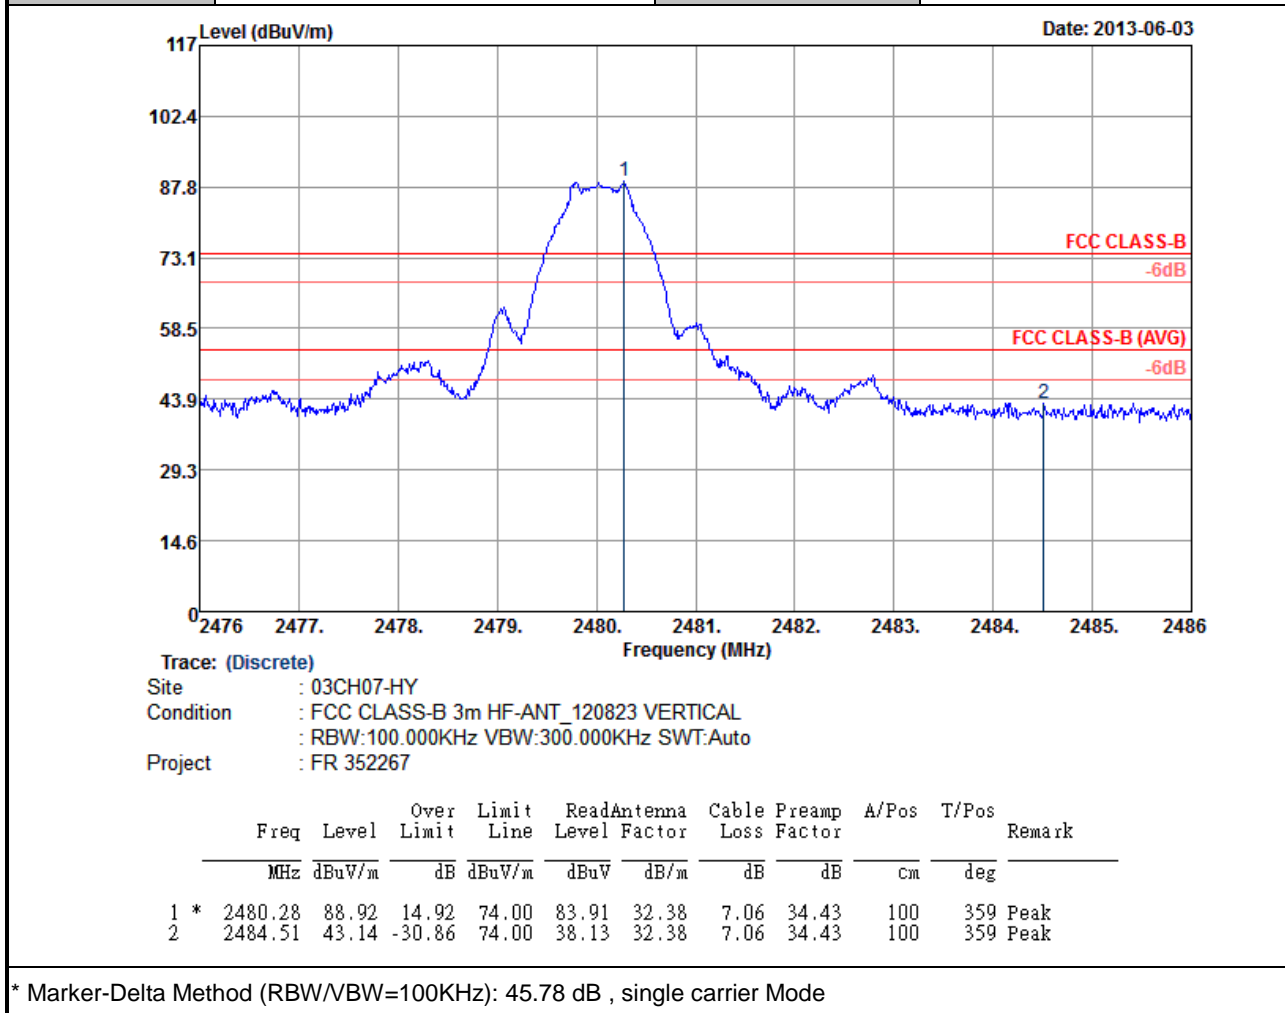

3.5.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. For example, 93.39dB μ V/m - 20dB= 73.39dB μ V/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	92.45	-	-	87.54	32.3	6.91	34.3	178	126	Average
2402	93.39	-	-	88.48	32.3	6.91	34.3	178	126	Peak
4806	45.81	-28.19	74	62.02	33.98	8.77	58.96	100	0	Peak
7206	42.62	-30.77	73.39	53.88	35.56	10.81	57.63	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	Mode 1	Temperature :	21~23°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. 7206 MHz is not within a restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	87.25	-	-	82.34	32.3	6.91	34.3	100	350	Average
2402	88.22	-	-	83.3	32.31	6.91	34.3	100	350	Peak
4806	44.89	-29.11	74	61.1	33.98	8.77	58.96	100	0	Peak
7206	41.36	-26.86	68.22	52.62	35.56	10.81	57.63	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	19	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2440	94.14	-	-	89.15	32.35	6.99	34.35	115	121	Average
2440	94.99	-	-	90	32.35	6.99	34.35	115	121	Peak
4884	48.46	-25.54	74	64.49	33.95	8.85	58.83	100	0	Peak
7323	43.03	-30.97	74	54.33	35.53	10.91	57.74	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	Mode 2	Temperature :	21~23°C
Test Channel :	19	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2440	88.36	-	-	83.37	32.35	6.99	34.35	100	349	Average
2440	89.18	-	-	84.23	32.35	6.99	34.39	100	349	Peak
4881	46.13	-27.87	74	62.16	33.95	8.85	58.83	100	0	Peak
7323	41.73	-32.27	74	53.03	35.53	10.91	57.74	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.89	19.78	-20.22	40	32.09	18.56	0.55	31.42	-	-	Peak
141.24	16.27	-27.23	43.5	34.81	11.36	1.2	31.1	-	-	Peak
240.6	12.68	-33.32	46	30.22	11.93	1.53	31	-	-	Peak
512.8	20.68	-25.32	46	30.54	18.31	2.48	30.65	-	-	Peak
680.1	21.71	-24.29	46	28.81	20.44	2.9	30.44	-	-	Peak
915.3	26.33	-19.67	46	29.95	23.33	3.38	30.33	107	155	Peak
2480	94.02	-	-	89.01	32.38	7.06	34.43	110	117	Average
2480	94.7	-	-	89.69	32.38	7.06	34.43	110	117	Peak
4959	47.26	-26.74	74	63.09	33.91	8.92	58.66	100	0	Peak
7440	41.44	-32.56	74	52.74	35.51	11.04	57.85	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	Mode 3	Temperature :	21~23°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Eric Shih	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.24	19.76	-20.24	40	32.74	17.84	0.56	31.38	116	39	Peak
102.9	12.38	-31.12	43.5	32.43	10.07	1.01	31.13	-	-	Peak
212.52	12.62	-30.88	43.5	32.35	9.98	1.37	31.08	-	-	Peak
496.7	19.32	-26.68	46	29.49	18.02	2.44	30.63	-	-	Peak
701.8	22.21	-23.79	46	29.04	20.63	2.94	30.4	-	-	Peak
904.8	25.09	-20.91	46	28.88	23.17	3.35	30.31	-	-	Peak
2480	88.42	-	-	83.41	32.38	7.06	34.43	100	359	Average
2480	89.07	-	-	84.06	32.38	7.06	34.43	100	359	Peak
4959	47.6	-26.4	74	63.43	33.91	8.92	58.66	100	0	Peak
7440	41.49	-32.51	74	52.79	35.51	11.04	57.85	100	0	Peak

Note: Other harmonics are lower than background noise.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

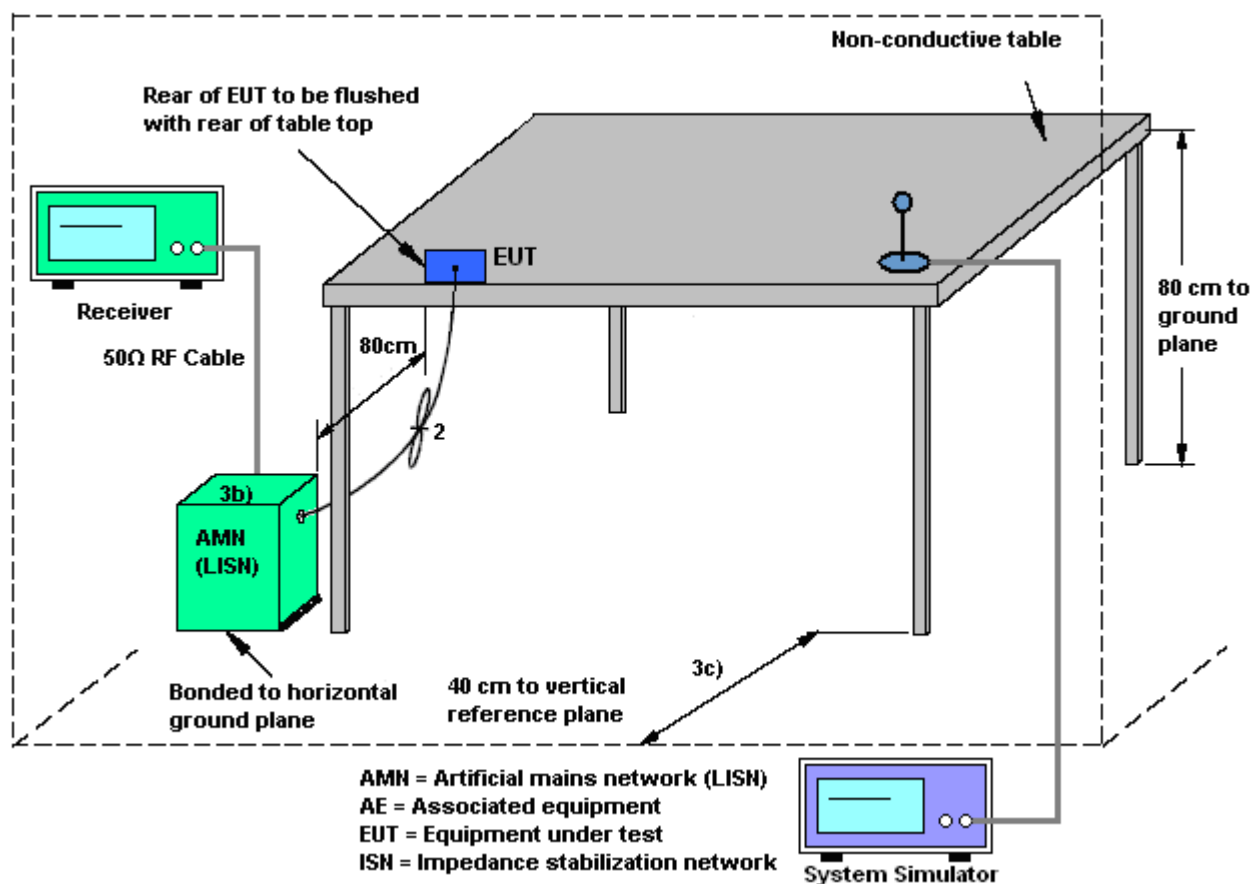

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	EUT Charging from Notebook		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

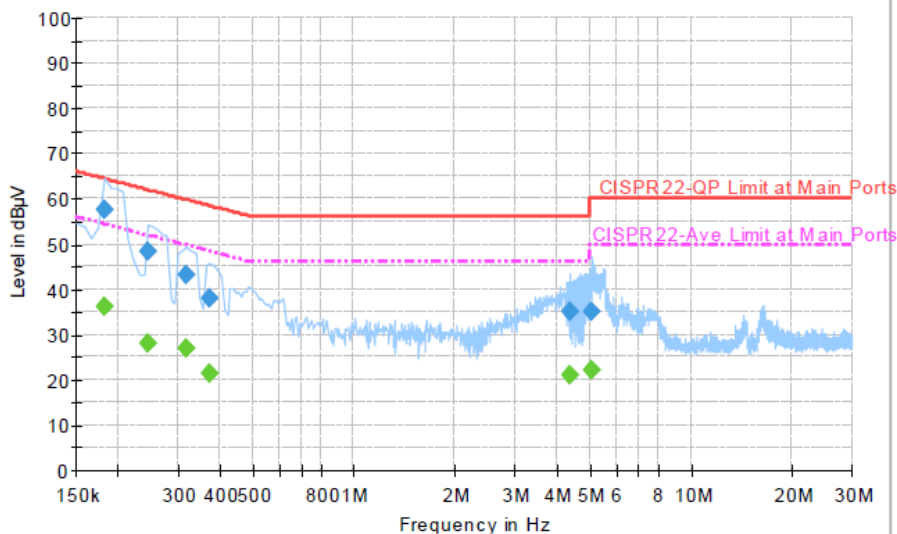


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	57.7	Off	L1	19.4	6.7	64.4
0.246000	48.4	Off	L1	19.4	13.5	61.9
0.318000	43.3	Off	L1	19.4	16.5	59.8
0.374000	37.9	Off	L1	19.4	20.5	58.4
4.374000	35.1	Off	L1	19.6	20.9	56.0
5.094000	35.1	Off	L1	19.6	24.9	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.182000	36.1	Off	L1	19.4	18.3	54.4
0.246000	28.0	Off	L1	19.4	23.9	51.9
0.318000	27.0	Off	L1	19.4	22.8	49.8
0.374000	21.3	Off	L1	19.4	27.1	48.4
4.374000	21.0	Off	L1	19.6	25.0	46.0
5.094000	22.1	Off	L1	19.6	27.9	50.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	EUT Charging from Notebook		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

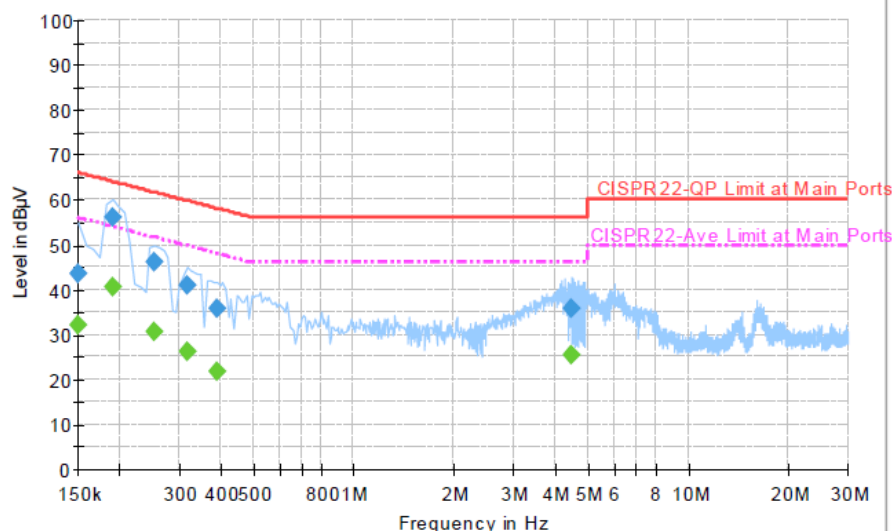
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	43.6	Off	N	19.4	22.4	66.0
0.190000	56.1	Off	N	19.4	7.9	64.0
0.254000	46.0	Off	N	19.5	15.6	61.6
0.318000	40.8	Off	N	19.4	19.0	59.8
0.390000	36.0	Off	N	19.4	22.1	58.1
4.478000	35.9	Off	N	19.6	20.1	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.2	Off	N	19.4	23.8	56.0
0.190000	40.5	Off	N	19.4	13.5	54.0
0.254000	30.7	Off	N	19.5	20.9	51.6
0.318000	26.1	Off	N	19.4	23.7	49.8
0.390000	21.6	Off	N	19.4	26.5	48.1
4.478000	25.3	Off	N	19.6	20.7	46.0

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSPQ	200578/026	20Hz~26.5GHz	Feb. 06, 2013	May 29, 2013~ Jun. 07, 2013	Feb. 05, 2014	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Feb. 05, 2013	May 29, 2013~ Jun. 07, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Feb. 05, 2013	May 29, 2013~ Jun. 07, 2013	Feb. 04, 2014	Conducted (TH02-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 06, 2012	Jun. 03, 2013~ Jun. 04, 2013	Oct. 05, 2013	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Nov. 30, 2012	Jun. 03, 2013~ Jun. 04, 2013	Nov. 29, 2013	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 22, 2012	Jun. 03, 2013~ Jun. 04, 2013	Aug. 21, 2013	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 01, 2012	Jun. 03, 2013~ Jun. 04, 2013	Nov. 30, 2013	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	159088	1GHz ~ 18GHz	Feb. 27, 2013	Jun. 03, 2013~ Jun. 04, 2013	Feb. 26, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10-1000MHz. 32dB.GAIN	Feb. 26, 2013	Jun. 03, 2013~ Jun. 04, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 03, 2012	Jun. 03, 2013~ Jun. 04, 2013	Sep. 02, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Sep. 28, 2012	Jun. 03, 2013~ Jun. 04, 2013	Sep. 27, 2013	Radiation (03CH07-HY)
Turn Table	Chaintek	Chaintek 3000	N/A	0 ~ 360 degree	N/A	Jun. 03, 2013~ Jun. 04, 2013	N/A	Radiation (03CH07-HY)
Antenna Mast	Chaintek	M-400-0	114/8000604/L	1m ~ 4m	N/A	Jun. 03, 2013~ Jun. 04, 2013	N/A	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9KHz ~ 2.75GHz	Nov. 13, 2012	May 29, 2013	Nov. 12, 2013	Conduction (CO05-HY)
Two-LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9KHz ~ 30MHz	Dec. 12, 2012	May 29, 2013	Dec. 11, 2013	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9KHz ~ 30MHz	Dec. 06, 2012	May 29, 2013	Dec. 05, 2013	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	May 29, 2013	N/A	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
--	------



Appendix A Setup Photographs