

FCC RADIO TEST REPORT

FCC ID: 2AAI2PH2RPGRPHR

IC: 11191A-PH2RPGRPHR

Product : The Phoenix 2 Portable Bluetooth Stereo Device

Trade Name : N/A

Model Name : BCN_ph2-rp/grphr

Serial Model : BCN_ph2-rp/swht, BCN_ph2-rp/fred, BCN_ph2-rp/bblu,
BCN_ph2-rp/orng, BCN_ph2-rp/teal, BCN_ph2-rp/ccrl

Report No. : GTI-2013DG0716147F

Prepared for

Beacon Audio Inc.

623 S State Street #A, Salt Lake City, UT 84111

Prepared by

Shenzhen GTI Testing Technology Co., Ltd.

1/F, Building F, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China



TEST RESULT CERTIFICATION

Applicant's name : Beacon Audio Inc.

Address : 623 S State Street #A, Salt Lake City, UT 84111

Manufacture's Name..... : Fine Acoustic Electric Factory

Address : No.139, SanJiang Industrial Park,HengLi Town,DongGuang City,
GuangDong Province, China

Product description

Product name : The Phoenix 2 Portable Bluetooth Stereo Device

Model and/or type reference : BCN_ph2-rp/grphr

Serial Model : BCN_ph2-rp/swht, BCN_ph2-rp/fred, BCN_ph2-rp/bblu,
BCN_ph2-rp/orng, BCN_ph2-rp/teal, BCN_ph2-rp/ccrl

Standards : FCC Part15.247, RSS-210 Annex 8

Test procedure ANSI C63.4-2003, RSS-Gen Issue 3

This device described above has been tested by GTI, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of GTI, this document may be altered or revised by GTI, personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : 09 Jul. 2013 ~16 Jul. 2013

Date of Issue..... : 16 Jul. 2013

Test Result..... : **Pass**

Testing Engineer : _____

Eric Wang

(Eric Wang)

Technical Manager : _____

Jerry You

(Jerry You)

Authorized Signatory : _____

Jack Yu

(Jack Yu)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	20
3.2.6 TEST RESULTS (BELOW 30 MHZ)	21
3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	22
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	26
3.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	46
4 . NUMBER OF HOPPING CHANNEL	58
4.1 APPLIED PROCEDURES / LIMIT	58
4.1.1 TEST PROCEDURE	58
4.1.2 DEVIATION FROM STANDARD	58
4.1.3 TEST SETUP	58
4.1.4 EUT OPERATION CONDITIONS	58
4.1.5 TEST RESULTS	59
5 . AVERAGE TIME OF OCCUPANCY	61

Table of Contents

	Page
5.1 APPLIED PROCEDURES / LIMIT	61
5.1.1 TEST PROCEDURE	61
5.1.2 DEVIATION FROM STANDARD	61
5.1.3 TEST SETUP	62
5.1.4 EUT OPERATION CONDITIONS	62
5.1.5 TEST RESULTS	63
6 . HOPPING CHANNEL SEPARATION MEASUREMENT	65
6.1 APPLIED PROCEDURES / LIMIT	65
6.1.1 TEST PROCEDURE	65
6.1.2 DEVIATION FROM STANDARD	65
6.1.3 TEST SETUP	65
6.1.4 EUT OPERATION CONDITIONS	65
6.1.5 TEST RESULTS	66
7 . BANDWIDTH TEST	72
7.1 APPLIED PROCEDURES / LIMIT	72
7.1.1 TEST PROCEDURE	72
7.1.2 DEVIATION FROM STANDARD	72
7.1.3 TEST SETUP	72
7.1.4 EUT OPERATION CONDITIONS	72
7.1.5 TEST RESULTS	73
8 . PEAK OUTPUT POWER TEST	79
8.1 APPLIED PROCEDURES / LIMIT	79
8.1.1 TEST PROCEDURE	79
8.1.2 DEVIATION FROM STANDARD	79
8.1.3 TEST SETUP	79
8.1.4 EUT OPERATION CONDITIONS	79
8.1.5 TEST RESULTS	80
9 . ANTENNA REQUIREMENT	86
9.1 STANDARD REQUIREMENT	86
9.2 EUT ANTENNA	86
10 . EUT TEST PHOTO	87
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C RSS-210 Annex 8			
Standard Section	Test Item	Judgment	Remark
15.207&7.2.4	Conducted Emission	PASS	
15.247(a)(1)&A8.2	Hopping Channel Separation	PASS	
15.247(b)(1) & A8.4	Peak Output Power	PASS	
15.247(c) &A8.5	Radiated Spurious Emission	PASS	
15.247(a)(iii) &A8.1	Number of Hopping Frequency	PASS	
15.247(a)(iii) &A8.1	Dwell Time	PASS	
15.247(a)(1) &A8.1	Bandwidth	PASS	
15.205&A8.5	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	The Phoenix 2 Portable Bluetooth Stereo Device	
Model Name	BCN_ph2-rp/grphr	
Serial Model	BCN_ph2-rp/swht, BCN_ph2-rp/fred, BCN_ph2-rp/bblu, BCN_ph2-rp/orng, BCN_ph2-rp/teal, BCN_ph2-rp/ccrl	
Model Difference	All the model are the same circuit and RF module, except the model names.	
Product Description	The EUT is a The Phoenix 2 Portable Bluetooth Stereo Device	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
	Bit Rate of Transmitter	1Mbps/2Mbps/3Mbps
	Number Of Channel	79 CH
	Antenna Designation:	Please see Note 3.
	Output Power(Conducted):	BT(1Mbps): -0.186dBm BT EDR(2Mbps): -0.601dBm BT EDR(3Mbps): -0.458dBm
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Adapter	N/A	
Battery	DC 3.7V, 800mAh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3.

Table for Filed Antenna

Ant .	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB Antenna	N/A	0	BT Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Charging

For Conducted Emission	
Final Test Mode	Description
Mode 4	Charging

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Charging

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.


2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS


Test software Version	Test program: N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF
Parameters(2Mbps)	DEF	DEF	DEF
Parameters(3Mbps)	DEF	DEF	DEF

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

CE

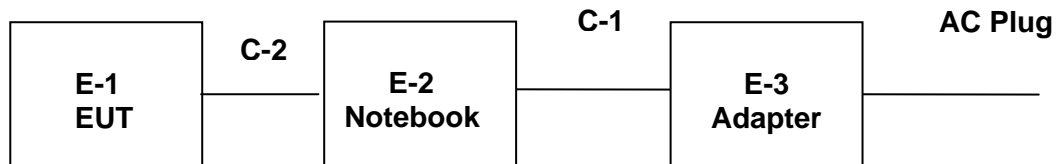

RE



2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	EUT	N/A	BCN_ph2-rp/grphr	N/A	EUT
E-2	Notebook	Dell	D2234	22544	
E-3	Adapter	Dell	D195000200	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	100cm	
C-2	NO	NO	120cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2013.07.06	2014.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2013.06.06	2014.06.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2013.07.06	2014.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2013.06.06	2014.06.05	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2013.06.06	2014.06.05	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2013.07.06	2014.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2013.07.06	2014.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2012.12.22	2013.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2013.06.07	2014.06.06	1 year
10	Power Meter	R&S	NRVS	100696	2013.07.06	2014.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2013.07.06	2014.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2013.06.05	2014.06.04	1 year
2	LISN	R&S	ENV216	101313	2012.08.24	2013.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2012.08.24	2013.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2013.06.06	2014.06.05	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2013.06.06	2014.06.05	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2013.06.06	2014.06.05	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

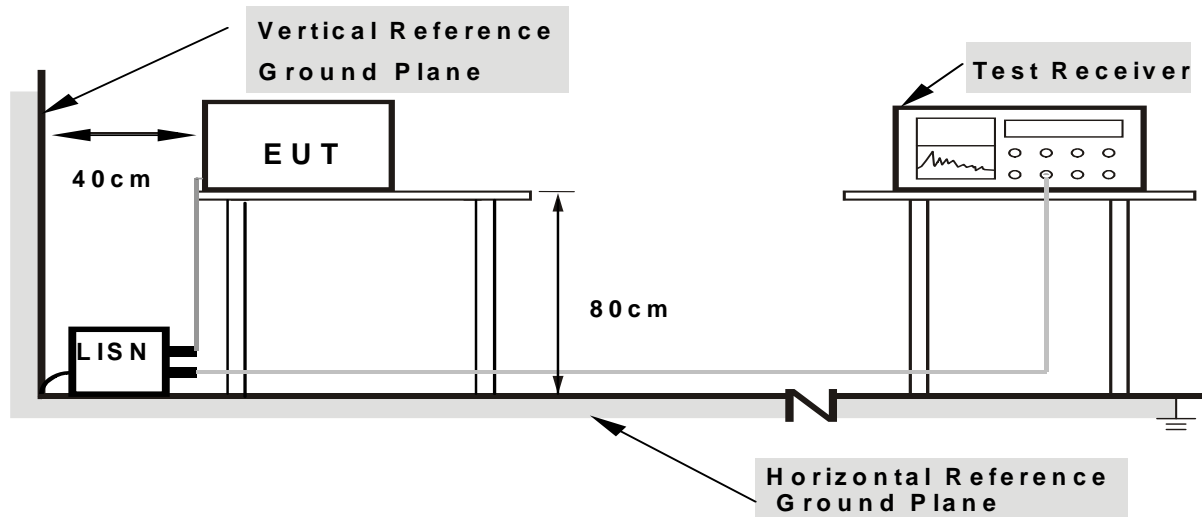

Note: 1.Support units were connected to second LISN .

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	5V from PC AC 120V/60Hz	Test Mode :	Mode 4

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.4740	29.77	10.62	40.39	56.44	-16.05	QP
1.0540	29.35	10.52	39.87	56.00	-16.13	QP
1.9780	29.22	10.52	39.74	56.00	-16.26	QP
0.4740	15.83	10.62	26.45	46.44	-19.99	AVG
1.0540	17.35	10.52	27.87	46.00	-18.13	AVG
1.9780	16.50	10.52	27.02	46.00	-18.98	AVG

Remark:

Factor = Insertion Loss + Cable Loss.

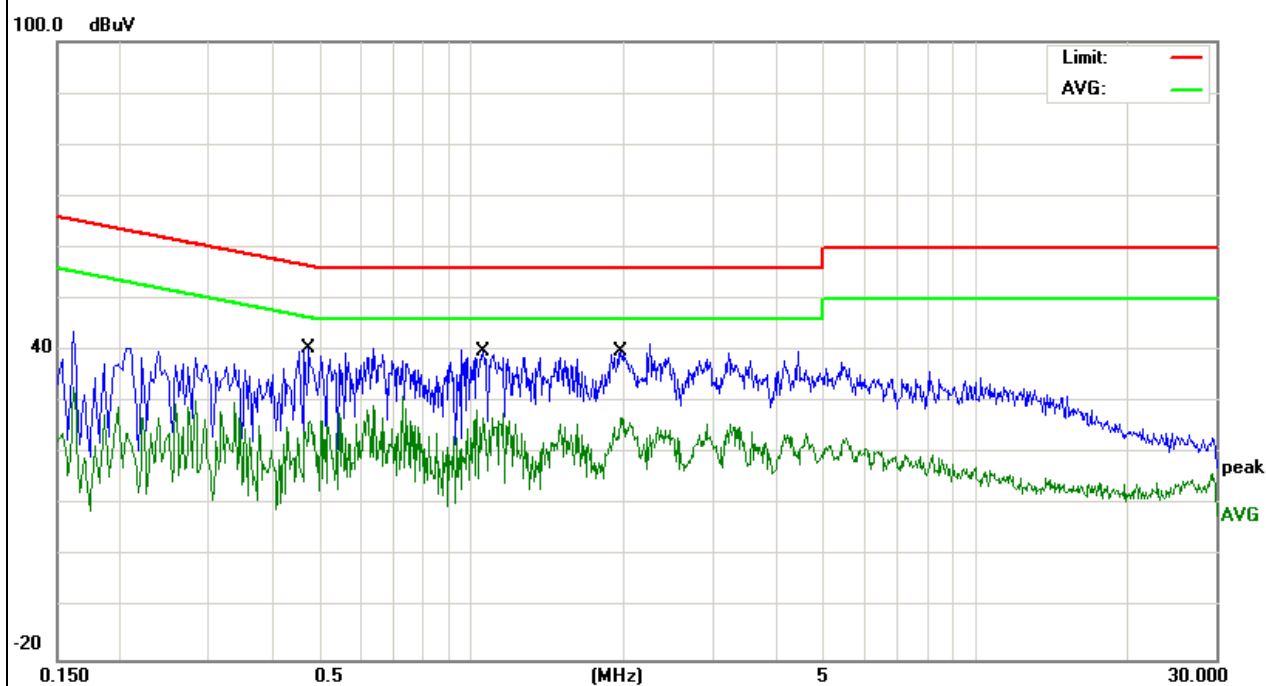


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	5V from PC AC 120V/60Hz	Test Mode :	Mode 4

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1580	32.22	11.36	43.58	65.56	-21.98	QP
1.0660	29.69	10.52	40.21	56.00	-15.79	QP
0.5260	28.08	10.57	38.65	56.00	-17.35	QP
0.1580	23.70	11.36	35.06	55.56	-20.50	AVG
0.5260	20.97	10.57	31.54	46.00	-14.46	AVG
1.0660	20.46	10.52	30.98	46.00	-15.02	AVG

Remark:

Factor = Insertion Loss + Cable Loss.

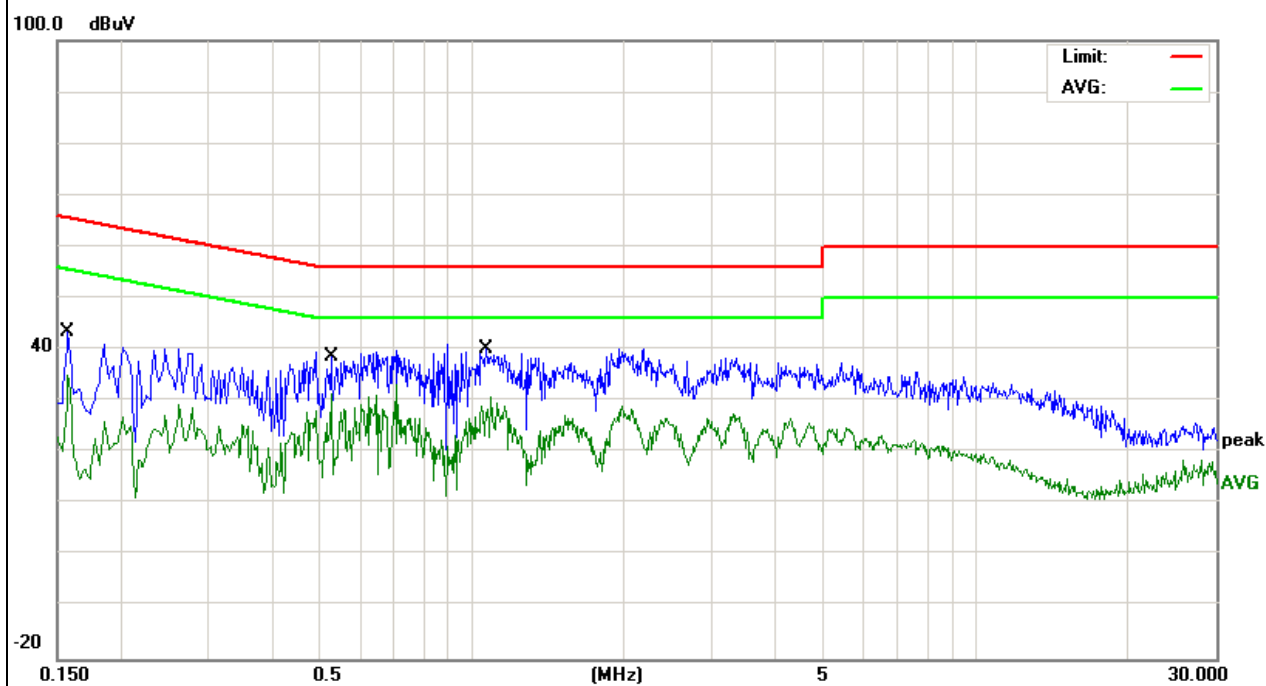

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For intentional radiators)

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

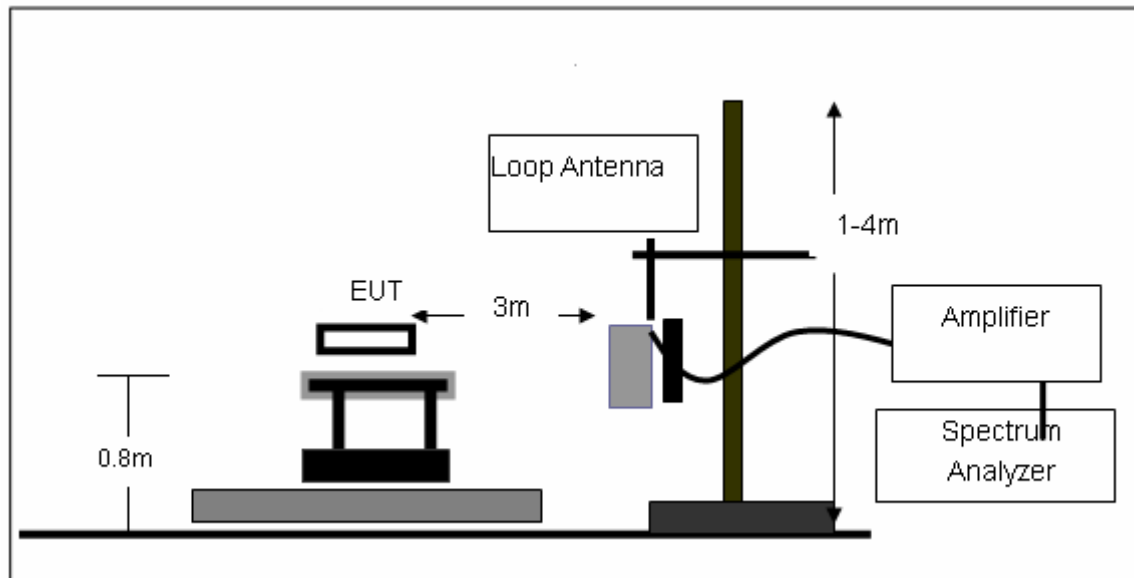

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

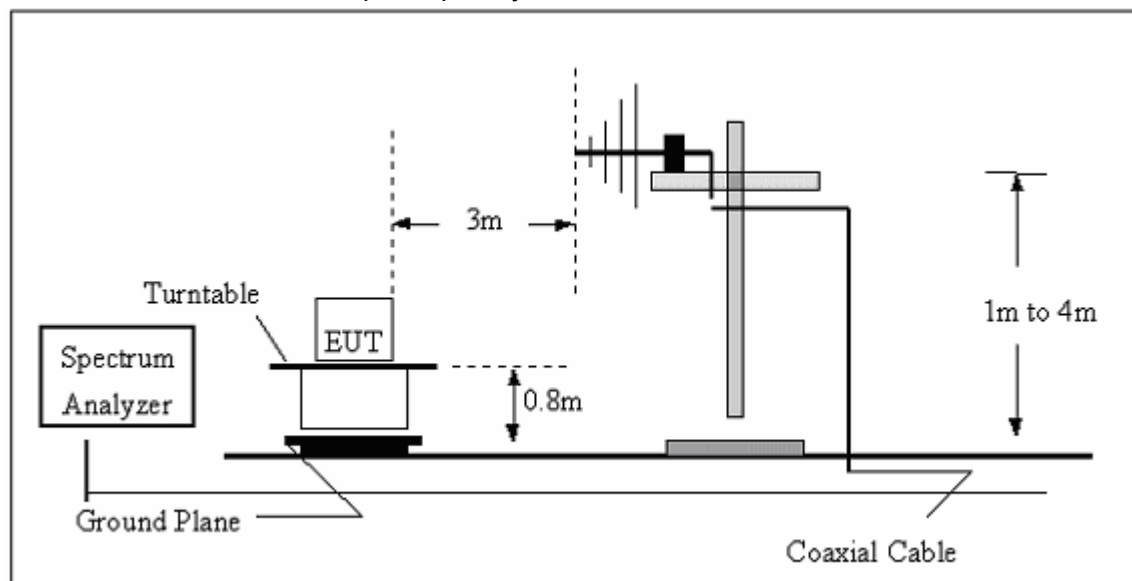

(C) Radiated Emission Test-Up Frequency Above 1GHz

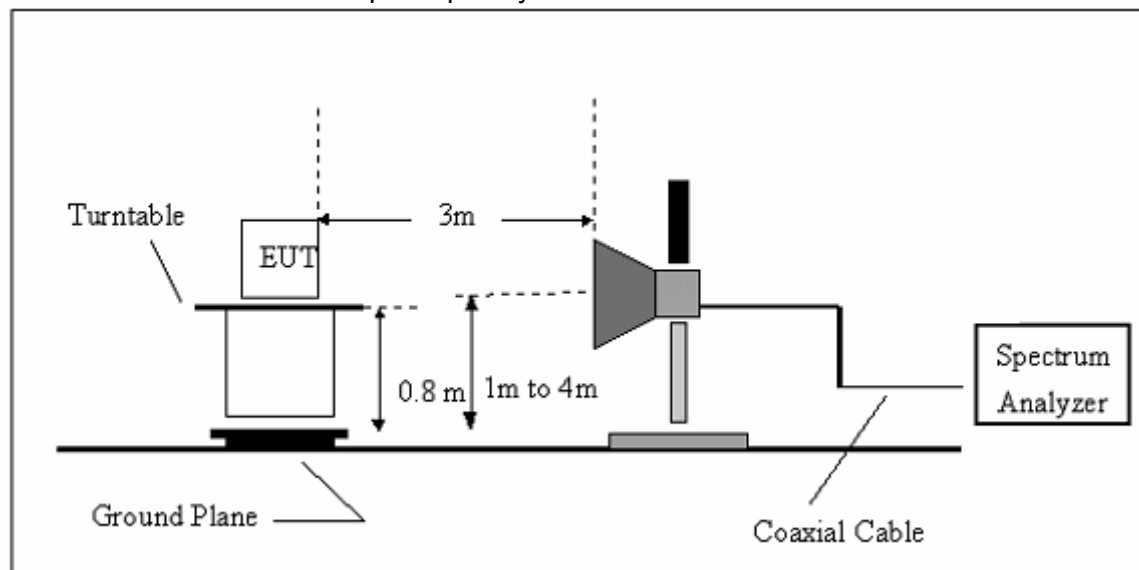

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BELOW 30 MHZ)

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	3.7V		
Test Mode :	Mode 1		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	3.7V		
Test Mode :	Mode 1		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
31.12	17.15	17.4	34.55	40	-5.45	QP
88.36	30.74	8.45	39.19	43.5	-4.31	QP
165.5	28.51	9.69	38.2	43.5	-5.3	QP
351.27	27.24	14.36	41.6	46	-4.4	QP
544.23	22.57	19.91	42.48	46	-3.52	QP
600.37	19.57	19.52	39.09	46	-6.91	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

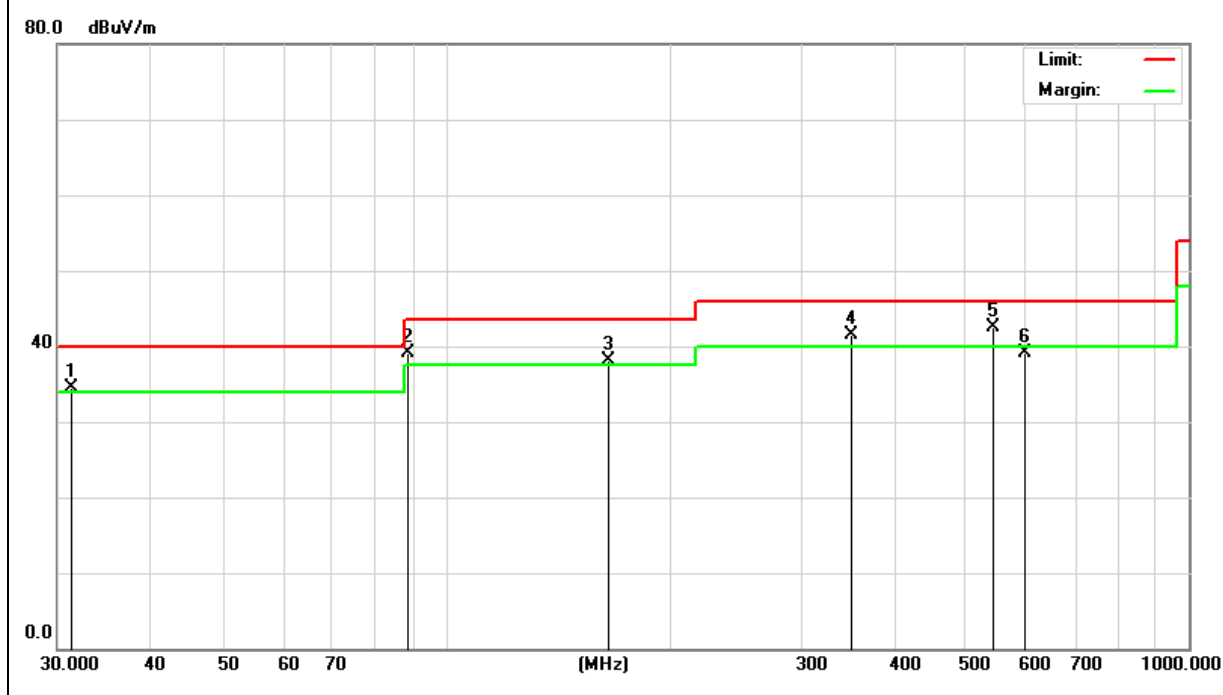


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	3.7V		
Test Mode :	Mode 1		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
45.2599	22.37	10.11	32.48	40	-7.52	QP
100.2699	27.35	9.92	37.27	43.5	-6.23	QP
186.57	28.67	8.28	36.95	43.5	-6.55	QP
351.27	25.77	14.36	40.13	46	-5.87	QP
385.26	24.37	15.29	39.66	46	-6.34	QP
605.37	19.29	19.8	39.09	46	-6.91	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

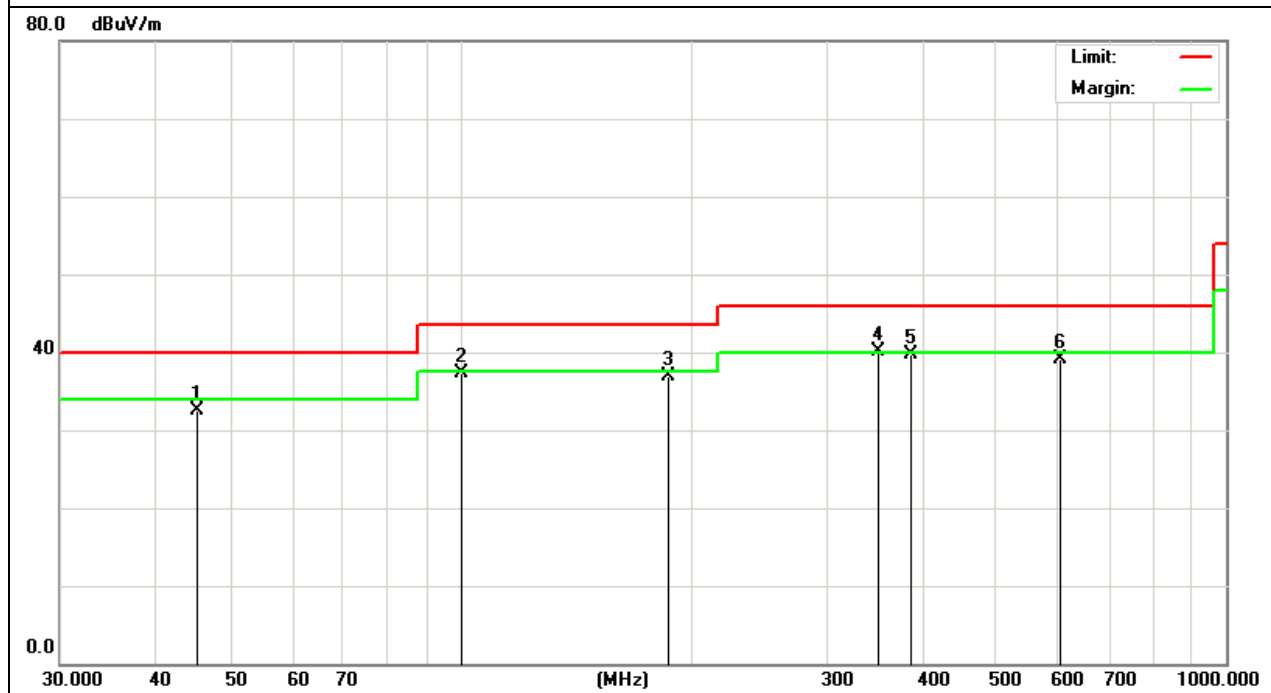


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	3.7V		
Test Mode :	RX		

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
60.25	25.18	4.7	29.88	40	-10.12	QP
142.35	24.33	11.12	35.45	43.5	-8.05	QP
196.35	26.37	7.73	34.1	43.5	-9.4	QP
224.25	27.17	9.3	36.47	46	-9.53	QP
377.24	21.23	14.89	36.12	46	-9.88	QP
605.37	17.16	19.8	36.96	46	-9.04	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

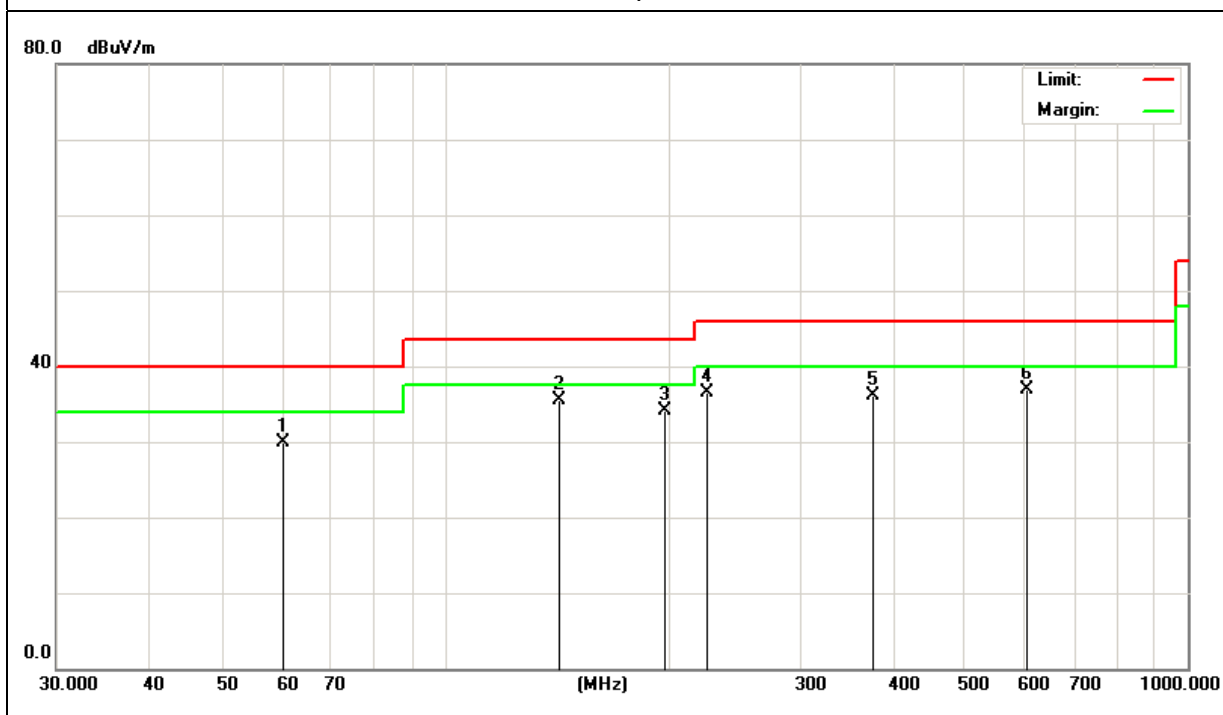


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	3.7V		
Test Mode :	RX		

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
78.32	24.15	6.76	30.91	40	-9.09	QP
174.25	25.87	9	34.87	43.5	-8.63	QP
227.27	26.35	9.37	35.72	46	-10.28	QP
297.274	24.27	12.97	37.24	46	-8.76	QP
354.24	22.88	14.37	37.25	46	-8.75	QP
483.25	18.36	17.51	35.87	46	-10.13	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

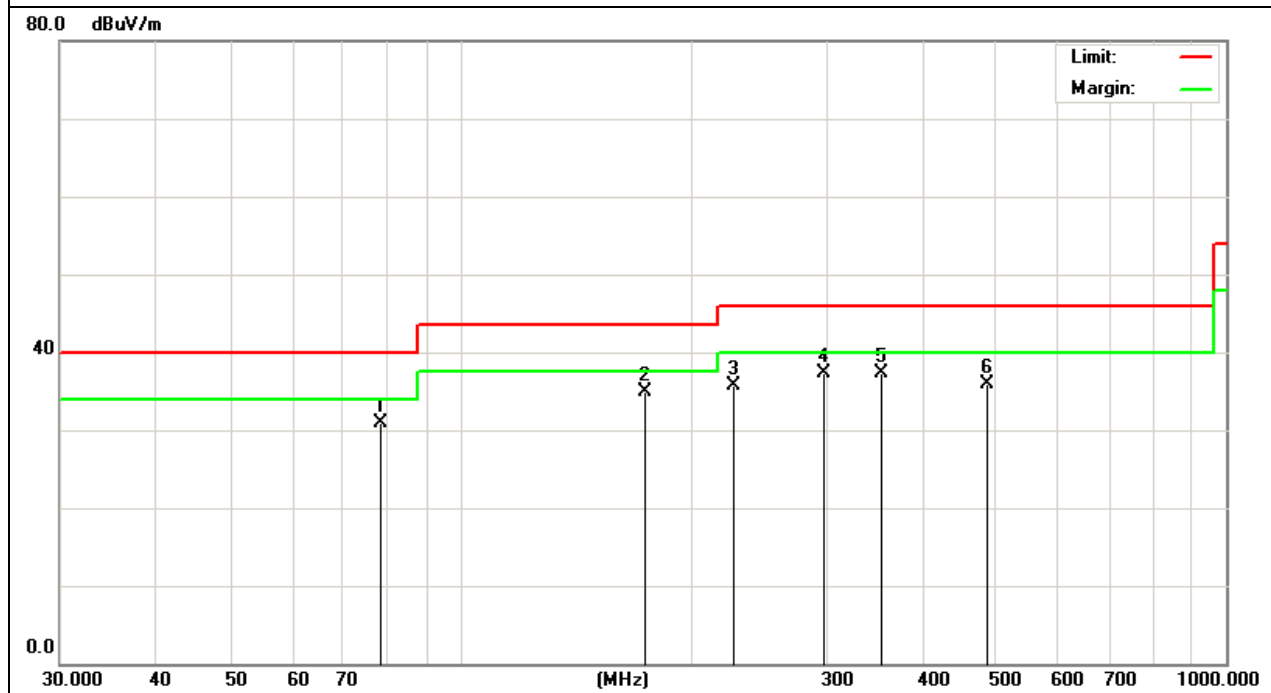

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2402MHz – CH 00(1Mbps)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804.15	62.32	-3.64	58.68	74	-15.32	peak
4804.15	53.41	-3.64	49.77	54	-4.23	AVG
7206	54.24	-0.95	53.29	74	-20.71	peak
7206	42.68	-0.95	41.73	54	-12.27	AVG
9608	62.17	2.15	64.32	74	-9.68	peak
9608	46.32	2.15	48.47	54	-5.53	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

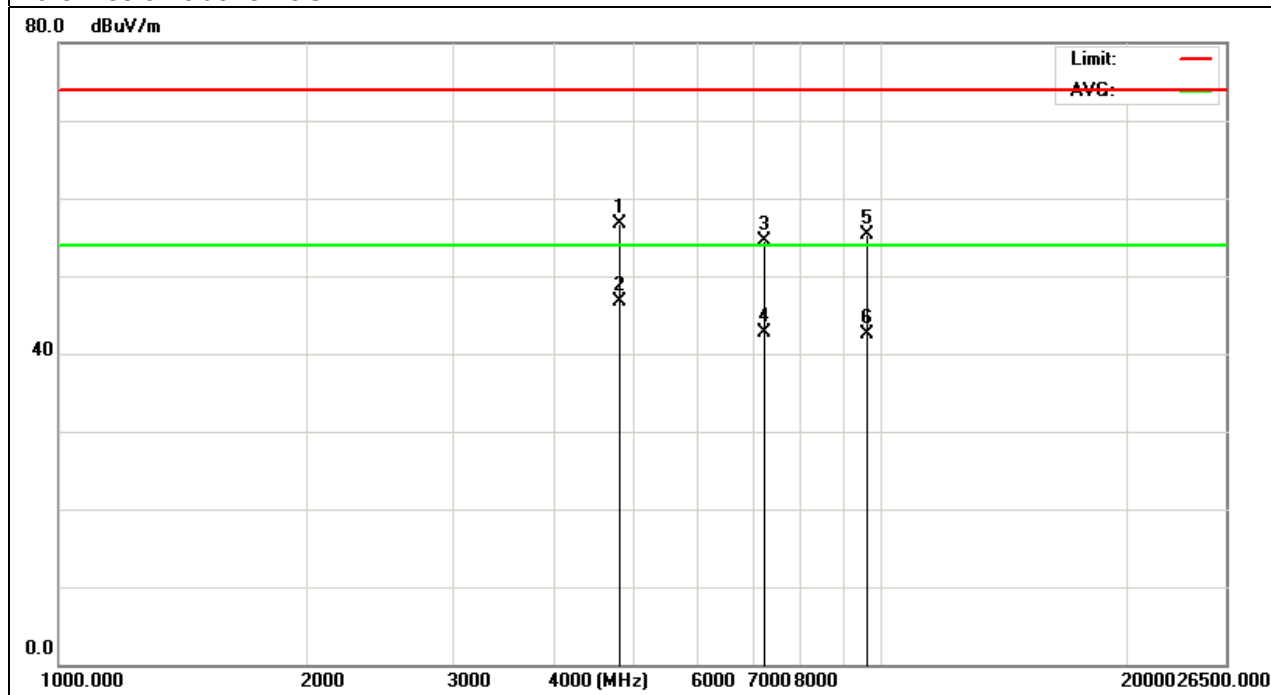


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2402MHz – CH 00(1Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.15	60.37	-3.64	56.73	74	-17.27	peak
4804.15	50.27	-3.64	46.63	54	-7.37	AVG
7206	55.38	-0.95	54.43	74	-19.57	peak
7206	43.57	-0.95	42.62	54	-11.38	AVG
9608	53.23	2.15	55.38	74	-18.62	peak
9608	40.28	2.15	42.43	54	-11.57	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

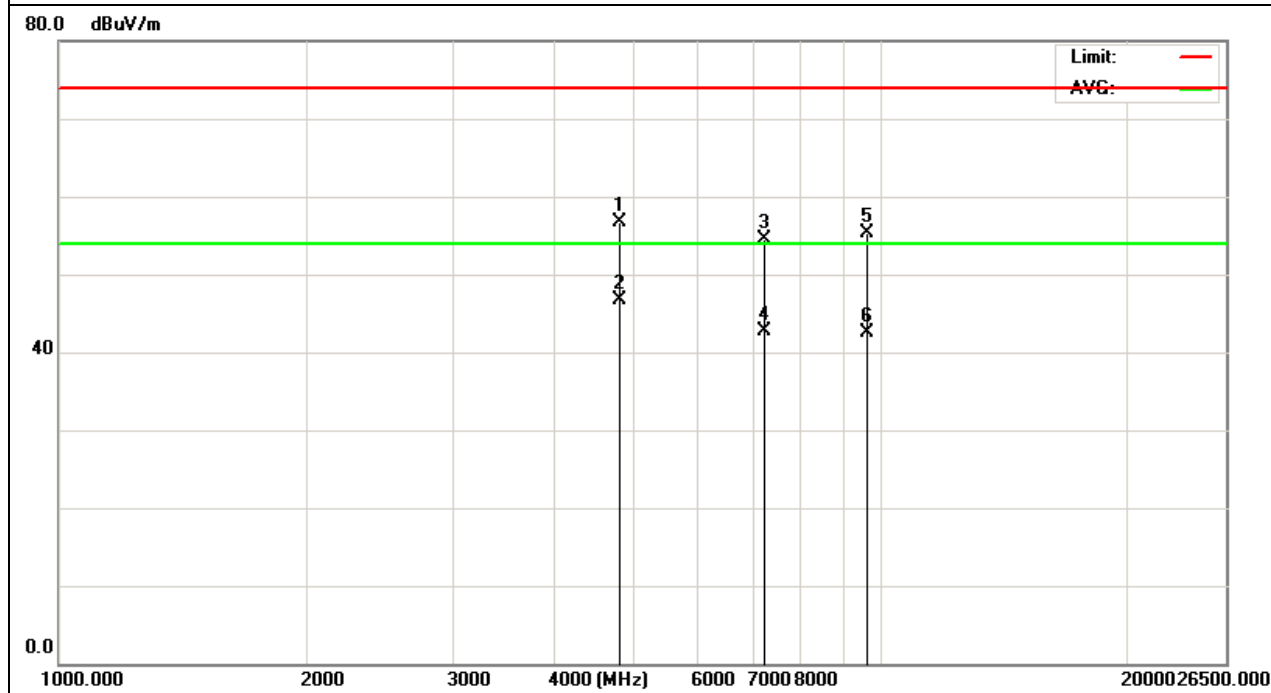


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2441MHz – CH 39(1Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.27	60.4	-3.67	56.73	74	-17.27	peak
4882.27	50.3	-3.67	46.63	54	-7.37	AVG
7323.17	55.25	-0.82	54.43	74	-19.57	peak
7323.17	43.44	-0.82	42.62	54	-11.38	AVG
9764.74	54.55	0.83	55.38	74	-18.62	peak
9764.74	41.6	0.83	42.43	54	-11.57	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

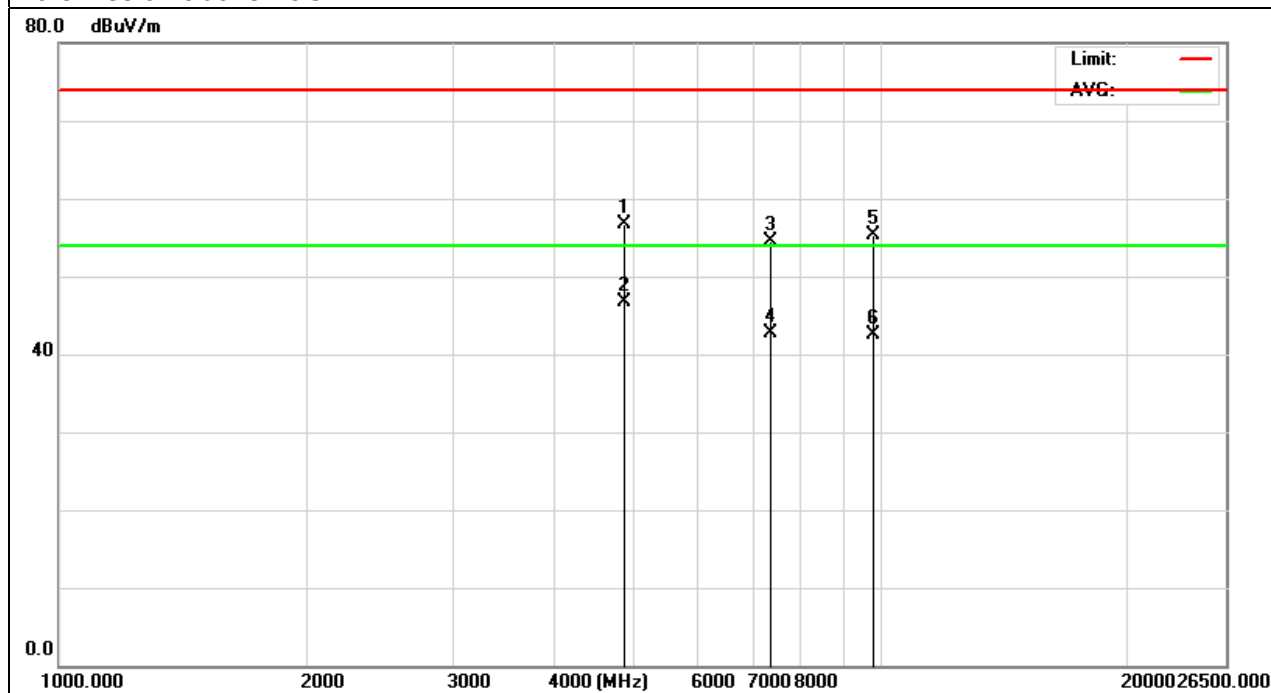


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2441MHz – CH 39(1Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.11	61.17	-3.68	57.49	74	-16.51	peak
4882.11	52.37	-3.68	48.69	54	-5.31	AVG
7323.17	55.76	-0.82	54.94	74	-19.06	peak
7323.17	44.17	-0.82	43.35	54	-10.65	AVG
9764.74	53.67	0.83	54.5	74	-19.5	peak
9764.74	42.84	0.83	43.67	54	-10.33	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

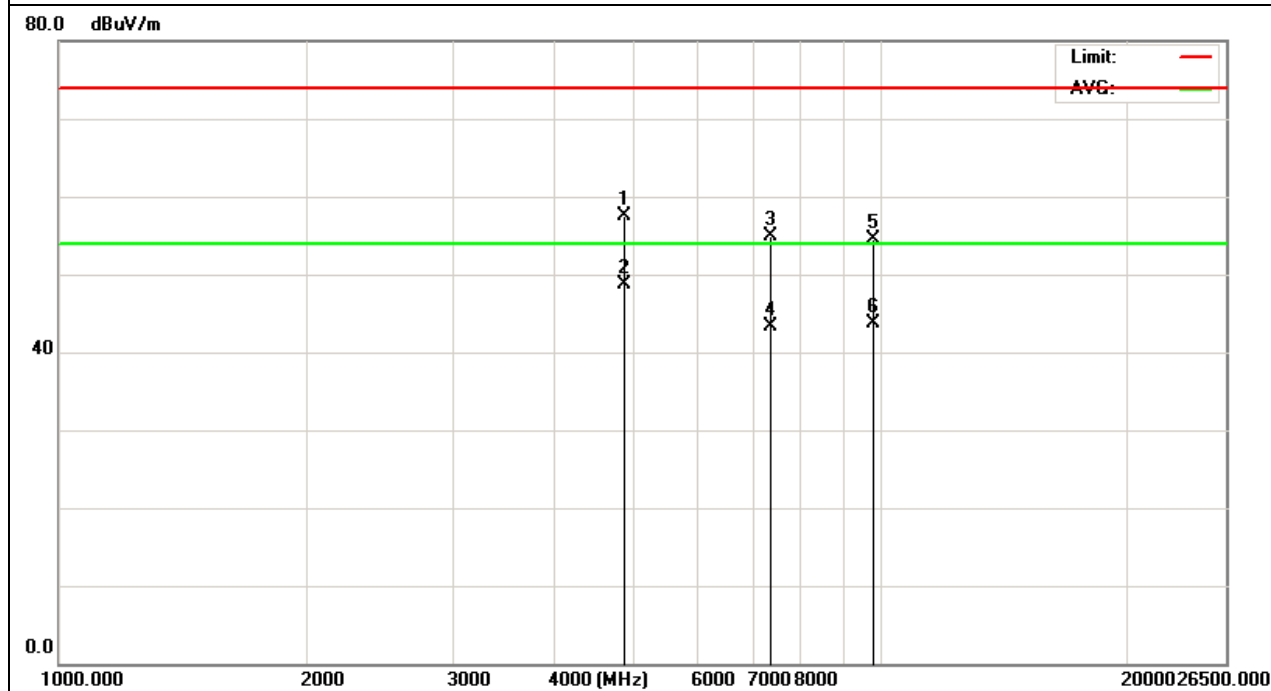


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2480MHz – CH 78(1Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.11	61.08	-3.59	57.49	74	-16.51	peak
4960.11	52.28	-3.59	48.69	54	-5.31	AVG
7440.21	55.62	-0.68	54.94	74	-19.06	peak
7440.21	44.03	-0.68	43.35	54	-10.65	AVG
9920.35	53.35	1.15	54.5	74	-19.5	peak
9920.35	42.52	1.15	43.67	54	-10.33	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

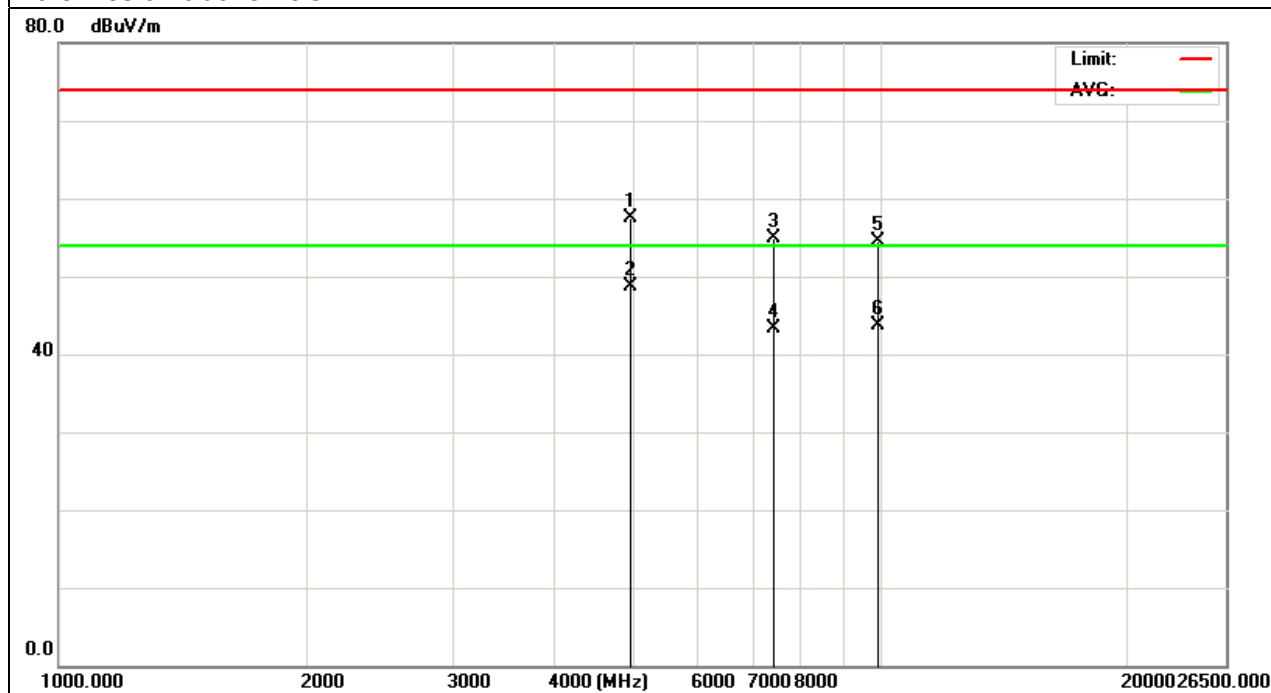


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2480MHz – CH 78(1Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.64	50.44	-3.6	46.84	54	-7.16	AVG
4960.67	59.67	-3.6	56.07	74	-17.93	peak
7440.87	54.74	-0.68	54.06	74	-19.94	peak
7440.87	42.26	-0.68	41.58	54	-12.42	AVG
9920.35	52.61	1.15	53.76	74	-20.24	peak
9920.35	43.17	1.15	44.32	54	-9.68	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

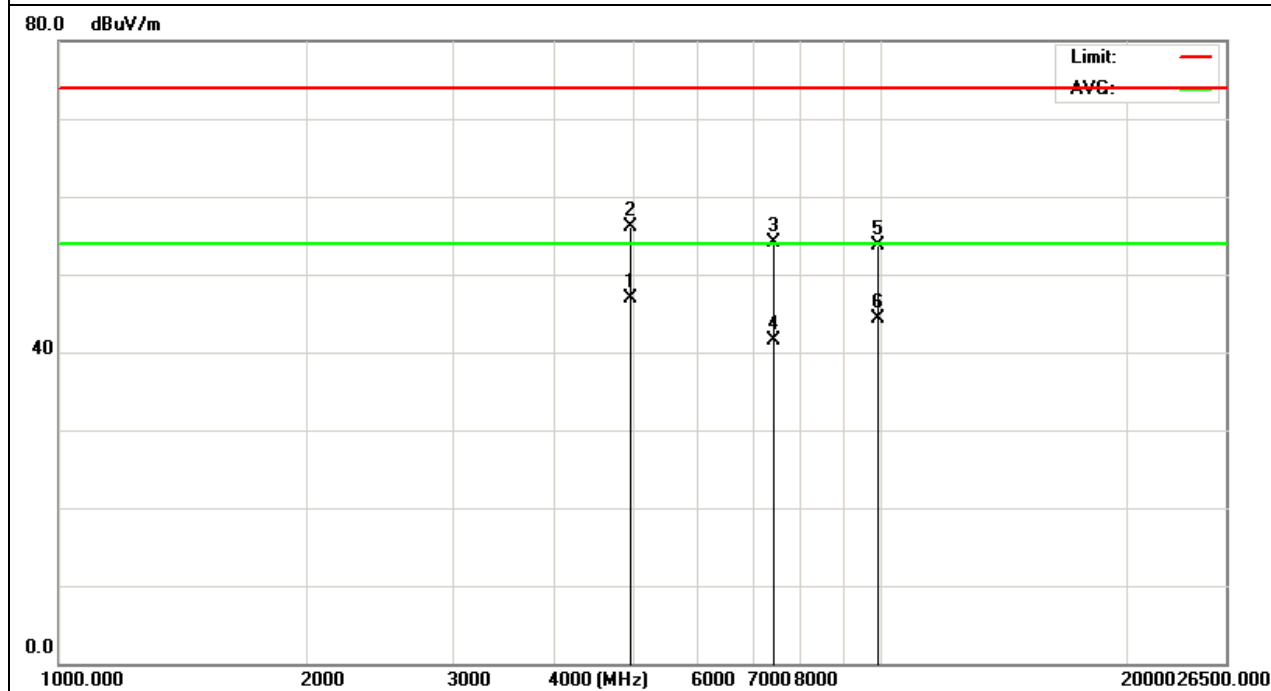


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2402MHz – CH 00(2Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.33	59.58	-3.64	55.94	74	-18.06	peak
4804.33	48.27	-3.64	44.63	54	-9.37	AVG
7206.85	54.37	-0.96	53.41	74	-20.59	peak
7206.85	42.41	-0.96	41.45	54	-12.55	AVG
9608.61	50.18	2.14	52.32	74	-21.68	peak
9608.61	40.29	2.14	42.43	54	-11.57	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

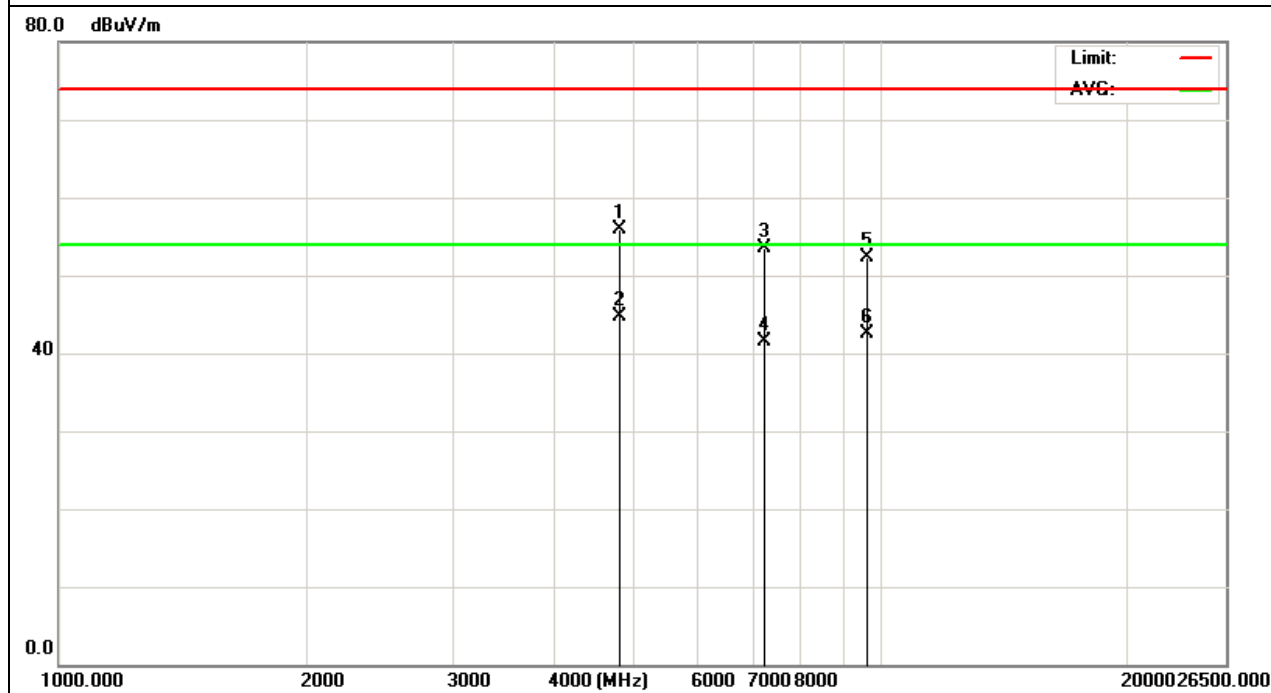


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2402MHz – CH 00(2Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.15	62.37	-3.64	58.73	74	-15.27	peak
4804.15	51.25	-3.64	47.61	54	-6.39	AVG
7206	54.33	-0.95	53.38	74	-20.62	peak
7206	42.68	-0.95	41.73	54	-12.27	AVG
9608	52.74	2.15	54.89	74	-19.11	peak
9608	40.35	2.15	42.5	54	-11.5	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

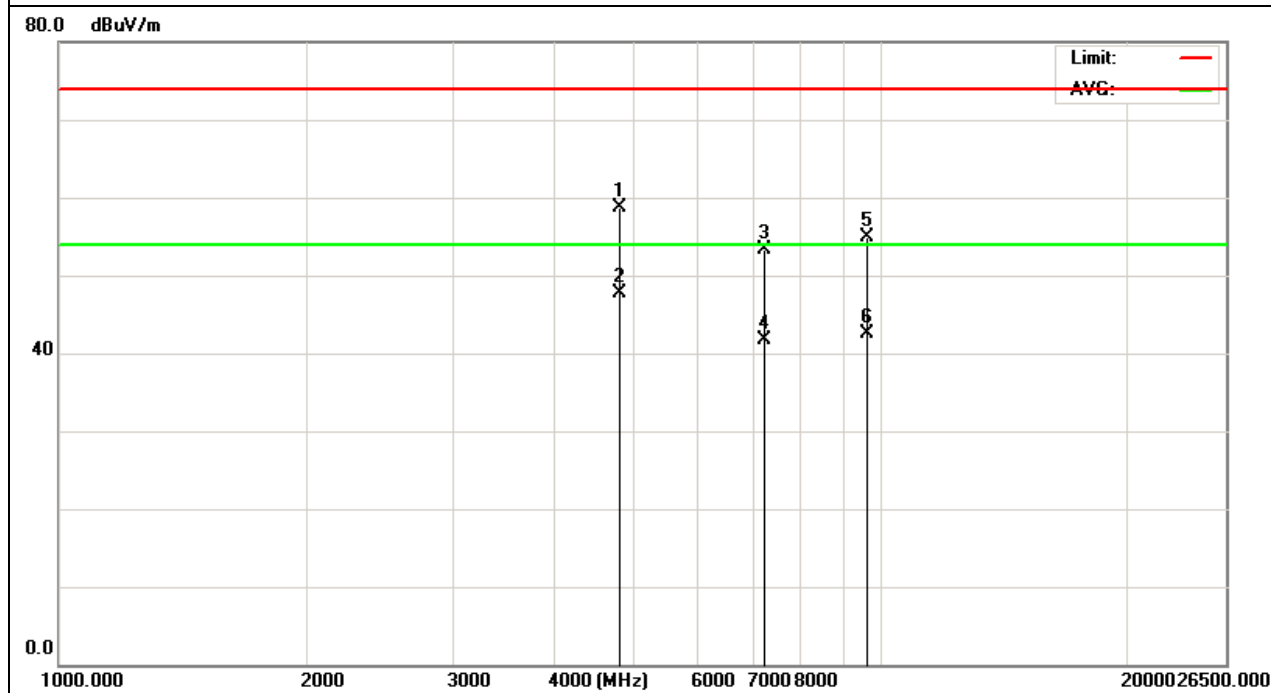


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2441MHz – CH 39(2Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.27	61.74	-3.67	58.07	74	-15.93	peak
4882.27	51.32	-3.67	47.65	54	-6.35	AVG
7323.17	56.33	-0.82	55.51	74	-18.49	peak
7323.17	44.74	-0.82	43.92	54	-10.08	AVG
9764.74	53.26	0.83	54.09	74	-19.91	peak
9764.74	43.77	0.83	44.6	54	-9.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

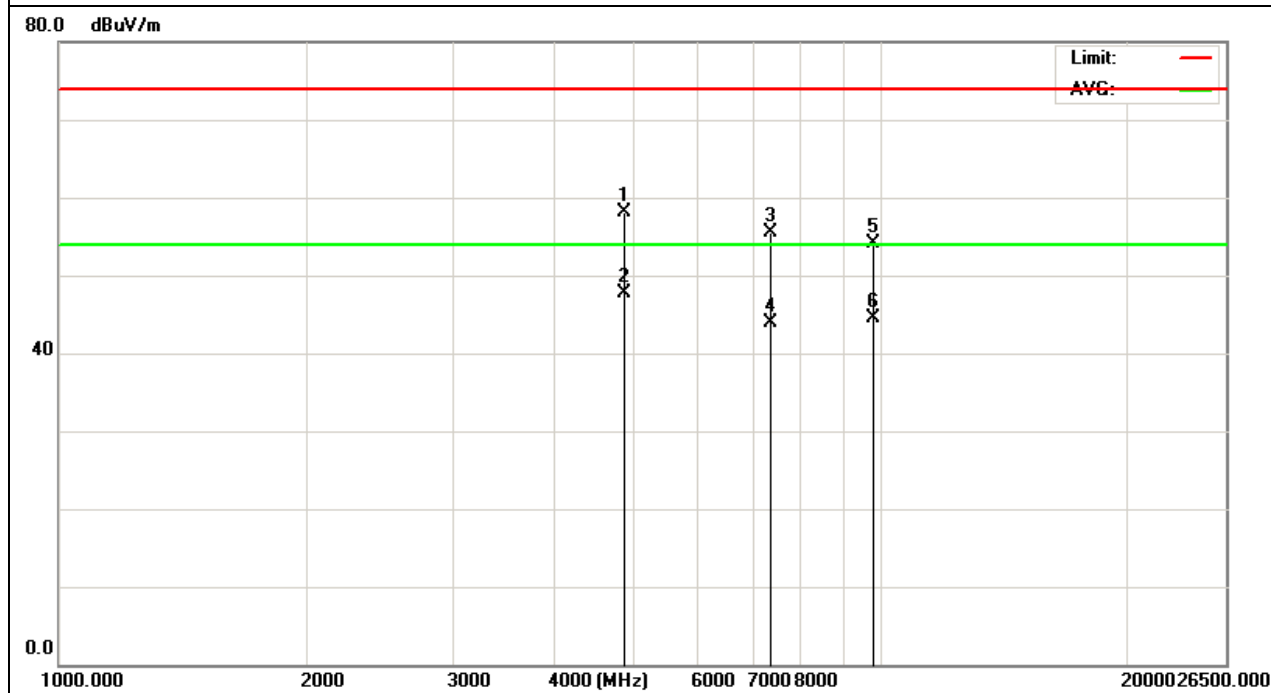


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2441MHz – CH 39(2Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.11	62.57	-3.68	58.89	74	-15.11	peak
4882.11	53.66	-3.68	49.98	54	-4.02	AVG
7323.17	53.27	-0.82	52.45	74	-21.55	peak
7323.17	43.22	-0.82	42.4	54	-11.6	AVG
9764.74	52.74	0.83	53.57	74	-20.43	peak
9764.74	43.25	0.83	44.08	54	-9.92	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

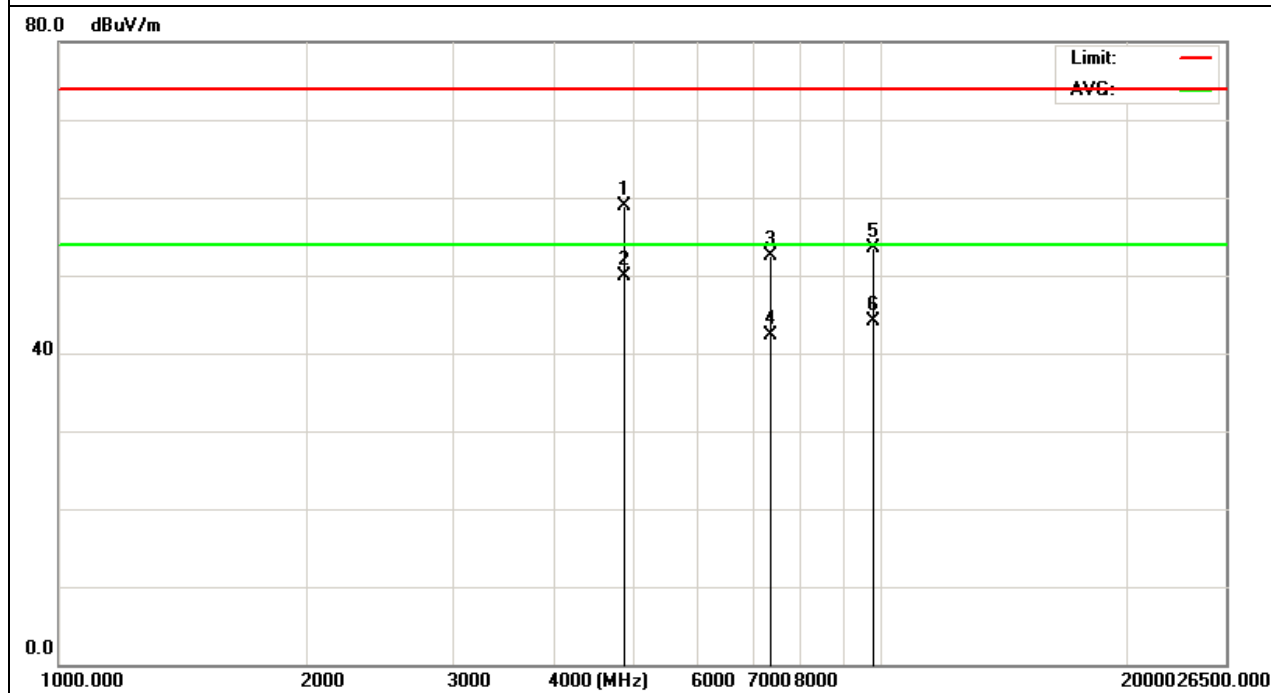


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2480MHz – CH 78(2Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.11	62.25	-3.59	58.66	74	-15.34	peak
4960.11	51.27	-3.59	47.68	54	-6.32	AVG
7440.21	56.37	-0.68	55.69	74	-18.31	peak
7440.21	45.87	-0.68	45.19	54	-8.81	AVG
9920.35	54.37	1.15	55.52	74	-18.48	peak
9920.35	43.22	1.15	44.37	54	-9.63	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

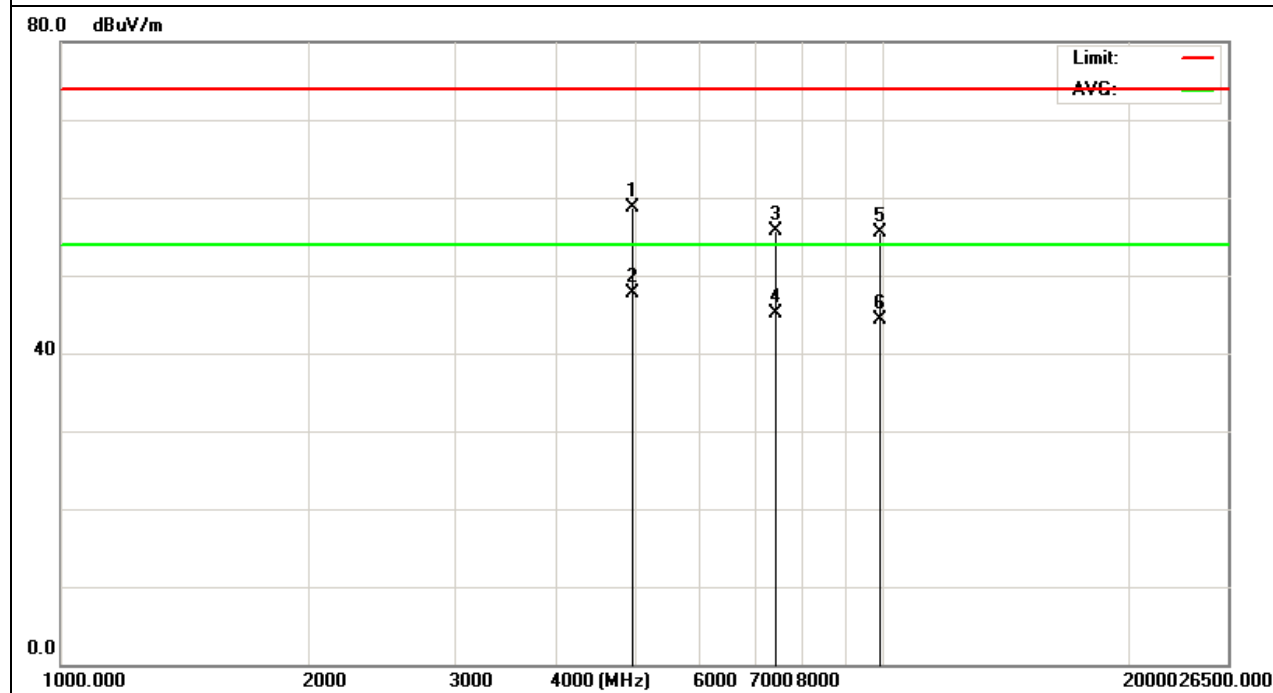


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2480MHz – CH 78(2Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.64	51.27	-3.6	47.67	54	-6.33	AVG
4960.67	64.27	-3.6	60.67	74	-13.33	peak
7440.87	55.27	-0.68	54.59	74	-19.41	peak
7440.87	42.34	-0.68	41.66	54	-12.34	AVG
9920.35	53.77	1.15	54.92	74	-19.08	peak
9920.35	43.17	1.15	44.32	54	-9.68	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

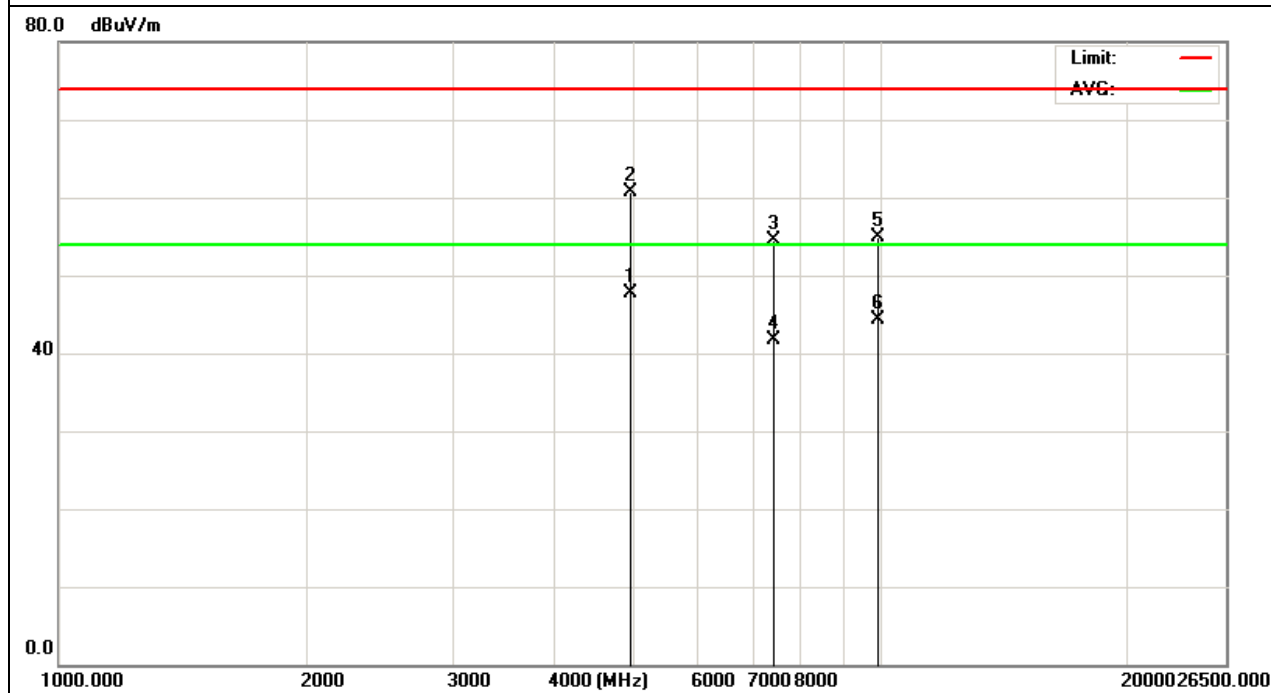


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2402MHz – CH00 (3Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.15	63.04	-3.64	59.4	74	-14.6	peak
4804.15	53.74	-3.64	50.1	54	-3.9	AVG
7206	56.27	-0.95	55.32	74	-18.68	peak
7206	46.37	-0.95	45.42	54	-8.58	AVG
9608	52.11	2.15	54.26	74	-19.74	peak
9608	42.78	2.15	44.93	54	-9.07	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

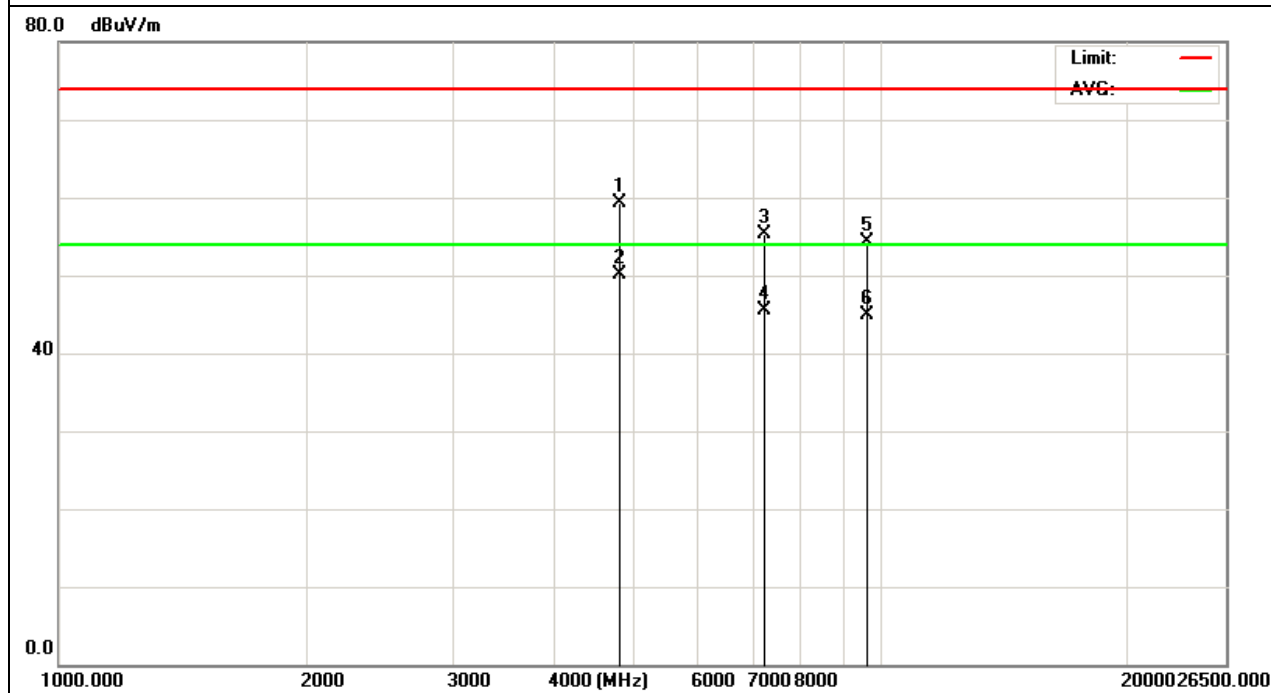


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2402MHz – CH00 (3Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.15	61.35	-3.64	57.71	74	-16.29	peak
4804.15	51.11	-3.64	47.47	54	-6.53	AVG
7206	54.27	-0.95	53.32	74	-20.68	peak
7206	42.03	-0.95	41.08	54	-12.92	AVG
9608	50.38	2.15	52.53	74	-21.47	peak
9608	41.11	2.15	43.26	54	-10.74	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

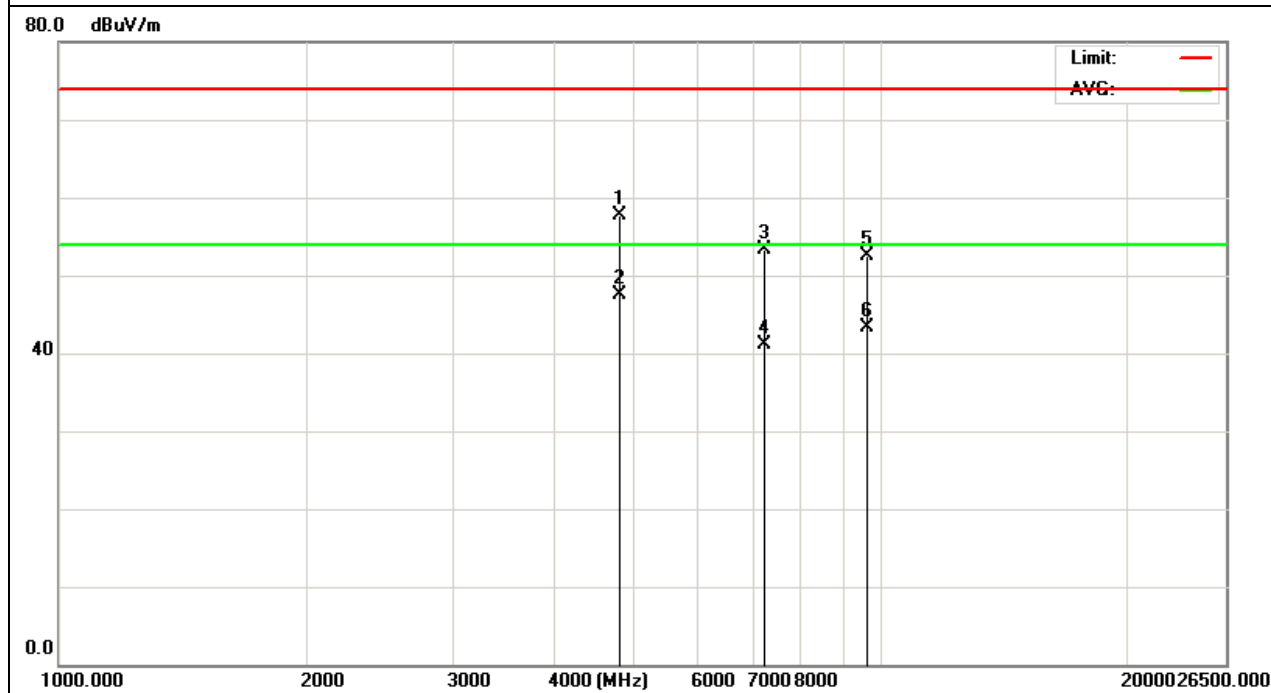


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2441MHz – CH39(3Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.27	61.02	-3.67	57.35	74	-16.65	peak
4882.27	50.22	-3.67	46.55	54	-7.45	AVG
7323.17	55.17	-0.82	54.35	74	-19.65	peak
7323.17	44.35	-0.82	43.53	54	-10.47	AVG
9764.74	53.27	0.83	54.1	74	-19.9	peak
9764.74	40.22	0.83	41.05	54	-12.95	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

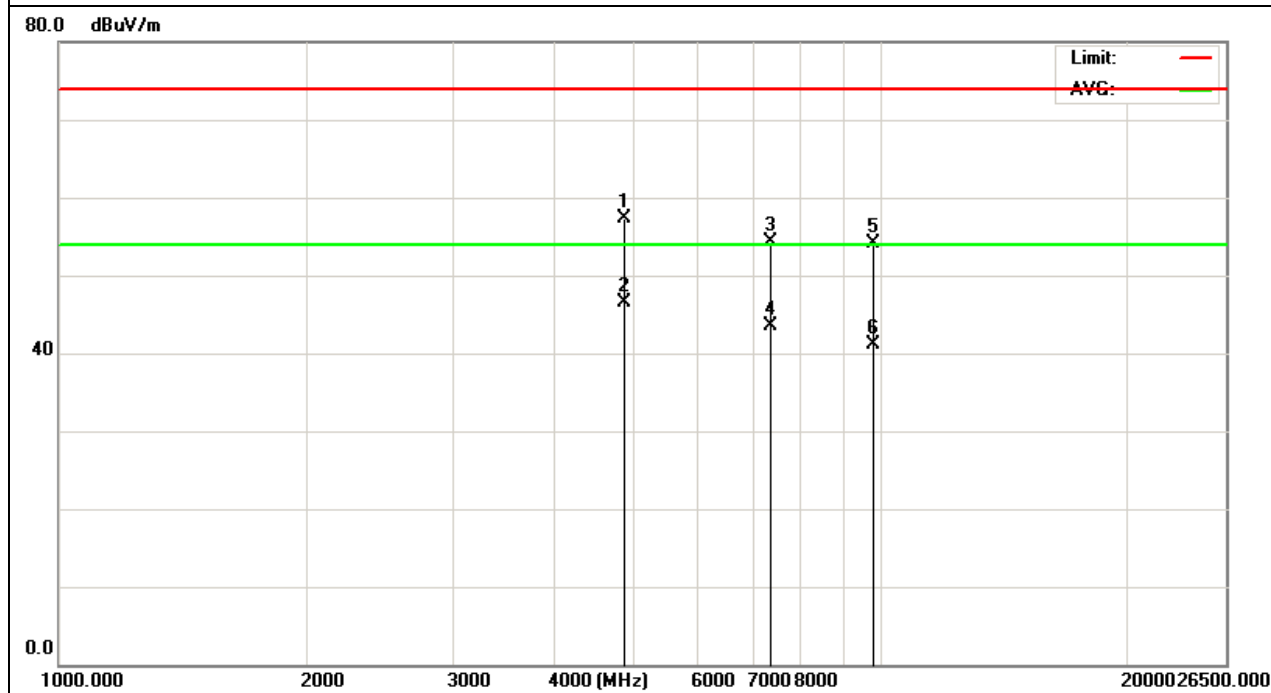


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2441MHz – CH39 (3Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.11	62.27	-3.68	58.59	74	-15.41	peak
4882.11	51.37	-3.68	47.69	54	-6.31	AVG
7323.17	56.33	-0.82	55.51	74	-18.49	peak
7323.17	45.37	-0.82	44.55	54	-9.45	AVG
9764.74	54.67	0.83	55.5	74	-18.5	peak
9764.74	43.87	0.83	44.7	54	-9.3	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

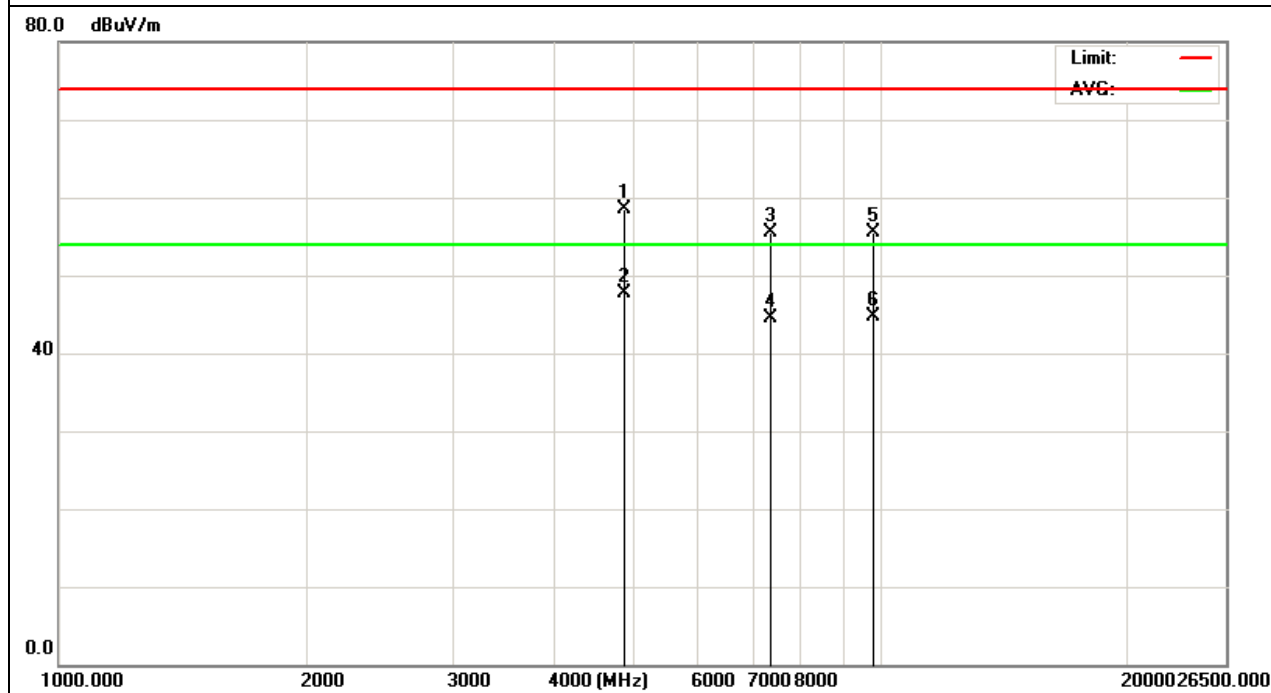


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2480MHz – CH78 (3Mbps)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.11	62.57	-3.59	58.98	74	-15.02	peak
4960.11	53.26	-3.59	49.67	54	-4.33	AVG
7440.21	56.74	-0.68	56.06	74	-17.94	peak
7440.21	45.22	-0.68	44.54	54	-9.46	AVG
9920.35	52.57	1.15	53.72	74	-20.28	peak
9920.35	41.22	1.15	42.37	54	-11.63	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

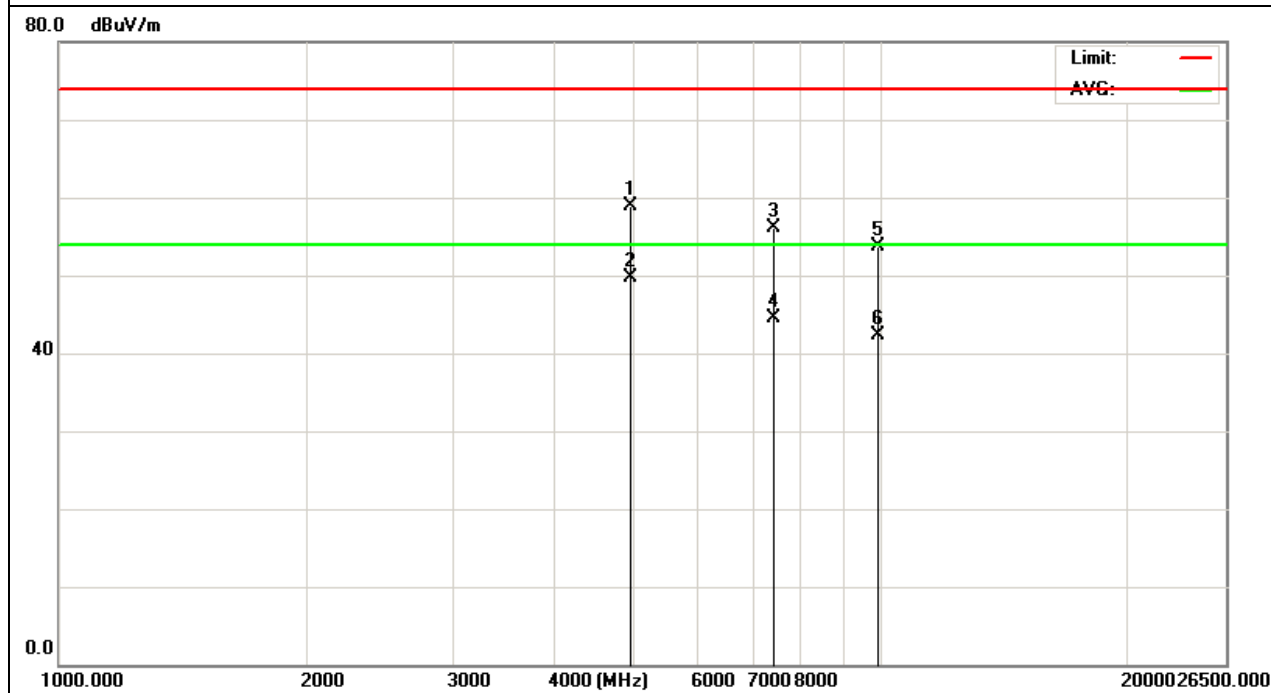


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX 2480MHz – CH78 (3Mbps)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.64	51.57	-3.6	47.97	54	-6.03	AVG
4960.67	60.67	-3.6	57.07	74	-16.93	peak
7440.87	55.38	-0.68	54.7	74	-19.3	peak
7440.87	43.78	-0.68	43.1	54	-10.9	AVG
9920.35	53.66	1.15	54.81	74	-19.19	peak
9920.35	42.35	1.15	43.5	54	-10.5	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

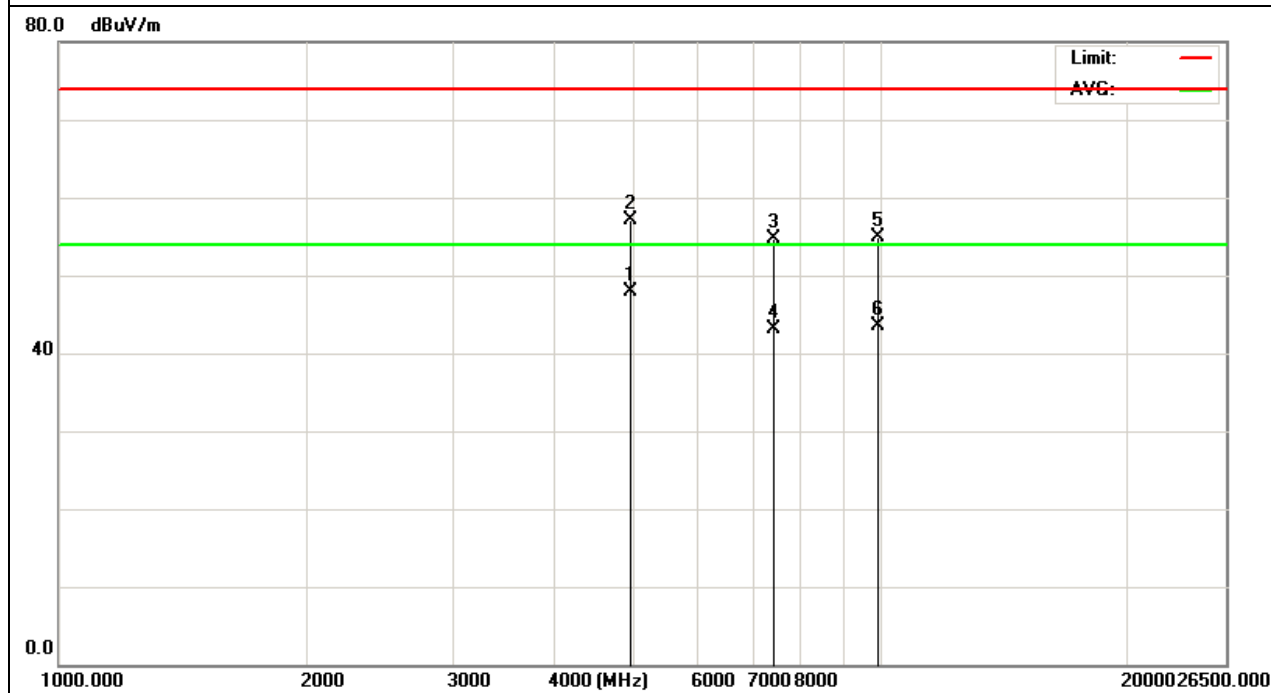


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	RX	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.15	63.02	-12.92	50.1	74	-23.9	peak
4804.15	53.22	-12.92	40.3	54	-13.7	AVG
7206	60.12	-10.13	49.99	74	-24.01	peak
7206	50.3	-10.13	40.17	54	-13.83	AVG
9608	52.73	-3.85	48.88	74	-25.12	peak
9608	41.15	-3.85	37.3	54	-16.7	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

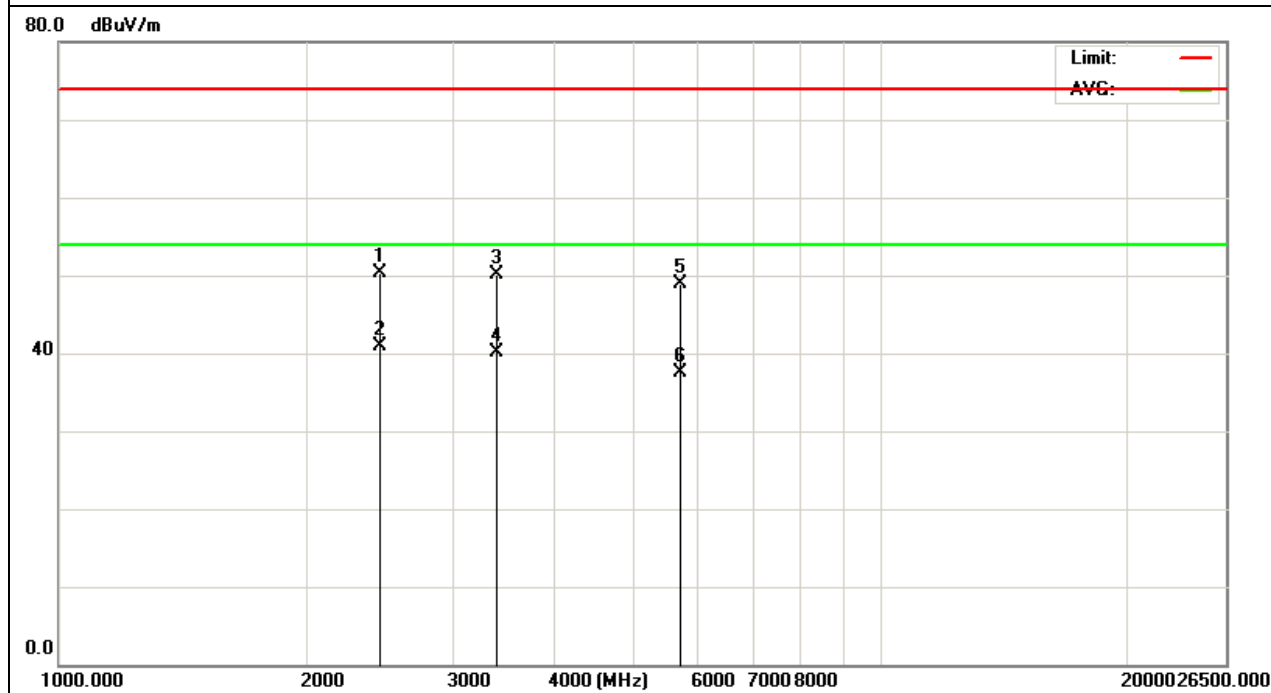


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	RX	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2157.35	62.44	-12.18	50.26	74	-23.74	peak
2157.35	53.01	-12.18	40.83	54	-13.17	AVG
4225.57	55.88	-5.84	50.04	74	-23.96	peak
4225.57	46.04	-5.84	40.2	54	-13.8	AVG
5623.57	53.19	-4.34	48.85	74	-25.15	peak
5623.57	41.77	-4.34	37.43	54	-16.57	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No emission above 18GHz

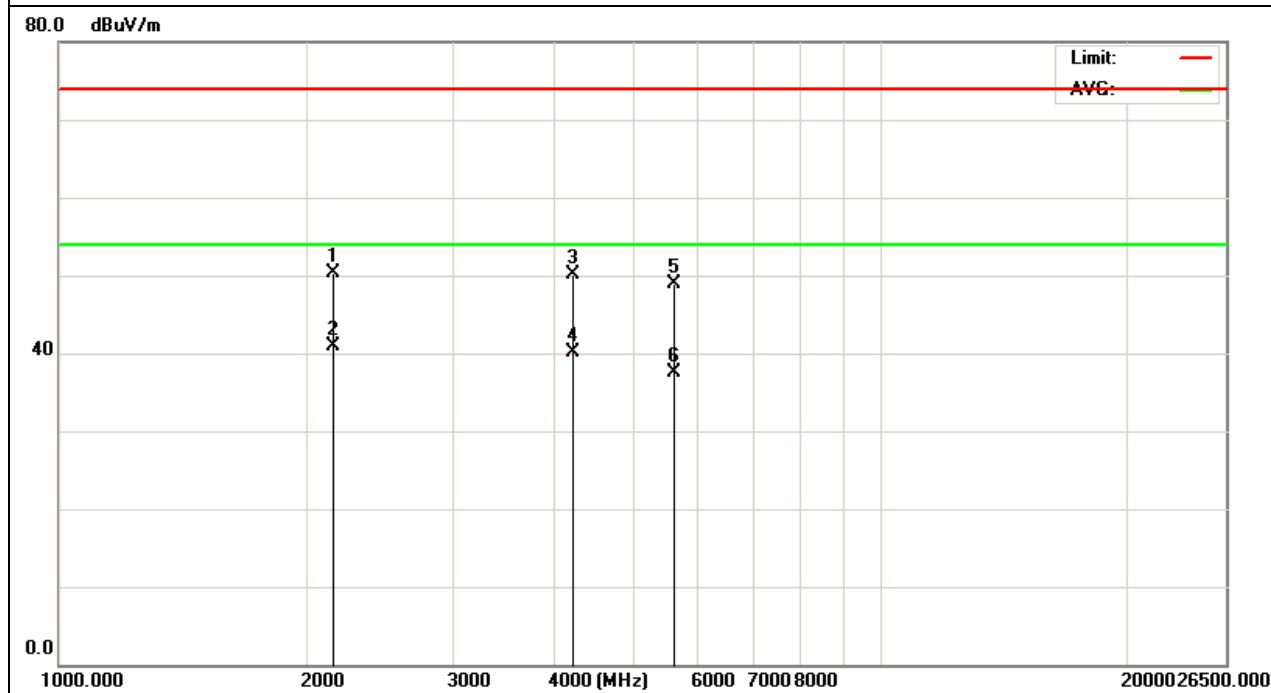

3.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)


both hoping and non-hopping mode have be mesuremented. And the worst case only reported.

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2402MHz-1Mbps(non-hoppin g)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	88.28	-40.5	47.78	74	-26.22	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

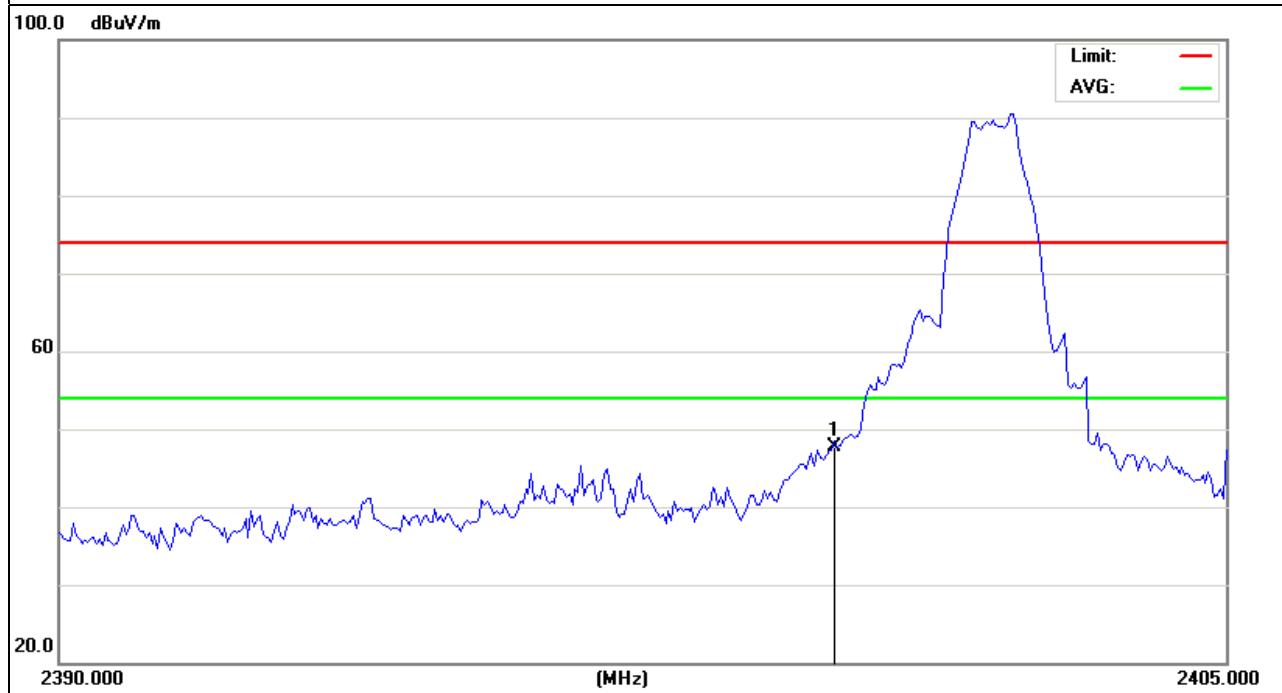


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2402MHz-1Mbps(non-hoppin g)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2400	88.6	-40.5	48.1	74	-25.9	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

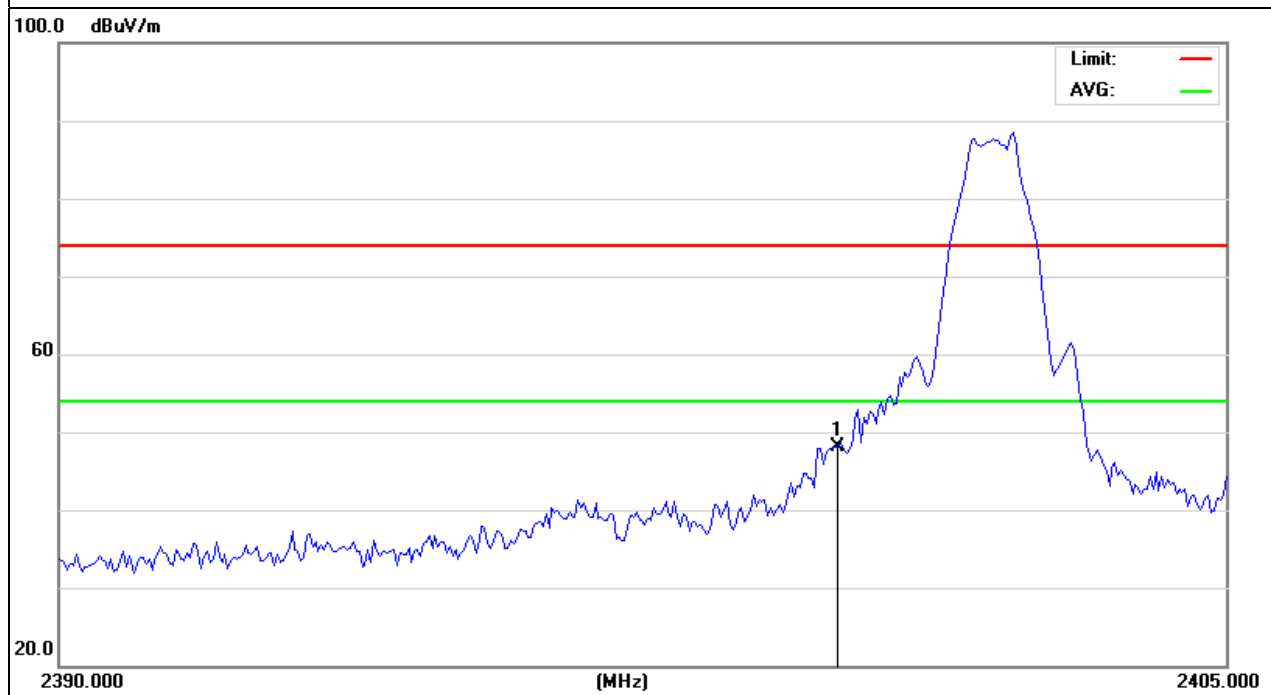


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2480MHz-1Mbps(non-hoppin g)	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	86.39	-40.43	45.96	74	-28.04	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

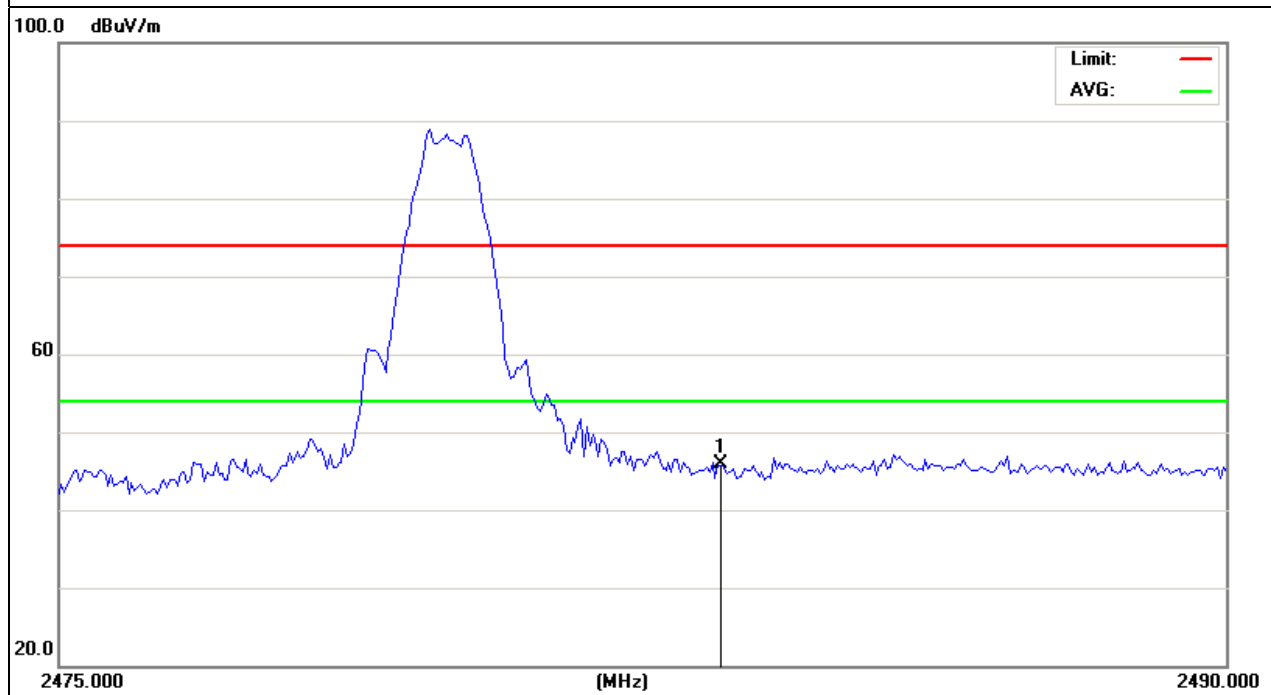


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2480MHz-1Mbps(non-hoppin g)	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	83.33	-40.43	42.9	74	-31.1	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

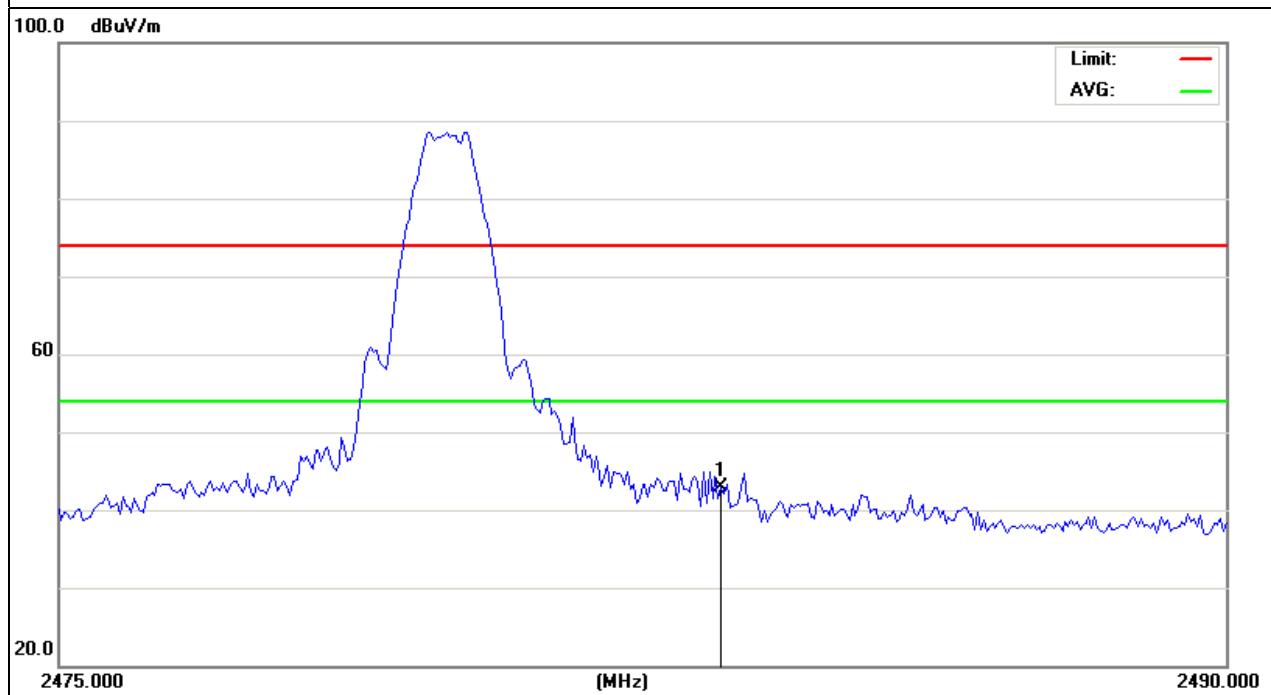


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2402MHz-2Mbps(hopping)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	91	-40.5	50.5	74	-23.5	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

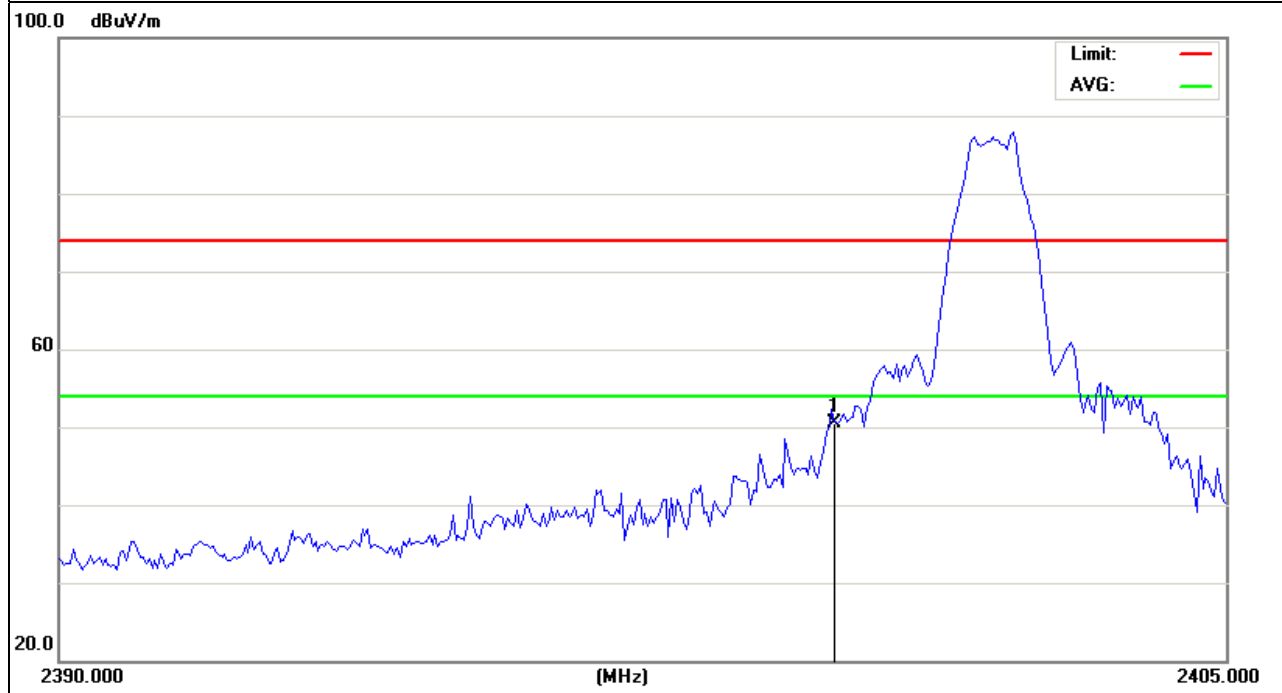


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2402MHz-2Mbps(hopping)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	92.1	-40.5	51.6	74	-22.4	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

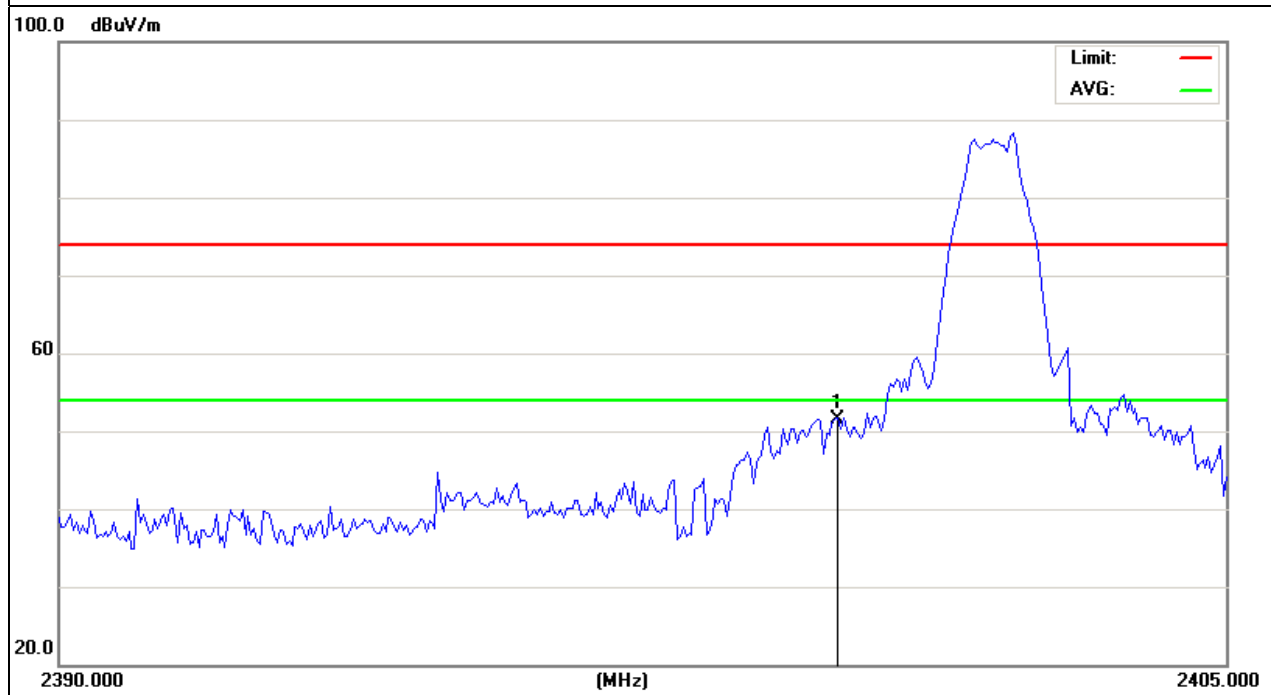


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2480MHz-2Mbps(hopping)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	86.43	-40.43	46	74	-28	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

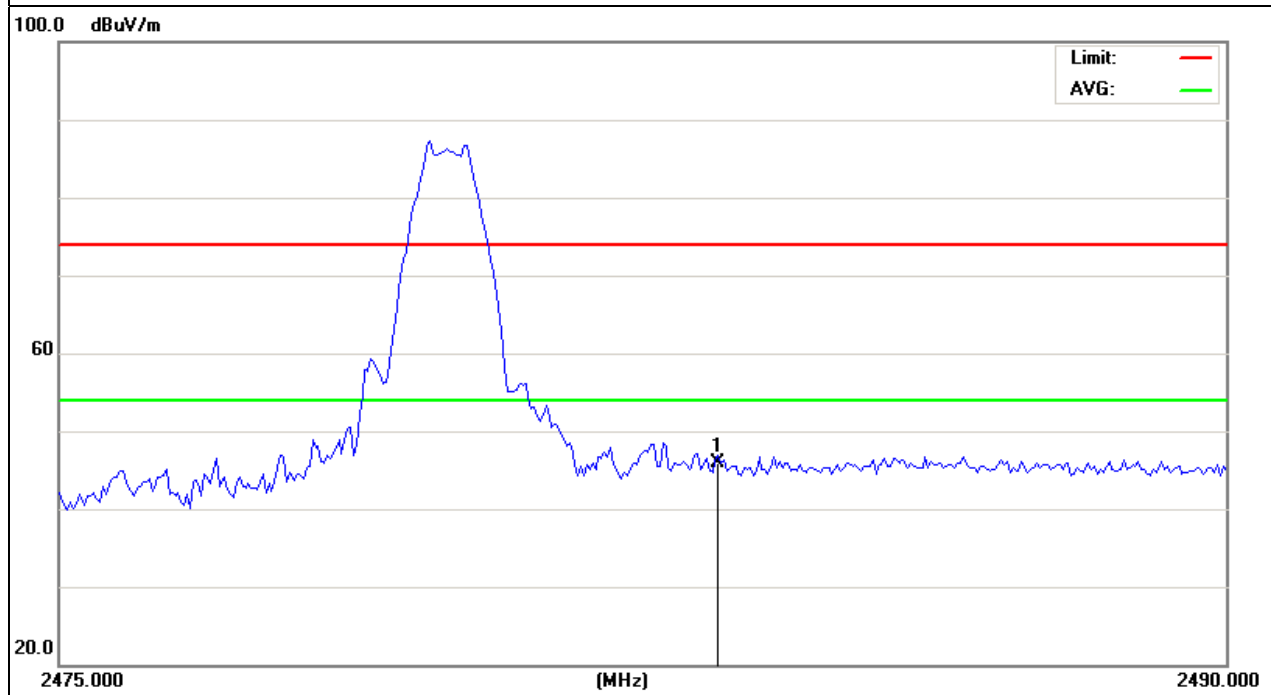


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2480MHz-2Mbps(hopping)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	80.47	-40.43	40.04	74	-33.96	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

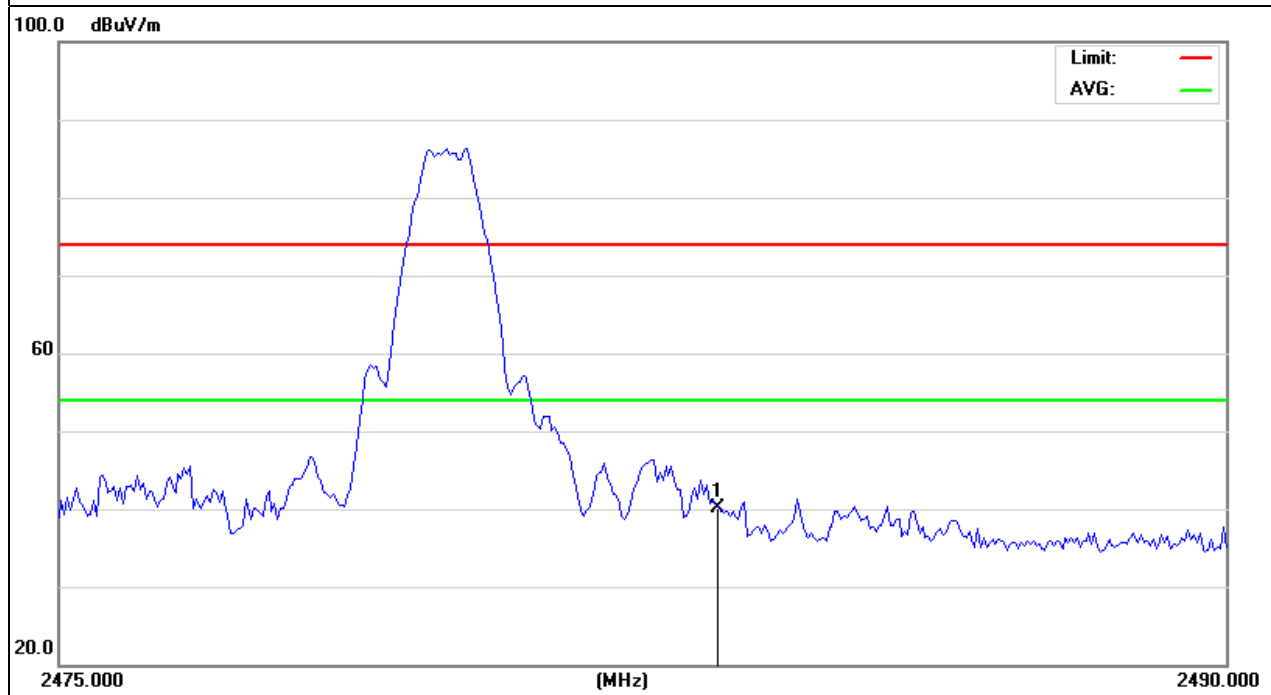


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2402MHz-3Mbps(hopping)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	89.6	-40.5	49.1	74	-24.9	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

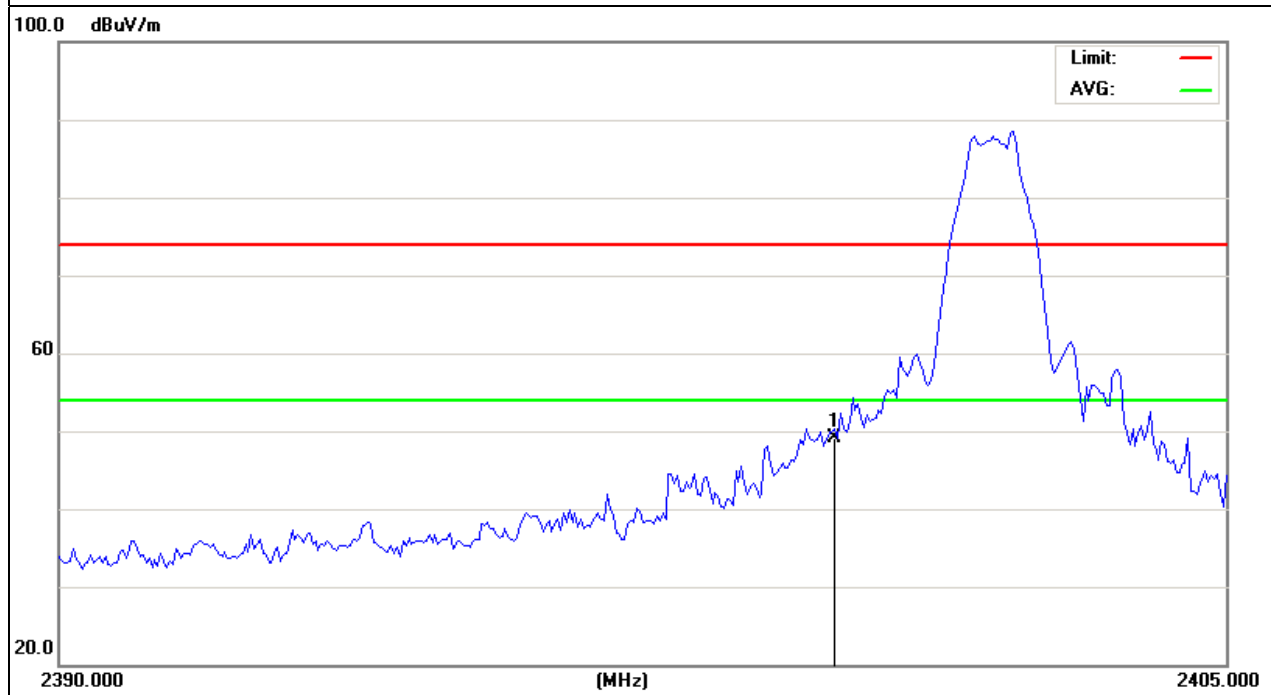


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2402MHz-3Mbps(hopping)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2400	91.3	-40.5	50.8	74	-23.2	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

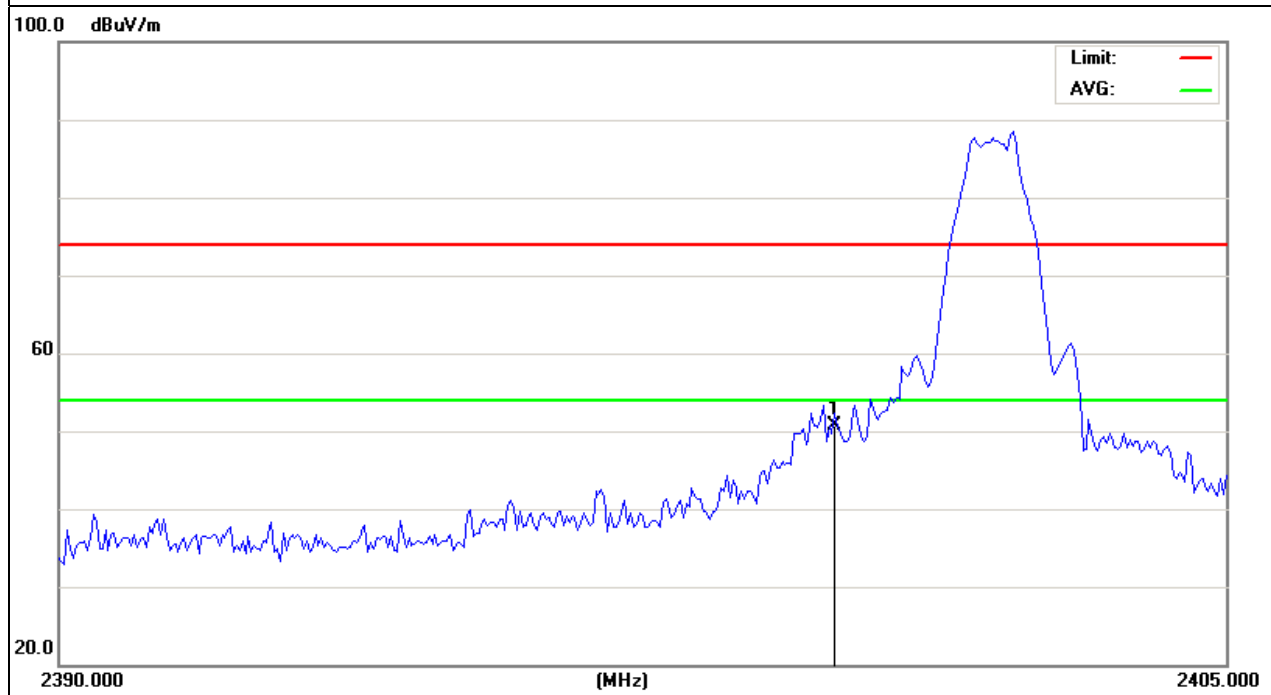


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2480MHz-3Mbps(hopping)	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	86.53	-40.43	46.1	74	-27.9	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

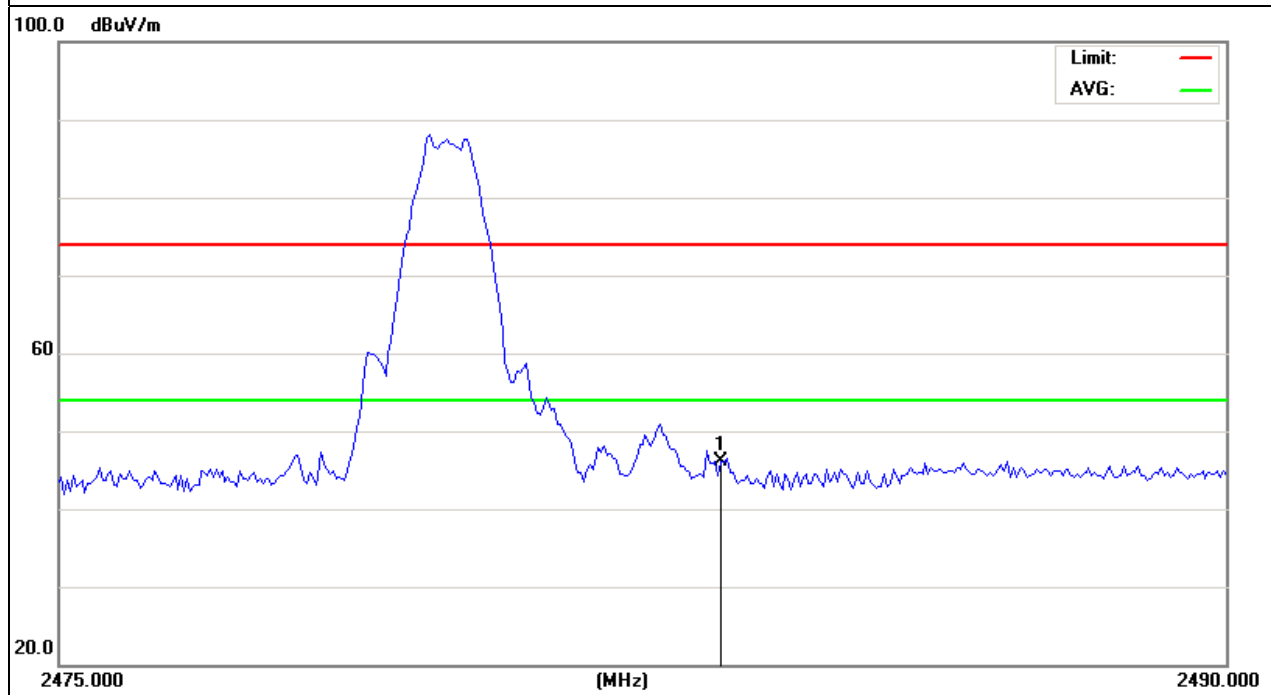


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	3.7V
Test Mode :	TX /2480MHz-3Mbps(hopping)	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	83.13	-40.43	42.7	74	-31.3	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

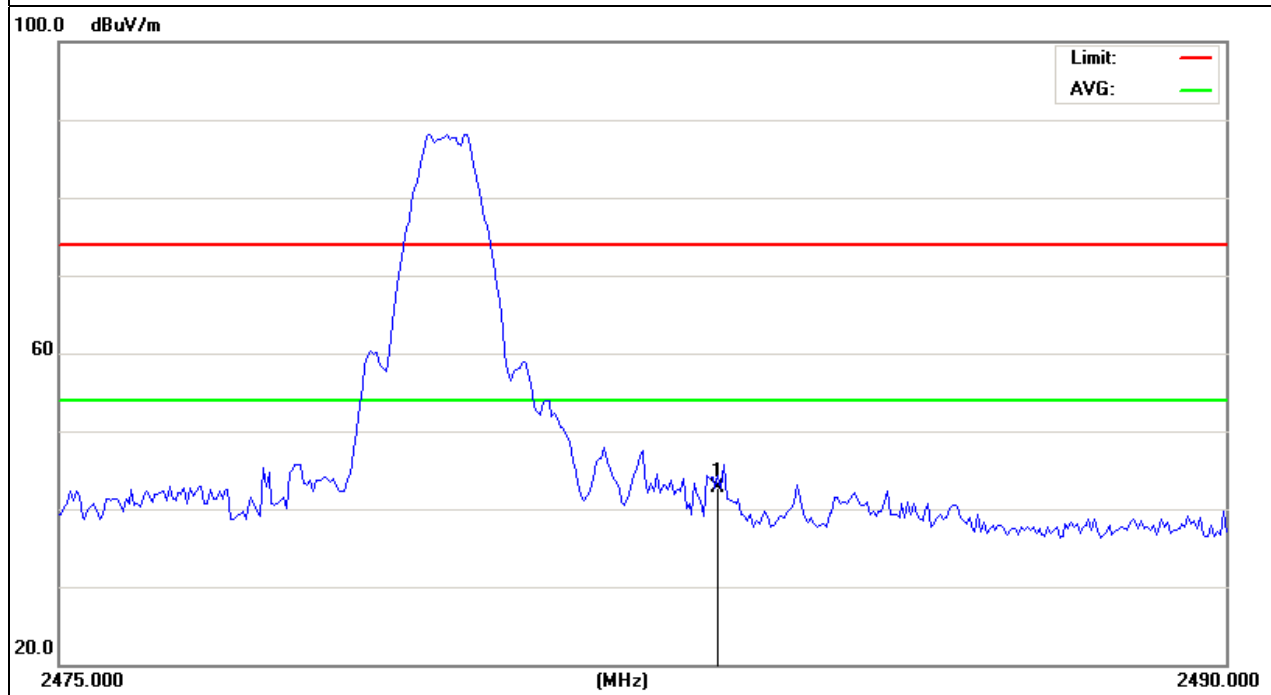

4. NUMBER OF HOPPING CHANNEL

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥ 15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	$RBW \geq 1\%$ of the span
VB	$VBW \geq RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : $RBW = 1\text{MHz}$, $VBW = 1\text{MHz}$, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

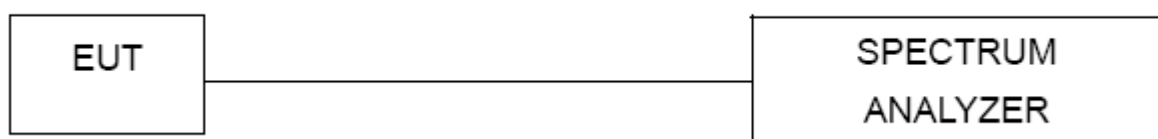


4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	3.7V
Test Mode :	Hopping Mode		

Number of Hopping Channel	79
---------------------------	----

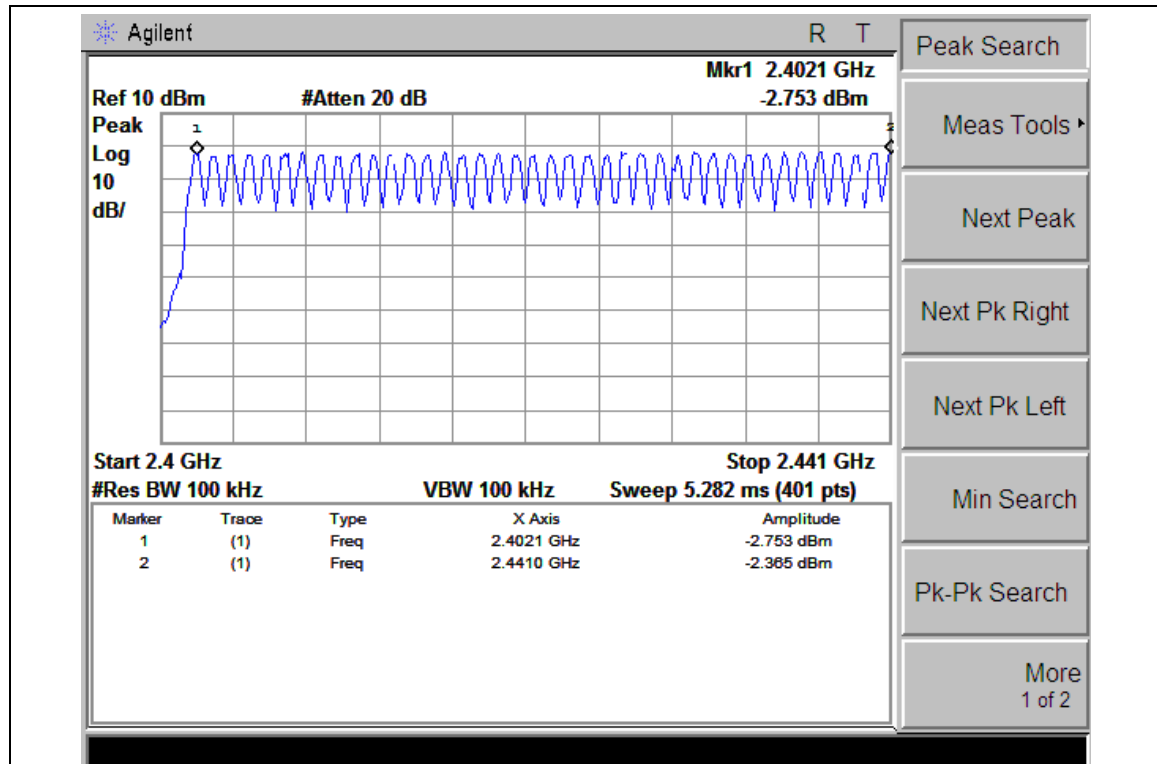

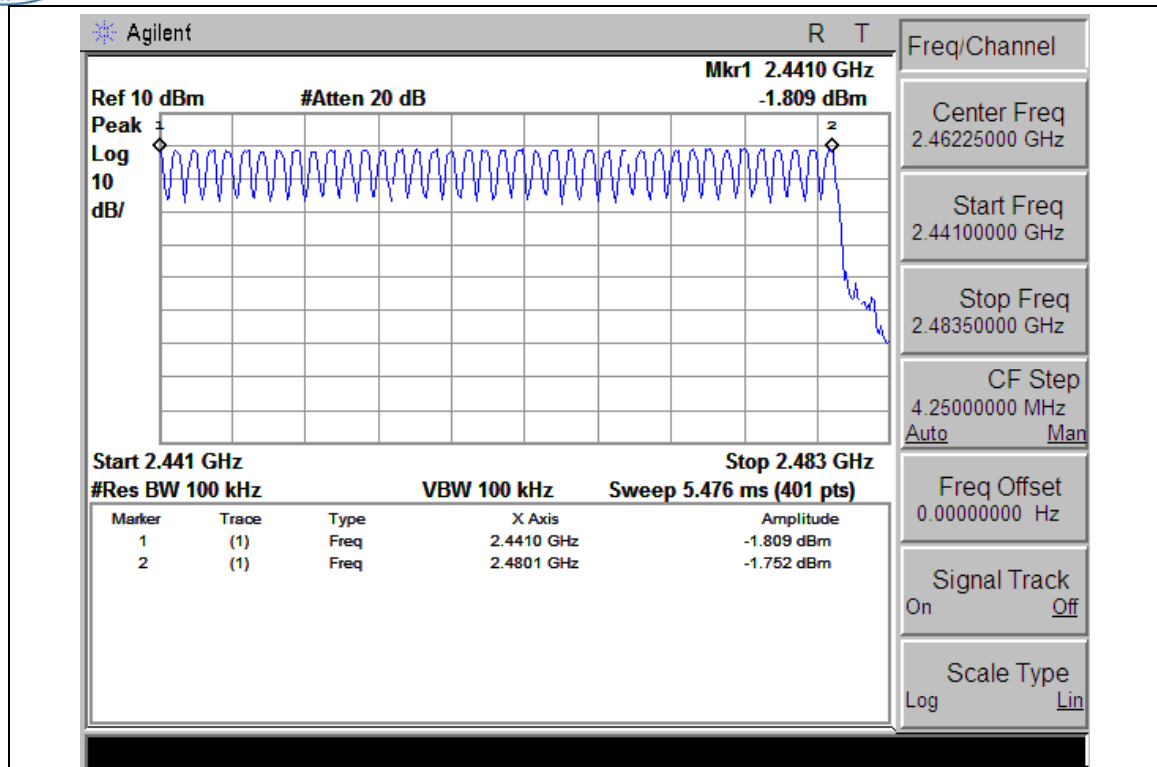

5. AVERAGE TIME OF OCCUPANCY

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- A Period Time = (channel number)*0.4
 DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)
 DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)
 DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP




5.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00-DH5 (1M/2M/3Mbps Mode)		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2441MHz	2.95	0.31	0.40
2DH5	2441MHz	2.99	0.32	0.40
3DH5	2441MHz	2.95	0.31	0.40

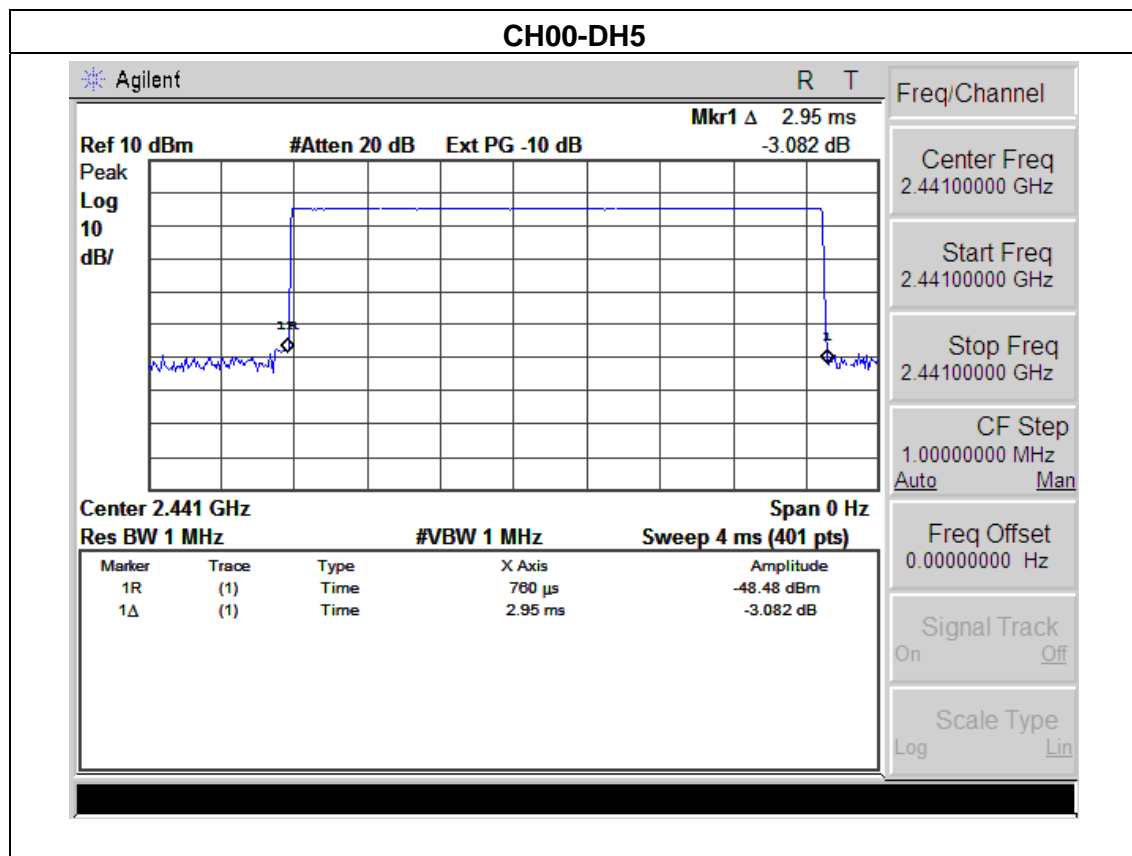

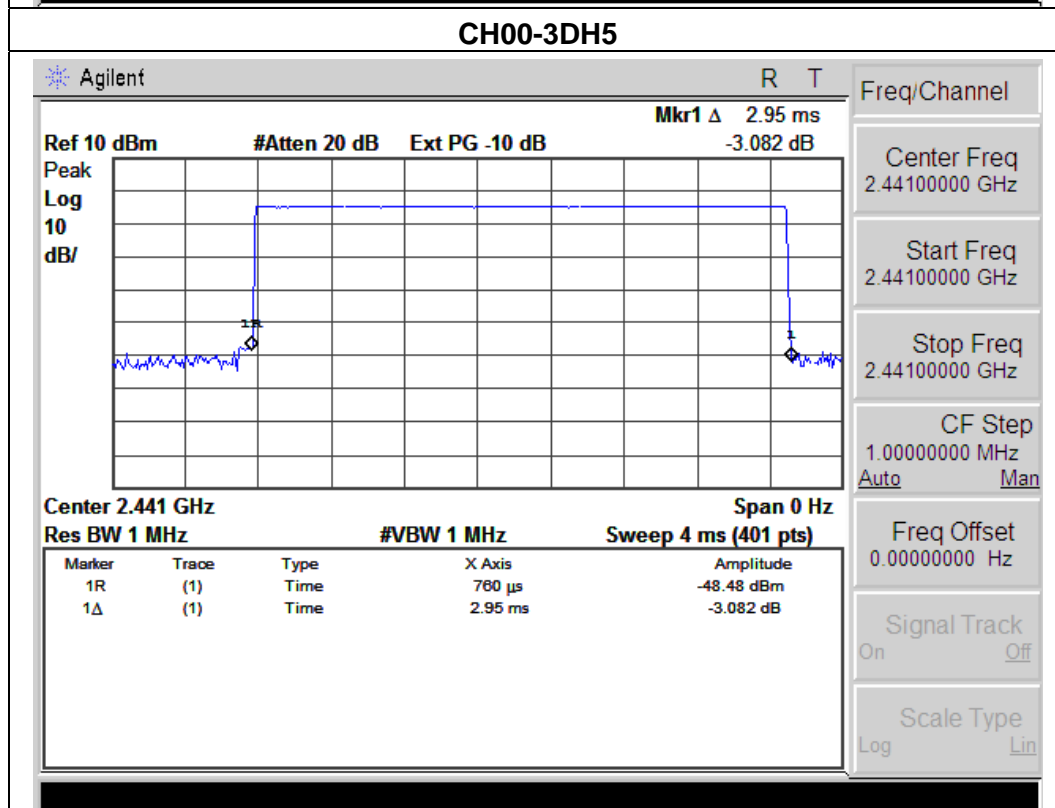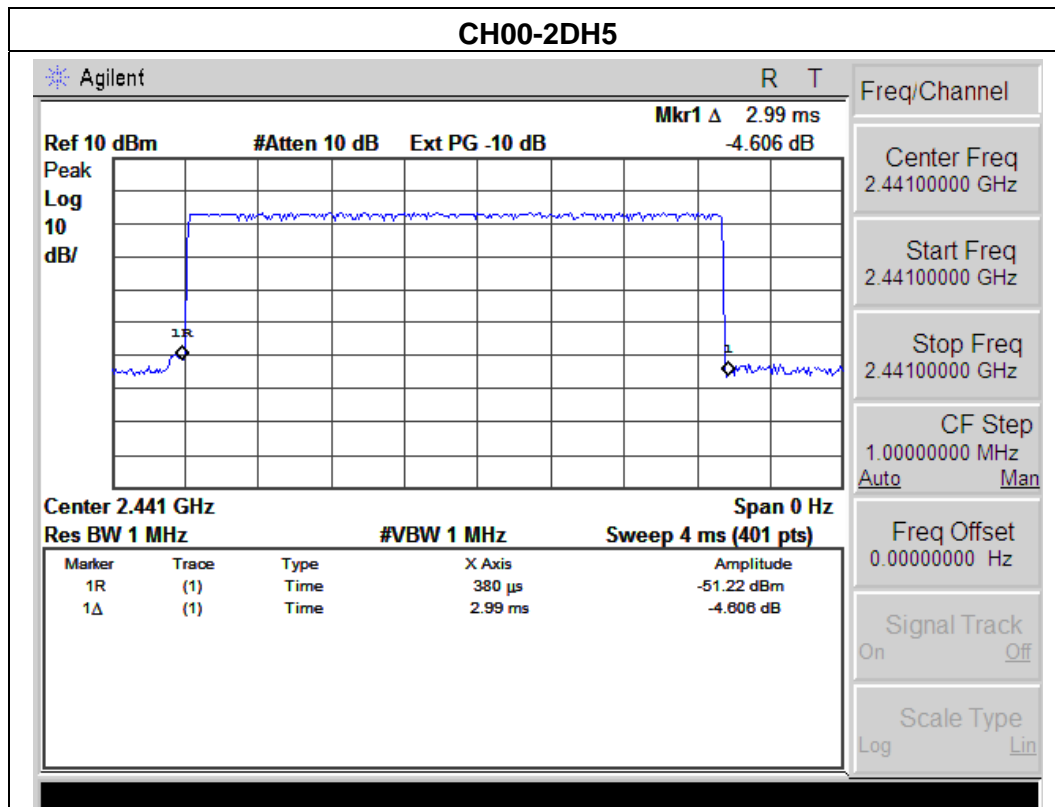

NOTE : The dwell time is showed the maximum data of all data(DH1,2DH1,3DH1, DH3,2DH3,3DH3, DH5,2DH5,3DH5), (DH5,2DH5,3DH5) of mode have the maximum dwell time.

6. HOPPING CHANNEL SEPARATION MEASUREMENT

6.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	wide enough to capture the peaks of two adjacent channels
RB	$\geq 1\%$ of the span
VB	\geq RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


6.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

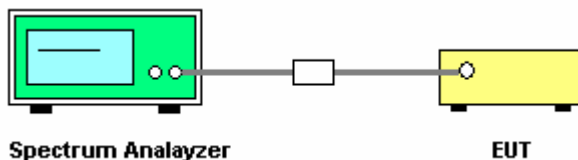

6.1.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.


6.1.5 TEST RESULTS

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00 / CH39 /CH78 (1Mbps Mode)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	0.990	Complies
2441 MHz	1.005	Complies
2480 MHz	1.005	Complies

Ch. Separation Limits: >20dB bandwidth

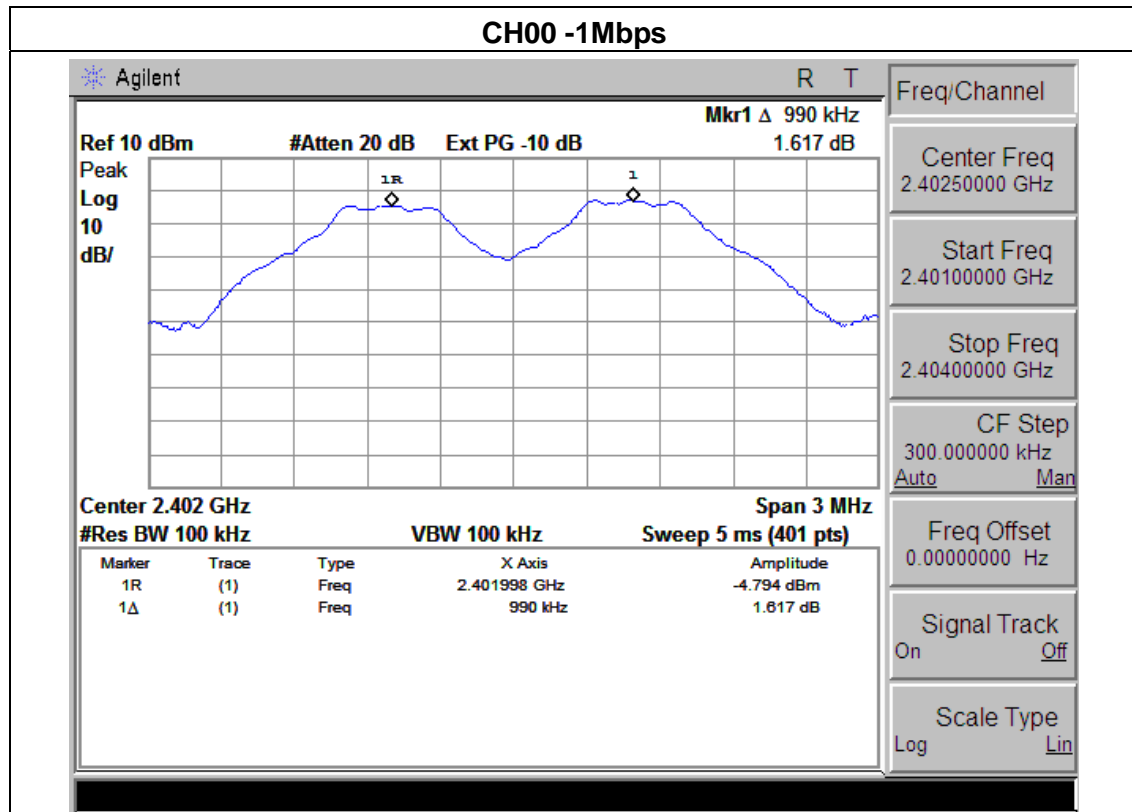



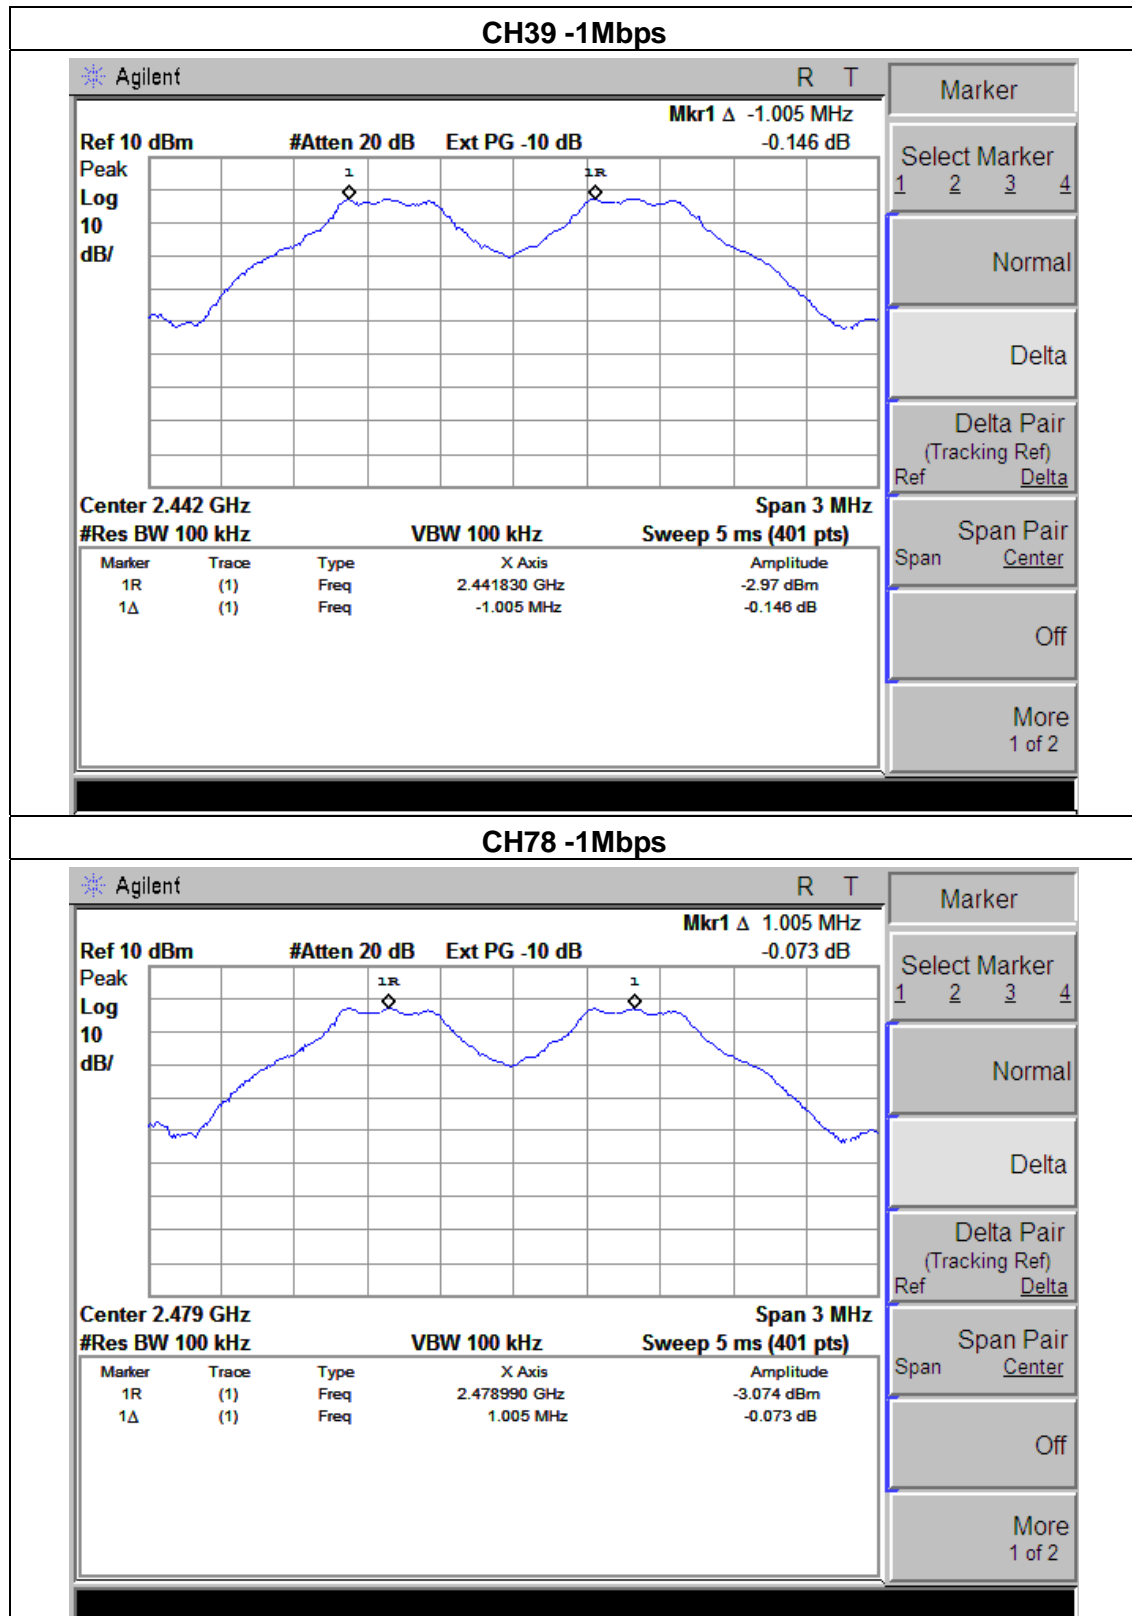


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00 / CH39 /CH78 (2Mbps Mode)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.030	Complies
2441 MHz	1.010	Complies
2480 MHz	1.000	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

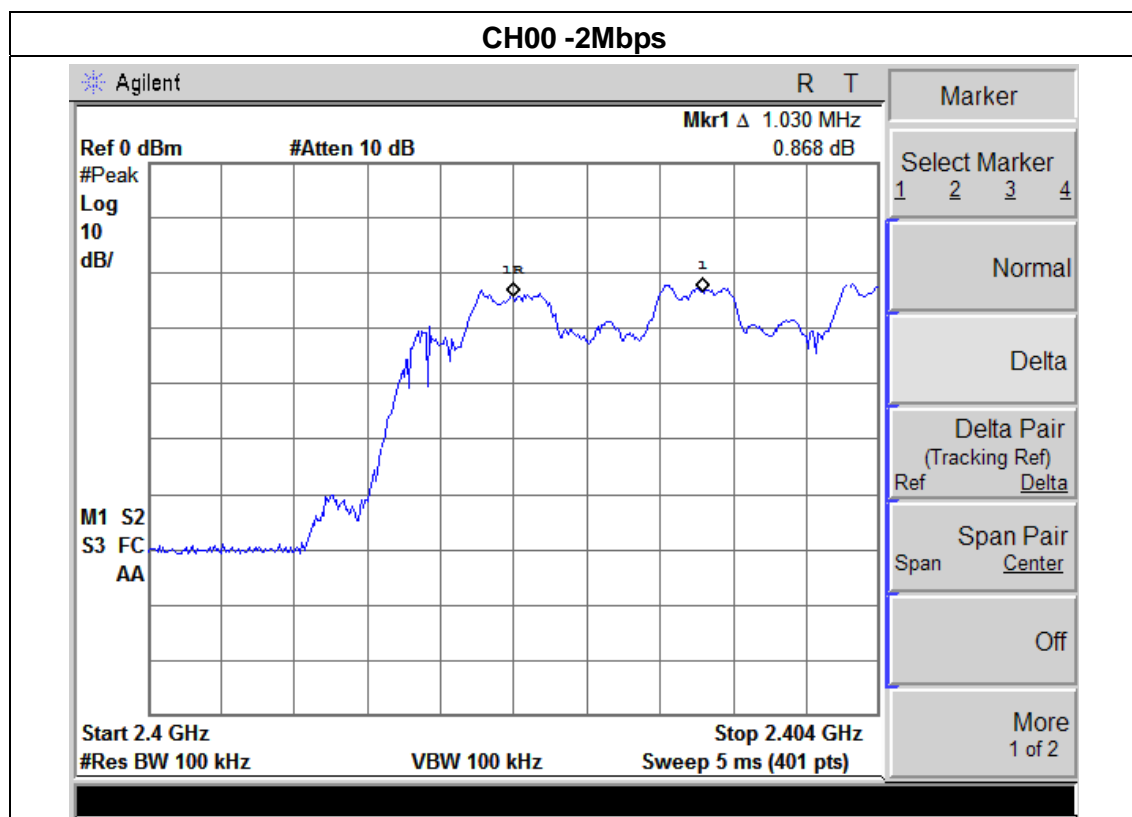


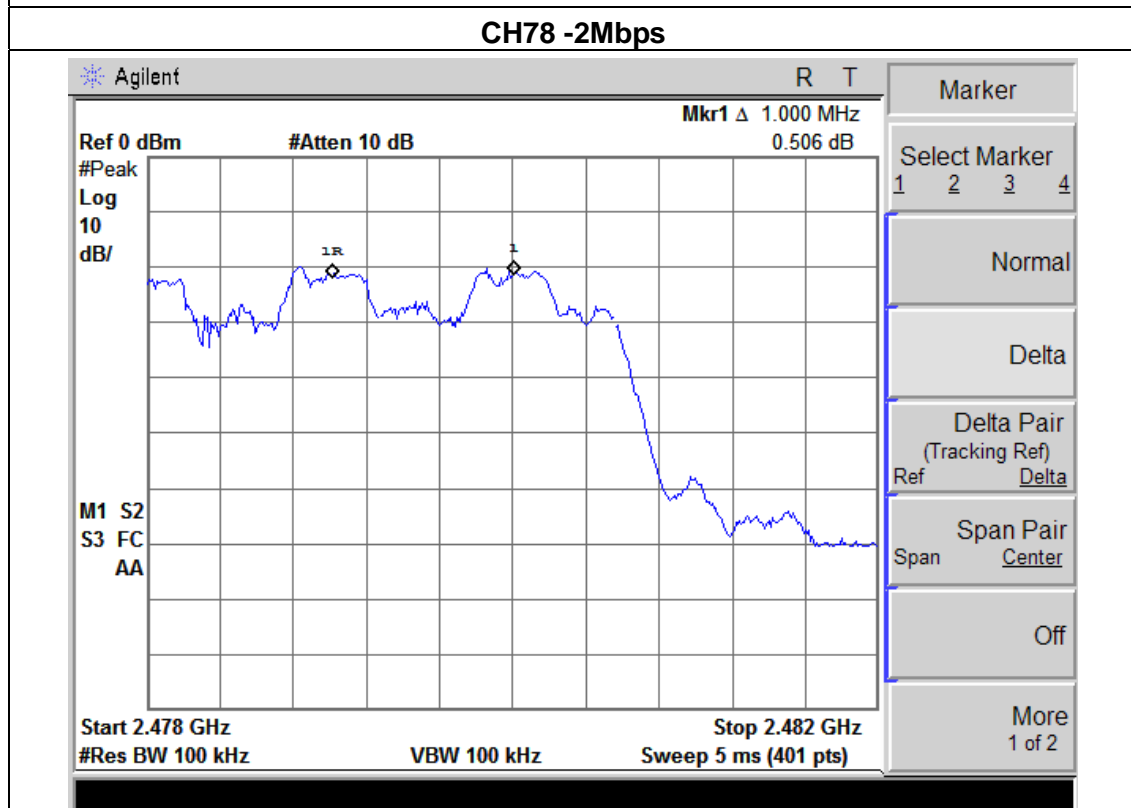
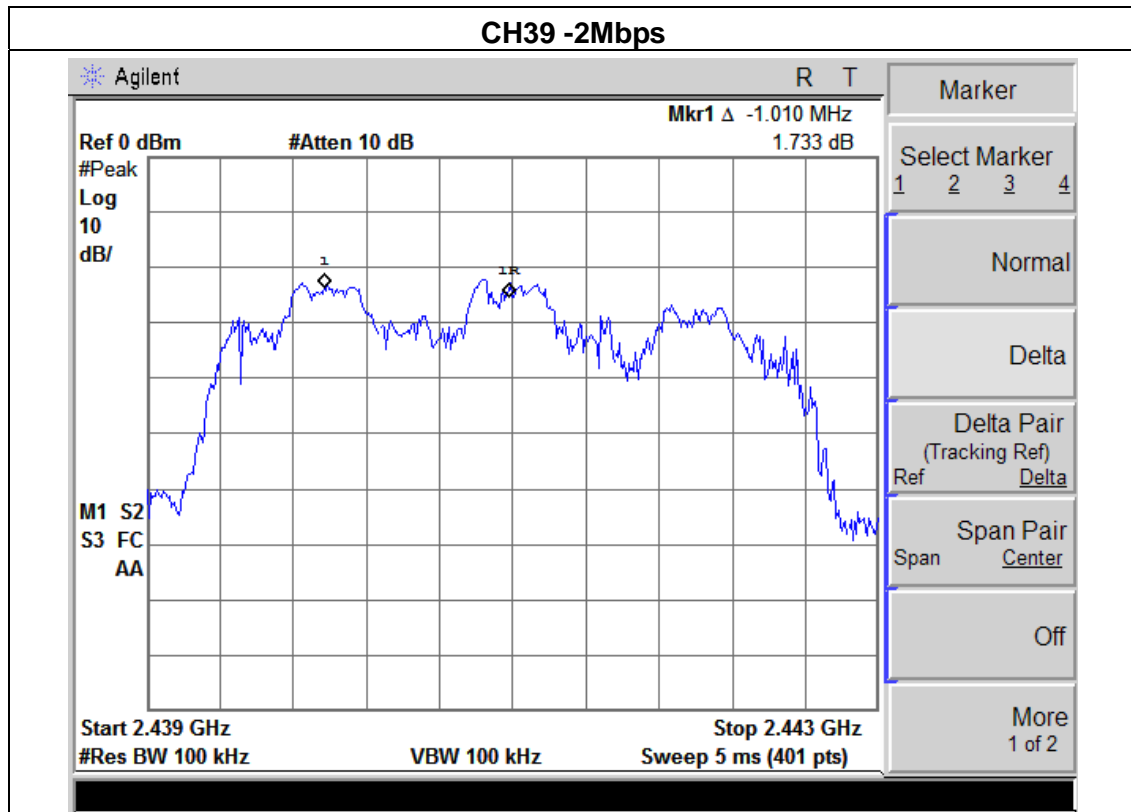


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00 / CH39 /CH78 (3Mbps Mode)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.030	Complies
2441 MHz	1.030	Complies
2480 MHz	1.000	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

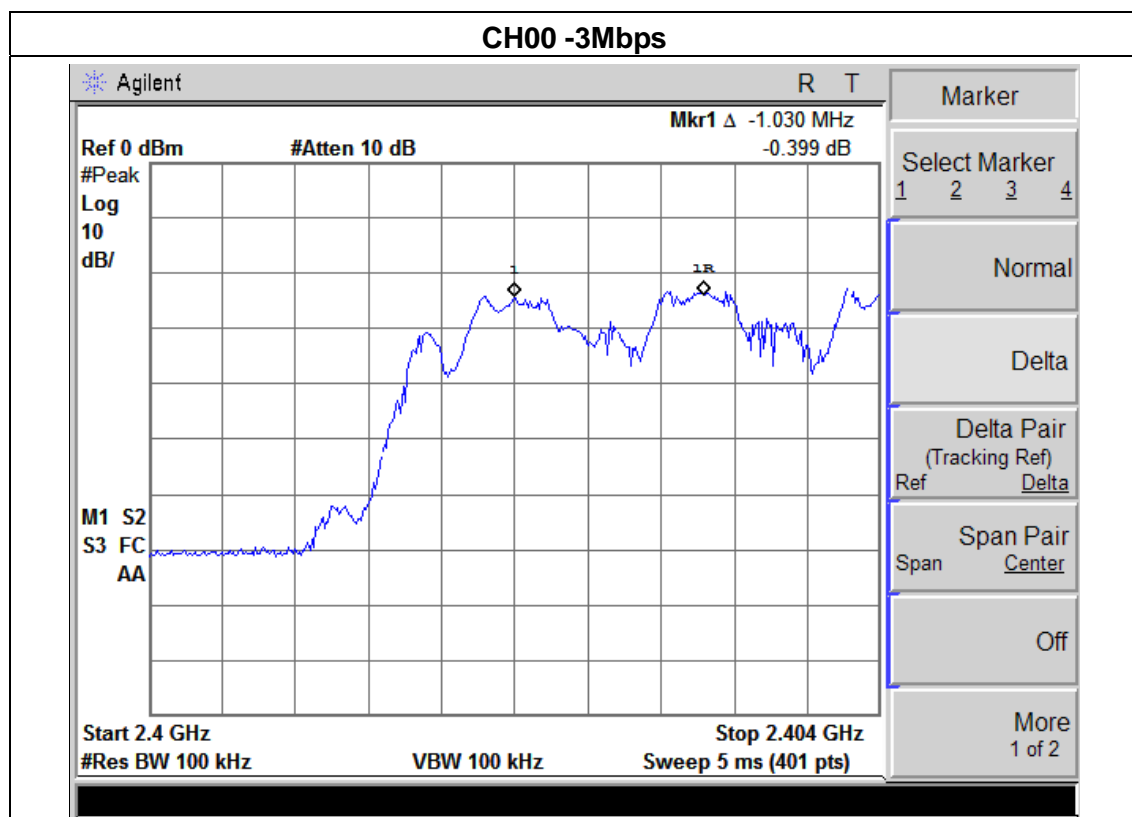

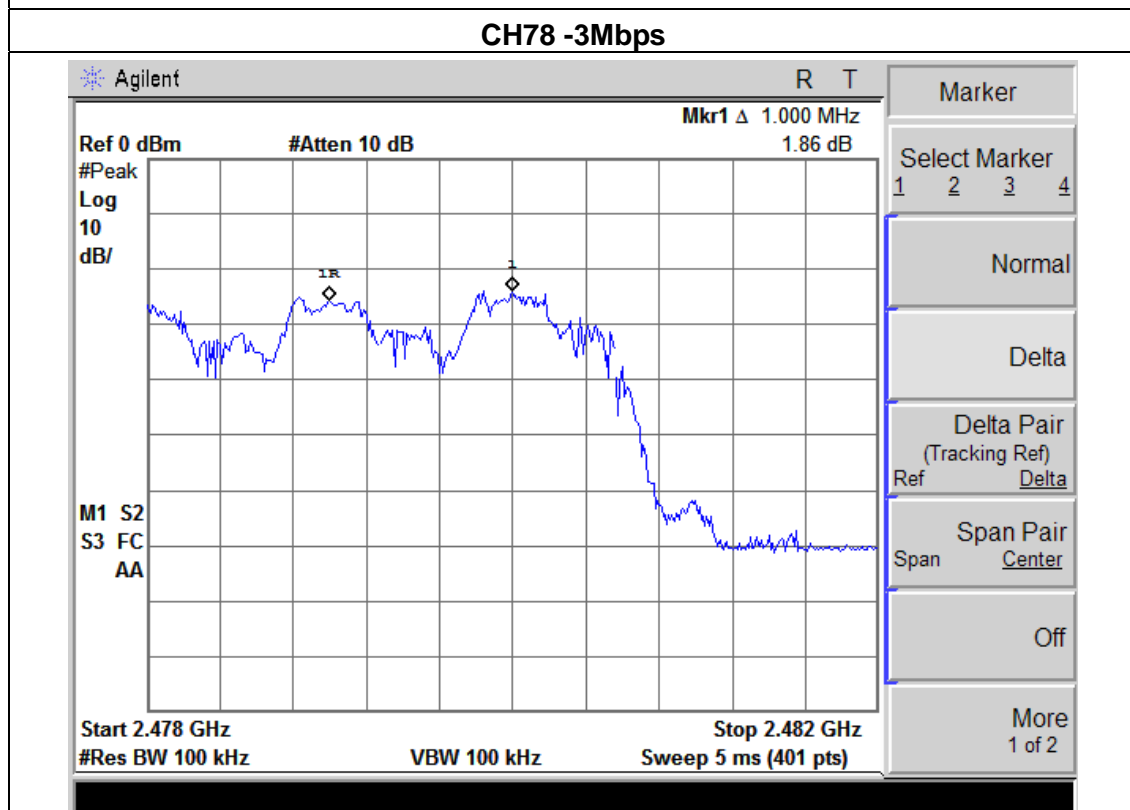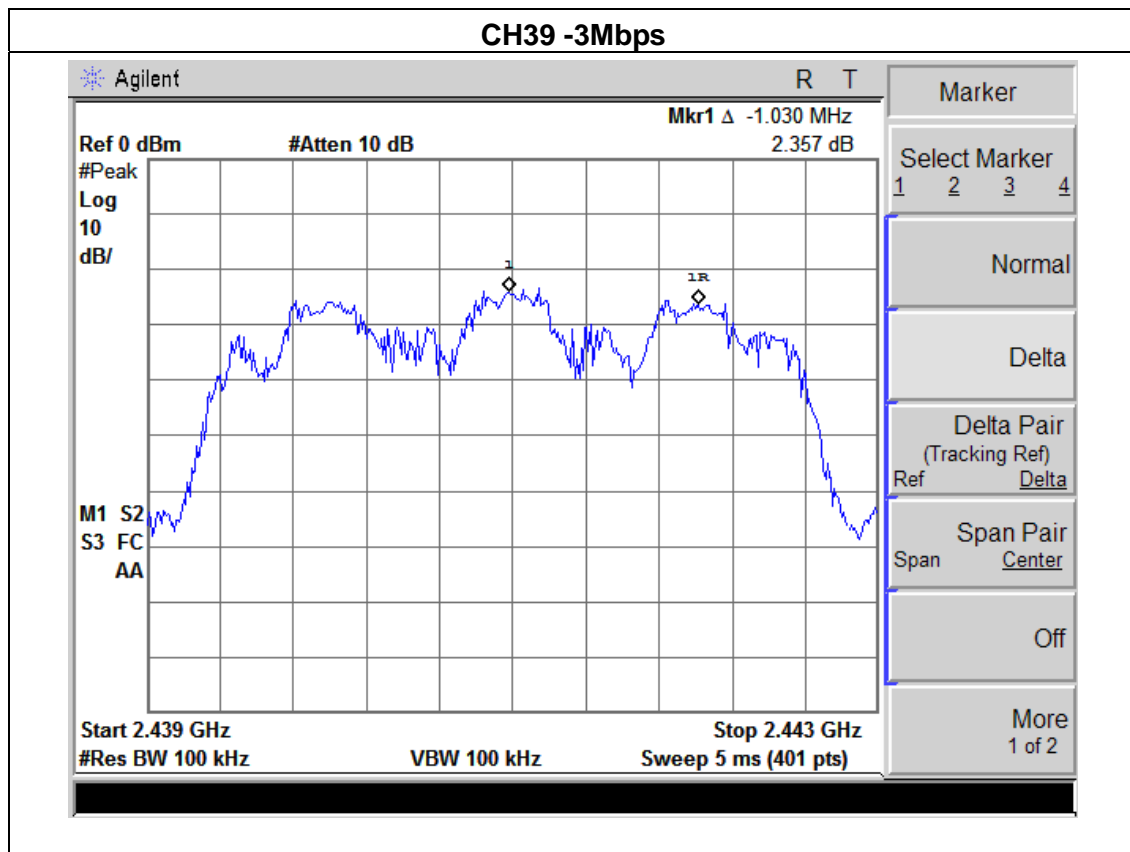

7. BANDWIDTH TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

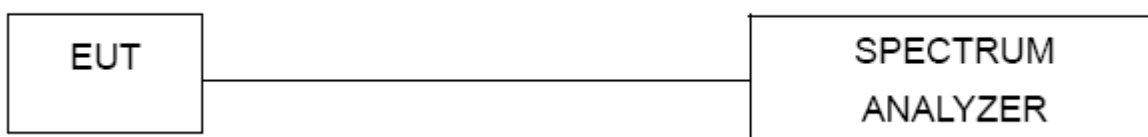


7.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 TEST RESULTS

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00 / CH39 /C78(1Mbps)		


Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Low Channel	2402	812.829	822.724	PASS
Mid Channel	2441	765.782	821.607	PASS
High Channel	2480	739.411	780.879	PASS

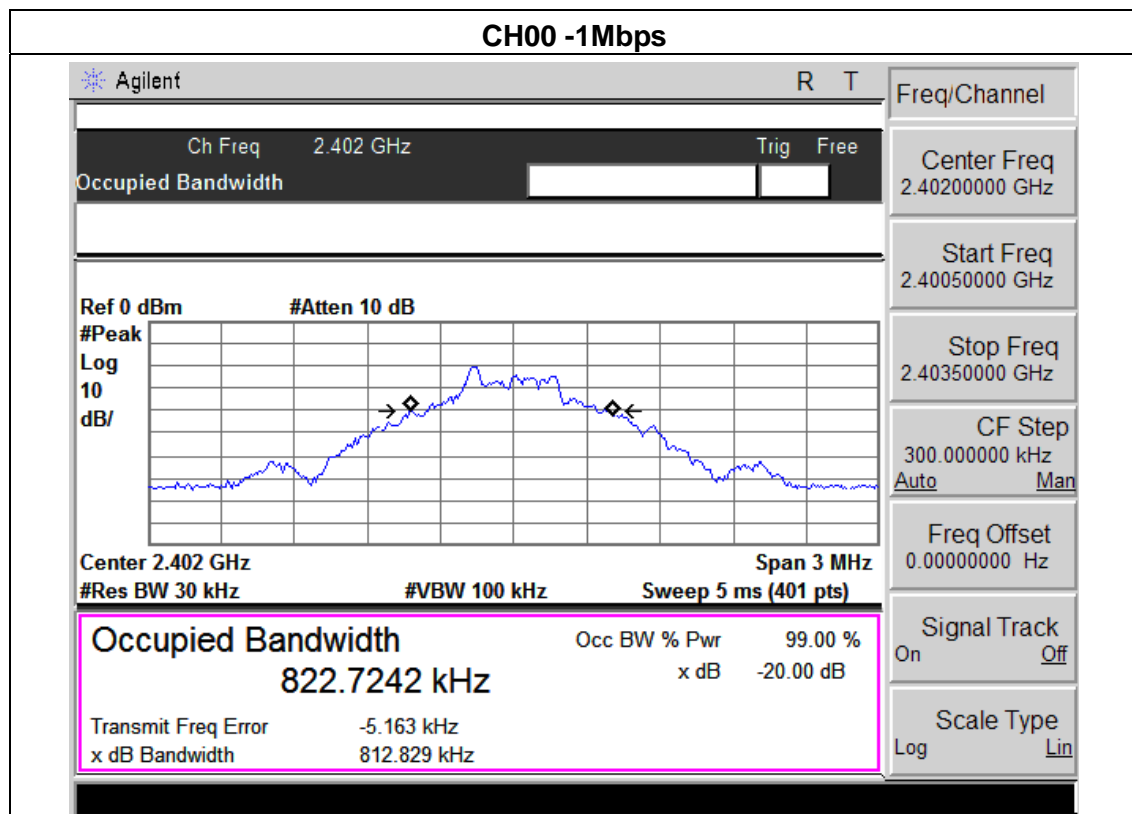


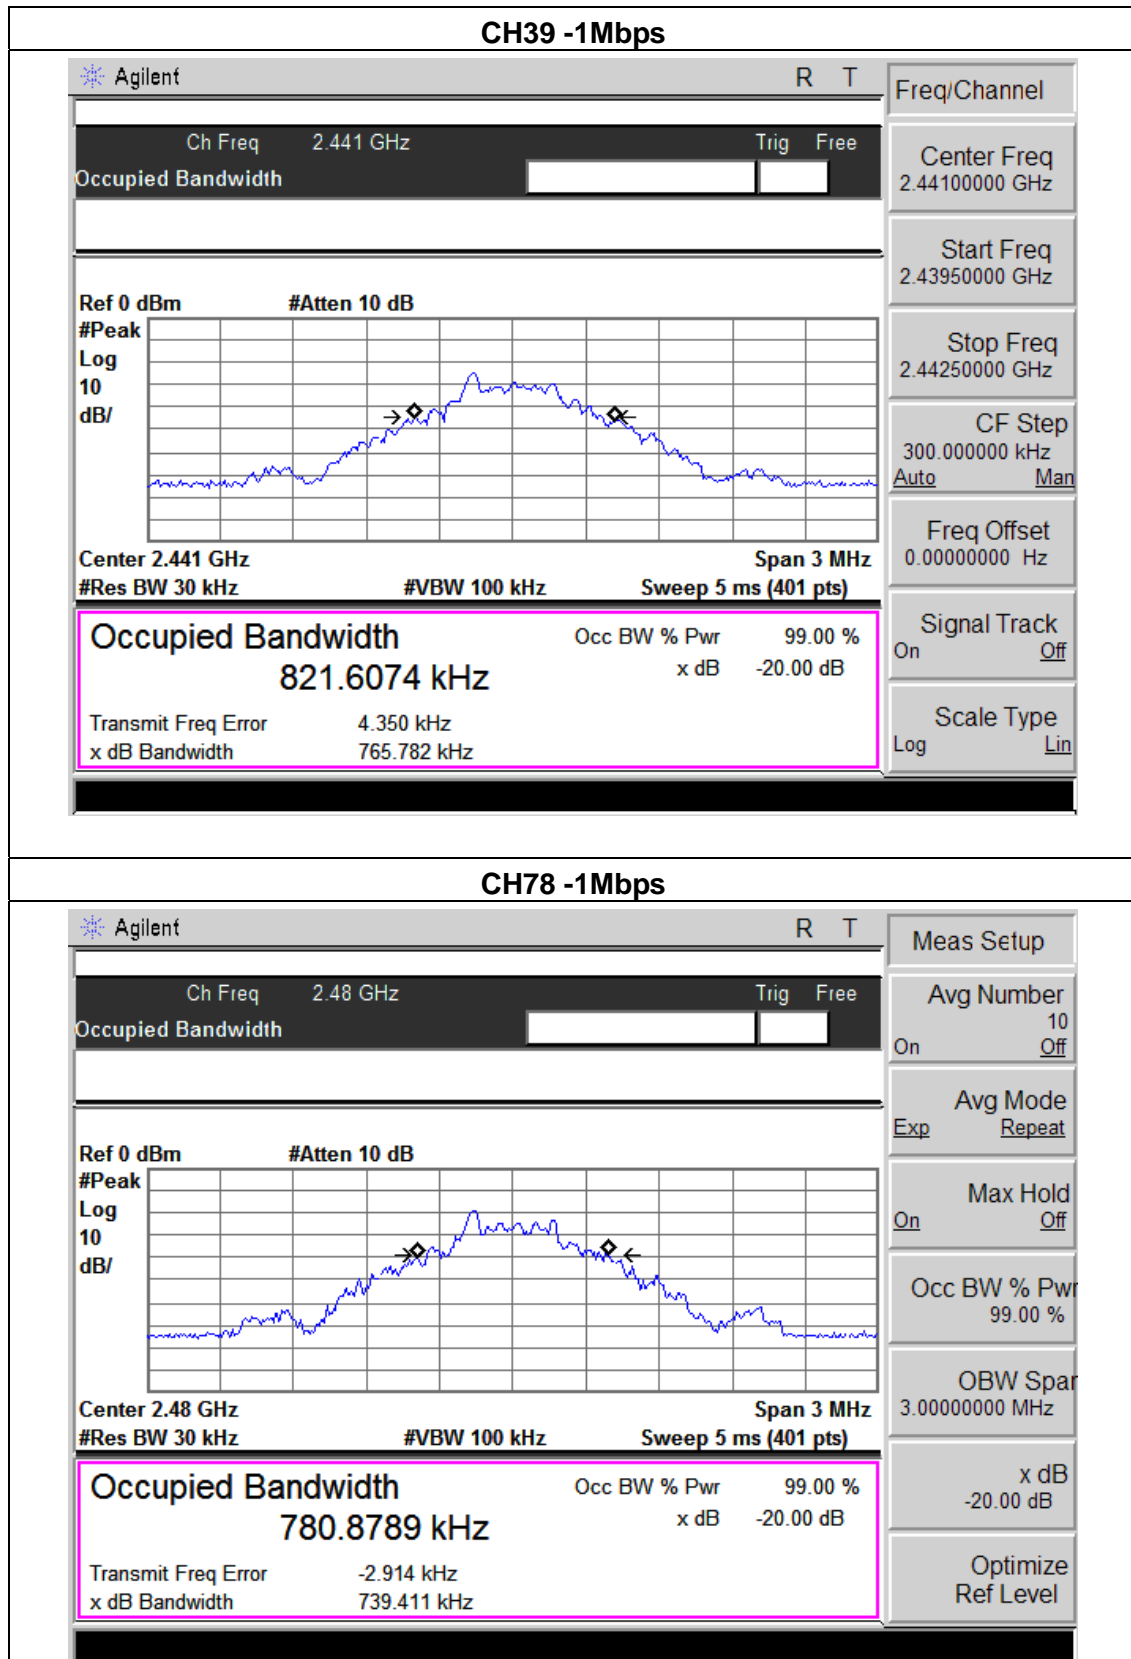

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00 / CH39 /C78(2Mbps)		


Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Low Channel	2402	1.255	1.163	PASS
Mid Channel	2441	1.113	1.063	PASS
High Channel	2480	1.106	1.053	PASS


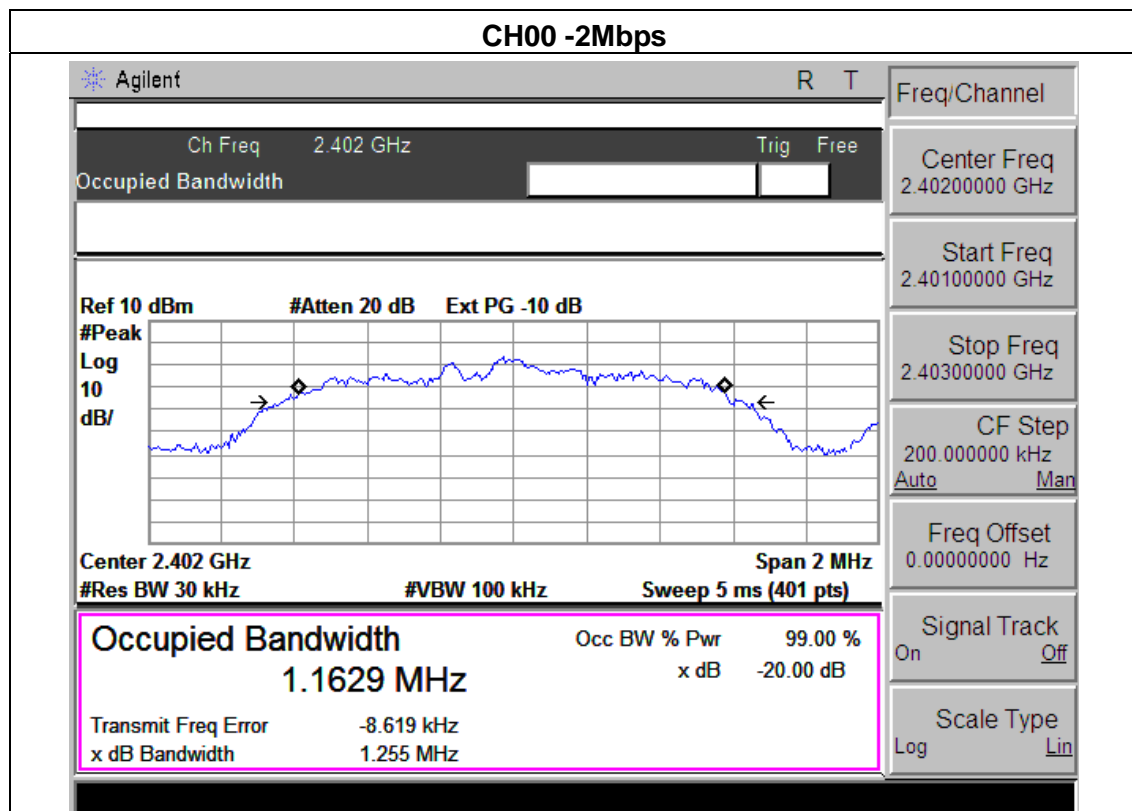


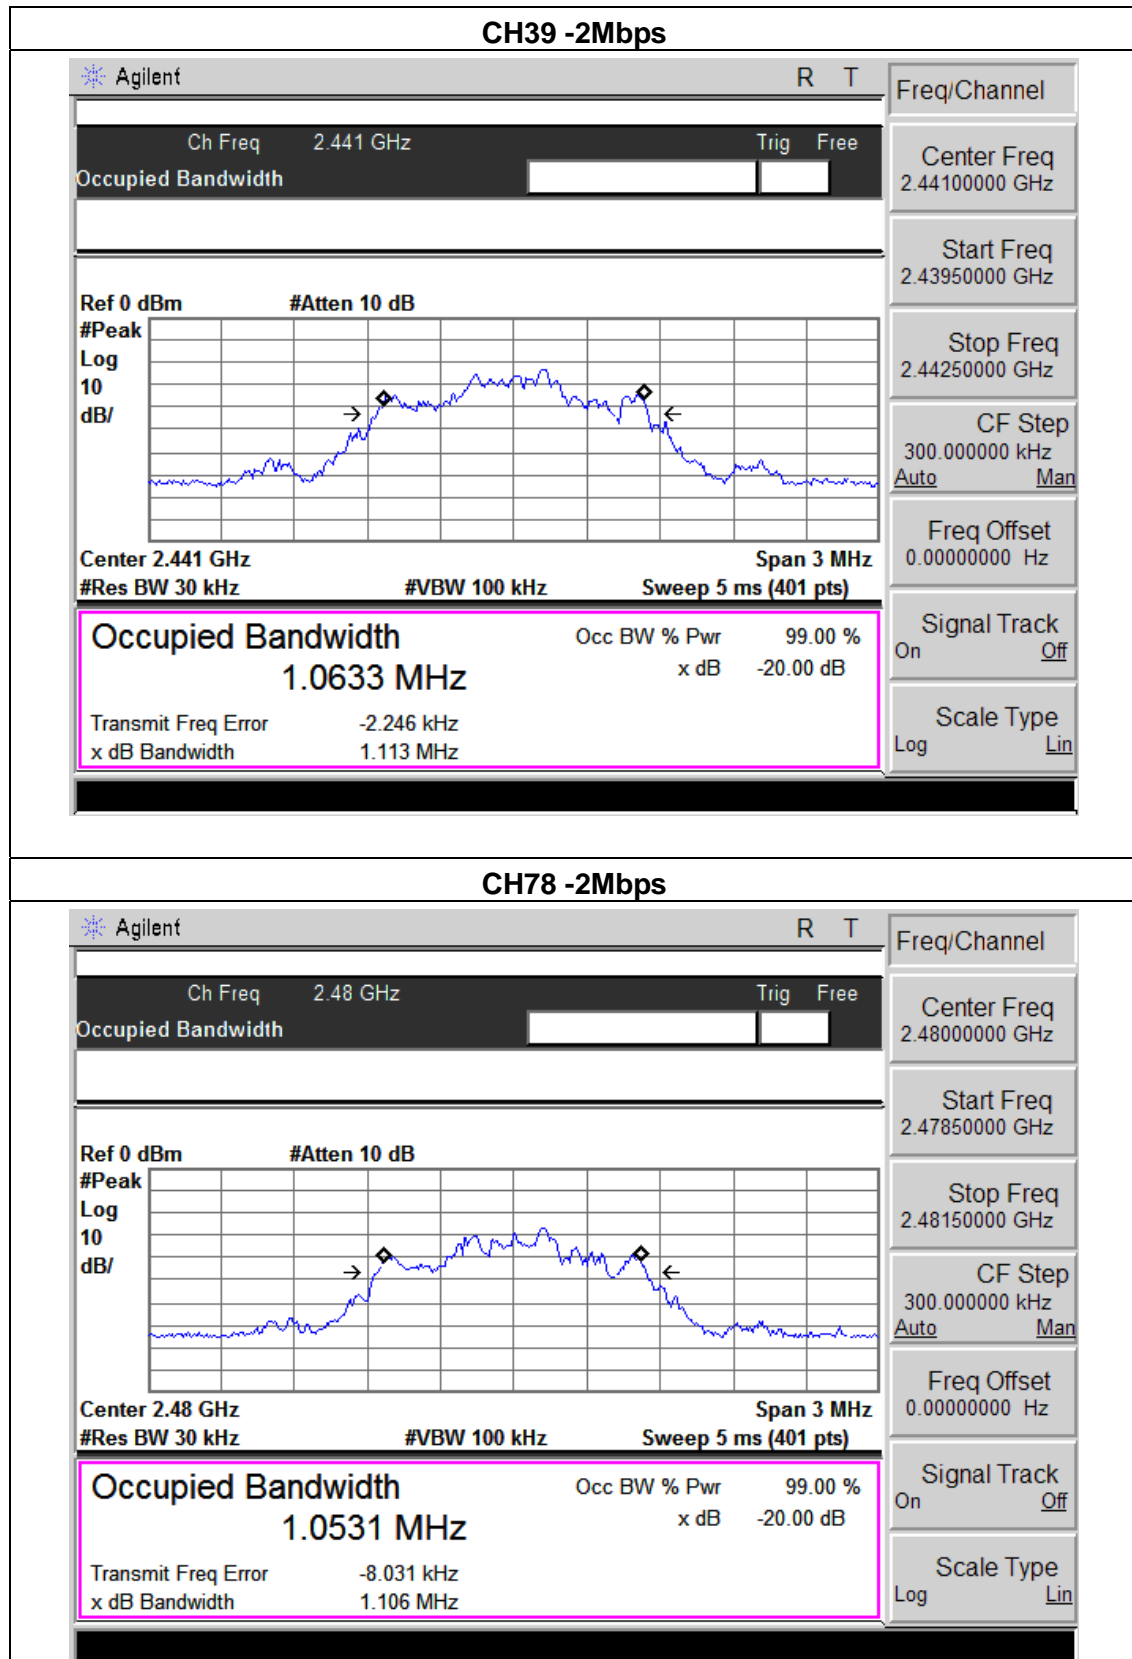

EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00 / CH39 /C78(3Mbps)		

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Low Channel	2402	1.113	1.059	PASS
Mid Channel	2441	1.115	1.040	PASS
High Channel	2480	1.129	1.058	PASS

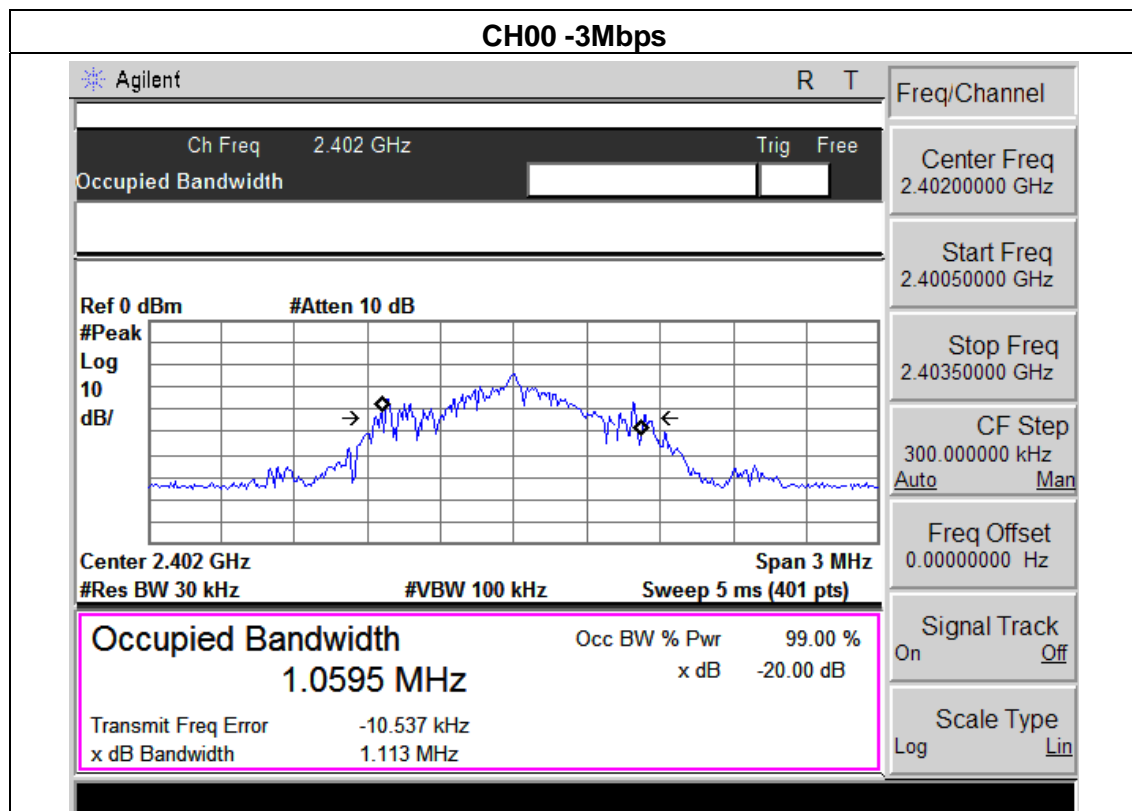

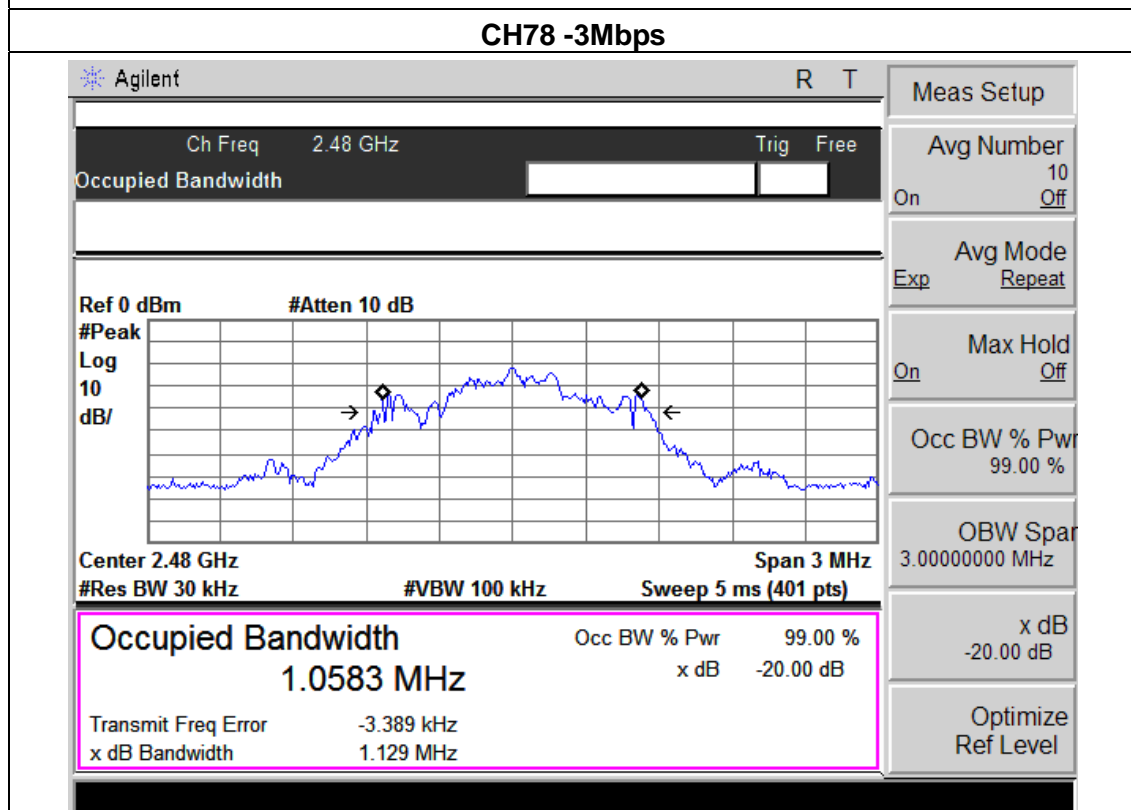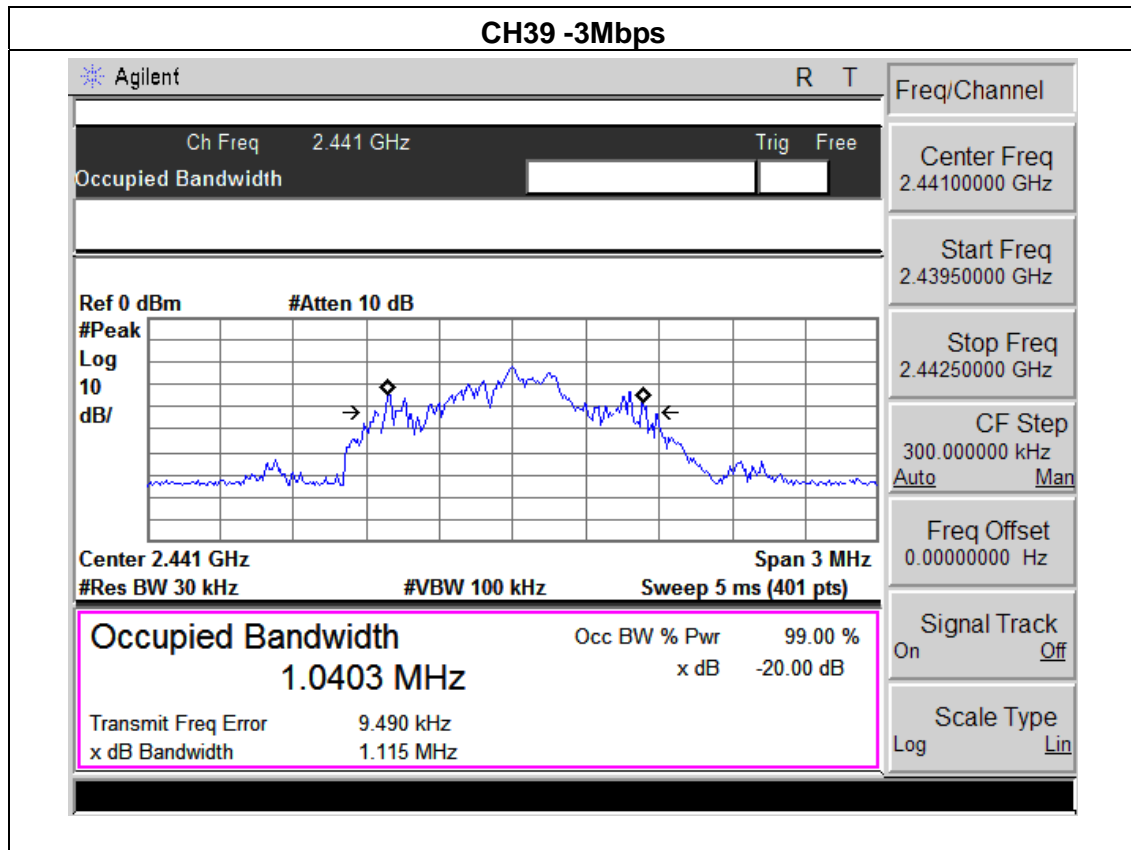

8. PEAK OUTPUT POWER TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	30dBm or 20.96dBm	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 VBW \geq RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP




8.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


8.1.5 TEST RESULTS


EUT :	The Phoenix 2 Portable Bluetooth Stereo Device	Model Name :	BCN_ph2-rp/grphr
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	3.7V
Test Mode :	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)		


Channel	Frequency (MHz)	Output Power (mW)	Limit (mW)
BDR mode (GFSK)			
Low	2402	0.94(-0.248dBm)	1000
Middle	2441	0.96(-0.186 dBm)	1000
High	2480	0.94(-0.250 dBm)	1000
EDR Mode ($\pi/4$ -DQPSK)			
Low	2402	0.82(-0.855 dBm)	1000
Middle	2441	0.80(-0.956 dBm)	1000
High	2480	0.87(-0.601 dBm)	1000
EDR Mode (8 DPSK)			
Low	2402	0.90(-0.458 dBm)	1000
Middle	2441	0.88(-0.578 dBm)	1000
High	2480	0.87(-0.588 dBm)	1000

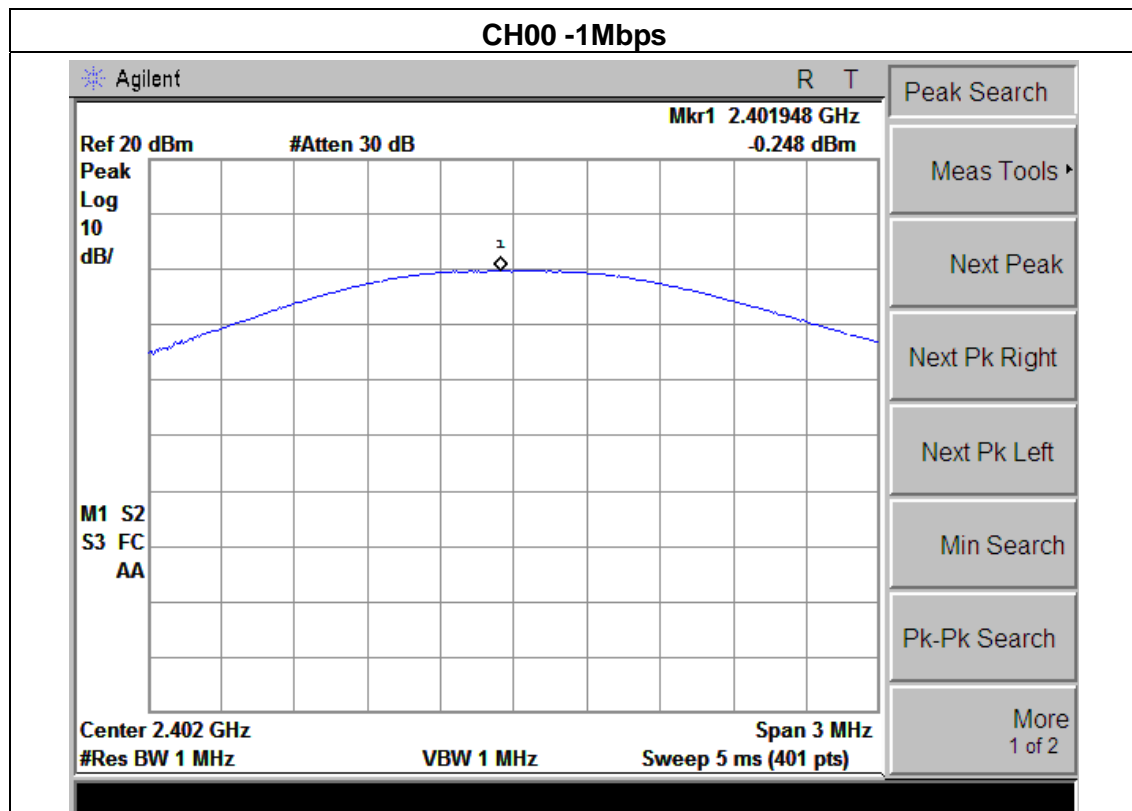


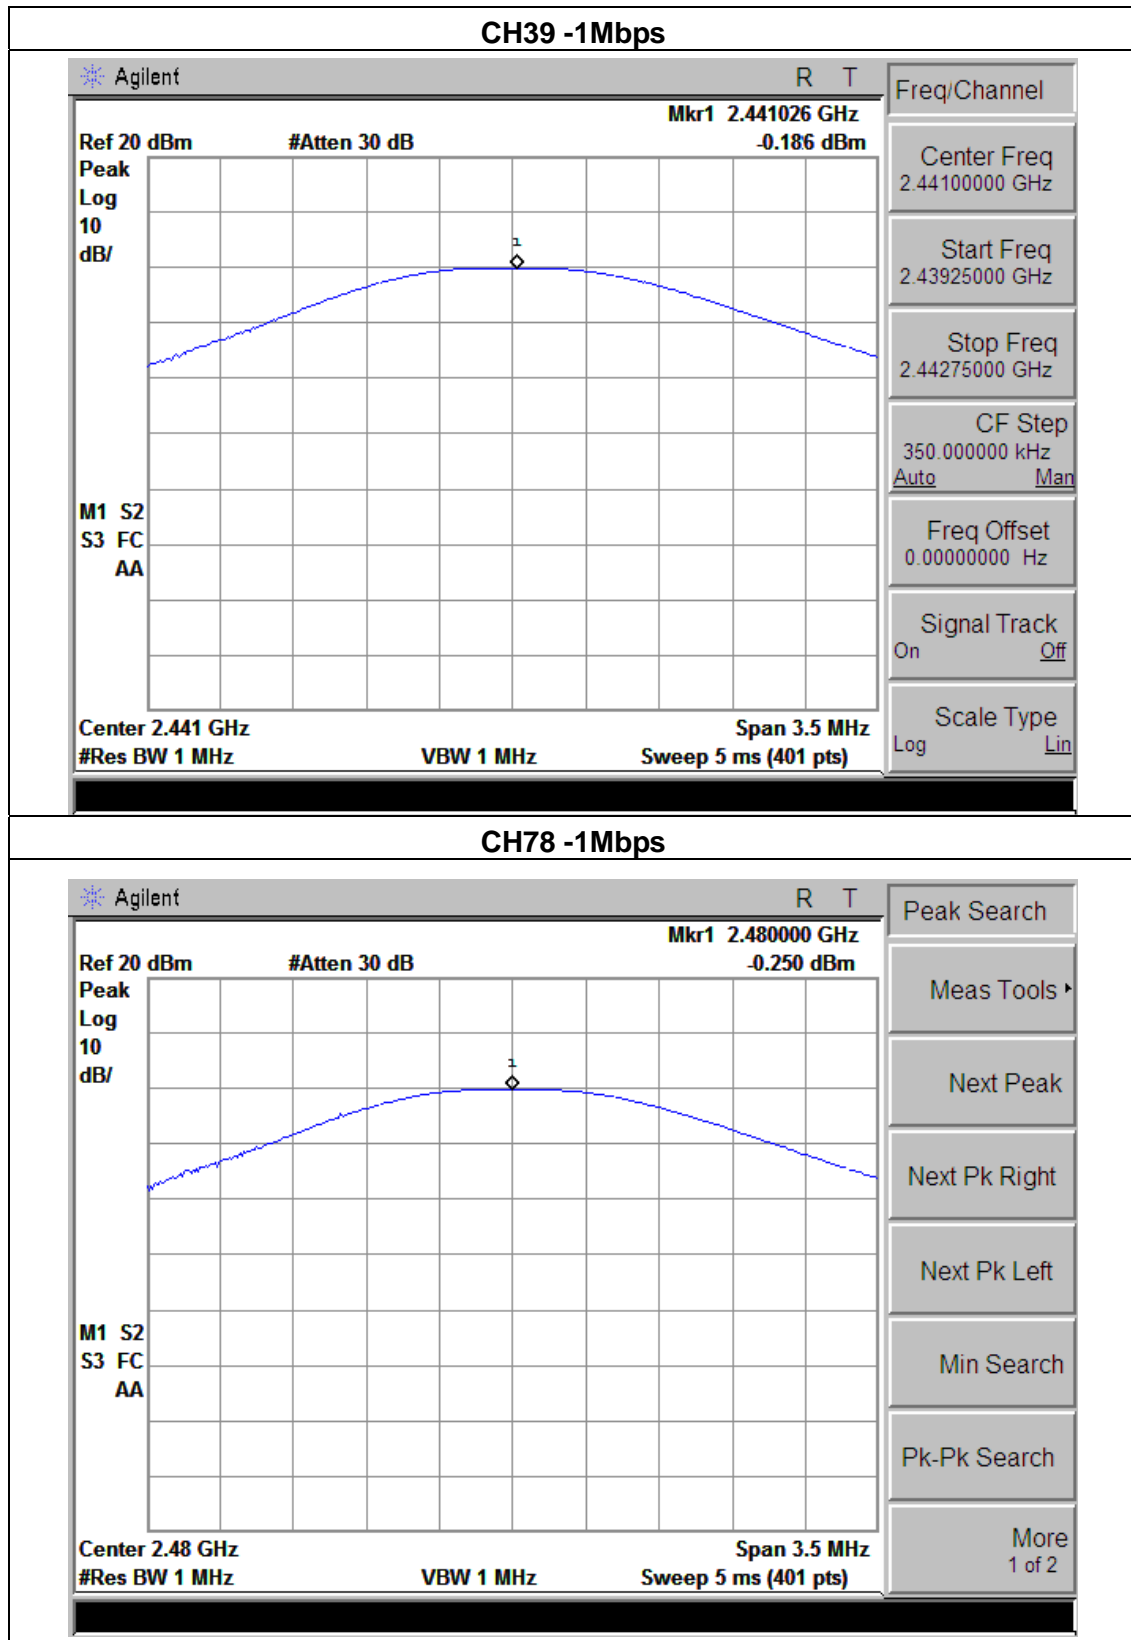

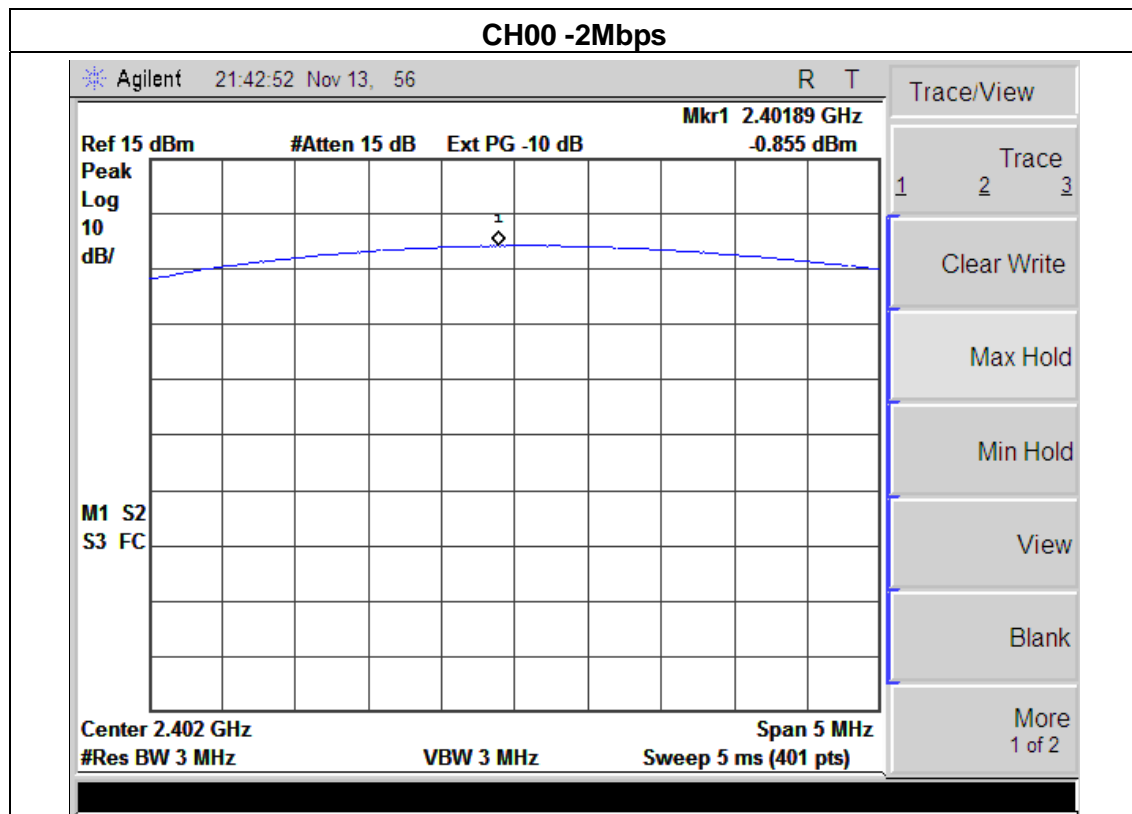

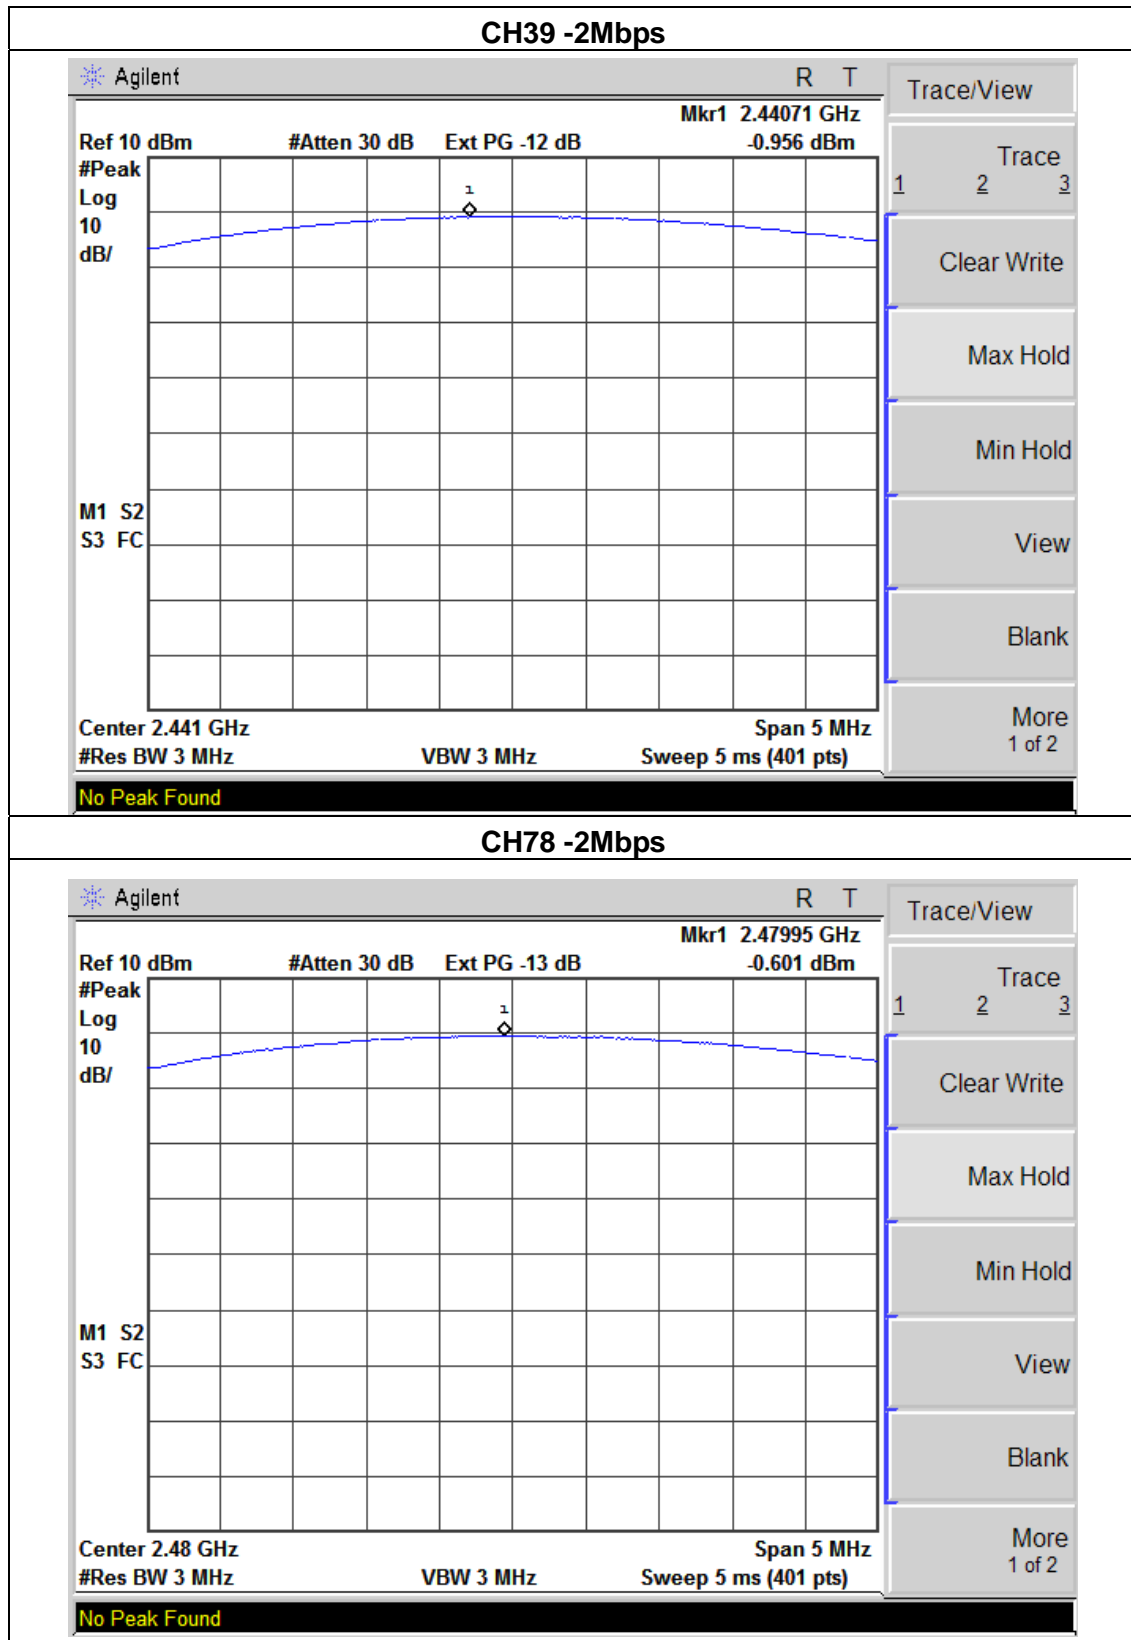

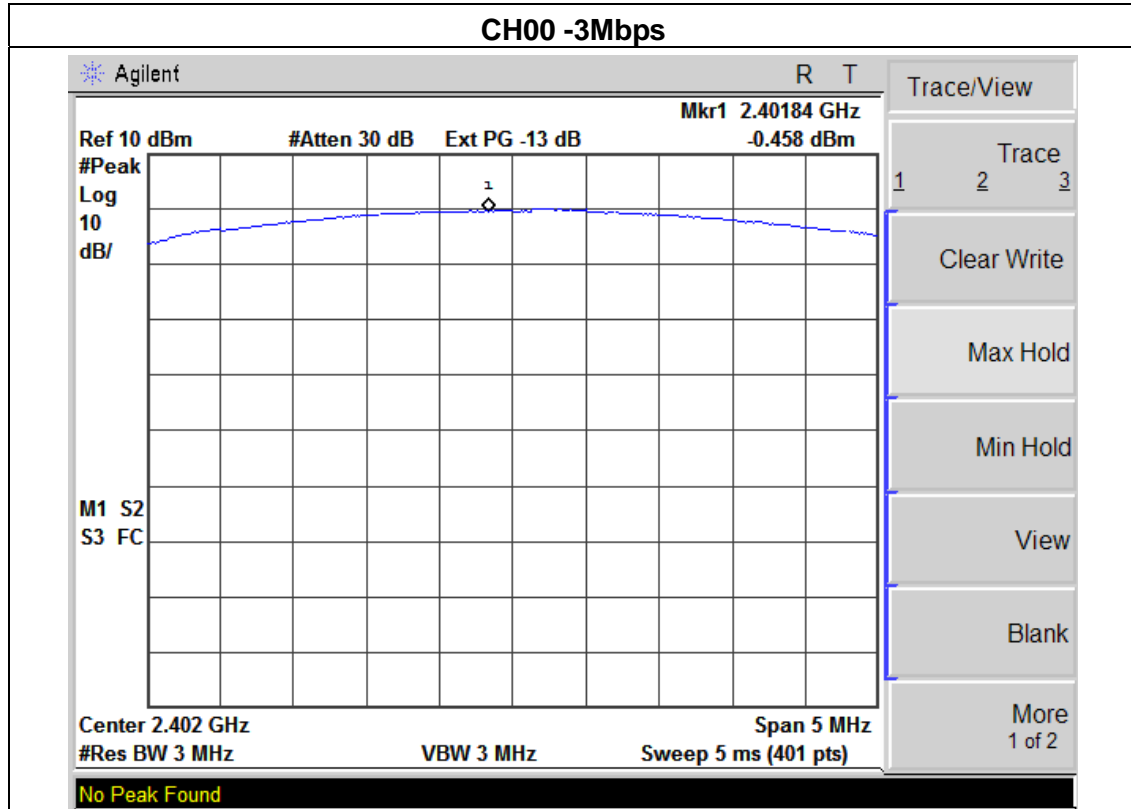

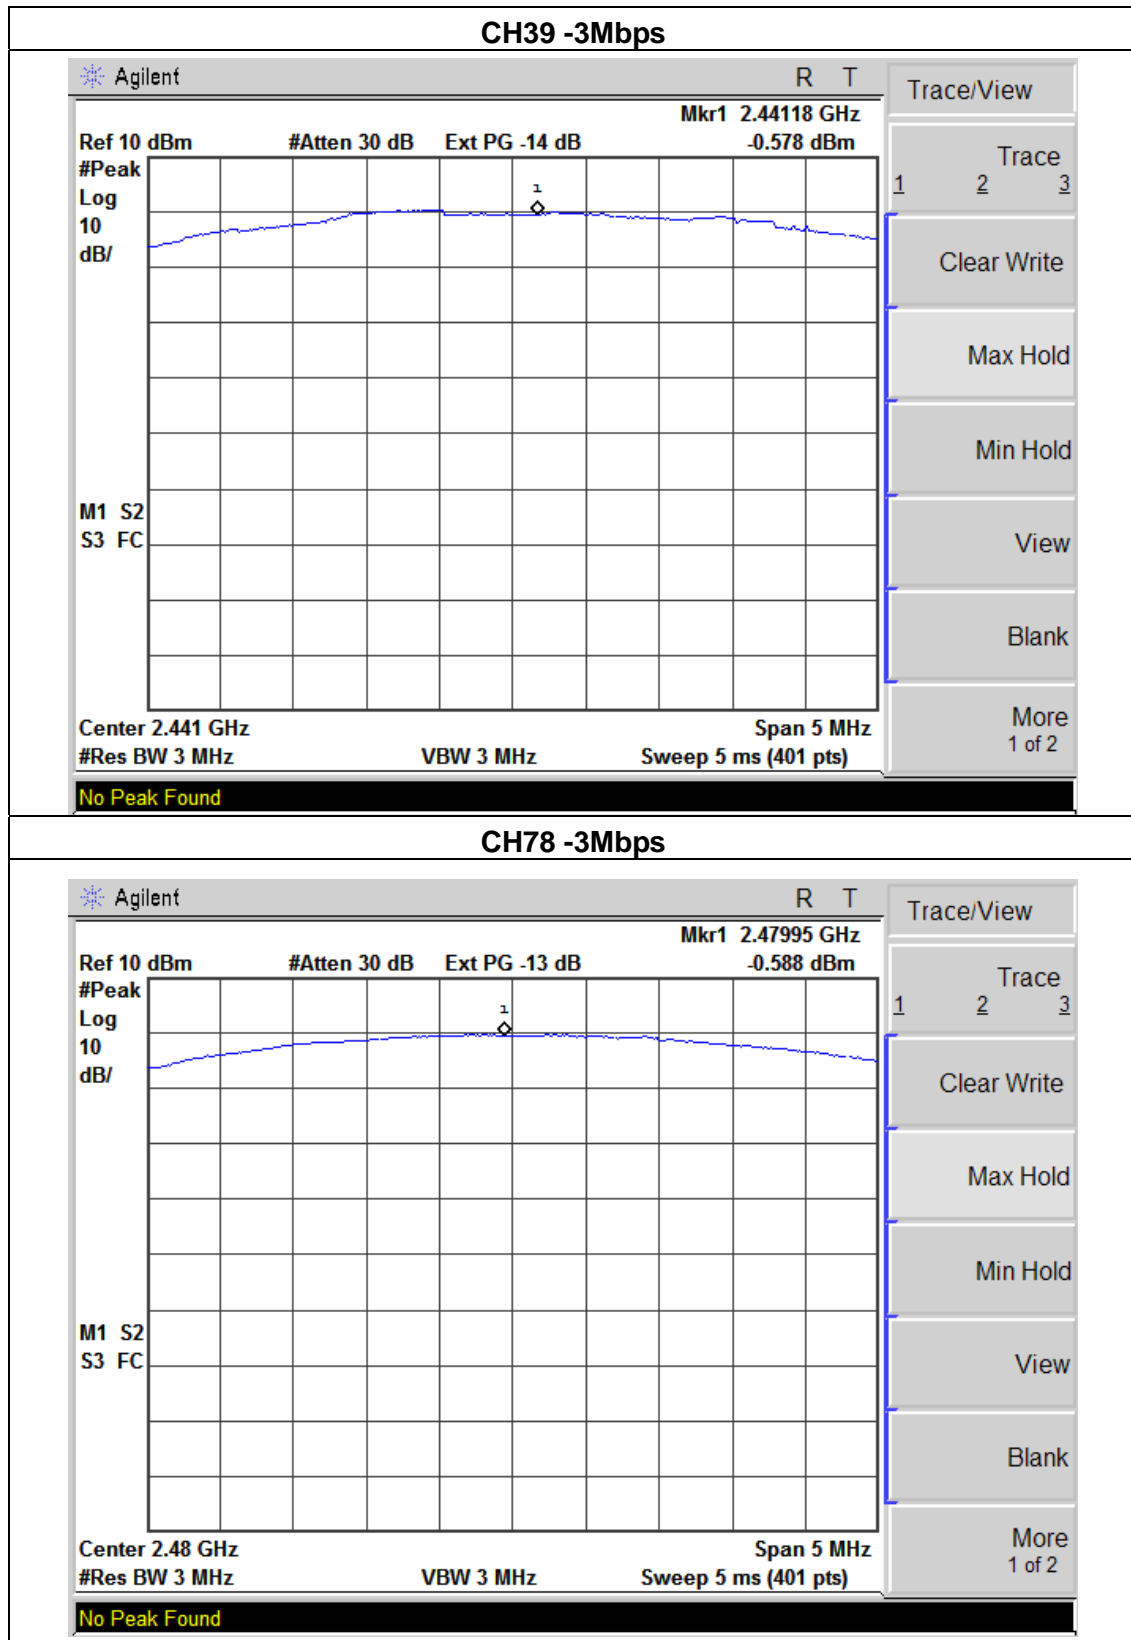

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PCB antenna. It comply with the standard requirement.

10. EUT TEST PHOTO

Radiated Measurement Photos

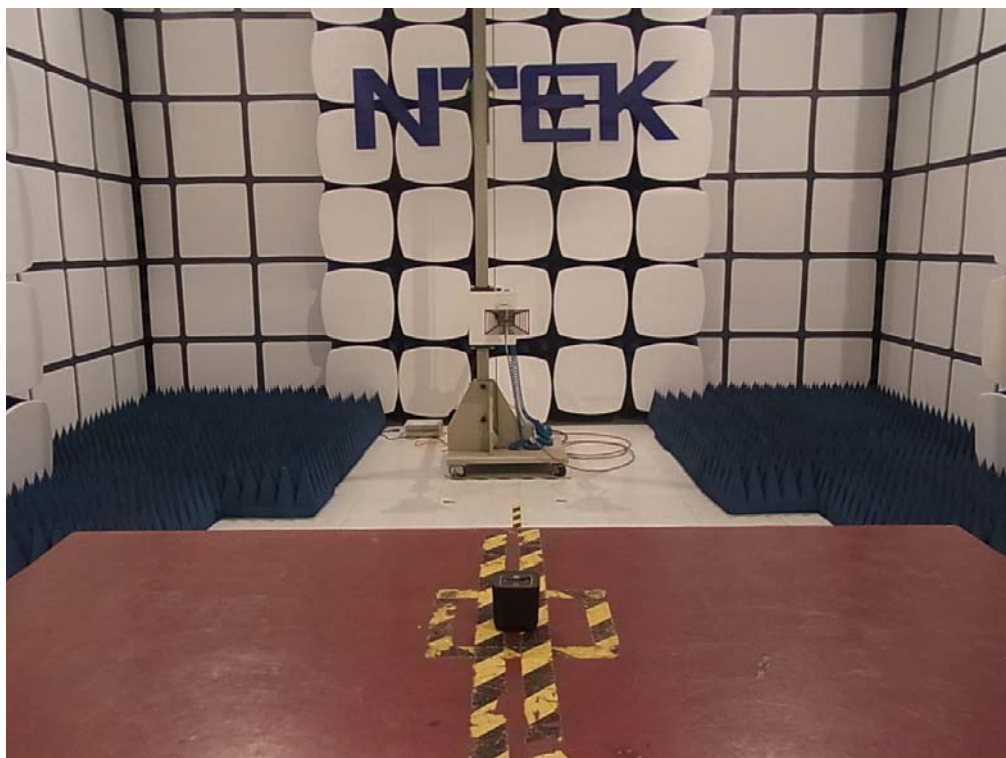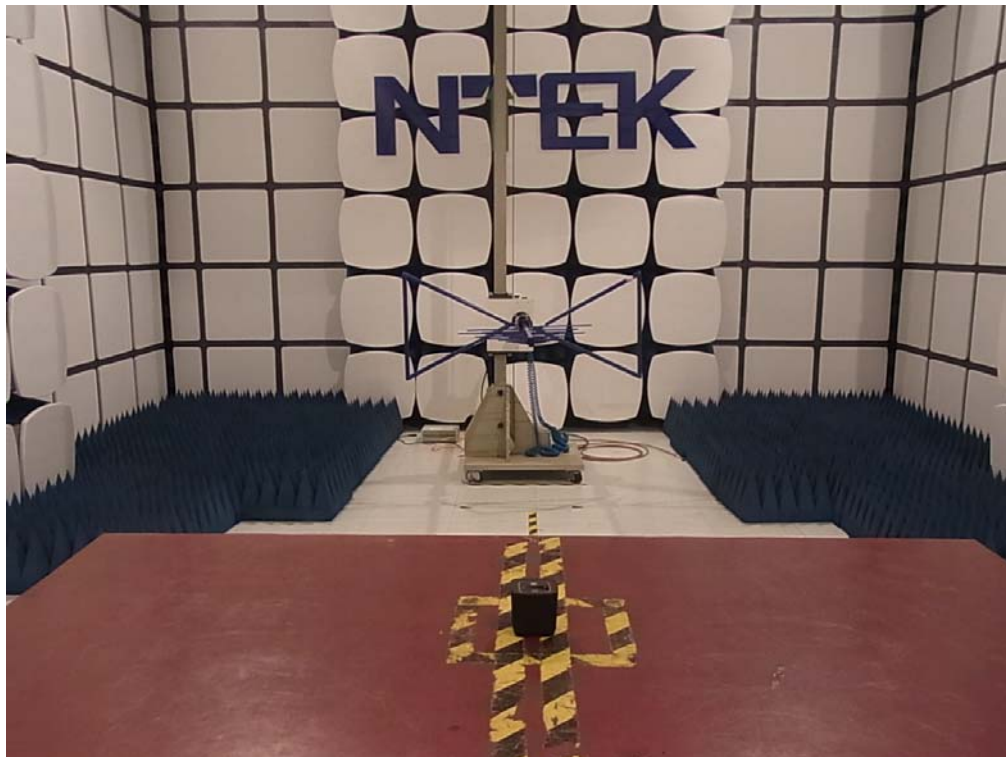

CONDUCTED EMISSION Photos

