

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GTI20140031F-1

FCC ID.....: 2AB2VM760A

Compiled by

(position+printed name+signature)...: File administrators Awen He

Supervised by

(position+printed name+signature)...: Test Engineer Kaito Tian

Approved by

(position+printed name+signature)...: Manager Walter Chen

Date of issue.....: March 17, 2014

Testing Laboratory Name: DTT Services Co.,Ltd

Address.....: 1F,2 Block,Jiaquan Building,Guanlan High-tech Park Baoan District, ShenZhen,Guangdong,China

Applicant's name: EZ Net Technology Co., Ltd.

Address.....: Room 201-203, Block 2, Area A, Internet Ind. Base, Baoyuan Rd, Baoan, Shenzhen, China

Test specification:

Standard: FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

TRF Originator: DTT Services Co.,Ltd

Master TRF: Dated 2010-10

DTT Services Co.,Ltd All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the DTT Services Co.,Ltd is acknowledged as copyright owner and source of the material. DTT Services Co.,Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Tablet PC

Trade Mark: EZNet

Model/Type reference.....: M760A

Listed Models: See Page2

Manufacturer: EZ Net Technology Co., Ltd.

Operation Frequency.....: From 2412MHz to 2462MHz

Rating: DC 3.70V/DC 5.0V adapter from AC120V/60Hz

Hardware version: INET-86DZ-REV01

Software version: 1.0Beta_20140217

Android version: 4.4.2

Result.....: Positive

TEST REPORT

Test Report No. : GTI20140031F-1	March 17, 2014 Date of issue
---	---------------------------------

Equipment under Test : Tablet PC

Model /Type : M760A

Listed Models : M760B ~M760Z, M768A~M768Z, M779A~M779Z
M786,M787,M797,M7816,M7817,M7818,M966,
M737,M738,M816,M816K,M916A,M916B,M919
M1006,M1067,M1068,M789,M7819,M798,M1069
M728A,M728B,M729,M739,M766,M778,M1019
M717,M736,M7219,M7266,M900,M818

Applicant : EZ Net Technology Co., Ltd

Address : Room 201-203, Block 2, Area A, Internet Ind. Base,
Baoyuan Rd, Baoan, Shenzhen, China

Manufacturer EZ Net Technology Co., Ltd

Address : Room 201-203, Block 2, Area A, Internet Ind. Base,
Baoyuan Rd, Baoan, Shenzhen, China

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1.	<u>TEST STANDARDS</u>	<u>4</u>
2.	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment Under Test	5
2.4.	Description of the test mode	5
2.5.	Short description of the Equipment under Test (EUT)	6
2.6.	EUT operation mode	6
2.7.	EUT configuration	6
2.8.	Internal Identification of AE used during the test	6
2.9.	Modifications	6
2.10.	NOTE	6
3.	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	8
3.4.	Test Description	8
3.5.	Statement of the measurement uncertainty	9
3.6.	Equipments Used during the Test	9
4.	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
4.1.	AC Power Conducted Emission	11
4.2.	Radiated Emission	14
4.3.	Maximum Peak Output Power	23
4.4.	Power Spectral Density	25
4.5.	Band Edge Compliance of RF Emission	34
4.6.	Spurious RF Conducted Emission	45
4.7.	6dB Bandwidth	76
4.8.	Antenna Requirement	85
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>86</u>
6.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>87</u>
7.	<u>.....</u>	<u>92</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	March 10, 2014
Testing commenced on	:	March 14, 2014
Testing concluded on	:	March 15, 2014

2.2. Product Description

The **EZ Net Technology Co., Ltd's** Model: M760A or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Tablet PC
Model Number	M760A
FCC ID	2AB2VM760A
WLAN	Supported 802.11b/802.11g/802.11n
WLAN FCC Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
WLAN Modulation	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Android version	4.4.2

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.70V/DC 5.0V Adapter from AC 120V/60Hz

2.4. Description of the test mode

IEEE 802.11b/g/n: The product support Third channels but only use Eleventh channels in USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472

7	2442		
---	------	--	--

2.5. Short description of the Equipment under Test (EUT)

2.4GHz (Tablet PC (M/N: M760A))

For more details, refer to the user's manual of the EUT.

Series Number: 354718041824829

2.6. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides command to control the EUT for staying in continuous transmitting and receiving mode for testing.

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger and USB cable

AE1

Model: 3570100
 Manufacturer: HBT
 Capacitance: 2800mAh
 Nominal Voltage: 3.70V

AE2:

Model: FYA05010US
 Manufacturer: L.P.S
 Input: 100-240V~50/60Hz 0.6A Max
 Output: 5.0V DC 2.0A
 Power Cable Length: 80cm

- Shielded
- Unshielded

Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AB2VM760A** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.9. Modifications

No modifications were implemented to meet testing criteria.

2.10. NOTE

- The EUT is a Tablet PC with WLAN function, The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN	FCC Part 15 C 15.247	GTI20140031F-1
USB Port	FCC Part 15 B	GTI20140031F-2
SAR	FCC Part 2 §2.1093	GTI20140031F-3

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	√	—	—	—
802.11g	√	—	—	—
802.11n(20MHz)	√	—	—	—
802.11n(40MHz)	√	—	—	—

3. The EUT incorporates a SISO function,Physically,the EUT provides one completed transmitter and one completed receiver.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

DTT Services Co.,Ltd

1F,2 Block,Jiaquan Building,Guanlan High-tech Park Baoan District, ShenZhen,Guangdong,China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9783A

The 3m alternate test site of DTT Services Co.,Ltd.EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

FCC-Registration No.: 214666

EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Test Description

FCC PART 15 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	13.5 Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the DTT Services Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for DTT Services Co.,Ltd laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

3.6. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2013/10/26
2	EMI Test Receiver	Rohde&Schwarz	ESCI	100106	2013/10/26
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2013/10/26
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2013/10/26
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2013/10/26
3	EMI TEST Software	Audix	E3	N/A	2013/10/26
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORN ANTENNA	ShwarzBeck	9120D	1011	2013/10/26
8	Amplifier	Sonoma	310N	E009-13	2013/10/26
9	JS amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2013/10/26
10	High pass filter	Compliance Direction systems	BSU-6	34202	2013/10/26
11	HORN ANTENNA	ShwarzBeck	9120D	1012	2013/10/26
12	Amplifier	Compliance Direction systems	PAP1-4060	120	2013/10/26
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2013/10/26
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2013/10/26

17	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2013/10/26
18	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2013/10/26

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
---	--	--	--	--	--


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2013/10/26

The Cal.Interval was one year

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

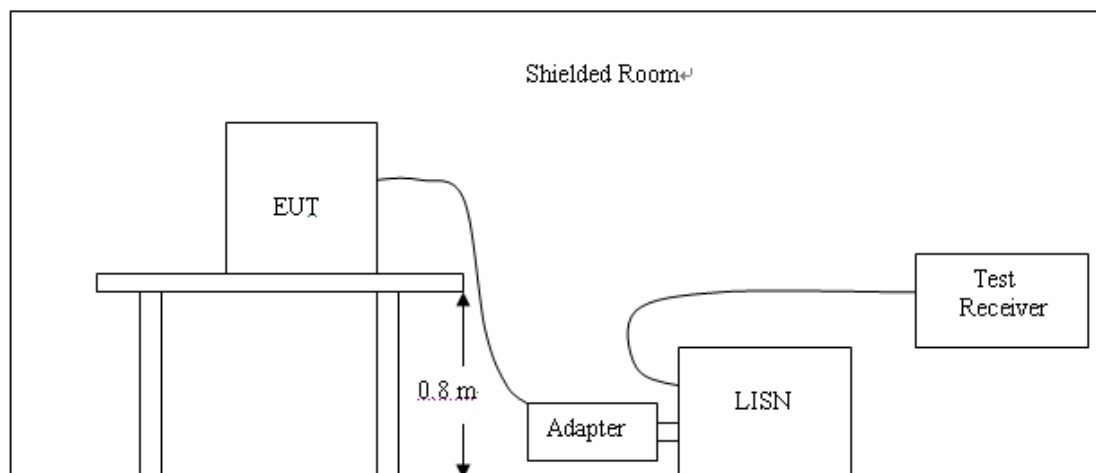

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2. Support equipment, if needed, was placed as per ANSI C63.10-2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

The AC Power Conducted Emission measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode,the middle channel) is the worst case for all the test modes and channels.

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

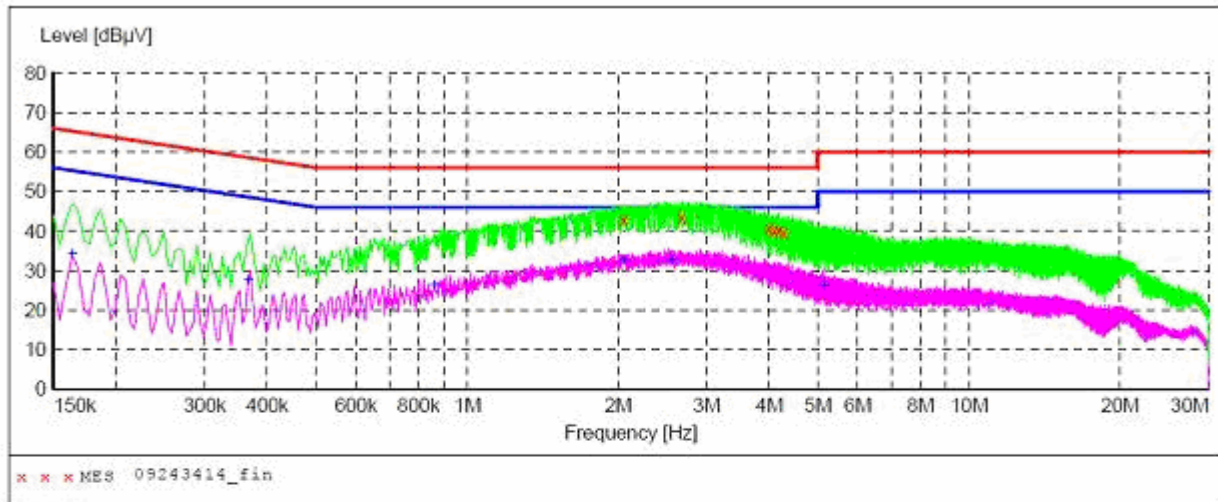**MEASUREMENT RESULT: "09243414_fin"**

03/14/2014 5:51PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
2.053500	42.90	10.3	56	13.1	QP	L1	GND
2.674500	43.60	10.3	56	12.4	QP	L1	GND
3.997500	40.80	10.3	56	15.2	QP	L1	GND
4.092000	40.20	10.3	56	15.8	QP	L1	GND
4.177500	40.20	10.3	56	15.8	QP	L1	GND
4.272000	39.50	10.3	56	16.5	QP	L1	GND


MEASUREMENT RESULT: "09243414_fin2"

03/14/2014 5:51PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	34.00	10.1	55	21.3	AV	L1	GND
0.366000	27.50	10.1	49	21.1	AV	L1	GND
0.861000	26.20	10.2	46	19.8	AV	L1	GND
2.049000	32.50	10.3	46	13.5	AV	L1	GND
2.548500	32.70	10.3	46	13.3	AV	L1	GND
5.136000	26.10	10.3	50	23.9	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

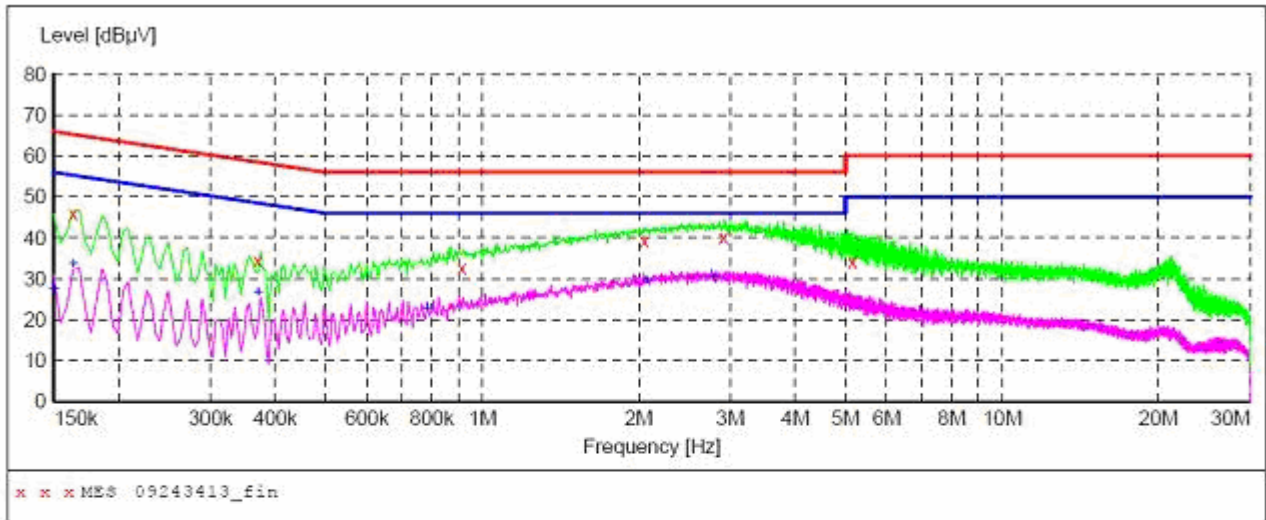**MEASUREMENT RESULT: "09243413_fin"**

03/14/2014 5:48PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	45.80	10.1	65	19.5	QP	N	GND
0.370500	34.40	10.1	59	24.1	QP	N	GND
0.915000	32.70	10.2	56	23.3	QP	N	GND
2.053500	39.30	10.3	56	16.7	QP	N	GND
2.913000	40.20	10.3	56	15.8	QP	N	GND
5.154000	34.10	10.3	60	25.9	QP	N	GND

MEASUREMENT RESULT: "09243413_fin2"


03/14/2014 5:48PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	27.40	10.1	56	28.6	AV	N	GND
0.163500	33.50	10.1	55	21.8	AV	N	GND
0.370500	26.50	10.1	49	22.0	AV	N	GND
0.784500	22.70	10.2	46	23.3	AV	N	GND
2.067000	29.50	10.3	46	16.5	AV	N	GND
2.787000	30.10	10.3	46	15.9	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9KHz – 30MHz

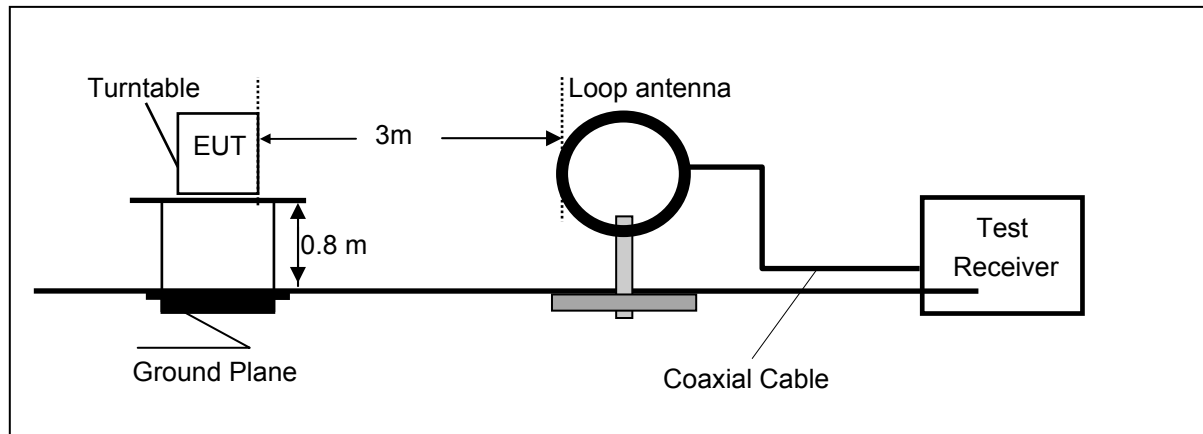

Frequency range 30MHz – 1000MHz

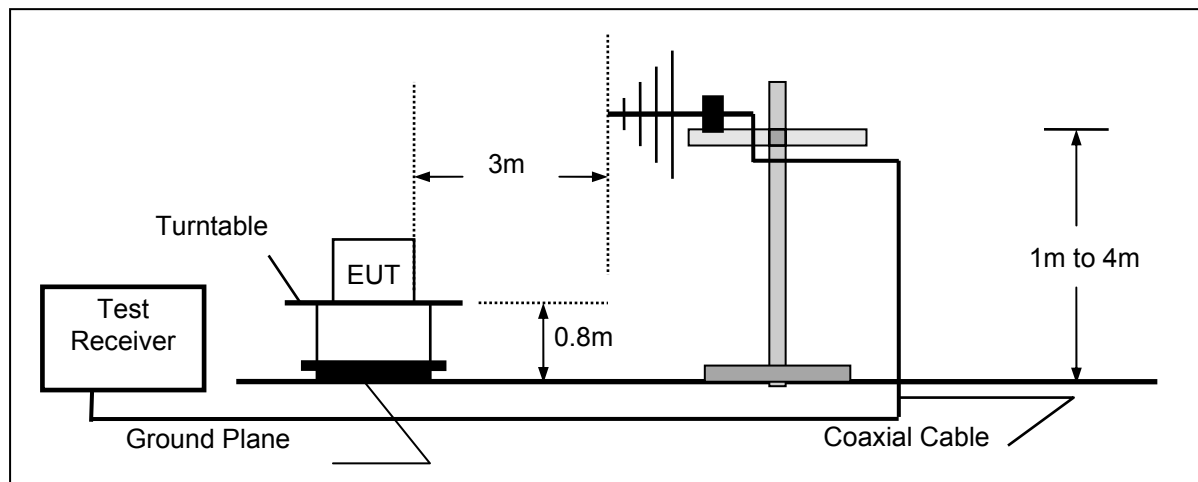

Frequency range above 1GHz-25GHz

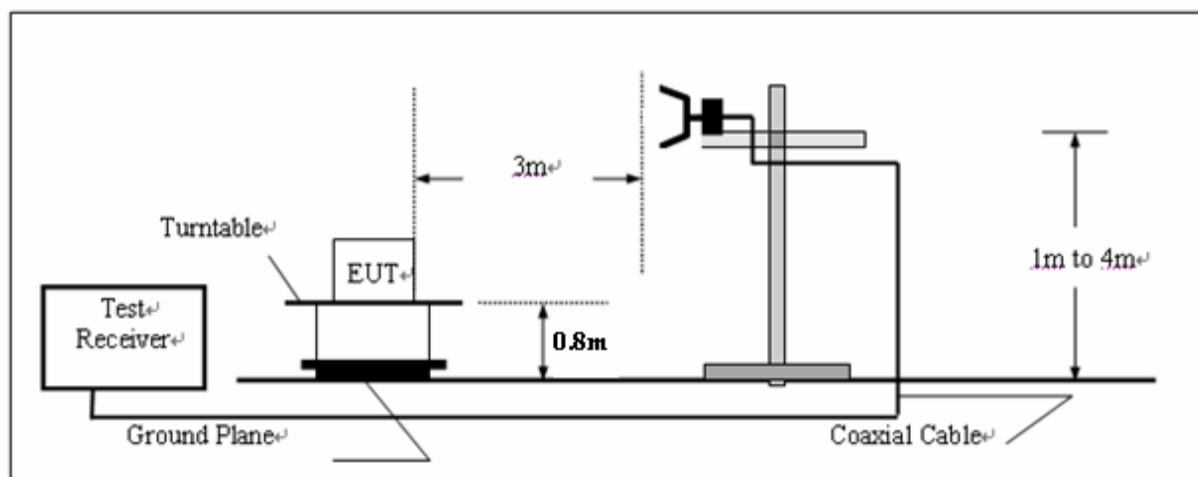

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT

3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 26MHz and maximum operation frequency was 2462MHz.so radiated emission test frequency band from 9KHz to 25GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz,VBW=10Hz for Average Detector,Readings are both peak and average values.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	300	$20\log(2400/F(KHz))+80$	$2400/F(KHz)$
0.49-1.705	30	$20\log(24000/F(KHz))+40$	$24000/F(KHz)$
1.705-30	30	$20\log(30)+40$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


TEST RESULTS

Remark:

1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode,the middle channel) is the worst case for all the test mode and channel.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientations,recored woest case at powered by adapter charging mode.

For 30MHz to 1000MHz***SWEEP TABLE: "test (30M-1G)"***

Short Description: Field Strength

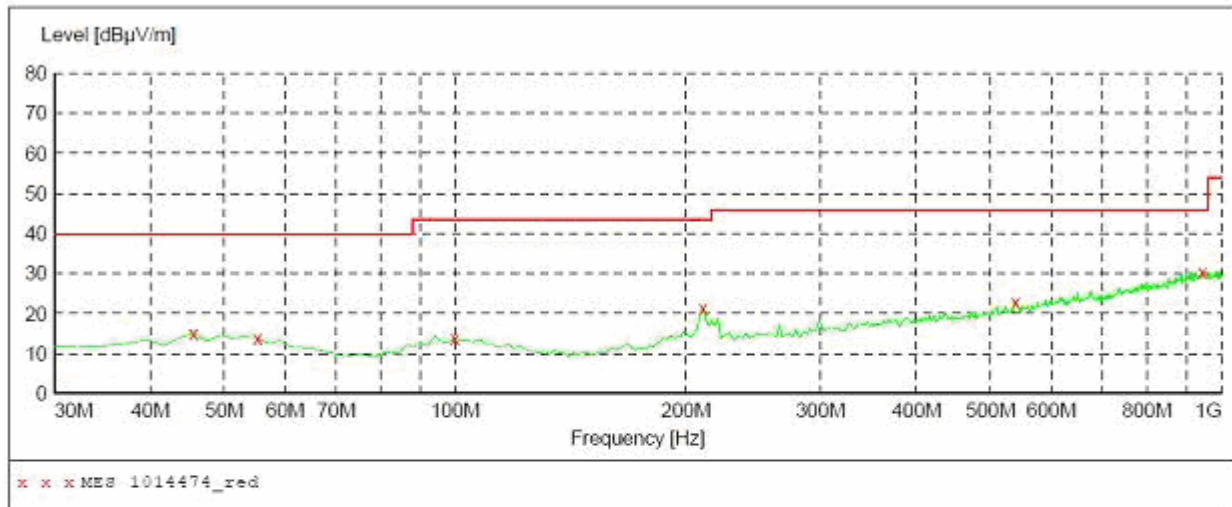
***MEASUREMENT RESULT: "1014474_red"***

03/14/2014 8:42PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.551102	15.10	-15.8	40.0	24.9	Peak	100.0	117.00	HORIZONTAL
55.270541	13.80	-16.1	40.0	26.2	Peak	100.0	140.00	HORIZONTAL
99.979960	13.70	-17.2	43.5	29.8	Peak	100.0	27.00	HORIZONTAL
210.781563	21.40	-17.3	43.5	22.1	Peak	100.0	313.00	HORIZONTAL
539.298597	23.00	-8.2	46.0	23.0	Peak	100.0	0.00	HORIZONTAL
945.571142	30.30	-3.9	46.0	15.7	Peak	100.0	99.00	HORIZONTAL

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength

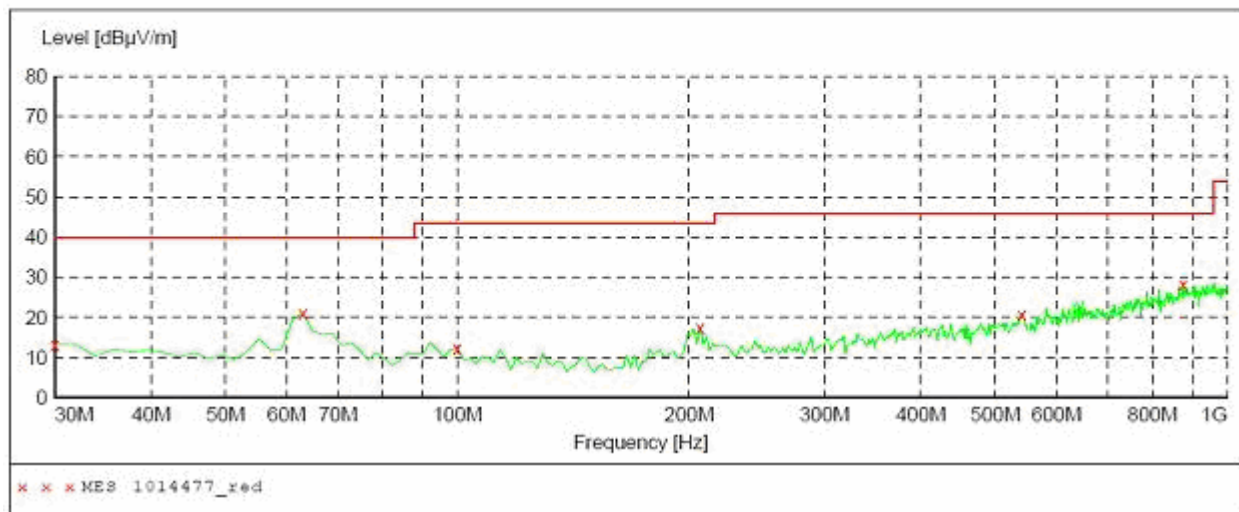***MEASUREMENT RESULT: "1014477_red"***

03/14/2014 8:46PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	13.40	-18.2	40.0	26.6	Peak	100.0	174.0	VERTICAL
63.046092	21.20	-18.2	40.0	18.8	Peak	100.0	156.0	VERTICAL
99.979960	12.30	-17.2	43.5	31.2	Peak	100.0	0.00	VERTICAL
206.893788	17.40	-17.3	43.5	26.1	Peak	100.0	25.0	VERTICAL
541.242485	20.80	-8.4	46.0	25.2	Peak	100.0	79.0	VERTICAL
877.535070	28.40	-4.4	46.0	17.6	Peak	100.0	0.00	VERTICAL

For 1GHz to 25GHz

802.11b Mode(above 1GHz)**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2412MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	47.04	PK	74	26.96	1.00 H	35	44.94	31.60	7.00	36.5	2.10
1	4824.00	38.45	AV	54	15.55	1.00 H	35	36.35	31.60	7.00	36.5	2.10
2	7236.00	50.60	PK	74	23.40	1.00 H	184	39.67	37.33	8.90	35.3	10.93
2	7236.00	34.38	AV	54	19.62	1.00 H	184	23.45	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	55.04	PK	74	18.96	1.00 H	344	52.94	31.60	7.00	36.5	2.10
1	4824.00	42.85	AV	54	11.15	1.00 H	344	40.75	31.60	7.00	36.5	2.10
2	7236.00	52.76	PK	74	21.24	1.00 H	188	41.83	37.33	8.90	35.3	10.93
2	7236.00	42.78	AV	54	11.22	1.00 H	188	31.85	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	46.39	PK	74	27.61	1.00 H	260	44.27	31.02	7.60	36.5	2.12
1	4874.00	35.29	AV	54	18.71	1.00 H	260	33.17	31.02	7.60	36.5	2.12
2	7311.00	54.26	PK	74	19.74	1.00 H	211	43.18	37.28	8.60	34.8	11.08
2	7311.00	43.35	AV	54	10.65	1.00 H	211	32.27	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	47.39	PK	74	26.61	1.00 H	180	45.27	31.02	7.60	36.5	2.12
1	4874.00	36.30	AV	54	17.70	1.00 H	180	34.18	31.02	7.60	36.5	2.12
2	7311.00	50.35	PK	74	23.65	1.00 H	31	39.27	37.28	8.60	34.8	11.08
2	7311.00	39.26	AV	54	14.74	1.00 H	31	28.18	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	50.74	PK	74	23.26	1.00 H	300	48.36	31.58	7.00	36.2	2.38
1	4924.00	34.83	AV	54	19.17	1.00 H	300	32.45	31.58	7.00	36.2	2.38
2	7386.00	58.08	PK	74	15.92	1.00 H	190	46.37	38.51	8.50	35.3	11.71
2	7386.00	44.08	AV	54	9.92	1.00 H	190	32.37	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	54.93	PK	74	19.07	1.00 H	336	52.55	31.58	7.00	36.2	2.38
1	4924.00	43.36	AV	54	10.64	1.00 H	336	40.98	31.58	7.00	36.2	2.38
2	7386.00	56.13	PK	74	17.87	1.00 H	215	44.42	38.51	8.50	35.3	11.71
2	7386.00	44.07	AV	54	9.93	1.00 H	215	32.36	38.51	8.50	35.3	11.71

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. For Wireless 802.11b mode at 1Mbps.

802.11g Mode(above 1GHz)**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2412MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	49.47	PK	74	24.53	1.00 H	19	47.37	31.6	7.00	36.5	2.10
1	4824.00	41.57	AV	54	12.43	1.00 H	19	39.47	31.6	7.00	36.5	2.10
2	7236.00	57.04	PK	74	16.96	1.00 H	202	46.11	37.33	8.90	35.3	10.93
2	7236.00	43.26	AV	54	10.74	1.00 H	202	32.33	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	57.46	PK	74	16.54	1.00 H	48	55.36	31.60	7.00	36.5	2.10
1	4824.00	45.57	AV	54	8.43	1.00 H	48	43.47	31.60	7.00	36.5	2.10
2	7236.00	63.22	PK	74	10.78	1.00 H	296	52.29	37.33	8.90	35.3	10.93
2	7236.00	43.48	AV	54	10.52	1.00 H	296	32.55	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	54.73	PK	74	19.27	1.00 H	116	52.61	31.02	7.60	36.5	2.12
1	4874.00	43.40	AV	54	10.60	1.00 H	116	41.28	31.02	7.60	36.5	2.12
2	7311.00	59.47	PK	74	14.53	1.00 H	90	48.39	37.28	8.60	34.8	11.08
2	7311.00	43.34	AV	54	10.66	1.00 H	90	32.26	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	59.80	PK	74	14.20	1.00 H	132	57.68	31.02	7.60	36.5	2.12
1	4874.00	43.77	AV	54	10.23	1.00 H	132	41.65	31.02	7.60	36.5	2.12
2	7311.00	54.49	PK	74	19.51	1.00 H	271	43.41	37.28	8.60	34.8	11.08
2	7311.00	43.75	AV	54	10.25	1.00 H	271	32.67	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	51.98	PK	74	22.02	1.00 H	315	49.6	31.58	7.00	36.2	2.38
1	4924.00	39.84	AV	54	14.16	1.00 H	315	37.46	31.58	7.00	36.2	2.38
2	7311.00	54.47	PK	74	19.53	1.00 H	260	42.76	38.51	8.50	35.3	11.71
2	7311.00	43.18	AV	54	10.82	1.00 H	260	31.47	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	47.71	PK	74	26.29	1.00 H	152	45.33	31.58	7.00	36.2	2.38
1	4924.00	36.75	AV	54	17.25	1.00 H	152	34.37	31.58	7.00	36.2	2.38
2	7386.00	56.07	PK	74	17.93	1.00 H	20	44.36	38.51	8.50	35.3	11.71
2	7386.00	44.08	AV	54	9.92	1.00 H	20	32.37	38.51	8.50	35.3	11.71

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. For Wireless 802.11g mode at 6Mbps.

802.11n(20MHz) Mode(above 1GHz)**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2412MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	56.93	PK	74	17.07	1.00 H	80	54.83	31.60	7.00	36.5	2.10
1	4824.00	43.57	AV	54	10.43	1.00 H	80	41.47	31.60	7.00	36.5	2.10
2	7236.00	58.29	PK	74	15.71	1.00 H	191	47.36	37.33	8.90	35.3	10.93
2	7236.00	42.60	AV	54	11.40	1.00 H	191	31.67	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824.00	58.79	PK	74	15.21	1.00 H	357	56.69	31.60	7.00	36.5	2.10
1	4824.00	44.47	AV	54	9.53	1.00 H	357	42.37	31.60	7.00	36.5	2.10
2	7236.00	60.40	PK	74	13.60	1.00 H	183	49.47	37.33	8.90	35.3	10.93
2	7236.00	42.73	AV	54	11.27	1.00 H	183	31.80	37.33	8.90	35.3	10.93

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	51.87	PK	74	22.13	1.00 H	210	49.75	31.02	7.60	36.5	2.12
1	4874.00	41.49	AV	54	12.51	1.00 H	210	39.37	31.02	7.60	36.5	2.12
2	7311.00	54.56	PK	74	19.44	1.00 H	188	43.48	37.28	8.60	34.8	11.08
2	7311.00	43.48	AV	54	10.52	1.00 H	188	32.4	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	52.49	PK	74	21.51	1.00 H	240	50.37	31.02	7.60	36.5	2.12
1	4874.00	42.60	AV	54	11.40	1.00 H	240	40.48	31.02	7.60	36.5	2.12
2	7311.00	53.83	PK	74	20.17	1.00 H	214	42.75	37.28	8.60	34.8	11.08
2	7311.00	42.86	AV	54	11.14	1.00 H	214	31.78	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	50.94	PK	74	23.06	1.00 H	141	48.56	31.58	7.00	36.2	2.38
1	4924.00	38.05	AV	54	15.95	1.00 H	141	35.67	31.58	7.00	36.2	2.38
2	7386.00	56.08	PK	74	17.92	1.00 H	217	44.37	38.51	8.50	35.3	11.71
2	7386.00	45.20	AV	54	8.80	1.00 H	217	33.49	38.51	8.50	35.3	11.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2462MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	46.88	PK	74	27.12	1.00 H	199	44.5	31.58	7.00	36.2	2.38
1	4924.00	34.75	AV	54	19.25	1.00 H	199	32.37	31.58	7.00	36.2	2.38
2	7386.00	56.10	PK	74	17.90	1.00 H	271	44.39	38.51	8.50	35.3	11.71
2	7386.00	44.16	AV	54	9.84	1.00 H	271	32.45	38.51	8.50	35.3	11.71

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. For Wireless 802.11n (20MHz) mode at 6.5Mbps.

802.11n(40MHz) Mode(above 1GHz)**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2422MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844.00	54.07	PK	74	19.93	1.00 H	67	51.96	31.01	7.30	36.2	2.11
1	4844.00	38.46	AV	54	15.54	1.00 H	67	36.35	31.01	7.30	36.2	2.11
2	7266.00	53.99	PK	74	20.01	1.00 H	198	43.19	36.70	8.90	34.8	10.80
2	7266.00	45.32	AV	54	8.68	1.00 H	198	34.52	36.70	8.90	34.8	10.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2422MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844.00	52.42	PK	74	21.58	1.00 H	354	50.31	31.01	7.30	36.2	2.11
1	4844.00	39.80	AV	54	14.20	1.00 H	354	37.69	31.01	7.30	36.2	2.11
2	7266.00	62.73	PK	74	11.27	1.00 H	180	51.93	36.70	8.90	34.8	10.80
2	7266.00	42.72	AV	54	11.28	1.00 H	180	31.92	36.70	8.90	34.8	10.80

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	53.48	PK	74	20.52	1.00 H	250	51.36	31.02	7.60	36.5	2.12
1	4874.00	41.49	AV	54	12.51	1.00 H	250	39.37	31.02	7.60	36.5	2.12
2	7311.00	56.78	PK	74	17.22	1.00 H	106	45.7	37.28	8.60	34.8	11.08
2	7311.00	41.44	AV	54	12.56	1.00 H	106	30.36	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	51.17	PK	74	22.83	1.00 H	305	49.05	31.02	7.60	36.5	2.12
1	4874.00	44.01	AV	54	9.99	1.00 H	305	41.89	31.02	7.60	36.5	2.12
2	7311.00	56.14	PK	74	17.86	1.00 H	180	45.06	37.28	8.60	34.8	11.08
2	7311.00	43.41	AV	54	10.59	1.00 H	180	32.33	37.28	8.60	34.8	11.08

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2452MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	50.63	PK	74	23.37	1.00 H	62	48.36	31.47	7.00	36.2	2.27
1	4904.00	37.63	AV	54	16.37	1.00 H	62	35.36	31.47	7.00	36.2	2.27
2	7356.00	57.75	PK	74	16.25	1.00 H	197	46.10	38.45	8.50	35.3	11.65
2	7356.00	44.01	AV	54	9.99	1.00 H	197	32.36	38.45	8.50	35.3	11.65


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2452MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	56.53	PK	74	17.47	1.00 H	200	54.26	31.47	7.00	36.2	2.27
1	4904.00	41.63	AV	54	12.37	1.00 H	200	39.36	31.47	7.00	36.2	2.27
2	7356.00	61.91	PK	74	12.09	1.00 H	186	50.26	38.45	8.50	35.3	11.65
2	7356.00	44.94	AV	54	9.06	1.00 H	186	33.29	38.45	8.50	35.3	11.65

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. For Wireless 802.11n (40MHz) mode at 13.5Mbps.

4.3. Maximum Peak Output Power

TEST CONFIGURATION

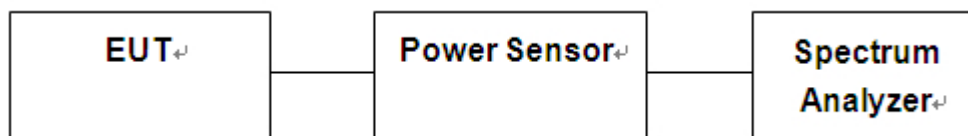

TEST PROCEDURE

According to KDB558074 D01 DTS Meas Guidance v03:

PKPM1 Peak power meter method: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power: As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

1. The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
2. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Remark: We measured output power at difference data rate for each mode and recorded worst case for each mode.

4.3.1 802.11b Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Measured Output Average Power (dBm)	Limits (dBm)	Verdict
1	2412	11.72	8.30	30	PASS
6	2437	12.31	8.77	30	PASS
11	2462	12.33	8.80	30	PASS

- Note:
1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
 2. The test results including the cable loss.

4.3.2 802.11g Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Measured Output Average Power (dBm)	Limits (dBm)	Verdict
1	2412	11.39	7.29	30	PASS
6	2437	11.79	7.33	30	PASS
11	2462	11.89	7.47	30	PASS

- Note:
1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
 2. The test results including the cable loss.

4.3.3 802.11n(20MHz) Test Mode**A. Test Verdict**

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Measured Output Average Power (dBm)	Limits (dBm)	Verdict
1	2412	11.62	7.05	30	PASS
6	2437	11.87	7.22	30	PASS
11	2462	11.96	7.21	30	PASS

Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.
2.The test results including the cable loss.


4.3.4 802.11n(40MHz) Test Mode**A. Test Verdict**

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Measured Output Average Power (dBm)	Limits (dBm)	Verdict
3	2422	11.19	6.19	30	PASS
6	2437	11.31	6.24	30	PASS
9	2452	11.29	6.20	30	PASS

Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.
2.The test results including the cable loss.

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS


4.4.1 802.11b Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/3kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	-20.93	Plot 4.4.1 A	8	PASS
6	2437	-20.71	Plot 4.4.1 B	8	PASS
11	2462	-20.57	Plot 4.4.1 C	8	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots

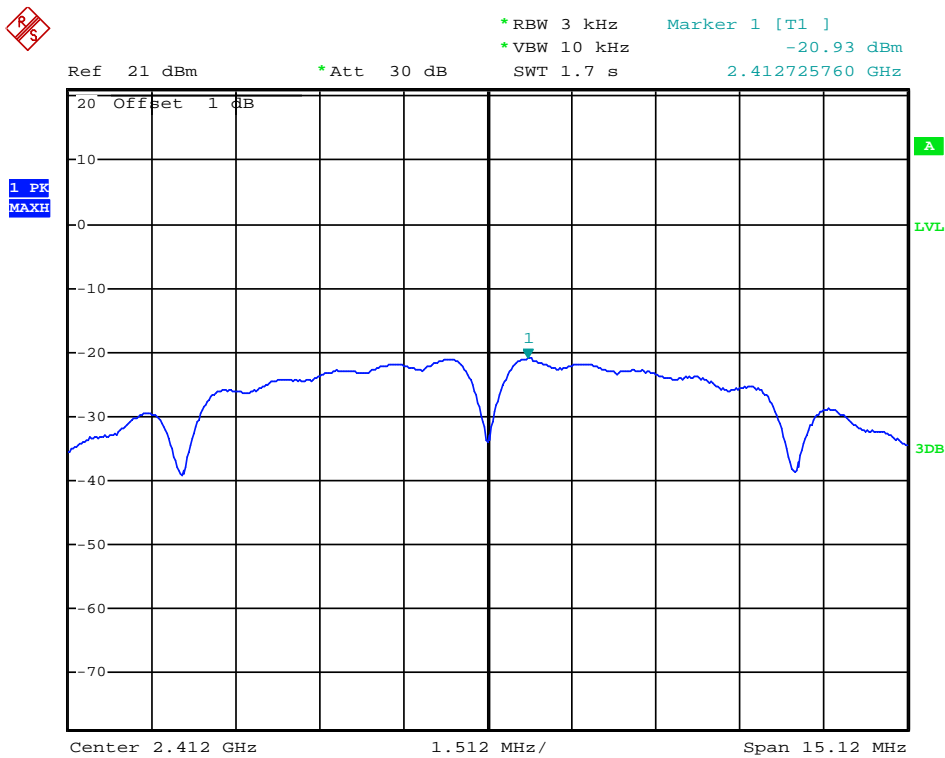

(Plot 4.4.1 A: Channel 1: 2412MHz @ 802.11b)

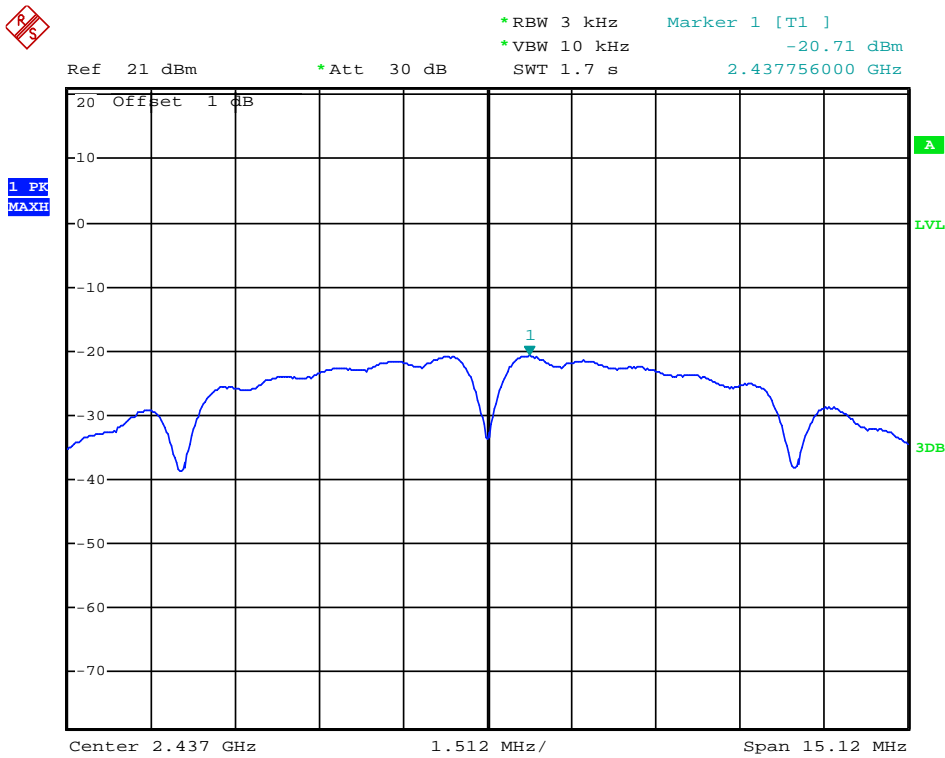

(Plot 4.4.1 B: Channel 6: 2437MHz @ 802.11b)

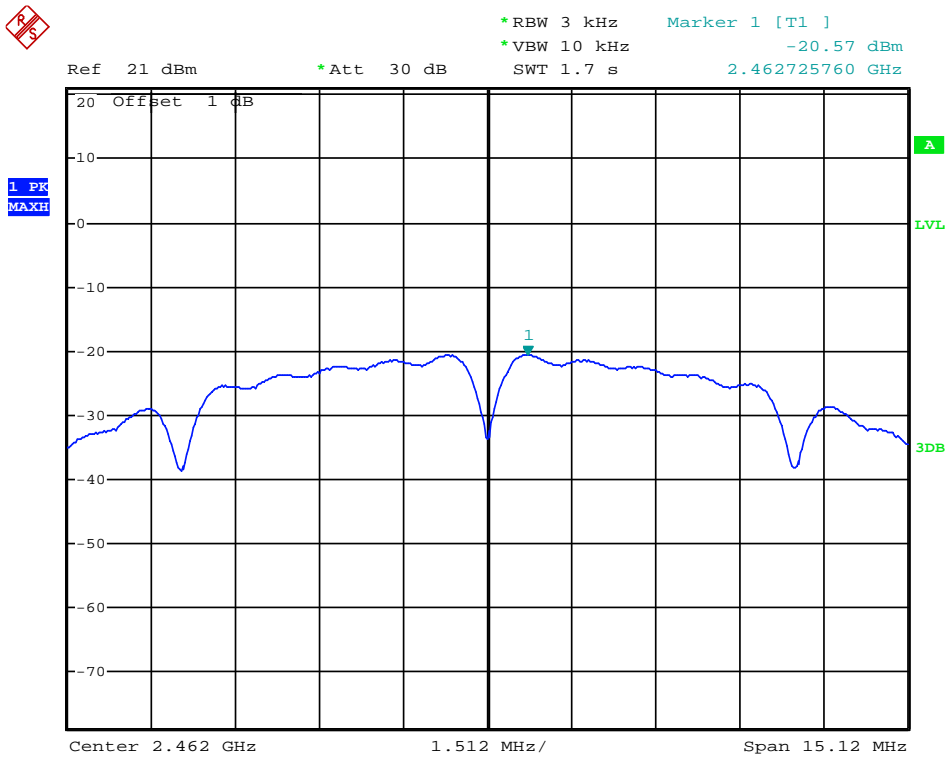

(Plot 4.4.1 C: Channel 11: 2462MHz @ 802.11b)


4.4.2 802.11g Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/3kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	-25.64	Plot 4.4.2 A	8	PASS
6	2437	-24.90	Plot 4.4.2 B	8	PASS
11	2462	-25.09	Plot 4.4.2 C	8	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.


B. Test Plots

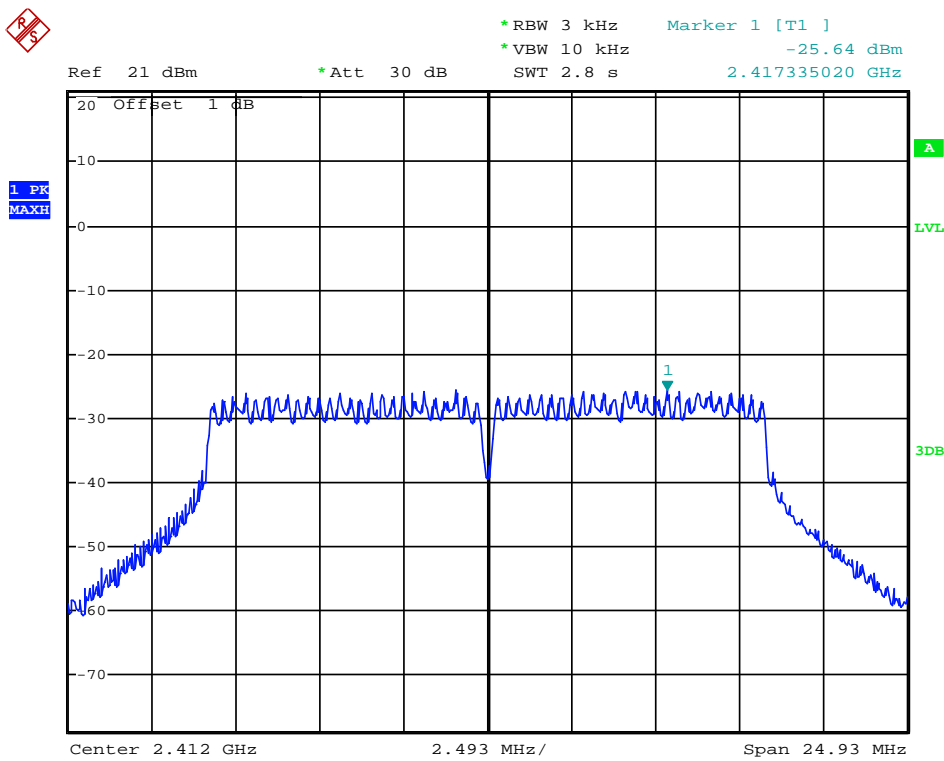

(Plot 4.4.2 A: Channel 1: 2412MHz @ 802.11g)

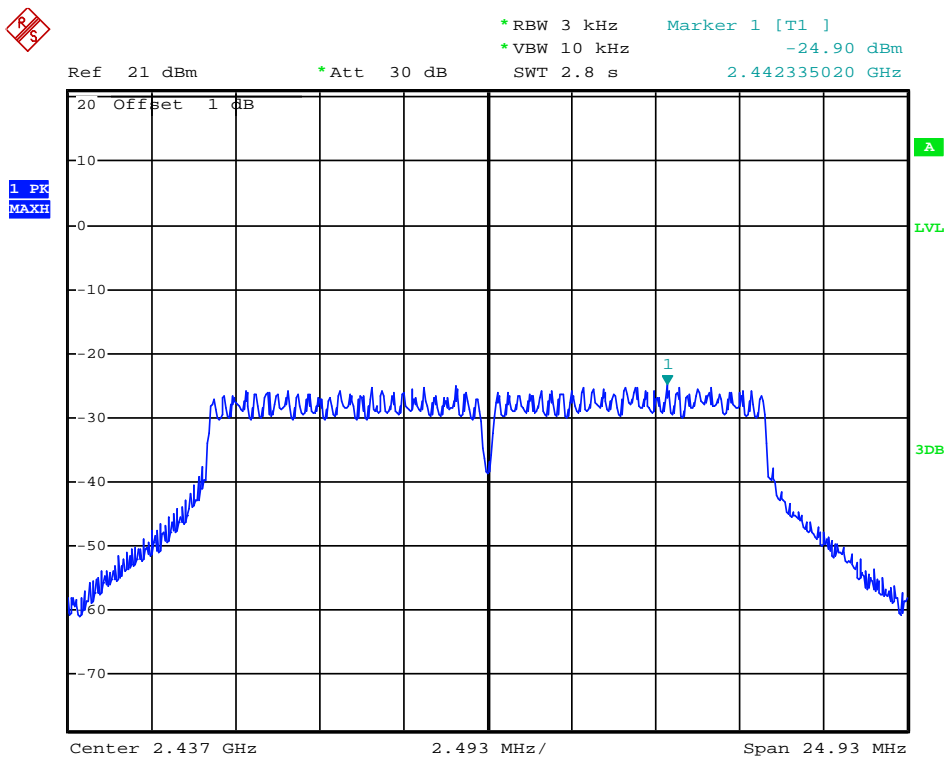

(Plot 4.4.2 B: Channel 6: 2437MHz @ 802.11g)

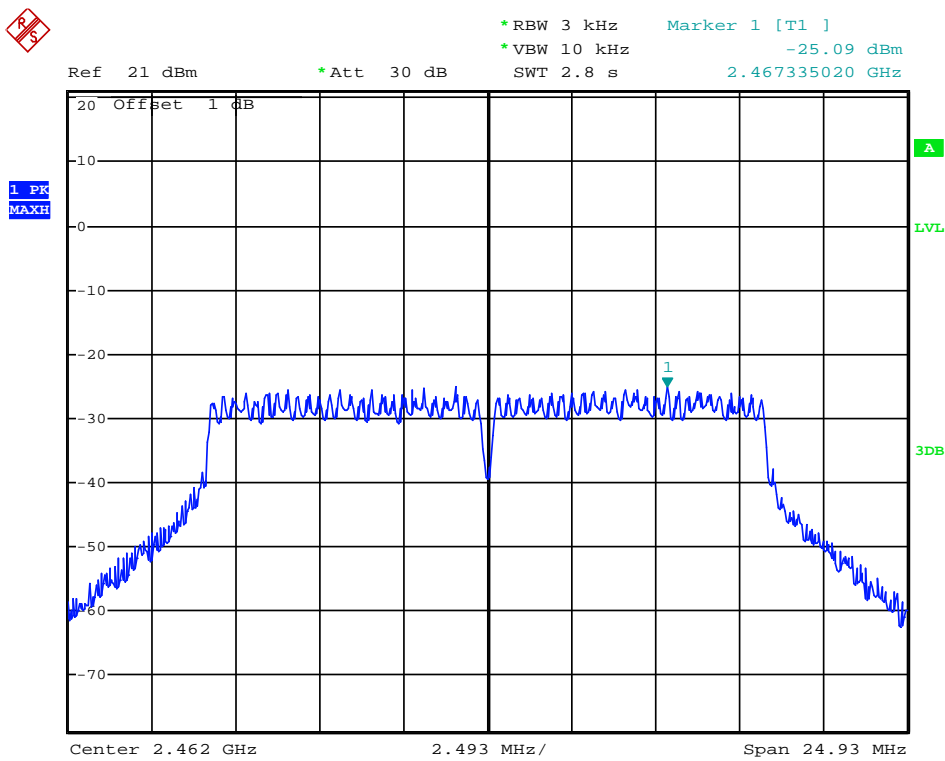

(Plot 4.4.2 C: Channel 11: 2462MHz @ 802.11g)


4.4.3 802.11n(20MHz) Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/3kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
1	2412	-25.76	Plot 4.4.3 A	8	PASS
6	2437	-24.63	Plot 4.4.3 B	8	PASS
11	2462	-25.11	Plot 4.4.3 C	8	PASS

Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.


B. Test Plots

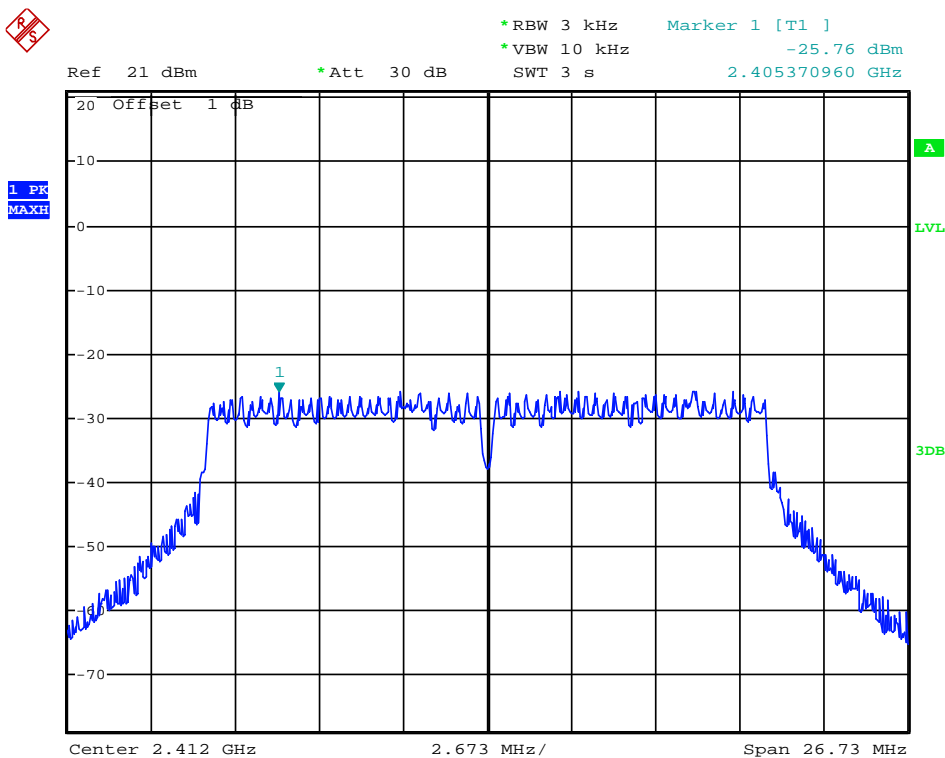

(Plot 4.4.3 A: Channel 1: 2412MHz @ 802.11n(20MHz))

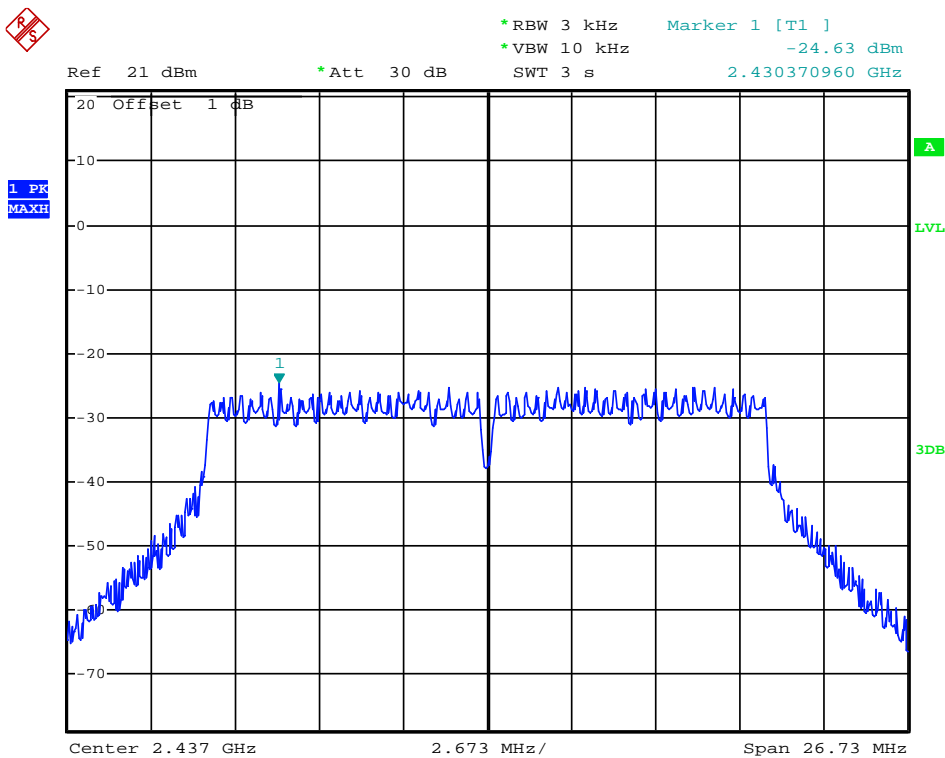

(Plot 4.4.3 B: Channel 6: 2437MHz @ 802.11n(20MHz))

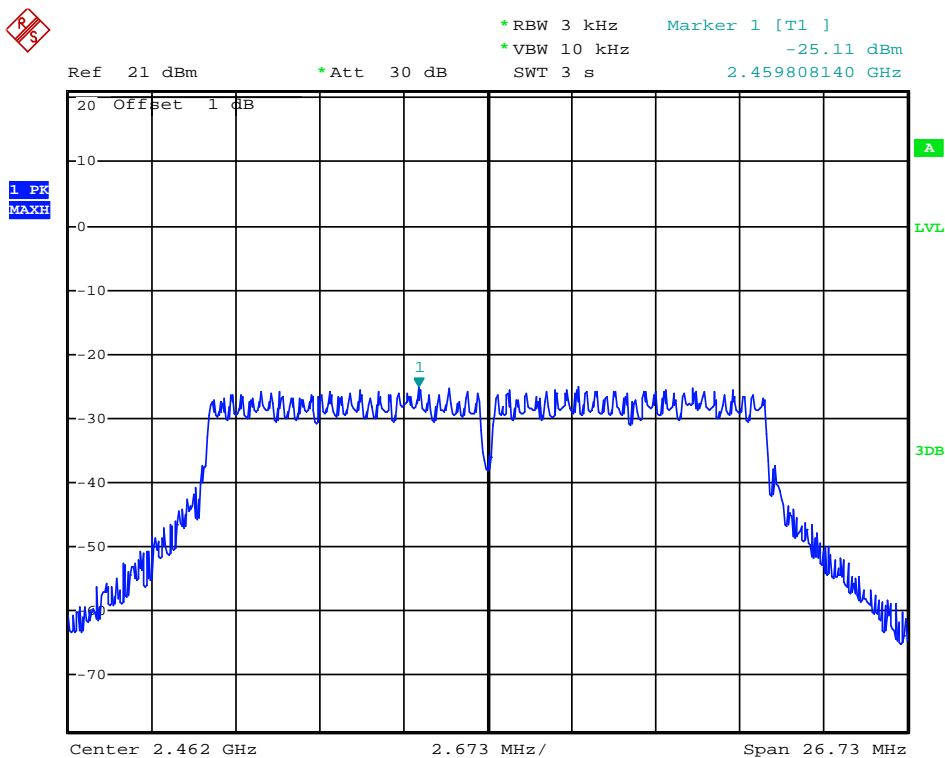

(Plot 4.4.3 C: Channel 11: 2462MHz @ 802.11n(20MHz))


4.4.4 802.11n(40MHz) Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Report PSD (dBm/3kHz)	Refer to Plot	Limits (dBm/3KHz)	Verdict
3	2422	-26.67	Plot 4.4.4 A	8	PASS
6	2437	-26.00	Plot 4.4.4 B	8	PASS
9	2452	-25.30	Plot 4.4.4 C	8	PASS

Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.
2.The test results including the cable lose.


B. Test Plots

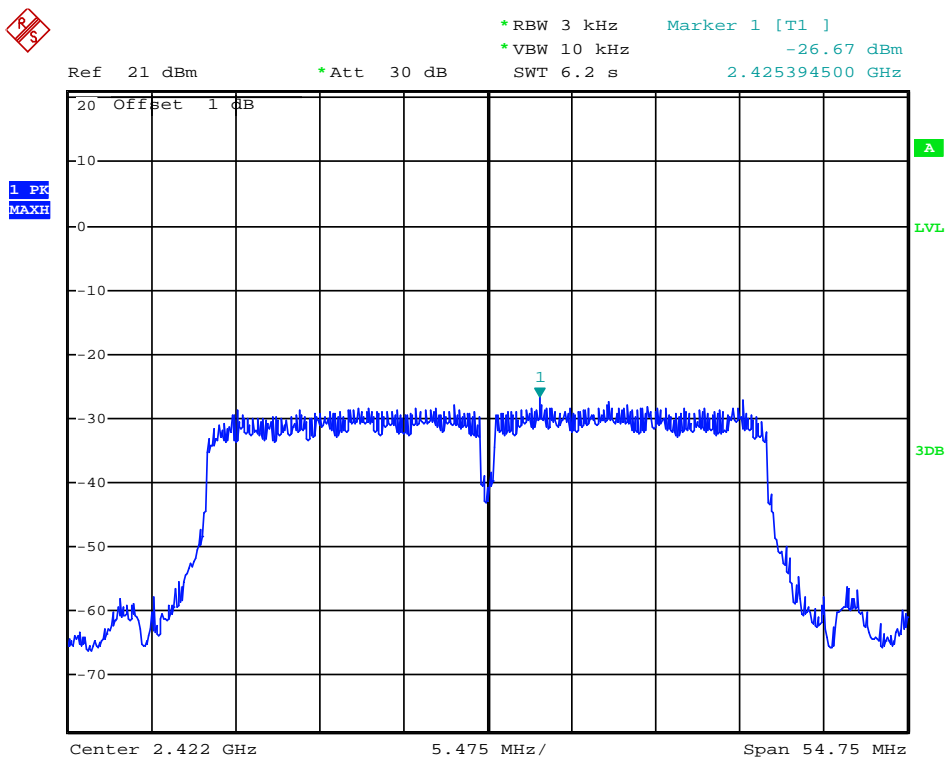

(Plot 4.4.4 A: Channel 3: 2422MHz @ 802.11n(40MHz))

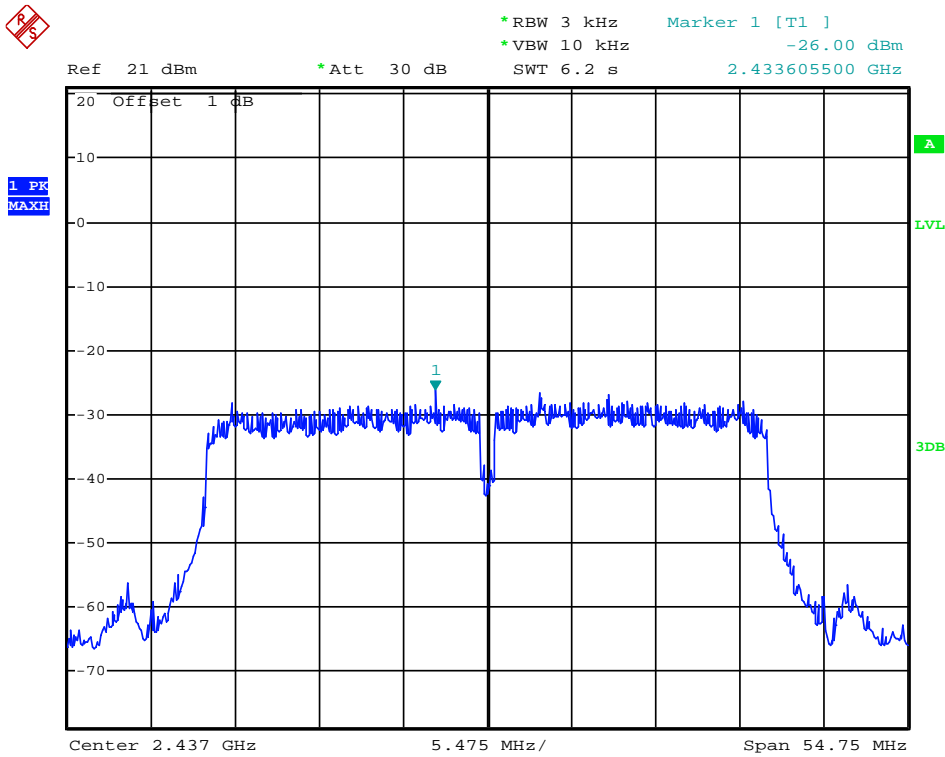

(Plot 4.4.4 B: Channel 6: 2437MHz @ 802.11n(40MHz))

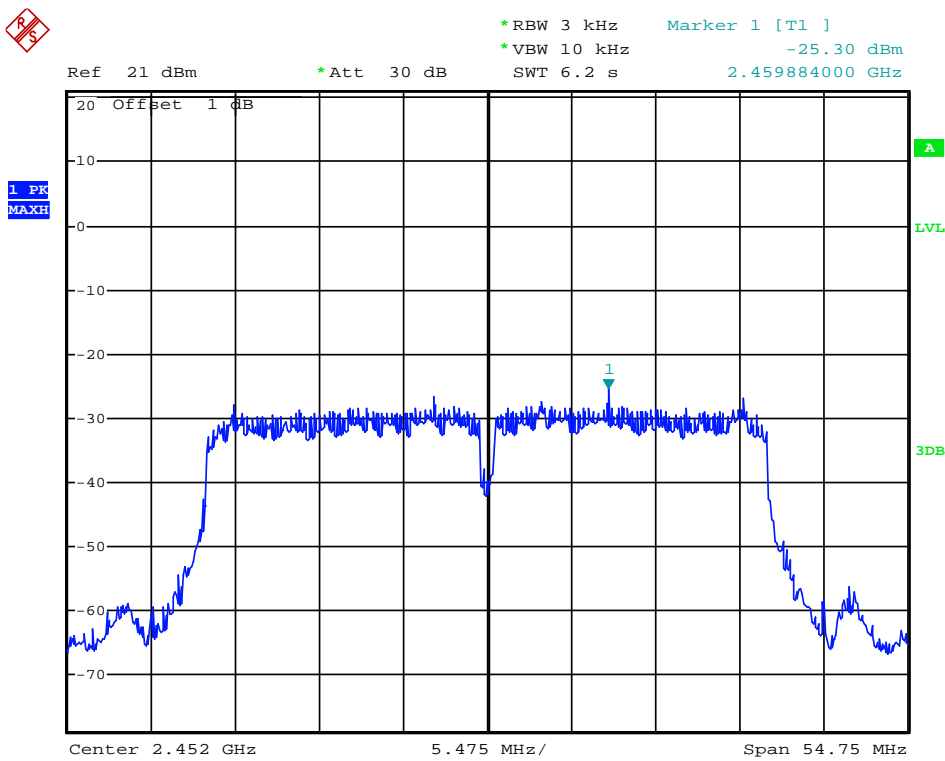

(Plot 4.4.4 C: Channel 6: 2452MHz @ 802.11n(40MHz))

4.5. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Compare the resultant electric field strength level to the applicable regulatory limit.
12. Perform radiated spurious emission test

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

Remark: The Bandedge was measured at difference data rate for each mode and recorded worst case for each mode.


4.5.1 802.11b Test Mode

A. Test Verdict


Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-49.01	0.00	0.00	46.25	Peak	74.00	Plot 4.5.1 A1
2390.00	-59.92	0.00	0.00	35.34	AV	54.00	Plot 4.5.1 A2
2413.20	4.56	0.00	0.00	99.82	Peak	---	Plot 4.5.1 A1
2411.28	-0.06	0.00	0.00	95.20	AV	---	Plot 4.5.1 A2
2463.10	5.08	0.00	0.00	100.34	Peak	---	Plot 4.5.1 A3
2461.30	0.59	0.00	0.00	95.85	AV	---	Plot 4.5.1 A4
2483.50	-48.54	0.00	0.00	46.72	Peak	74.00	Plot 4.5.1 A3
2483.50	-58.79	0.00	0.00	36.47	AV	54.00	Plot 4.5.1 A4

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
 2. The test results including the cable loss.
 3. "----" means that the fundamental frequency not for 15.209 limits requirement.


B. Test Plots

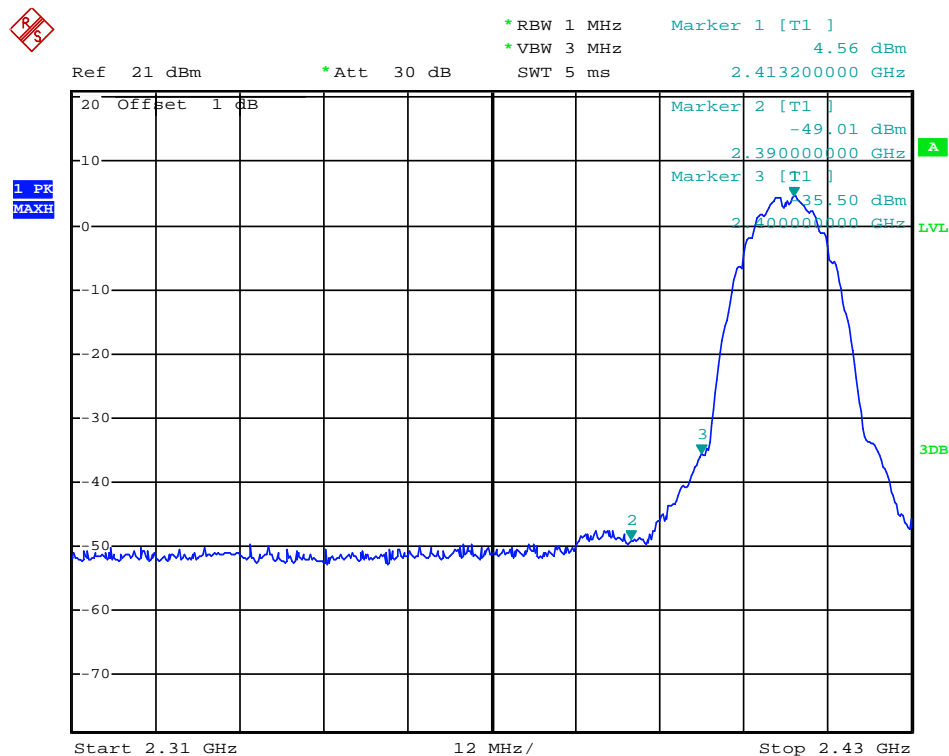


(Plot 4.5.1 A1: Channel 1: 2412MHz @ 802.11b)

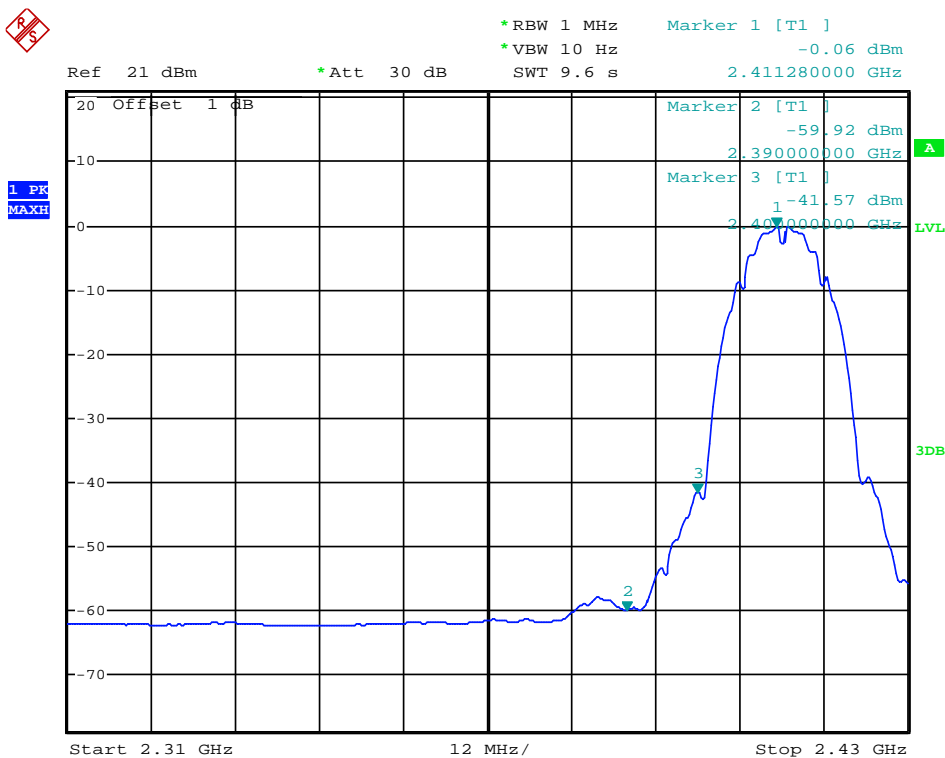

(Plot 4.5.1 A2: Channel 1: 2412MHz @ 802.11b)

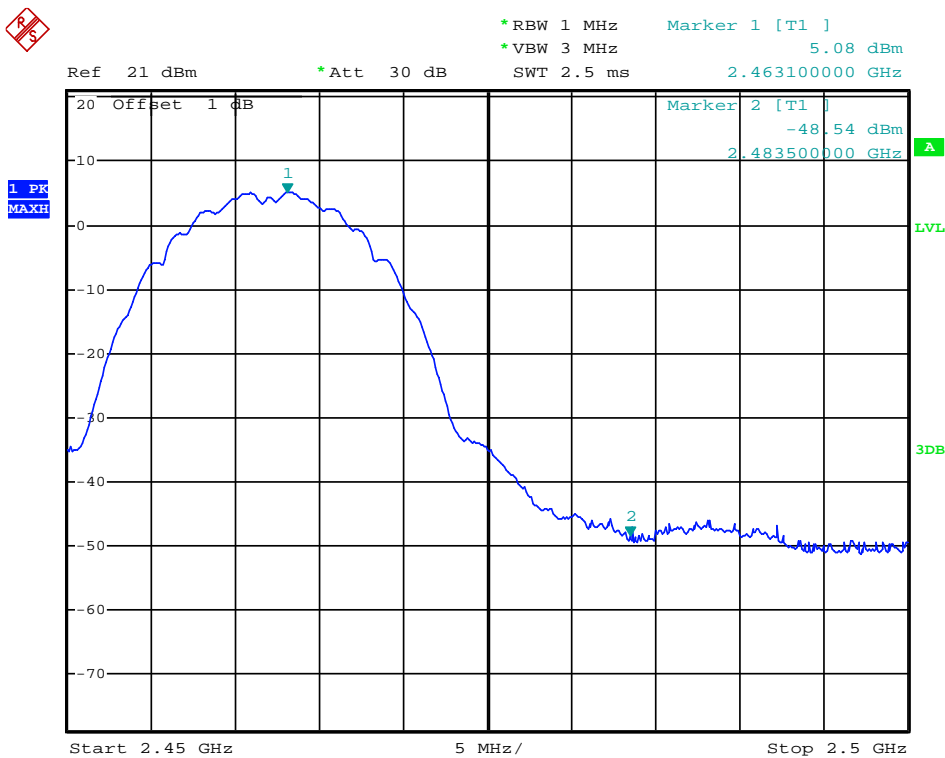

(Plot 4.5.1 A3: Channel 11: 2462MHz @ 802.11b)

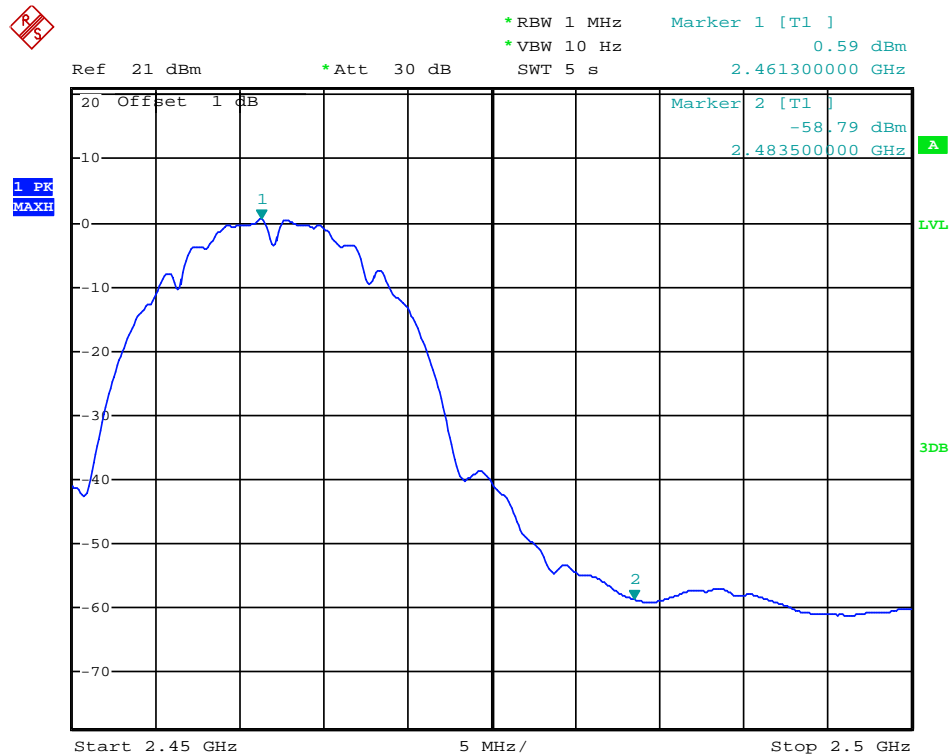

(Plot 4.5.1 A4: Channel 11: 2462MHz @ 802.11b)


4.5.2 802.11g Test Mode

A. Test Verdict


Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-48.21	0.00	0.00	47.05	Peak	74.00	Plot 4.5.2 A1
2390.00	-59.20	0.00	0.00	36.06	AV	54.00	Plot 4.5.2 A2
2408.88	0.28	0.00	0.00	95.54	Peak	---	Plot 4.5.2 A1
2416.32	-8.44	0.00	0.00	86.82	AV	---	Plot 4.5.2 A2
2458.60	0.97	0.00	0.00	96.23	Peak	---	Plot 4.5.2 A3
2466.20	-8.16	0.00	0.00	87.10	AV	---	Plot 4.5.2 A4
2483.50	-49.62	0.00	0.00	45.64	Peak	74.00	Plot 4.5.2 A3
2483.50	-59.31	0.00	0.00	35.95	AV	54.00	Plot 4.5.2 A4

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
 2. The test results including the cable loss.
 3. "—" means that the fundamental frequency not for 15.209 limits requirement.


B. Test Plots

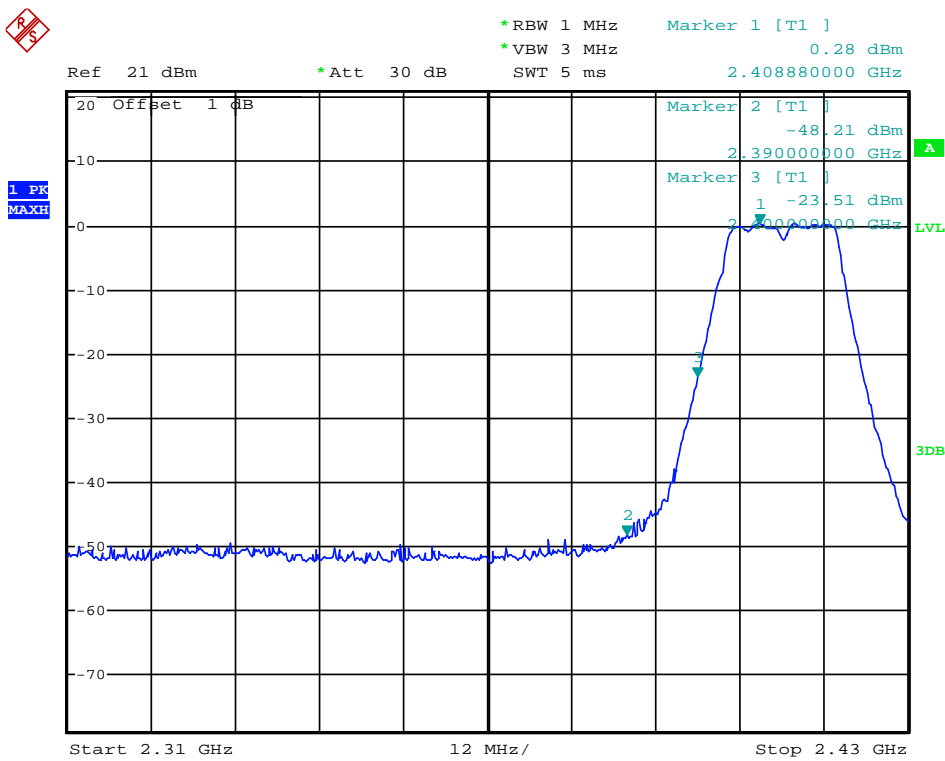


(Plot 4.5.2 A1: Channel 1: 2412MHz @ 802.11g)

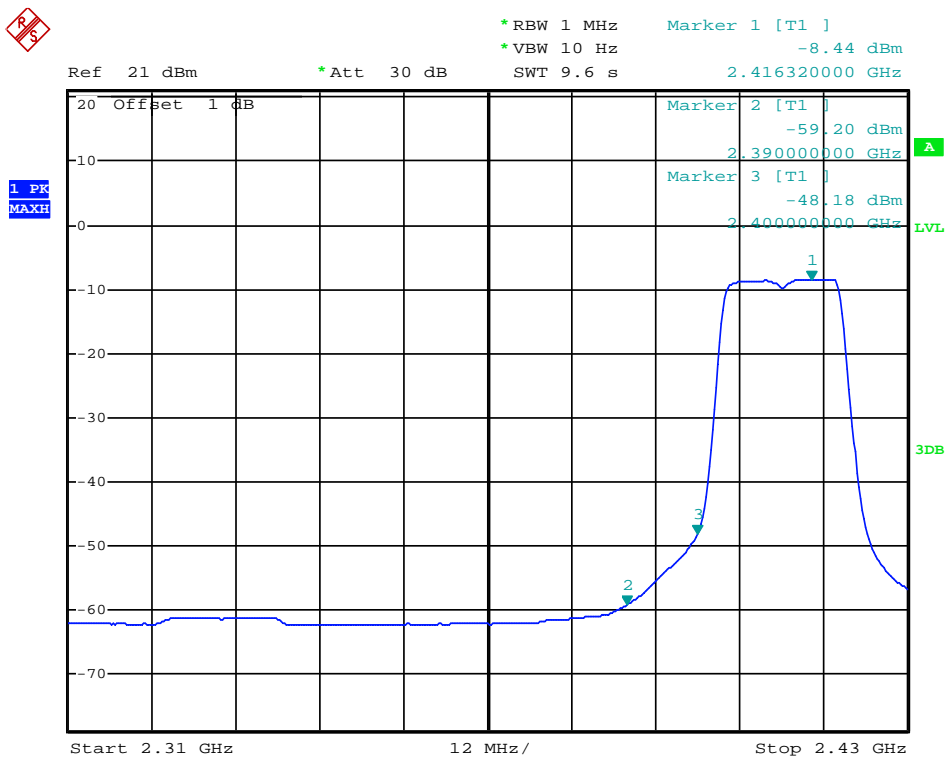

(Plot 4.5.2 A2: Channel 1: 2412MHz @ 802.11g)

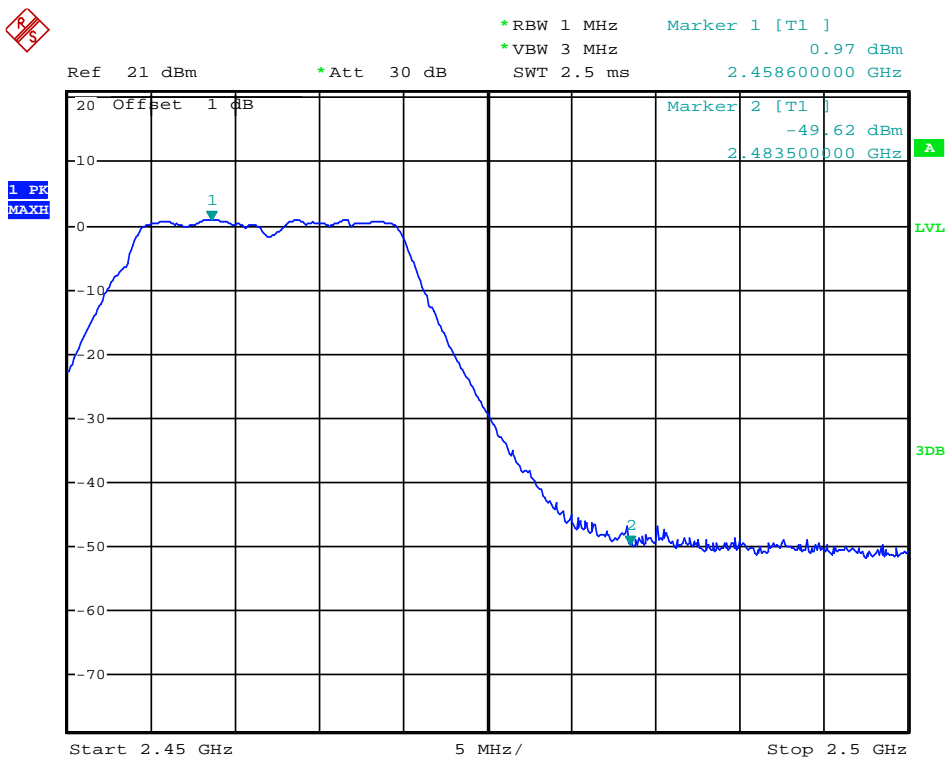

(Plot 4.5.2 A3: Channel 11: 2462MHz @ 802.11g)

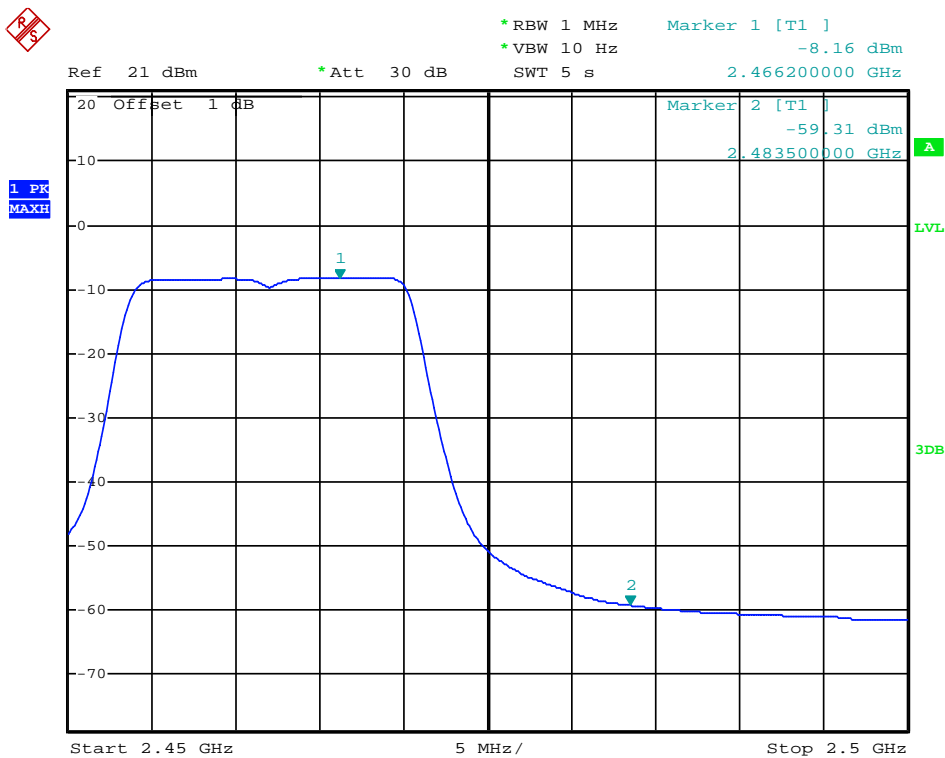

(Plot 4.5.2 A4: Channel 11: 2462MHz @ 802.11g)


4.5.3 802.11n(20MHz) Test Mode

A. Test Verdict


Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-44.74	0.00	0.00	50.52	Peak	74.00	Plot 4.5.3 A1
2390.00	-58.52	0.00	0.00	36.74	AV	54.00	Plot 4.5.3 A2
2415.12	0.37	0.00	0.00	95.63	Peak	---	Plot 4.5.3 A1
2417.52	-8.75	0.00	0.00	86.51	AV	---	Plot 4.5.3 A2
2465.30	0.97	0.00	0.00	96.23	Peak	---	Plot 4.5.3 A3
2465.20	-8.47	0.00	0.00	86.79	AV	---	Plot 4.5.3 A4
2483.50	-48.99	0.00	0.00	46.27	Peak	74.00	Plot 4.5.3 A3
2483.50	-59.05	0.00	0.00	36.21	AV	54.00	Plot 4.5.3 A4

Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.
 2. The test results including the cable loss.
 3. "----" means that the fundamental frequency not for 15.209 limits requirement.


B. Test Plots

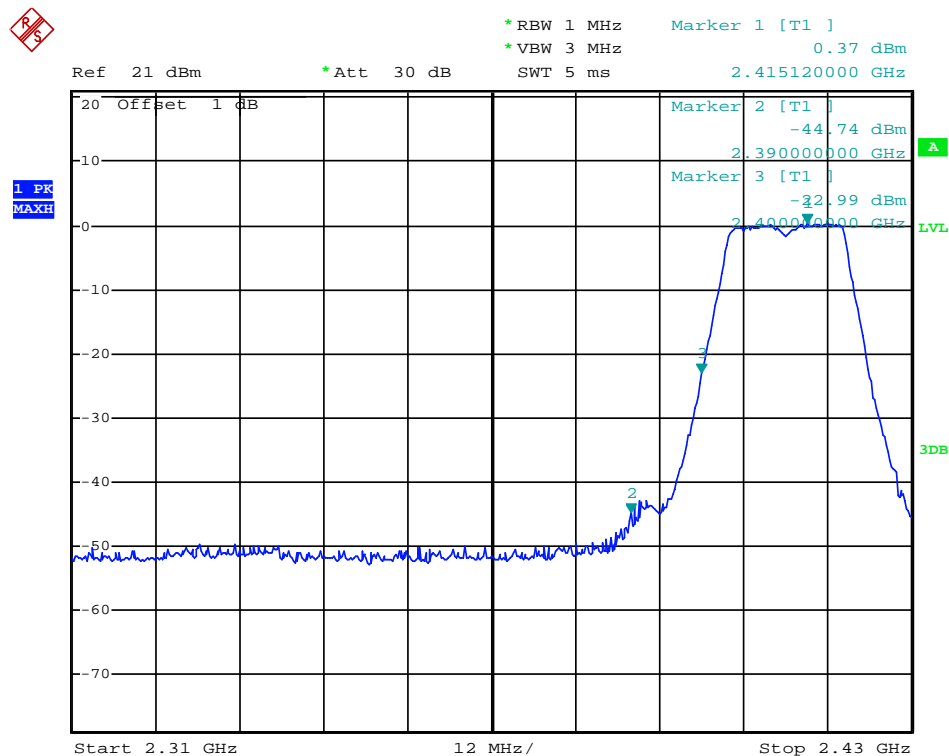


(Plot 4.5.3 A1: Channel 1: 2412MHz @ 802.11n(20MHz))

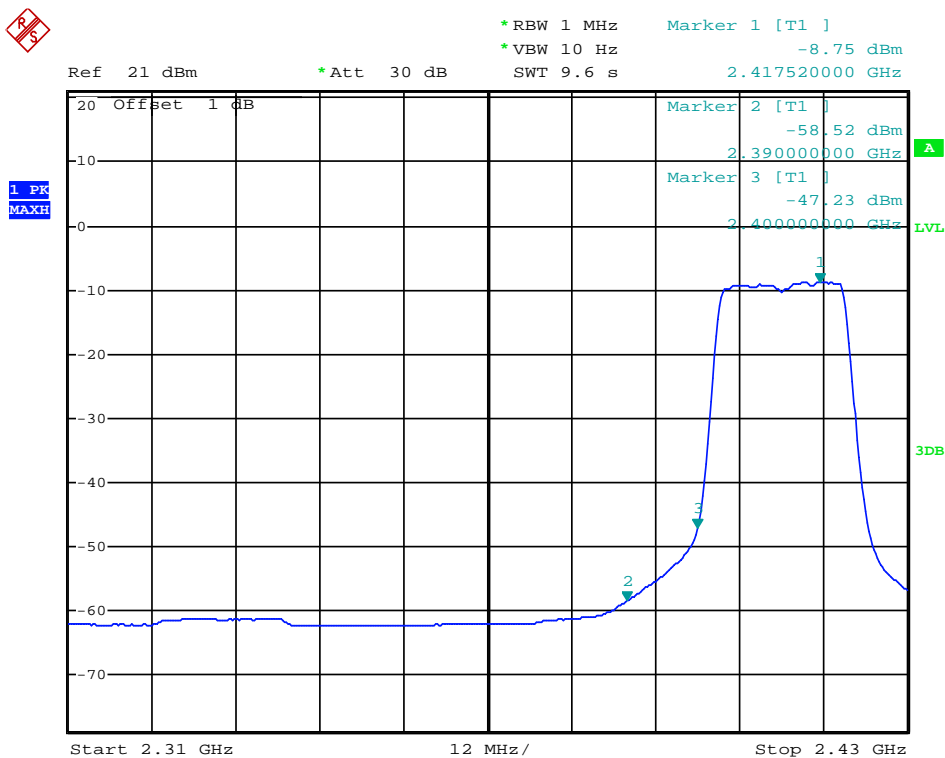

(Plot 4.5.3 A2: Channel 1: 2412MHz @ 802.11n(20MHz))

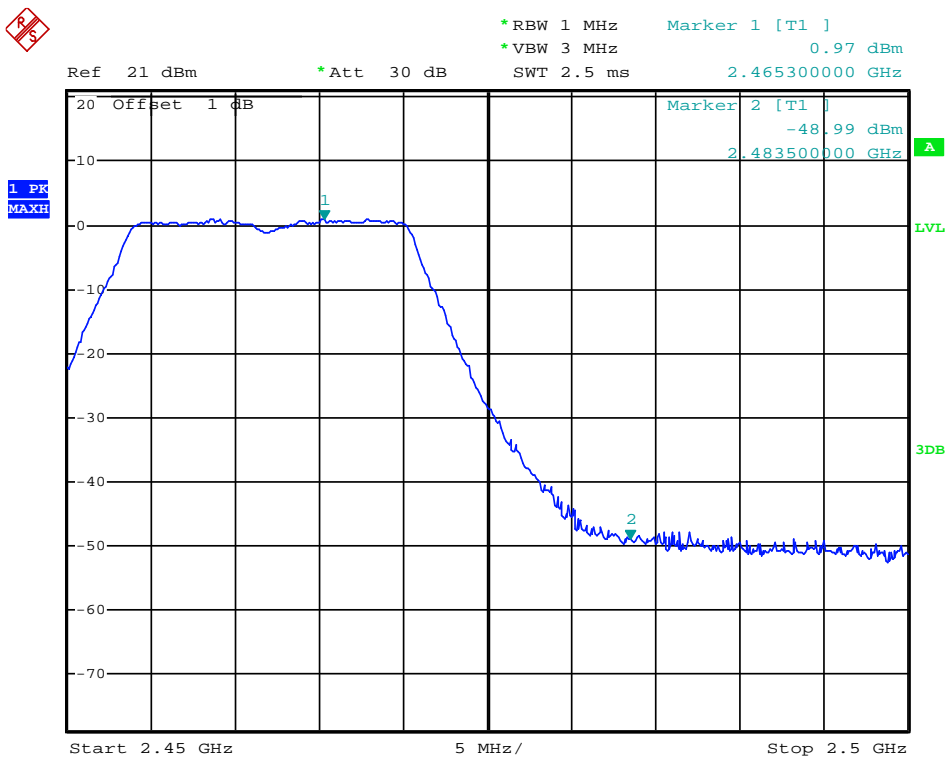

(Plot 4.5.3 A3: Channel 11: 2462MHz @ 802.11n(20MHz))

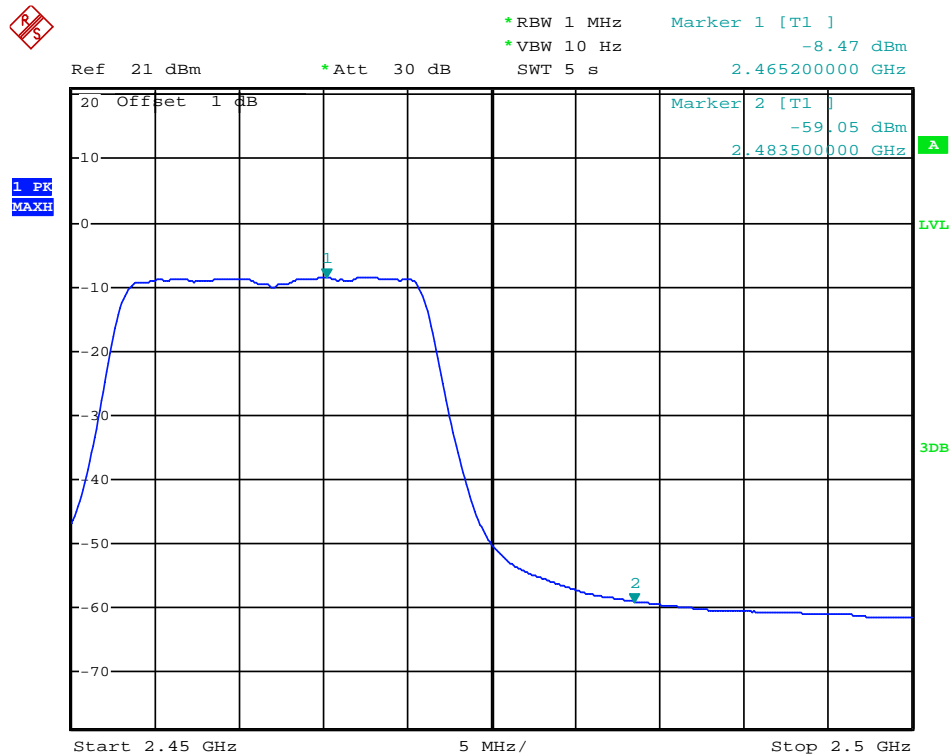

(Plot 4.5.3 A4: Channel 11: 2462MHz @ 802.11n(20MHz))


4.5.4 802.11n(40MHz) Test Mode

A. Test Verdict


Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Refer to Plot
2390.00	-47.19	0.00	0.00	48.07	Peak	74.00	Plot 4.5.4 A1
2390.00	-56.92	0.00	0.00	38.34	AV	54.00	Plot 4.5.4 A2
2429.28	-2.72	0.00	0.00	92.54	Peak	---	Plot 4.5.4 A1
2431.52	-11.68	0.00	0.00	83.58	AV	---	Plot 4.5.4 A2
2459.40	-2.73	0.00	0.00	92.53	Peak	---	Plot 4.5.4 A3
2461.22	-11.85	0.00	0.00	83.41	AV	---	Plot 4.5.4 A4
2483.50	-48.77	0.00	0.00	46.49	Peak	74.00	Plot 4.5.4 A3
2483.50	-59.15	0.00	0.00	36.11	AV	54.00	Plot 4.5.4 A4

Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.
2.The test results including the cable loss.
3. “---” means that the fundamental frequency not for 15.209 limits requirement.


B. Test Plots

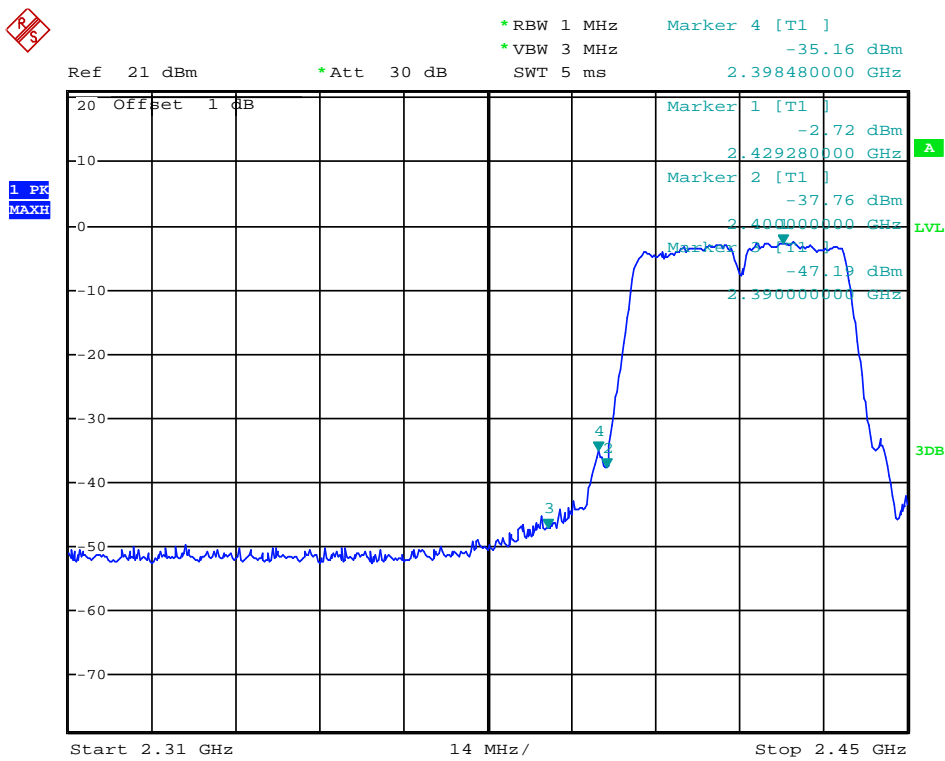


(Plot 4.5.4 A1: Channel 3: 2422MHz @ 802.11n(40MHz))

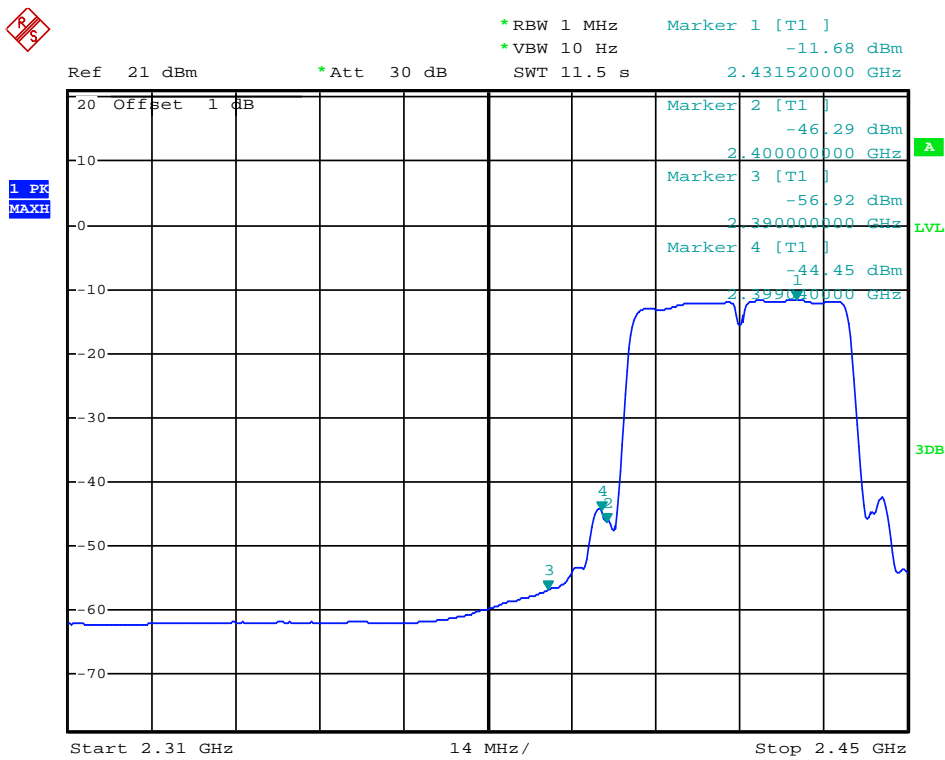

(Plot 4.5.4 A2: Channel 3: 2422MHz @ 802.11n(40MHz))

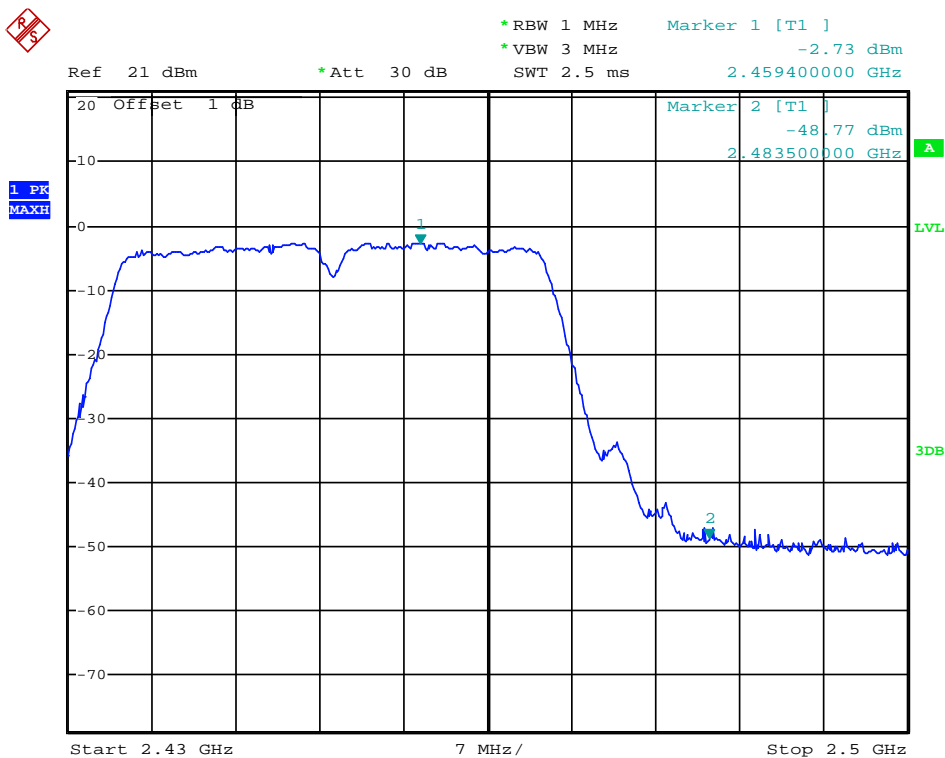


(Plot 4.5.4 A3: Channel 9: 2452MHz @ 802.11n(40MHz))

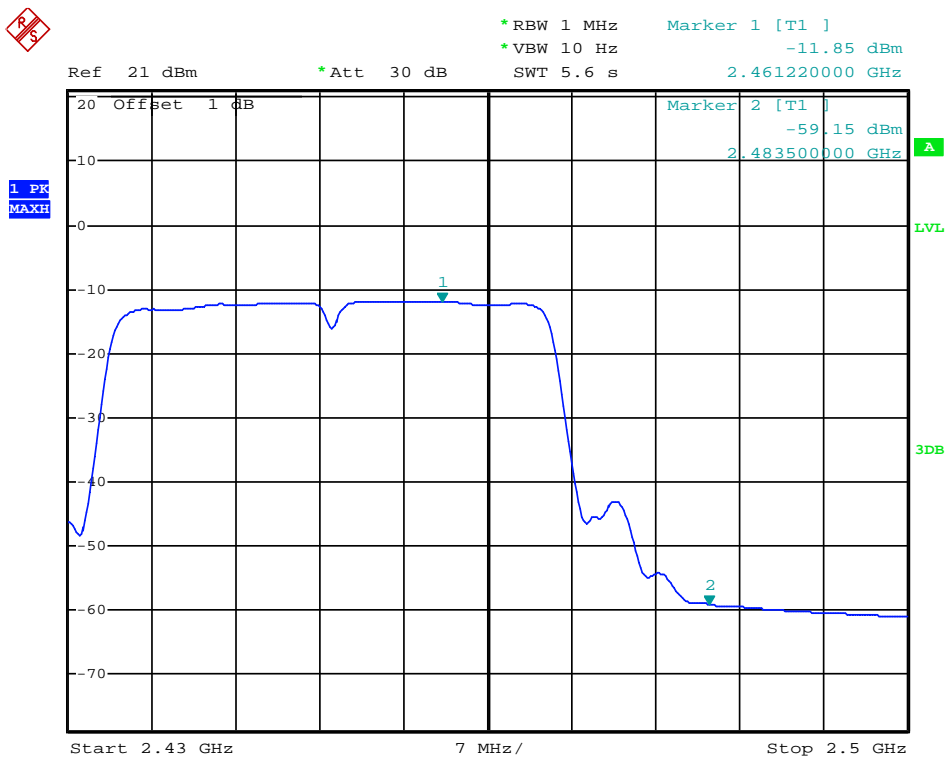

(Plot 4.5.4 A4: Channel 9: 2452MHz @ 802.11n(40MHz))

4.6. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength, and measure frequency range from 30MHz to 26.5GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

4.6.1 802.11b Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
1	2412	Plot 4.6.1 A1	-30	PASS
		Plot 4.6.1 A2		
		Plot 4.6.1 A3		
		Plot 4.6.1 A4		
6	2437	Plot 4.6.1 B1	-30	PASS
		Plot 4.6.1 B2		
		Plot 4.6.1 B3		
		Plot 4.6.1 B4		
11	2462	Plot 4.6.1 C1	-30	PASS
		Plot 4.6.1 C2		
		Plot 4.6.1 C3		
		Plot 4.6.1 C4		


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-48.43	Peak	-30	Plot 4.6.1 D	PASS
2483.50	-49.54	Peak	-30	Plot 4.6.1 E	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots

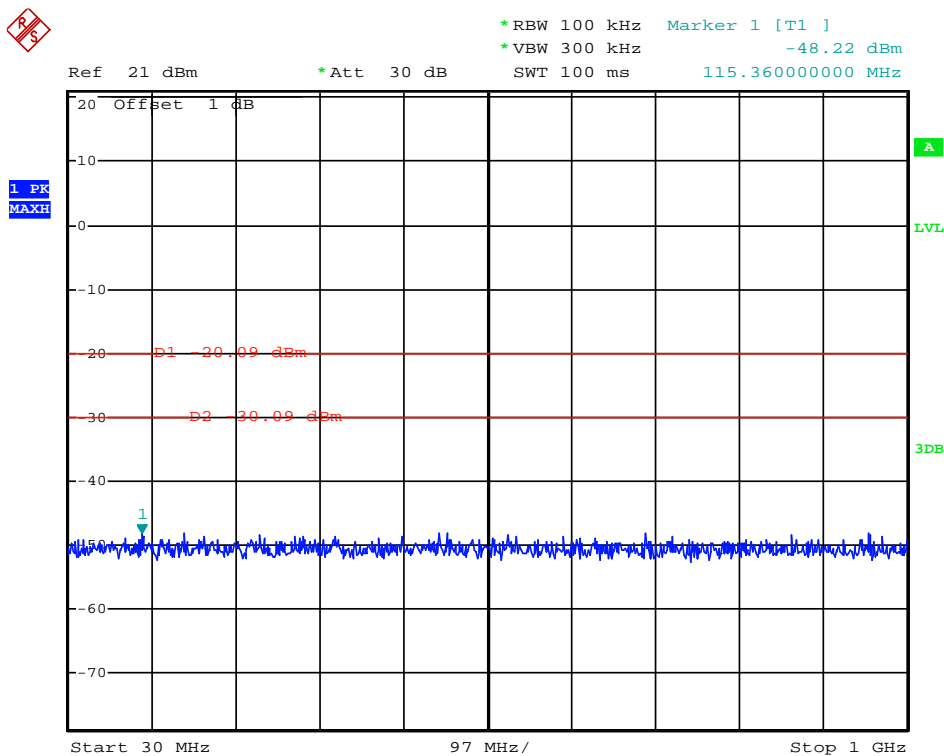


(Plot 4.6.1 A1: Channel 1: 2412MHz @ 802.11b)

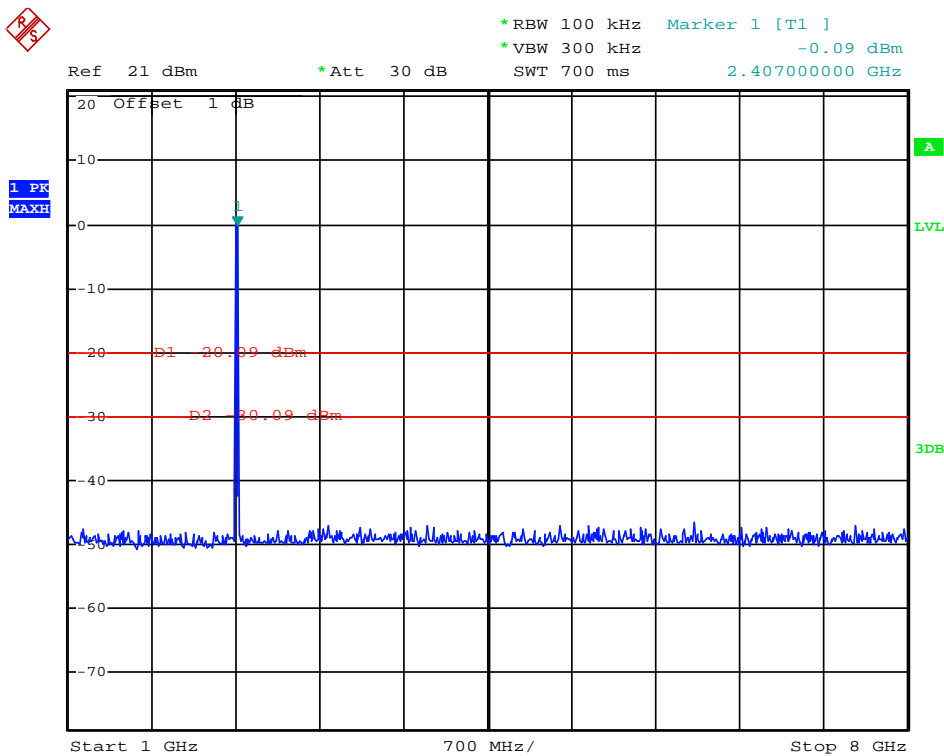


(Plot 4.6.1 A2: Channel 1: 2412MHz @ 802.11b)

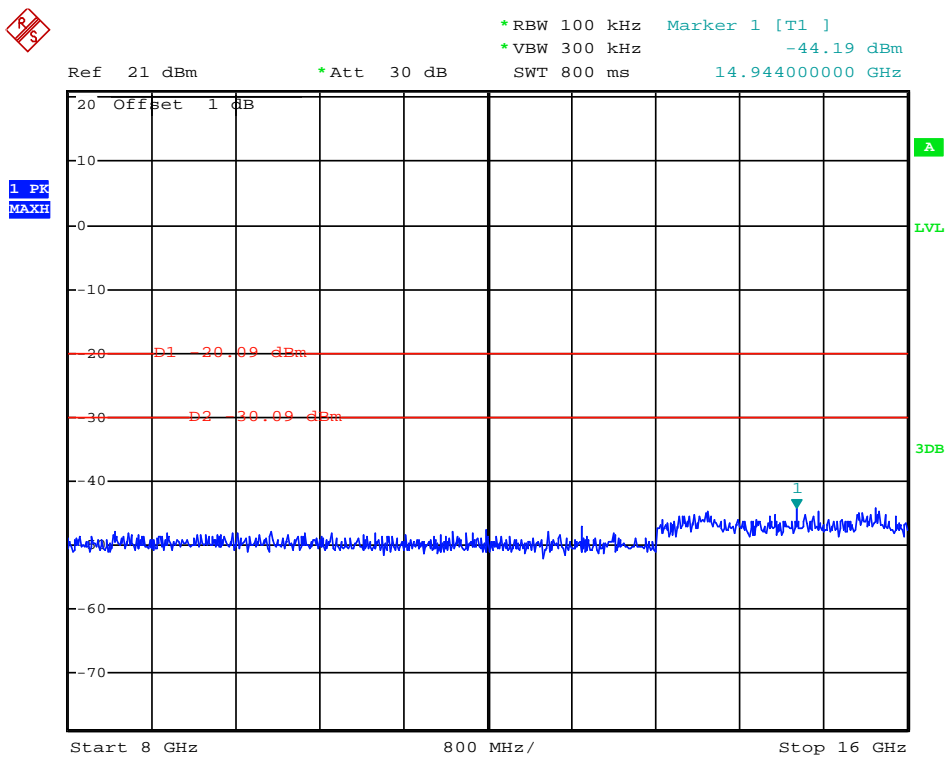


(Plot 4.6.1 A3: Channel 1: 2412MHz @ 802.11b)

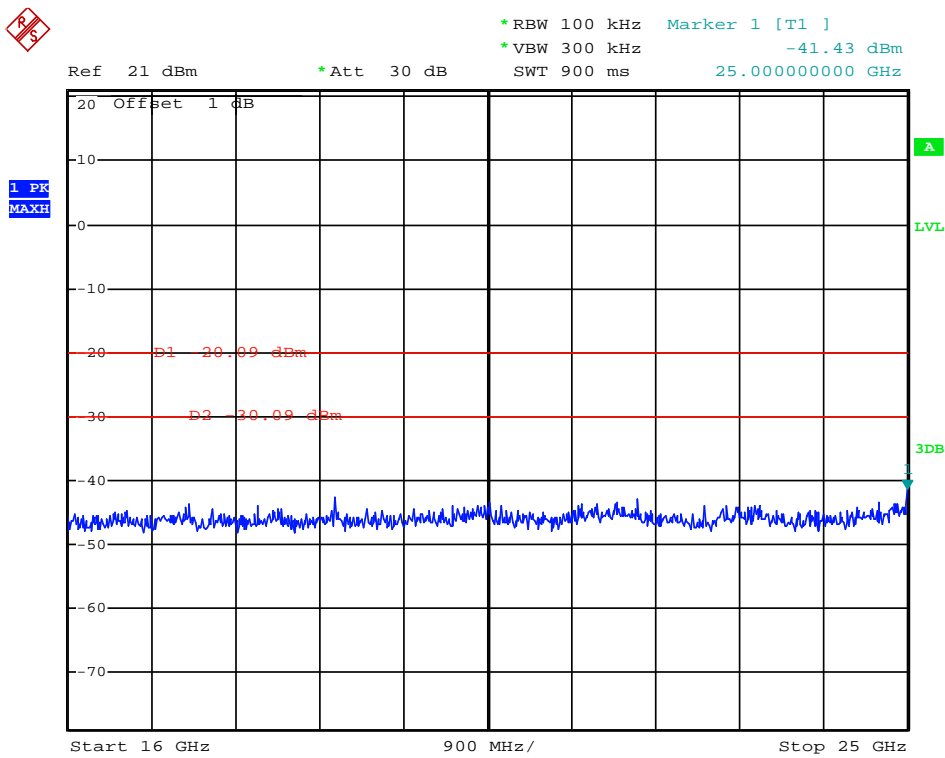


(Plot 4.6.1 A4: Channel 1: 2412MHz @ 802.11b)

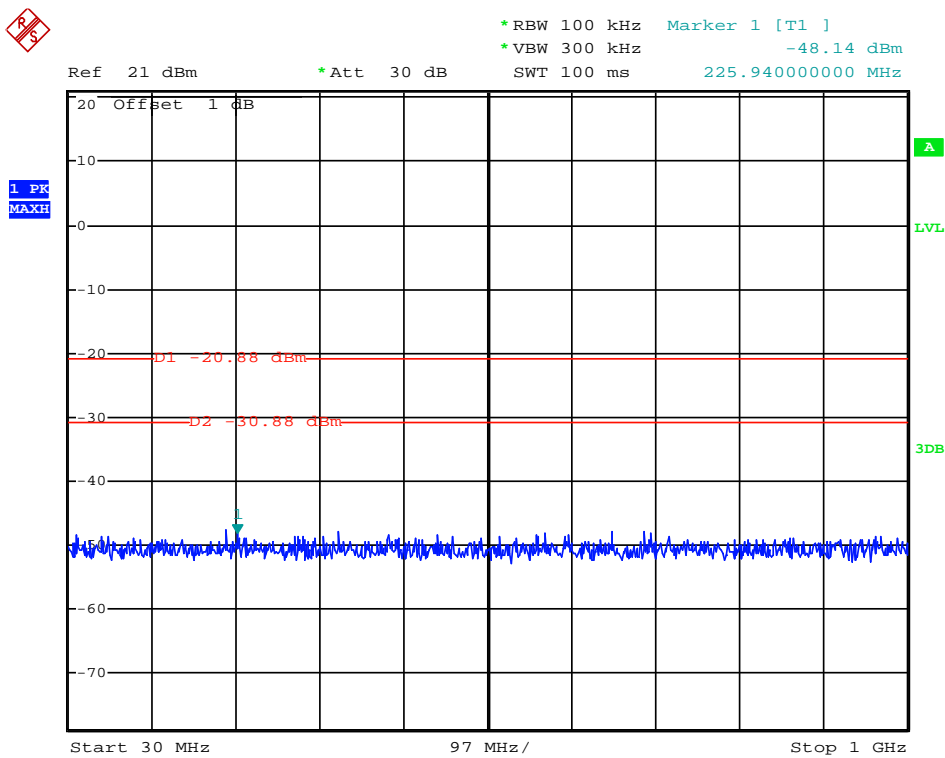


(Plot 4.6.1 B1: Channel 6: 2437MHz @ 802.11b)

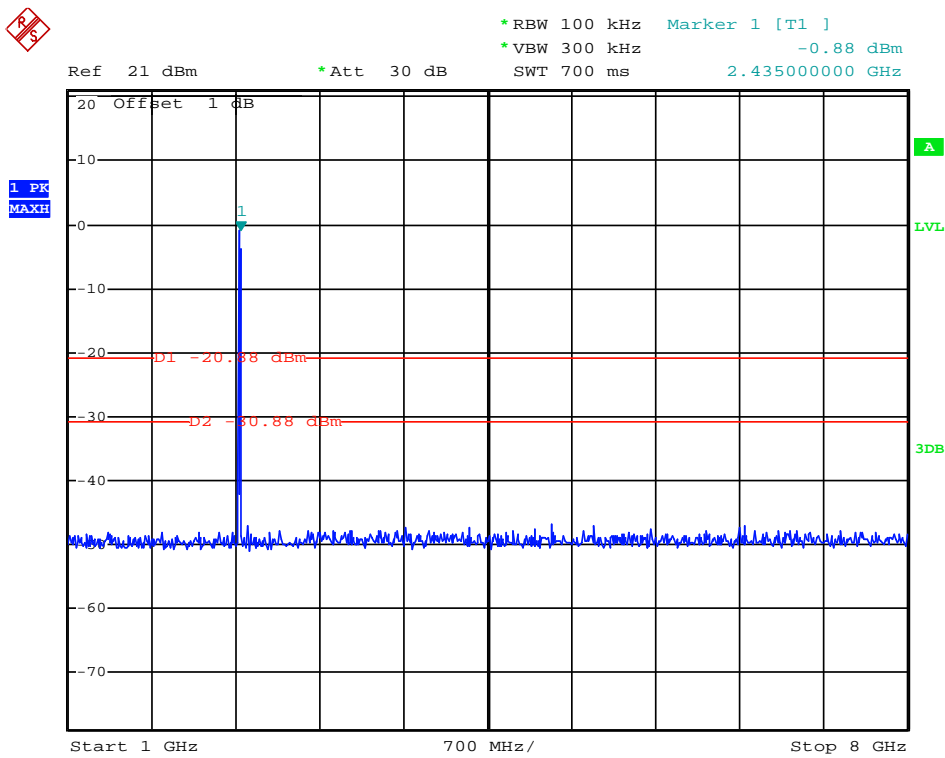


(Plot 4.6.1 B2: Channel 6: 2437MHz @ 802.11b)

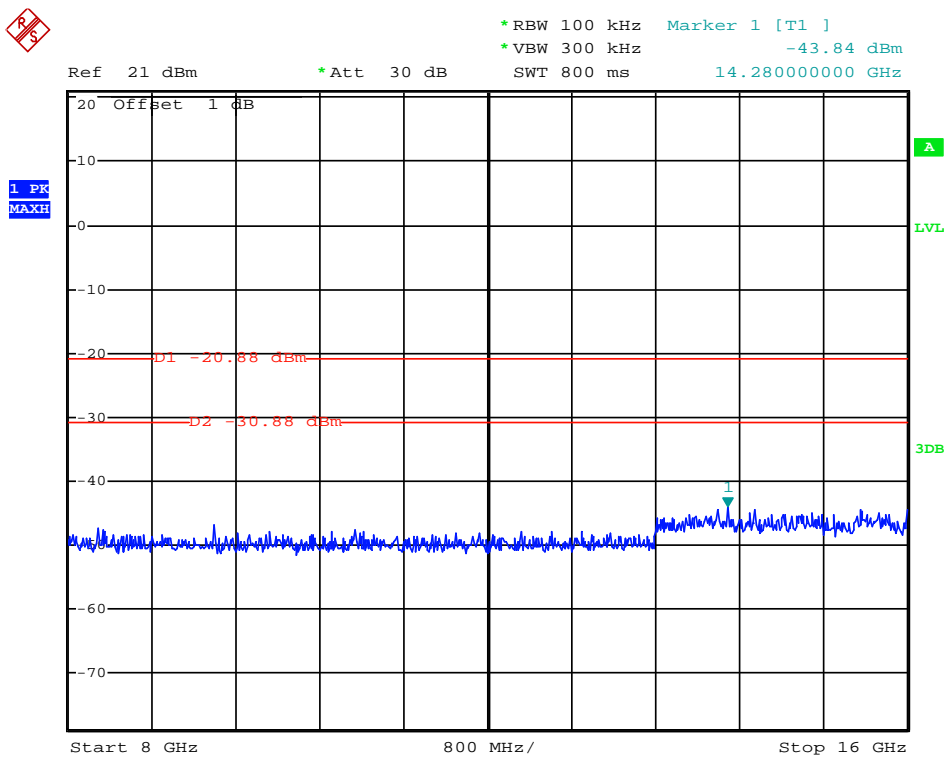


(Plot 4.6.1 B3: Channel 6: 2437MHz @ 802.11b)

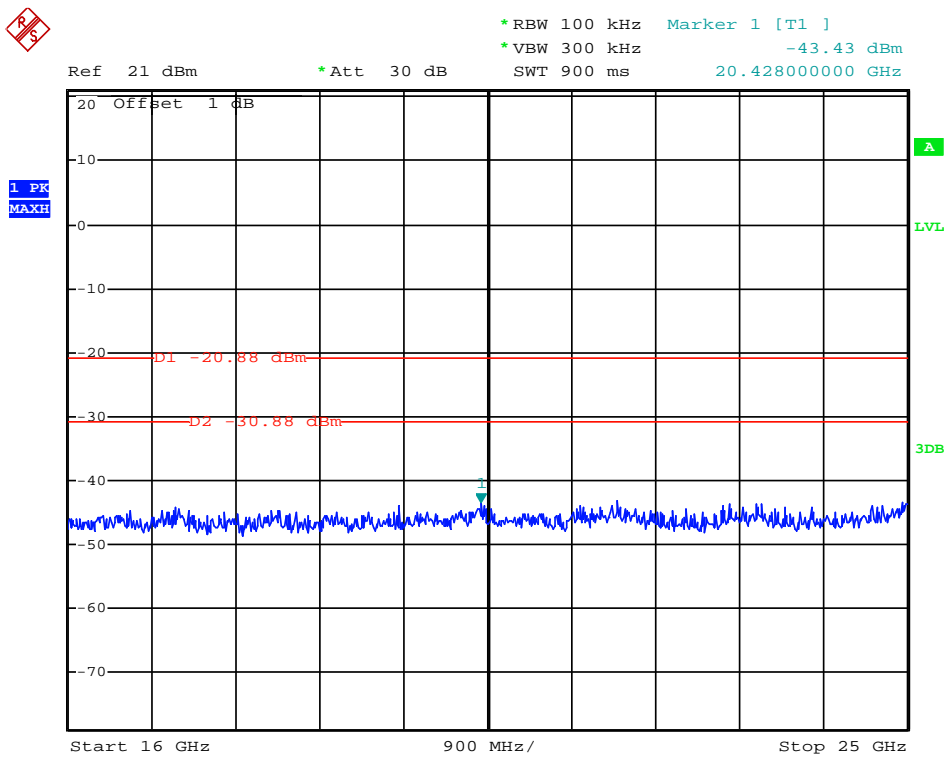


(Plot 4.6.1 B4: Channel 6: 2437MHz @ 802.11b)

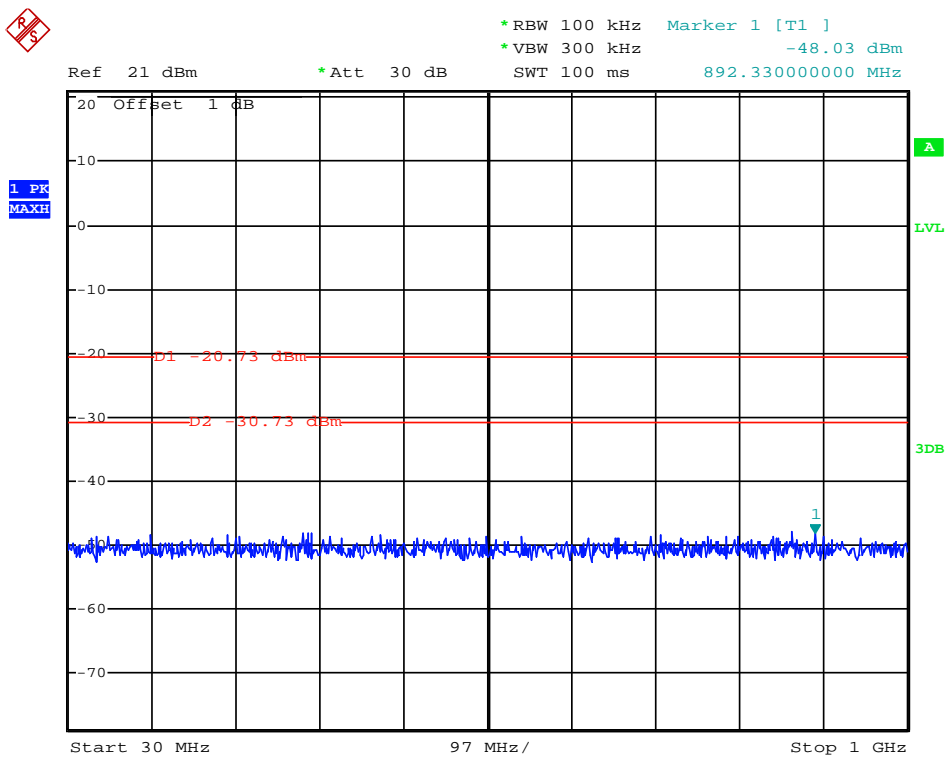


(Plot 4.6.1 C1: Channel 11: 2462MHz @ 802.11b)

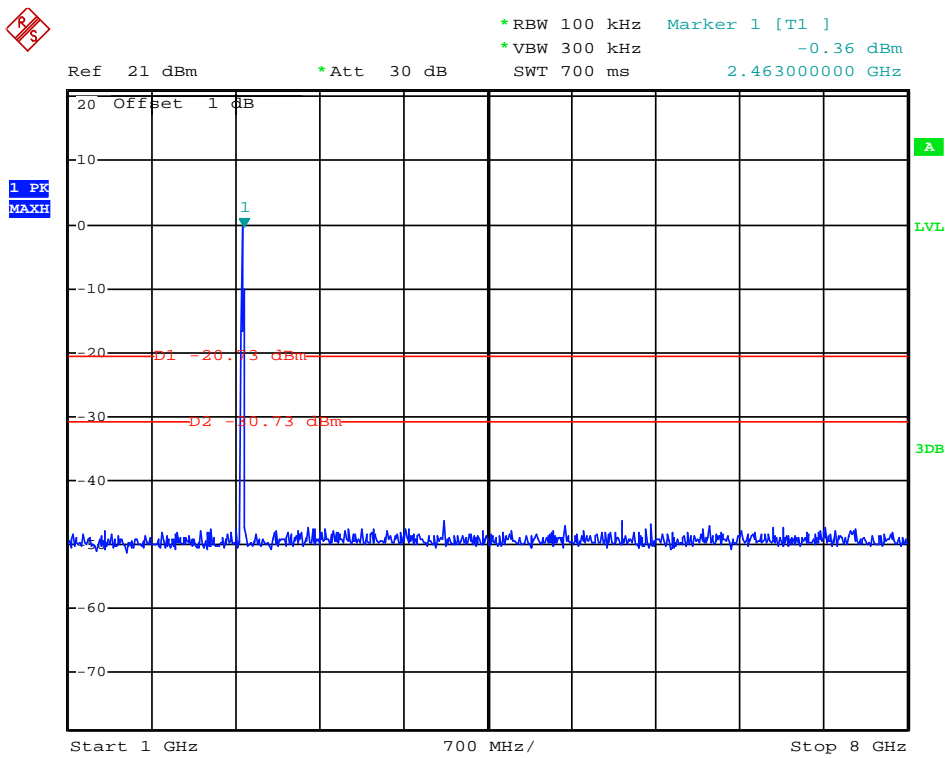


(Plot 4.6.1 C2: Channel 11: 2462MHz @ 802.11b)

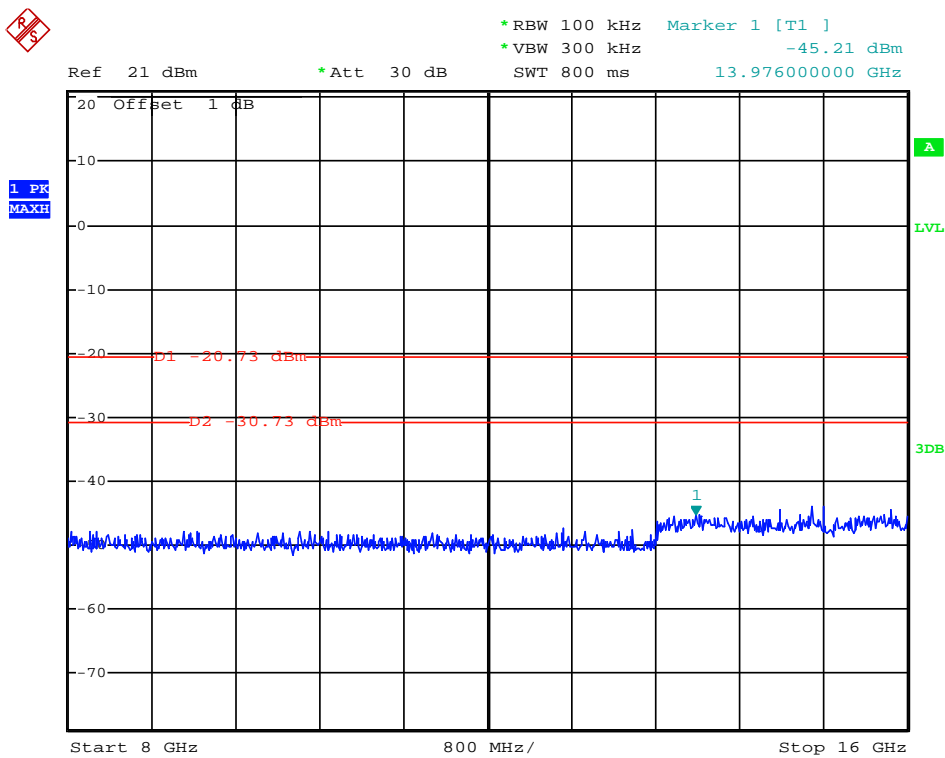


(Plot 4.6.1 C3: Channel 11: 2462MHz @ 802.11b)

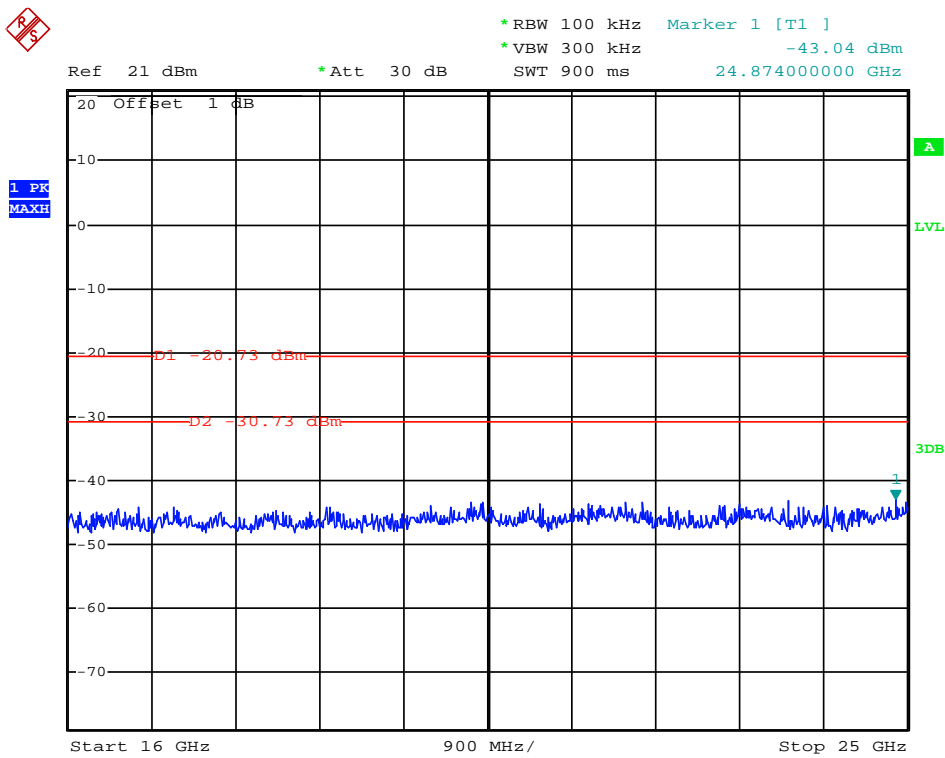

(Plot 4.6.1 C4: Channel 11: 2462MHz @ 802.11b)

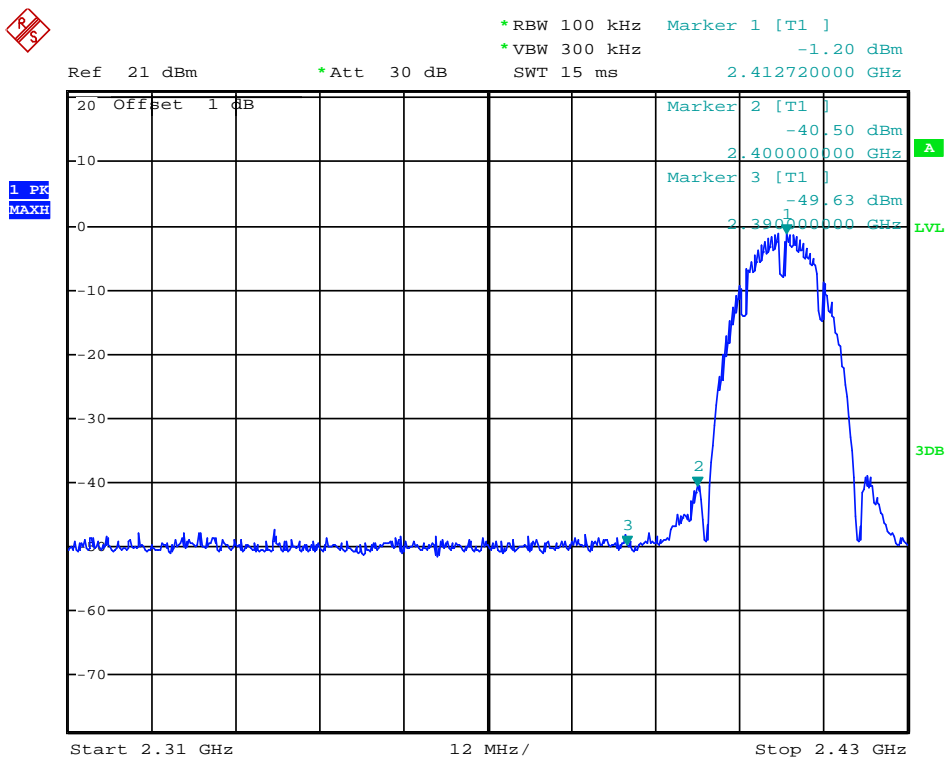

(Plot 4.6.1 D: Channel 1: 2412MHz @ 802.11b)

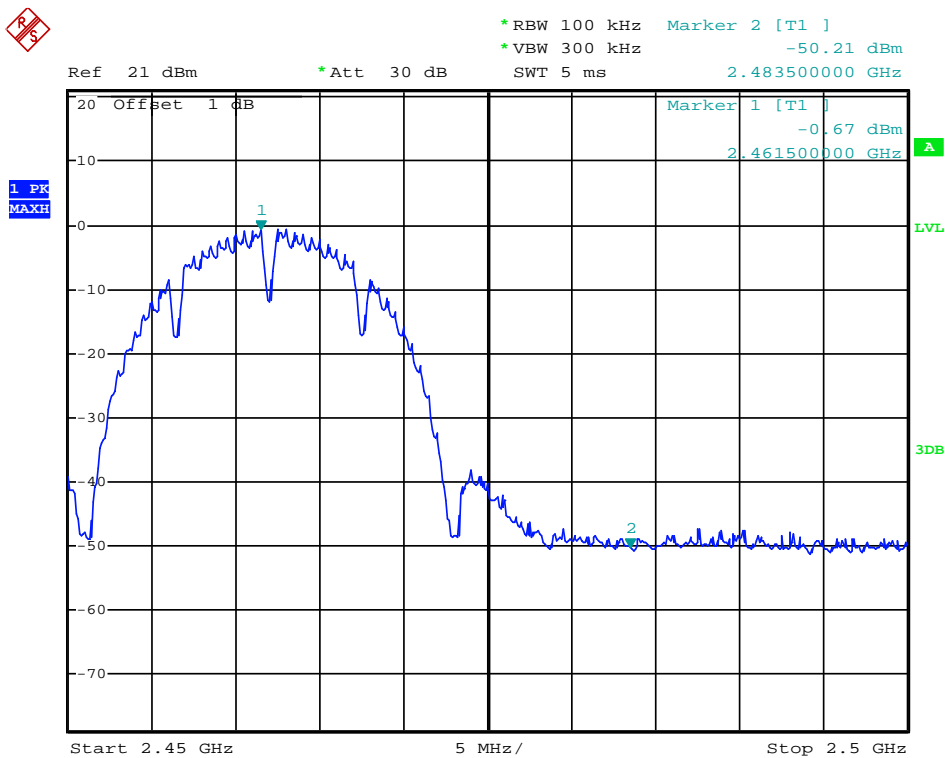

(Plot 4.6.1 E: Channel 11: 2462MHz @ 802.11b)

4.6.2 802.11g Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
1	2412	Plot 4.6.1 A1	-30	PASS
		Plot 4.6.1 A2		
		Plot 4.6.1 A3		
		Plot 4.6.1 A4		
6	2437	Plot 4.6.1 B1	-30	PASS
		Plot 4.6.1 B2		
		Plot 4.6.1 B3		
		Plot 4.6.1 B4		
11	2462	Plot 4.6.1 C1	-30	PASS
		Plot 4.6.1 C2		
		Plot 4.6.1 C3		
		Plot 4.6.1 C4		


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-37.46	Peak	-30	Plot 4.6.2 D	PASS
2483.50	-39.31	Peak	-30	Plot 4.6.2 E	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
 2. The test results including the cable lose.


B. Test Plots

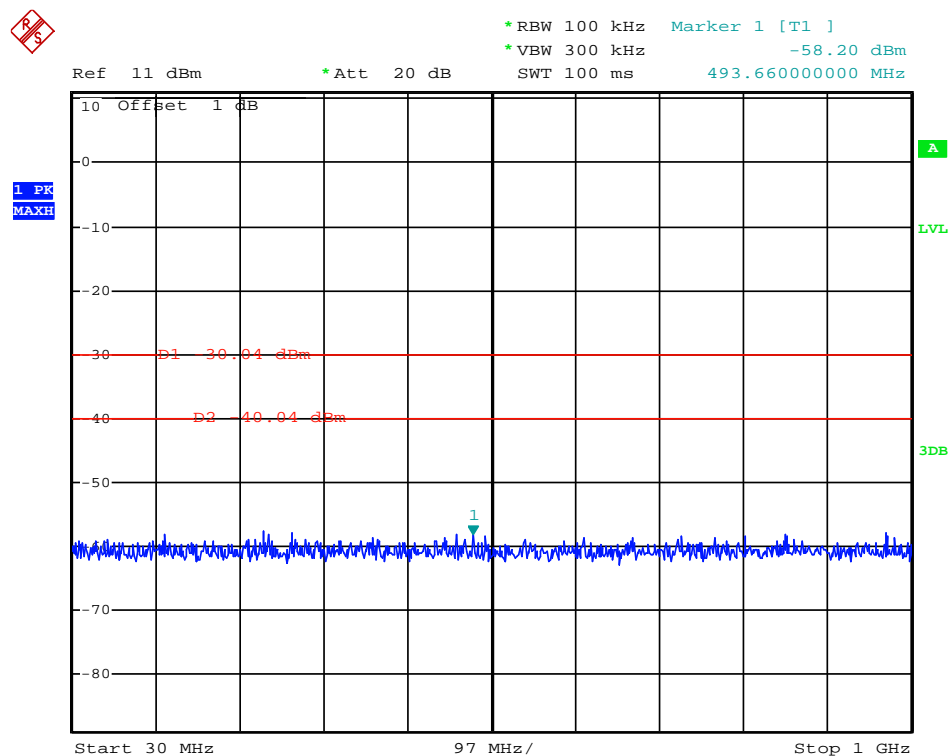


(Plot 4.6.2 A1: Channel 1: 2412MHz @ 802.11g)

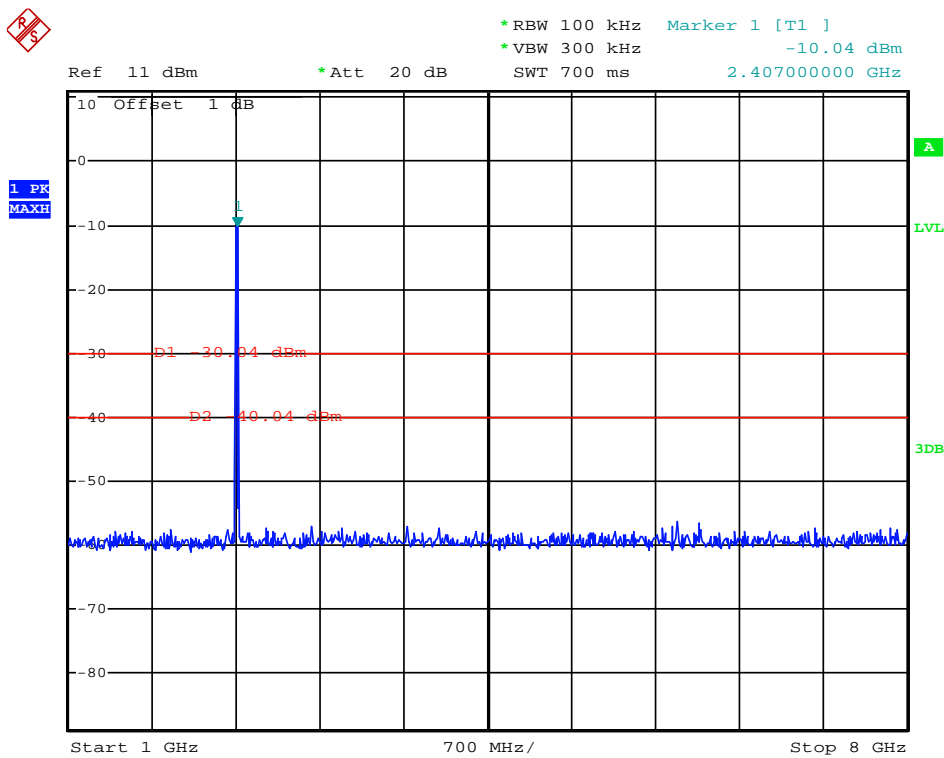


(Plot 4.6.2 A2: Channel 2: 2412MHz @ 802.11g)

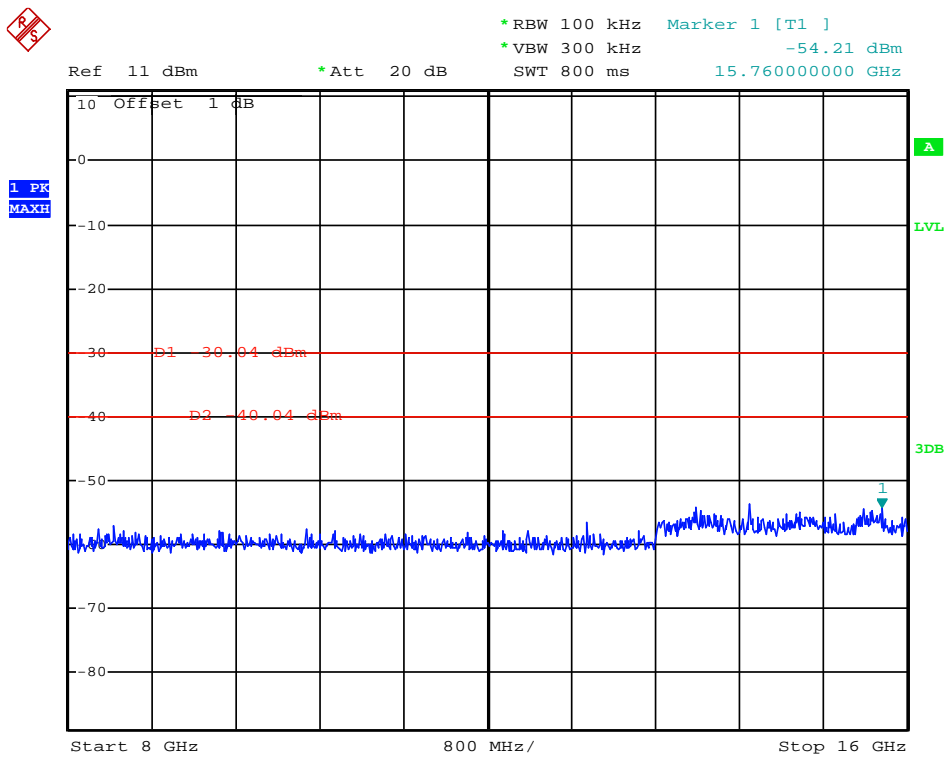


(Plot 4.6.2 A3: Channel 1: 2412MHz @ 802.11g)

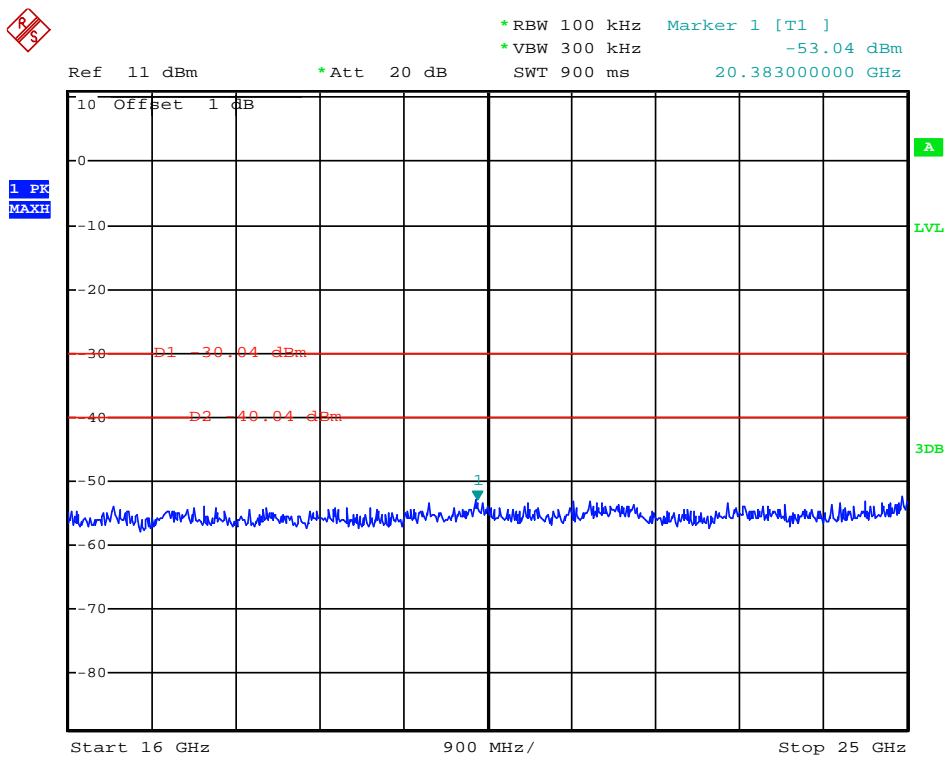


(Plot 4.6.2 A4: Channel 1: 2412MHz @ 802.11g)

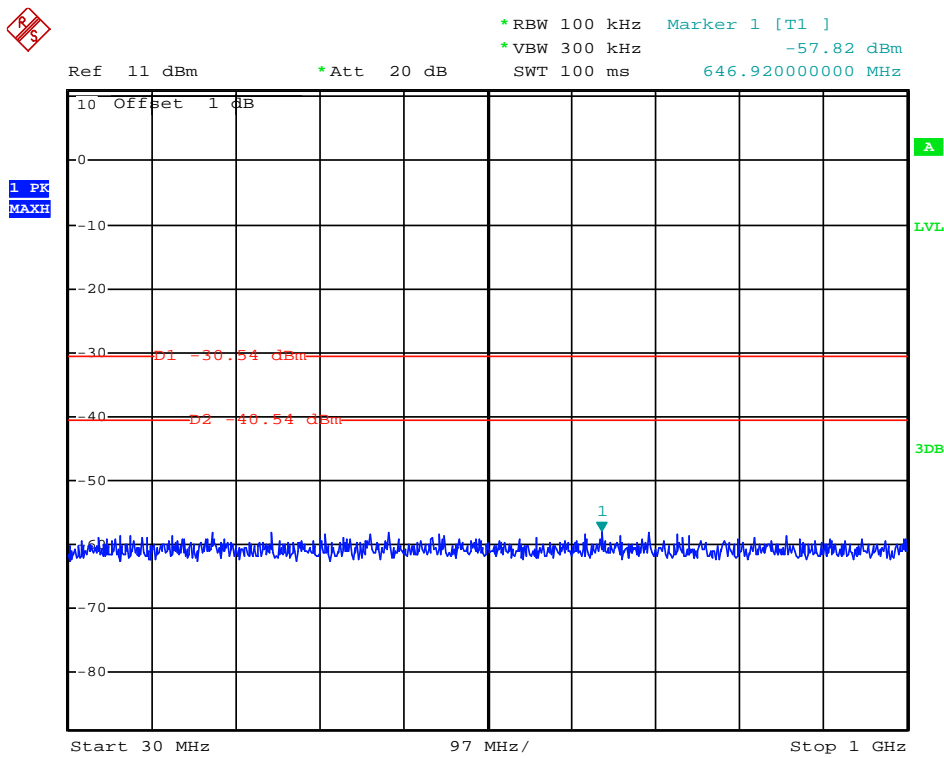


(Plot 4.6.2 B1: Channel 6: 2437MHz @ 802.11g)

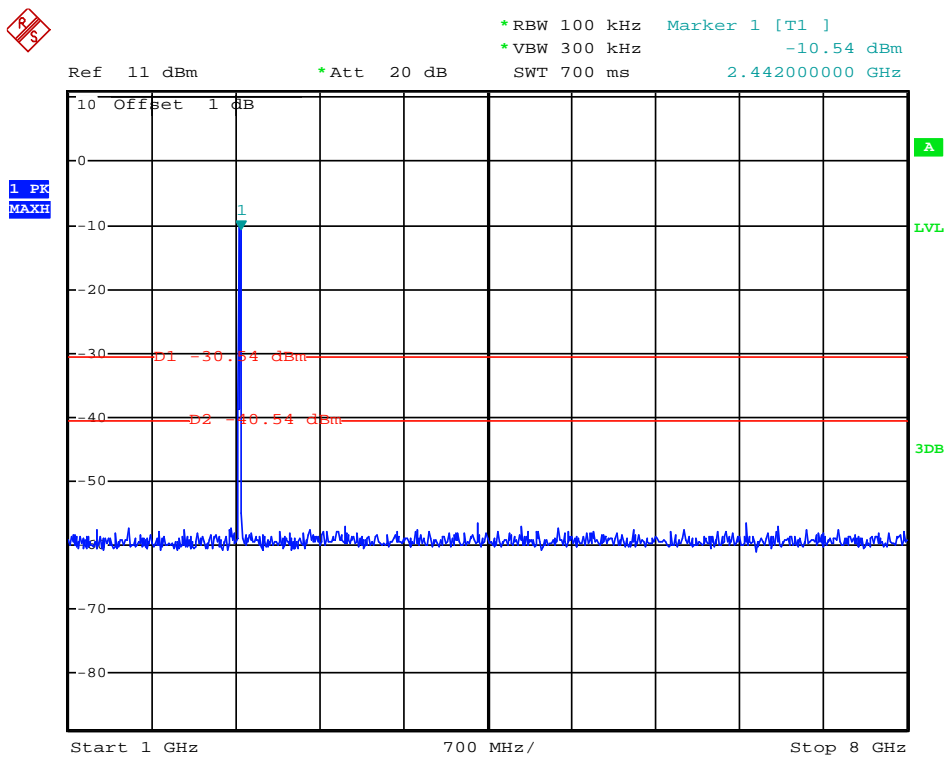


(Plot 4.6.2 B2: Channel 6: 2437MHz @ 802.11g)

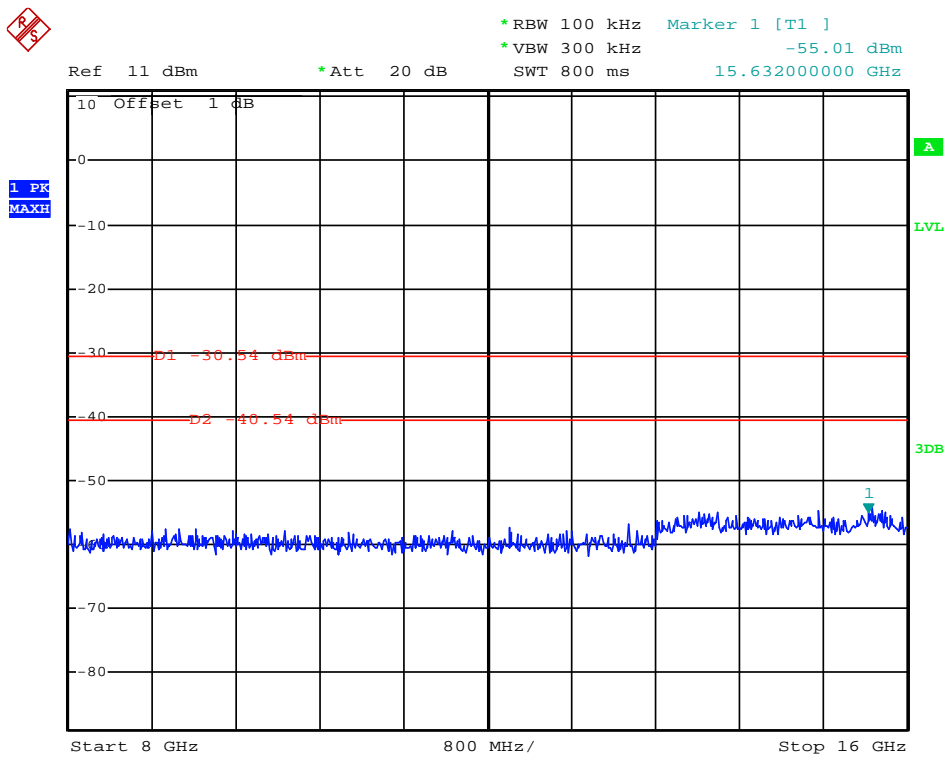


(Plot 4.6.2 B3: Channel 6: 2437MHz @ 802.11g)

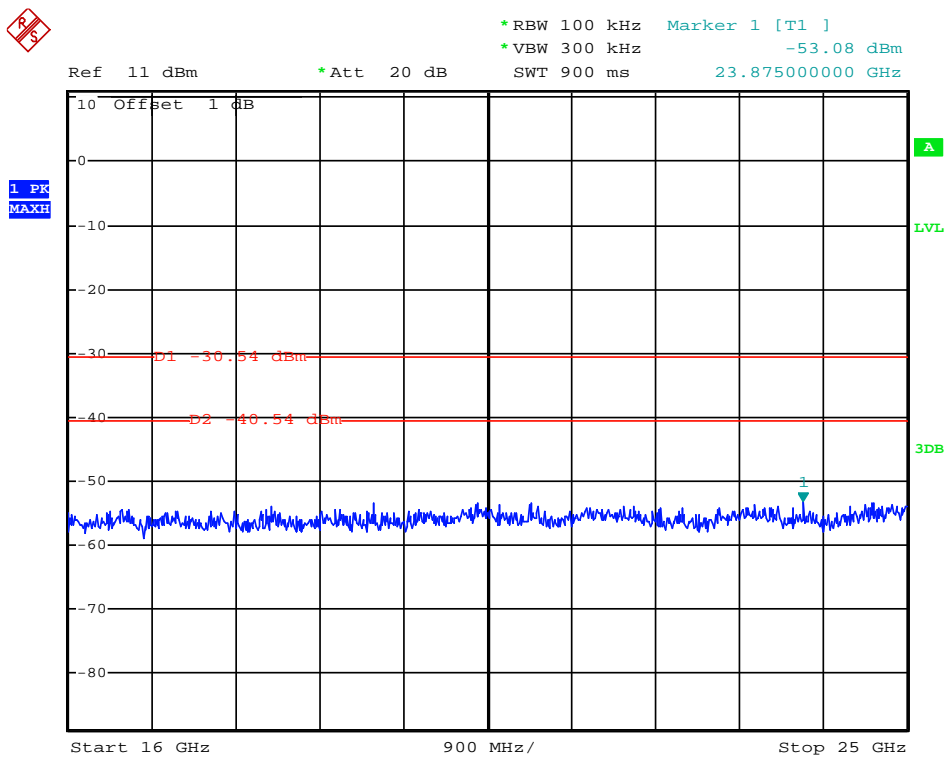


(Plot 4.6.2 B4: Channel 6: 2437MHz @ 802.11g)

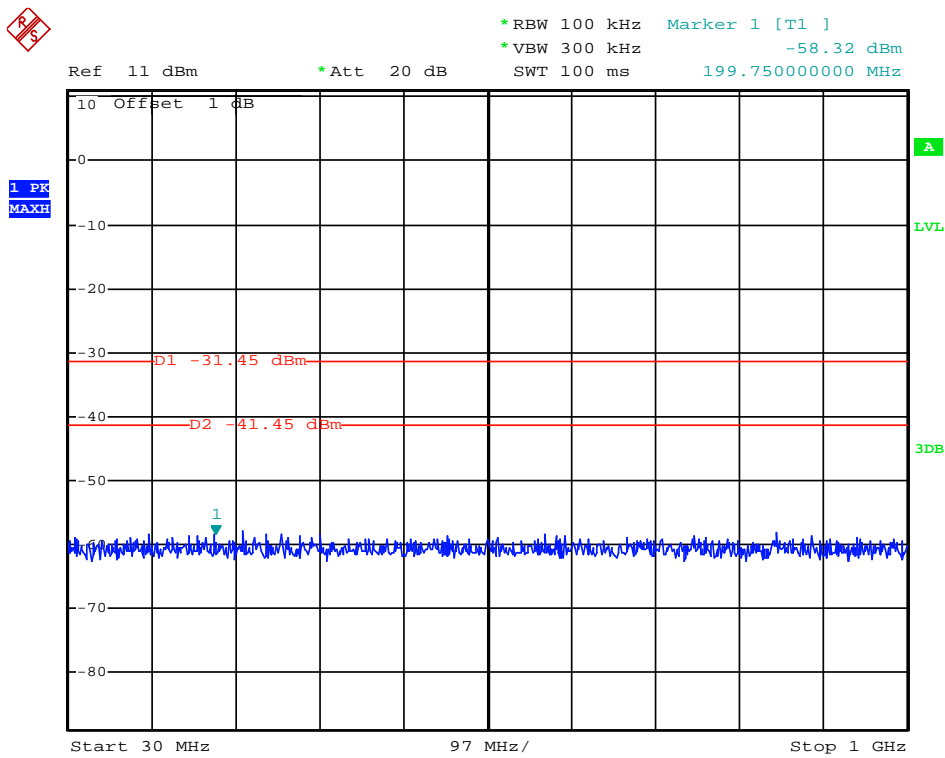


(Plot 4.6.2 C1: Channel 11: 2462MHz @ 802.11g)

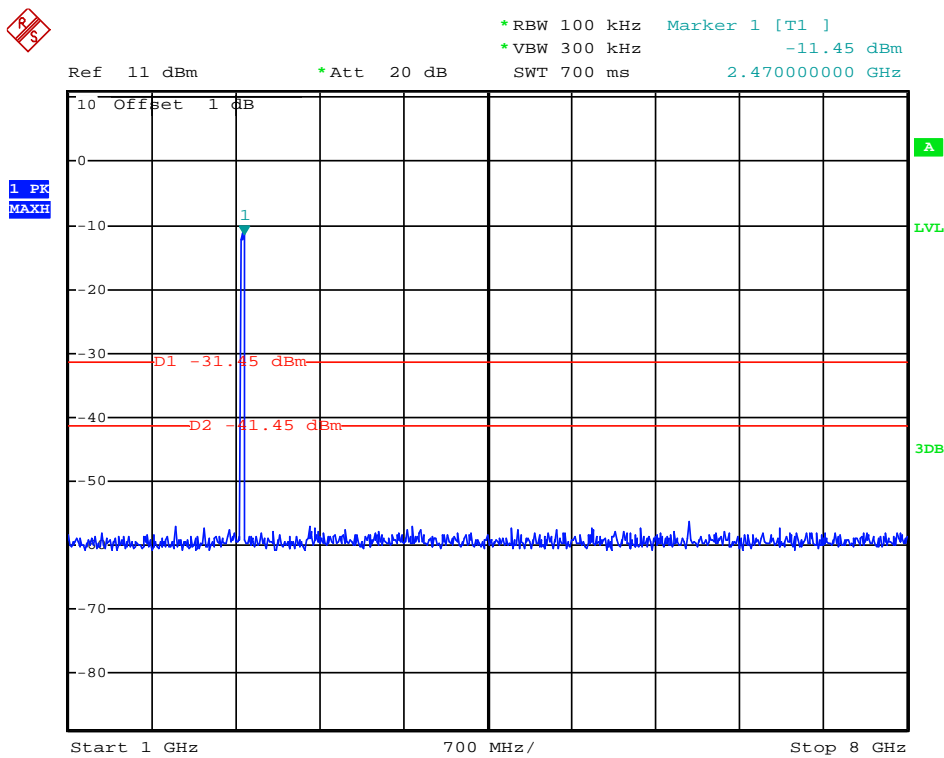


(Plot 4.6.2 C2: Channel 11: 2462MHz @ 802.11g)

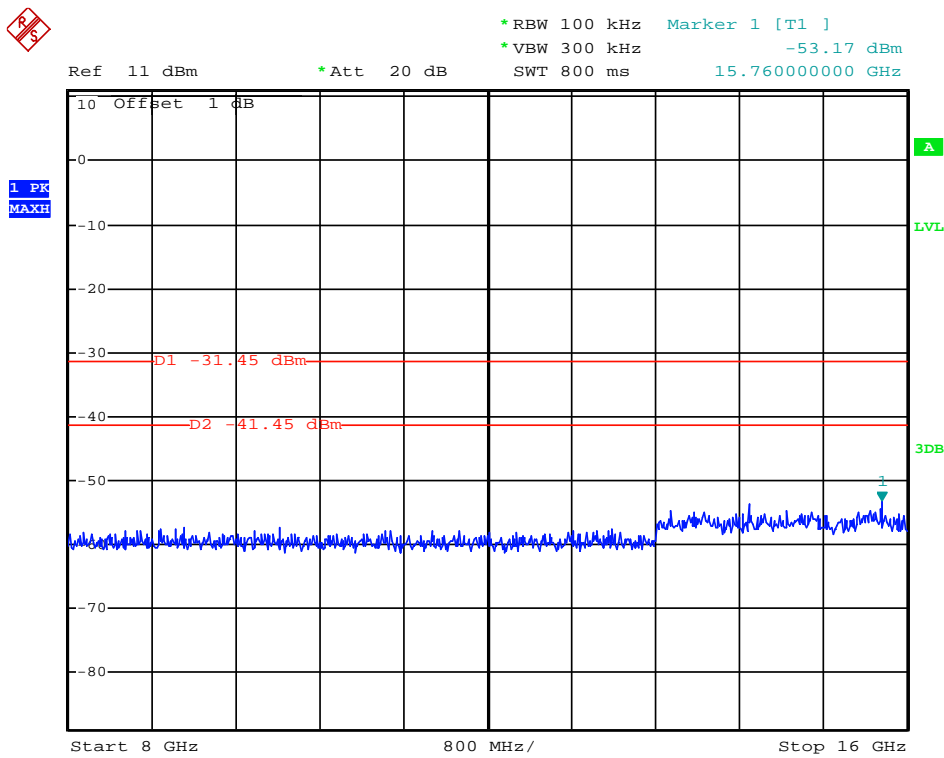


(Plot 4.6.2 C3: Channel 11: 2462MHz @ 802.11g)

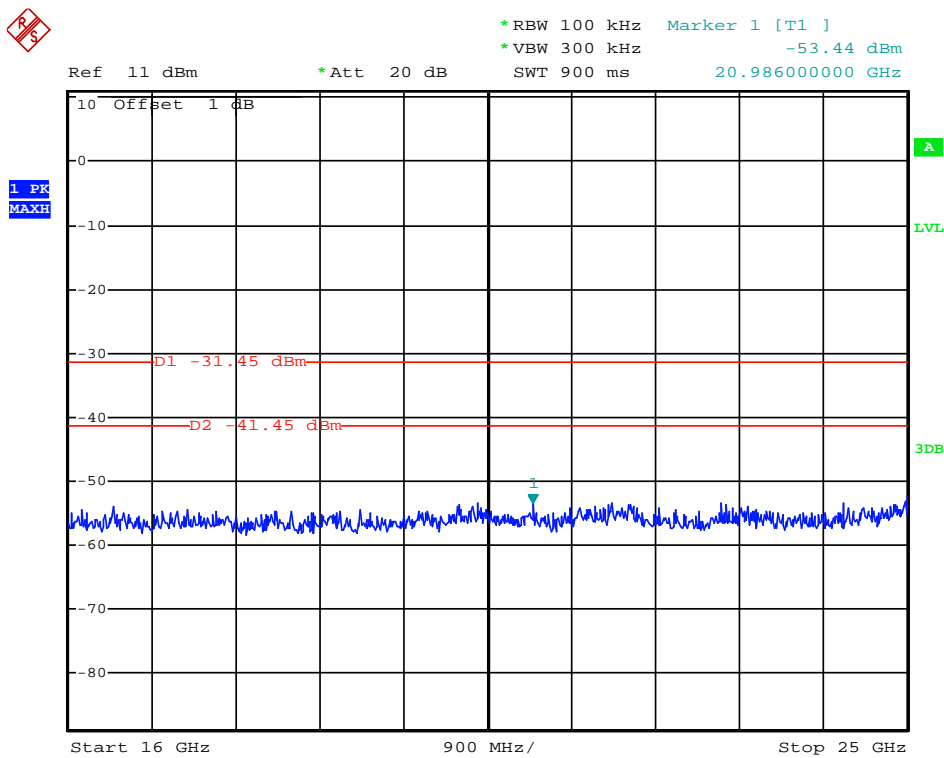

(Plot 4.6.2 C4: Channel 11: 2462MHz @ 802.11g)

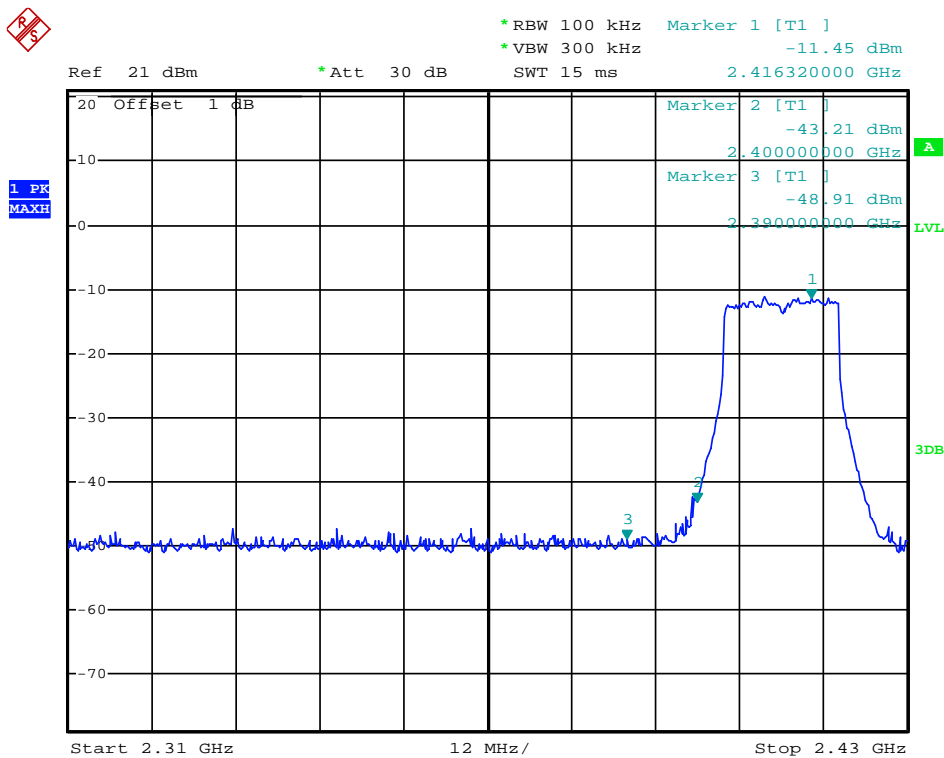

(Plot 4.6.2 D: Channel 1: 2412MHz @ 802.11g)

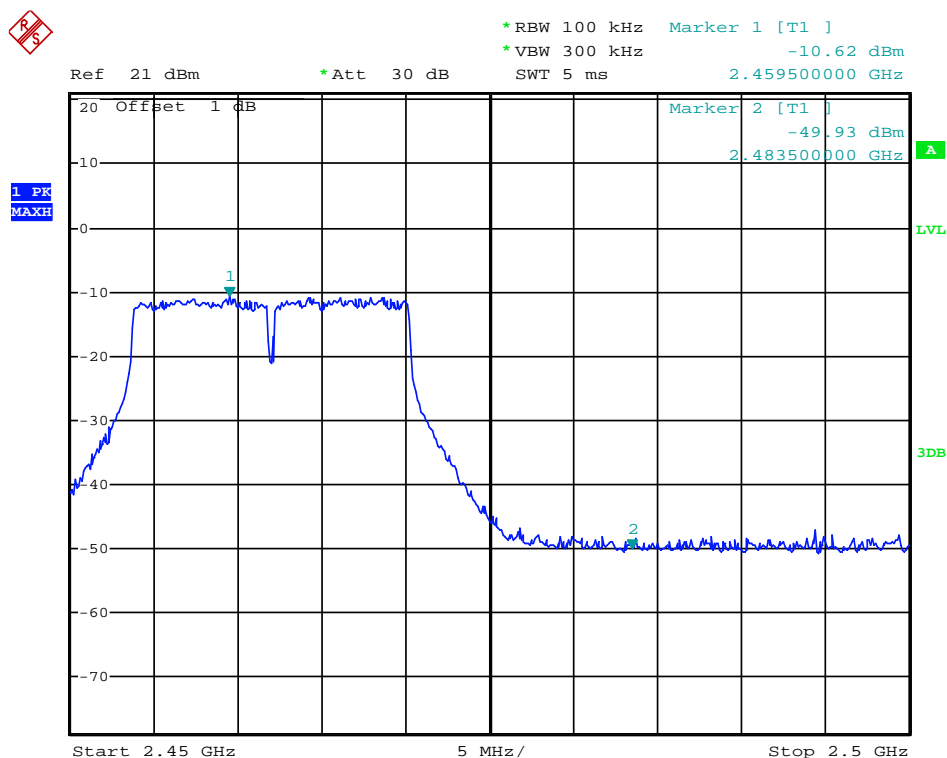

(Plot 4.6.2 E: Channel 11: 2462MHz @ 802.11g)

4.6.3 802.11n(20MHz) Test Mode


A. Test Verdict

Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
1	2412	Plot 4.6.3 A1	-30	PASS
		Plot 4.6.3 A2		
		Plot 4.6.3 A3		
		Plot 4.6.3 A4		
6	2437	Plot 4.6.3 B1	-30	PASS
		Plot 4.6.3 B2		
		Plot 4.6.3 B3		
		Plot 4.6.3 B4		
11	2462	Plot 4.6.3 C1	-30	PASS
		Plot 4.6.3 C2		
		Plot 4.6.3 C3		
		Plot 4.6.3 C4		


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-38.92	Peak	-30	Plot 4.6.3 D	PASS
2483.50	-39.94	Peak	-30	Plot 4.6.3 E	PASS

Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.
 2. The test results including the cable loss.


B. Test Plots

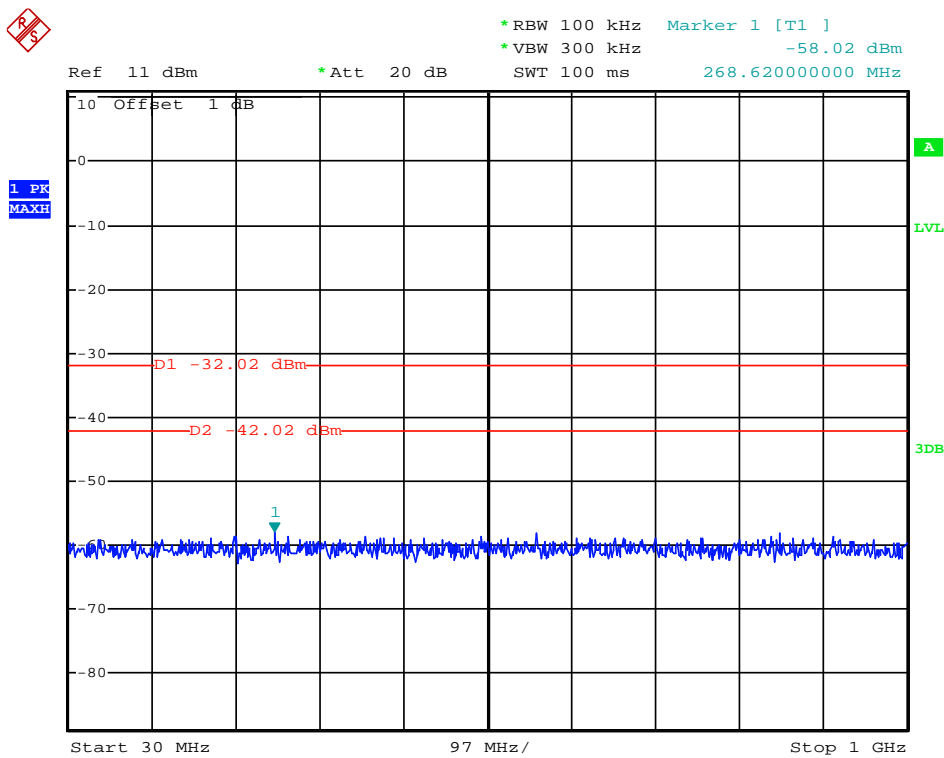


(Plot 4.6.3 A1: Channel 1: 2412MHz @ 802.11n(20MHz))

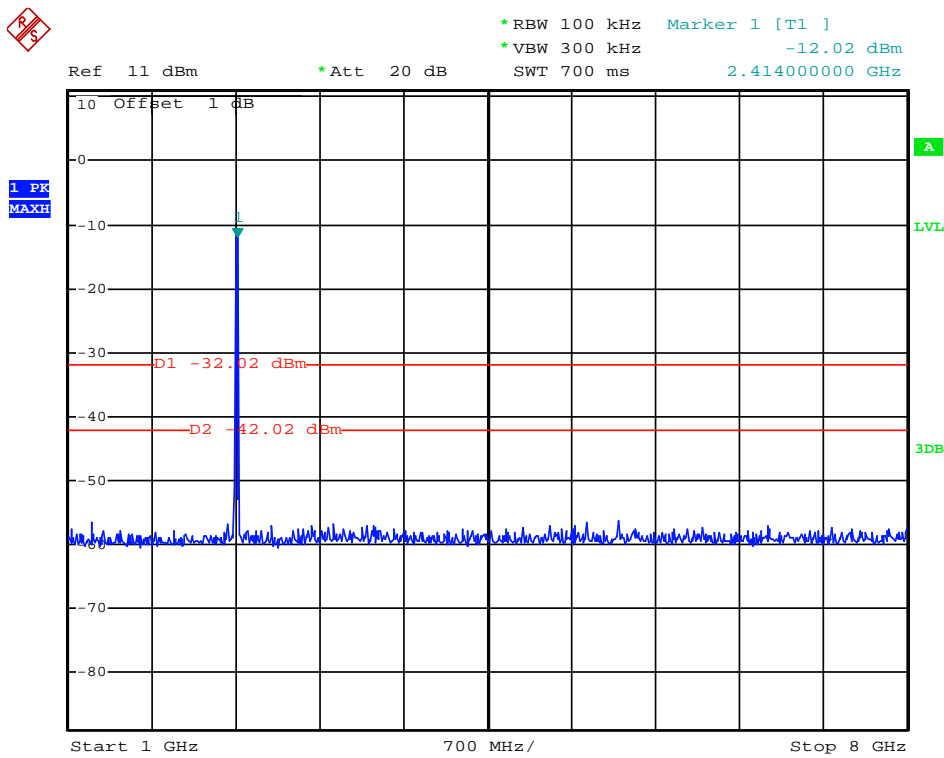


(Plot 4.6.3 A2: Channel 1: 2412MHz @ 802.11n(20MHz))

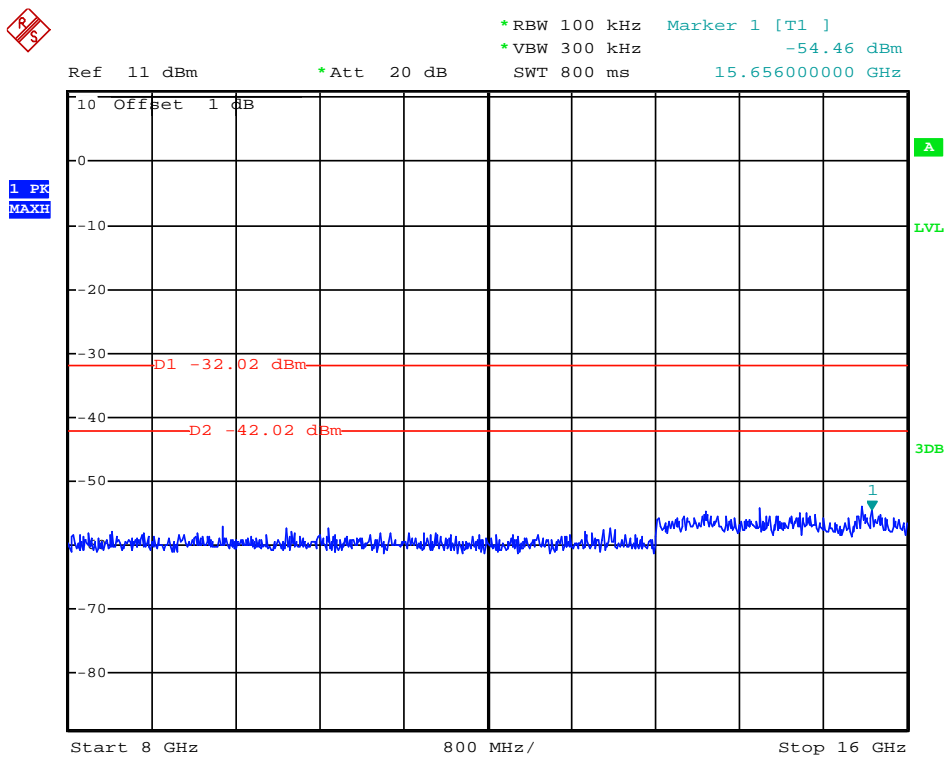


(Plot 4.6.3 A3: Channel 1: 2412MHz @ 802.11n(20MHz))

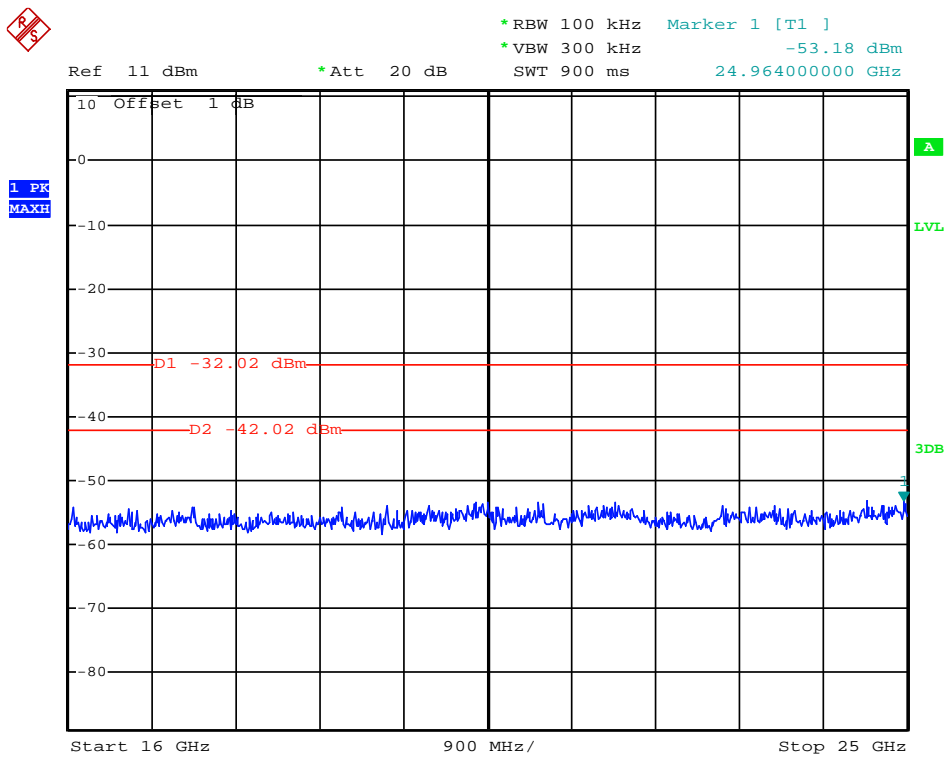


(Plot 4.6.3 A4: Channel 1: 2412MHz @ 802.11n(20MHz))

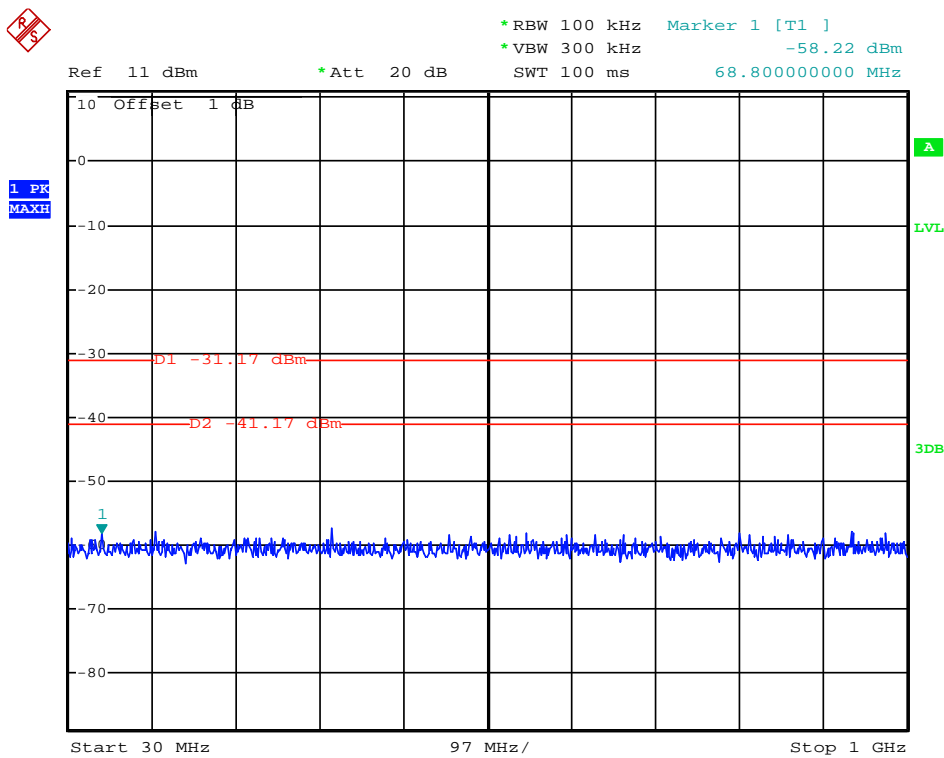


(Plot 4.6.3 B1: Channel 6: 2437MHz @ 802.11n(20MHz))

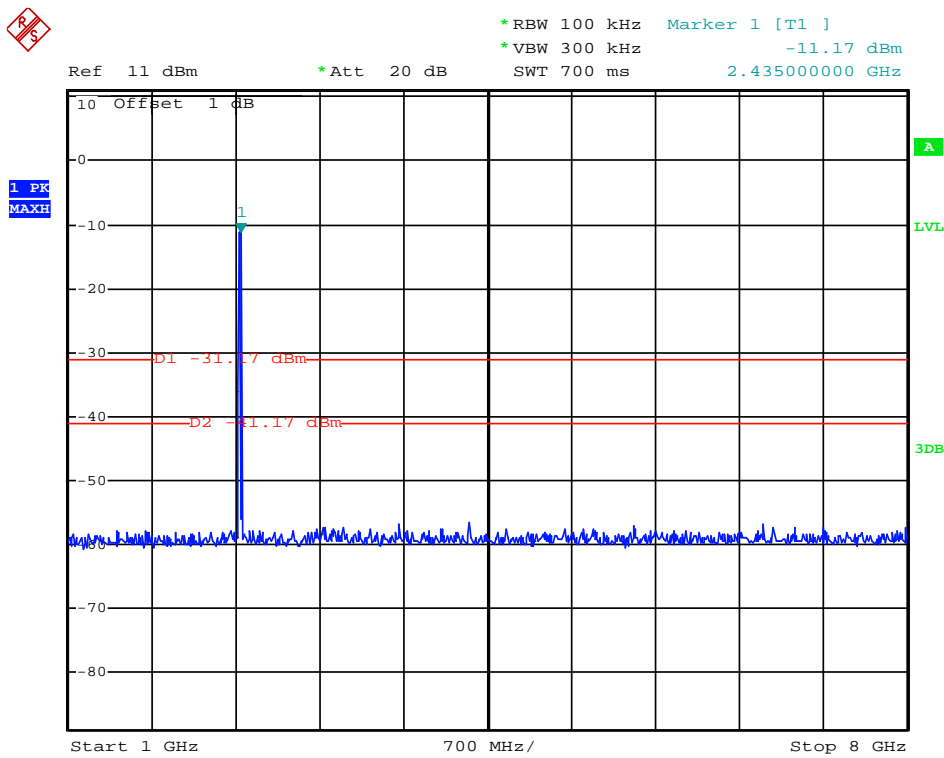


(Plot 4.6.3 B2: Channel 6: 2437MHz @ 802.11n(20MHz))

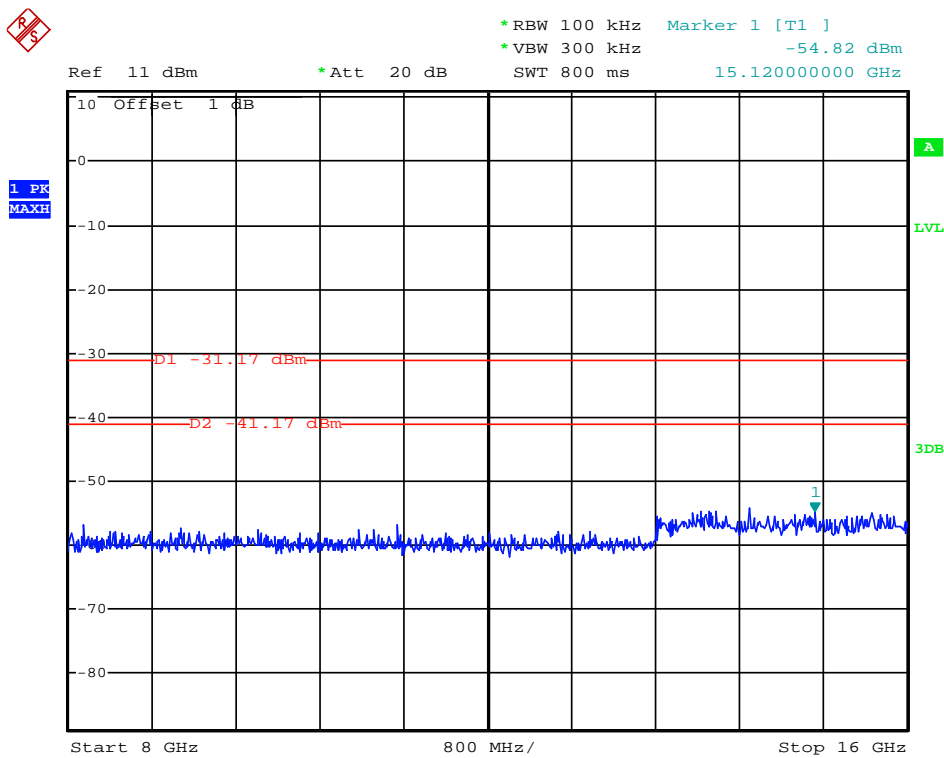


(Plot 4.6.3 B3: Channel 6: 2437MHz @ 802.11n(20MHz))

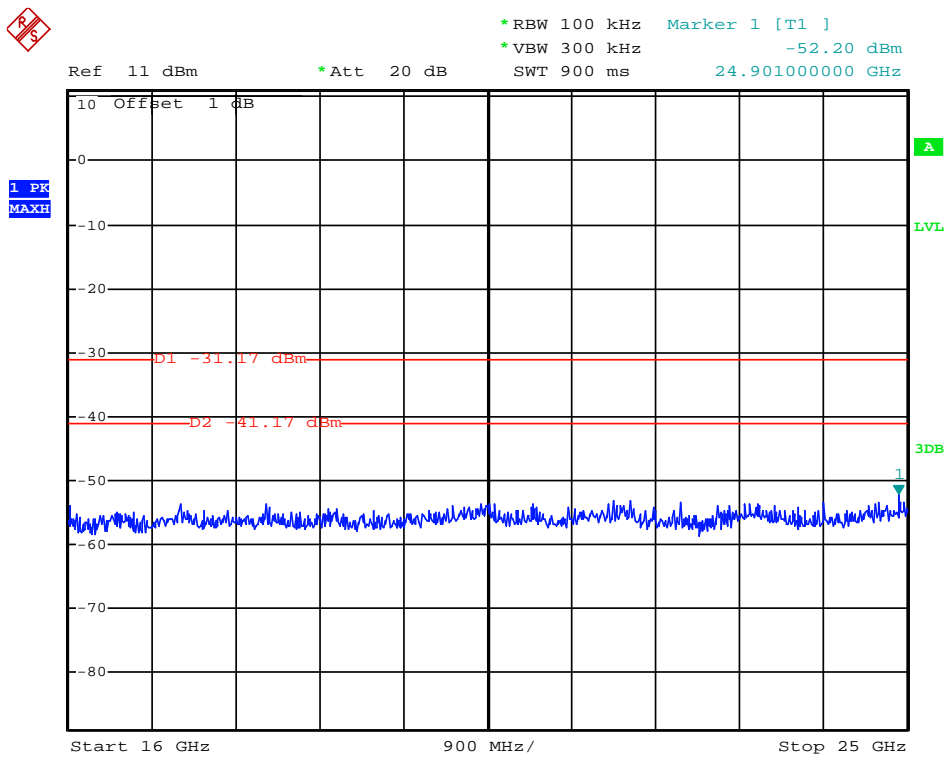


(Plot 4.6.3 B4: Channel 6: 2437MHz @ 802.11n(20MHz))

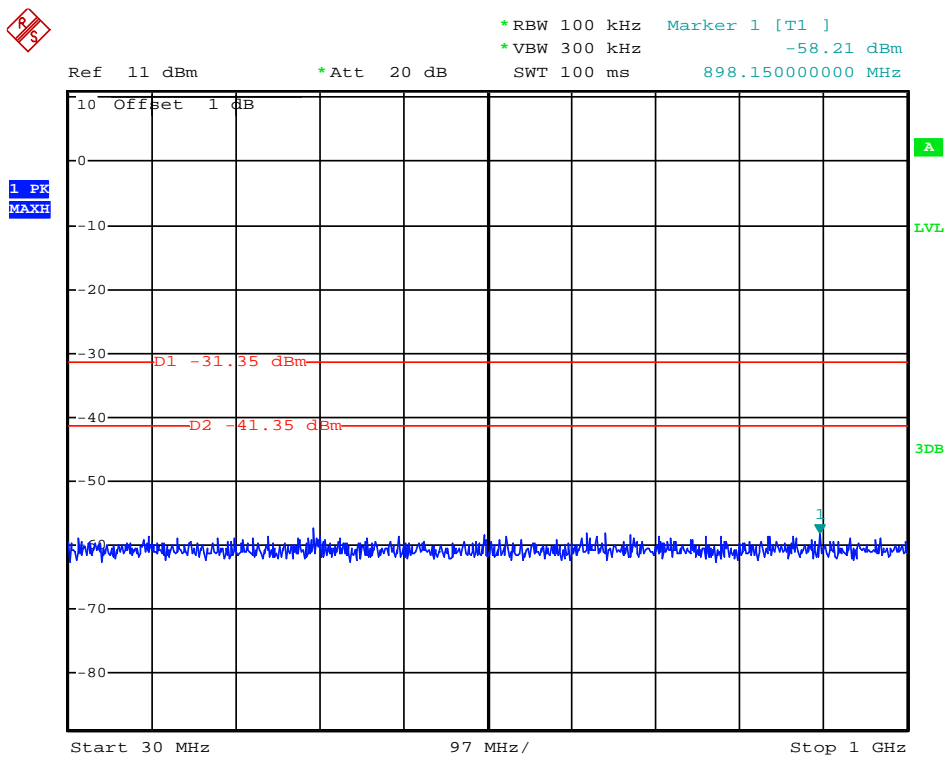


(Plot 4.6.3 C1: Channel 11: 2462MHz @ 802.11n(20MHz))

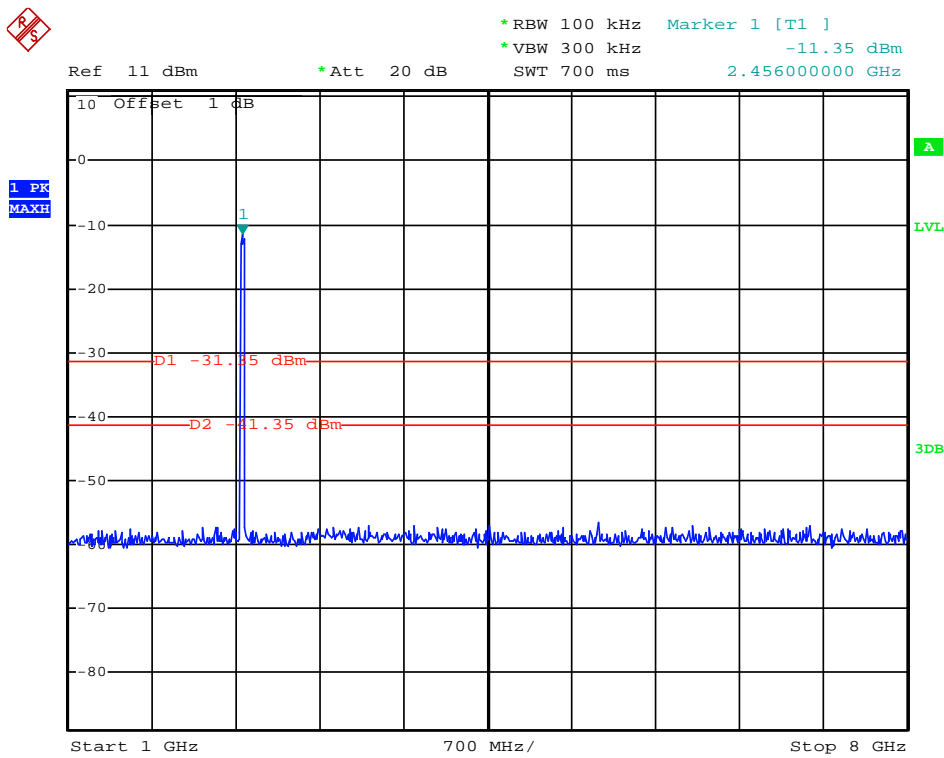


(Plot 4.6.3 C2: Channel 11: 2462MHz @ 802.11n(20MHz))

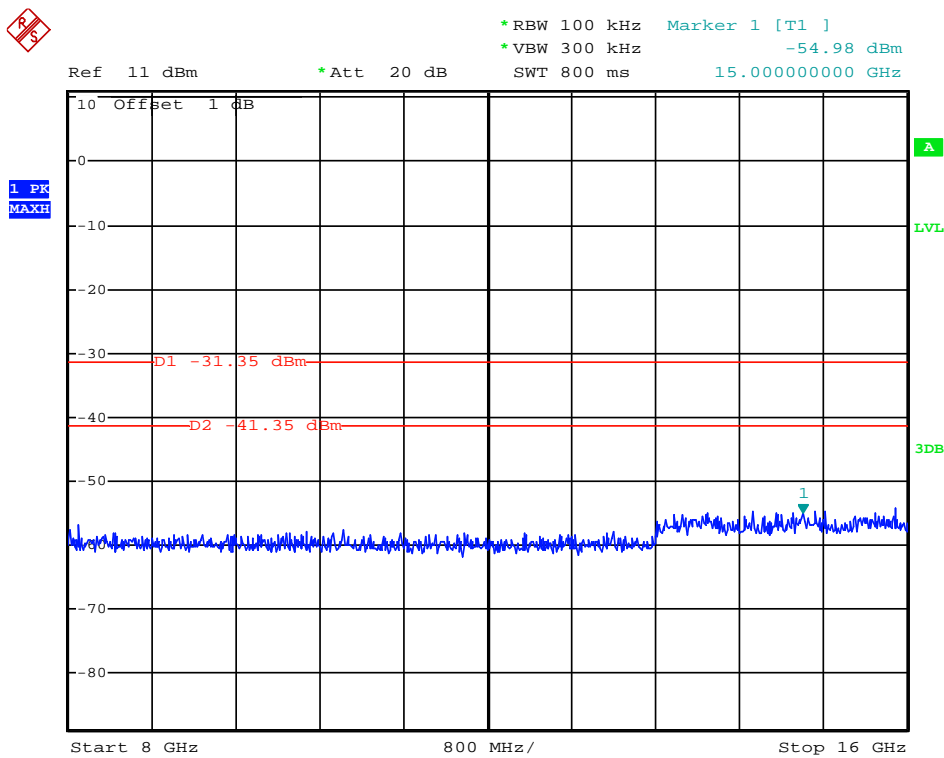


(Plot 4.6.3 C3: Channel 11: 2462MHz @ 802.11n(20MHz))

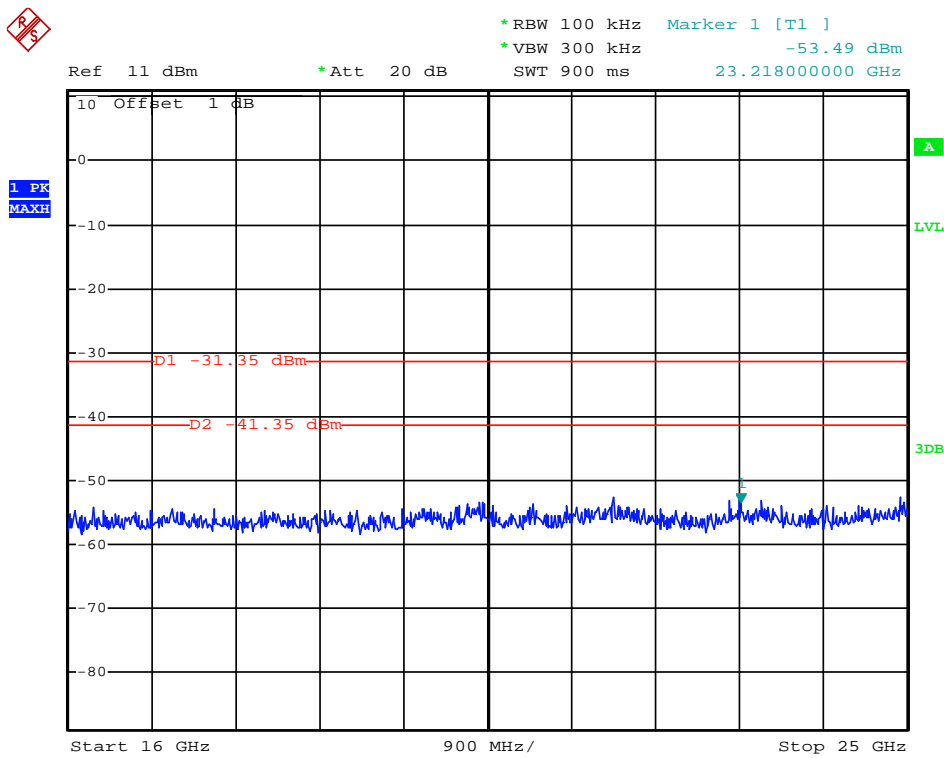

(Plot 4.6.3 C4: Channel 11: 2462MHz @ 802.11n(20MHz))

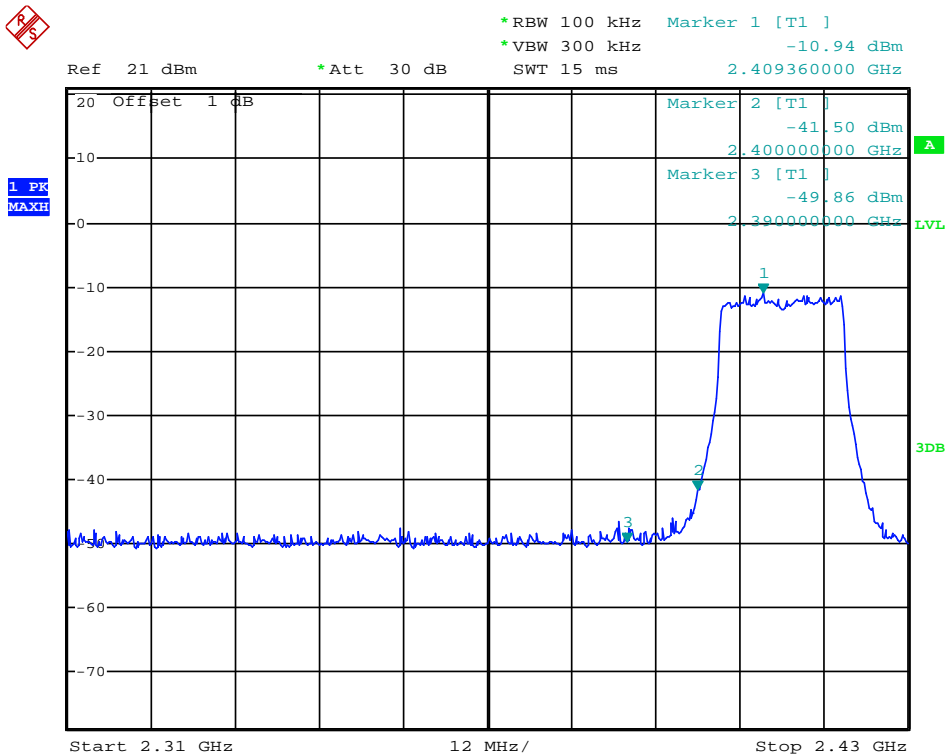

(Plot 4.6.3 D: Channel 1: 2412MHz @ 802.11n(20MHz))

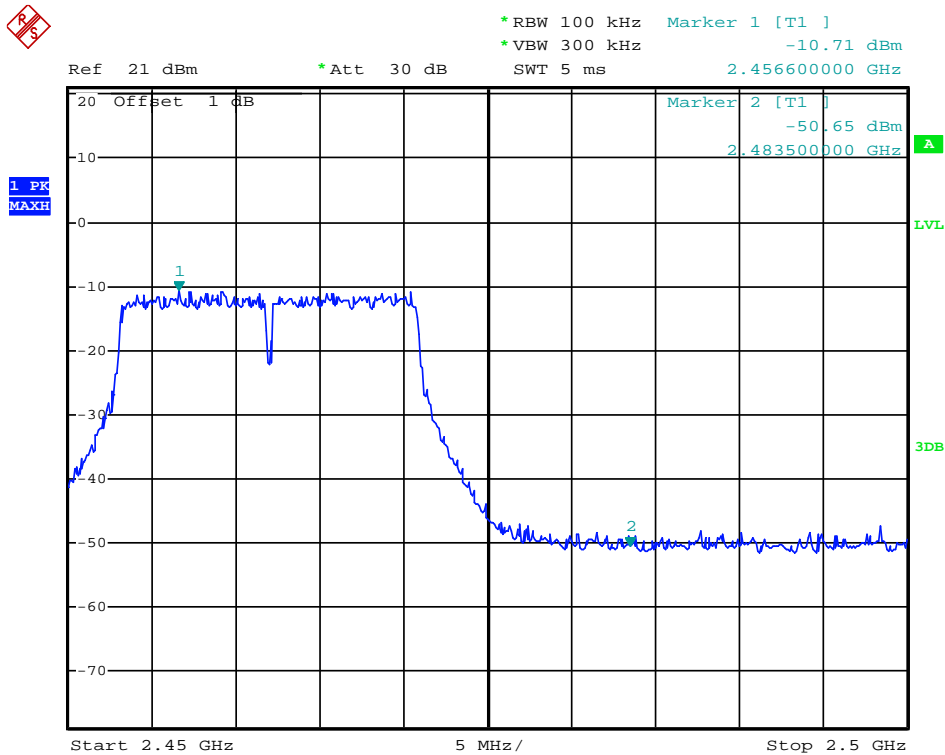

(Plot 4.6.3 E: Channel 11: 2462MHz @ 802.11n(20MHz))

4.6.4 802.11n(40MHz) Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
---------	-----------------	---------------	-------------	---------

3	2422	Plot 4.6.4 A1	-30	PASS
		Plot 4.6.4 A2		
		Plot 4.6.4 A3		
		Plot 4.6.4 A4		
6	2437	Plot 4.6.4 B1	-30	PASS
		Plot 4.6.4 B2		
		Plot 4.6.4 B3		
		Plot 4.6.4 B4		
9	2452	Plot 4.6.4 C1	-30	PASS
		Plot 4.6.4 C2		
		Plot 4.6.4 C3		
		Plot 4.6.4 C4		


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
2400.00	-34.51	Peak	-30	Plot 4.6.3 D	PASS
2483.50	-35.15	Peak	-30	Plot 4.6.3 E	PASS

Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.


B. Test Plots

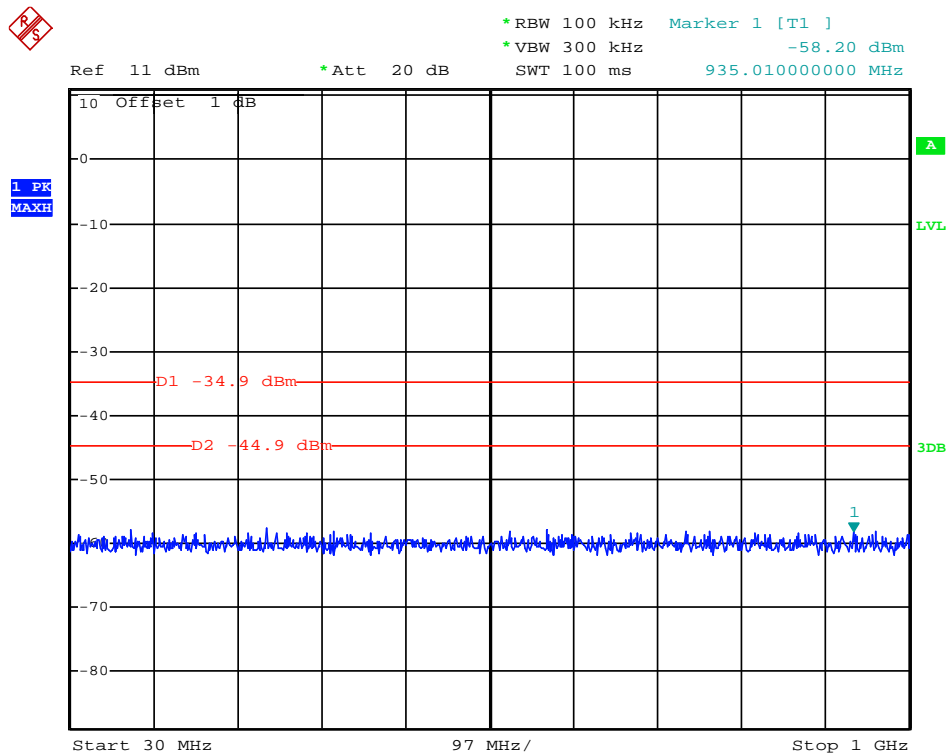


(Plot 4.6.4 A1: Channel 3: 2422MHz @ 802.11n(40MHz))

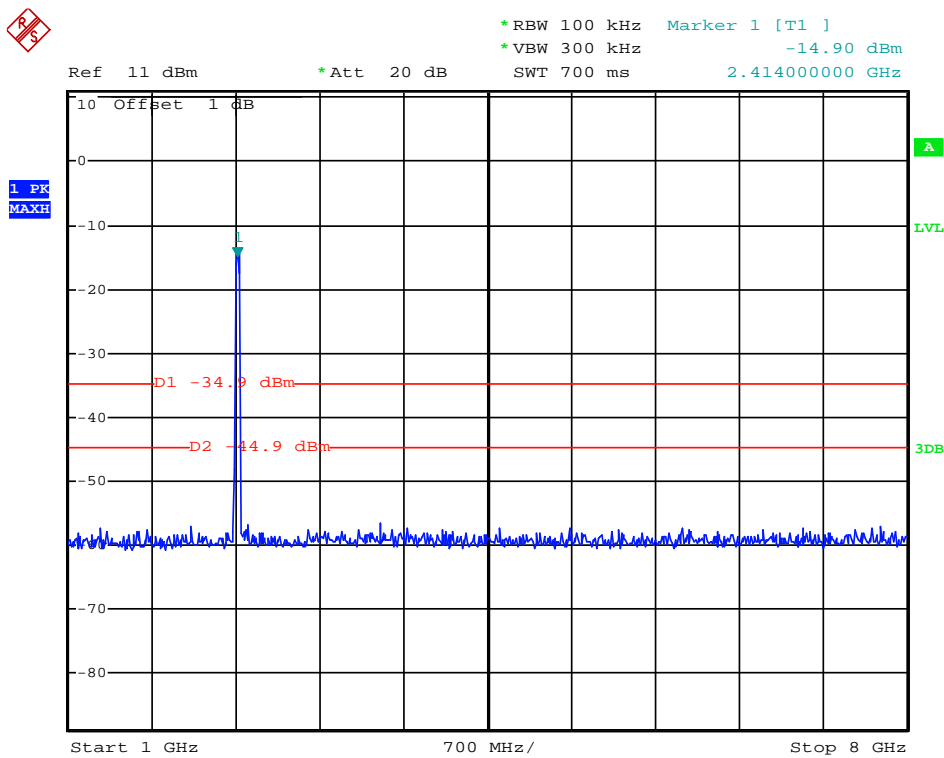


(Plot 4.6.4 A2: Channel 3: 2422MHz @ 802.11n(40MHz))

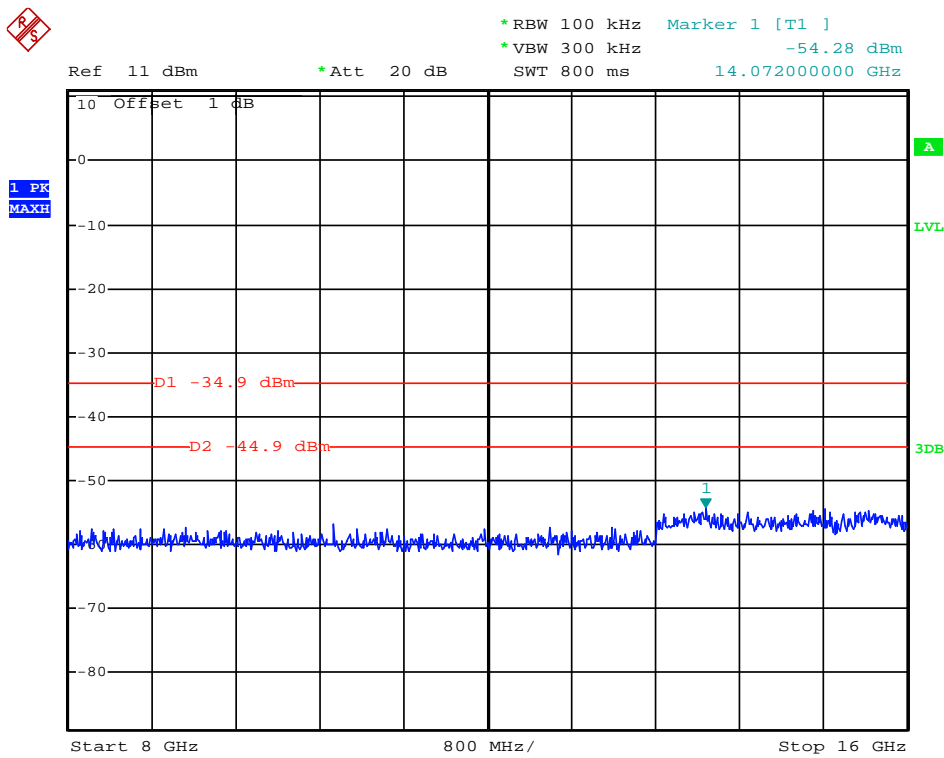


(Plot 4.6.4 A3: Channel 3: 2422MHz @ 802.11n(40MHz))

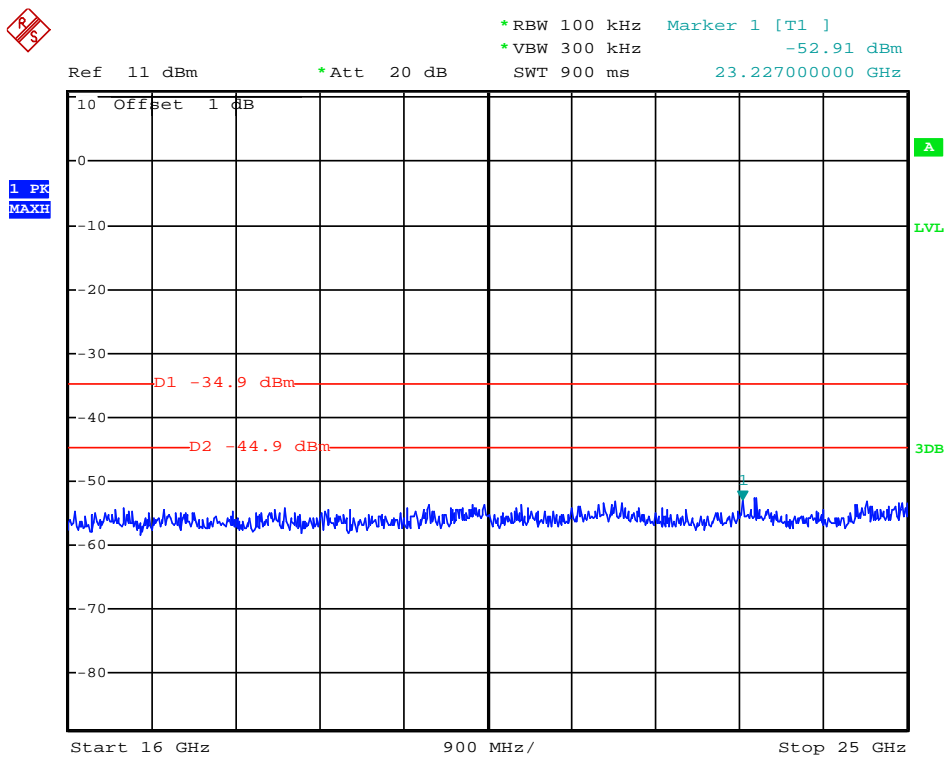


(Plot 4.6.4 A4: Channel 3: 2422MHz @ 802.11n(40MHz))

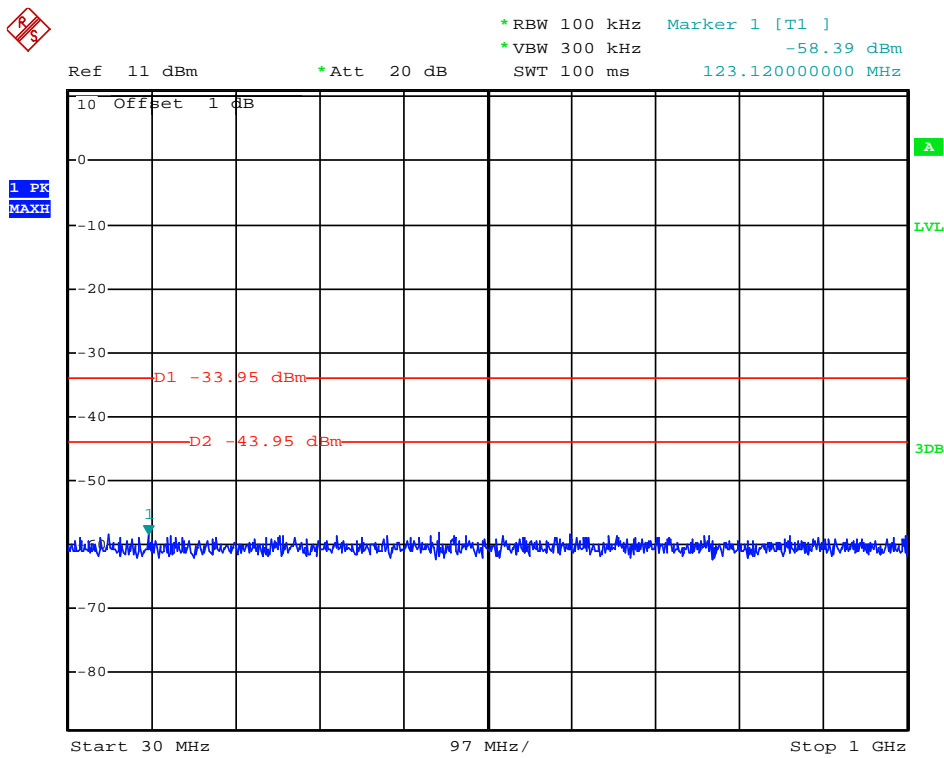


(Plot 4.6.4 B1: Channel 6: 2437MHz @ 802.11n(40MHz))

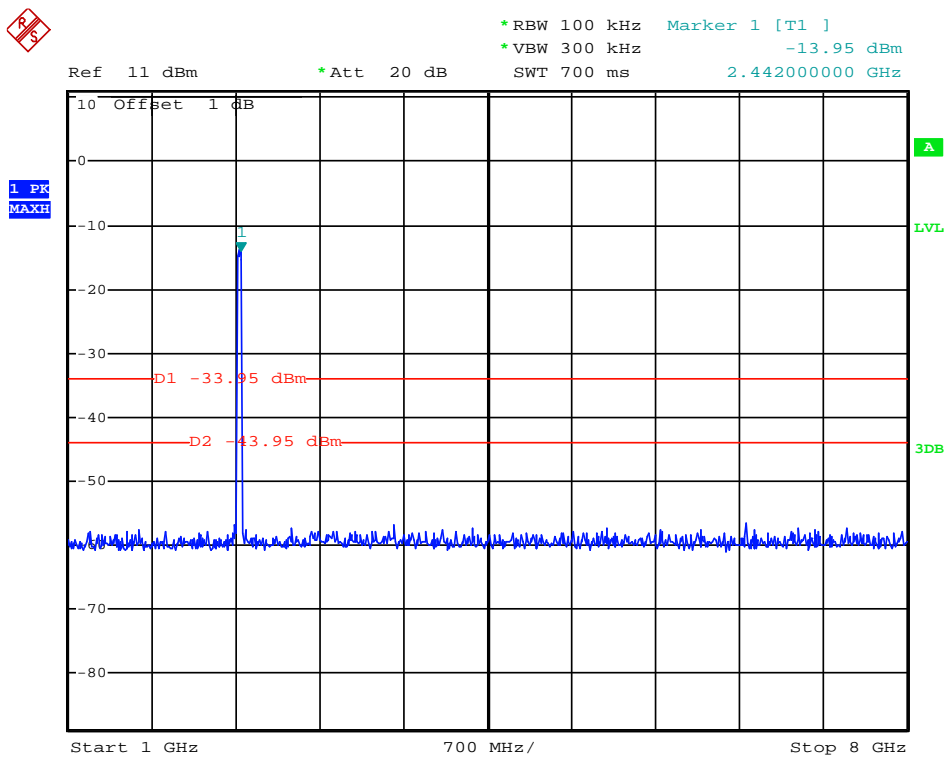


(Plot 4.6.4 B2: Channel 6: 2437MHz @ 802.11n(40MHz))

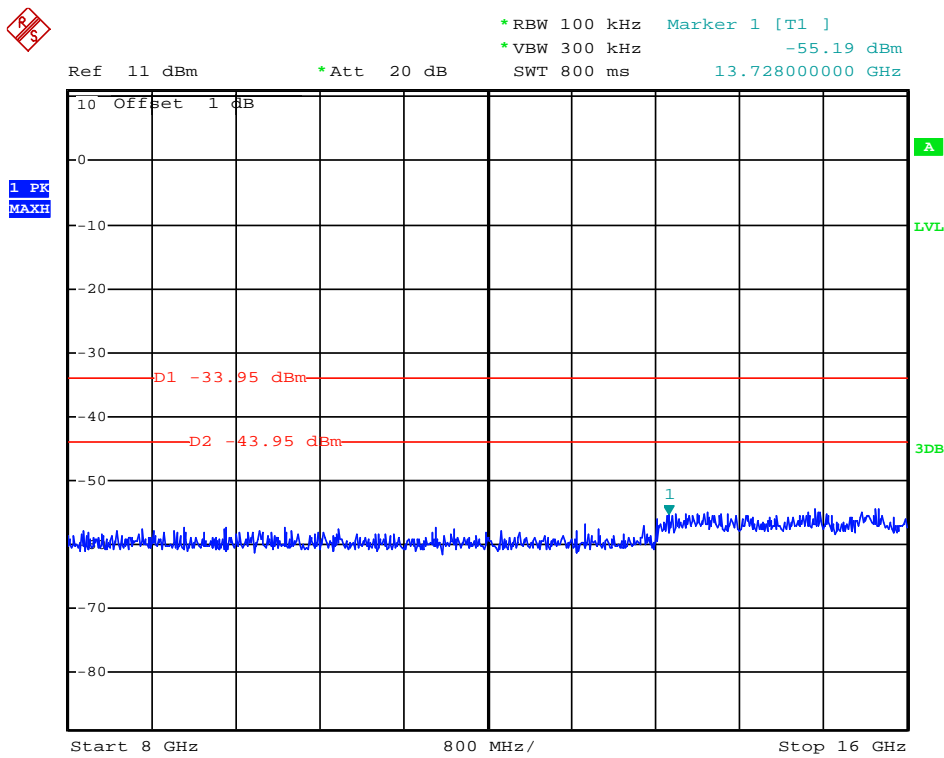


(Plot 4.6.4 B3: Channel 6: 2437MHz @ 802.11n(40MHz))

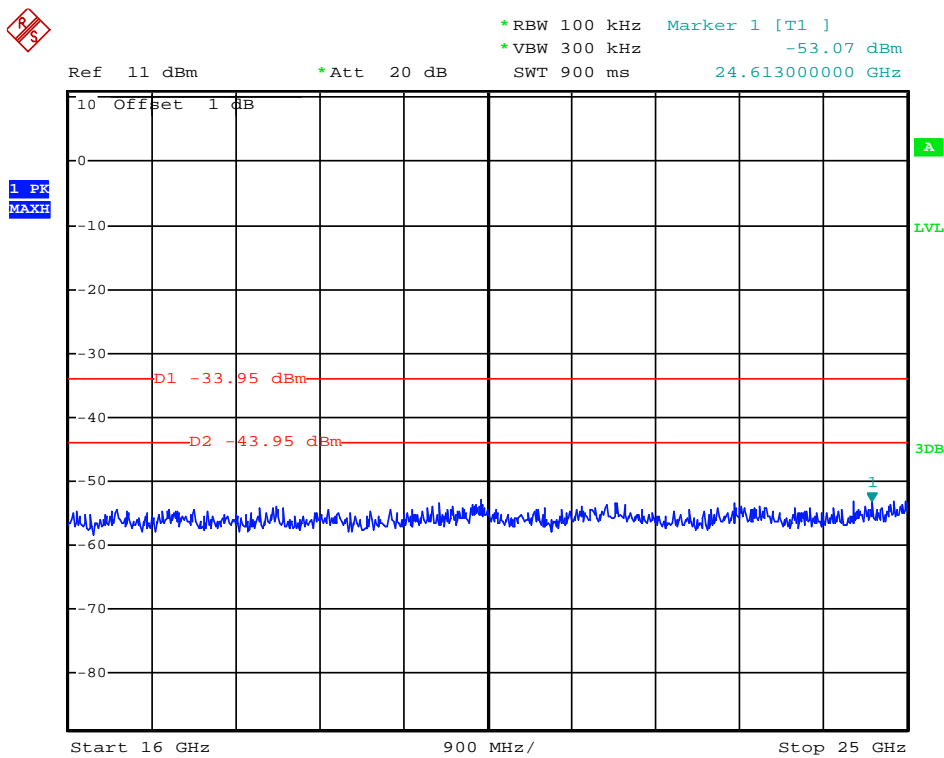


(Plot 4.6.4 B4: Channel 6: 2437MHz @ 802.11n(40MHz))

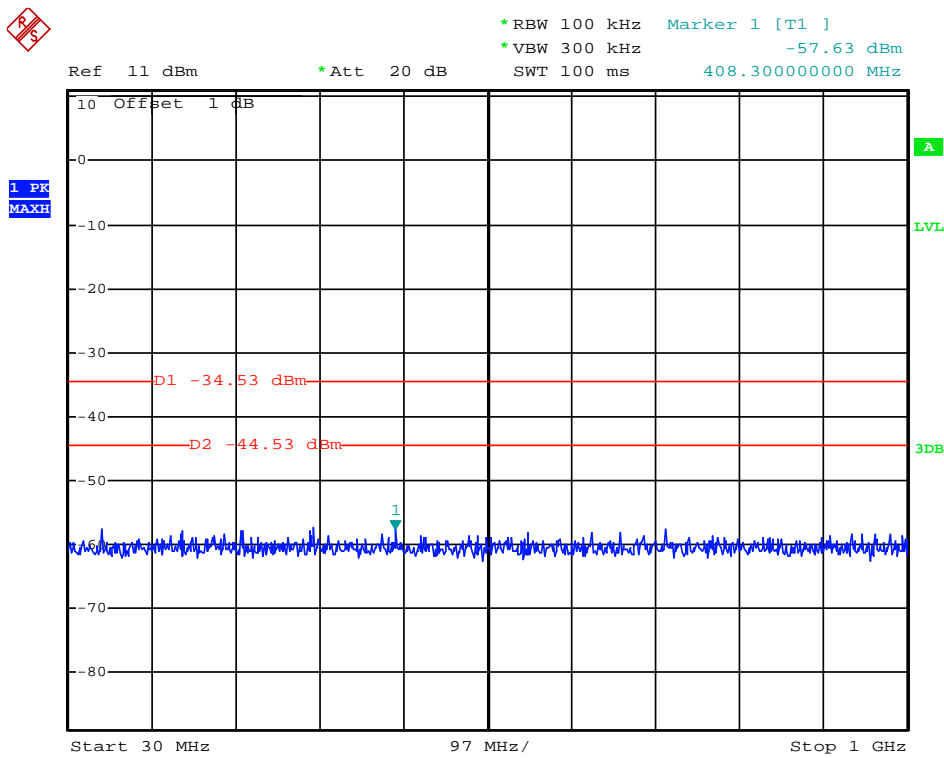


(Plot 4.6.4 C1: Channel 9: 2452MHz @ 802.11n(40MHz))

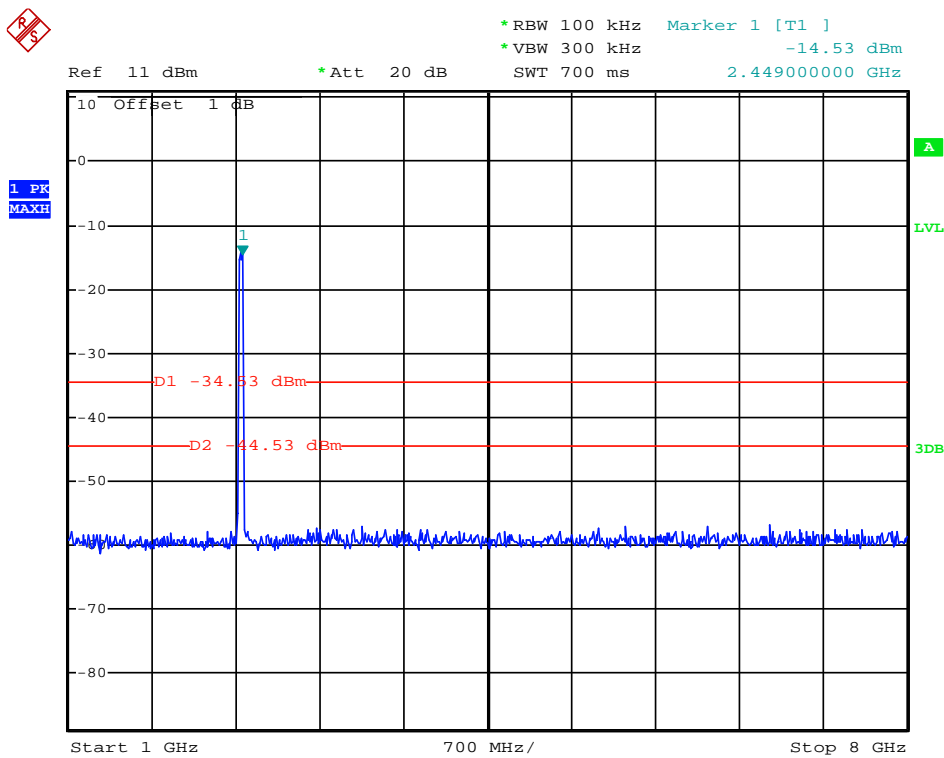


(Plot 4.6.4 C2: Channel 9: 2452MHz @ 802.11n(40MHz))

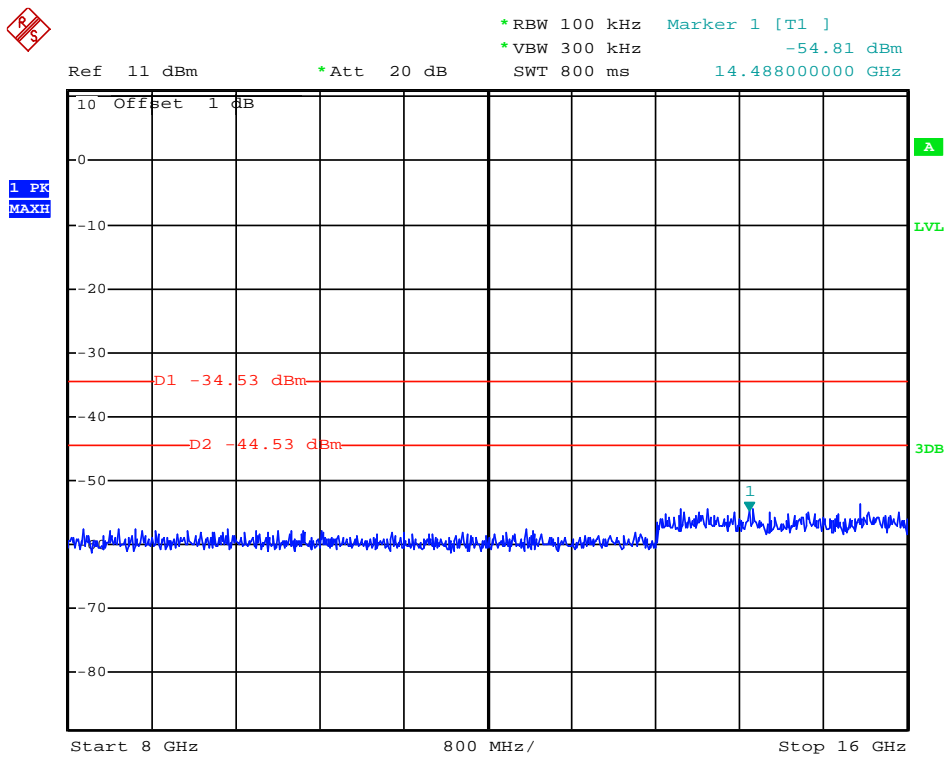


(Plot 4.6.4 C3: Channel 9: 2452MHz @ 802.11n(40MHz))

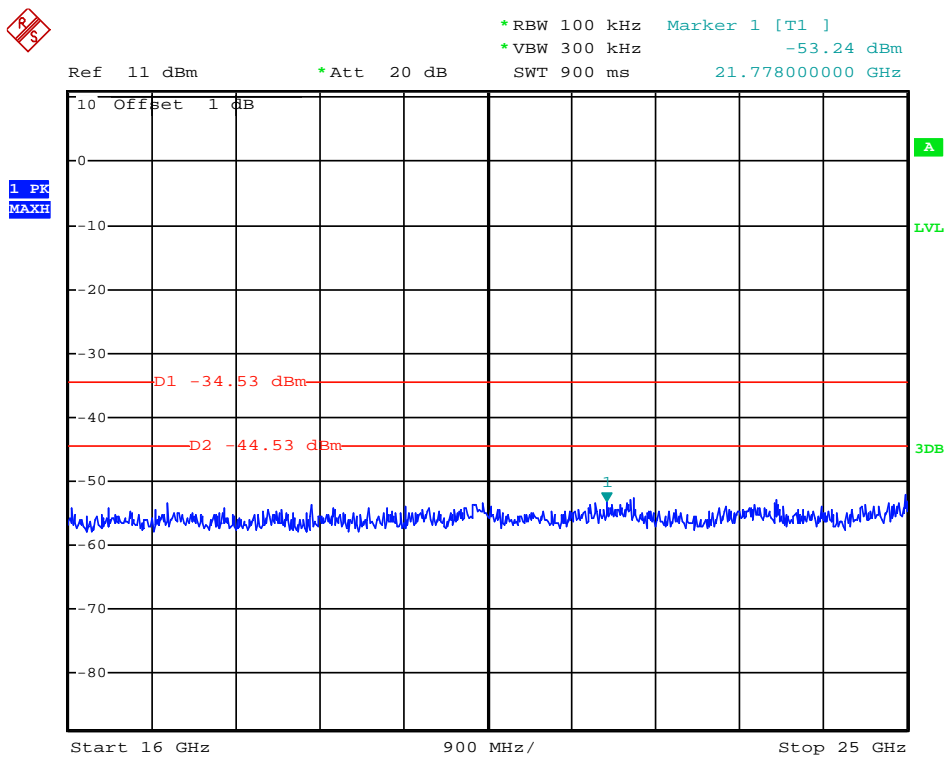

(Plot 4.6.4 C4: Channel 9: 2452MHz @ 802.11n(40MHz))

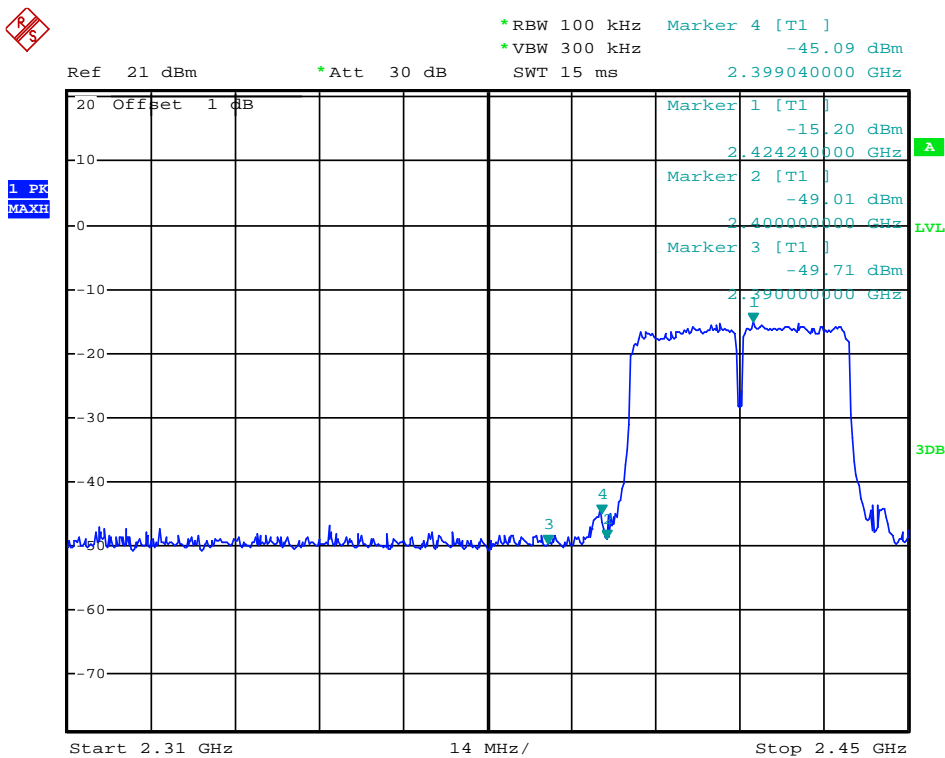


(Plot 4.6.4 D: Channel 3: 2422MHz @ 802.11n(40MHz))

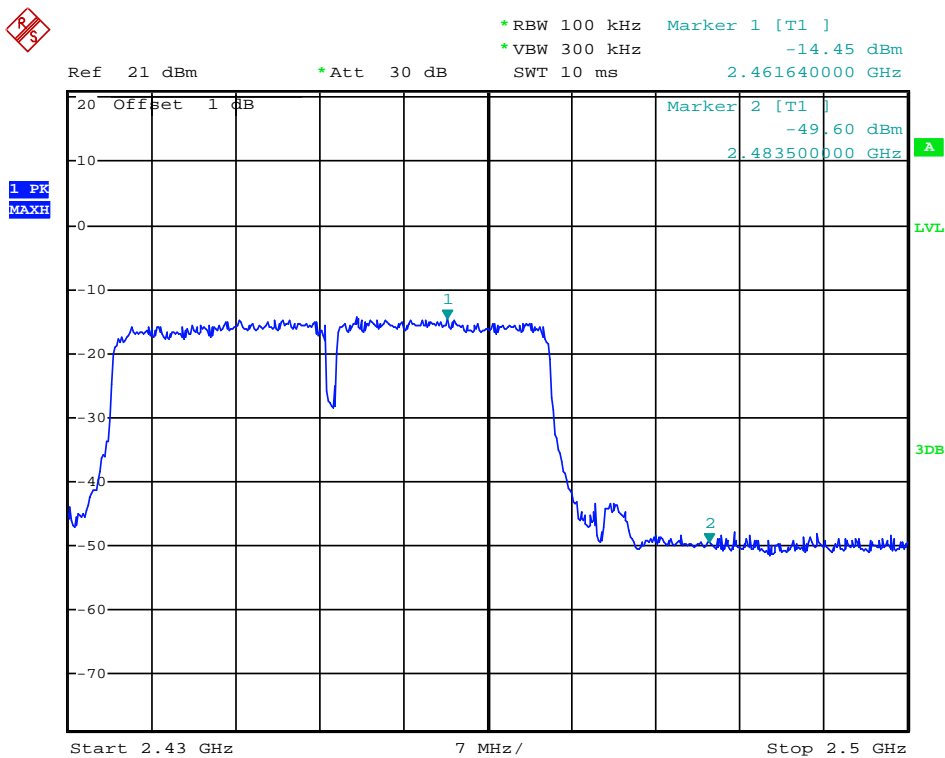

(Plot 4.6.4 E: Channel 9: 2452MHz @ 802.11n(40MHz))

4.7. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS


4.7.1 801.11b Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	10.08	Plot 4.7.1 A	≥ 500	PASS
6	2437	10.08	Plot 4.7.1 B	≥ 500	PASS
11	2462	10.08	Plot 4.7.1 C	≥ 500	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots

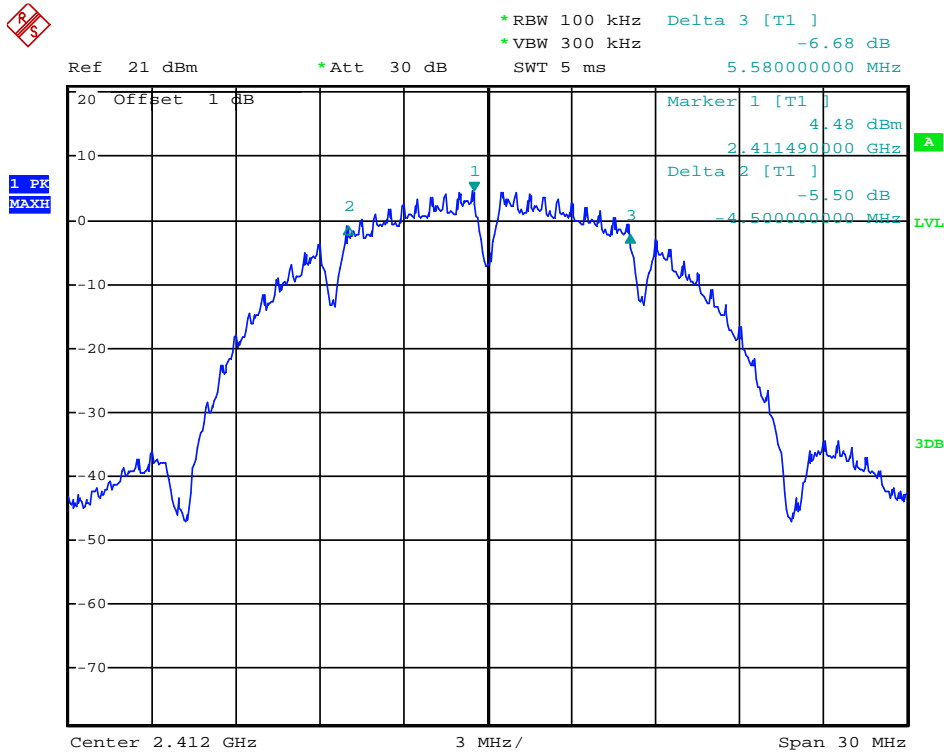

(Plot 4.7.1 A: Channel 1: 2412MHz @ 802.11b)

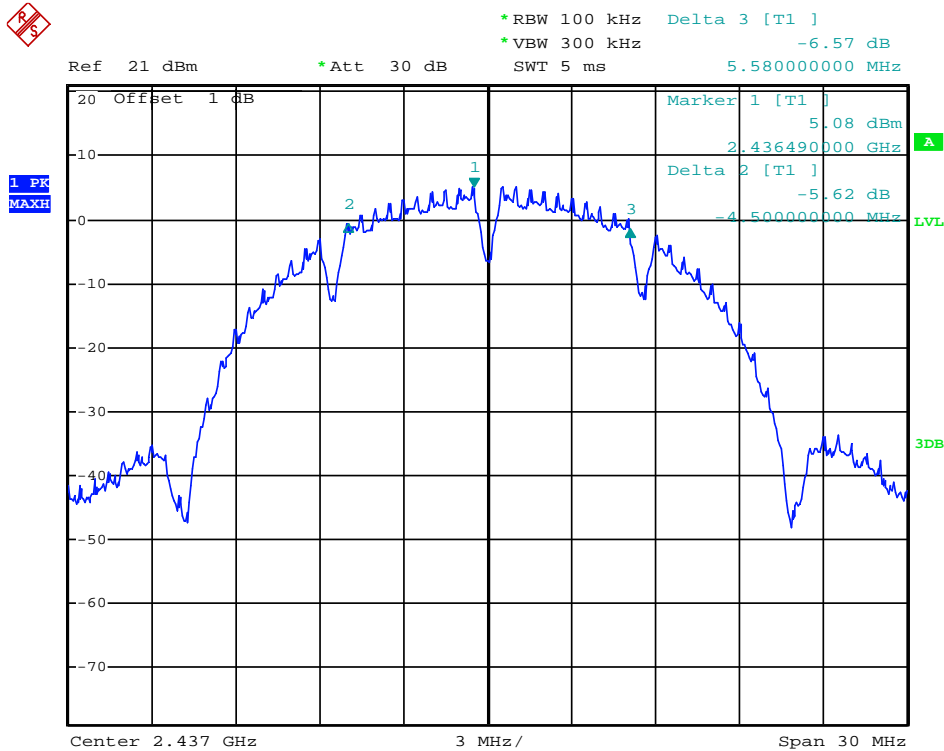

(Plot 4.7.1 B: Channel 6: 2437MHz @ 802.11b)

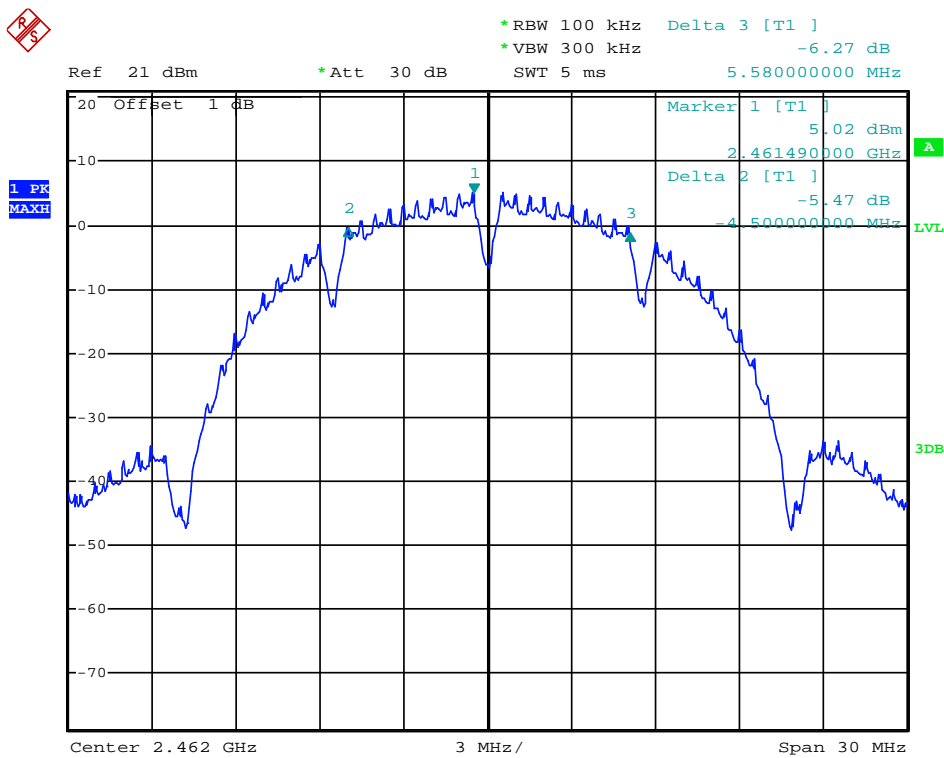

(Plot 4.7.1 C: Channel 11: 2462MHz @ 802.11b)


4.7.2 801.11g Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	16.62	Plot 4.7.2 A	≥500	PASS
6	2437	16.62	Plot 4.7.2 B	≥500	PASS
11	2462	16.62	Plot 4.7.2 C	≥500	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2.The test results including the cable lose.


B. Test Plots

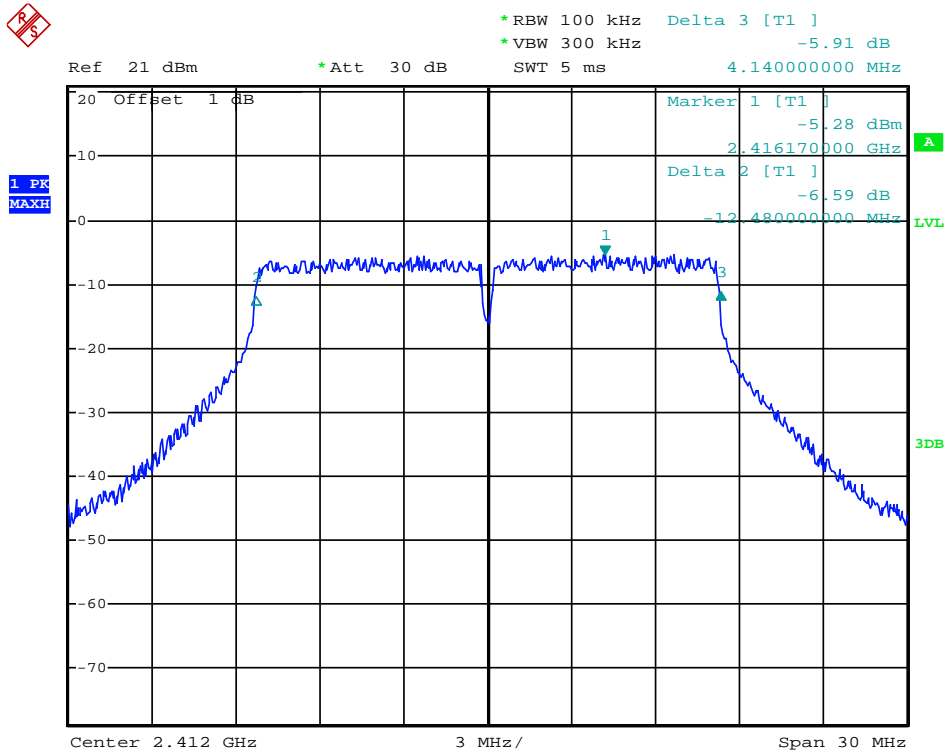

(Plot 4.7.2 A: Channel 1: 2412MHz @ 802.11g)

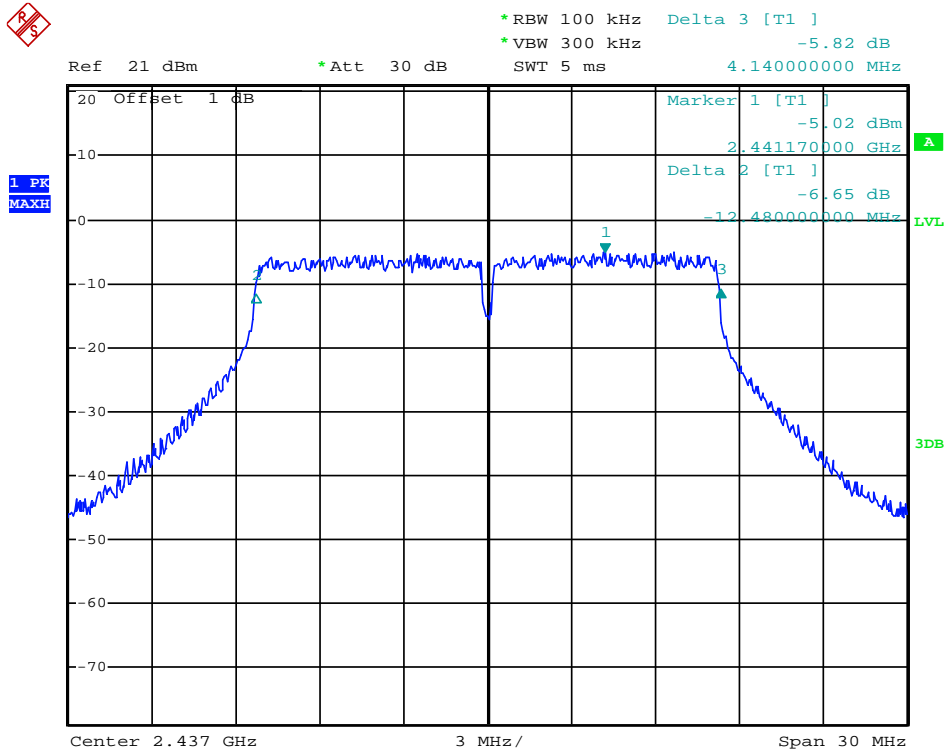

(Plot 4.7.2 B: Channel 6: 2437MHz @ 802.11g)

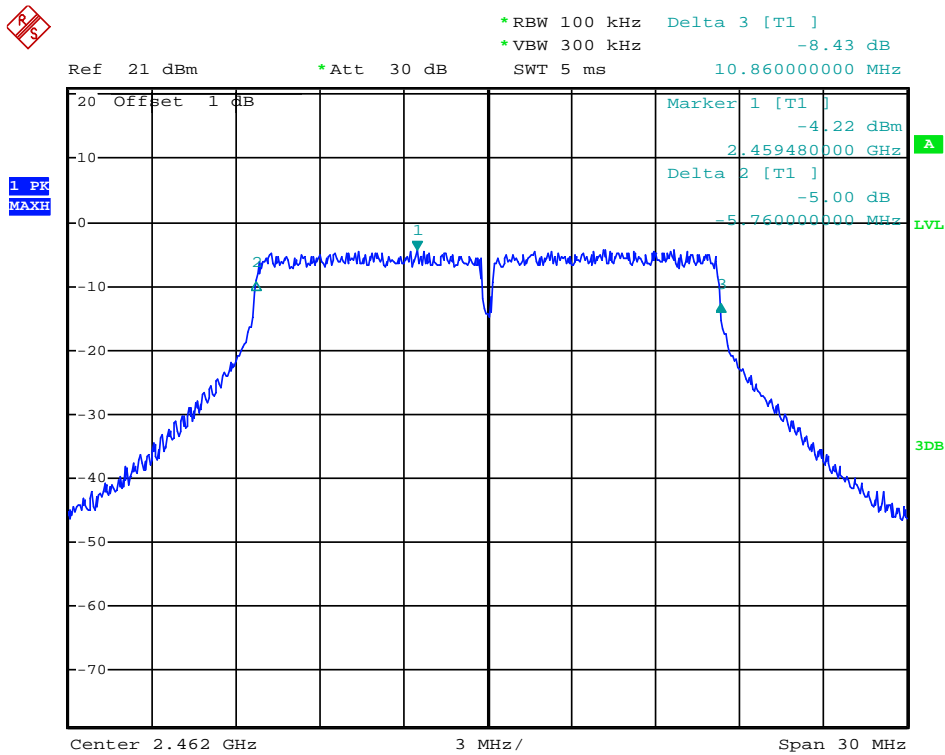

(Plot 4.7.2 C: Channel 11: 2462MHz @ 802.11g)


4.7.3 801.11n(20MHz) Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	17.82	Plot 4.7.3 A	≥500	PASS
6	2437	17.82	Plot 4.7.3 B	≥500	PASS
11	2462	17.82	Plot 4.7.3 C	≥500	PASS

Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 6.5Mbps.
2.The test results including the cable lose.


B. Test Plots

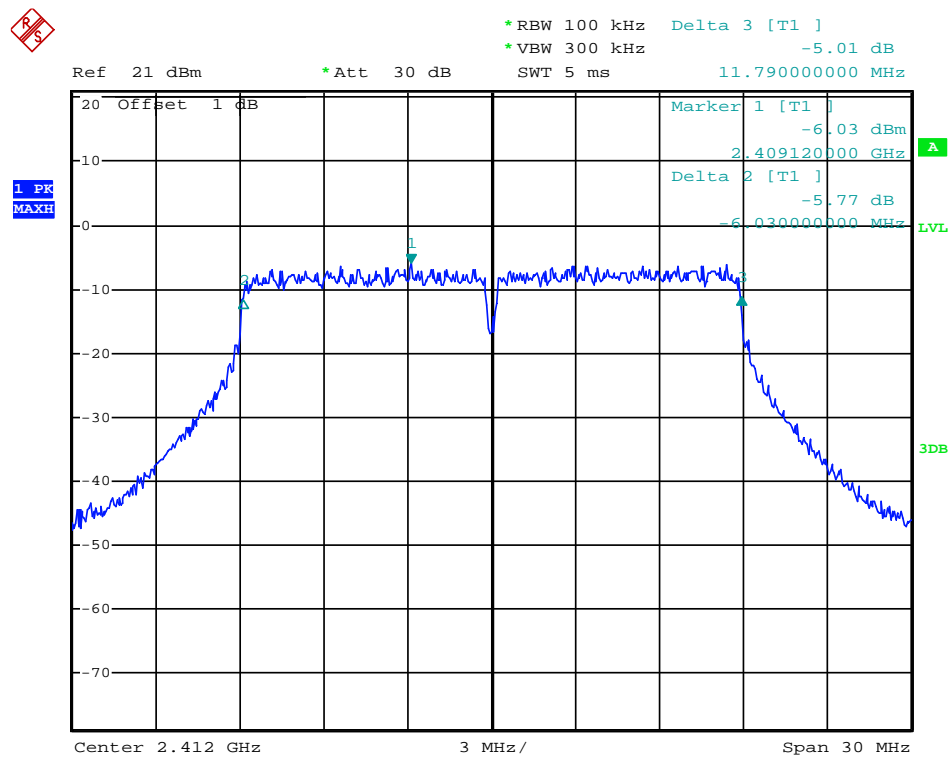

(Plot 4.7.3 A: Channel 1: 2412MHz @ 802.11n(20MHz))

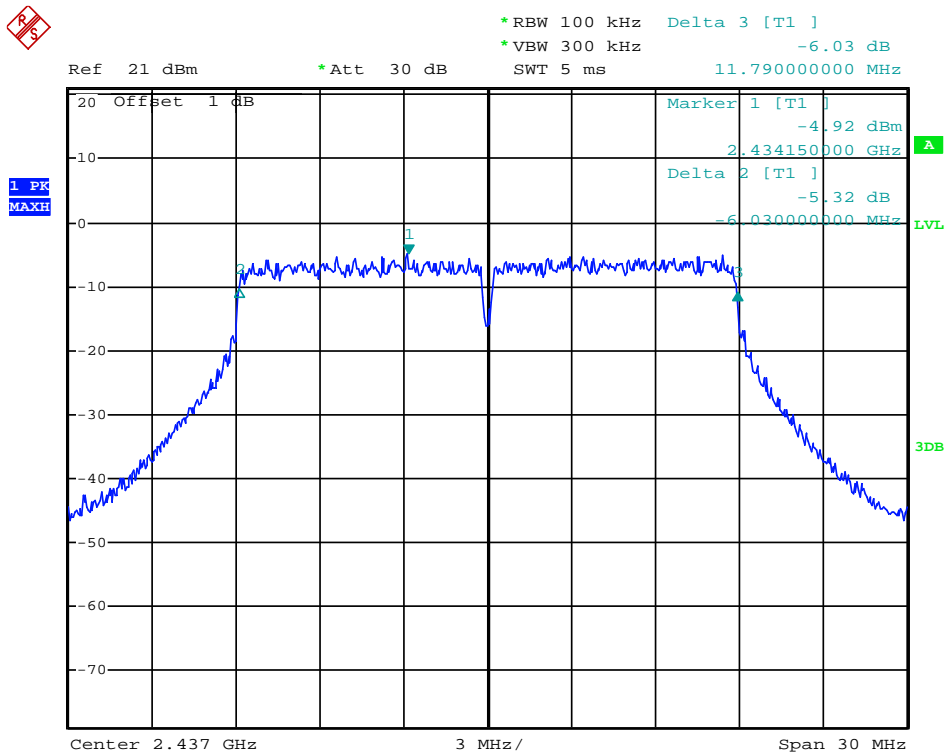

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n(20MHz))

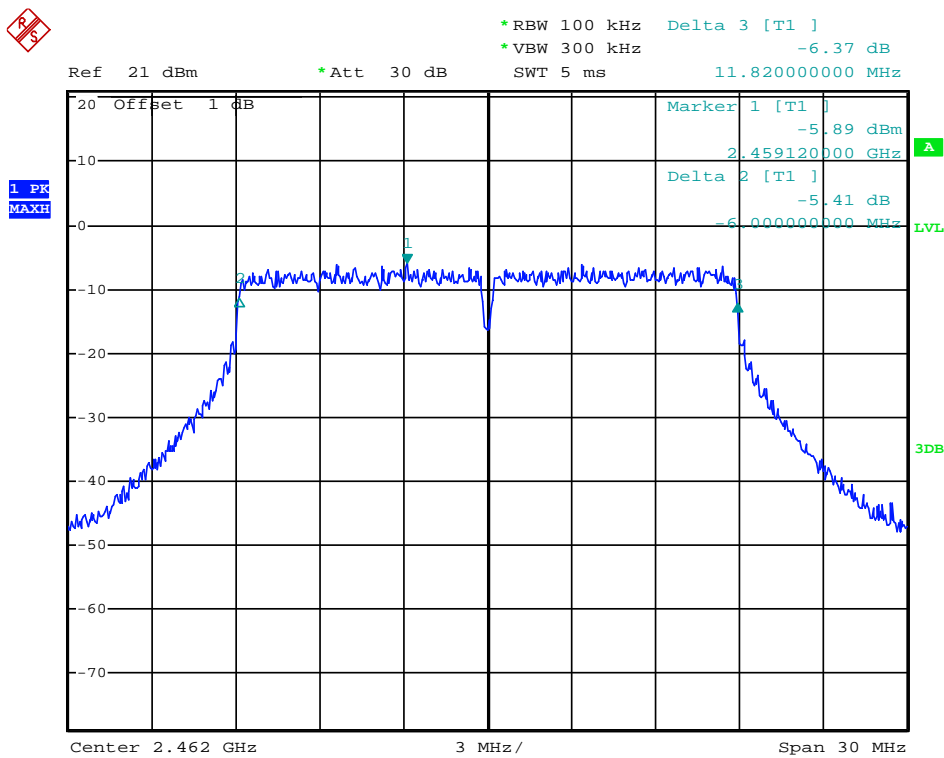

(Plot 4.7.3 C: Channel 11: 2462MHz @ 802.11n(20MHz))


4.7.4 801.11n(40MHz) Test Mode

A. Test Verdict


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
3	2422	36.50	Plot 4.7.4 A	≥500	PASS
6	2437	36.50	Plot 4.7.4 B	≥500	PASS
9	2452	36.50	Plot 4.7.4 C	≥500	PASS

Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.


B. Test Plots

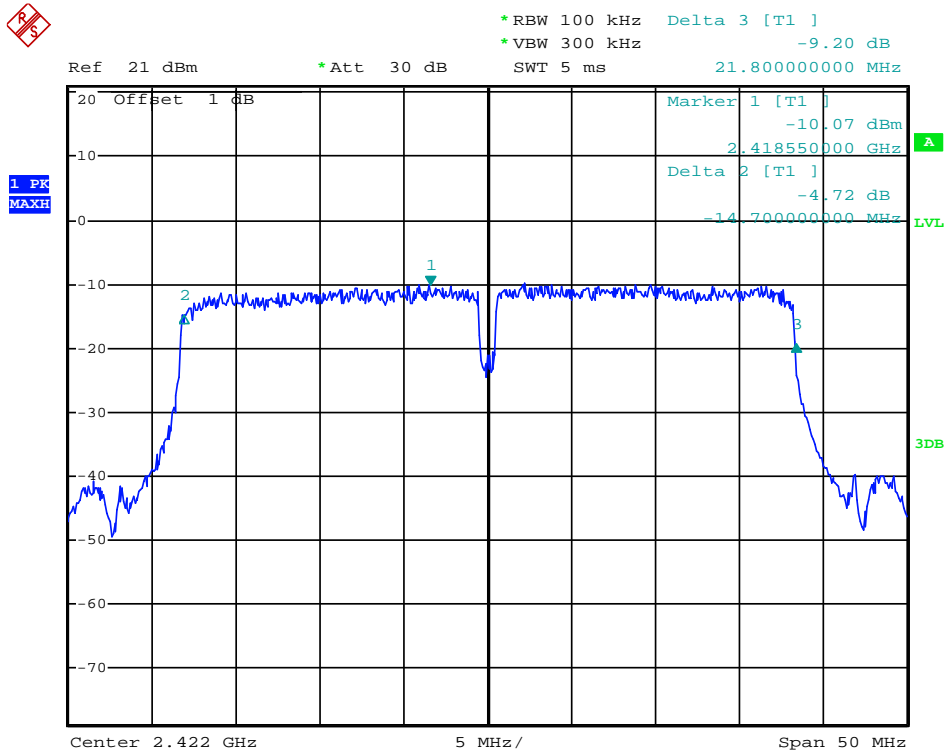

(Plot 4.7.4 A: Channel 3: 2422MHz @ 802.11n(40MHz))

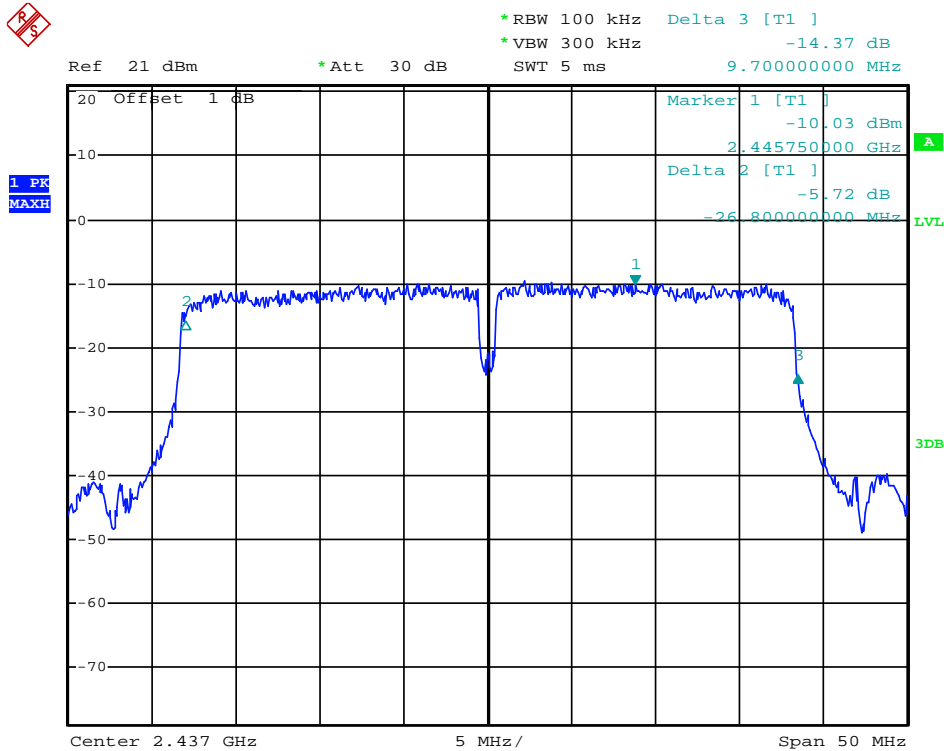

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n(40MHz))

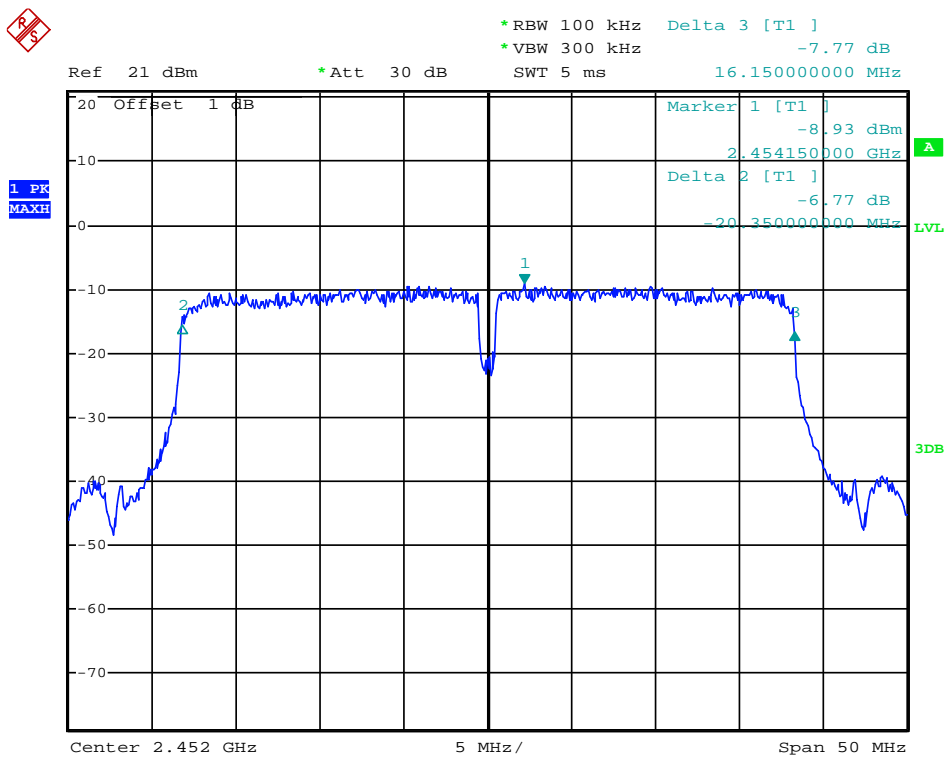

(Plot 4.7.4 C: Channel 9: 2452MHz @ 802.11n(40MHz))

4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.


Antenna Connected Construction

The maximum antenna gain of WLAN used was 0.00dBi.




5. Test Setup Photos of the EUT

Radiated Emission (30MHz-1GHz)

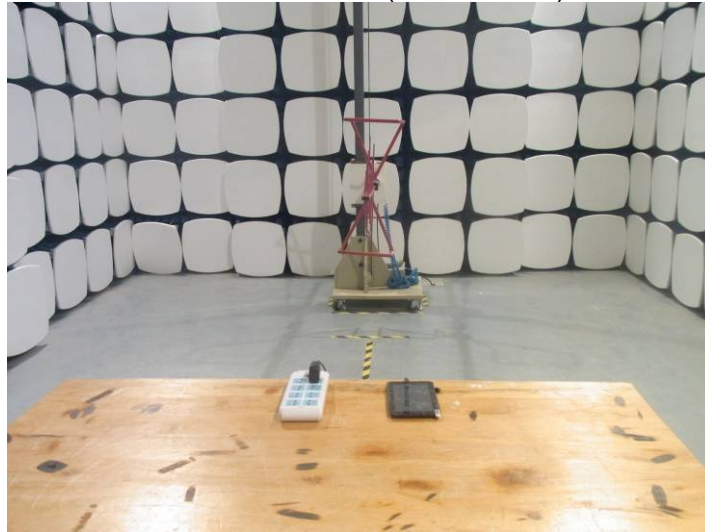

Radiated Emission (above 1GHz)

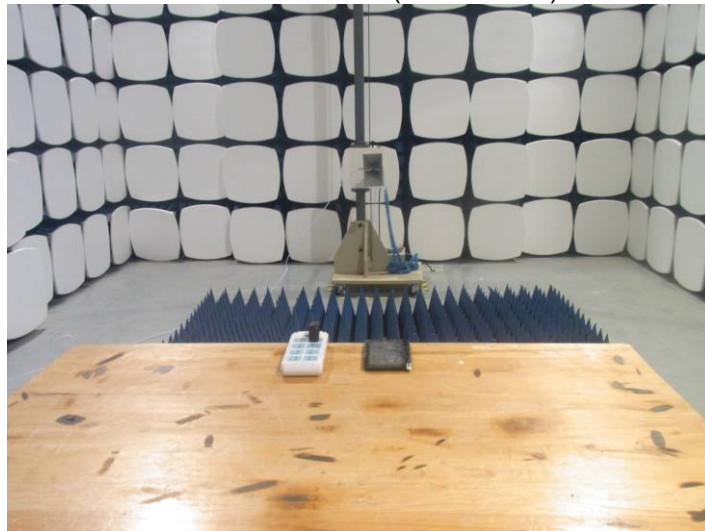

Conducted Emission (AC Mains)




6. External and Internal Photos of the EUT


External photos of the EUT






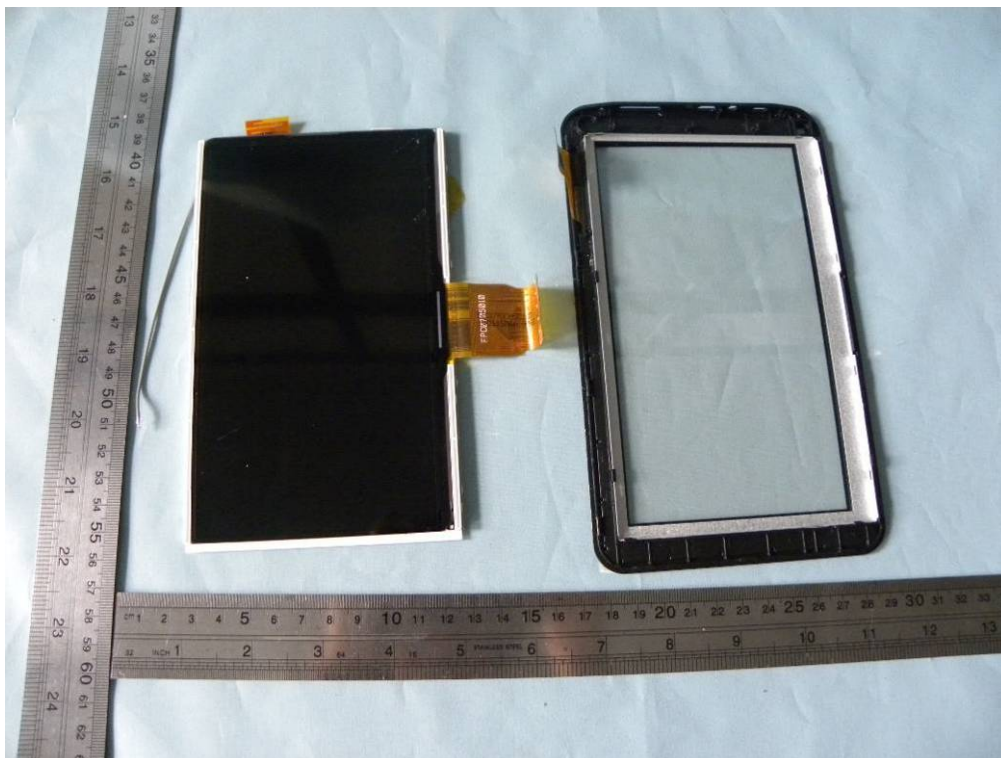

Internal photos of the EUT

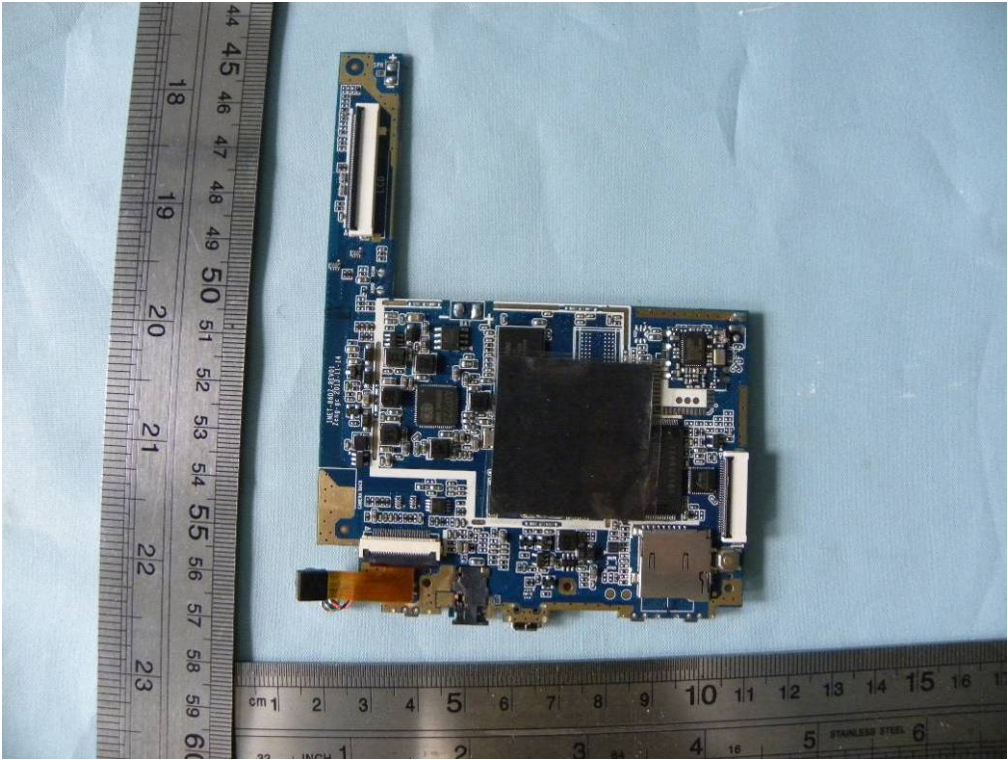

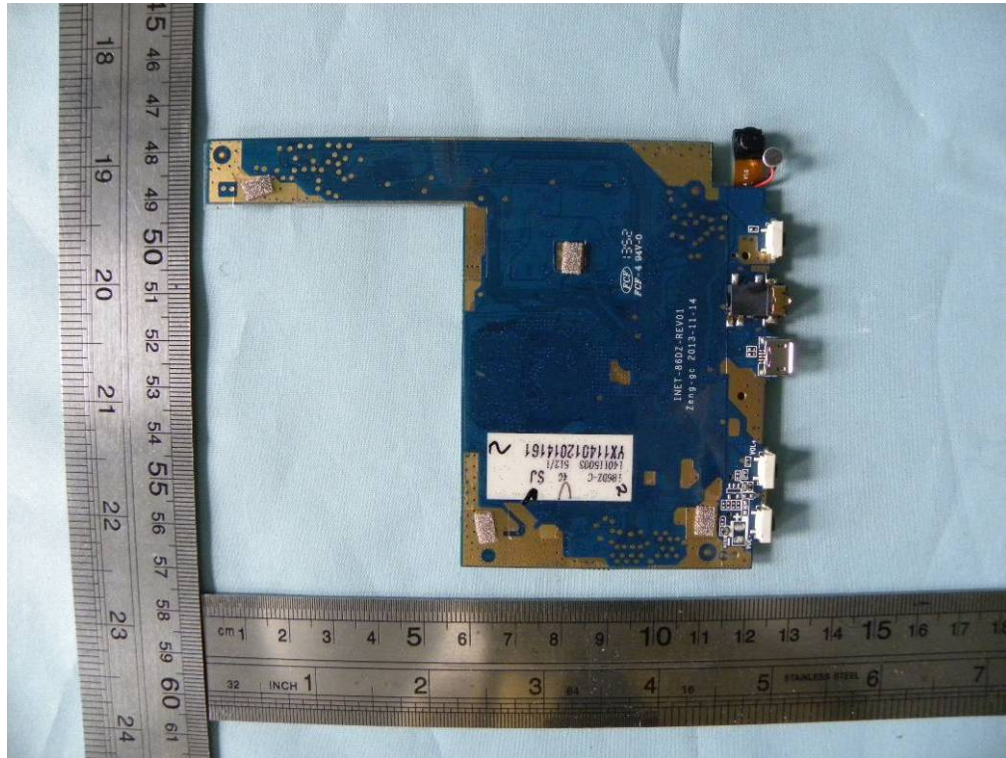

.....End of Report.....

7.