



TEST REPORT

Report Number: 101518599MIN-002

Project Number: G101518599

Testing performed on the
SAT-0002

FCC ID: 2AB7I-FEEDER01
Industry Canada ID: 11848A-FEEDER01

to
47 CFR Part 15. 249:2013
RSS- 210, Issue 8, 2010
RSS-Gen, Issue 3, 2010
47 CFR, Part 15:2013, §15.107 and §15.109, Class / ICES-003, Issue 5:2012

For
Smart Animal Training Systems, LLC

Test Performed by:
Intertek Testing Services NA, Inc.
7250 Hudson Blvd., Suite 100
Oakdale, MN 55128 USA

Test Authorized by:
Smart Animal Training Systems, LLC
133 W. Market Street
Indianapolis, IN 46204 USA

Prepared by: SKhazon
Simon Khazon

Date: March 17, 2014

Reviewed by: Richard Blonigen
Richard Blonigen

Date: March 17, 2014

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



TABLE OF CONTENTS

1.0 GENERAL DESCRIPTION..... 3

1.1 Product Description; Test Facility.....4

1.3 Environmental conditions5

1.4 Measurement uncertainty.....6

1.5 Field Strength Calculation6

2.0 TEST SUMMARY..... 7

3.0 TEST CONDITIONS AND RESULTS..... 8

3.1 Field strength of fundamental.....8

3.2 Field strength of harmonics and spurious emissions 10

3.3 Bandwidth of Emissions 17

3.4 Transmitter power line conducted emissions20

3.5 Receiver/digital device radiated emissions23

3.6 Digital device conducted emissions27

4.0 TEST EQUIPMENT..... 30



1.0 GENERAL DESCRIPTION

Model:	SAT-0002 with Switching Power Adapter FranMar, model ZZU1001-100050-2A
Type of EUT:	Feeder (Smart Animal Trainer)
Serial Number:	B0023
FCC ID:	2AB7I-FEEDER01
Industry Canada ID:	11848A- FEEDER01
Related Submittal(s) Grants:	None
Company:	Smart Animal Training Systems, LLC
Customer:	Mr. Wes Anderson
Address:	133 W. Market Street Indianapolis, IN 46204 USA
Phone:	317-721-4001
E-mail:	Wes@SmartAnimalTraining.com
Test Standards:	<input checked="" type="checkbox"/> 47 CFR, Part 15:2013, §15.249 <input checked="" type="checkbox"/> RSS-210, Issue 8, 20010 <input checked="" type="checkbox"/> RSS-Gen, Issue 3, 2010 <input checked="" type="checkbox"/> 47 CFR, Part 15:2013, §15.107 and §15.109, Class <input checked="" type="checkbox"/> ICES-003, Issue 5:2012 <input type="checkbox"/> Other
Type of radio:	<input checked="" type="checkbox"/> Stand -alone <input type="checkbox"/> Module <input type="checkbox"/> Hybrid
Date Sample Submitted:	February 28, 2014
Test Work Started:	March 7, 2014
Test Work Completed:	March 14, 2014
Test Sample Conditions:	<input type="checkbox"/> Damaged <input type="checkbox"/> Poor (Usable) <input checked="" type="checkbox"/> Good



1.1 Product Description; Test Facility

Product Description:	Dog Feeder Transceiver
Operating Frequency	2405 MHz
Modulation:	QPSK
Emission Designator:	2M81GXW
Antenna(s) Info:	Integral Antenna
Antenna Installation:	<input type="checkbox"/> User <input type="checkbox"/> Professional <input checked="" type="checkbox"/> Factory
Transmitter Power Configuration:	<input type="checkbox"/> Internal battery <input type="checkbox"/> External power source <input checked="" type="checkbox"/> 100-240VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> 400VAC <input type="checkbox"/> [REDACTED] VDC <input type="checkbox"/> Other: [REDACTED] 0.5 Amp. <input checked="" type="checkbox"/> 47-63Hz
Special Test Arrangement:	None
Test Facility Accreditation:	A2LA (Certificate No. 1427.01)
Test Methodology:	Measurements performed according to the procedures in ANSI C63.10-2009

1.2 EUT Configuration

The equipment under test was operated during the measurement under the following conditions:

- ☒ - Standby
- ☒ - Continuous
- ☐ - Continuous un-modulated
- ☐ - Test program (customer specific)
- ☐ -

Operating modes of the EUT:

No.	Description
1	In Continuous mode EUT was transmit every 1 second.

Cables:

No.	Type	Length	Designation	Note
1	Unshielded, 2 wires	1.2 m	AC/DC Adapter	

Support equipment/Services:

No.	Item	Description
	None	

1.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

☒ **Normal**

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

1.4 Measurement uncertainty

The expanded uncertainty ($k = 2$) for radiated emissions from 30 to 1000 MHz has been determined to be: ± 4 dB at 10m and ± 5.4 dB at 3m

The expanded uncertainty ($k = 2$) for conducted emissions from 150 kHz to 30 MHz has been determined to be:
 ± 2.6 dB

1.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured emissions reading on the EMI Receiver.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(m^{-1})

AG = Amplifier Gain in dB

Assume a receiver reading of 48.1 dB(μ V) is obtained. The antenna factor of 7.4 dB(m^{-1}) and cable factor of 1.6 dB is added and amplifier gain of 16.0 dB is subtracted giving field strength of 41.1 dB(μ V/m).

$$RA = 48.1 \text{ dB}(\mu V)$$

$$AF = 7.4 \text{ dB}(m^{-1})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 16.0 \text{ dB}$$

$$FS = RA + AF + CF - AG$$

$$FS = 48.1 + 7.4 + 1.6 - 16.0$$

$$FS = 41.1 \text{ dB}(\mu V/m)$$

General notes:

2.0 TEST SUMMARY

Referring to the performance criteria and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards.

TEST SPECIFICATION	TEST PARAMETERS	RESULT
15.249(a) / RSS-210 A2.9(a)	Field strength of fundamental	Pass
15.249(a) / RSS-210 A2.9(a)	Field strength of harmonics	Pass
15.249(d) / RSS-210 A2.9(b)	Field strength of spurious emissions	Pass
15.215(c) / RSS- Gen 4.6.1	Bandwidth of the emission	Pass
15.207/RSS-Gen 7.2.2	Transmitter Power Line conducted emissions	Pass
15.109/ICES-003	Receiver/digital device radiated emissions	Pass
15.107/ ICES-003	Digital device conducted emissions	Pass



3.0 TEST CONDITIONS AND RESULTS

3.1 Field strength of fundamental

Test location: ☐ OATS ☒ Anechoic Chamber ☐ Other

Test distance: ☐ 10 meters ☒ 3 meters

Test result: **Pass**

Max. Emissions margin at fundamental: **9.6dB below the limits**

Notes: None

Date:	March 7, 2014	Result: Pass
Standard:	FCC 15.249(a) / RSS-210 A2.9	
Tested by:	Simon Khazon	
Test Point:	Enclosure with antenna	
Operation mode:	See Page 5	
Note:	Fundamental	

Table 3.1.1

Frequency MHz	Antenna		Ant. CF dB1/m	Cable loss dB	Pre-amp Gain (dB)	Peak Reading dBμV	Total @ 3m dBμV/m	Ave Limit dBμV/m	Margin dB
	Polarity	Hts(cm)							
2405.19	V	121	28.4	2.9	0.0	50.8	82.1	94.0	-11.9
2405.19	H	159	28.4	2.9	0.0	53.1	84.4	94.0	-9.6



3.2 Field strength of harmonics and spurious emissions

Test location: ☐ OATS ☒ Anechoic Chamber ☐ Other

Test distance: ☐ 10 meters ☒ 3 meters

Frequency range of measurements: 30MHz-26000MHz

Test result: Pass

Max. margin of harmonics and spurious emissions: 1.3dB below the limits

Notes: None

Date:	March 7, 2014	Result: Pass
Standard:	FCC 15.249(a) and (d) / RSS-210 A2.9	
Tested by:	Simon Khazon	
Test Point:	Enclosure with antenna	
Operation mode:	See Page 5	
Note:	Frequency Range 30-1000MHz Measurements were taken using a Peak detector or CISPR Quasi-peak detector (marked *)	

Table 3.2.1

Frequency	Ant. Polarity	Reading dB μ V	Total C.F. dB1/m	Total at 3m dB μ V/m	Limit dB μ V/m	Margin dB
34.773 MHz	V	20.6	17.5	38.1	40.0	-2.0
36.545 MHz	V	22.0	16.5	38.5	40.0	-1.5
37.142 MHz	V	21.4	16.1	37.5	40.0	-2.5
43.651 MHz*	V	25.9	12.6	38.5	40.0	-1.5
44.02 MHz	V	25.0	12.4	37.4	40.0	-2.6
44.739 MHz	V	25.9	12.0	37.9	40.0	-2.1
46.82 MHz*	V	27.3	11.4	38.7	40.0	-1.3
49.493 MHz*	V	26.7	9.8	36.5	40.0	-3.5
51.19 MHz*	V	28.4	9.2	37.6	40.0	-2.4
44.754 MHz	H	17.1	12.0	29.1	40.0	-10.9
46.174 MHz	H	17.0	11.4	28.4	40.0	-11.6
50.433 MHz	H	19.1	9.5	28.6	40.0	-11.4
115.59 MHz	H	18.9	13.6	32.5	43.5	-11.0
128.06 MHz	H	18.3	13.7	31.9	43.5	-11.6
925.73 MHz	H	11.2	24.6	35.8	46.0	-10.2

Date:	March 7, 2014	Result: Pass
Standard:	FCC 15.249(a) and (d) / RSS-210 A2.9	
Tested by:	Simon Khazon	
Test Point:	Enclosure with antenna	
Operation mode:	See Page 5	
Note:	Frequency Range 1.0 – 26.0 GHz	

Table 3.2.2

Frequency MHz	Antenna Polarity	Peak Reading dBμV	Total C.F. dB1/m	Pre-Amp. Gain (dB)	Total at 3m dBμV/m	Limit dBμV/m	Margin dB
4.808 GHz	V	52.5	37.3	42.1	47.7	54.0	-6.3
4.808 GHz	H	52.2	37.2	42.1	47.2	54.0	-6.8


Date:	March 7, 2014	Result: Pass
Standard:	FCC 15.249(a) and (d) / RSS-210 A2.9	
Tested by:	Simon Khazon	
Test Point:	Enclosure with antenna	
Operation mode:	See Page 5	
Note:	Bandedge Compliance	

Table 3.2.3


Frequency MHz	Antenna		Ant. CF dB1/m	Cable loss dB	Pre-amp Gain (dB)	Peak Reading dBμV	Total @ 3m dBμV/m	Ave Limit dBμV/m	Margin dB
	Polarity	Hts(cm)							
240.00	V	100	12.2	1.2	0.0	5.5	18.9	54.0	-35.1
240.00	H	100	12.2	1.2	0.0	3.2	16.6	54.0	-37.4
2483.50	V	100	28.6	2.9	0.0	4.7	36.2	54.0	-17.8
2483.50	H	100	28.6	2.9	0.0	2.9	34.4	54.0	-19.6

Graph 3.2.1

Vertical antenna polarization

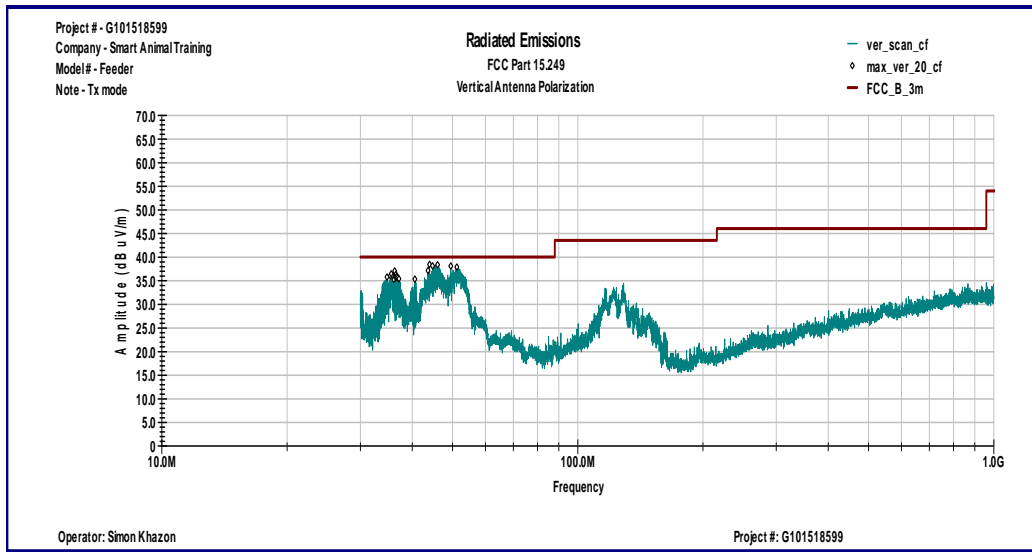


Horizontal antenna polarization

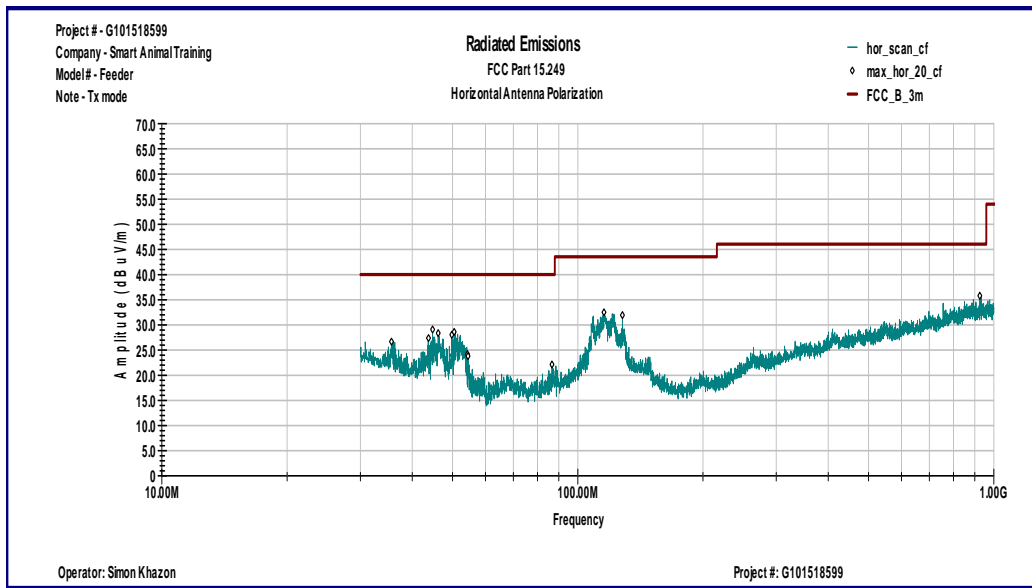


Graph 3.2.2

Vertical antenna polarization

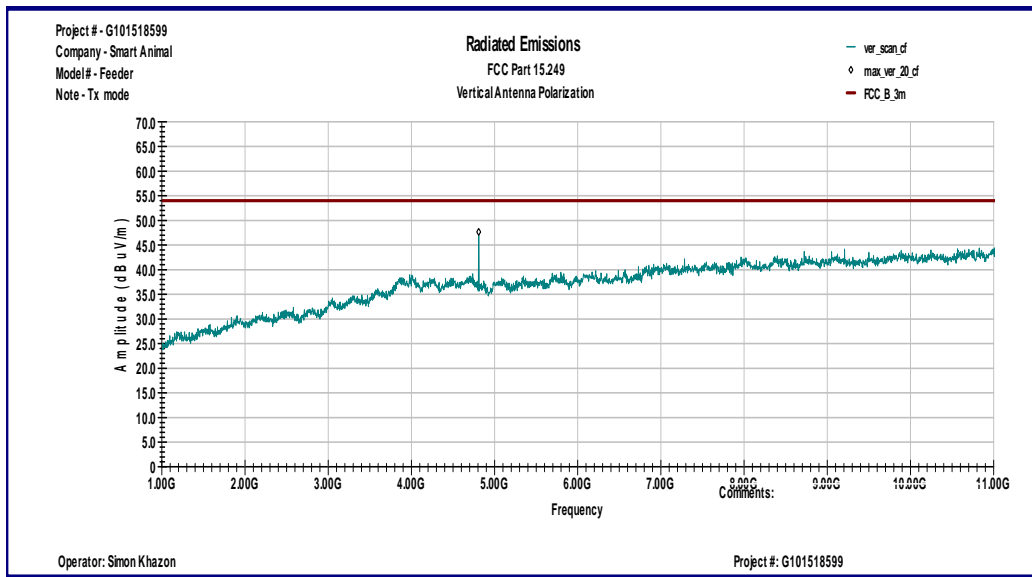


Horizontal antenna polarization

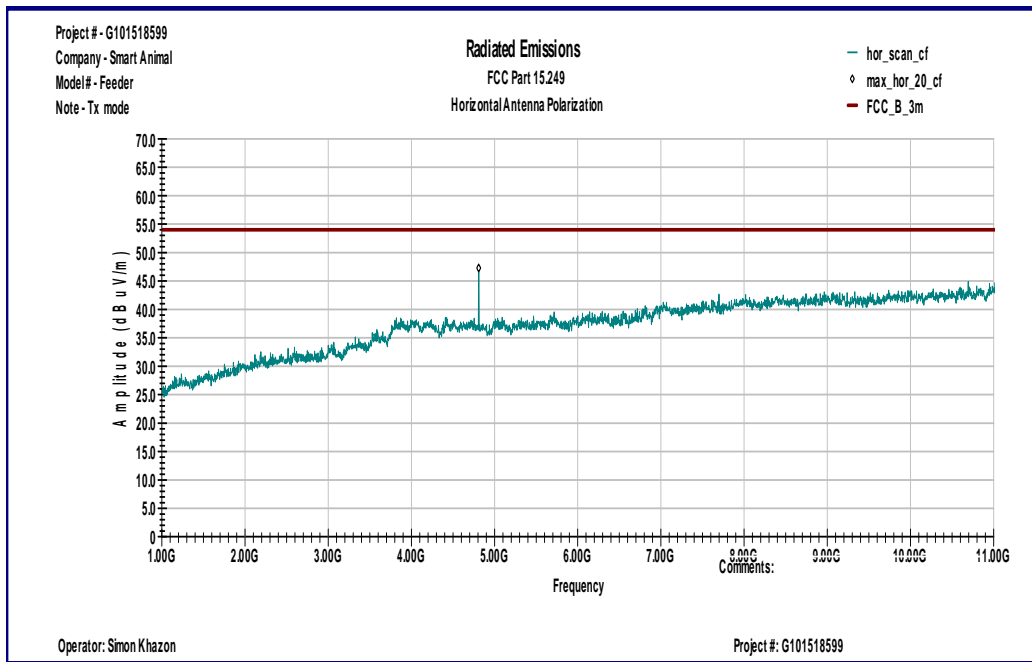


Graph 3.2.3

Vertical antenna polarization

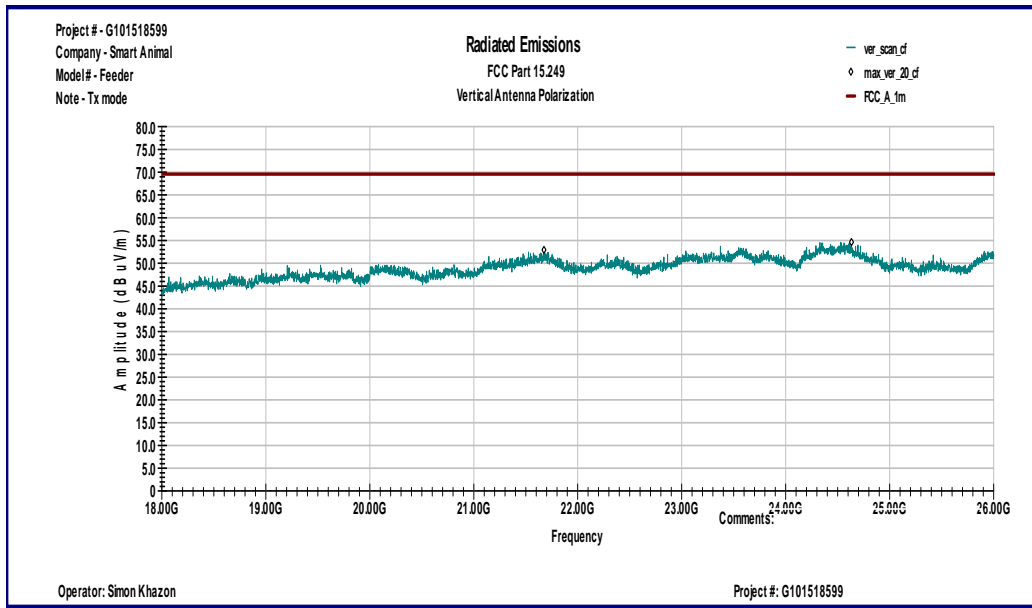

Horizontal antenna polarization

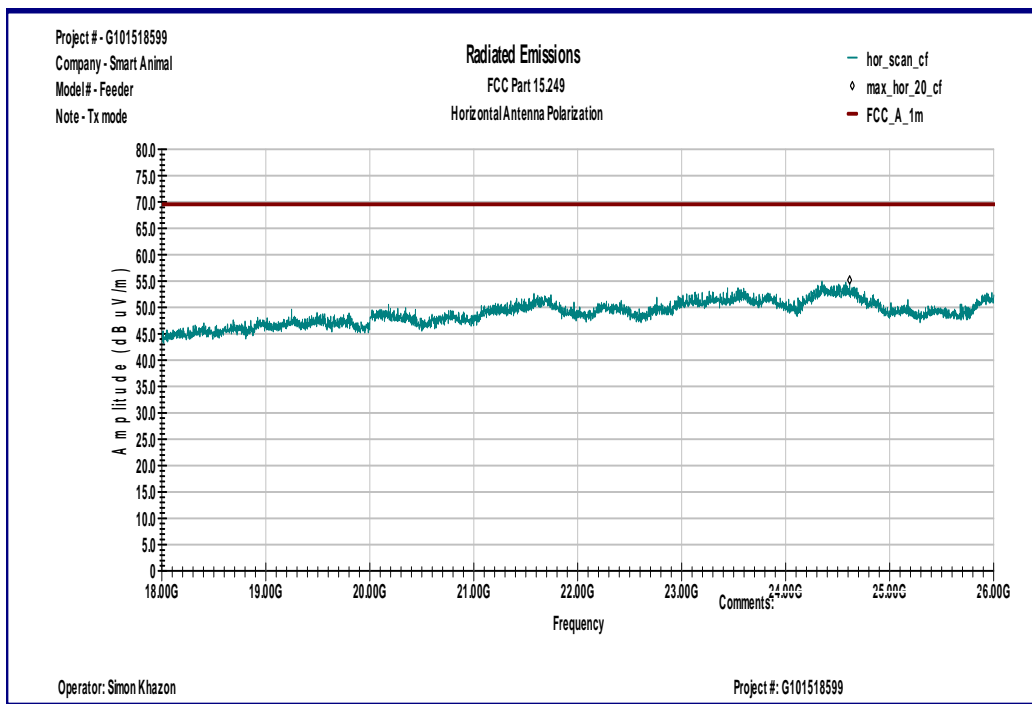




3.3 Bandwidth of Emissions

Center Frequency of operation MHz	Measured 20dB bandwidth kHz	Measured 99% bandwidth kHz
2405.19	2812	2600


Graphs 3-3-1 and 3-3-2 are show bandwidth of emissions

Notes: The bandwidth of emissions is contained within the frequency band of operation

Graph 3.3.1

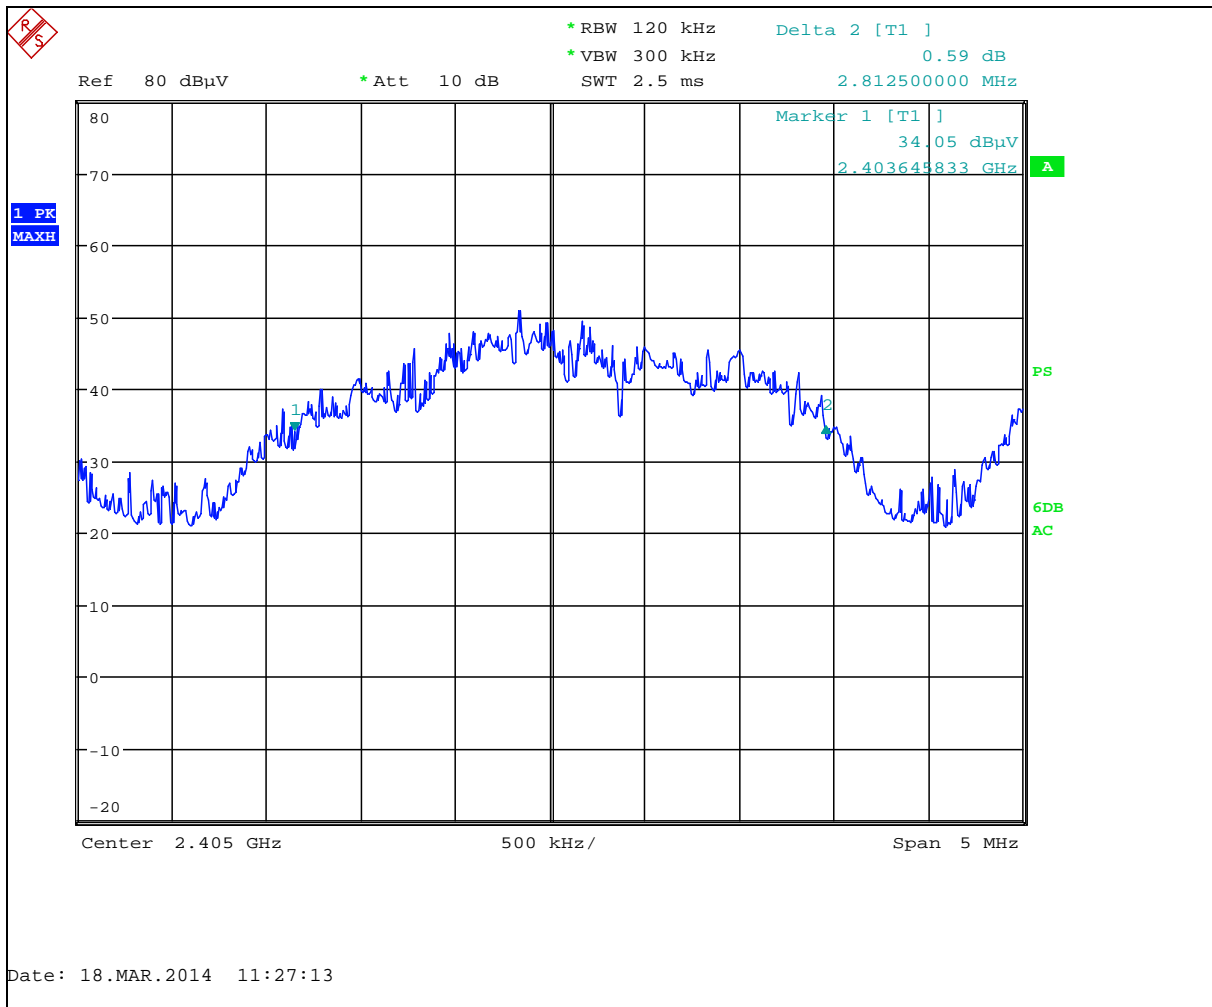

Graph 3.3.2

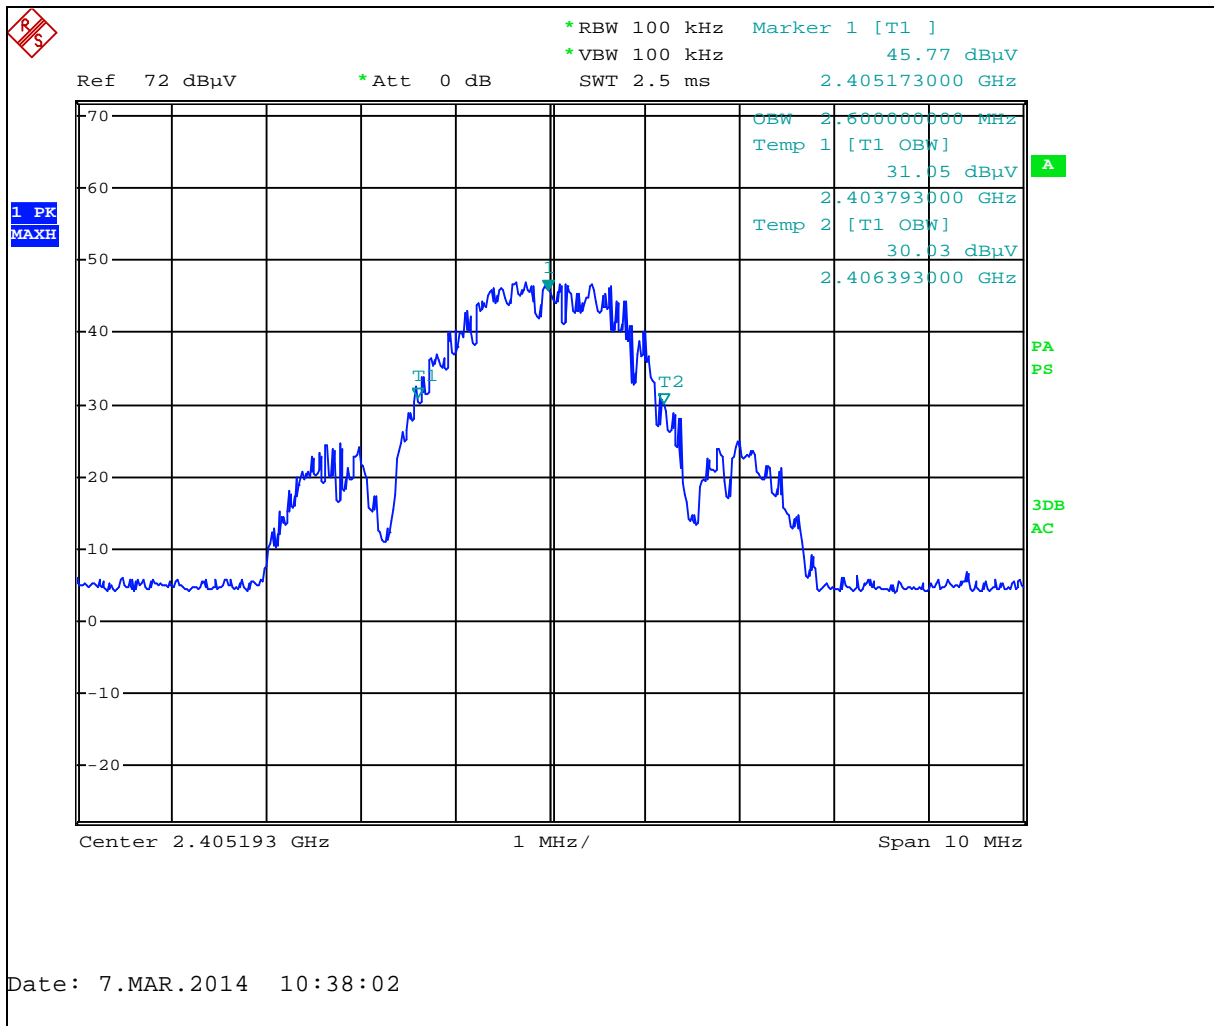



3.4 Transmitter power line conducted emissions

Test location: ☐ OATS ☒ Anechoic Chamber ☐ Other

Test result: **Pass**

Frequency range: 0.15MHz-30MHz

Max. Emissions margin: 10.3dB below the limits

Notes: None

Date:	March 10, 2014	Result: Pass
Standard:	FCC 15.207	
Tested by:	Simon Khazon	
Test Point:	Power Line	
Operation mode:	Transmitting mode	
Note:	None	

Table 3.4.1

Line 1


Frequency	Peak dB μ V	QP Limit dB μ V	AVG Limit dB μ V	QP Margin dB	AVG Margin dB
150.78 KHz	43.2	66.0	56.0	-22.7	-12.7
152.1 KHz	43.5	65.9	55.9	-22.4	-12.4
152.21 KHz	43.6	65.9	55.9	-22.3	-12.3
152.84 KHz	43.7	65.8	55.8	-22.1	-12.1
153.38 KHz	43.1	65.8	55.8	-22.8	-12.8
153.92 KHz	42.8	65.8	55.8	-23.0	-13.0
154.16 KHz	43.5	65.8	55.8	-22.3	-12.3
155.98 KHz	43.3	65.7	55.7	-22.4	-12.4
160.53 KHz	43.0	65.4	55.4	-22.5	-12.5
162.58 KHz	42.9	65.3	55.3	-22.5	-12.5
170.24 KHz	44.4	65.0	55.0	-20.6	-10.6
172.8 KHz	44.5	64.8	54.8	-20.3	-10.3

Line 2


Frequency	Peak dB μ V	QP Limit dBmV	AVG Limit dBmV	QP Margin dB	AVG Margin dB
150.66 KHz	43.7	66.0	56.0	-22.2	-12.2
151.32 KHz	43.7	65.9	55.9	-22.3	-12.3
152.17 KHz	44.3	65.9	55.9	-21.5	-11.5
152.8 KHz	43.4	65.9	55.9	-22.4	-12.4
154.12 KHz	43.2	65.8	55.8	-22.6	-12.6
154.51 KHz	42.7	65.8	55.8	-23.1	-13.1
156.06 KHz	43.3	65.7	55.7	-22.4	-12.4
165.61 KHz	42.7	65.2	55.2	-22.5	-12.5
170.04 KHz	42.6	65.0	55.0	-22.3	-12.3
171.44 KHz	43.1	64.9	54.9	-21.8	-11.8
172.76 KHz	42.6	64.8	54.8	-22.2	-12.2
176.02 KHz	43.0	64.7	54.7	-21.6	-11.6

Graph 3.4.1

Line 1

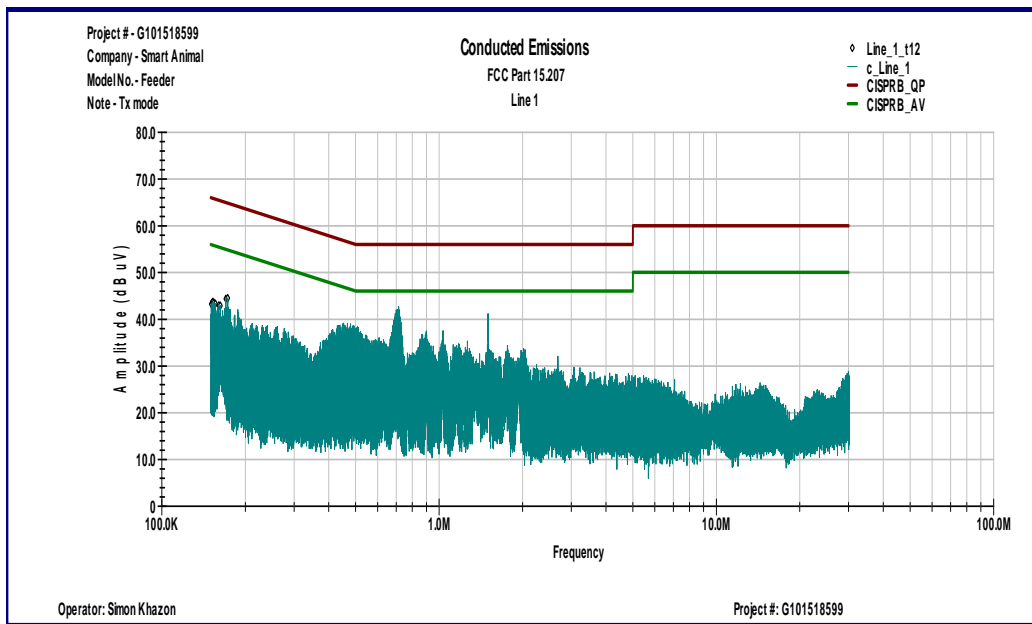

Line 2

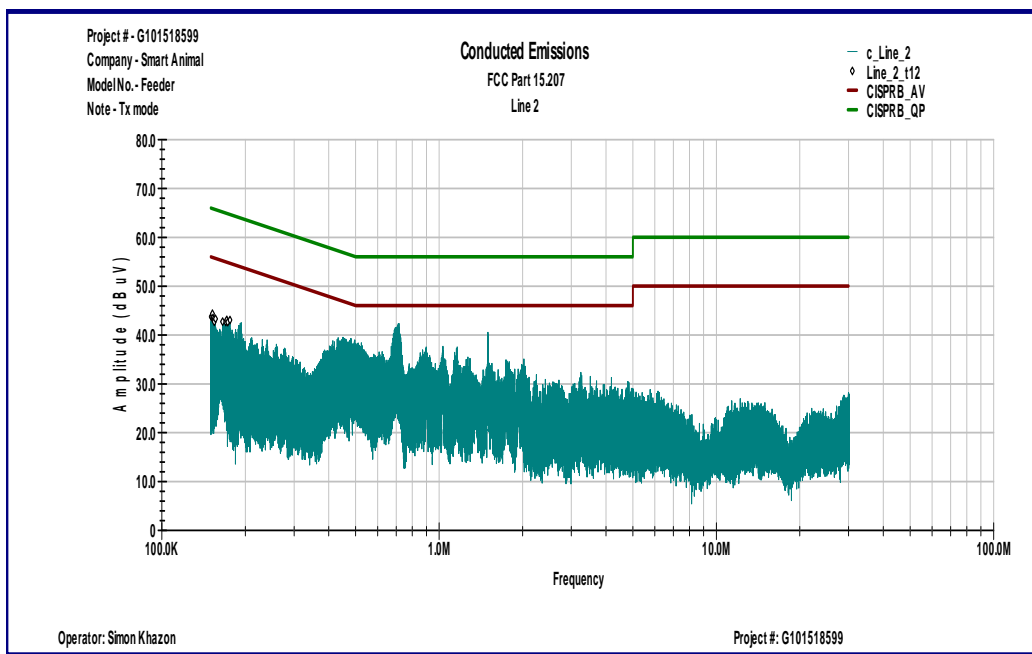



3.5 Receiver/digital device radiated emissions

Test location: ☐ OATS ☒ Anechoic Chamber

Test distance: ☐ 10 meters ☒ 3 meters

Test result: **Pass**

Frequency range: 30MHz-12000MHz

Max. Emissions margin: 1.9dB below the limits

Notes: The Radiated Emissions test was performed in the Anechoic chamber at 3m measurement distance (see Table 3.5.1-3.5.2 and Graphs 3.5.1 and 3.5.2)

Date:	March 7, 2014	Result: Pass
Standard:	FCC Part 15.109, Class B	
Tested by:	Simon Khazon	
Test Point:	Enclosure	
Operation mode:	Receiving/Standby mode	
Note:	Measurements were taken using a Peak detector or CISPR Quasi-peak detector (marked *)	

Table 3.5.1


Frequency	Ant. Polarity	Reading dB μ V	Total C.F. dB1/m	Total at 3m dB μ V/m	Limit dB μ V/m	Margin dB
30.07 MHz	V	13.5	20.3	33.8	40.0	-6.2
33.878 MHz	V	16.8	18.0	34.8	40.0	-5.2
34.562 MHz	V	19.3	17.6	36.8	40.0	-3.2
35.668 MHz*	V	20.9	17.0	37.9	40.0	-2.2
36.58 MHz	V	20.8	16.4	37.3	40.0	-2.7
39.914 MHz	V	20.0	14.6	34.6	40.0	-5.4
47.575 MHz*	V	27.4	10.7	38.1	40.0	-1.9
35.888 MHz	H	10.5	16.8	27.4	40.0	-12.6
46.347 MHz	H	19.5	11.3	30.8	40.0	-9.2
50.607 MHz	H	18.9	9.4	28.3	40.0	-11.7
86.943 MHz	H	13.3	9.4	22.7	40.0	-17.3
110.3 MHz	H	20.4	13.4	33.8	43.5	-9.8

Table 3.5.2


Frequency MHz	Antenna Polarity	Peak Reading dB μ V	Total C.F. dB1/m	Pre-Amp. Gain (dB)	Total at 3m dB μ V/m	Limit dB μ V/m	Margin dB
4.808 GHz	V	52.8	37.3	42.1	48.0	54.0	-6.0
4.808 GHz	H	52.5	37.2	42.1	47.6	54.0	-6.4

Graph 3.5.1

Vertical antenna polarization

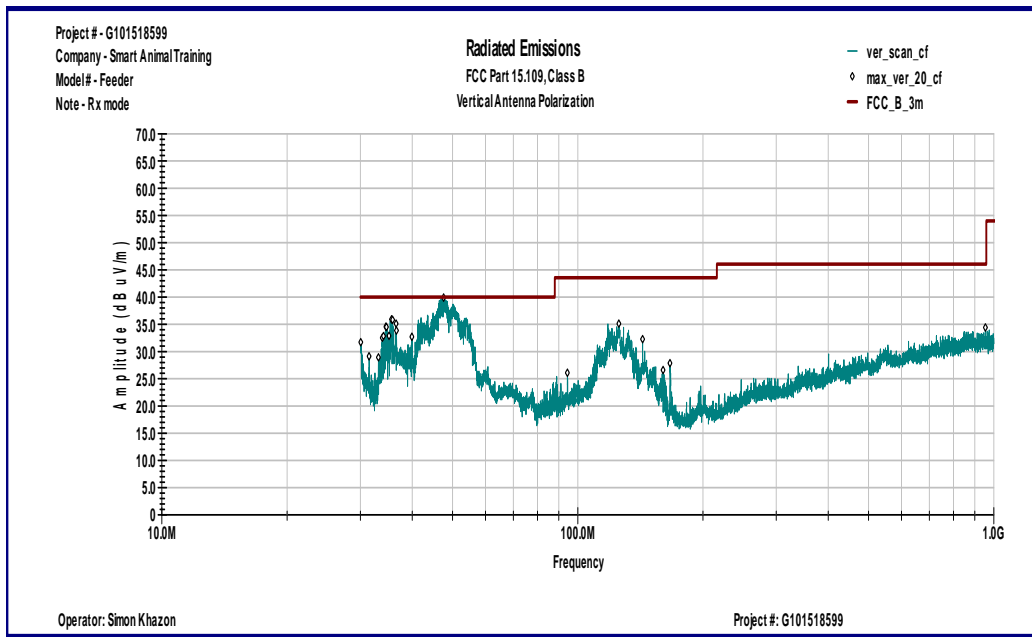


Horizontal antenna polarization

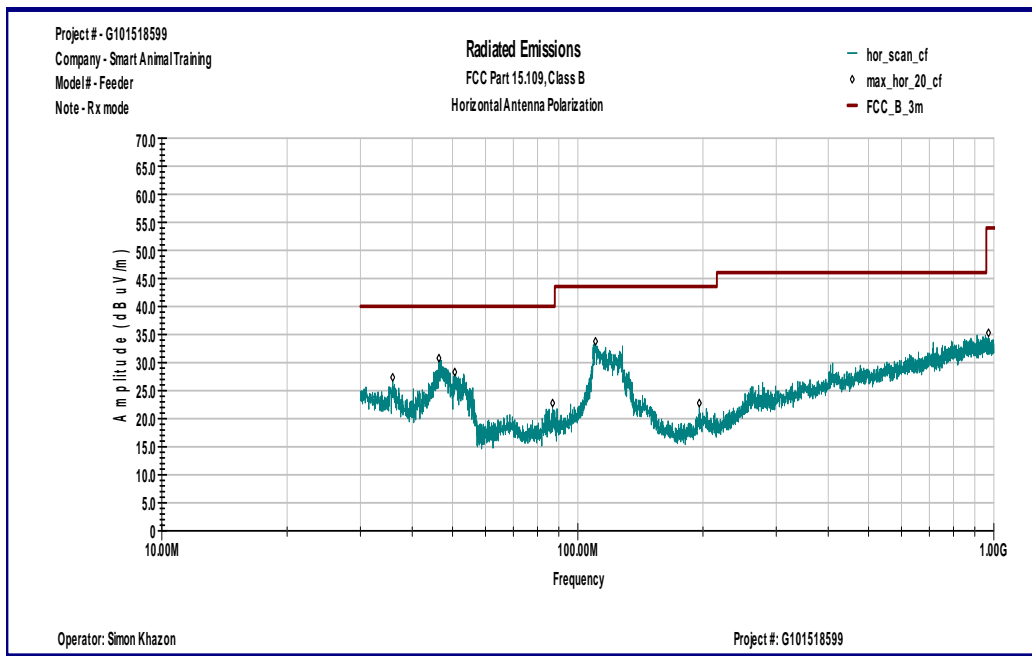


Graph 3.5.2

Vertical antenna polarization

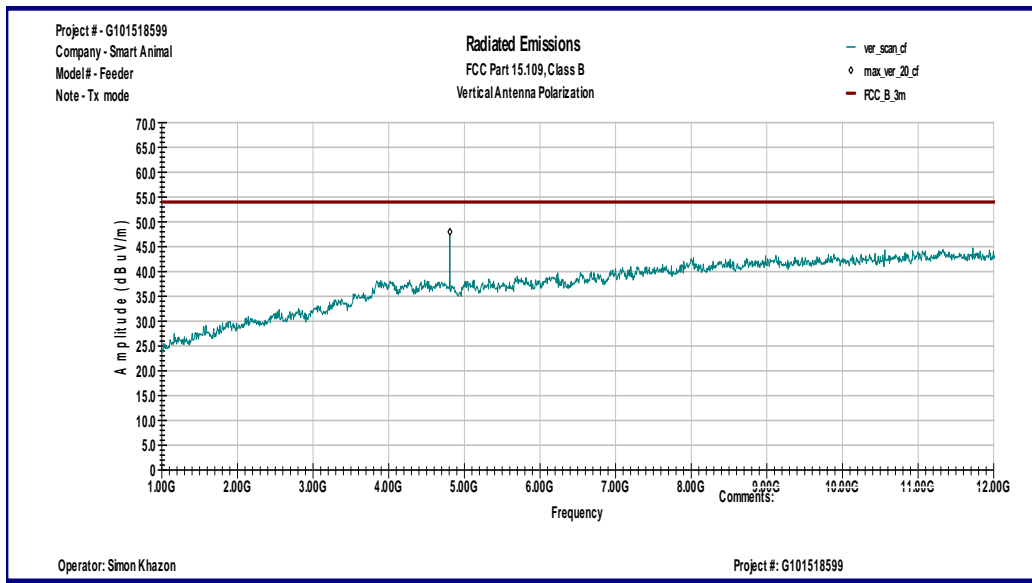

Horizontal antenna polarization

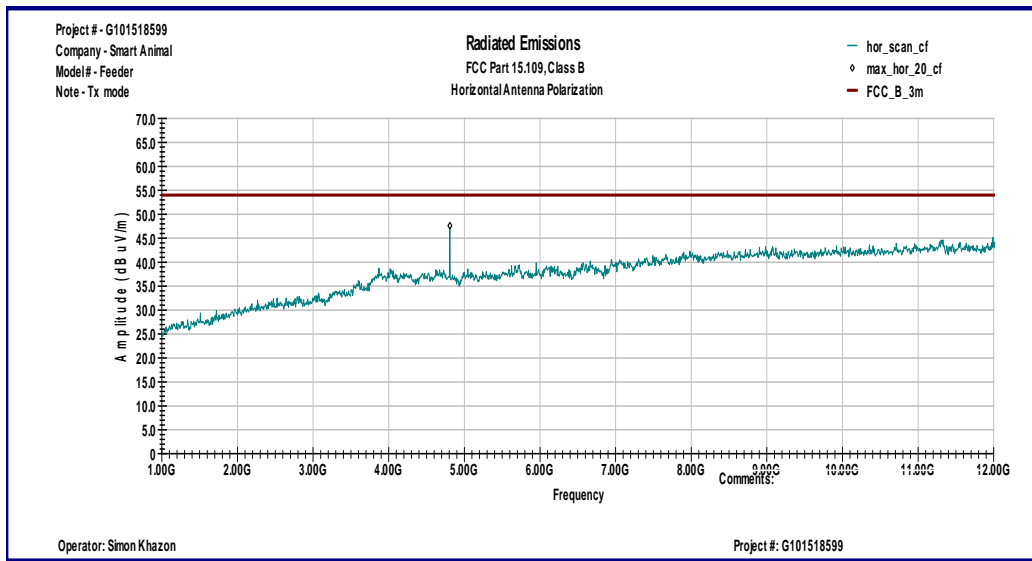



3.6 Digital device conducted emissions

Test location: ☐ OATS ☒ Anechoic Chamber ☐ Other

Test result: **Pass**

Frequency range: 0.15MHz-30MHz

Max. Emissions margin: 0.9dB below the limits

Notes: None

Date:	March 10, 2014	Result: Pass
Standard:	FCC 15.107, Class B	
Tested by:	Simon Khazon	
Test Point:	Power Line	
Operation mode:	Standby	
Note:		

Table 3.6.1

Line 1


Frequency	Peak dB μ V	QP Limit dB μ V	AVG Limit dB μ V	QP Margin dB	AVG Margin dB
150.0 KHz	45.9	66.0	56.0	-20.1	-10.1
150.74 KHz	45.6	66.0	56.0	-20.4	-10.4
170.74 KHz	45.3	64.9	54.9	-19.7	-9.7
171.36 KHz	45.1	64.9	54.9	-19.8	-9.8
171.98 KHz	45.2	64.9	54.9	-19.7	-9.7
172.64 KHz	45.2	64.8	54.8	-19.6	-9.6
173.3 KHz	45.2	64.8	54.8	-19.7	-9.7
173.96 KHz	44.6	64.8	54.8	-20.2	-10.2
174.62 KHz	45.0	64.7	54.7	-19.7	-9.7
712.04 KHz	45.1	56.0	46.0	-10.9	-0.9
714.83 KHz	44.9	56.0	46.0	-11.1	-1.1
717.46 KHz	44.5	56.0	46.0	-11.5	-1.5

Line 2


Frequency	Peak dB μ V	QP Limit dBmV	AVG Limit dBmV	QP Margin dB	AVG Margin dB
153.07 KHz	48.7	65.8	55.8	-17.2	-7.2
153.73 KHz	49.9	65.8	55.8	-15.9	-5.9
154.39 KHz	50.5	65.8	55.8	-15.3	-5.3
155.01 KHz	50.2	65.7	55.7	-15.5	-5.5
155.67 KHz	50.6	65.7	55.7	-15.1	-5.1
156.33 KHz	51.7	65.7	55.7	-14.0	-4.0
156.95 KHz	50.7	65.6	55.6	-15.0	-5.0
157.61 KHz	50.6	65.6	55.6	-15.0	-5.0
158.23 KHz	49.9	65.6	55.6	-15.7	-5.7
158.93 KHz	49.8	65.5	55.5	-15.7	-5.7
159.52 KHz	50.5	65.5	55.5	-15.0	-5.0
160.21 KHz	48.6	65.5	55.5	-16.9	-6.9

Graph 3.6.1

Line 1

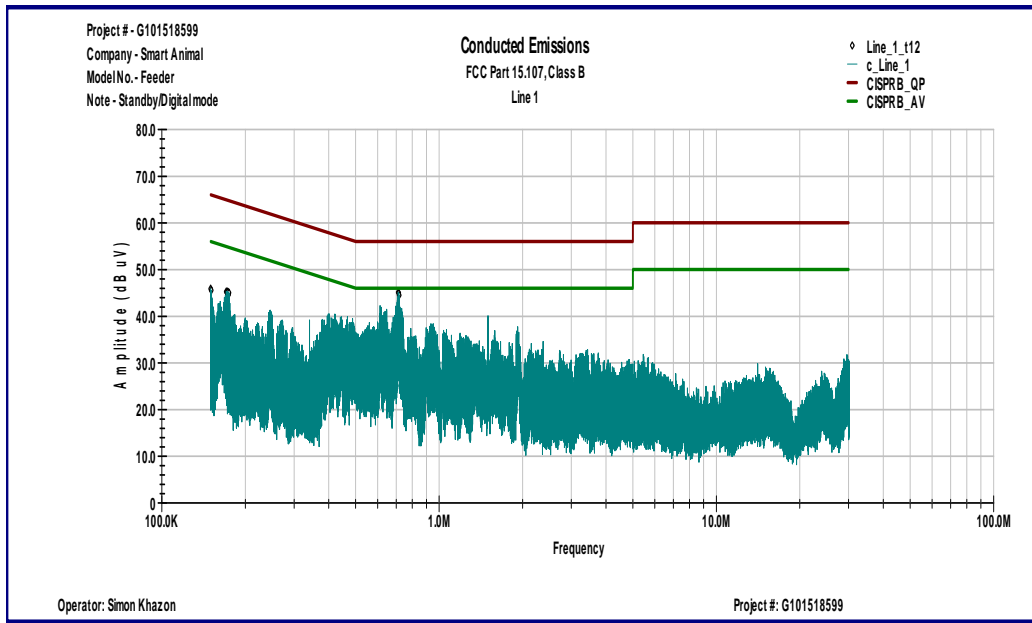

Line 2

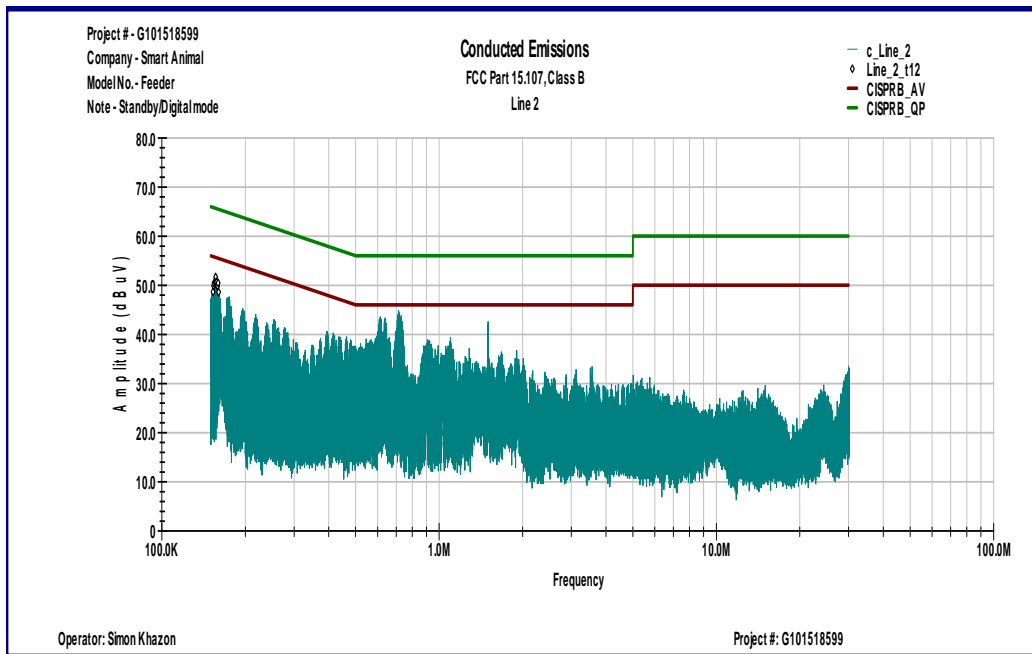

4.0 TEST EQUIPMENT

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	INTERTEK ID	CAL DUE	USED
Spectrum Analyzer	R & S	FSP 40	100024	12559	12/12/2014	<input checked="" type="checkbox"/>
Spectrum Analyzer	R & S	ESU	100398	25283	01/07/2015	<input checked="" type="checkbox"/>
Bicono-Log Antenna	Schaffner-Teseq	CBL6112B	2468	9734	12/12/2014	<input checked="" type="checkbox"/>
Horn Antenna	EMCO	3115	6579	15580	07/18/2014	<input checked="" type="checkbox"/>
Waveguide Horn Antenna	EMCO	3116	9904-2423	9705	11/12/2014	<input checked="" type="checkbox"/>
LISN	Solar Electronics	9252-50-R-24-BNC	068545	MIN-0060	02/19/2015	<input checked="" type="checkbox"/>
Pre-Amplifier	MITEQ	AMF-5D-00501800-28-13P	1402232	172081	11/12/2014	<input checked="" type="checkbox"/>
Pre-Amplifier	MITEQ	AMF-6F-16002600-25-10P	1222383	MIN-0065	11/12/2014	<input checked="" type="checkbox"/>
System	Quantum Change	TILE! Instrument Control	Ver. 3.4.K.29	15259	VBU	<input checked="" type="checkbox"/>