

FCC TEST REPORT

For
Coolwi LLC

Wi-Fi Extender Smart Lamp

Model No.: ZH01-WB, ZH01-W, ZH01-BW, ZH01-WR,
ZH01-WBL, ZH02-W, ZH02-B, ZH03-WB,
ZH03-BW, ZH03-WBL01, ZH03-WBL02,
ZH03-WP01, ZH03-WP02

Test Report Number : ESTSZ131101204F-1



Shenzhen Exact Standard Testing Technology Co., Ltd.
No. 403, Building 7, Xinyuan Industrial Park, Xinguang Road,
Xili, Nanshan District, Shenzhen 518055, China
Tel:+86-755-26648640 Fax:+86-755-26648637

TABLE OF CONTENTS

| | |
|---|-----------|
| 1 - GENERAL INFORMATION | 3 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 3 |
| 1.2 TEST STANDARDS | 3 |
| 1.3 TEST METHODOLOGY | 4 |
| 1.4 TEST FACILITY | 4 |
| 1.5 TEST ITEM | 4 |
| 1.6 TEST EQUIPMENT LIST AND DETAILS | 5 |
| 2 TEST CONFIGURATION | 6 |
| 2.1 JUSTIFICATION | 6 |
| 2.2 EUT EXERCISE SOFTWARE | 6 |
| 2.3 SPECIAL ACCESSORIES | 6 |
| 2.4 EQUIPMENT MODIFICATIONS | 6 |
| 2.5 BASIC TEST SETUP BLOCK DIAGRAM | 6 |
| 3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS | 8 |
| 3.1 MEASUREMENT UNCERTAINTY | 8 |
| 3.2 LIMIT OF DISTURBANCE VOLTAGE AT THE MAINS TERMINALS (FCC PART 15.207) | 8 |
| 3.3 EUT SETUP | 8 |
| 3.4 INSTRUMENT SETUP | 8 |
| 3.5 TEST PROCEDURE | 9 |
| 3.6 TEST SITUATION | 9 |
| 3.7 TEST RESULT | 9 |
| 4 RADIATED DISTURBANCES | 12 |
| 4.1 MEASUREMENT UNCERTAINTY | 12 |
| 4.2 LIMIT OF RADIATED DISTURBANCES (FCC PART 15.209) | 12 |
| 4.3 EUT SETUP | 12 |
| 4.4 TEST RECEIVER SETUP | 12 |
| 4.5 TEST PROCEDURE | 13 |
| 4.6 RADIATED EMISSIONS TEST RESULT | 13 |
| 4.7 TEST RESULT | 13 |
| 5 - FCC PART 15.247 REQUIREMENTS | 16 |
| 5.1 OUTPUT POWER REQUIREMENTS | 16 |
| 5.2 OCCUPIED BANDWIDTH REQUIREMENTS | 33 |
| 5.3 BAND EDGE REQUIREMENTS | 50 |
| 5.4 PEAK POWER SPECTRAL DENSITY REQUIREMENTS | 63 |
| 5.5 MAXIMUM PERMISSIBLE EXPOSURE REQUIREMENTS | 80 |
| 5.6 TRANSMITTER SPURIOUS EMISSIONS | 82 |
| APPENDIX A - EUT PHOTOGRAPHS | 86 |
| EUT - FRONT VIEW | 86 |
| EUT - BACK VIEW | 86 |
| EUT - SIDE VIEW | 87 |
| EUT - SIDE VIEW | 87 |
| EUT - INSIDE VIEW | 88 |
| EUT - INSIDE VIEW | 88 |
| EUT - INSIDE VIEW | 89 |
| EUT - INSIDE VIEW | 89 |
| EUT - INSIDE VIEW | 90 |
| EUT - INSIDE VIEW | 90 |
| EUT - INSIDE VIEW | 91 |
| EUT - INSIDE VIEW | 91 |
| APPENDIX B. TEST SETUP PHOTOGRAPHS | 92 |
| CONDUCTED EMISSION | 92 |
| RADIATED EMISSION | 92 |

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Coolwi LLC

Address of applicant: c/o Caffey Law Firm, LLC, Suite 700, 3 Bethesda Metro Center, Bethesda, Maryland 20814 in USA

Manufacturer: Shenzhen Zihwang Tech Co., Ltd

Address of manufacturer: Room 620, Zone 3, No. 168 Baoyuan Road Xinxiang Street, Baoan District, Shenzhen

General Description of E.U.T

EUT Description: Wi-Fi Extender Smart Lamp

Trade Name: N/A

Model No.: ZH01-WB, ZH01-W, ZH01-BW, ZH01-WR, ZH01-WBL, ZH02-W, ZH02-B, ZH03-WB, ZH03-BW, ZH03-WBL01, ZH03-WBL02, ZH03-WP01, ZH03-WP02

Remark: The models of EUT are identical except color and model name of equipment. Unless otherwise specified, all tests were performed on model ZH01-WB to represent the other similar models.

Rating: AC 100-240V, 50/60Hz

Test Power Supply: AC 120V, 60Hz

Frequency: 2412~2462 MHz (11 channels, 5MHz step size)

1.2 Test Standards

The following Declaration of Conformity report of EUT is prepared in accordance with

FCC Rules and Regulations Part 15 Subpart C 15.207, 15.209 and 15.247: 2009

The objective of the manufacturer is to demonstrate compliance with the described above standards.
Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of Shenzhen Exact Standard Testing Technology Co., Ltd.

Date of Test :

Nov. 05~25, 2013

Prepared by :



(Testing Engineer: David He)

Reviewer :



(Project Manager: Ronnie Liu)

Approved & Authorized Signer :



(Manager: Alex Chen)

1.3 Test Methodology

The tests were performed according to following standards:

FCC Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.4-2009

ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices.

KDB Publication No. 558074 Guidance on Measurements for Digital Transmission Systems

The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

The maximum emission levels emanating from the device are compared to the FCC Part 15 Subpart C limits for radiation emissions and the measurement results contained in this test report show that EUT is to be technically compliant with FCC requirements.

Global United Technology Service Co., Ltd at 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China

1.4 Test Facility

All measurement required was performed at laboratory of Global United Technology Service Co., Ltd at 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 600491

Global United Technology Service Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 600491.

The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

1.5 Test Item

| Test Item | Mode | Data Rate | Channel |
|--|-----------------|-----------|---------|
| AC Power Conducted Emission | Normal Link | 11 Mbps | 1 |
| Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission | 11b/DSSS | 11 Mbps | 1/6/11 |
| | 11g/OFDM | 54 Mbps | 1/6/11 |
| | 11n(20MHz)/OFDM | 65Mbps | 1/6/11 |
| | 11n(40MHz)/OFDM | 135Mbps | 3/6/9 |
| Radiated Emission 30MHz~1GHz Radiated Emission 1GHz~10th Harmonic | 11b/DSSS | 11 Mbps | 1/6/11 |
| | 11g/OFDM | 54 Mbps | 1/6/11 |
| | 11n(20MHz)/OFDM | 65Mbps | 1/6/11 |
| | 11n(40MHz)/OFDM | 135Mbps | 3/6/9 |
| Band Edge Compliance of RF Emission | 11b/DSSS | 11 Mbps | 1/6/11 |
| | 11g/OFDM | 54 Mbps | 1/6/11 |
| | 11n(20MHz)/OFDM | 65Mbps | 1/6/11 |
| | 11n(40MHz)/OFDM | 135Mbps | 3/6/9 |

1.6 Test Equipment List and Details

| Equipment | Manufacturer | Model# | Serial # | Data of Cal. | Due Data |
|---------------------------------|-----------------------------|-----------------------|----------|---------------|---------------|
| 3m Semi-Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS201 | Mar. 30 2013 | Mar. 30 2014 |
| Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS202 | N/A | N/A |
| EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | Mar. 30 2013 | Mar. 30 2014 |
| EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| Coaxial Cable | GTS | N/A | GTS400 | Apr. 01 2013 | Apr. 01 2014 |
| Coaxial Cable | GTS | N/A | GTS401 | Apr. 01 2013 | Apr. 01 2014 |
| Coaxial Cable | GTS | N/A | GTS402 | Apr. 01 2013 | Apr. 01 2014 |
| Coaxial Cable | GTS | N/A | GTS407 | Apr. 01 2013 | Apr. 01 2014 |
| Coaxial Cable | GTS | N/A | GTS408 | Apr. 01 2013 | Apr. 01 2014 |
| BiConiLog Antenna (26-3000MHz) | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS204 | Feb. 26 2013 | Feb. 26 2014 |
| Pre-amplifier(0.1-3000MHz) | HP | 8347A | GTS210 | Aug. 03 2013 | Aug. 03 2014 |
| Double-ridged horn (1-18GHz) | SCHWARZBECK MESS-ELEKTRONIK | 9120D-829 | GTS205 | Feb. 26 2013 | Feb. 26 2014 |
| Pre-amplifier(1-18GHz) | Rohde & Schwarz | 8349B | GTS224 | Mar. 30 2013 | Mar. 30 2014 |
| Humidity/ Temperature Indicator | Shanghai | ZJ1-2B | GTS250 | Oct. 28 2013 | Oct. 28 2014 |
| Barometer | ChangChun | DYM3 | GTS251 | Feb. 26 2013 | Feb. 26 2014 |
| Shielding Room | ZhongYu Electron | 7.0(L)*3.0(W)*3.0(H) | GTS206 | Apr. 10 2013 | Apr. 10 2014 |
| EMI Test Receiver | Rohde & Schwarz | ESCS30 | GTS208 | Sept. 14 2013 | Sept. 14 2014 |
| 10dB Pulse Limiter | Rohde & Schwarz | N/A | GTS209 | Sept. 14 2013 | Sept. 14 2014 |
| LISN | SCHWARZBECK MESS-ELEKTRONIK | NSLK 8127 | GTS207 | Apr. 14 2013 | Apr. 14 2014 |
| Coaxial Cable | GTS | N/A | GTS406 | Apr. 01 2013 | Apr. 01 2014 |
| Loop Antenna | ETS-Lindgren | 6502 | 00082431 | Apr. 14 2013 | Apr. 14 2014 |
| Double-ridged horn (15-26.5GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA-9170 | GTS211 | Apr. 01 2013 | Apr. 01 2014 |

2 TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software offered by manufacture, can let the EUT being normal operation.

2.3 Special Accessories

As shown in section 2.5, interface cable used for compliance testing is shielded as normally supplied by **Coolwi LLC** and its respective support equipment manufacturers.


2.4 Equipment Modifications

The EUT tested was not modified by EST.


2.5 Basic Test Setup Block Diagram

2.5.1 Setup on the tabletop


| | |
|-----------|--|
| Adapter: | Company: SHENZHEN NALIN ELEC TECH CO LTD Model: NLD120120W1A2 DC Cable: 2.0 meters, without core |
| Load: | Mobile Phone Company: HTC Corporation Model: PG32100 |
| USB Cable | 1.0 meters, without core |

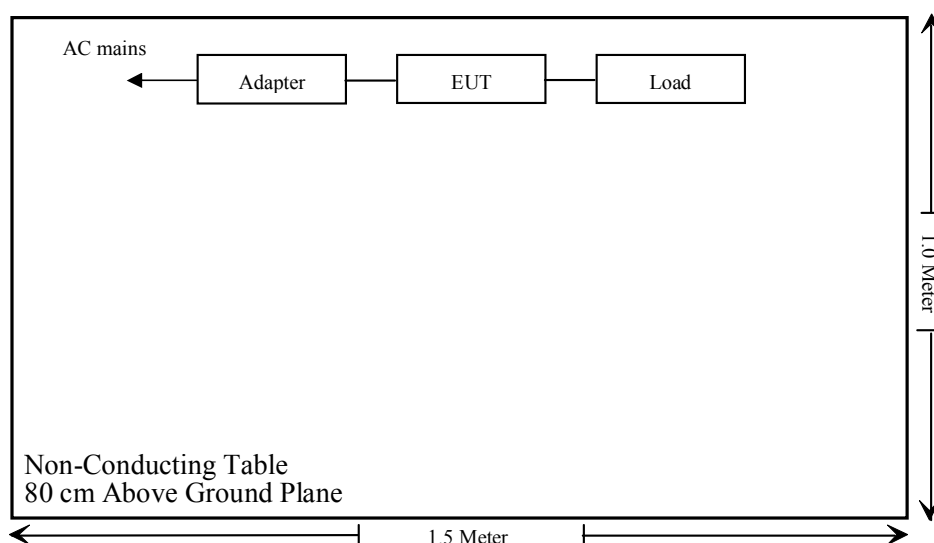


2.5.2 Conducted emission Setup

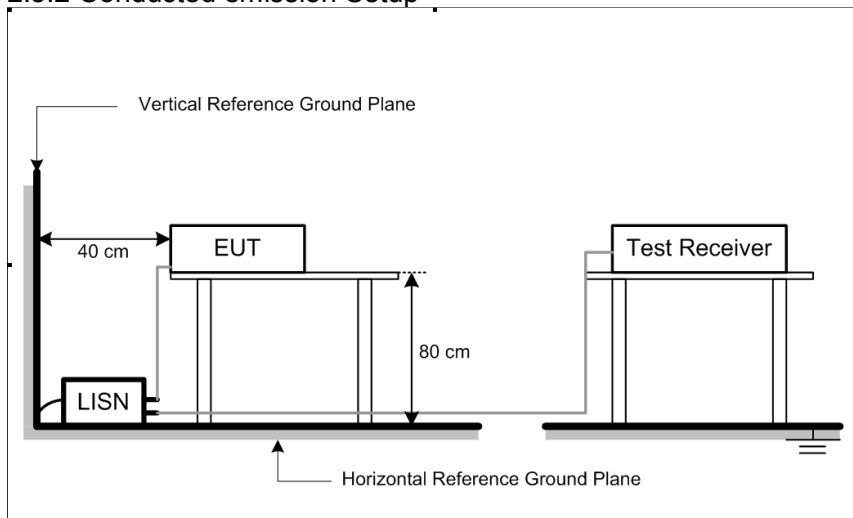

2.5.3 Radiated Emission Setup 1GHz below

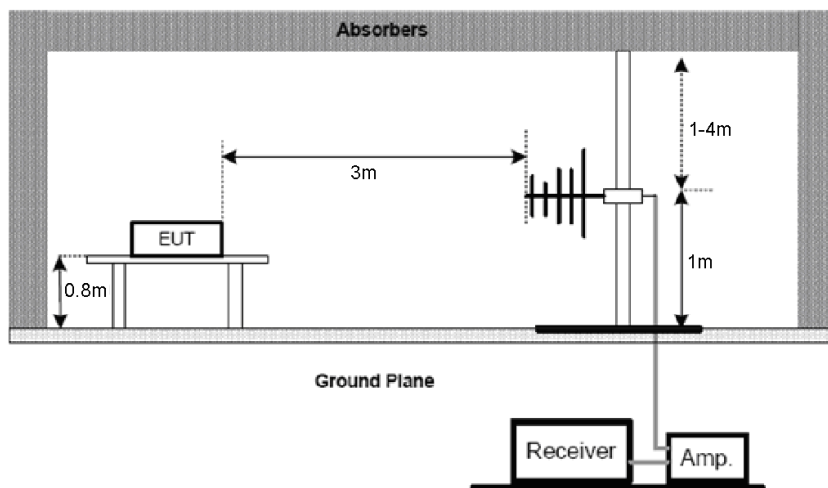

1GHz above

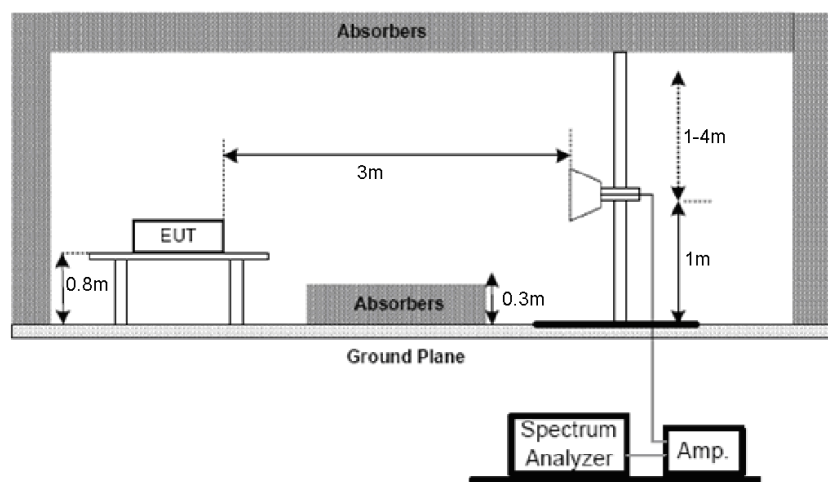

3 - DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

3.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.4 dB.

3.2 Limit of Disturbance Voltage at The Mains Terminals (FCC PART 15.207)

| Frequency Range (MHz) | Limits (dBuV) | |
|-----------------------|----------------|---------|
| | Quasi-Peak | Average |
| 0.150~0.500 | 66~56 | 56~46 |
| 0.500~5.000 | 56 | 46 |
| 5.000~30.00 | 60 | 50 |

Note: (1)The tighter limit shall apply at the edge between two frequency bands.
(2) Decreases with the logarithm of the frequency.

3.3 EUT Setup

The setup of EUT is according with ANSI C63.4-2009 measurement procedure. The specification used was the FCC Rules and Regulations Part 15.207 limits.

The EUT was placed center and the back edge of the test table.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

3.4 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz
Detector.....Peak & Quasi-Peak & Average
Sweep Speed.....Auto
IF Band Width.....9 KHz

3.5 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB μ V of specification limits). Quasi-peak readings are distinguished with a "**QP**". Average readings are distinguished with a "**AV**".

3.6 Test Situation


| | |
|------------------------------|---------------------------|
| Temperature (°C) | 22 |
| Humidity (%RH) | 58 |
| Barometric Pressure (mbar) | 1001 |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operating Mode | Charging mode |

Remark: (1) When PK reading is less than relevant limit 20dB, the QP reading and AV reading will not be recorded.
(2) Where QP reading is less than relevant AV limit, the AV reading will not be measured
(3) When AV reading is less than relevant limit 20dB, the AV reading will not be recorded.

3.7 Test Result


Pass

Details see the following pages.

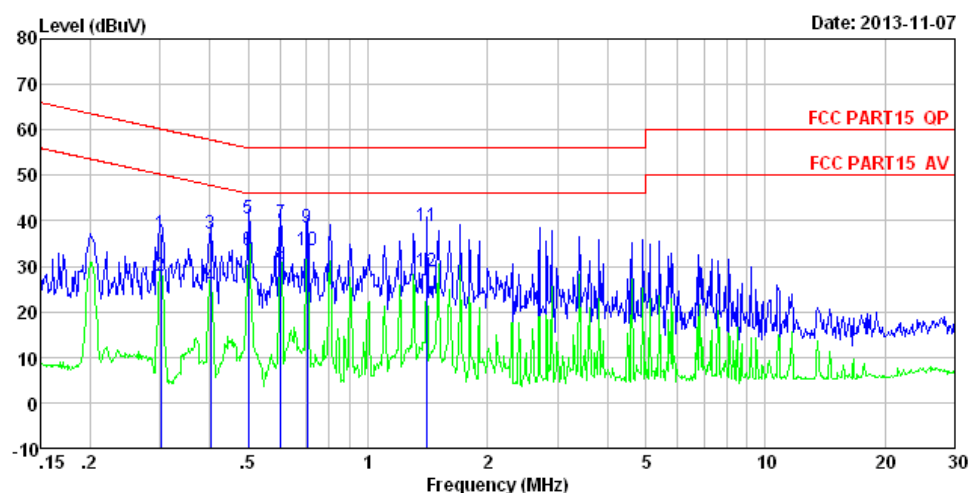

Condition : FCC PART15 QP LISN-2013 LINE
 EUT : WiFi Extender Smart Lamp
 Model : ZH01-WB
 Test Mode : Charging mode
 Power Rating : AC 120V/60Hz
 Test Engineer: David

| | Read Freq | LISN Level | Cable Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------------|---------------|-----------------|---------------|-------|---------------|---------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.302 | 36.89 | 0.11 | 0.10 | 37.10 | 60.19 | -23.09 | QP |
| 2 | 0.302 | 27.70 | 0.11 | 0.10 | 27.91 | 50.19 | -22.28 | Average |
| 3 | 0.402 | 36.81 | 0.11 | 0.11 | 37.03 | 57.81 | -20.78 | QP |
| 4 | 0.402 | 25.21 | 0.11 | 0.11 | 25.43 | 47.81 | -22.38 | Average |
| 5 | 0.499 | 40.13 | 0.12 | 0.11 | 40.36 | 56.01 | -15.65 | QP |
| 6 | 0.499 | 33.24 | 0.12 | 0.11 | 33.47 | 46.01 | -12.54 | Average |
| 7 | 0.604 | 39.29 | 0.13 | 0.12 | 39.54 | 56.00 | -16.46 | QP |
| 8 | 0.604 | 30.40 | 0.13 | 0.12 | 30.65 | 46.00 | -15.35 | Average |
| 9 | 0.705 | 38.28 | 0.14 | 0.13 | 38.55 | 56.00 | -17.45 | QP |
| 10 | 0.705 | 33.37 | 0.14 | 0.13 | 33.64 | 46.00 | -12.36 | Average |
| 11 | 1.411 | 38.45 | 0.12 | 0.13 | 38.70 | 56.00 | -17.30 | QP |
| 12 | 1.411 | 28.64 | 0.12 | 0.13 | 28.89 | 46.00 | -17.11 | Average |

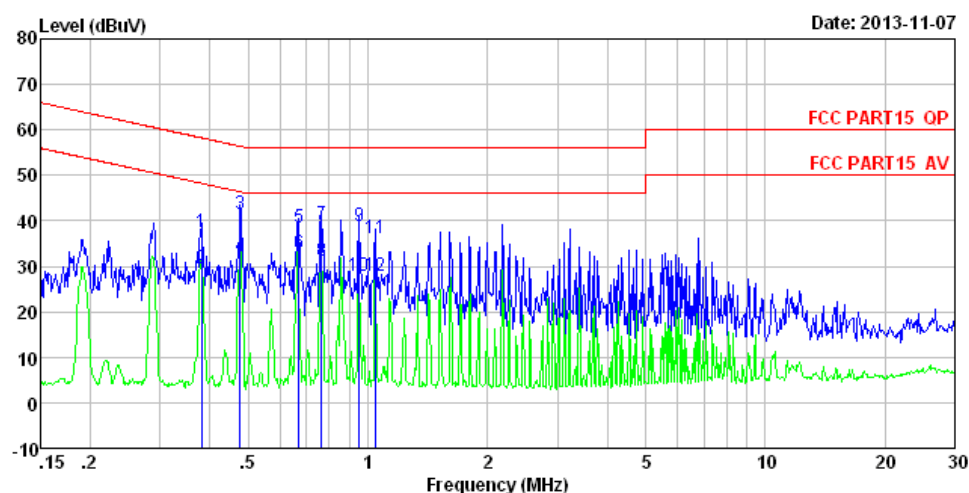

Condition : FCC PART15 QP LISN-2013 NEUTRAL
 EUT : WiFi Extender Smart Lamp
 Model : ZH01-WB
 Test Mode : Charging mode
 Power Rating : AC 120V/60Hz
 Test Engineer: David

| | Read Freq | LISN Level | Cable Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------------|---------------|-----------------|---------------|-------|---------------|---------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.381 | 37.39 | 0.06 | 0.10 | 37.55 | 58.25 | -20.70 | QP |
| 2 | 0.381 | 29.46 | 0.06 | 0.10 | 29.62 | 48.25 | -18.63 | Average |
| 3 | 0.476 | 41.34 | 0.06 | 0.11 | 41.51 | 56.41 | -14.90 | QP |
| 4 | 0.476 | 32.11 | 0.06 | 0.11 | 32.28 | 46.41 | -14.13 | Average |
| 5 | 0.672 | 38.44 | 0.07 | 0.13 | 38.64 | 56.00 | -17.36 | QP |
| 6 | 0.672 | 32.66 | 0.07 | 0.13 | 32.86 | 46.00 | -13.14 | Average |
| 7 | 0.763 | 38.81 | 0.07 | 0.13 | 39.01 | 56.00 | -16.99 | QP |
| 8 | 0.763 | 31.02 | 0.07 | 0.13 | 31.22 | 46.00 | -14.78 | Average |
| 9 | 0.953 | 38.68 | 0.07 | 0.13 | 38.88 | 56.00 | -17.12 | QP |
| 10 | 0.953 | 27.71 | 0.07 | 0.13 | 27.91 | 46.00 | -18.09 | Average |
| 11 | 1.049 | 35.82 | 0.07 | 0.13 | 36.02 | 56.00 | -19.98 | QP |
| 12 | 1.049 | 27.69 | 0.07 | 0.13 | 27.89 | 46.00 | -18.11 | Average |

4 RADIATED DISTURBANCES

4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 4.0 dB.

4.2 Limit of Radiated Disturbances (FCC Part 15.209)

| Frequency (MHz) | Distance (Meters) | Field Strengths Limits (dB μ V/m) |
|-----------------|-------------------|---------------------------------------|
| 30 ~ 88 | 3 | 40 |
| 88 ~216 | 3 | 43.5 |
| 216 ~ 960 | 3 | 46 |
| 960~1000 | 3 | 54 |

Note: (1) The tighter limit shall apply at the edge between two frequency bands.
 (2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

4.3 EUT Setup

The radiated emission tests were performed in the in the 3-meter anechoic chamber, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15 limits.

The EUT was placed on the center of the test table.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

4.4 Test Receiver Setup

According to FCC Part 15 rule, the frequency was investigated from 30 to 1000 MHz. During the radiated emission test, the test receiver was set with the following configurations:

Test Receiver Setting:

Detector.....Peak & Quasi-Peak
 IF Band Width.....120KHz
 Frequency Range.....30MHz to 1000MHz
 Turntable Rotated.....0 to 360 degrees

Antenna Position:

Height.....1m to 4m
 Polarity.....Horizontal and Vertical

4.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings performed only when an emission was found to be marginal (within -10 dB μ V of specification limits), and are distinguished with a "QP" in the data table.

4.6 Radiated Emissions Test Result

| | |
|------------------------------|---------------------------|
| Temperature (°C) | 26 |
| Humidity (%RH) | 56 |
| Barometric Pressure (mbar) | 1001.1 |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operating Mode | Charging mode |


Test data see following pages.


Remark: (1) When PK reading is less than relevant limit 20dB, the QP reading and AV reading will not be recorded.
(2) Where QP reading is less than relevant AV limit, the AV reading will not be measured

4.7 Test Result

Pass.

Details see the following pages.

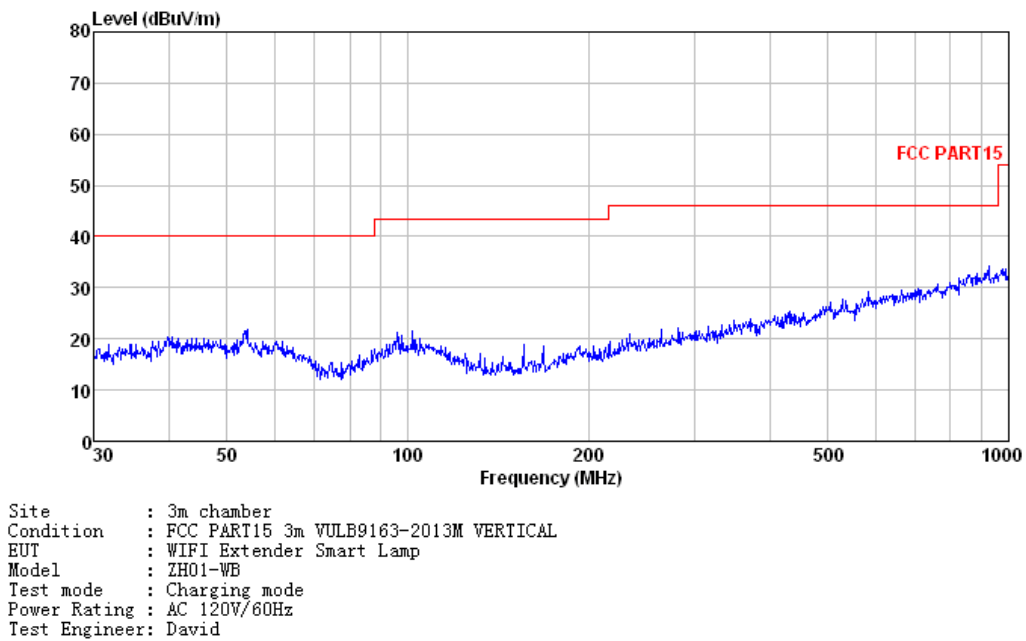Radiated Emission Test Data

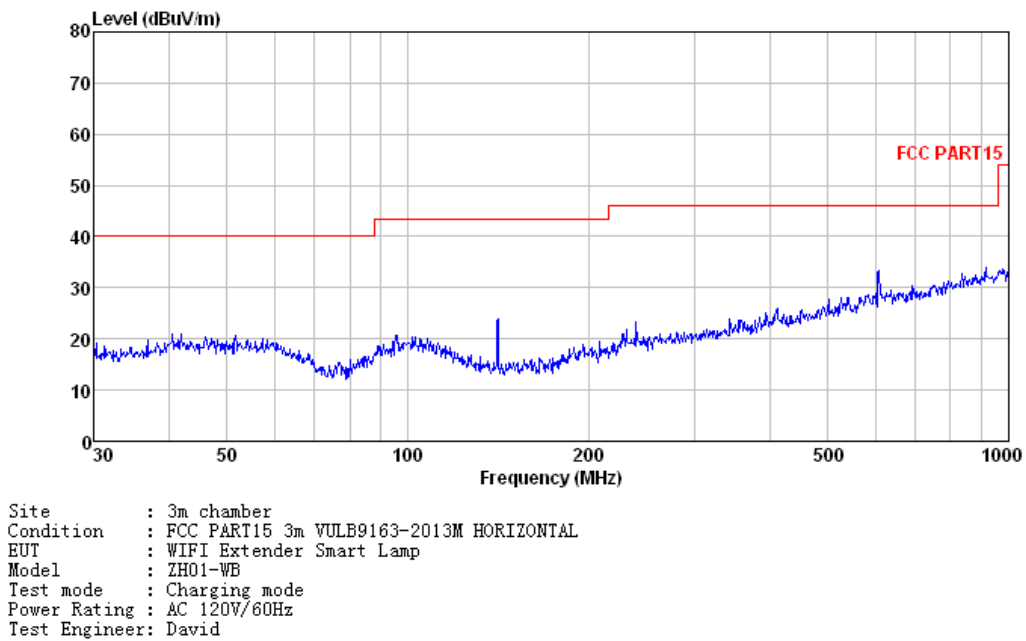Radiated Emission Test Data

5 - FCC Part 15.247 Requirements

Testing was performed in accordance with CFR 47 Part 15.247.

This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

5.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.

The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b3, b4).

The maximum transmitted power is + 30 dBm or 1 Watt.

5.1.1 Test Method

The conducted method was used to measure the channel power output according to ANSI C63.4:2009. The measurement was performed with modulation per CFR47 Part 15.247 (b3). This test was conducted on 3 channels of Sample. The worst mode result indicated below.

Test Setup



5.1.2 Test Results

According to KDB 662911 D01 and D02, and OET Report FCC/OET 13TR1003, the EUT's output signals are correlated.

According to KDB 662911 D01 section F) 2) a) i): Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi

| Antenna Gain (dBi) | 10 Log (Number of Antenna) (dB) | Effective Legacy Gain (dBi) |
|-----------------------|------------------------------------|--------------------------------|
| 4 | 3.01 | 7.01 |

The composite antenna gain is 7.01 dBi.

According to FCC Part 15.247(b4), the limit is 28.99 dBm.

| | |
|------------------------------|--------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11B Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 11.37 | 17.62 |
| 2437 | 28.99 | 12.79 | 16.20 |
| 2462 | 28.99 | 12.28 | 16.71 |

Result: Pass

Antenna 1


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 7.76 | 21.23 |
| 2437 | 28.99 | 8.65 | 20.34 |
| 2462 | 28.99 | 8.07 | 20.92 |

Mode: CH01

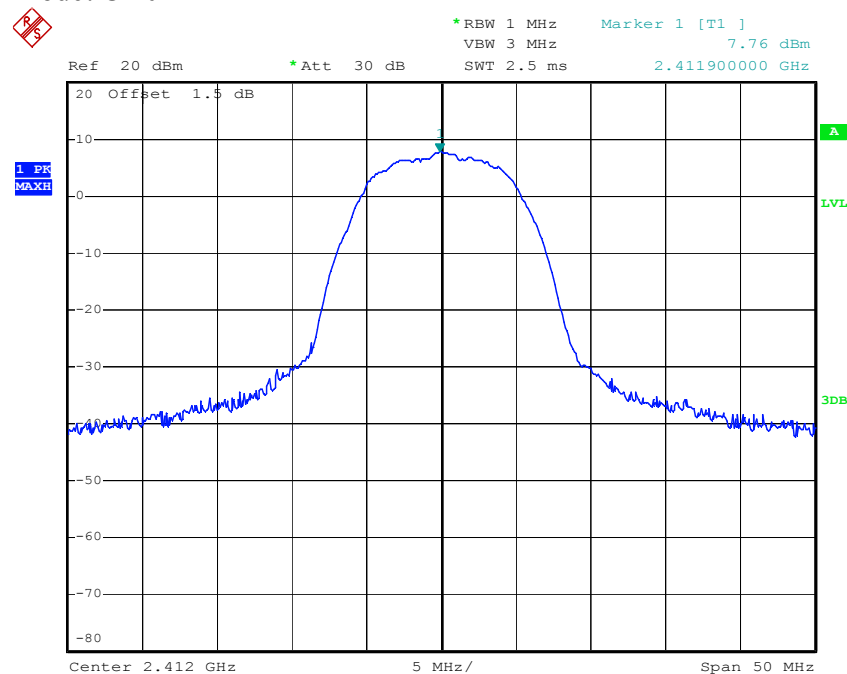


Date: 12.NOV.2013 11:15:36

Mode: CH06

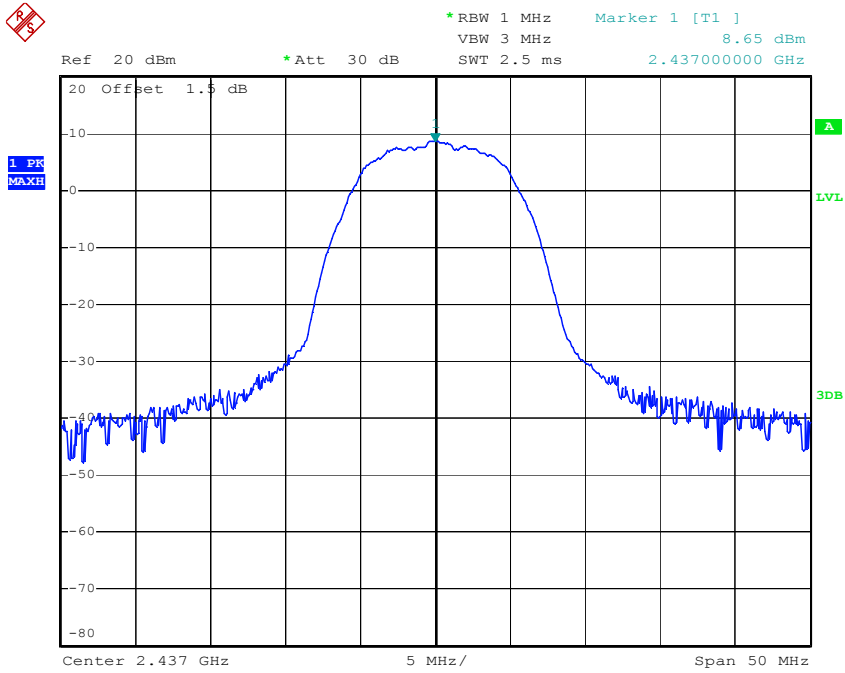

Date: 12.NOV.2013 11:16:14

Mode: CH11

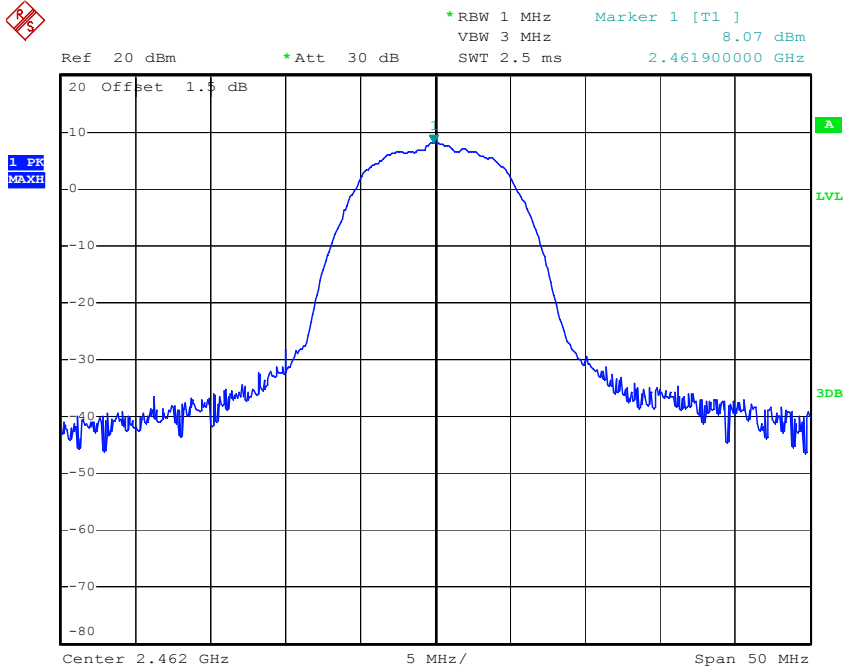


Date: 12.NOV.2013 11:16:48

Antenna 2


| Output Power | | | |
|----------------------------|----------------|-----------------------|----------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 8.88 | 20.11 |
| 2437 | 28.99 | 10.67 | 18.32 |
| 2462 | 28.99 | 10.20 | 18.79 |

Mode: CH01

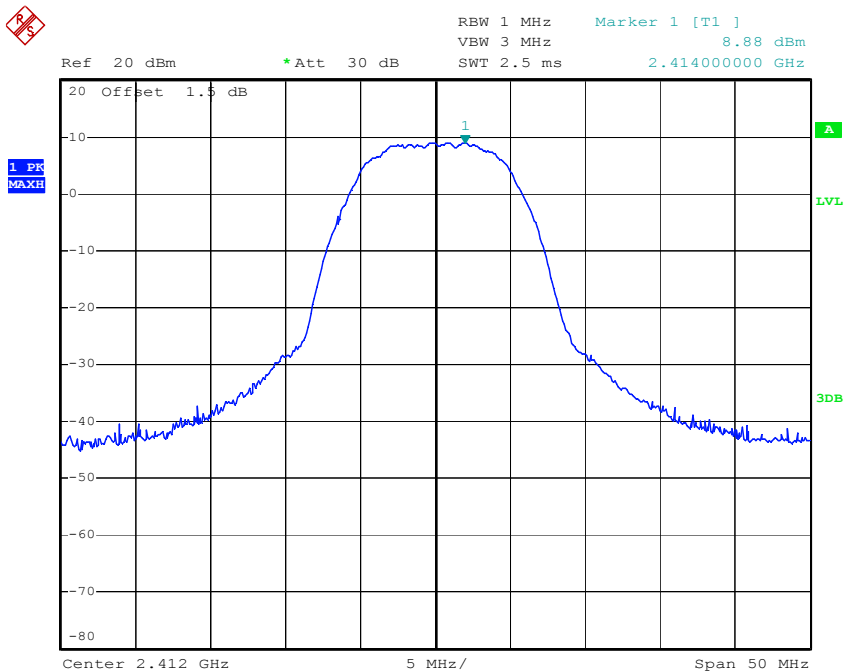


Date: 12.NOV.2013 09:27:49

Mode: CH06

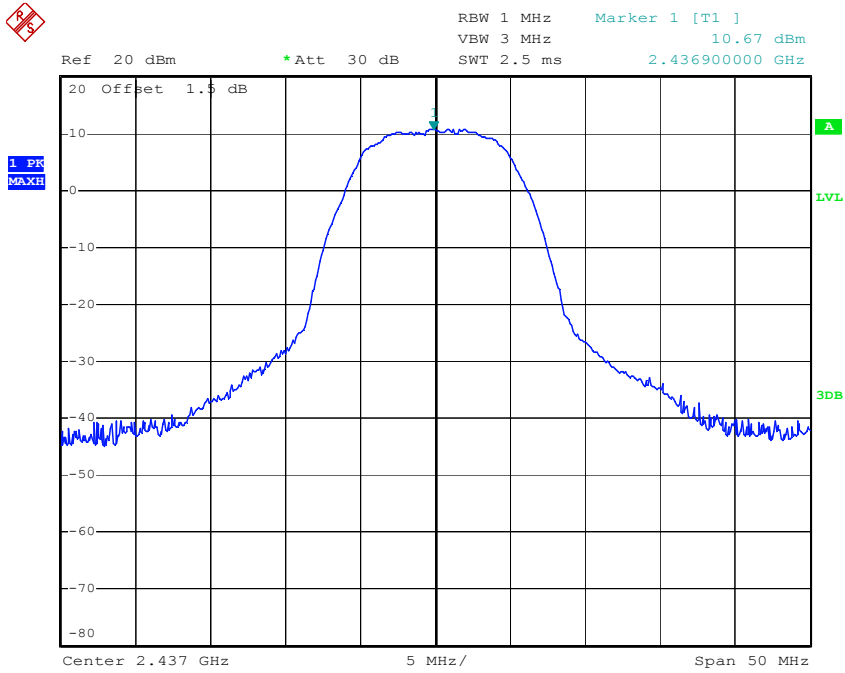

Date: 12.NOV.2013 09:28:35

Mode: CH11

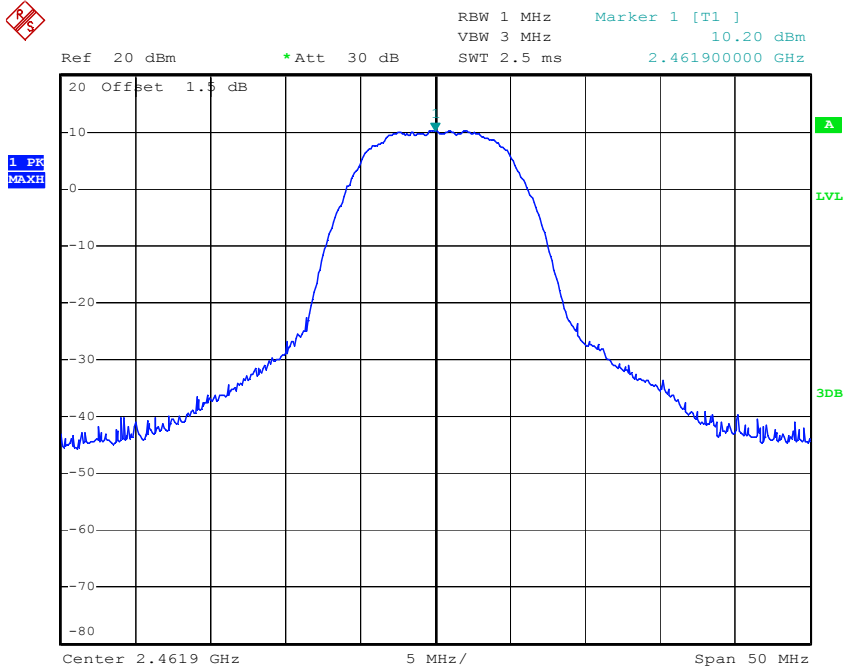

Date: 12.NOV.2013 09:29:27

| | |
|------------------------------|--------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11G Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 11.76 | 17.23 |
| 2437 | 28.99 | 13.13 | 15.86 |
| 2462 | 28.99 | 12.53 | 16.46 |

Result: Pass

Antenna 1


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 7.97 | 21.02 |
| 2437 | 28.99 | 8.79 | 20.20 |
| 2462 | 28.99 | 8.12 | 20.87 |

Mode: CH01

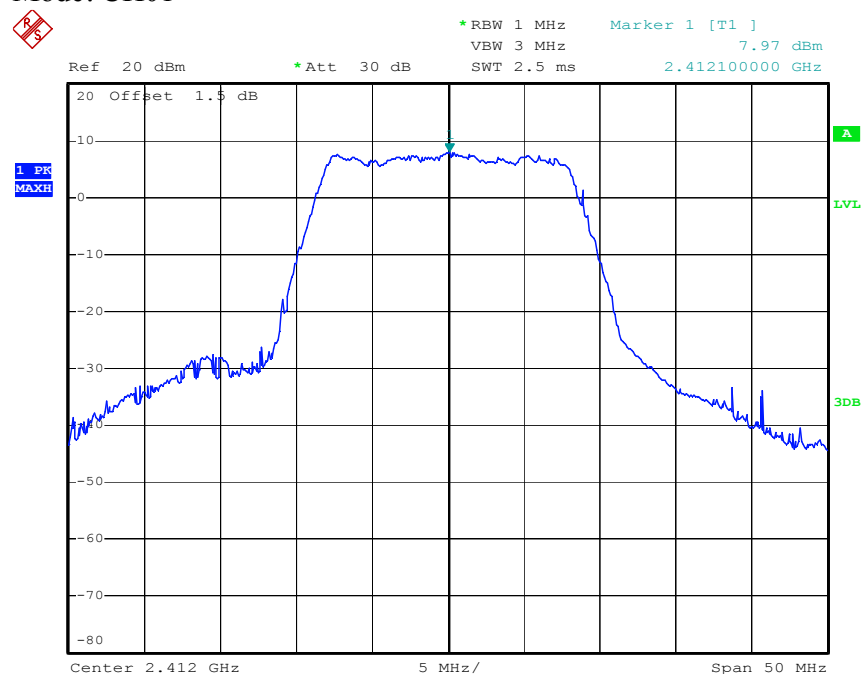


Date: 12.NOV.2013 11:18:23

Mode: CH06

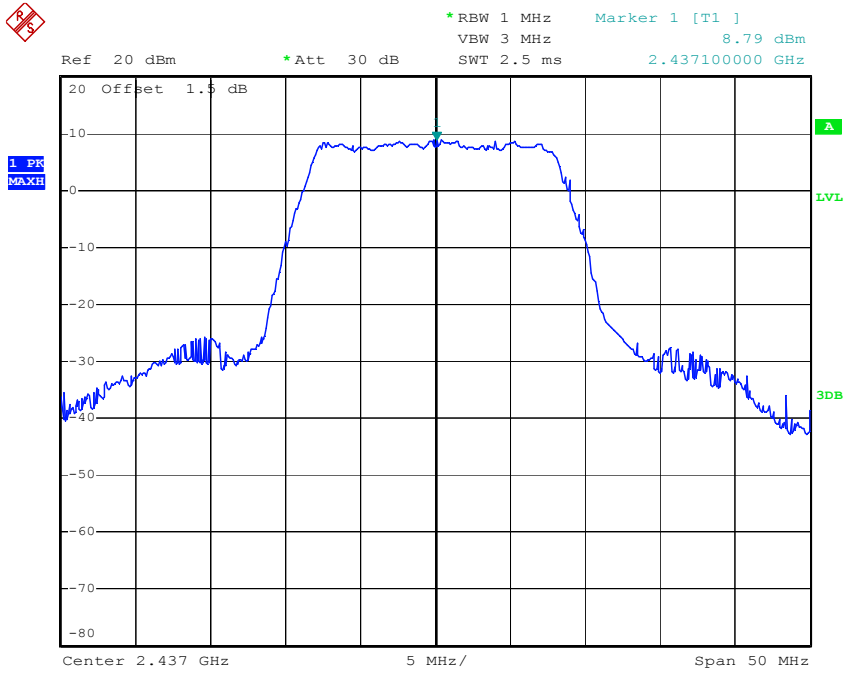

Date: 12.NOV.2013 11:17:49

Mode: CH11

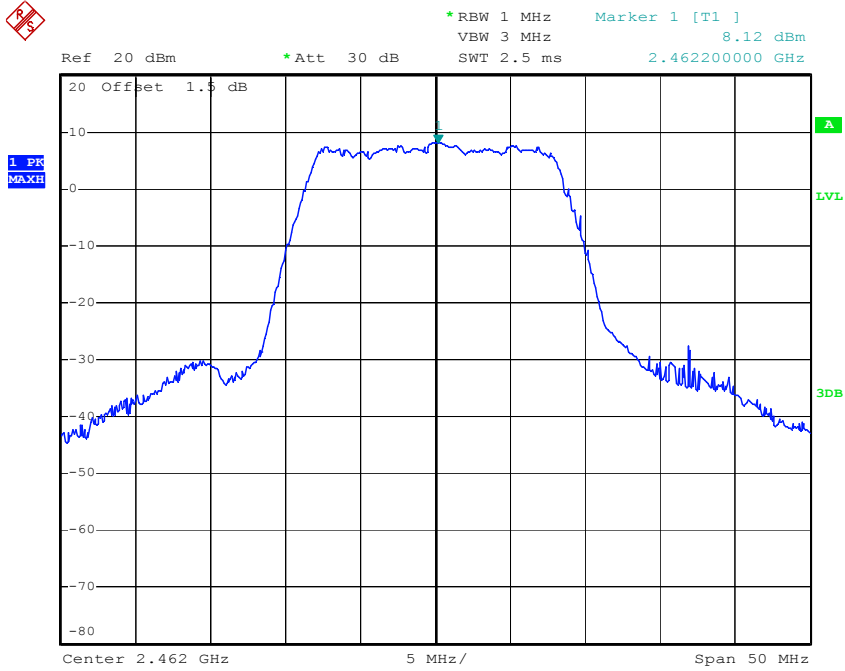


Date: 12.NOV.2013 11:17:19

Antenna 2


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 9.40 | 19.59 |
| 2437 | 28.99 | 11.14 | 17.85 |
| 2462 | 28.99 | 10.58 | 18.41 |

Mode: CH01

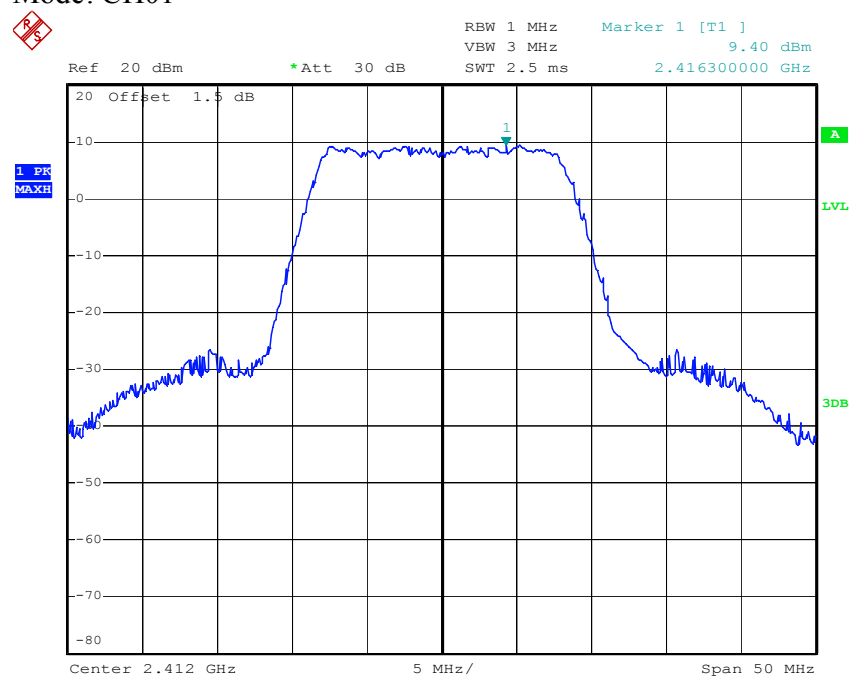


Date: 12.NOV.2013 09:31:15

Mode: CH06

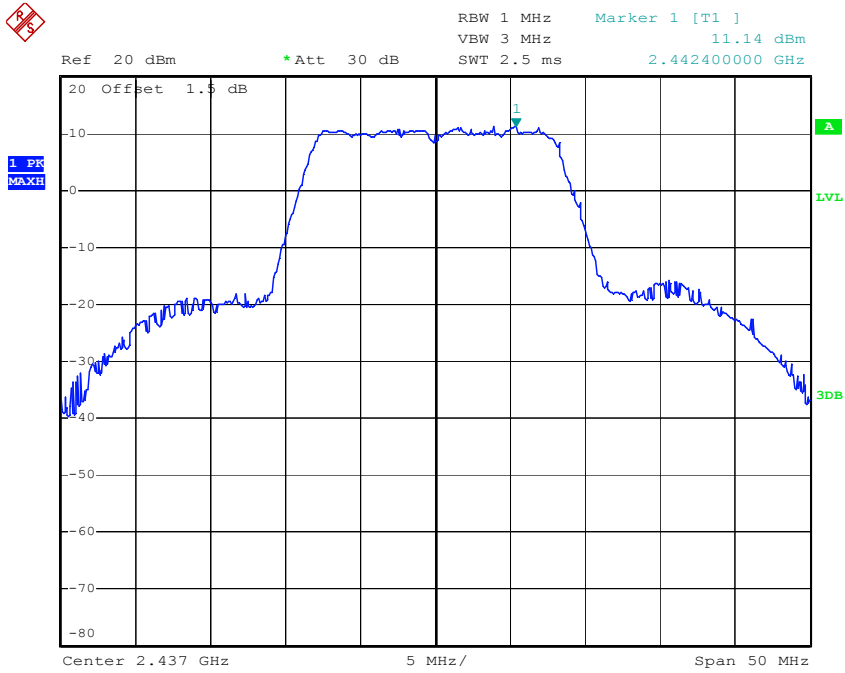

Date: 12.NOV.2013 09:30:50

Mode: CH11

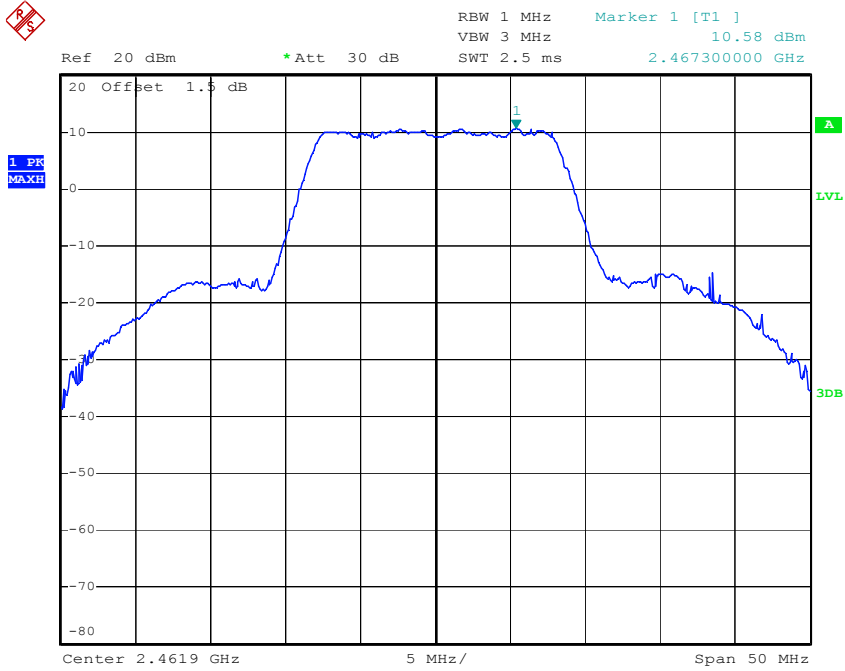

Date: 12.NOV.2013 09:30:16

| | |
|------------------------------|----------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N20 Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 11.31 | 17.68 |
| 2437 | 28.99 | 12.78 | 16.21 |
| 2462 | 28.99 | 12.16 | 16.83 |

Result: Pass

Antenna 1


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 7.87 | 21.12 |
| 2437 | 28.99 | 8.91 | 20.08 |
| 2462 | 28.99 | 7.89 | 21.10 |

Mode: CH01

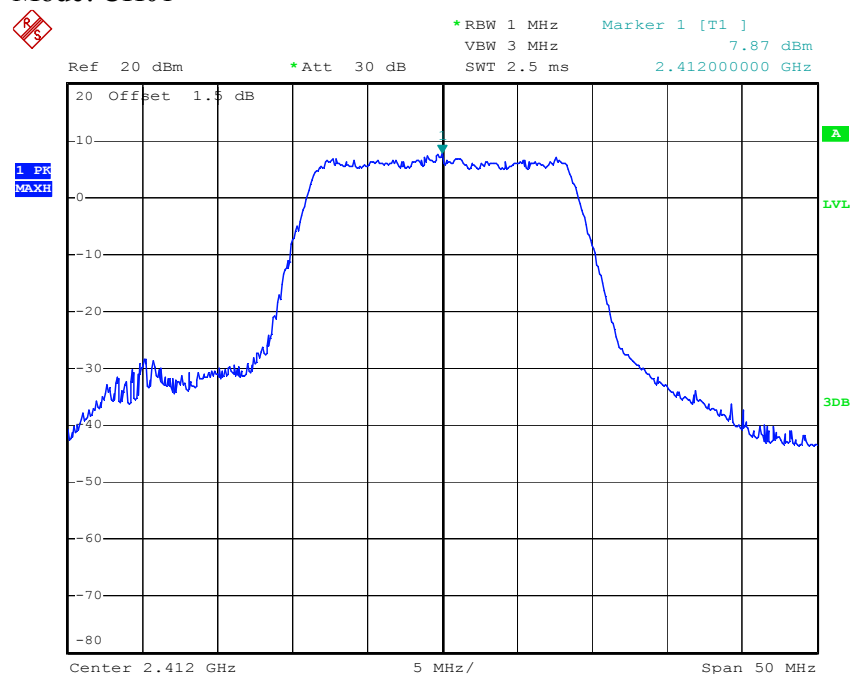


Date: 12.NOV.2013 11:18:49

Mode: CH06

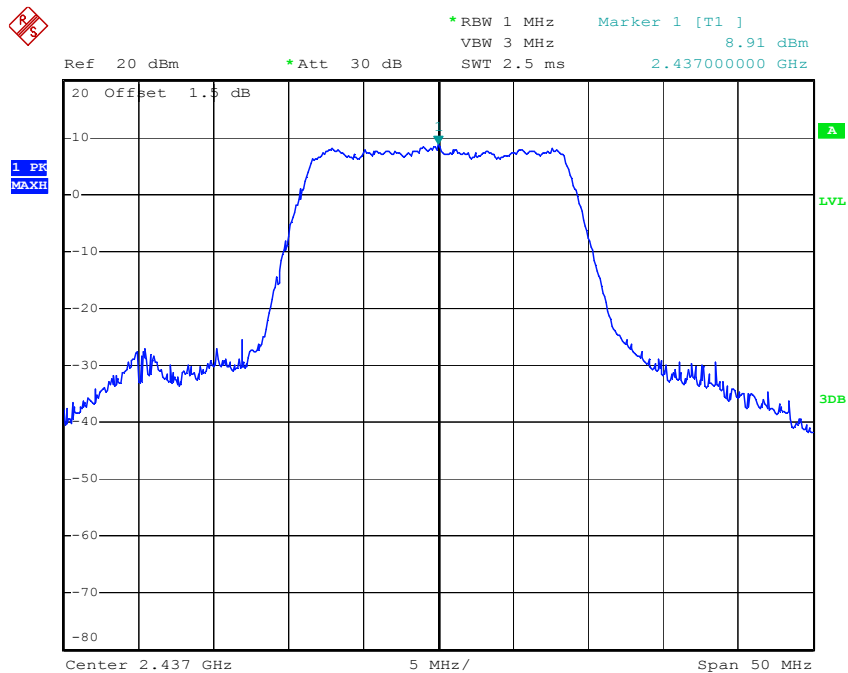

Date: 12.NOV.2013 11:19:21

Mode: CH11

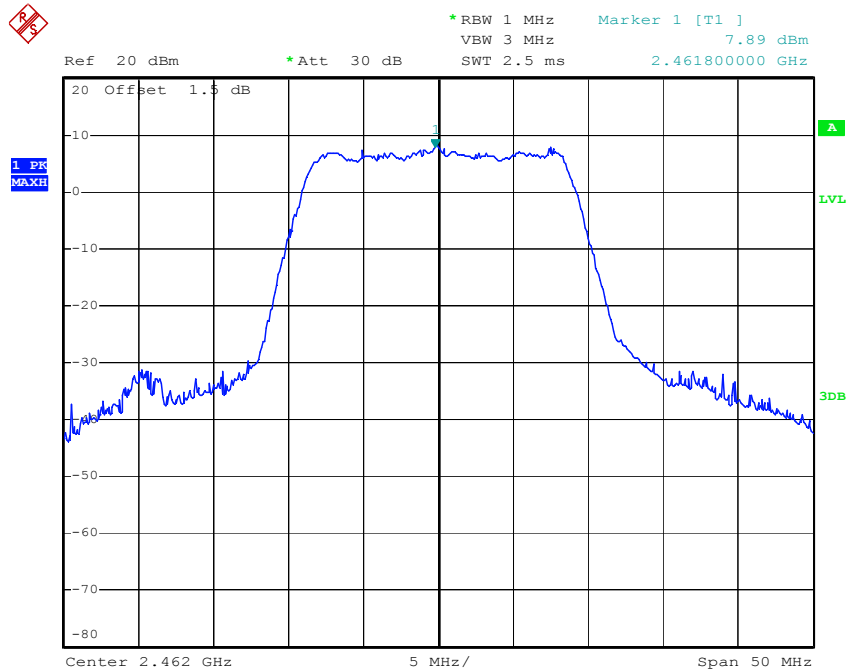


Date: 12.NOV.2013 11:20:01

Antenna 2


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2412 | 28.99 | 8.69 | 20.30 |
| 2437 | 28.99 | 10.48 | 18.51 |
| 2462 | 28.99 | 10.12 | 18.87 |

Mode: CH01

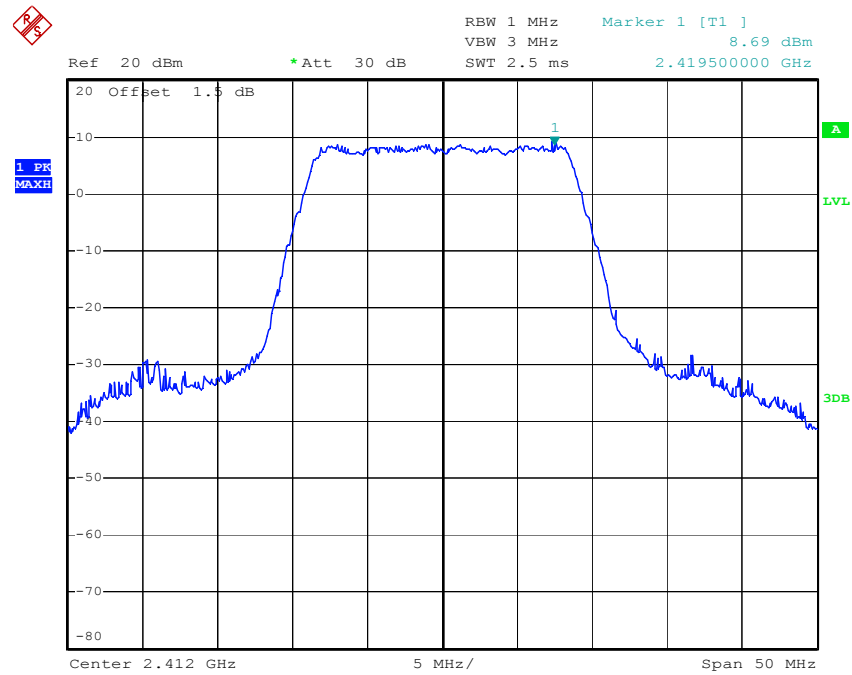


Date: 12.NOV.2013 09:31:45

Mode: CH06

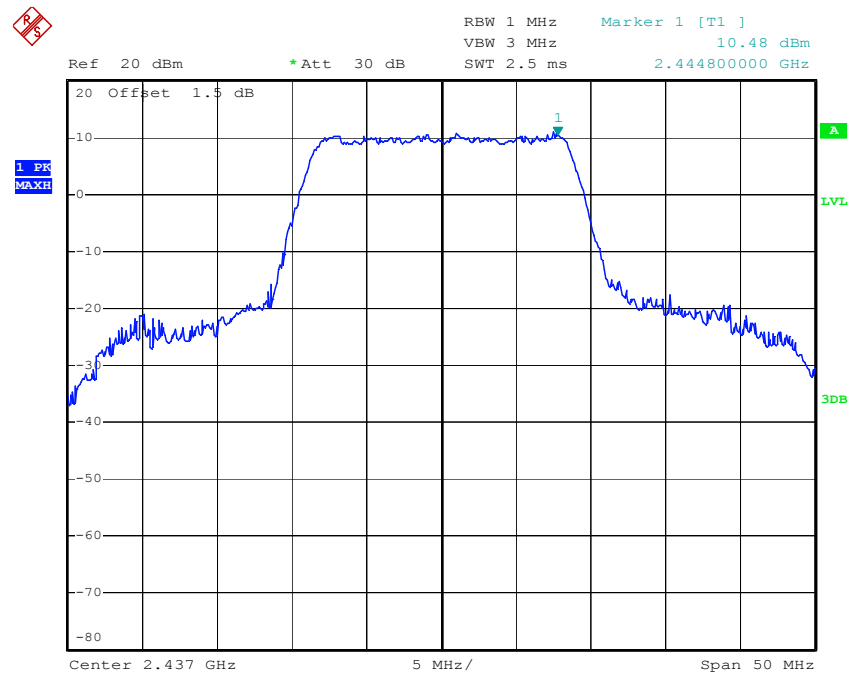

Date: 12.NOV.2013 09:32:12

Mode: CH11

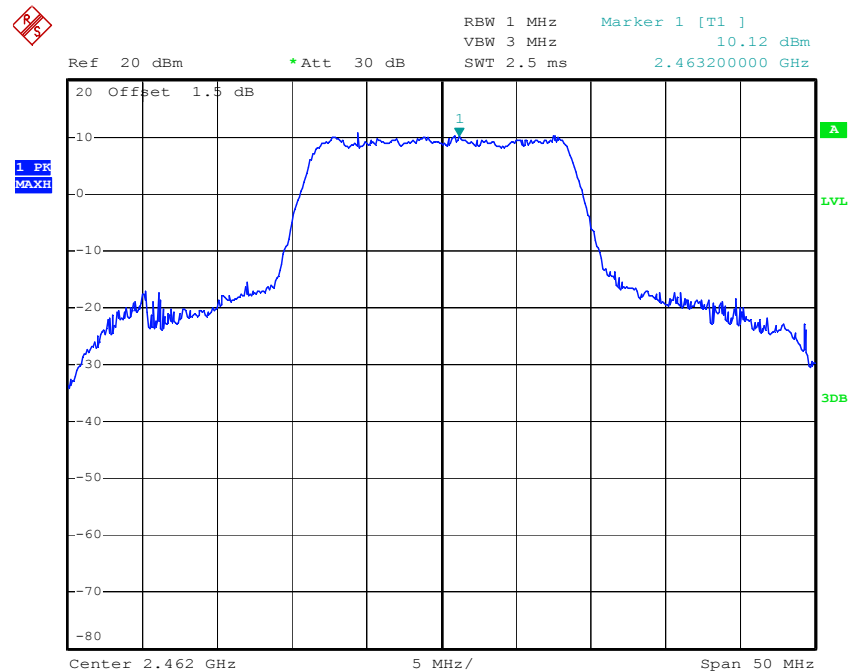

Date: 12.NOV.2013 09:32:45

| | |
|------------------------------|----------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N40 Mode CH03 / CH06 / CH09 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2422 | 28.99 | 13.42 | 15.57 |
| 2437 | 28.99 | 14.52 | 14.47 |
| 2452 | 28.99 | 14.55 | 14.44 |

Result: Pass

Antenna 1


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2422 | 28.99 | 9.10 | 19.89 |
| 2437 | 28.99 | 10.14 | 18.85 |
| 2452 | 28.99 | 10.05 | 18.94 |

Mode: CH03

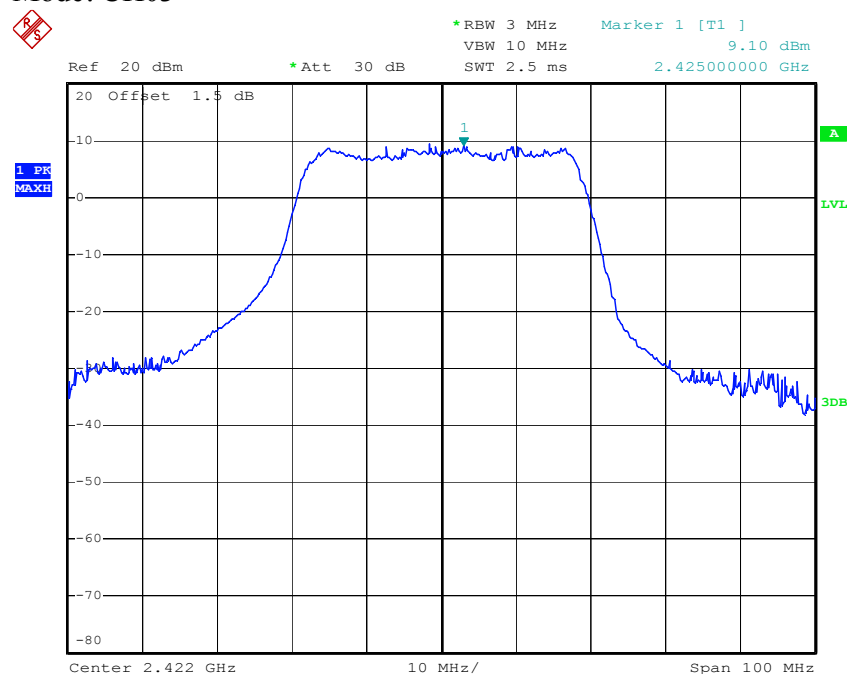


Date: 12.NOV.2013 11:22:37

Mode: CH06

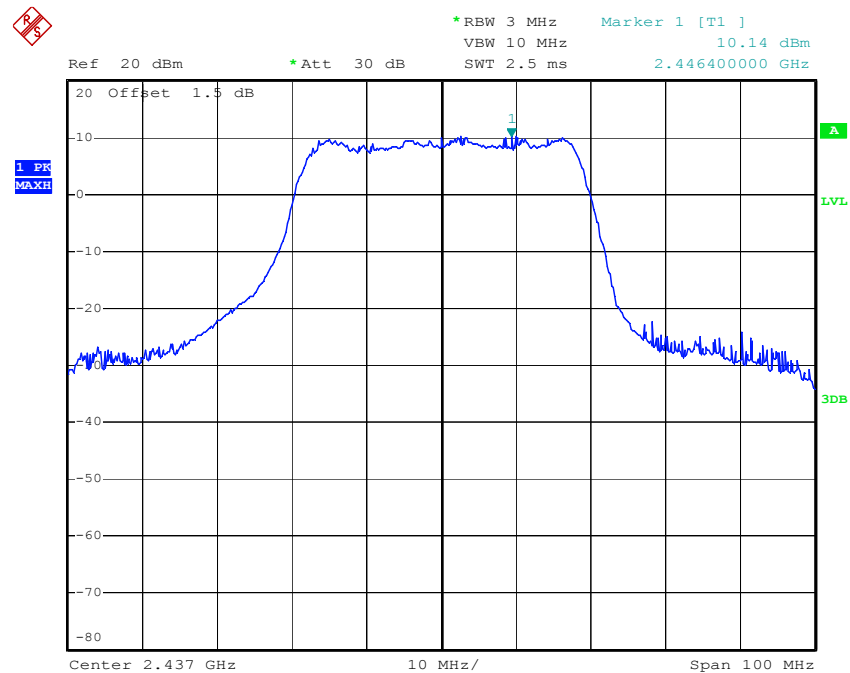

Date: 12.NOV.2013 11:22:08

Mode: CH09

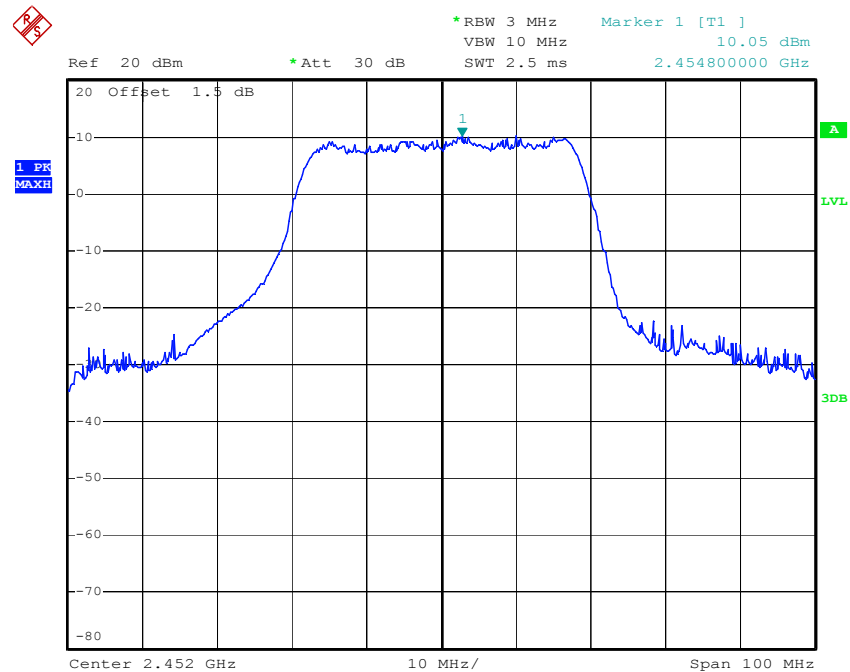


Date: 12.NOV.2013 11:21:34

Antenna 2


| Output Power | | | |
|-------------------------|-------------|--------------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | Output Level (dBm) | Margin (dB) |
| 2422 | 28.99 | 11.42 | 17.57 |
| 2437 | 28.99 | 12.55 | 16.44 |
| 2452 | 28.99 | 12.64 | 16.35 |

Mode: CH03

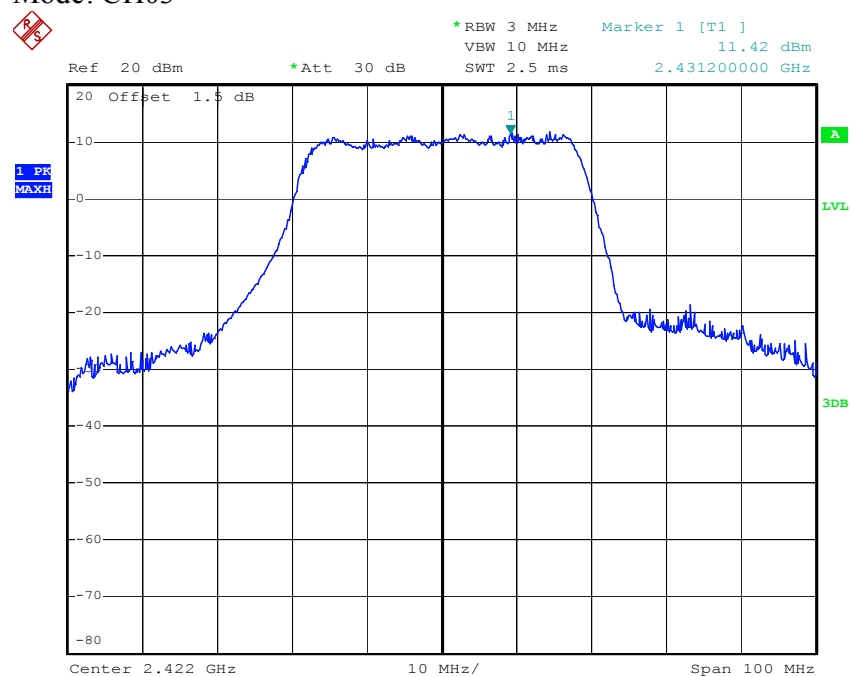


Date: 12.NOV.2013 09:35:02

Mode: CH06

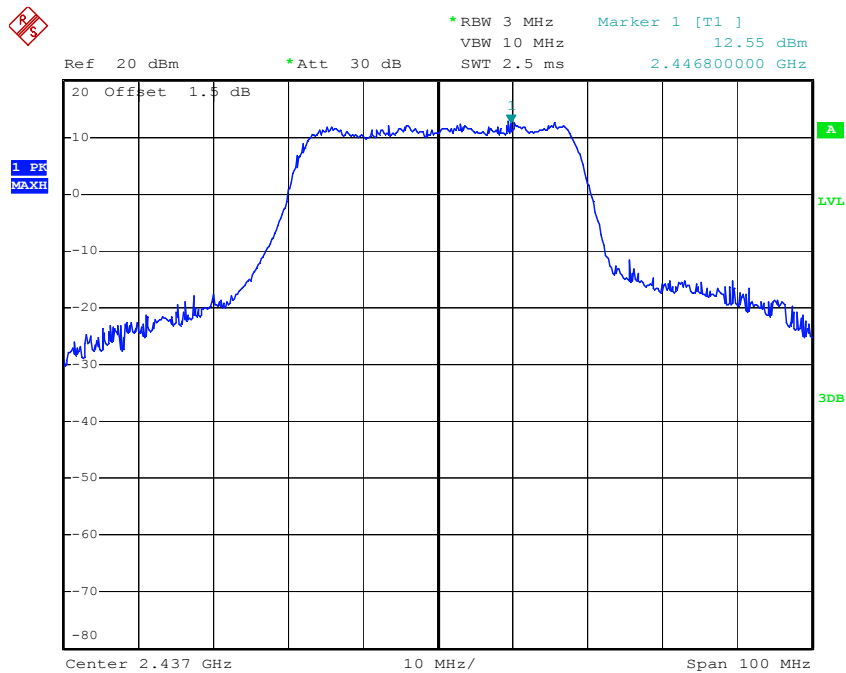

Date: 12.NOV.2013 09:34:29

Mode: CH09

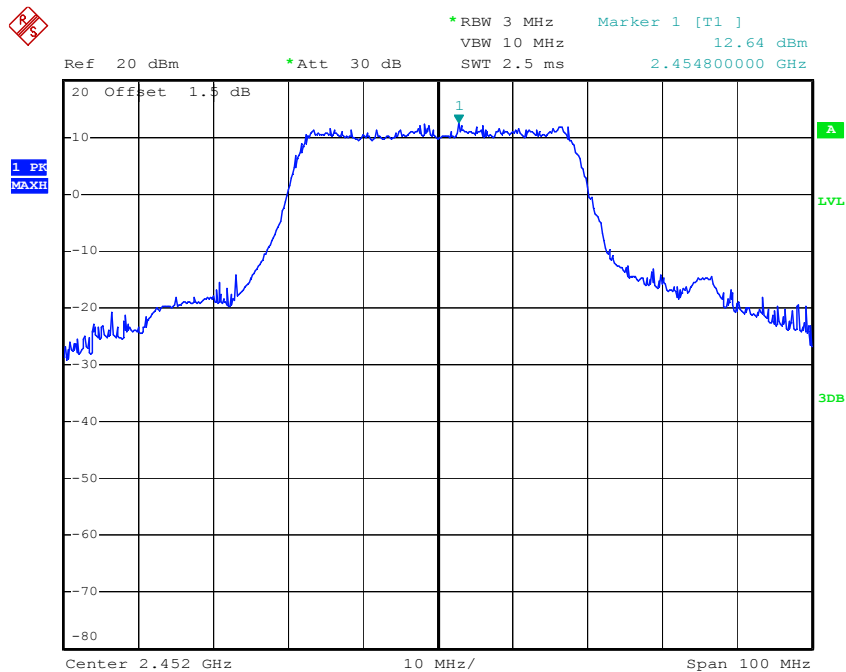

Date: 12.NOV.2013 09:33:52

5.2 Occupied Bandwidth Requirements

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The 6 dB bandwidth is defined the bandwidth of 6 dBr from highest transmitted level of the fundamental frequency.

The bandwidth shall be at least 500 kHz via Section CFR47 15.247(a2).

5.2.1 Test Method

The conducted method was used to measure the channel power output according to ANSI C63.4:2009. The measurement was performed with modulation per CFR47 Part 15.247 (a2). This test was conducted on 3 channels of Sample. The worst mode result indicated below.

Test Setup

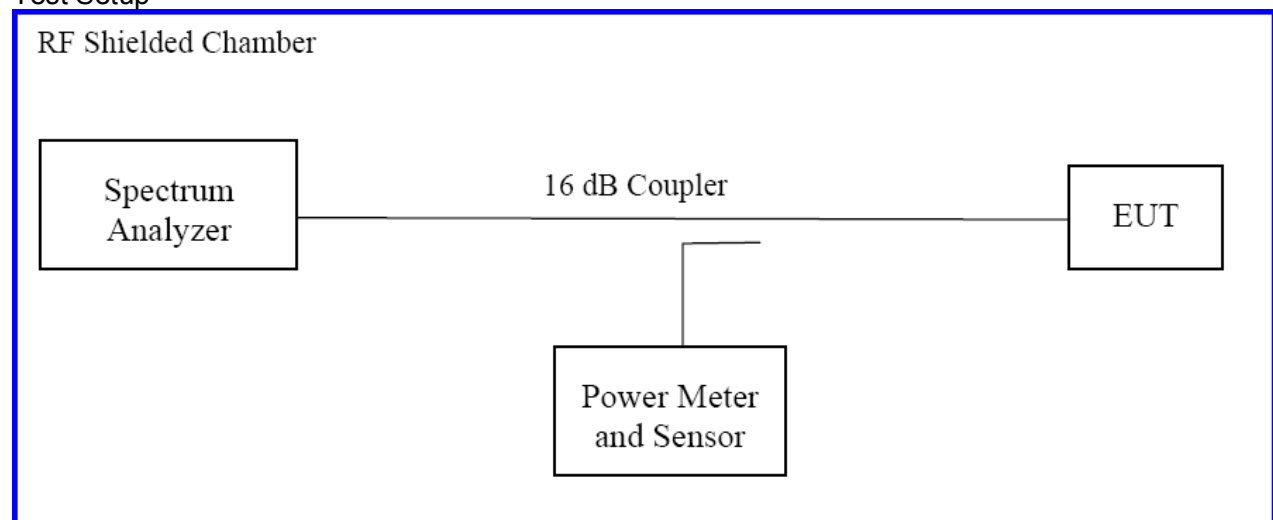


FCC ID: 2ABAI-ZH01WB

5.2.2 Test Results

| | |
|------------------------------|--------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11B Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |


Antenna 1

| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|-------------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2412 | > 500kHz | 9.20 | PASS |
| 2437 | > 500kHz | 9.40 | PASS |
| 2462 | > 500kHz | 8.90 | PASS |

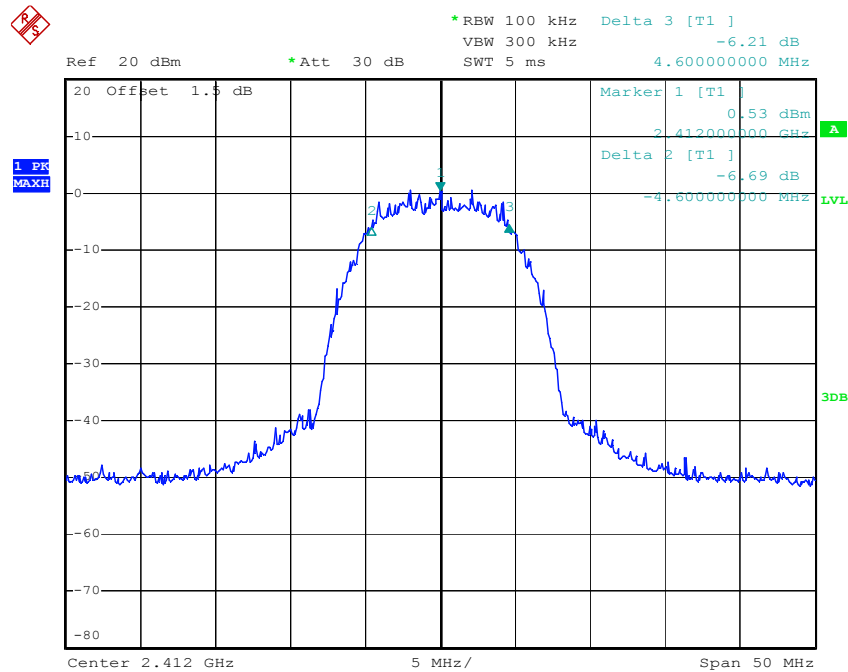Mode: CH01


Date: 12.NOV.2013 11:33:42

Mode: CH06

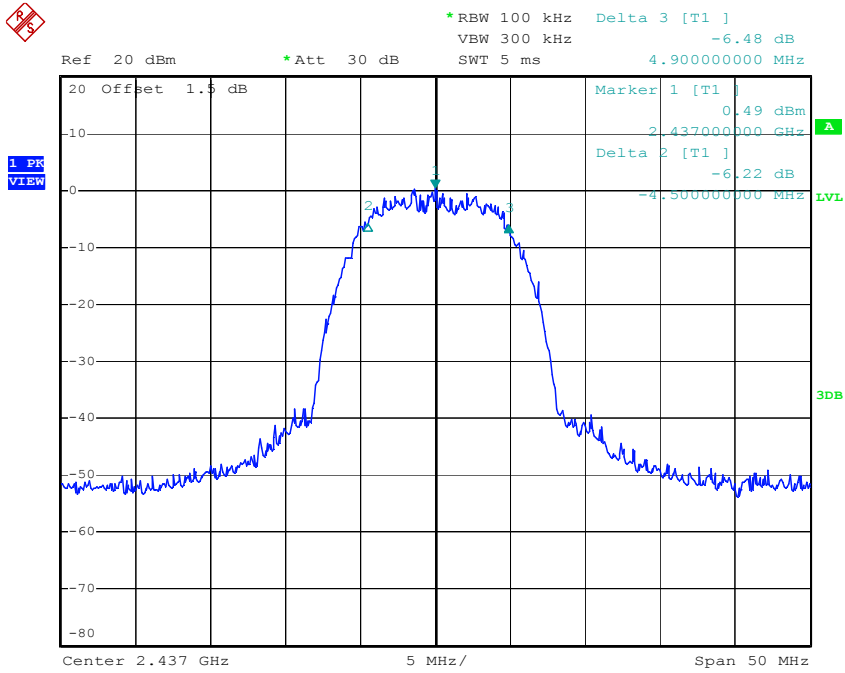

Date: 12.NOV.2013 11:34:44

Mode: CH11

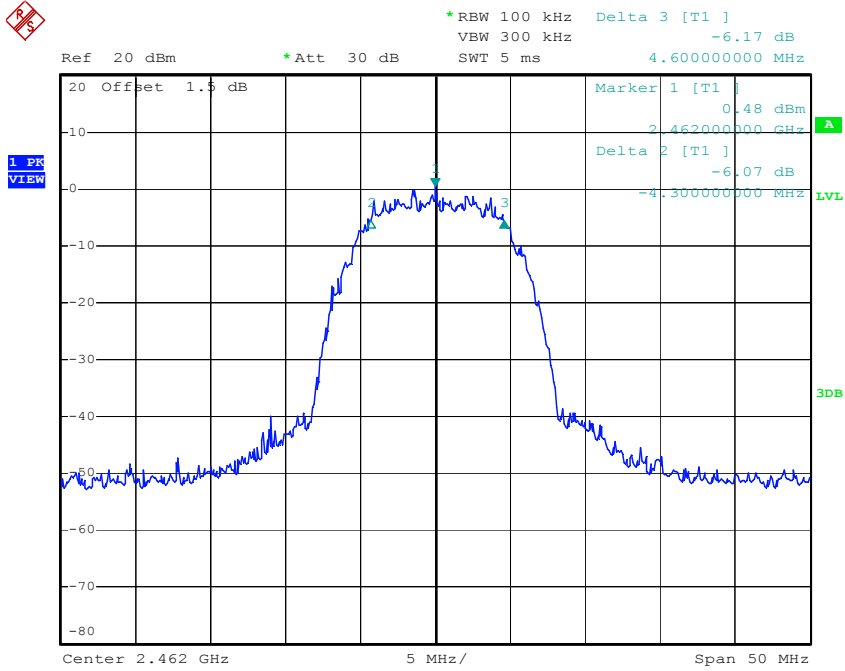


Date: 12.NOV.2013 11:35:43

Antenna 2


| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|-------------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2412 | > 500kHz | 9.00 | PASS |
| 2437 | > 500kHz | 8.70 | PASS |
| 2462 | > 500kHz | 8.80 | PASS |

Mode: CH01

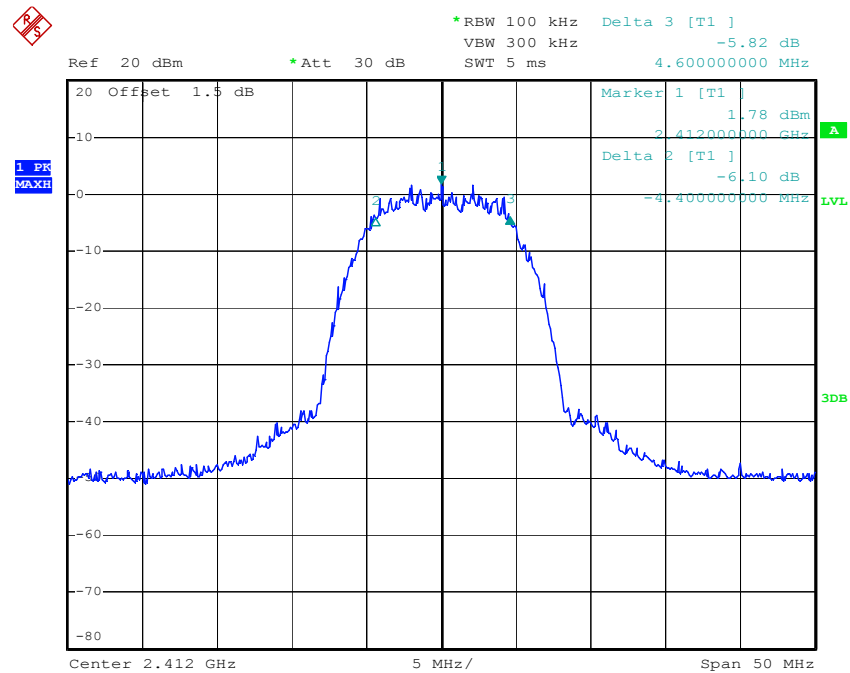


Date: 12.NOV.2013 09:52:40

Mode: CH06

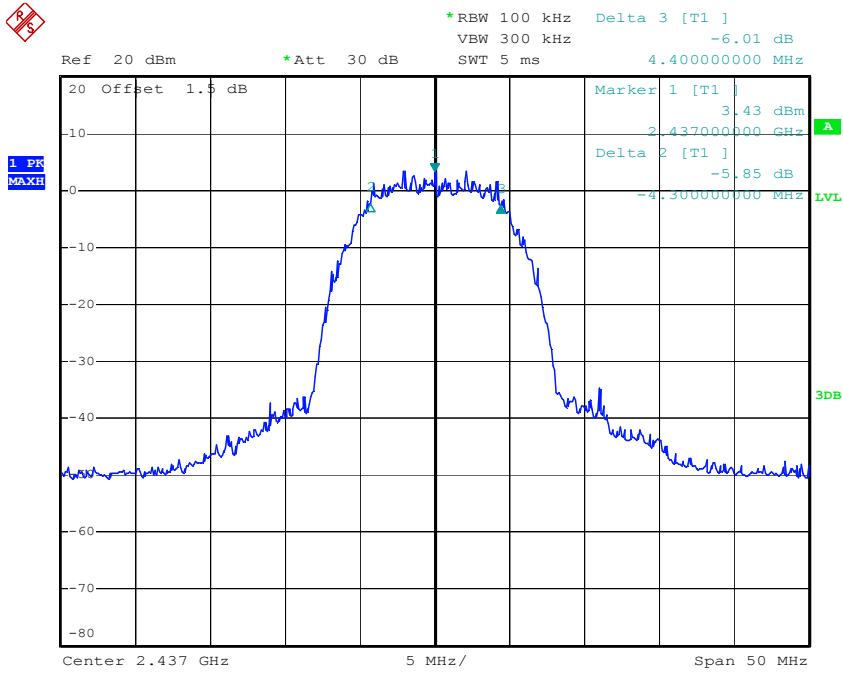

Date: 12.NOV.2013 09:53:35

Mode: CH11

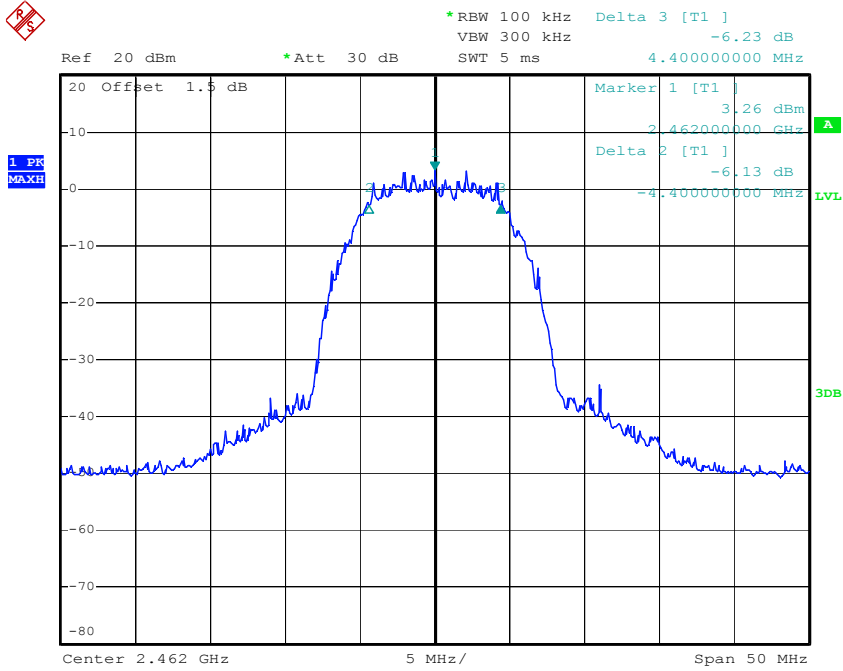


Date: 12.NOV.2013 09:54:36

| | |
|------------------------------|--------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11G Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Antenna 1


| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|-------------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2412 | > 500kHz | 16.60 | PASS |
| 2437 | > 500kHz | 16.60 | PASS |
| 2462 | > 500kHz | 16.60 | PASS |

Mode: CH01

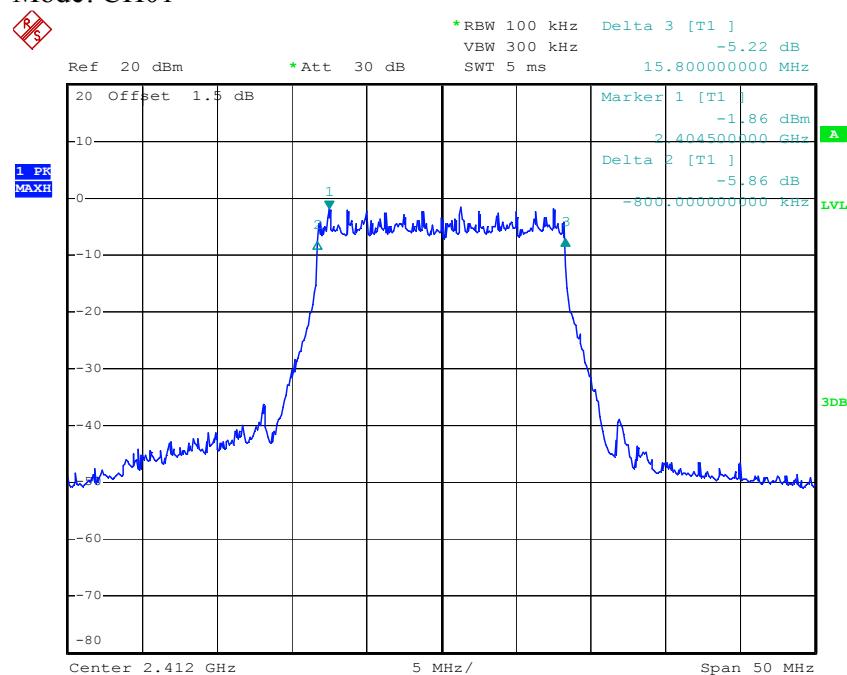


Date: 12.NOV.2013 11:32:22

Mode: CH06

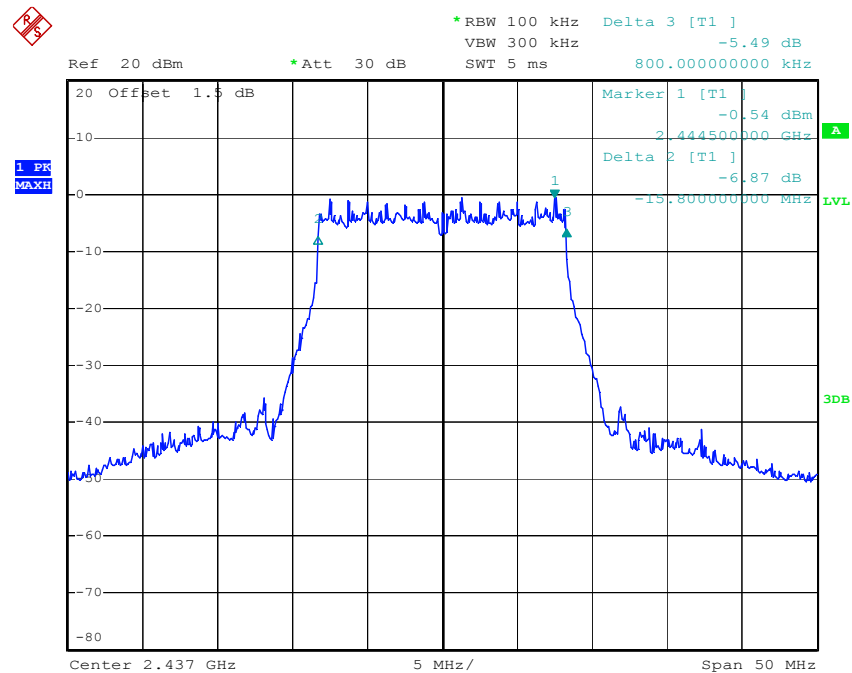

Date: 12.NOV.2013 11:31:32

Mode: CH11

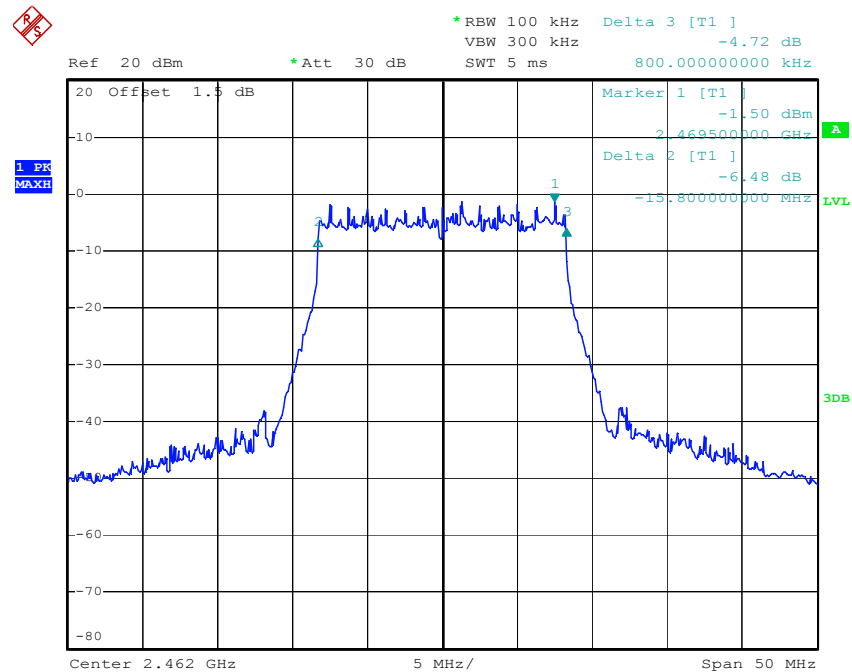


Date: 12.NOV.2013 11:30:41

Antenna 2


| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|-------------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2412 | > 500kHz | 16.60 | PASS |
| 2437 | > 500kHz | 16.60 | PASS |
| 2462 | > 500kHz | 16.60 | PASS |

Mode: CH01

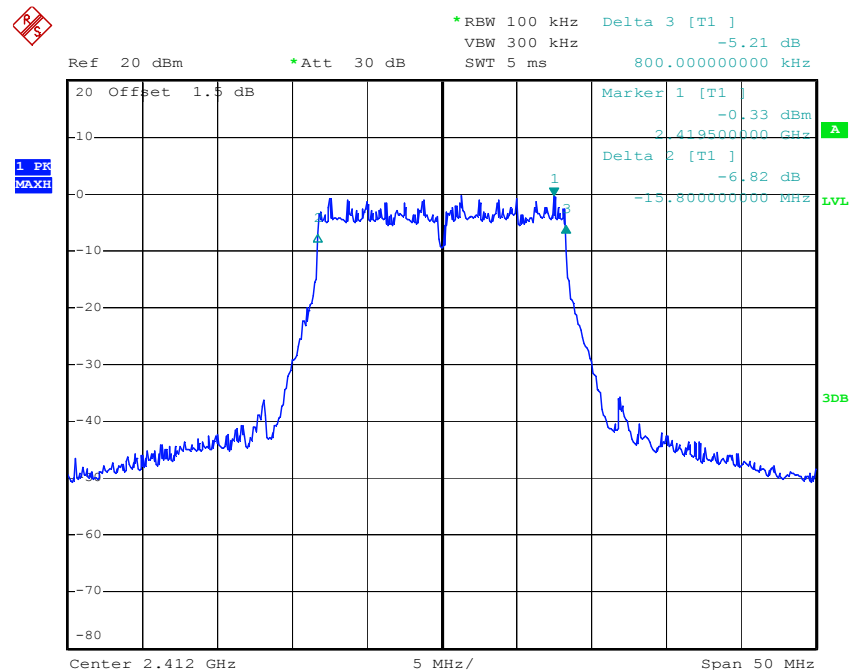


Date: 12.NOV.2013 09:51:35

Mode: CH06

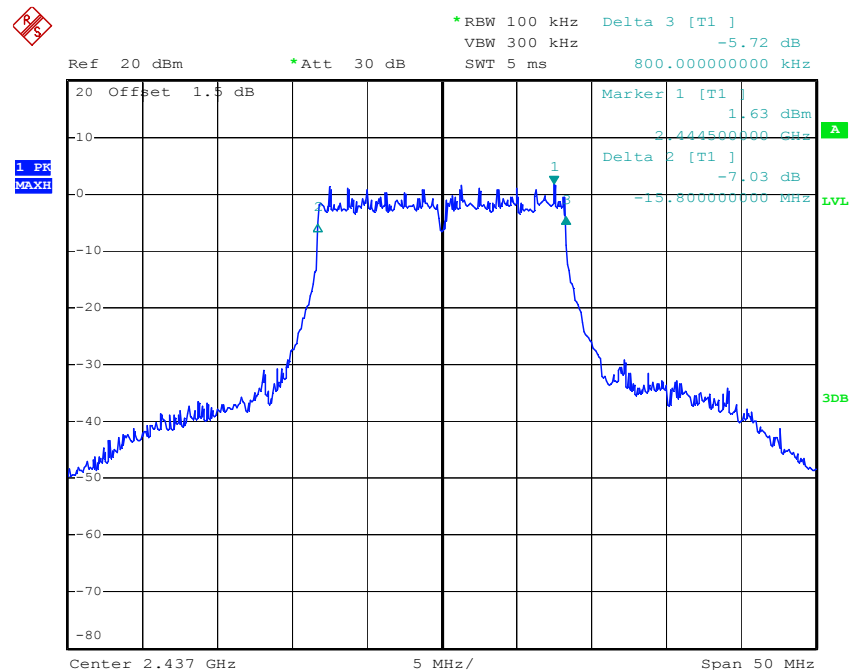

Date: 12.NOV.2013 09:50:43

Mode: CH11

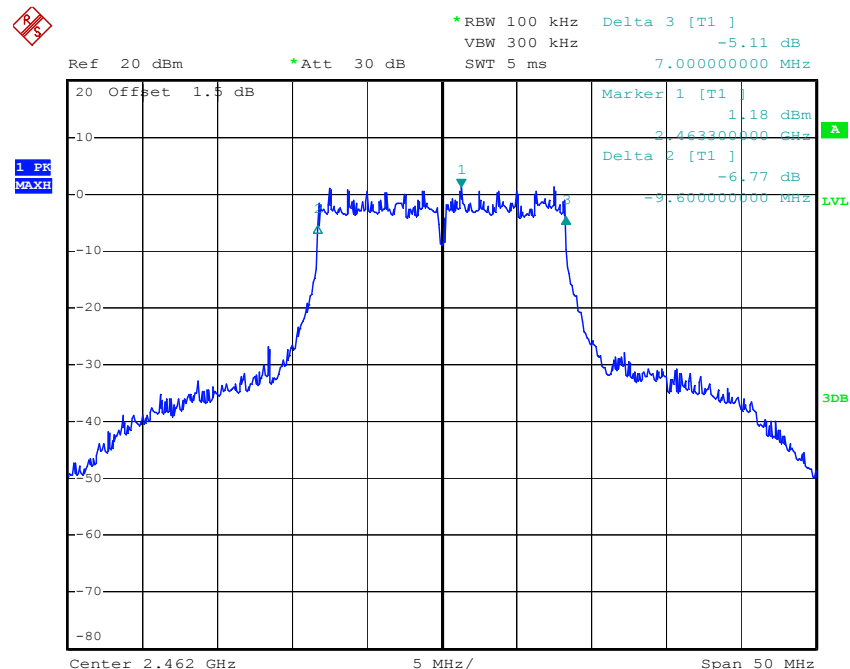


Date: 12.NOV.2013 09:49:18

| | |
|------------------------------|----------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N20 Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Antenna 1


| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|-------------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2412 | > 500kHz | 17.80 | PASS |
| 2437 | > 500kHz | 17.80 | PASS |
| 2462 | > 500kHz | 17.70 | PASS |

Mode: CH01

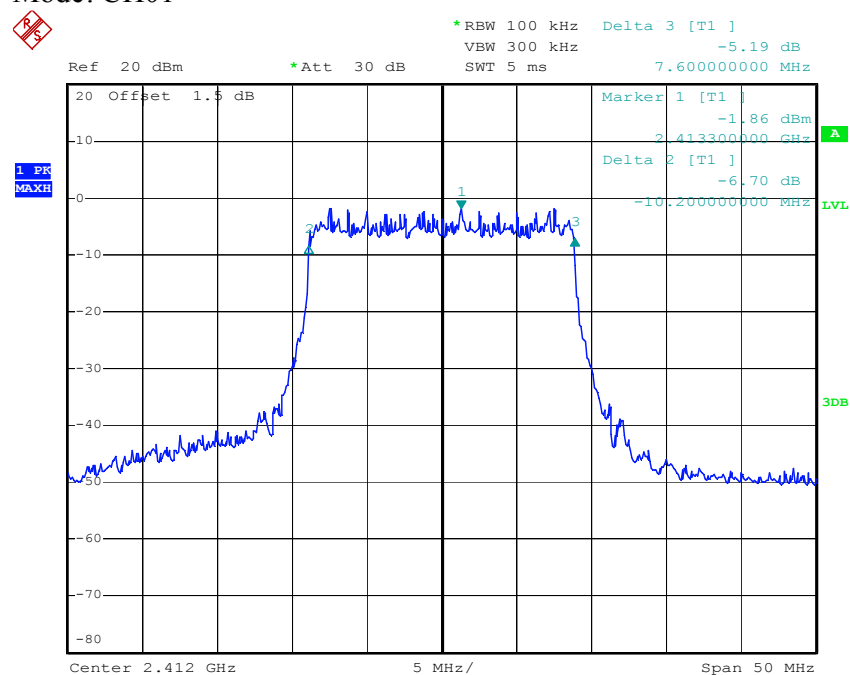


Date: 12.NOV.2013 11:28:11

Mode: CH06

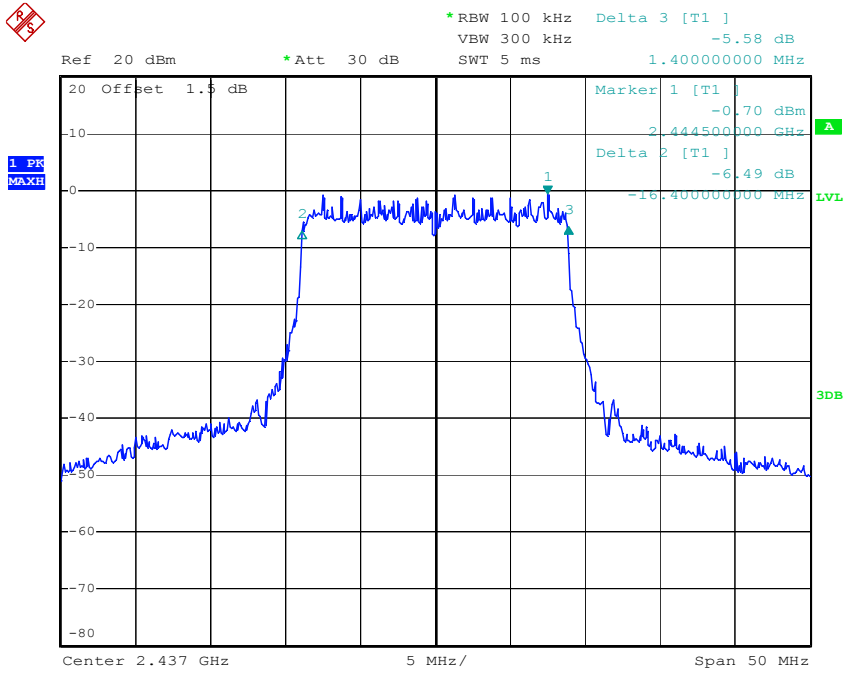

Date: 12.NOV.2013 11:28:57

Mode: CH11

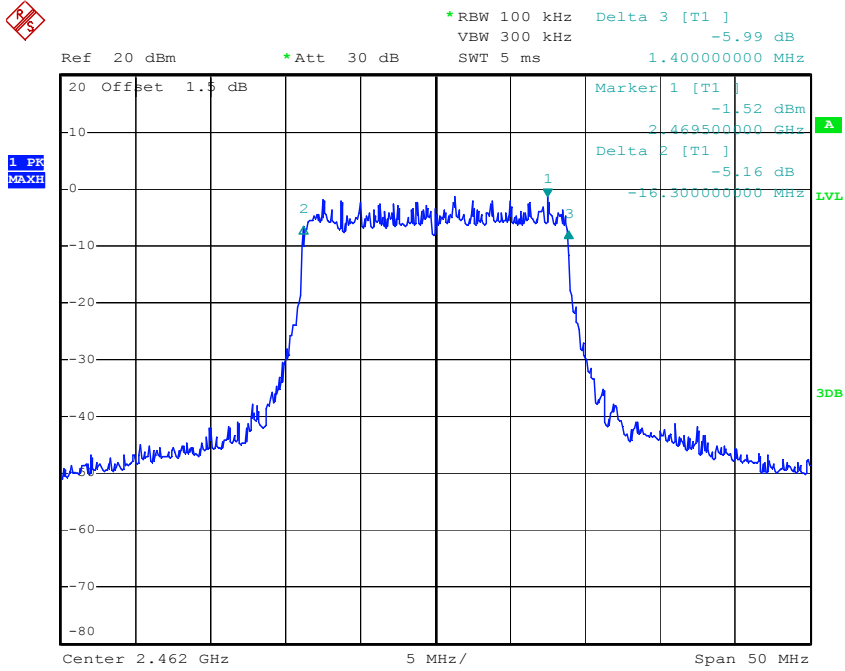


Date: 12.NOV.2013 11:29:52

Antenna 2


| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|--------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2412 | > 500kHz | 17.80 | PASS |
| 2437 | > 500kHz | 17.60 | PASS |
| 2462 | > 500kHz | 17.60 | PASS |

Mode: CH01

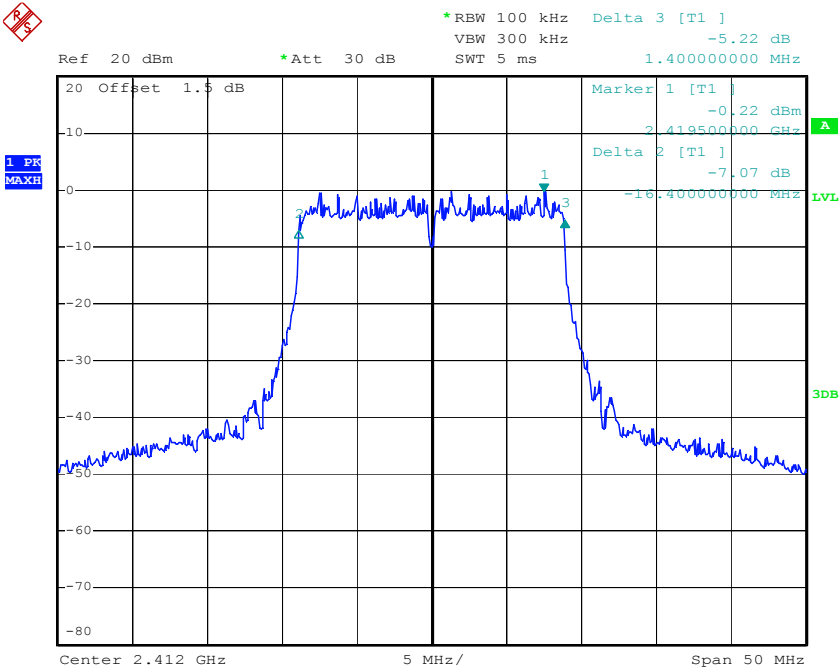


Date: 12.NOV.2013 09:45:32

Mode: CH06

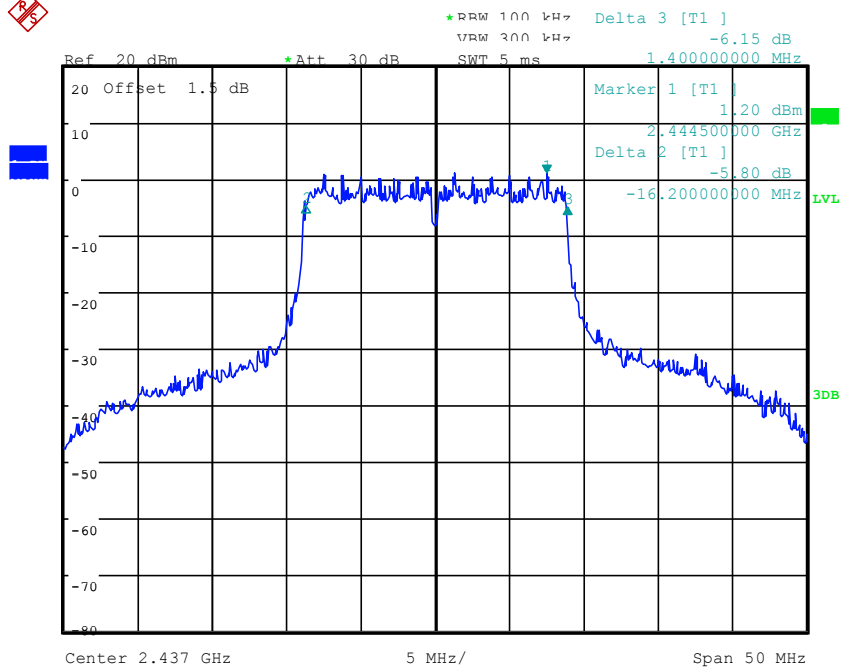

Date: 12.NOV.2013 09:46:35

Mode: CH11

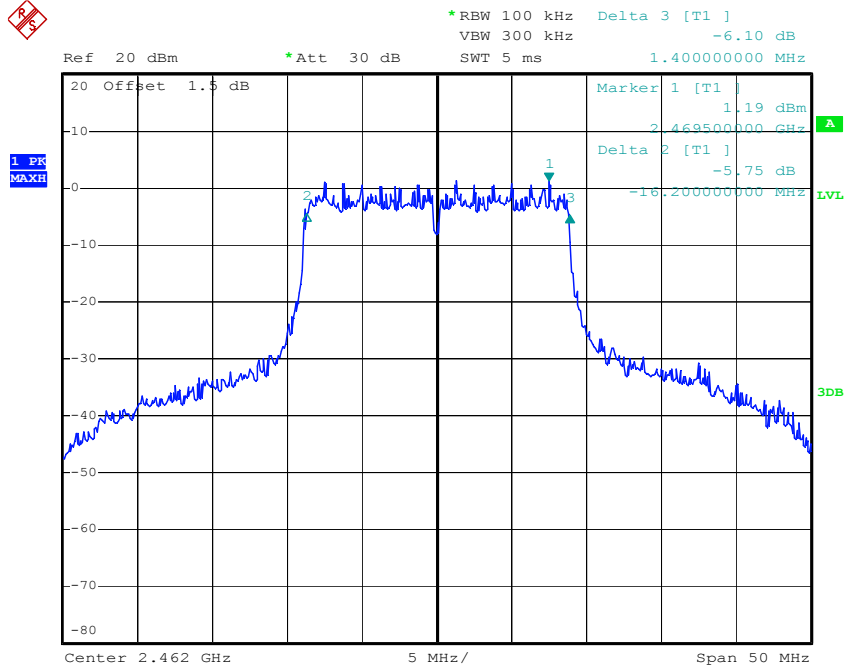


Date: 12.NOV.2013 09:47:46

| | |
|------------------------------|----------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N40 Mode CH03 / CH06 / CH09 |
| Testing Engineer | David |

Antenna 1


| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|-------------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2422 | > 500kHz | 36.40 | PASS |
| 2437 | > 500kHz | 36.60 | PASS |
| 2452 | > 500kHz | 36.40 | PASS |

Mode: CH03

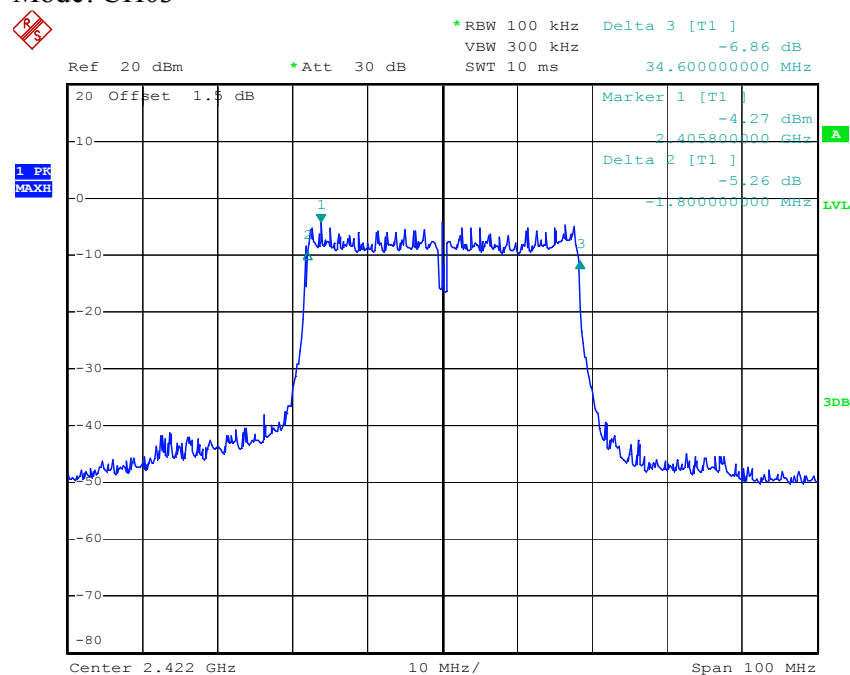


Date: 12.NOV.2013 11:24:08

Mode: CH06

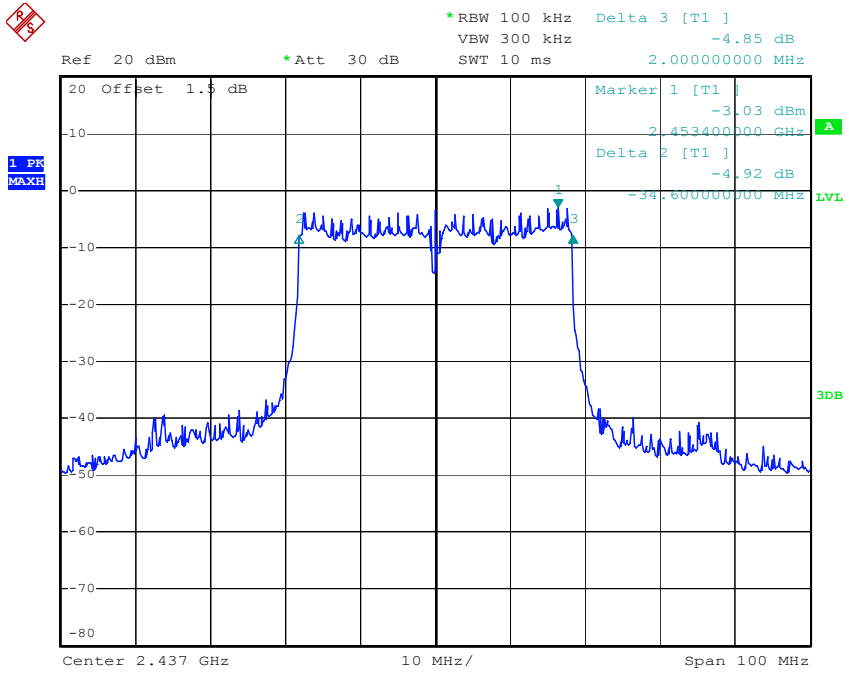

Date: 12.NOV.2013 11:25:27

Mode: CH09

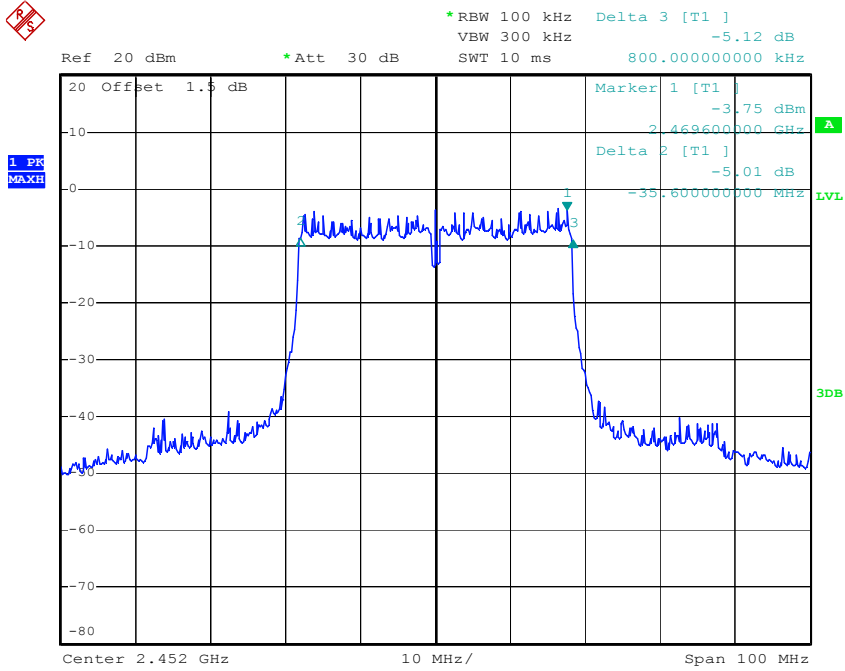


Date: 12.NOV.2013 11:26:22

Antenna 2


| 6dB Bandwidth(MHz) | | | |
|-------------------------|----------|-----------------|--------|
| Operating Channel (MHz) | Limit | Bandwidth (MHz) | Result |
| 2422 | > 500kHz | 36.60 | PASS |
| 2437 | > 500kHz | 36.60 | PASS |
| 2452 | > 500kHz | 36.60 | PASS |

Mode: CH03

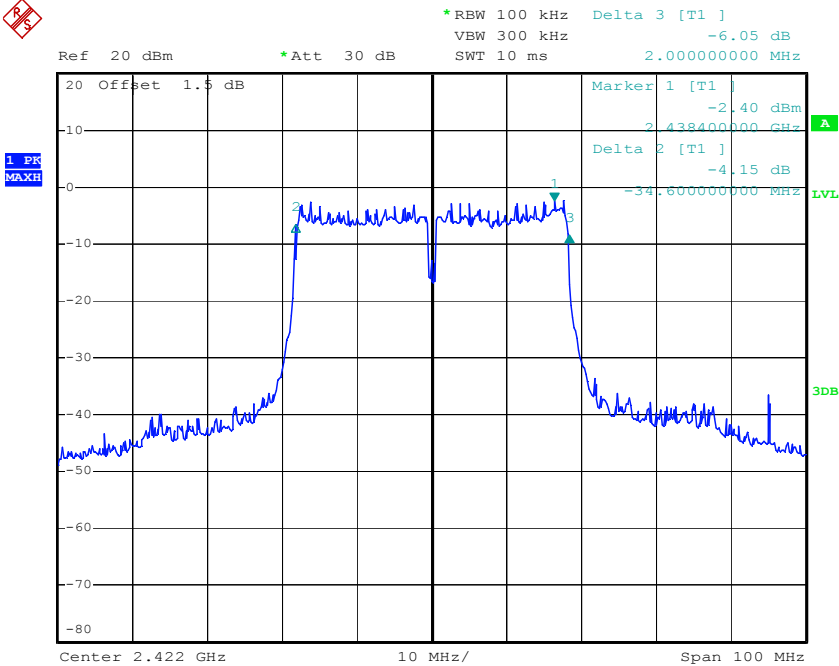


Date: 12.NOV.2013 09:41:00

Mode: CH06

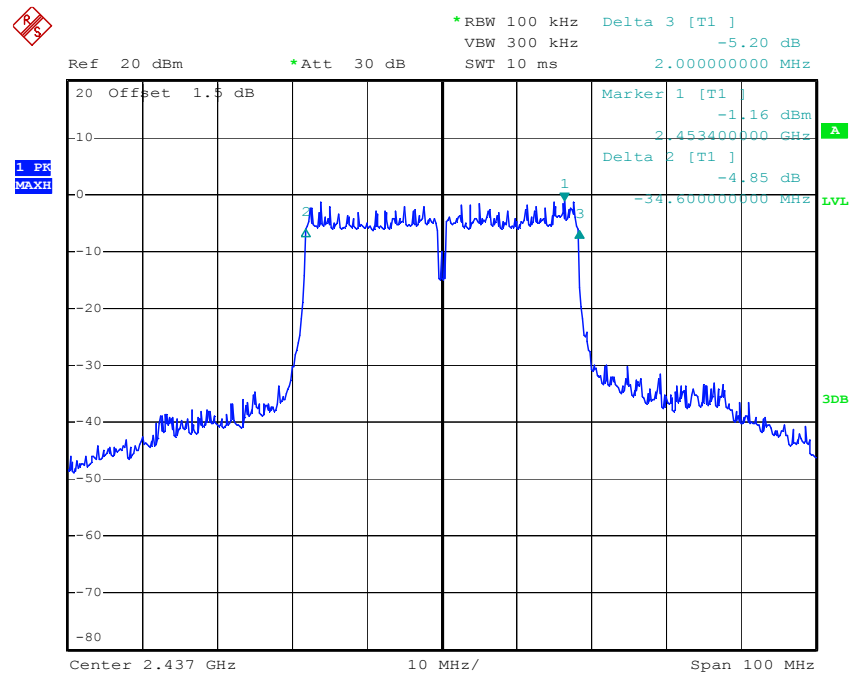

Date: 12.NOV.2013 09:42:15

Mode: CH09

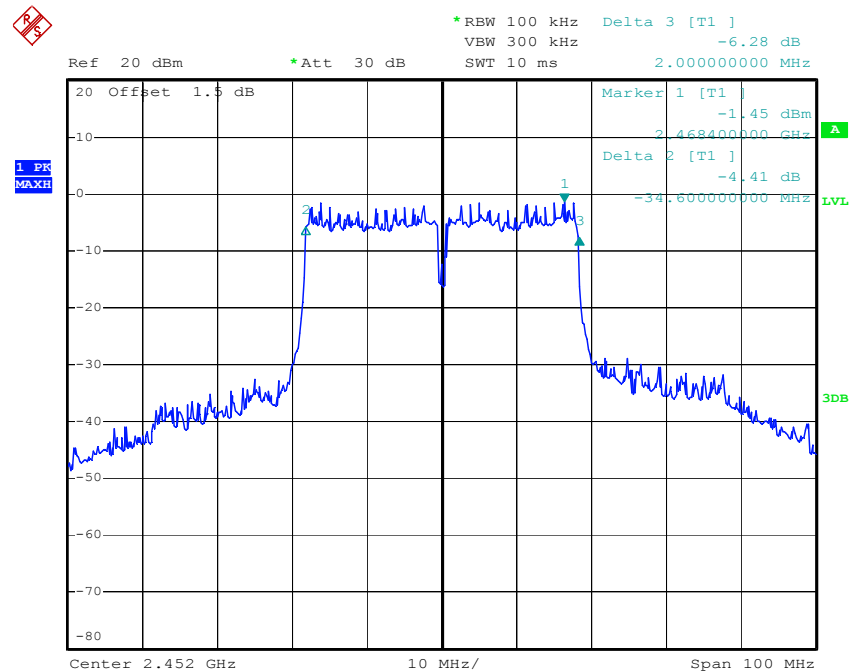

Date: 12.NOV.2013 09:43:24


5.3 Band Edge Requirements

The setup was identical to RF output power measurement. Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If the frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Any frequency outside the band of 2400 MHz to 2483.5 MHz, the power output level must be below 20 dB from the in-band transmitting signal: CFR 47 Part 15.215, 15.247(d).

5.3.1 Test Method

The conducted method was used to measure the channel power output according to ANSI C63.4:2009. The measurement was performed with modulation per CFR47 Part 15.215, 15.247 (d). This test was conducted on 2 channels of Sample. The worst mode result indicated below.

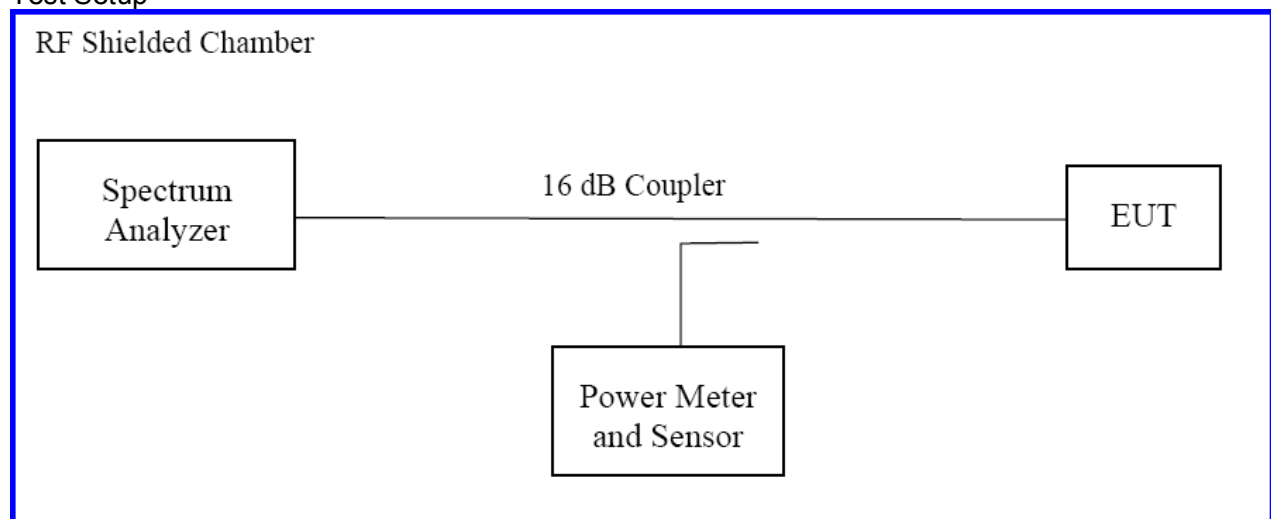

5.3.2 Test Results

| | |
|------------------------------|---------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11B Mode CH01 / CH11 |
| Testing Engineer | David |

Result: Pass

| Out of Band Edge Results (below 2390MHz) | | | | | | |
|--|-----------------------------|-------|-------------------|----|--------------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2100 | 41.10 | 28.69 | 74 | 54 | H | Pass |
| 2390 | 43.55 | 32.31 | 74 | 54 | H | Pass |
| 2100 | 41.02 | 29.21 | 74 | 54 | V | Pass |
| 2390 | 43.71 | 32.40 | 74 | 54 | V | Pass |


| Out of Band Edge Results (above 2483.5MHz) | | | | | | |
|--|-----------------------------|-------|-------------------|----|--------------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2483.5 | 45.92 | 32.81 | 74 | 54 | H | Pass |
| 2500 | 42.86 | 31.67 | 74 | 54 | H | Pass |
| 2483.5 | 46.27 | 29.59 | 74 | 54 | V | Pass |
| 2500 | 44.90 | 30.37 | 74 | 54 | V | Pass |

Emissions attenuated more than 20 dB below the permissible value are not reported.

Antenna 1


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2412 | -45.19 | -17.71 | Pass |
| 2462 | -51.44 | -16.58 | Pass |

Mode: CH01

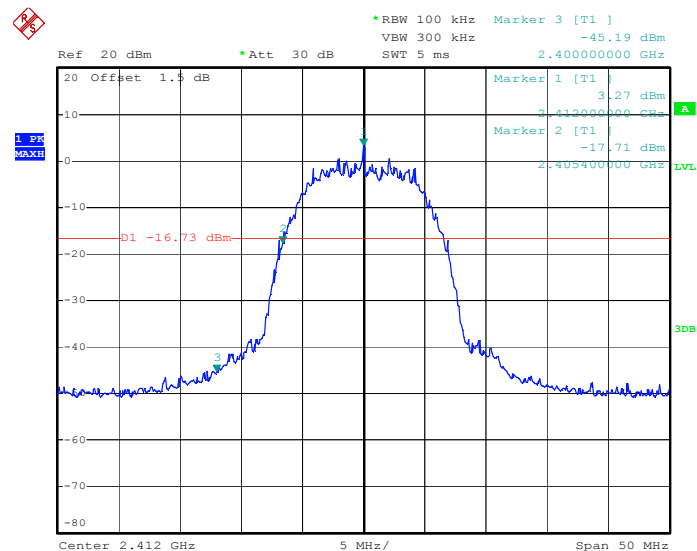

Date: 12.NOV.2013 12:00:14

Mode: CH11

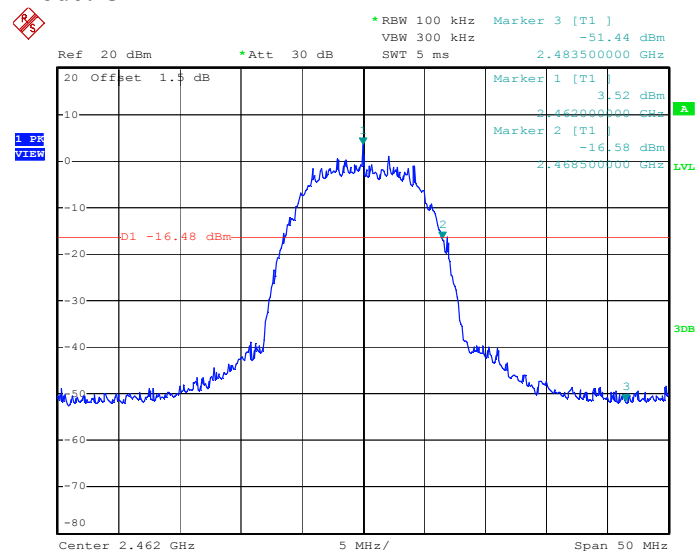


Date: 12.NOV.2013 12:01:31

Antenna 2


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2412 | -45.37 | -18.47 | Pass |
| 2462 | -50.10 | -18.30 | Pass |

Mode: CH01

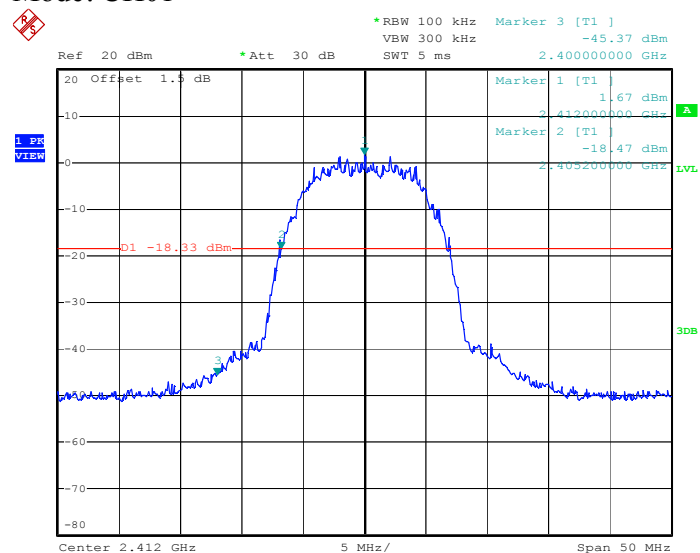

Date: 12.NOV.2013 10:23:47

Mode: CH11

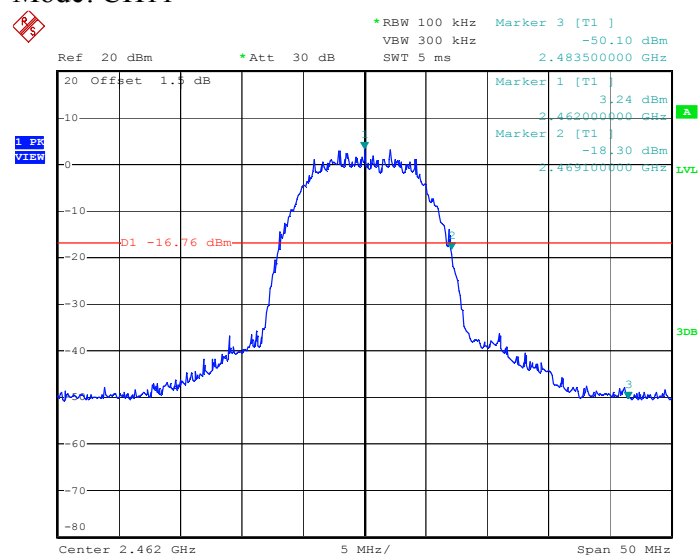

Date: 12.NOV.2013 10:22:09

| | |
|------------------------------|---------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11G Mode CH01 / CH11 |
| Testing Engineer | David |

Result: Pass

| Out of Band Edge Results (below 2390MHz) | | | | | | |
|--|--------------------------|-------|----------------|----|-----------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2100 | 40.65 | 28.16 | 74 | 54 | H | Pass |
| 2390 | 43.27 | 32.07 | 74 | 54 | H | Pass |
| 2100 | 40.20 | 29.14 | 74 | 54 | V | Pass |
| 2390 | 42.08 | 31.43 | 74 | 54 | V | Pass |


| Out of Band Edge Results (above 2483.5MHz) | | | | | | |
|--|--------------------------|-------|----------------|----|-----------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2483.5 | 44.54 | 32.66 | 74 | 54 | H | Pass |
| 2500 | 41.38 | 31.59 | 74 | 54 | H | Pass |
| 2483.5 | 45.49 | 29.83 | 74 | 54 | V | Pass |
| 2500 | 42.35 | 30.47 | 74 | 54 | V | Pass |

Emissions attenuated more than 20 dB below the permissible value are not reported.

Antenna 1


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2412 | -38.21 | -22.38 | Pass |
| 2462 | -49.31 | -21.95 | Pass |

Mode: CH01

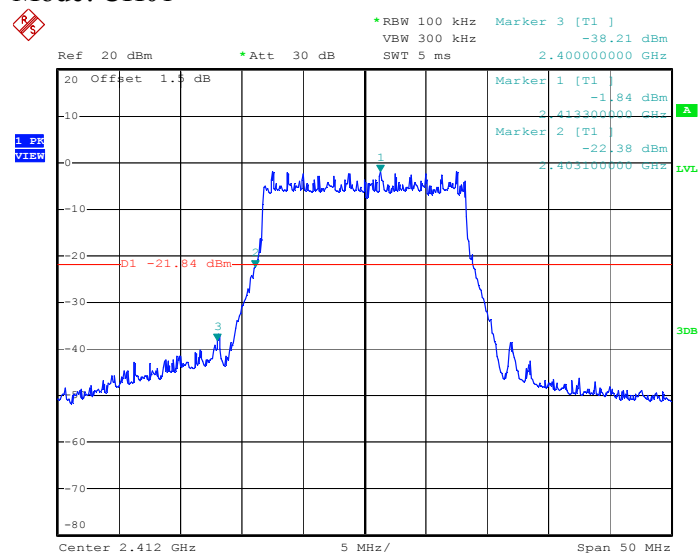

Date: 12.NOV.2013 11:56:33

Mode: CH11

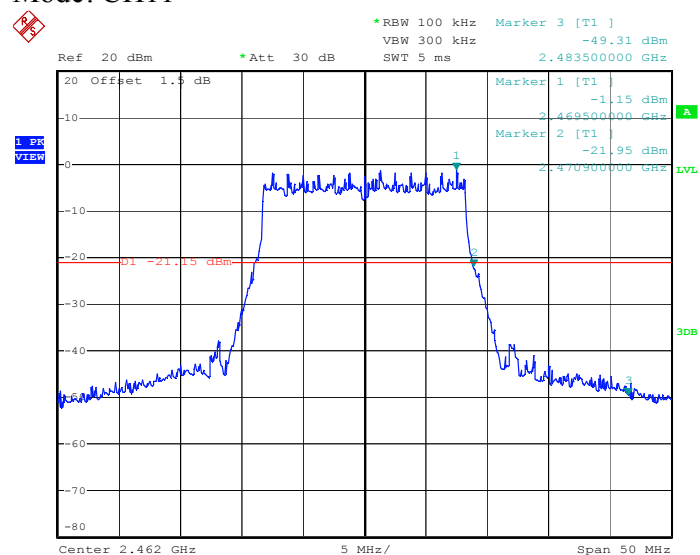


Date: 12.NOV.2013 11:55:03

Antenna 2


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2412 | -37.76 | -20.05 | Pass |
| 2462 | -41.39 | -18.37 | Pass |

Mode: CH01

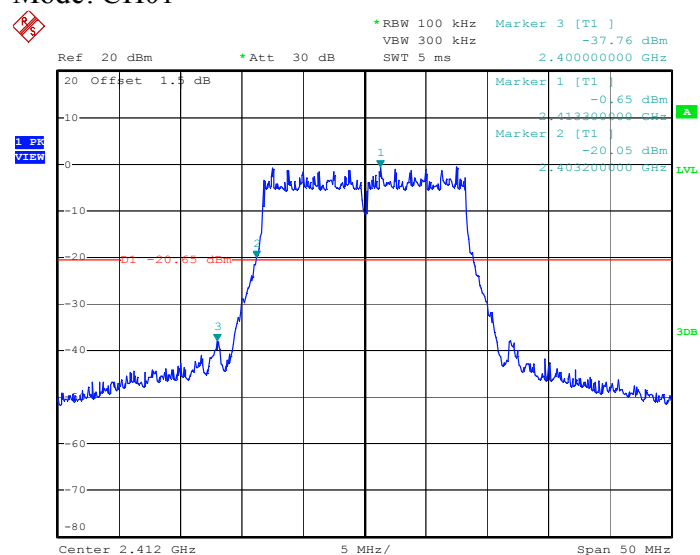

Date: 12.NOV.2013 10:18:22

Mode: CH11

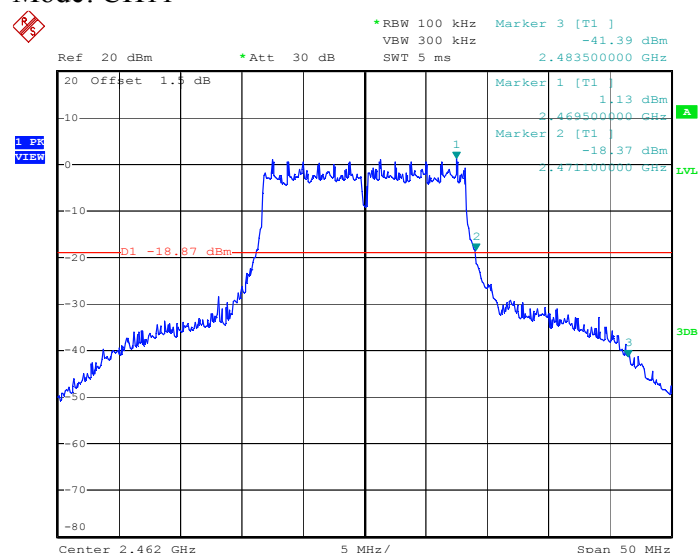

Date: 12.NOV.2013 10:20:27

| | |
|------------------------------|---------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N20 Mode CH01 / CH11 |
| Testing Engineer | David |

Result: Pass

| Out of Band Edge Results (below 2390MHz) | | | | | | |
|--|--------------------------|-------|----------------|----|-----------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2100 | 41.22 | 28.85 | 74 | 54 | H | Pass |
| 2390 | 43.57 | 32.06 | 74 | 54 | H | Pass |
| 2100 | 41.16 | 29.10 | 74 | 54 | V | Pass |
| 2390 | 42.89 | 32.64 | 74 | 54 | V | Pass |


| Out of Band Edge Results (above 2483.5MHz) | | | | | | |
|--|--------------------------|-------|----------------|----|-----------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2483.5 | 45.23 | 32.58 | 74 | 54 | H | Pass |
| 2500 | 44.18 | 31.29 | 74 | 54 | H | Pass |
| 2483.5 | 46.71 | 29.80 | 74 | 54 | V | Pass |
| 2500 | 45.09 | 30.11 | 74 | 54 | V | Pass |

Emissions attenuated more than 20 dB below the permissible value are not reported.

Antenna 1


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2412 | -38.55 | -20.82 | Pass |
| 2462 | -48.80 | -21.08 | Pass |

Mode: CH01

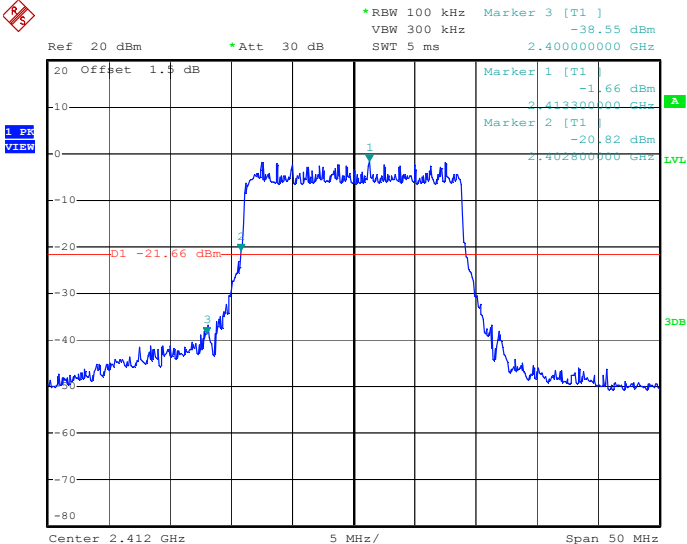

Date: 12.NOV.2013 11:52:22

Mode: CH11

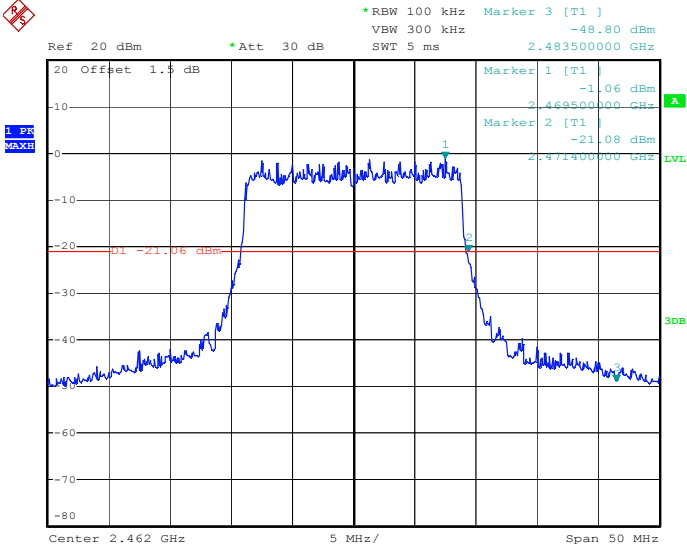


Date: 12.NOV.2013 11:53:48

Antenna 2


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2412 | -38.92 | -20.74 | Pass |
| 2462 | -39.33 | -18.66 | Pass |

Mode: CH01

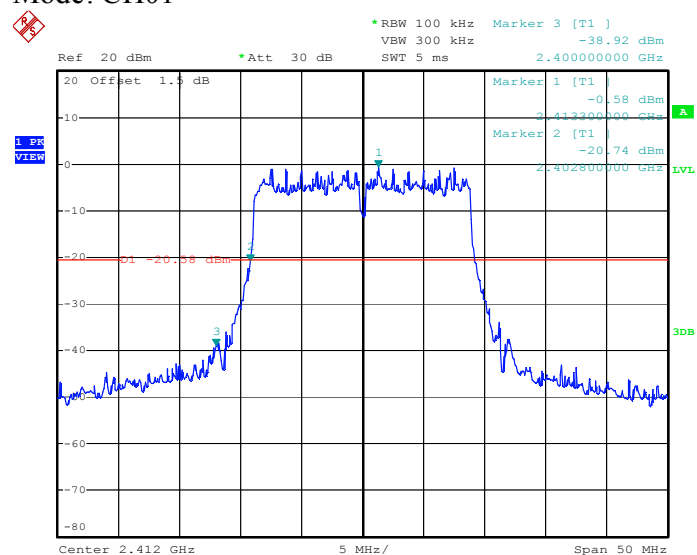

Date: 12.NOV.2013 10:16:55

Mode: CH11

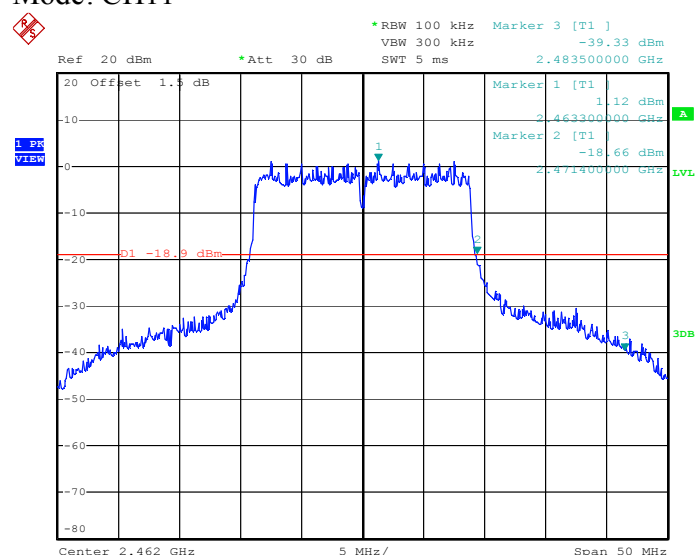

Date: 12.NOV.2013 10:15:44

| | |
|------------------------------|---------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N40 Mode CH03 / CH09 |
| Testing Engineer | David |

Result: Pass

| Out of Band Edge Results (below 2390MHz) | | | | | | |
|--|--------------------------|-------|----------------|----|-----------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2100 | 41.36 | 29.00 | 74 | 54 | H | Pass |
| 2390 | 44.84 | 32.55 | 74 | 54 | H | Pass |
| 2100 | 41.42 | 29.23 | 74 | 54 | V | Pass |
| 2390 | 44.41 | 32.87 | 74 | 54 | V | Pass |


| Out of Band Edge Results (above 2483.5MHz) | | | | | | |
|--|--------------------------|-------|----------------|----|-----------------|--------|
| Frequency (MHz) | Band Edge Level (dBuV/m) | | Limit (dBuV/m) | | Direction (H/V) | Result |
| | PK | AV | PK | AV | | |
| 2483.5 | 46.78 | 33.89 | 74 | 54 | H | Pass |
| 2500 | 44.96 | 31.86 | 74 | 54 | H | Pass |
| 2483.5 | 48.59 | 29.93 | 74 | 54 | V | Pass |
| 2500 | 45.66 | 30.68 | 74 | 54 | V | Pass |

Emissions attenuated more than 20 dB below the permissible value are not reported.

Antenna 1


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2422 | -40.44 | -24.28 | Pass |
| 2452 | -43.34 | -23.58 | Pass |

Mode: CH03

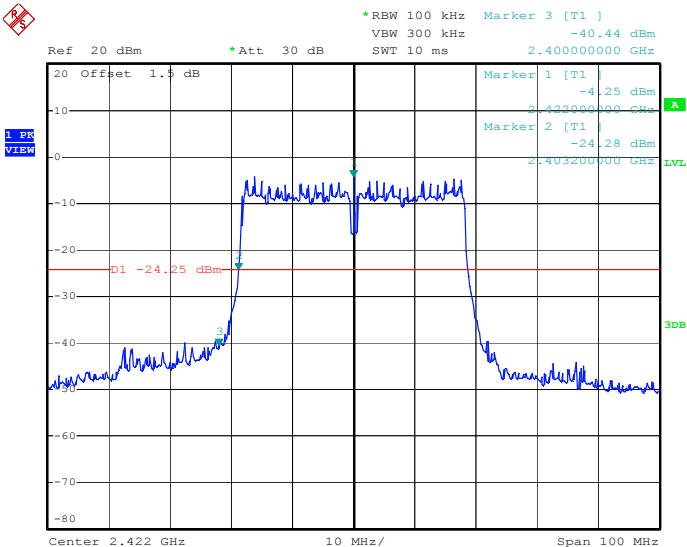

Date: 12.NOV.2013 11:50:47

Mode: CH09

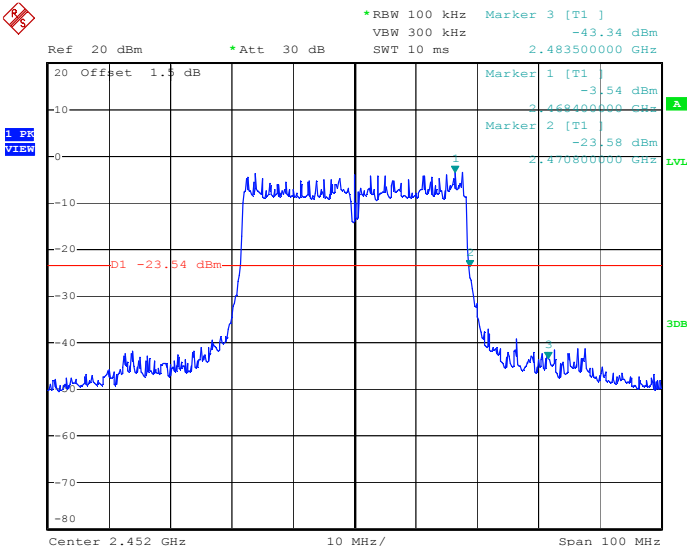


Date: 12.NOV.2013 11:49:12

Antenna 2


| Band Edge Results | | | |
|-------------------------|-----------------------|------------------|--------|
| Operating Channel (MHz) | Band Edge Level (dBm) | 20dB Level (dBm) | Result |
| 2422 | -39.05 | -24.01 | Pass |
| 2452 | -32.85 | -22.80 | Pass |

Mode: CH03

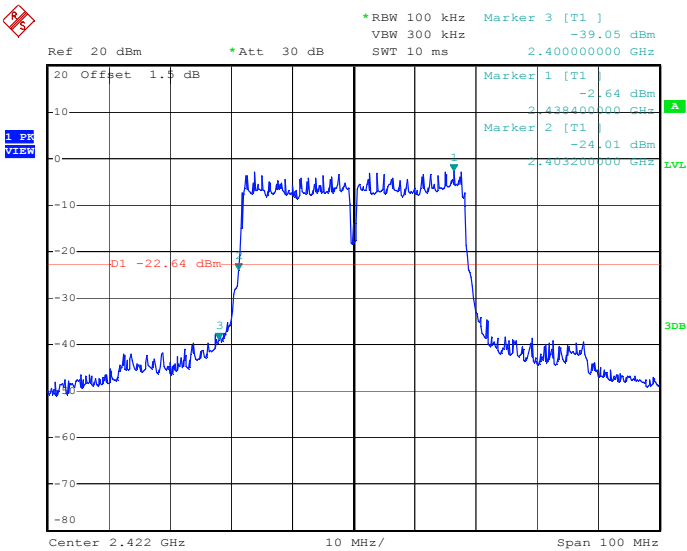

Date: 12.NOV.2013 10:11:07

Mode: CH09

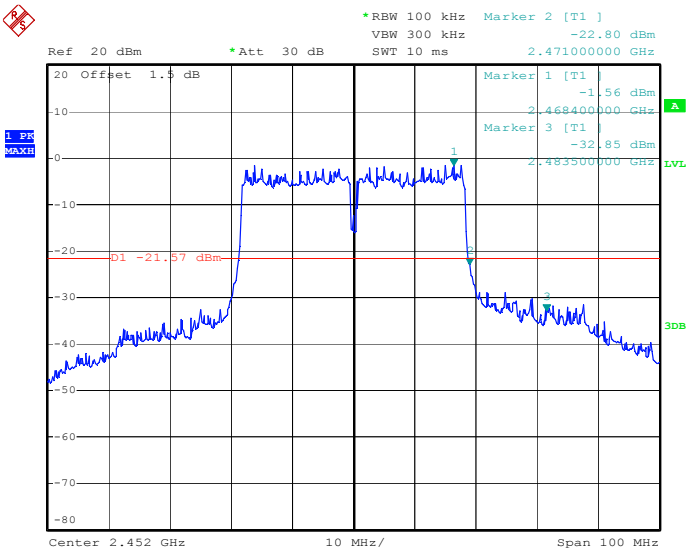

Date: 12.NOV.2013 10:09:39


5.4 Peak Power Spectral Density Requirements

According to the CFR47 Part 15.247 (e), the spectral power density output of the antenna port shall be less than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.4.1 Test Method

The conducted method was used to measure the channel power output according to ANSI C63.4:2009. The measurement was performed with modulation per CFR47 Part 15.247 (e). This test was conducted on 3 channels of Sample. The worst mode result indicated below.

Test Setup

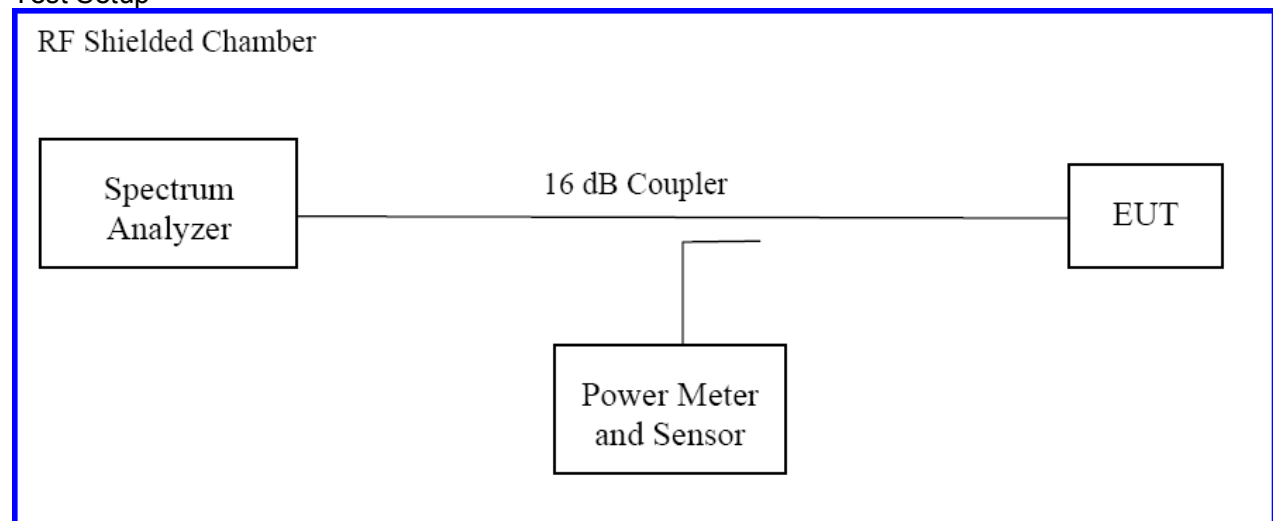

5.4.2 Test Results

| | |
|------------------------------|--------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11B Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -6.67 | 14.67 |
| 2437 | 8 | -6.35 | 14.35 |
| 2462 | 8 | -5.02 | 13.02 |

Result: Pass

Antenna 1


| Peak Power Spectral Density | | | |
|-----------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -7.92 | 15.92 |
| 2437 | 8 | -8.29 | 16.29 |
| 2462 | 8 | -5.86 | 13.86 |

Mode: CH01

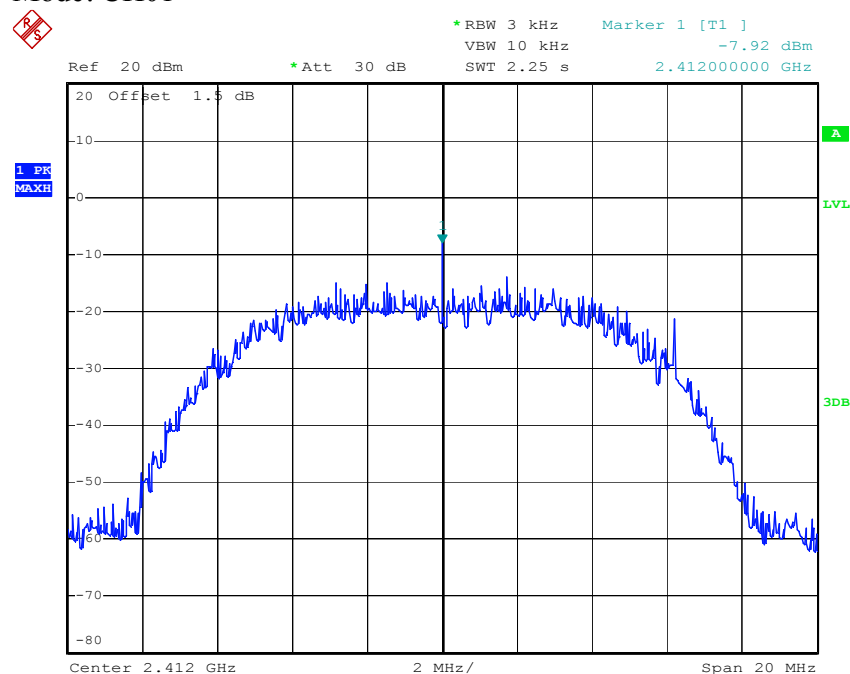


Date: 12.NOV.2013 11:38:26

Mode: CH06

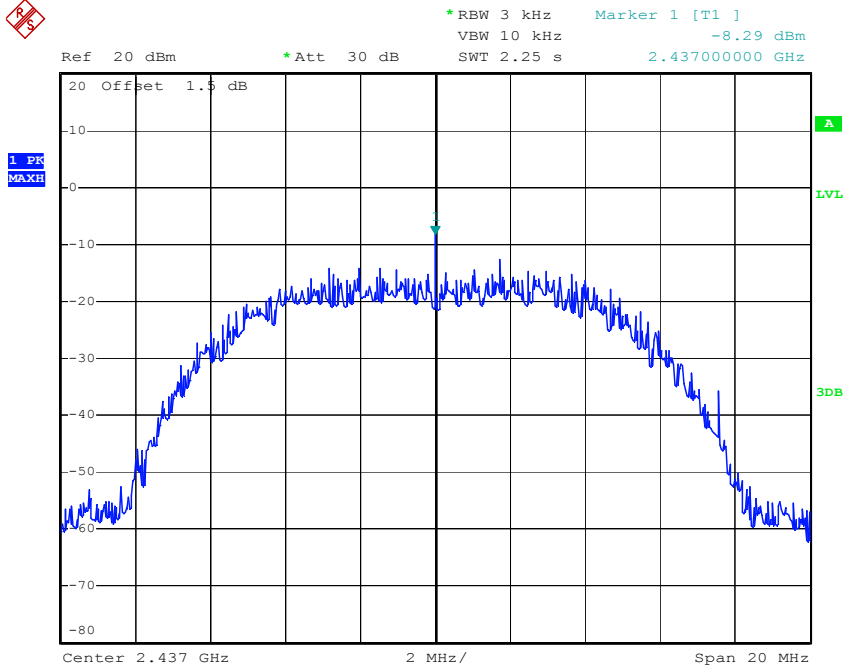

Date: 12.NOV.2013 11:37:55

Mode: CH11

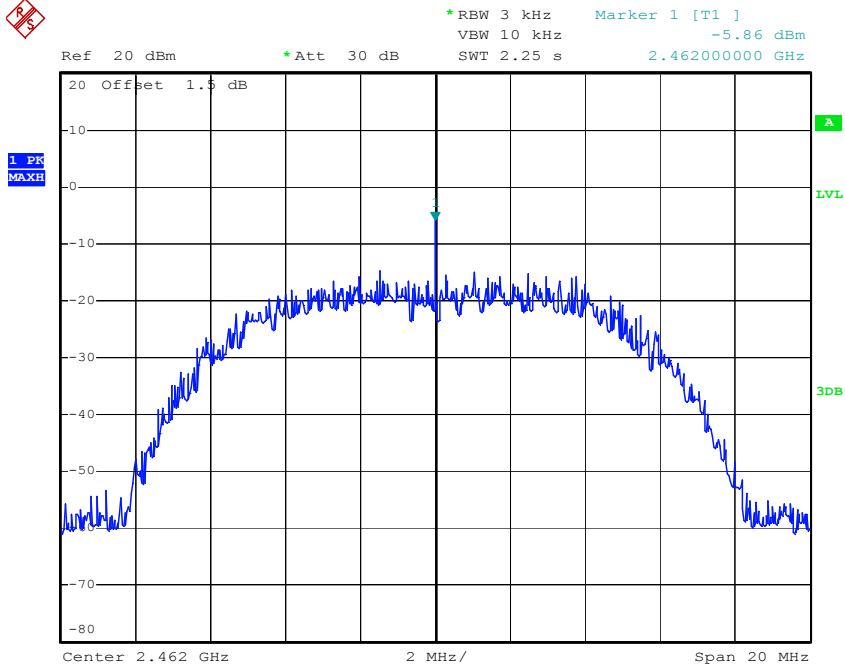


Date: 12.NOV.2013 11:37:19

Antenna 2


| Output Power | | | |
|----------------------------|----------------|---------------|----------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -12.71 | 20.71 |
| 2437 | 8 | -10.79 | 18.79 |
| 2462 | 8 | -12.58 | 20.58 |

Mode: CH01

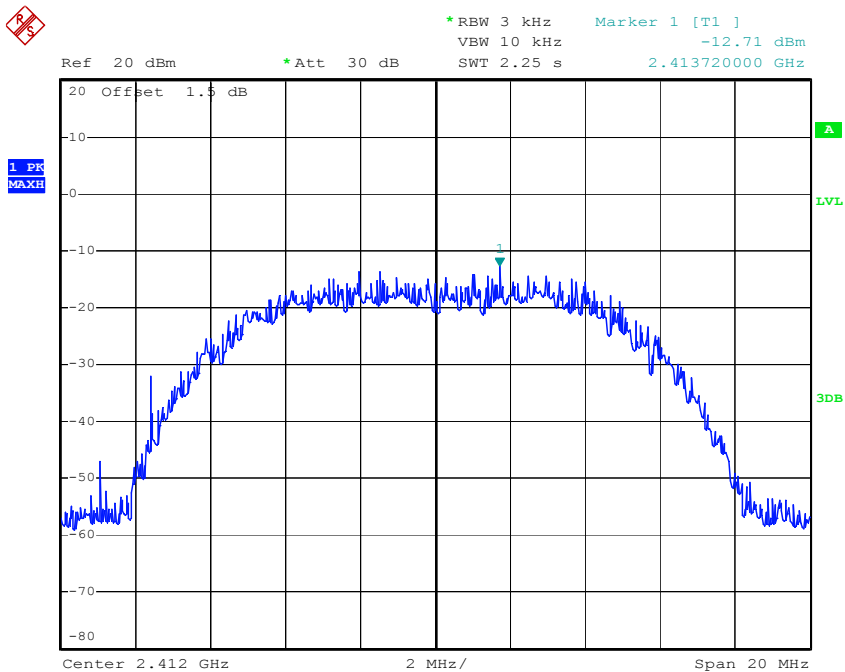


Date: 12.NOV.2013 09:57:47

Mode: CH06

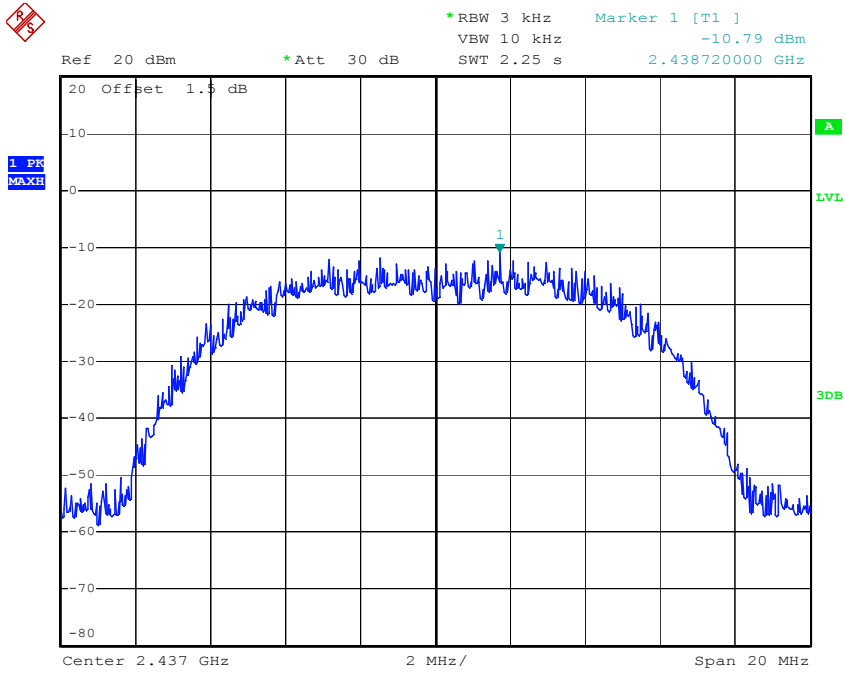

Date: 12.NOV.2013 09:57:03

Mode: CH11

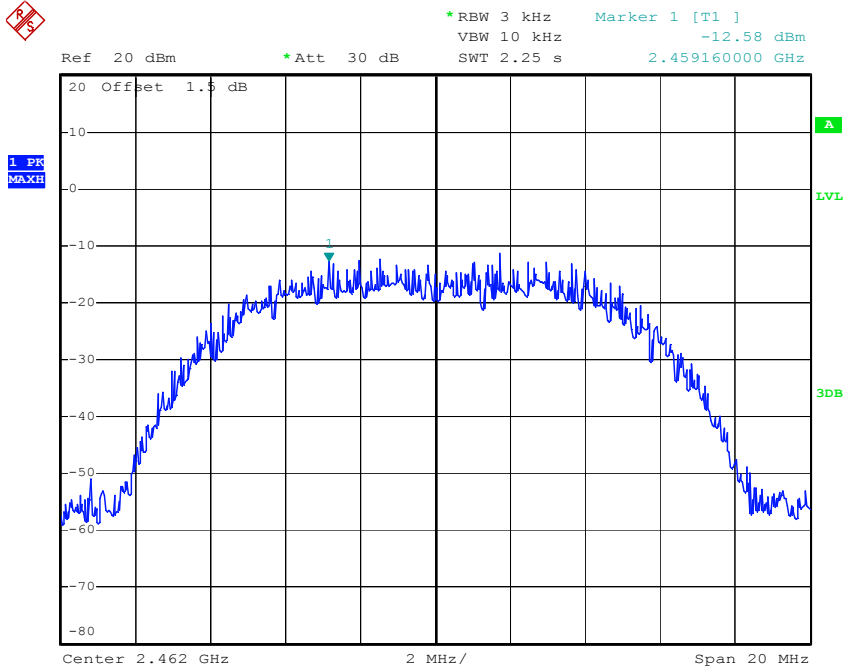

Date: 12.NOV.2013 09:56:28

| | |
|------------------------------|--------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11G Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -9.24 | 17.24 |
| 2437 | 8 | -8.96 | 16.96 |
| 2462 | 8 | -8.34 | 16.34 |

Result: Pass

Antenna 1


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -9.94 | 17.94 |
| 2437 | 8 | -10.31 | 18.31 |
| 2462 | 8 | -9.07 | 17.07 |

Mode: CH01

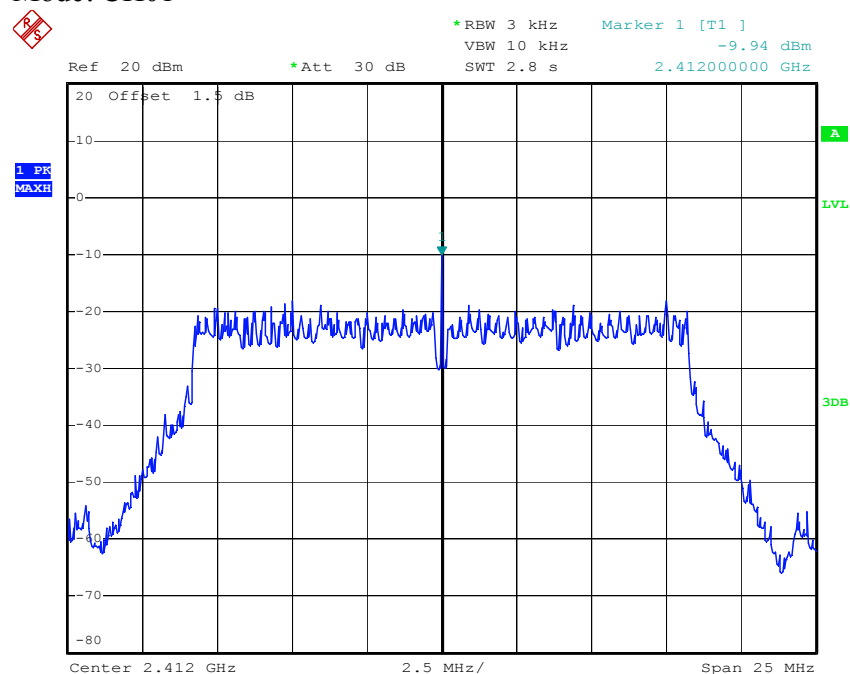


Date: 12.NOV.2013 11:39:00

Mode: CH06

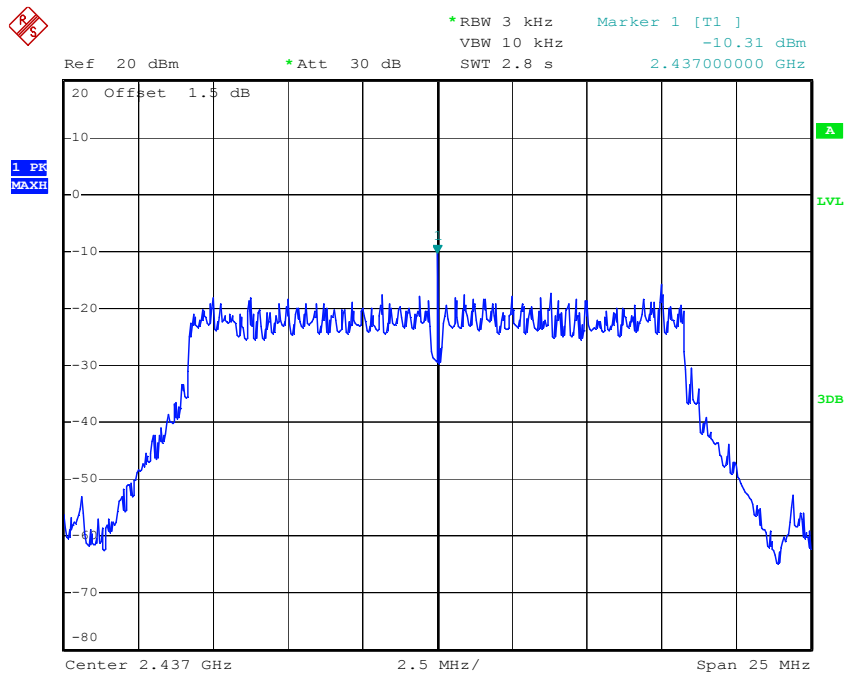

Date: 12.NOV.2013 11:39:29

Mode: CH11

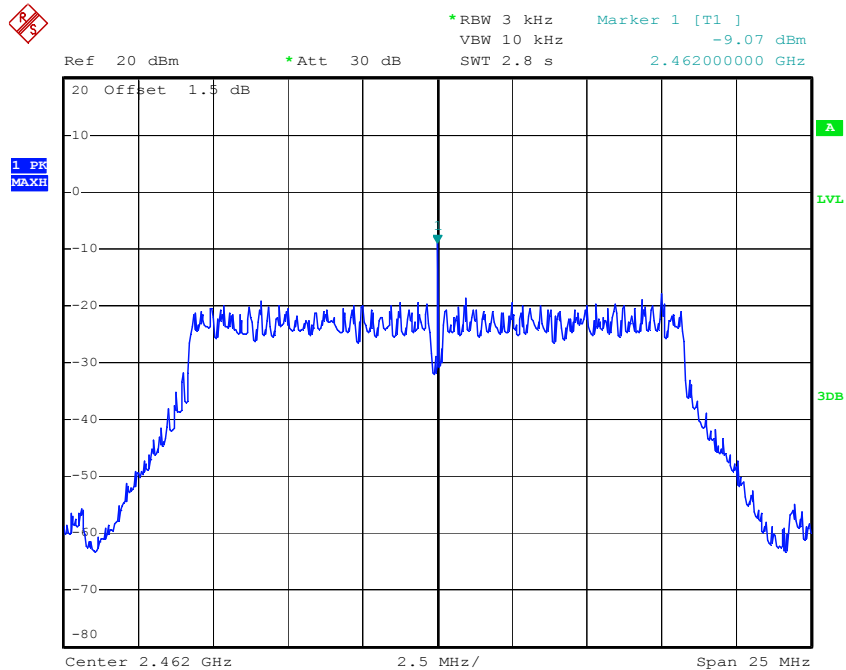


Date: 12.NOV.2013 11:39:54

Antenna 2


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -17.54 | 25.54 |
| 2437 | 8 | -14.68 | 22.68 |
| 2462 | 8 | -16.42 | 24.42 |

Mode: CH01

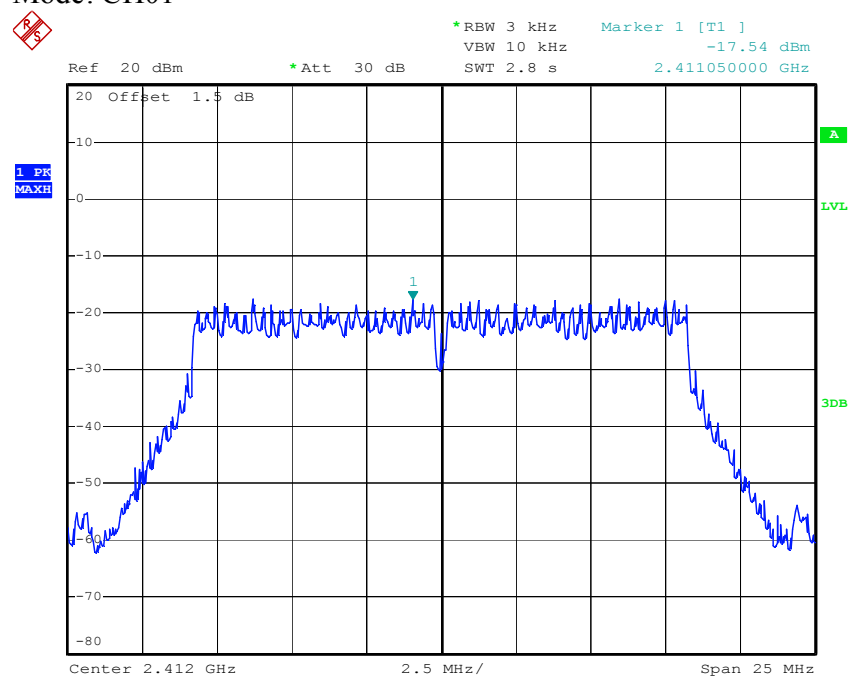


Date: 12.NOV.2013 09:59:26

Mode: CH06

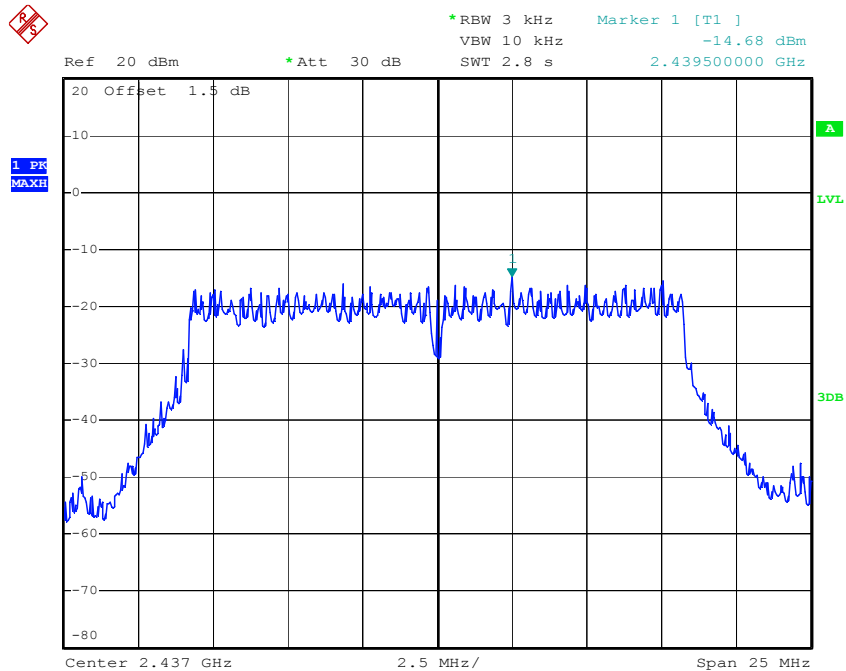

Date: 12.NOV.2013 09:59:57

Mode: CH11

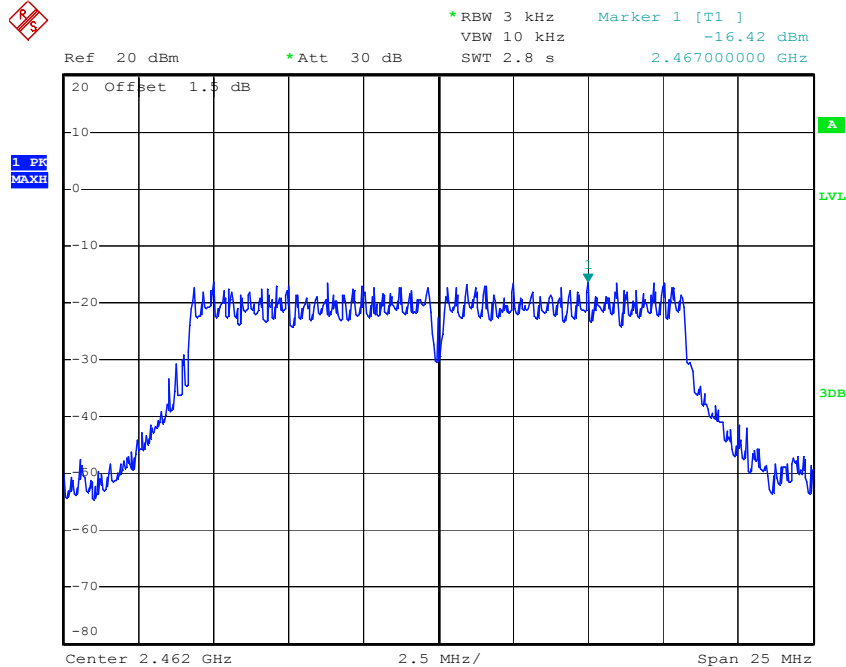

Date: 12.NOV.2013 10:00:36

| | |
|------------------------------|----------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N20 Mode CH01 / CH06 / CH11 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -9.22 | 17.22 |
| 2437 | 8 | -9.08 | 17.08 |
| 2462 | 8 | -8.59 | 16.59 |

Result: Pass

Antenna 1


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -9.96 | 17.96 |
| 2437 | 8 | -10.03 | 18.03 |
| 2462 | 8 | -9.50 | 17.50 |

Mode: CH01

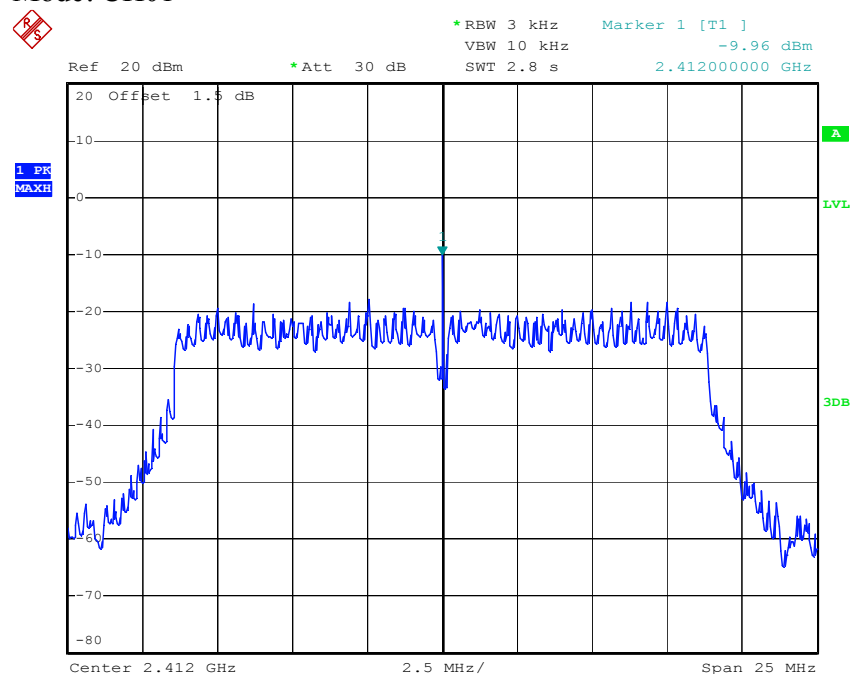


Date: 12.NOV.2013 11:41:40

Mode: CH06

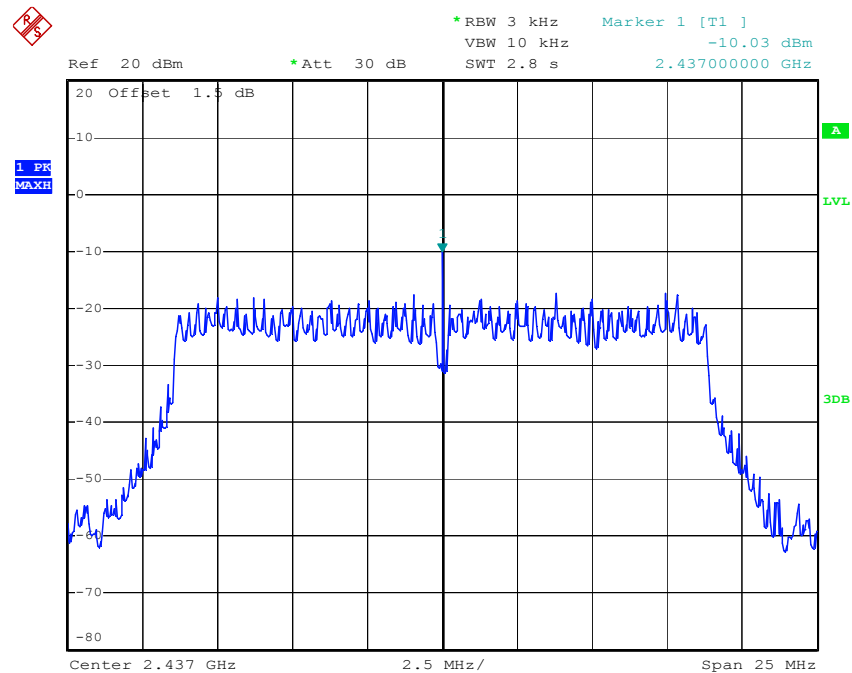

Date: 12.NOV.2013 11:41:06

Mode: CH11

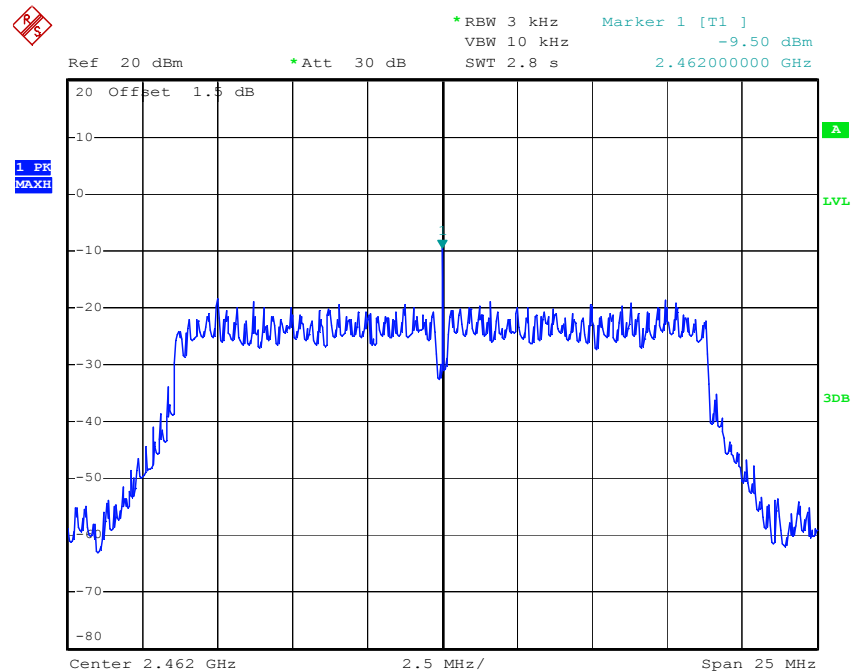


Date: 12.NOV.2013 11:40:42

Antenna 2


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2412 | 8 | -17.29 | 25.29 |
| 2437 | 8 | -16.15 | 24.15 |
| 2462 | 8 | -15.82 | 23.82 |

Mode: CH01

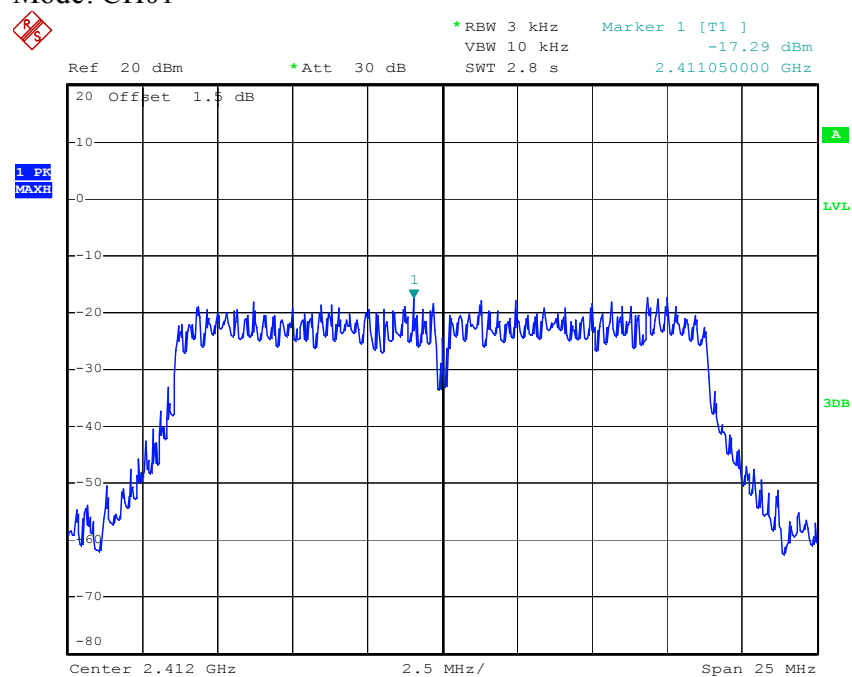


Date: 12.NOV.2013 10:02:38

Mode: CH06

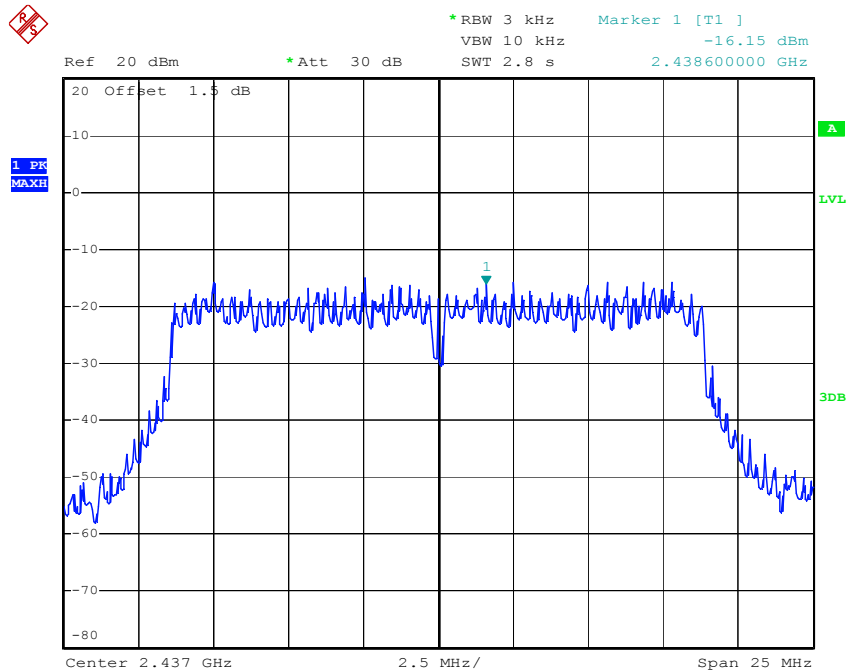

Date: 12.NOV.2013 10:02:09

Mode: CH11

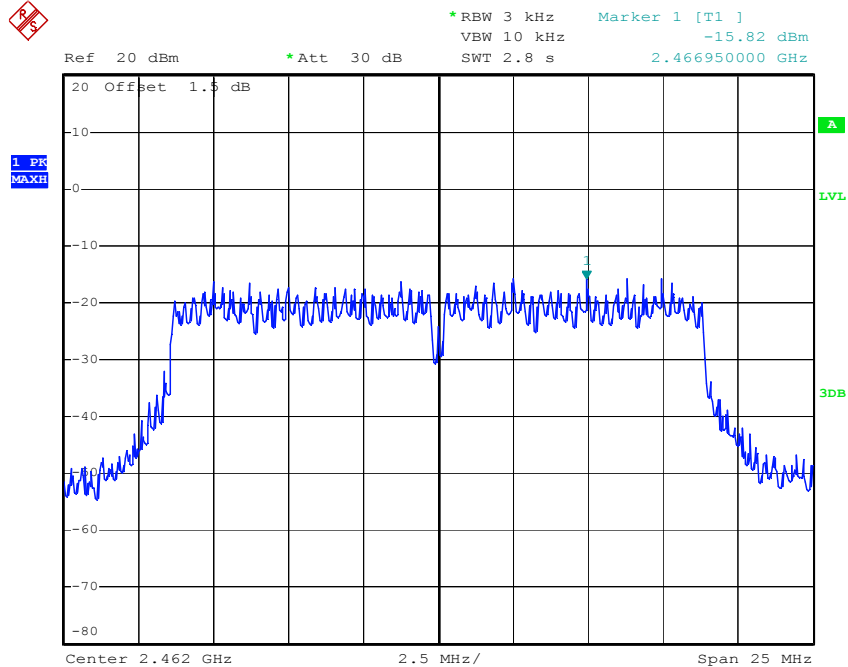

Date: 12.NOV.2013 10:01:30

| | |
|------------------------------|----------------------------------|
| Barometric Pressure (mbar) | 1000.8 |
| Temperature | 23° C |
| Relative Humidity | 54 % |
| EUT | Wi-Fi Extender Smart Lamp |
| M/N | ZH01-WB |
| Operation Condition | TX 11N40 Mode CH03 / CH06 / CH09 |
| Testing Engineer | David |

Combo (Antenna 1 + Antenna 2)


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2422 | 8 | -12.62 | 20.62 |
| 2437 | 8 | -12.20 | 20.20 |
| 2452 | 8 | -11.82 | 19.82 |

Result: Pass

Antenna 1


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2422 | 8 | -13.24 | 21.24 |
| 2437 | 8 | -13.20 | 21.20 |
| 2452 | 8 | -12.63 | 20.63 |

Mode: CH03

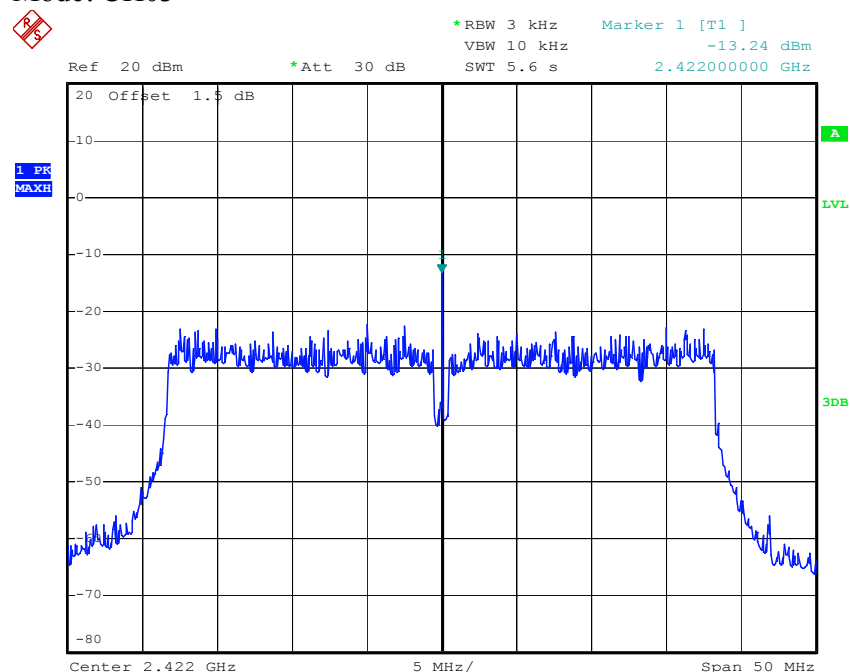


Date: 12.NOV.2013 11:43:01

Mode: CH06

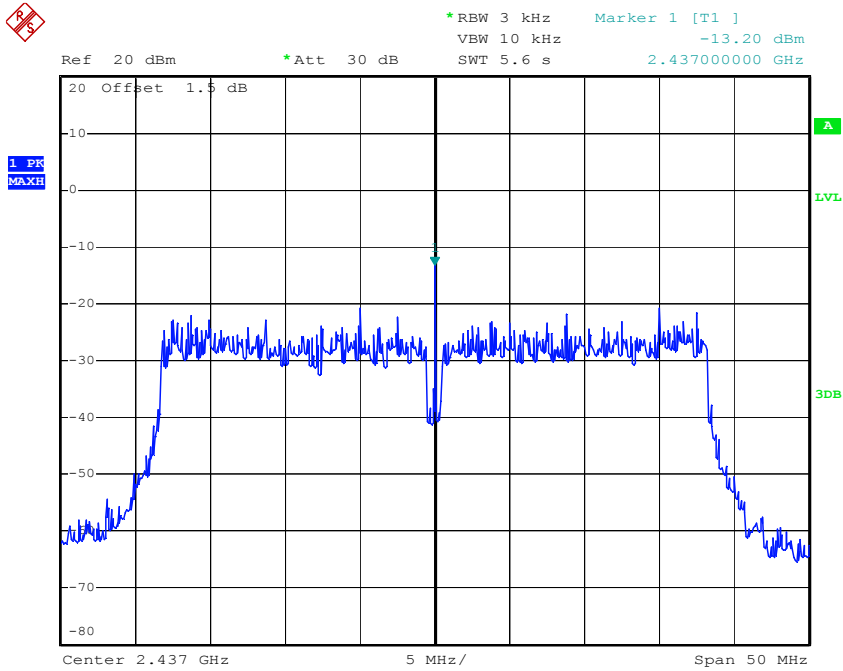

Date: 12.NOV.2013 11:43:31

Mode: CH09

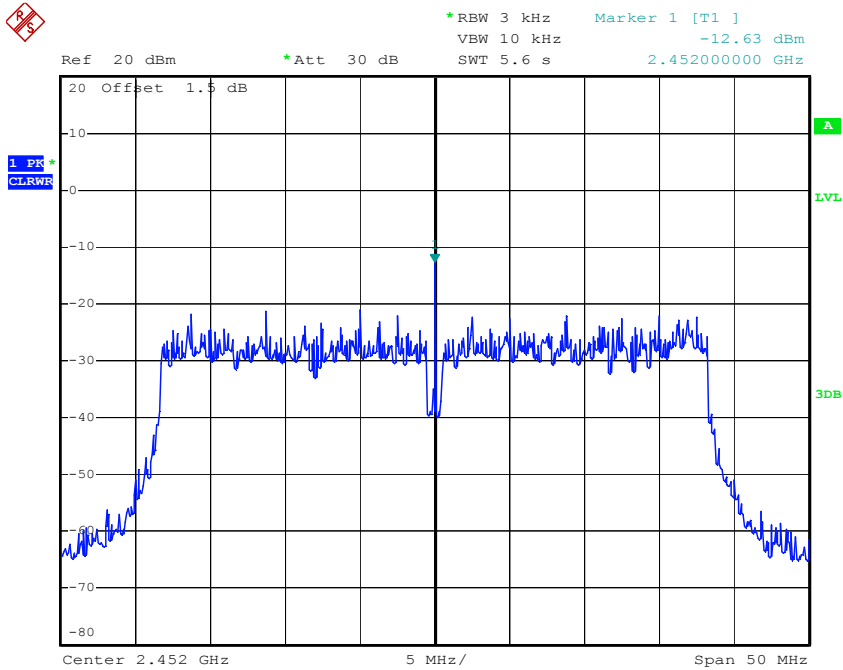


Date: 12.NOV.2013 11:47:00

Antenna 2


| Output Power | | | |
|-------------------------|-------------|------------|-------------|
| Operating Channel (MHz) | Limit (dBm) | PPSD (dBm) | Margin (dB) |
| 2422 | 8 | -21.36 | 29.36 |
| 2437 | 8 | -19.06 | 27.06 |
| 2452 | 8 | -19.49 | 27.49 |

Mode: CH03

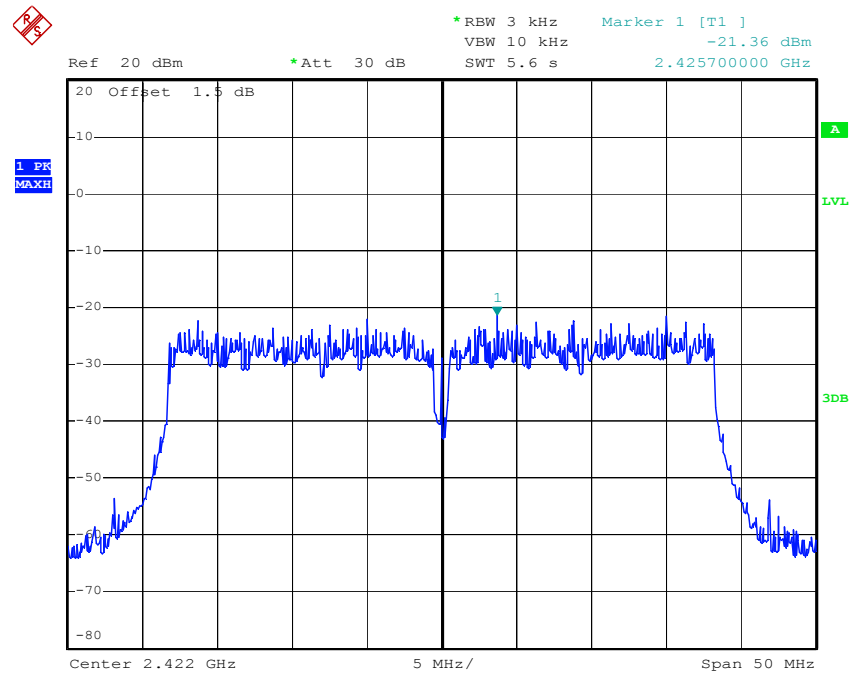


Date: 12.NOV.2013 10:03:48

Mode: CH06

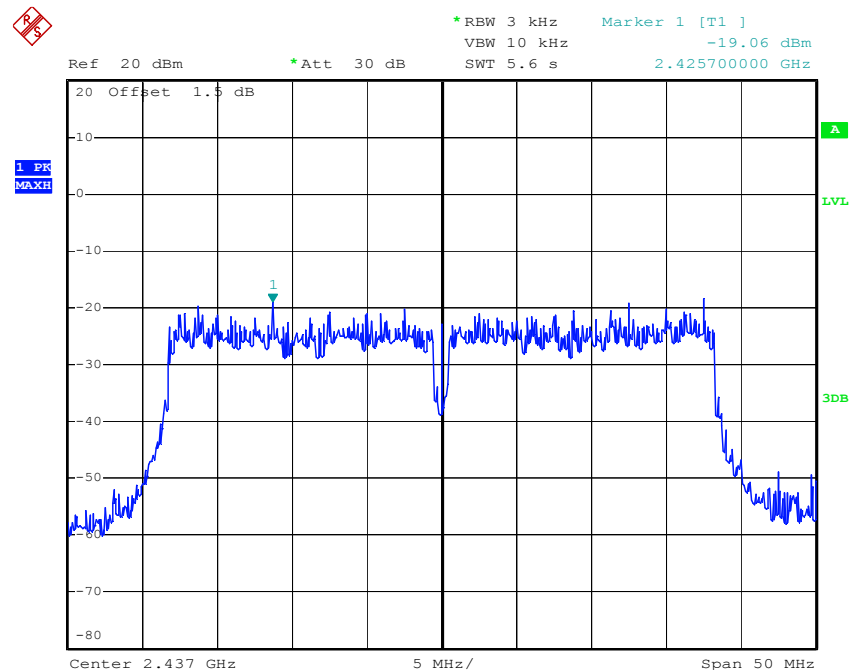

Date: 12.NOV.2013 10:04:52

Mode: CH09

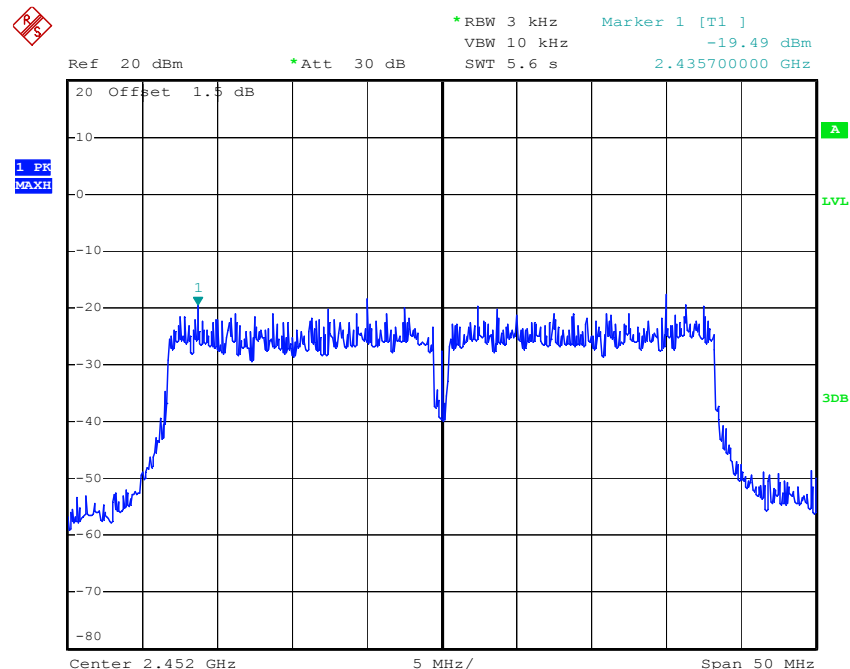

Date: 12.NOV.2013 10:05:23

5.5 Maximum Permissible Exposure Requirements

5.5.1 Test Methodology

In this document, we try to prove the safety of radiation harmfulness to the human body for our product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The Gain of the antenna used in this product is measured in a Semi-Anechoic Chamber, and also the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis transmission formula is a far field assumption, the calculated result of that is an over-prediction for near field power density. We will take that as the worst case to specify the safety range.

5.5.2 RF Exposure Limit

According to FCC 1.1310 table 1: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Average Time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|------------------------|
| 300-1500 | - | - | F/300 | 6 |
| 1500-100,000 | - | - | 5 | 6 |
| 300-1500 | - | - | F/1500 | 6 |
| 1500-100,000 | - | - | 1.0 | 30 |

F = Frequency in MHz

5.5.3 EUT Operation Condition

The software provided by Manufacturer enabled the EUT to transmit data at lowest, middle and highest channel individually.

5.5.4 Classification

The antenna of the product, under normal use condition, is at least 20cm away from the body of the user. Warning statement to the user for keeping at least 20cm or more separation distance with the antenna should be included in users manual. So, this device is classified as a Mobile Device.

5.5.5 Test Results

5.5.5.1 Antenna Gain

The transmitting antenna was externally connected. The antenna had the highest gain of +7.01 dBi or 5.02 (numeric).

5.5.5.2 Sample Calculation

The Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where;

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

$\pi \approx 3.1416$

R = distance between observation point and center of the radiator in cm

5.5.5.3 Output Power into Antenna & RF Exposure value at distance 20cm:

Calculations for this report are based on highest power measurement.

Limit for MPE (from FCC part 1.1310 table1) is 1.0 mW/cm²

The highest measured channel output power is +14.55 dBm or 28.51 mW

Using the Friis transmission formula, the EIRP is $P_{out} * G$, and R is 20cm.

$P_d = (28.51 * 5.02) / (1600\pi) = 0.0285$ mW/cm², which is 0.9715 mW/cm² below to the limit.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

5.6 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d).

5.6.1 Test Methodology

5.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's. Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

5.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, then the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m nonconductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on the worst axis for three operating channels; 2422 MHz, 2437 MHz, and 2452 MHz for 802.11 N40 mode.

The worst axis for each antennas type was scanned.

5.6.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209:

| Measurement Frequency (MHz) | Field strength (microvolts/meter) | distance (meters) |
|-----------------------------------|--------------------------------------|----------------------|
| 0.009-0.490..... | 2400/F (kHz) | 300 |
| 0.490-1.705..... | 24000/F (kHz) | 30 |
| 1.705-30.0..... | 30 | 30 |
| 30-88..... | 100 ** | 3 |
| 88-216..... | 150 ** | 3 |
| 216-960..... | 200 ** | 3 |
| Above 960..... | 500 | 3 |

All harmonics and spurious emission which are outside of the restricted band shall be 20 dB below the in-band emission.

FCC ID: 2ABAI-ZH01WB

5.6.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and 1.5.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Data (From 9KHz ~ 30MHz):**Mode: Stand Alone**

| Frequency (MHz) | Read Level (dBuV) | Total Factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Remark | Over Limit (dB) | Direction (H/V) | Result |
|-----------------|-------------------|---------------------|----------------|---------------------|--------|-----------------|-----------------|--------|
| 20.02 | 56.27 | -15.89 | 40.38 | 49.5 | QP | -9.12 | - | PASS |
| | | | | | | | | |

Data (From 30MHz ~ 1GHz):**Mode: Stand Alone**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark | Direction (H/V) |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------|-----------------|
| 39.72 | 36.87 | 15.49 | 0.66 | 32.06 | 20.96 | 40.00 | -19.04 | QP | H |
| 58.20 | 36.73 | 14.80 | 0.84 | 31.94 | 20.43 | 40.00 | -19.57 | QP | H |
| 102.36 | 36.21 | 14.92 | 1.21 | 31.77 | 20.57 | 43.50 | -22.93 | QP | H |
| 216.02 | 38.66 | 13.07 | 1.93 | 32.15 | 21.51 | 46.00 | -24.49 | QP | H |
| 238.31 | 38.27 | 13.99 | 2.06 | 32.16 | 22.16 | 46.00 | -23.84 | QP | H |
| 400.43 | 44.21 | 17.10 | 2.85 | 31.89 | 32.27 | 46.00 | -13.73 | QP | H |
| | | | | | | | | | |
| 41.13 | 35.34 | 15.57 | 0.67 | 32.05 | 19.53 | 40.00 | -20.47 | QP | V |
| 54.84 | 36.17 | 15.02 | 0.82 | 31.95 | 20.06 | 40.00 | -19.94 | QP | V |
| 96.10 | 36.19 | 14.90 | 1.16 | 31.75 | 20.50 | 43.50 | -23.00 | QP | V |
| 167.82 | 39.76 | 10.90 | 1.67 | 32.04 | 20.29 | 43.50 | -23.21 | QP | V |
| 400.43 | 41.64 | 17.10 | 2.85 | 31.89 | 29.70 | 46.00 | -16.30 | QP | V |
| 432.55 | 41.31 | 17.53 | 3.01 | 31.78 | 30.07 | 46.00 | -15.93 | QP | V |
| | | | | | | | | | |

Emissions attenuated more than 20 dB below the permissible value are not reported.

FCC ID: 2ABAI-ZH01WB

Data (Above 1GHz to the tenth Harmonic, Average):

Mode: 802.11 N40

CH Low(2422MHz)

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark | Direction (H/V) |
|--|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|---------|-----------------|
| 2100 | 30.20 | 27.43 | 3.27 | 31.90 | 29.00 | 54 | -25.00 | Average | H |
| 2390 | 31.56 | 27.76 | 3.33 | 30.10 | 32.55 | 54 | -21.45 | Average | H |
| 2400 | 35.21 | 27.76 | 3.37 | 30.10 | 36.24 | 54 | -17.76 | Average | H |
| 2422 | 83.34 | 27.56 | 3.38 | 30.06 | 84.22 | 94 | -9.78 | Average | H |
| 4844 | 29.56 | 31.77 | 5.35 | 24.10 | 42.58 | 54 | -11.42 | Average | H |
| | | | | | | | | | |
| 2100 | 30.43 | 27.43 | 3.27 | 31.90 | 29.23 | 54 | -24.77 | Average | V |
| 2390 | 31.88 | 27.76 | 3.33 | 30.10 | 32.87 | 54 | -21.13 | Average | V |
| 2400 | 35.40 | 27.76 | 3.37 | 30.10 | 36.43 | 54 | -17.57 | Average | V |
| 2422 | 84.86 | 27.56 | 3.38 | 30.06 | 85.74 | 94 | -8.26 | Average | V |
| 4844 | 31.04 | 31.77 | 5.35 | 24.10 | 44.06 | 54 | -9.94 | Average | V |
| | | | | | | | | | |
| Note: The 3 th -10 th harmonic and other values more than 20dB below limit are not reported. | | | | | | | | | |

CH Middle(2437MHz)

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark | Direction (H/V) |
|--|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|---------|-----------------|
| 2437 | 83.64 | 27.48 | 3.43 | 29.99 | 84.56 | 94 | -9.44 | Average | H |
| 4874 | 30.87 | 31.85 | 5.40 | 24.01 | 44.11 | 54 | -9.89 | Average | H |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 2437 | 84.21 | 27.48 | 3.43 | 29.99 | 85.13 | 94 | -8.87 | Average | V |
| 4874 | 31.16 | 31.85 | 5.40 | 24.01 | 44.40 | 54 | -9.60 | Average | V |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| Note: The 3 th -10 th harmonic and other values more than 20dB below limit are not reported. | | | | | | | | | |

CH High(2452MHz)

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark | Direction (H/V) |
|--|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|---------|-----------------|
| 2452 | 85.94 | 27.48 | 3.45 | 29.98 | 86.89 | 94 | -7.11 | Average | H |
| 2483.5 | 32.06 | 27.87 | 3.49 | 29.93 | 33.49 | 54 | -20.51 | Average | H |
| 2500 | 31.10 | 27.92 | 3.52 | 30.68 | 31.86 | 54 | -22.14 | Average | H |
| 4904 | 30.09 | 31.90 | 5.44 | 23.95 | 43.48 | 54 | -10.52 | Average | H |
| | | | | | | | | | |
| 2452 | 86.46 | 27.48 | 3.45 | 29.98 | 87.41 | 94 | -6.59 | Average | V |
| 2483.5 | 32.94 | 27.87 | 3.49 | 29.93 | 34.37 | 54 | -19.63 | Average | V |
| 2500 | 31.11 | 27.92 | 3.52 | 30.68 | 31.87 | 54 | -22.13 | Average | V |
| 4904 | 31.27 | 31.90 | 5.44 | 23.95 | 44.66 | 54 | -9.34 | Average | V |
| | | | | | | | | | |
| Note: The 3 th -10 th harmonic and other values more than 20dB below limit are not reported. | | | | | | | | | |

Note: 1, Emissions attenuated more than 20 dB below the permissible value are not reported.
2, The final scans only performed on the worst mode (802.11 N40)

FCC ID: 2ABAI-ZH01WB

Data (Above 1GHz to the tenth Harmonic, Peak):

Mode: 802.11 N40

CH Low(2422MHz)

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark | Direction (H/V) |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------|-----------------|
| 2100 | 42.56 | 27.43 | 3.27 | 31.90 | 41.36 | 74 | -32.64 | Peak | H |
| 2390 | 43.85 | 27.76 | 3.33 | 30.10 | 44.84 | 74 | -29.16 | Peak | H |
| 2400 | 47.03 | 27.76 | 3.37 | 30.10 | 48.06 | 74 | -25.94 | Peak | H |
| 2422 | 95.36 | 27.56 | 3.38 | 30.06 | 96.24 | 114 | -17.76 | Peak | H |
| 4844 | 42.21 | 31.77 | 5.35 | 24.10 | 55.23 | 74 | -18.77 | Peak | H |
| | | | | | | | | | |
| 2100 | 42.62 | 27.43 | 3.27 | 31.90 | 41.42 | 74 | -32.58 | Peak | V |
| 2390 | 43.42 | 27.76 | 3.33 | 30.10 | 44.41 | 74 | -29.59 | Peak | V |
| 2400 | 48.96 | 27.76 | 3.37 | 30.10 | 49.99 | 74 | -24.01 | Peak | V |
| 2422 | 96.21 | 27.56 | 3.38 | 30.06 | 97.09 | 114 | -16.91 | Peak | V |
| 4844 | 42.65 | 31.77 | 5.35 | 24.10 | 55.67 | 74 | -18.33 | Peak | V |
| | | | | | | | | | |

Note: The 3th-10th harmonic and other values more than 20dB below limit are not reported.**CH Middle(2437MHz)**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark | Direction (H/V) |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------|-----------------|
| 2437 | 96.54 | 27.48 | 3.43 | 29.99 | 97.46 | 114 | -16.54 | Peak | H |
| 4874 | 40.74 | 31.85 | 5.40 | 24.01 | 53.98 | 74 | -20.02 | Peak | H |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| 2437 | 97.13 | 27.48 | 3.43 | 29.99 | 98.05 | 114 | -15.95 | Peak | V |
| 4874 | 42.64 | 31.85 | 5.40 | 24.01 | 55.88 | 74 | -18.12 | Peak | V |
| | | | | | | | | | |
| | | | | | | | | | |

Note: The 3th-10th harmonic and other values more than 20dB below limit are not reported.**CH High(2452MHz)**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark | Direction (H/V) |
|-----------------|-------------------|-----------------------|-----------------|--------------------------|----------------|---------------------|-----------------|--------|-----------------|
| 2452 | 99.23 | 27.48 | 3.45 | 29.98 | 100.18 | 114 | -13.82 | Peak | H |
| 2483.5 | 45.35 | 27.87 | 3.49 | 29.93 | 46.78 | 74 | -27.22 | Peak | H |
| 2500 | 44.20 | 27.92 | 3.52 | 30.68 | 44.96 | 74 | -29.04 | Peak | H |
| 4904 | 46.57 | 31.90 | 5.44 | 23.95 | 59.96 | 74 | -14.04 | Peak | H |
| | | | | | | | | | |
| 2452 | 101.04 | 27.48 | 3.45 | 29.98 | 101.99 | 114 | -12.01 | Peak | V |
| 2483.5 | 47.16 | 27.87 | 3.49 | 29.93 | 48.59 | 74 | -25.41 | Peak | V |
| 2500 | 44.90 | 27.92 | 3.52 | 30.68 | 45.66 | 74 | -28.34 | Peak | V |
| 4904 | 47.78 | 31.90 | 5.44 | 23.95 | 61.17 | 74 | -12.83 | Peak | V |
| | | | | | | | | | |

Note: The 3th-10th harmonic and other values more than 20dB below limit are not reported.

Note: 1, Emissions attenuated more than 20 dB below the permissible value are not reported.
2, The final scans only performed on the worst mode (802.11 N40)