802.11n HT20

Conducted band-edge / Low ch.

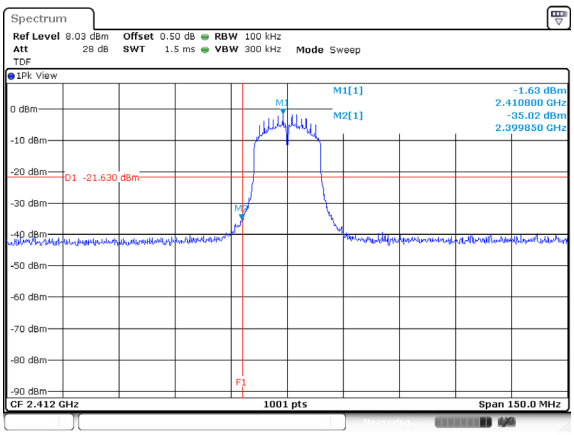

Conducted spurious / Low ch.

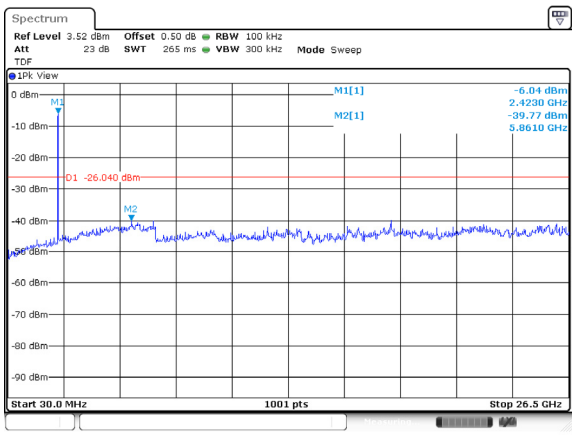

Conducted spurious / Mid ch.

Blank

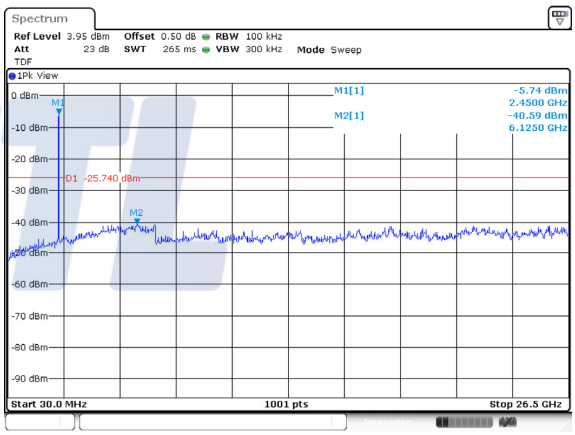

Conducted band-edge / High ch.

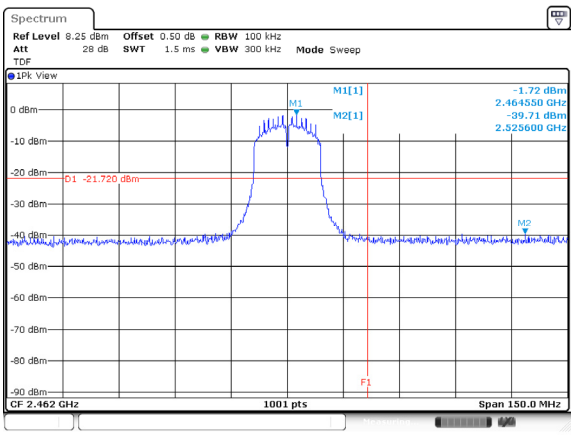

Conducted spurious / High ch.

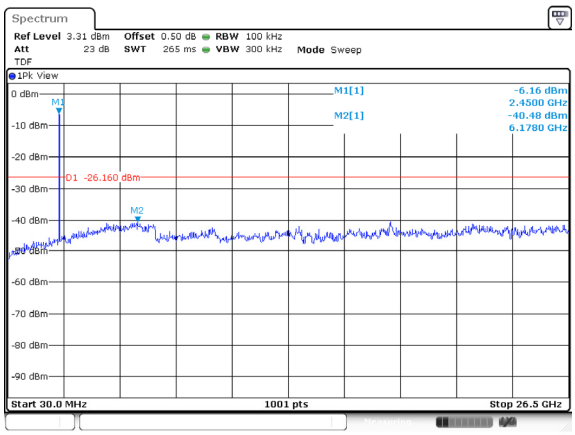

7.6. AC Conducted emission

Test setup

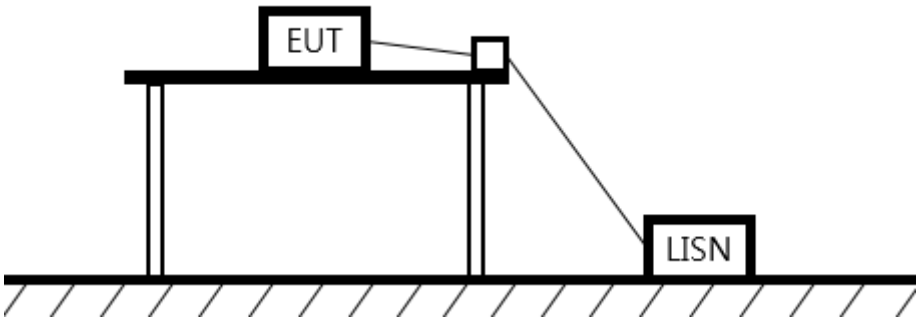

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 ㎑ to 30 ㎒, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (㎒)	Conducted limit (dB㎶/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 ㎝ in which is located 40 ㎝ away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50Ω/50μH LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 ㎒ to 30 ㎒.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 ㎑ or to quasi-peak and average within a bandwidth of 9 ㎑. The EUT was in transmitting mode during the measurements.

Test results

Worst case: 802.11g Highest frequency

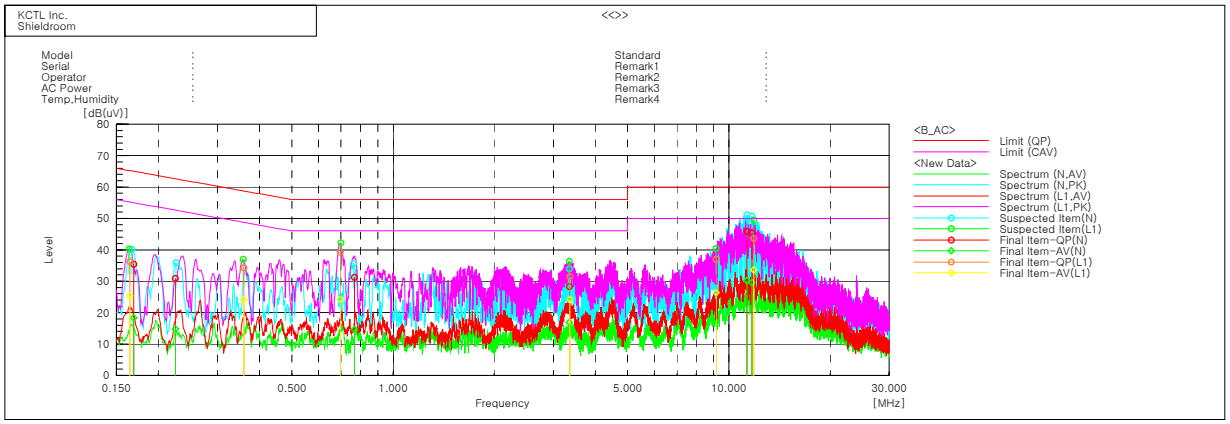

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16915	25.3	8.3	10.1	35.4	18.4	65.0	55.0	29.6	36.6
2	0.22481	21.2	5.2	9.7	30.9	14.9	62.6	52.6	31.7	37.7
3	0.76734	21.4	4.8	9.8	31.2	14.6	56.0	46.0	24.8	31.4
4	3.35224	18.7	7.3	9.6	28.3	16.9	56.0	46.0	27.7	29.1
5	11.32096	36.0	20.3	9.9	45.9	30.2	60.0	50.0	14.1	19.8
6	11.72796	35.5	19.7	9.9	45.4	29.6	60.0	50.0	14.6	20.4

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.16456	26.1	15.3	10.1	36.2	25.4	65.2	55.2	29.0	29.8
2	0.35934	24.5	14.3	9.8	34.3	24.1	58.7	48.7	24.4	24.6
3	0.69562	29.4	14.4	9.8	39.2	24.2	56.0	46.0	16.8	21.8
4	3.35532	21.8	14.6	9.6	31.4	24.2	56.0	46.0	24.6	21.8
5	9.16695	27.2	16.6	9.8	37.0	26.4	60.0	50.0	23.0	23.6
6	11.8588	33.7	23.7	9.9	43.6	33.6	60.0	50.0	16.4	16.4

8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R & S	FSV30	100807	20.07.30
Spectrum Analyzer	R & S	FSV40	100988	21.01.03
DC Power Supply	AGILENT	E3632A	MY40008800	20.07.30
Attenuator	API Inmet	40AH2W-10	15	20.05.15
EMI TEST RECEIVER	R & S	ESCI	100732	20.08.22
Bi-Log Antenna	SCHWARZBECK	VULB 9168	583	20.05.04
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3116	00086635	20.05.09
Horn antenna	ETS.lindgren	3117	161225	20.05.22
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800-22-10P	2031196	20.02.21
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000997	20.08.01
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
LOOP Antenna	R & S	HFH2-Z2	100355	20.08.24
Highpass Filter	WT	WT-A1698-HS	WT160411001	20.05.14
TWO-LINE V - NETWORK	R & S	ENV216	101584	20.04.05
EMI TEST RECEIVER	R & S	ESCI	101408	20.02.22
Signal Generator	R & S	SMB100A	176206	21.01.21
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-

End of test report