

# FCC TEST REPORT

for

**Dongguan Lingjie Electronics Co., Ltd.**

Wireless gaming mouse

Model Number: C60, EDGE 2.0

FCC ID: 2AC3KC60

Prepared for : Dongguan Lingjie Electronics Co., Ltd.  
Address : No. A4-201 Hongye North Road 99, Tangxia Lin village,  
Dongguan 523711 P.R.C.

Prepared by : Keyway Testing Technology Co., Ltd.  
Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China




Tel: 86-769-8718 2258  
Fax: 86-769-8718 1058

Report No. : 16KWE013449F  
Date of Test : Jan. 08~12, 2016  
Date of Report : Jan. 13, 2016

## TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY .....	4
2. GENERAL PRODUCT INFORMATION .....	5
2.1. Product Function.....	5
2.2. Description of Device (EUT) .....	5
2.3. Independent Operation Modes .....	5
2.4. Channel List.....	5
2.5. Test Supporting System .....	6
2.6. TEST SITES .....	6
2.7. List of Test and Measurement Instruments .....	7
3. TEST SET-UP AND OPERATION MODES .....	8
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software .....	8
3.4. Special Accessories and Auxiliary Equipment.....	8
3.5. Countermeasures to Achieve EMC Compliance .....	8
4. EMISSION TEST RESULTS.....	9
4.1. Conducted Emission at the Mains Terminals Test.....	9
4.2. Radiated Emission Test.....	14
5. BANDWIDTH TEST .....	21
5.1. TEST PROCEDURE .....	21
5.2. Test setup .....	21
6. BAND EDGE COMPLIANCE TEST .....	24
6.1. Limits .....	24
6.2. Test setup .....	24
7. ANTENNA REQUIREMENTS.....	26
7.1. Limits .....	26
7.2. Result .....	26
8. PHOTOGRAPHS OF TEST SET-UP .....	27
9. PHOTOGRAPHS OF THE EUT .....	29

# Keyway Testing Technology Co., Ltd.

<b>Applicant:</b>	Dongguan Lingjie Electronics Co., Ltd.		
<b>Address:</b>	No. A4-201 Hongye North Road 99, Tangxia Lin village, Dongguan 523711 P.R.C.		
<b>Manufacturer:</b>	Dongguan Lingjie Electronics Co., Ltd.		
<b>Address:</b>	No. A4-201 Hongye North Road 99, Tangxia Lin village, Dongguan 523711 P.R.C.		
<b>E.U.T:</b>	Wireless gaming mouse		
<b>Model Number:</b>	C60, EDGE 2.0		
<b>Trade Name:</b>	ID or 富德	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Jan. 07, 2016	<b>Date of Test:</b>	Jan. 08~12, 2016
<b>Test Specification:</b>	FCC Part 15, Subpart C Section 15.249: 2015 ANSI C63.10-2013		
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.		
<b>Issue Date: Jan. 13, 2016</b>			
Tested by:	Reviewed by:	Approved by:	
			
Keven Wu / Engineer	Mike Xu / Supervisor	Andy Gao / Supervisor	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

## 1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a)/15.209/15.249(d)	PASS
20dB&99% Bandwidth	15.249	PASS
Emissions from out of band	15.249	PASS
Antenna Requirement	15.203	PASS

## 2. GENERAL PRODUCT INFORMATION

### 2.1. Product Function

Refer to Technical Construction Form and User Manual.

### 2.2. Description of Device (EUT)

Product Name:	Wireless gaming mouse
Model No.:	C60
Serial Model :	EDGE 2.0
Model Difference	All the models are the same circuit and RF module, except the model names and colours.
Operation Frequency:	2408MHz-2474MHz
Channel numbers:	34
Modulation technology:	FSK
Data speed (IEEE 802.11b):	1Mbps
Antenna Type:	PCB
Antenna gain:	-4.26dBi
Power supply:	DC 3.7V from battery

### 2.3. Independent Operation Modes

The basic operation modes are:

Test Mode	Frequency
Mode1	2408MHz
Mode2	2440MHz
Mode3	2474MHz
Mode4	Link Mode

### 2.4. Channel List

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2408MHz	10	2426MHz	19	2444MHz	28	2462MHz
2	2410MHz	11	2428MHz	20	2446MHz	29	2464MHz
3	2412MHz	12	2430MHz	21	2448MHz	30	2466MHz
4	2414MHz	13	2432MHz	22	2450MHz	31	2468MHz
5	2416MHz	14	2434MHz	23	2452MHz	32	2470MHz
6	2418MHz	15	2436MHz	24	2454MHz	33	2472MHz
7	2420MHz	16	2438MHz	25	2456MHz	34	2474MHz
8	2422MHz	17	2440MHz	26	2458MHz		
9	2424MHz	18	2442MHz	27	2460MHz		

## 2.5. Test Supporting System

Adapter:	Manufacturer: Cenique Infotainment Group Limited I/P: AC 100~240V 50/60Hz 0.15A O/P: DC 5V ,500mA DC Line: Unshielded, detachable 1.2m
----------	---

## 2.6. TEST SITES

Lab Qualifications : 944 Shielded Room built by ETS-Lindgren, USA  
Date of completion: March 28, 2011

966 Chamber built by ETS-Lindgren, USA  
Date of completion: March 28, 2011

Certificated by TUV Rheinland, Germany.  
Registration No.: UA 50207153  
Date of registration: July 13, 2011

Certificated by UL, USA  
Registration No.: 100567-237  
Date of registration: December 1, 2011

Certificated by Intertek  
Registration No.: 2011-RTL-L1-31  
Date of registration: October 11, 2011

Certificated by Industry Canada  
Registration No.: 9868A  
Date of registration: December 8, 2011

Certificated by FCC, USA  
Registration No.: 370994  
Date of registration: February 21, 2012

Certificated by CNAS China  
Registration No.: CNAS L5783  
Date of registration: August 8, 2012

Name of Firm : Keyway Testing Technology Co., Ltd.

Site Location : Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China

## 2.7. List of Test and Measurement Instruments

### 2.7.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,15	Apr. 27,16
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,15	Apr. 27,16
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,15	Apr. 27,16

### 2.7.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
System Simulator	Agilent	E5515C	GB43130245	Apr. 27,15	Apr. 27,16
Power Splitter	Weinschel	1506A	NW425	Apr. 27,15	Apr. 27,16
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	R&S	FSV40	132.1.3008K39-100967	Apr. 27,15	Apr. 27,16
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 27,15	Apr. 27,16
Signal Amplifier	SONOMA	310	187016	Apr. 27,15	Apr. 27,16
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,15	Apr. 27,16
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 27,15	Apr. 27,16
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 27,15	Apr. 27,16
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,15	Apr. 27,16
High Pass filter	Micro	HPM50111	324216	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 27,15	Apr. 27,16
DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,15	Apr. 27,16
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,15	Apr. 27,16
Universal radio communication tester	Rohde&Schwarz	CMU200	3215420	Apr. 27,15	Apr. 27,16
Splitter	Agilent	11636B	0025164	Apr. 27,15	Apr. 27,16
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 22,15	Apr. 22,16


### 3. TEST SET-UP AND OPERATION MODES

#### 3.1. Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

#### 3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



*(EUT: Wireless gaming mouse)*

#### 3.3. Test Operation Mode and Test Software

None.

#### 3.4. Special Accessories and Auxiliary Equipment

None.

#### 3.5. Countermeasures to Achieve EMC Compliance

None.



## 4. EMISSION TEST RESULTS

### 4.1. Conducted Emission at the Mains Terminals Test

#### 4.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### 4.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.


The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

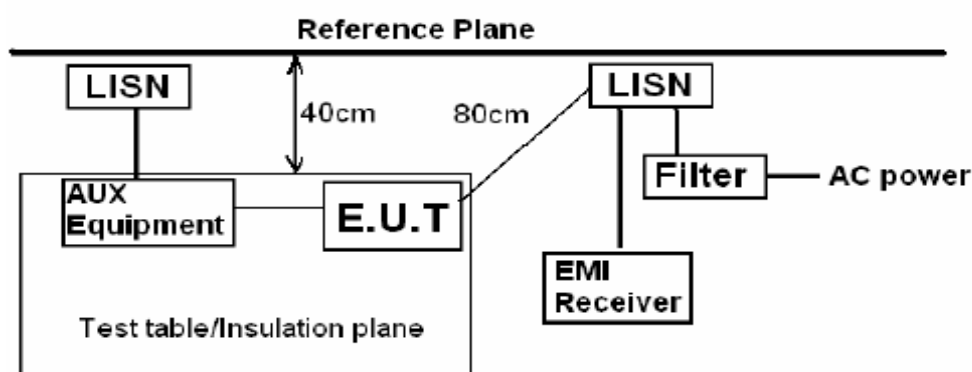


*Remark:*  
*E.U.T: Equipment Under Test*  
*LISN: Line Impedance Stabilization Network*  
*Test table height=0.8m*

EUT :	Wireless gaming mouse	Model Name :	C60
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

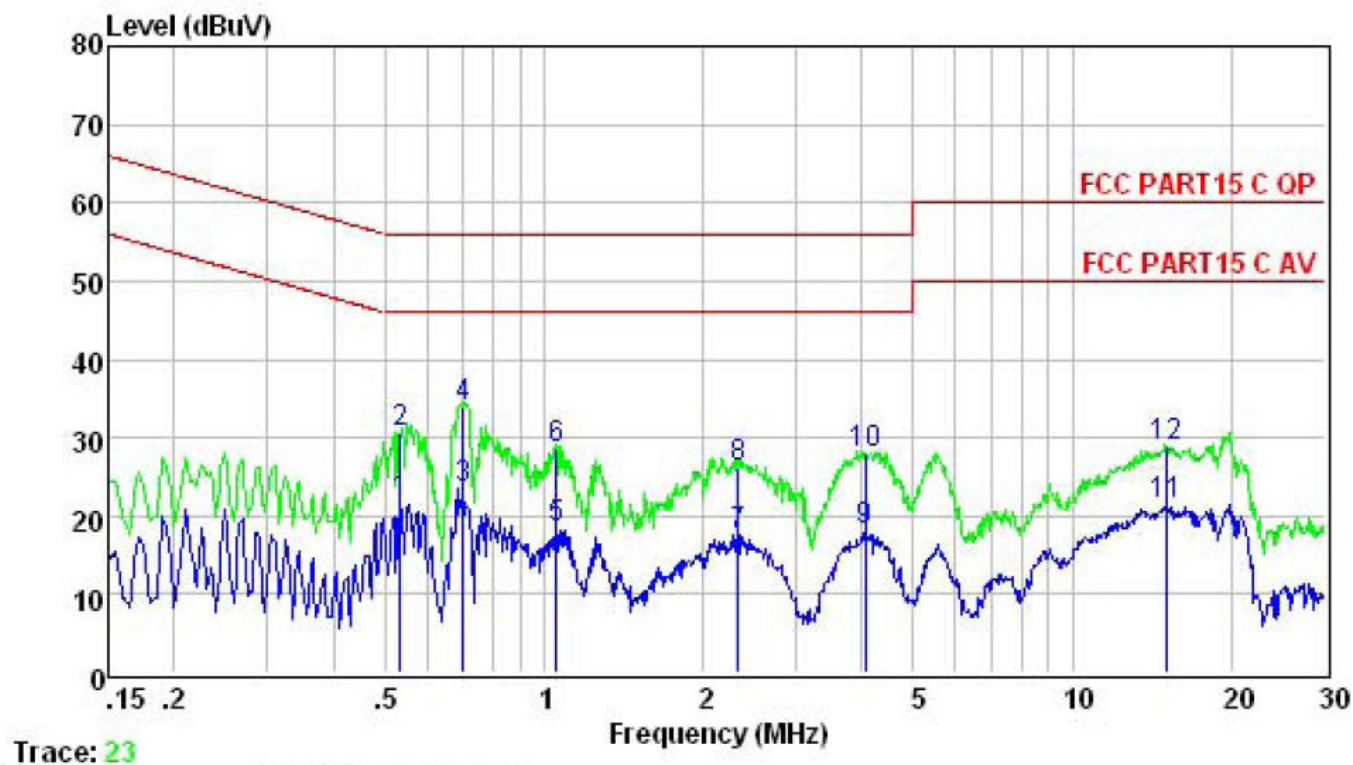


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.535	21.66	56.00	-34.34	Average
2	0.535	30.59	56.00	-25.41	QP
3	0.705	23.47	56.00	-32.53	Average
4	0.705	34.03	56.00	-21.97	QP
5	1.054	18.44	56.00	-37.56	Average
6	1.054	28.69	56.00	-27.31	QP
7	2.334	17.61	56.00	-38.39	Average
8	2.334	26.19	56.00	-29.81	QP
9	4.049	18.04	56.00	-37.96	Average
10	4.049	28.09	56.00	-27.91	QP
11	15.066	21.49	60.00	-38.51	Average
12	15.066	28.94	60.00	-31.06	QP

EUT :	Wireless gaming mouse	Model Name :	C60
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC120V/60Hz	Test Mode :	Mode 4

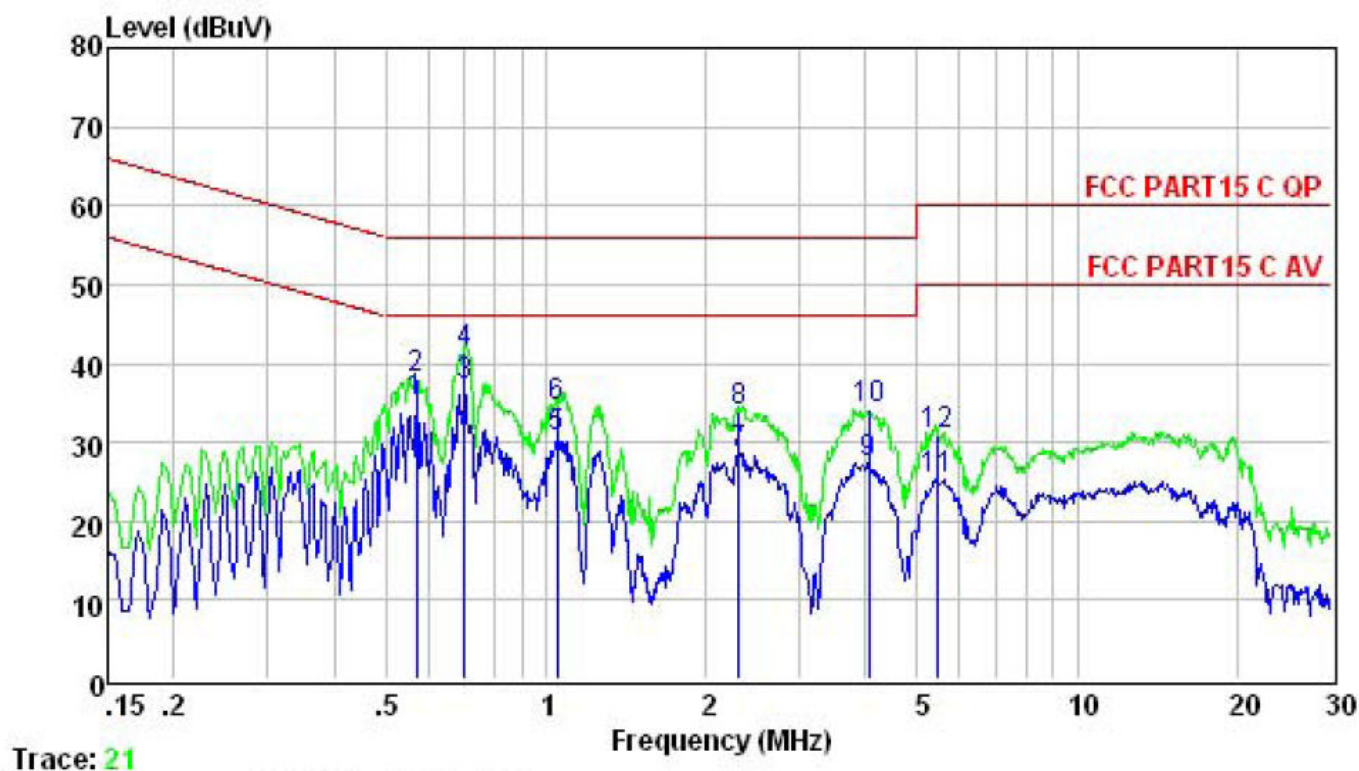

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.570	35.03	56.00	-20.97	Average
2	0.570	38.02	56.00	-17.98	QP
3	0.705	37.22	56.00	-18.78	Average
4	0.705	41.26	56.00	-14.74	QP
5	1.049	30.50	56.00	-25.50	Average
6	1.049	34.52	56.00	-21.48	QP
7	2.309	28.53	56.00	-27.47	Average
8	2.309	34.03	56.00	-21.97	QP
9	4.049	27.49	56.00	-28.51	Average
10	4.049	34.19	56.00	-21.81	QP
11	5.447	25.37	60.00	-34.63	Average
12	5.447	31.06	60.00	-28.94	QP


EUT :	Wireless gaming mouse	Model Name :	C60
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from adapter AC 240V/60Hz	Test Mode :	Mode 4

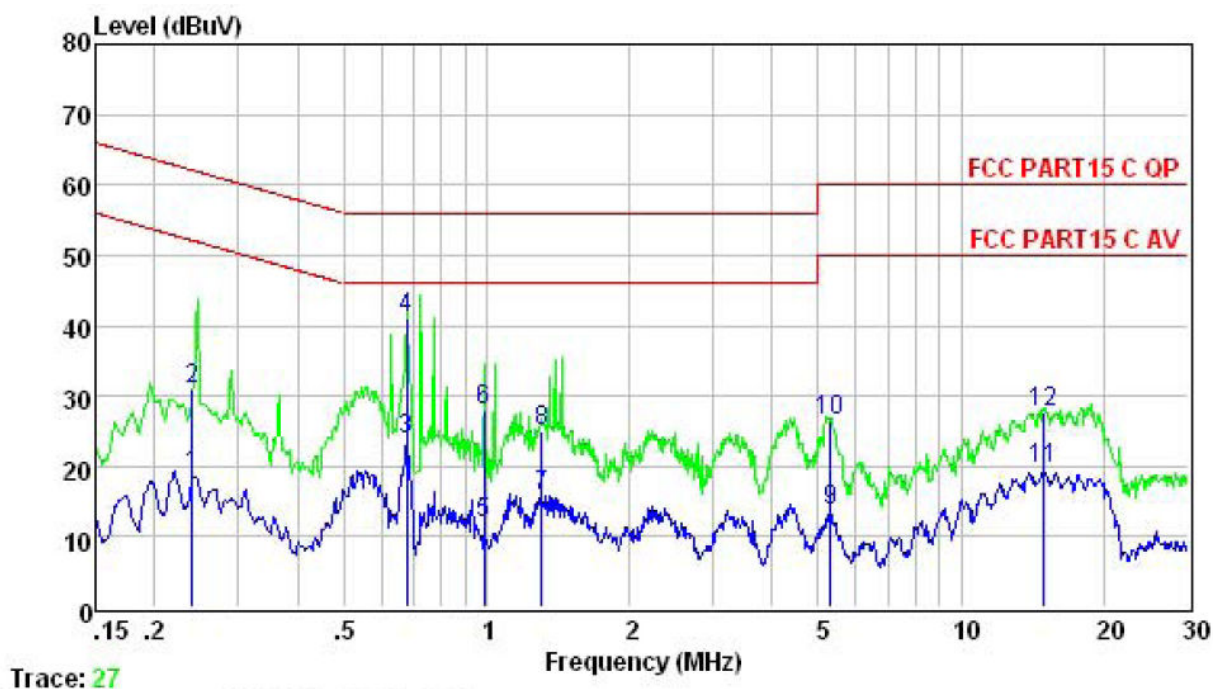

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.240	18.65	62.08	-43.43	Average
2	0.240	30.96	62.08	-31.12	QP
3	0.679	23.81	56.00	-32.19	Average
4	0.679	41.09	56.00	-14.91	QP
5	0.989	11.78	56.00	-44.22	Average
6	0.989	28.03	56.00	-27.97	QP
7	1.310	15.78	56.00	-40.22	Average
8	1.310	24.96	56.00	-31.04	QP
9	5.305	13.58	60.00	-46.42	Average
10	5.305	26.42	60.00	-33.58	QP
11	14.907	19.52	60.00	-40.48	Average
12	14.907	27.53	60.00	-32.47	QP



EUT :	Wireless gaming mouse	Model Name :	C60
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from adapter AC 240V/60Hz	Test Mode :	Mode 4

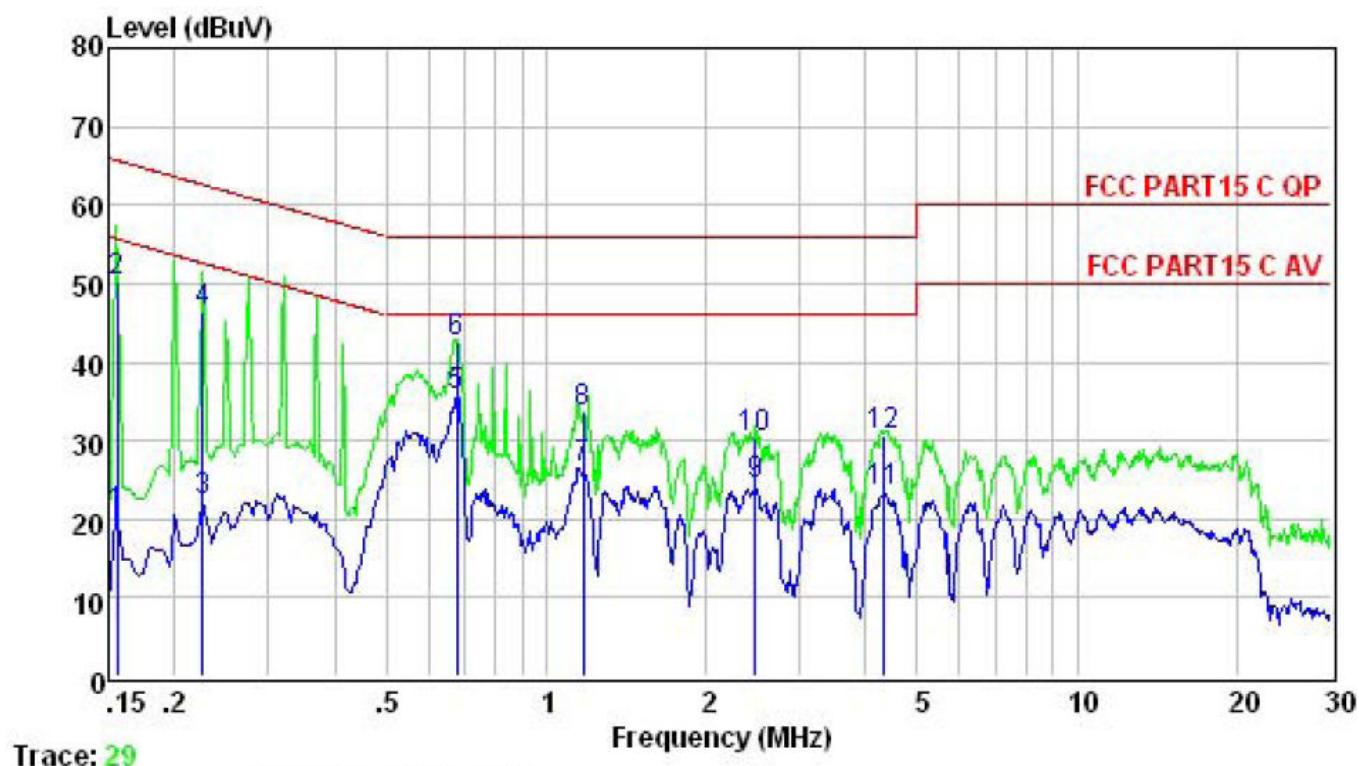

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.156	20.45	65.69	-45.24	Average
2	0.156	50.35	65.69	-15.34	QP
3	0.226	22.21	62.61	-40.40	Average
4	0.226	46.39	62.61	-16.22	QP
5	0.679	35.72	56.00	-20.28	Average
6	0.679	42.59	56.00	-13.41	QP
7	1.172	26.56	56.00	-29.44	Average
8	1.172	33.47	56.00	-22.53	QP
9	2.474	24.31	56.00	-31.69	Average
10	2.474	30.26	56.00	-25.74	Peak
11	4.338	23.37	56.00	-32.63	Average
12	4.338	30.65	56.00	-25.35	QP

## 4.2. Radiated Emission Test

### 4.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

### 4.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m (above 1GHz, the table was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz.

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.


2. Measurement Uncertainty:  $\pm 3.2$  dB at a level of confidence of 95%.

3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.

5. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).


## Radiated Emission Test-Up Frequency Below 30MHz

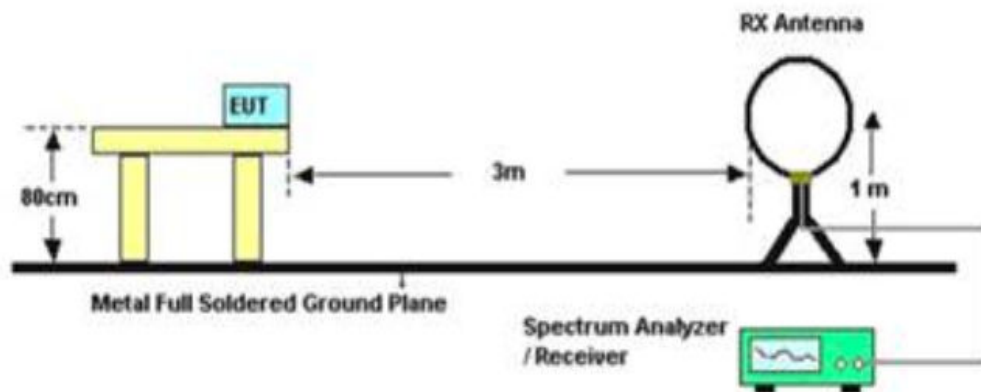

## 30MHz- 1GHz

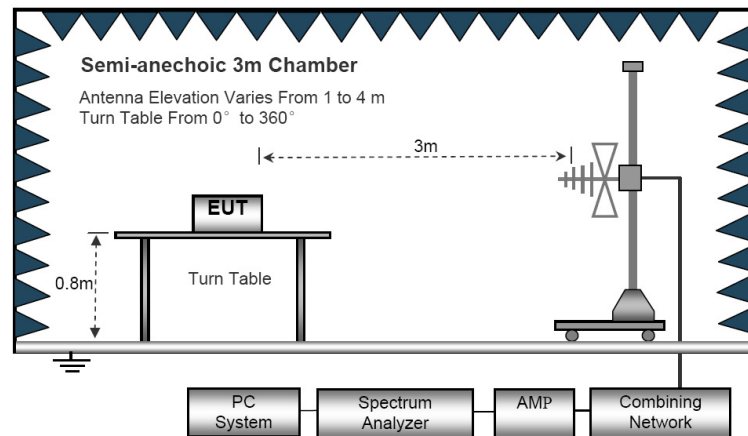

## Above 1GHz

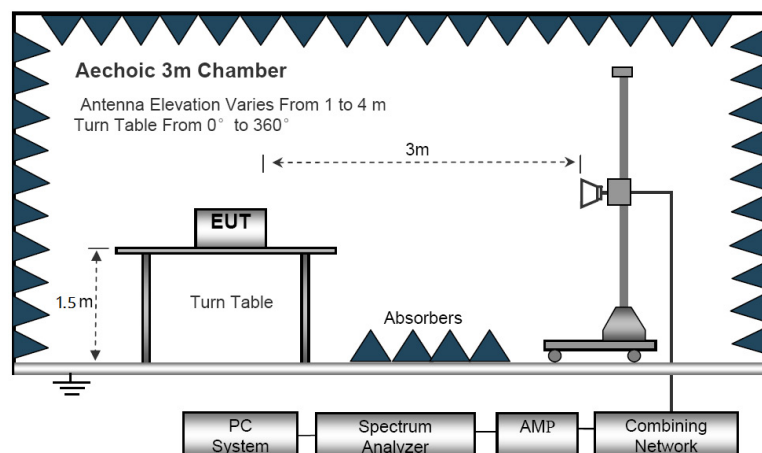



**Below 30MHz**

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	<b>P</b>
--	--	--	--	<b>P</b>


**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);


Limit line = specific limits(dBuV) + distance extrapolation factor.

Below 1GHz  
Horizontal

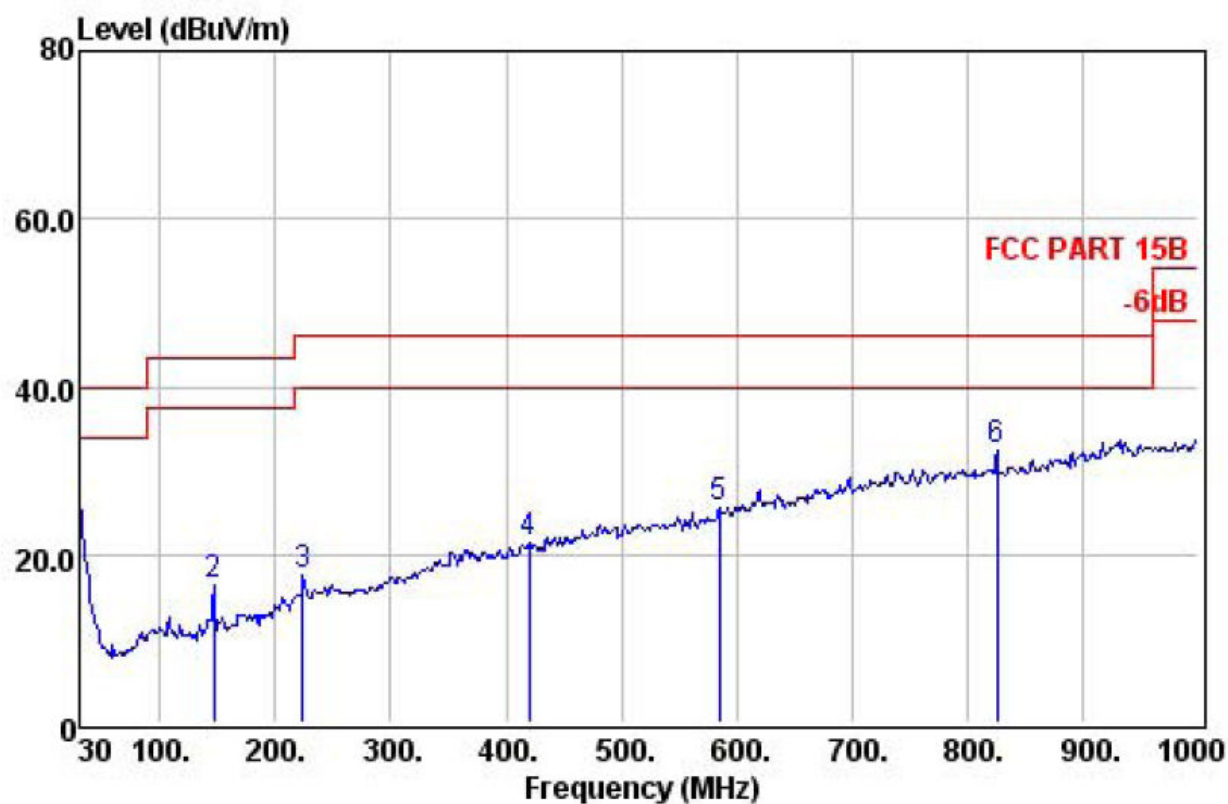

	Freq	Preamp	Read	Cable	Level	Limit	Over	Remark
	MHz	Factor	Level	Loss	Level	Line	Limit	
		dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	40.15	0.56	28.10	40.00	-11.90	QP
2	146.40	31.23	37.67	1.22	16.44	43.50	-27.06	QP
3	224.00	30.95	34.72	1.53	17.45	46.00	-28.55	QP
4	419.94	30.63	32.62	2.48	21.41	46.00	-24.59	QP
5	584.84	30.73	32.92	3.20	25.50	46.00	-20.50	QP
6	825.40	30.47	35.42	4.49	32.54	46.00	-13.46	QP

Vertical

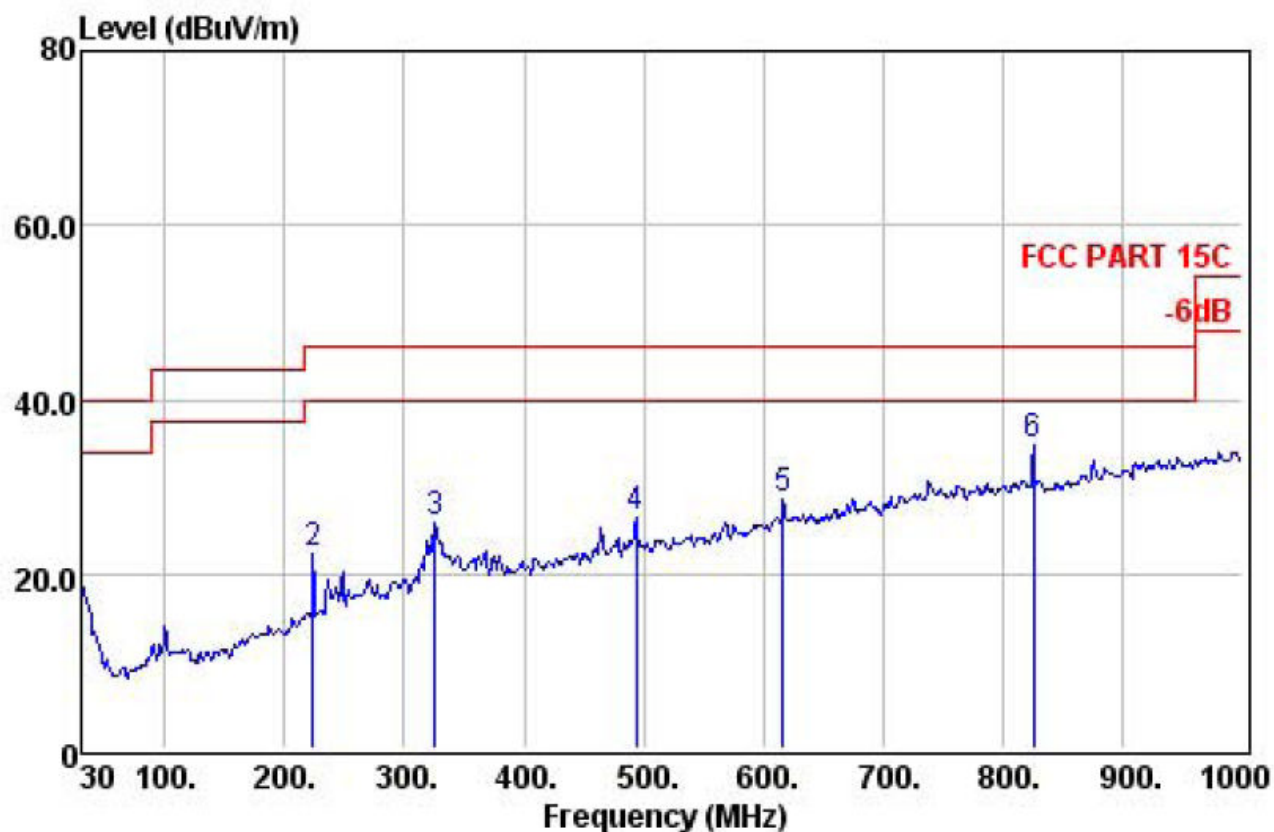

	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	32.99	0.56	20.94	40.00	-19.06	QP
2	224.00	30.95	39.50	1.53	22.23	46.00	-23.77	QP
3	325.85	30.81	40.24	2.02	25.98	46.00	-20.02	QP
4	493.66	30.59	35.68	2.77	26.46	46.00	-19.54	QP
5	616.85	30.64	34.74	3.38	28.55	46.00	-17.45	QP
6	825.40	30.47	37.64	4.49	34.76	46.00	-11.24	QP

Mode 1 is the worst mode. only worst case is presented in the report

## Above 1GHz

Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Remark	Polar (H/V)
low channel(2408MHz)							
2408.000	78.33	13.02	91.35	114.00	-22.65	Pk	Vertical
2408.000	69.43	13.02	82.45	94.00	-11.55	AV	Vertical
4816.000	46.32	10.12	56.44	74.00	-17.56	Pk	Vertical
4816.000	35.16	10.12	45.28	54.00	-8.72	AV	Vertical
7224.000	44.98	12.05	57.03	74.00	-16.97	Pk	Vertical
7224.000	33.94	12.05	45.99	54.00	-8.01	AV	Vertical
2408.000	72.67	13.02	85.69	114.00	-28.31	Pk	Horizontal
2408.000	63.23	13.02	76.25	94.00	-17.75	AV	Horizontal
4816.000	46.98	10.12	57.1	74.00	-16.9	Pk	Horizontal
4816.000	35.12	10.12	45.24	54.00	-8.76	AV	Horizontal
7224.000	46.06	12.05	58.11	74.00	-15.89	Pk	Horizontal
7224.000	34.44	12.05	46.49	54.00	-7.51	AV	Horizontal
Middle channel(2440MHz)							
2440.000	77.59	12.96	90.55	114.00	-23.45	Pk	Vertical
2440.000	68.54	12.96	81.5	94.00	-12.5	AV	Vertical
4880.000	53.34	10.42	63.76	74.00	-10.24	Pk	Vertical
4880.000	37.09	10.42	47.51	54.00	-6.49	AV	Vertical
7320.000	46.89	12.81	59.7	74.00	-14.3	Pk	Vertical
7320.000	35.08	12.81	47.89	54.00	-6.11	AV	Vertical
2440.000	71.54	12.96	84.5	114.00	-29.5	Pk	Horizontal
2440.000	62.97	12.96	75.93	94.00	-18.07	AV	Horizontal
4880.000	54.65	10.42	65.07	74.00	-8.93	Pk	Horizontal
4880.000	35.12	10.42	45.54	54.00	-8.46	AV	Horizontal
7320.000	48.15	12.81	60.96	74.00	-13.04	Pk	Horizontal
7320.000	36.86	12.81	49.67	54.00	-4.33	AV	Horizontal
High channel(2474MHz)							
2474.000	76.97	12.93	89.90	114.00	-24.1	Pk	Vertical
2474.000	68.23	12.93	81.16	94.00	-12.84	AV	Vertical
4948.000	48.23	10.48	58.71	74.00	-15.29	Pk	Vertical
4948.000	37.11	10.48	47.59	54.00	-6.41	AV	Vertical
7422.000	48.08	12.87	60.95	74.00	-13.05	Pk	Vertical
7422.000	37.75	12.87	50.62	54.00	-3.38	AV	Vertical
2474.000	71.45	12.93	84.38	114.00	-29.62	Pk	Horizontal
2474.000	62.56	12.93	75.49	94.00	-18.51	AV	Horizontal
4948.000	45.08	10.48	55.56	74.00	-18.44	Pk	Horizontal
4948.000	37.25	10.48	47.73	54.00	-6.27	AV	Horizontal
7422.000	48.06	12.87	60.93	74.00	-13.07	Pk	Horizontal
7422.000	36.11	12.87	48.98	54.00	-5.02	AV	Horizontal

**NOTE:**

Factor= Antenna Factor+cable loss-Preamplifier factor,

Corrected Amplitude=Reading+ Factor

Margin= Absolute Level – Limit

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

## 5. BANDWIDTH TEST

### 5.1. TEST PROCEDURE

- a. The EUT was directly connected to the spectru analyzer and antenna output port as show in the block diagram below.
- b.Spectrum Setting:RBW=100KHz, VBW  $\geq$  RBW , Sweep=Auto.



### 5.2. Test setup




Test data:

Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2408	2.224	2.146	Pass
2440	2.258	2.152	Pass
2474	2.257	2.159	Pass

Test plot as follows:

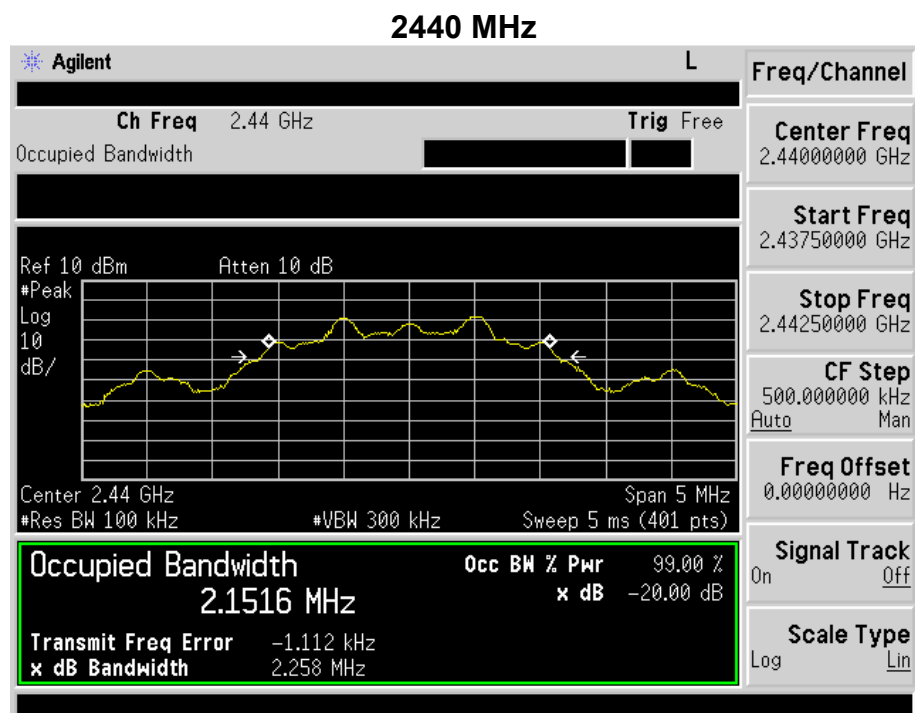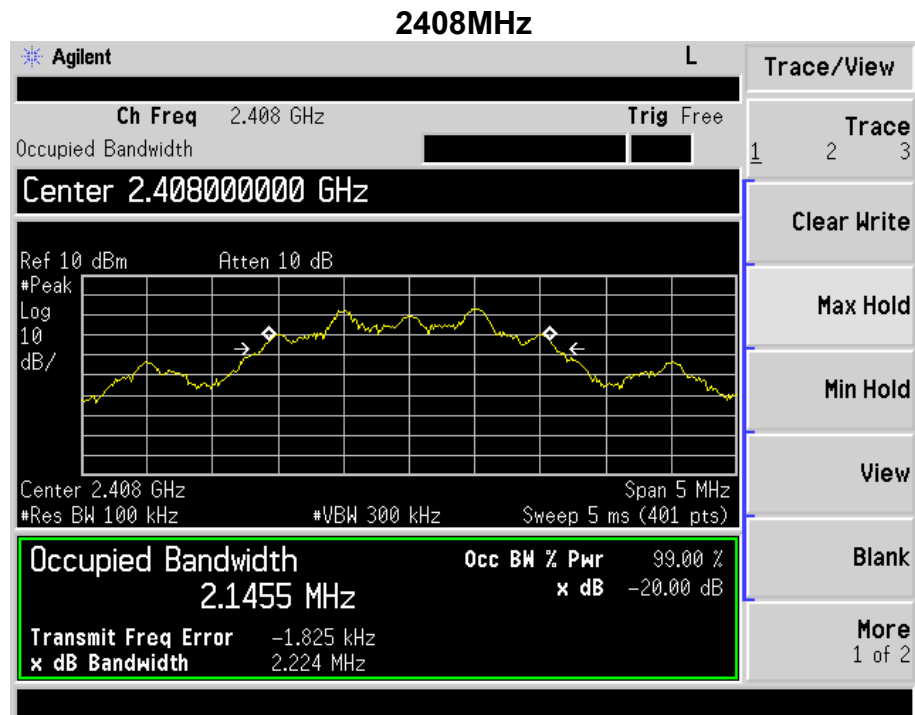

## 2474 MHz

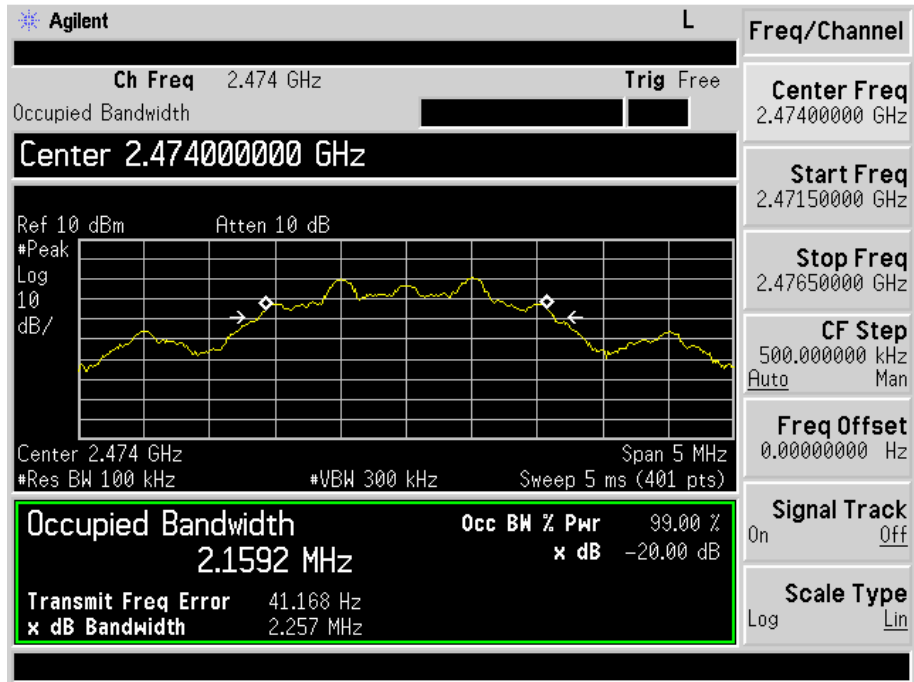

## 6. BAND EDGE COMPLIANCE TEST

### 6.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 6.2. Test setup

The EUT was placed on a turn table which was 1.5 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure. For all test, used peak detector.

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



For radiated test as follows:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
2390	36.23	13.06	49.29	74	-24.71	peak	Vertical
2390	36.12	13.06	49.18	74	-24.82	peak	Horizontal
2483.5	35.22	12.78	48.00	74	-26	peak	Vertical
2483.5	37.35	12.78	50.13	74	-23.87	peak	Horizontal
hopping							
2390	37.87	13.06	50.93	74	-23.07	peak	Vertical
2390	36.94	13.06	50.00	74	-24	peak	Horizontal
2483.5	36.12	12.78	48.90	74	-25.1	peak	Vertical
2483.5	37.54	12.78	50.32	74	-23.68	peak	Horizontal

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

## 7. ANTENNA REQUIREMENTS

### 7.1. Limits


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 7.2. Result


The antennas used for this product are permanent attached antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only -4.26dBi.

## 8. PHOTOGRAPHS OF TEST SET-UP

Conducted Emission

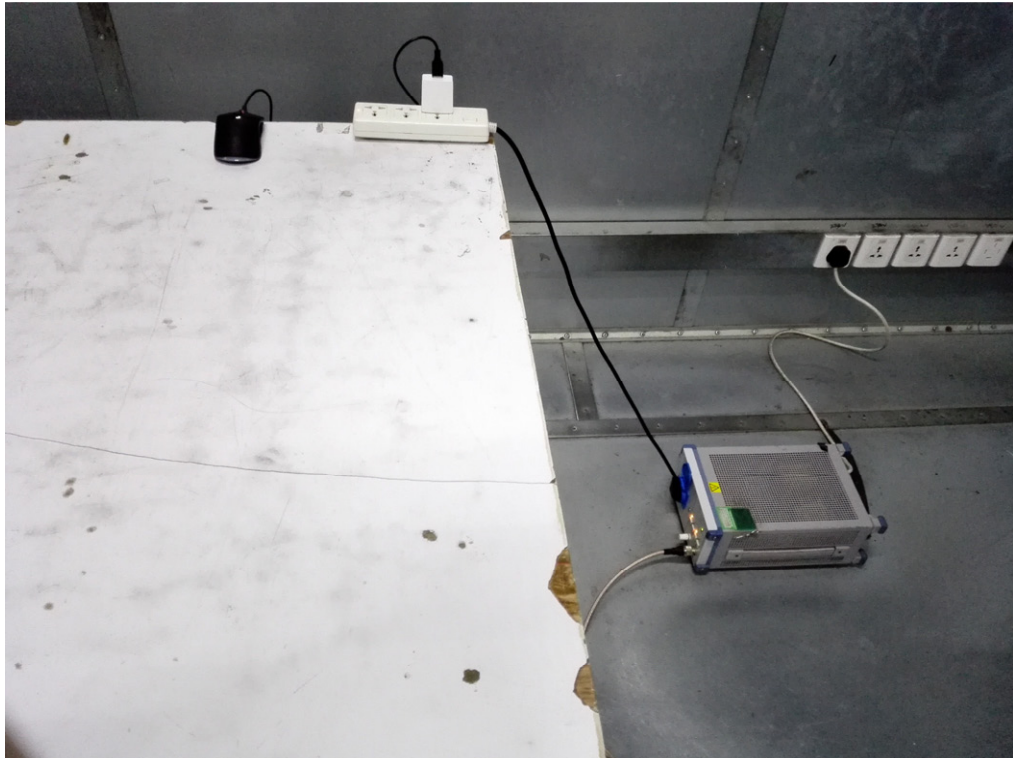

## Radiated Emission Test

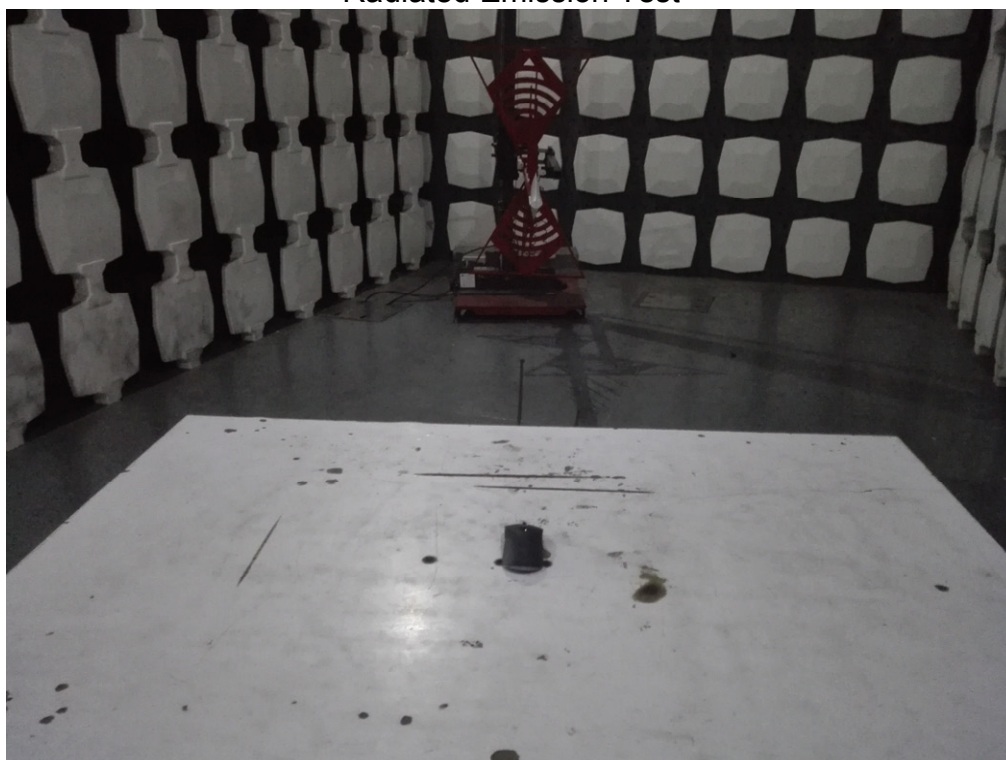

## 9. PHOTOGRAPHS OF THE EUT














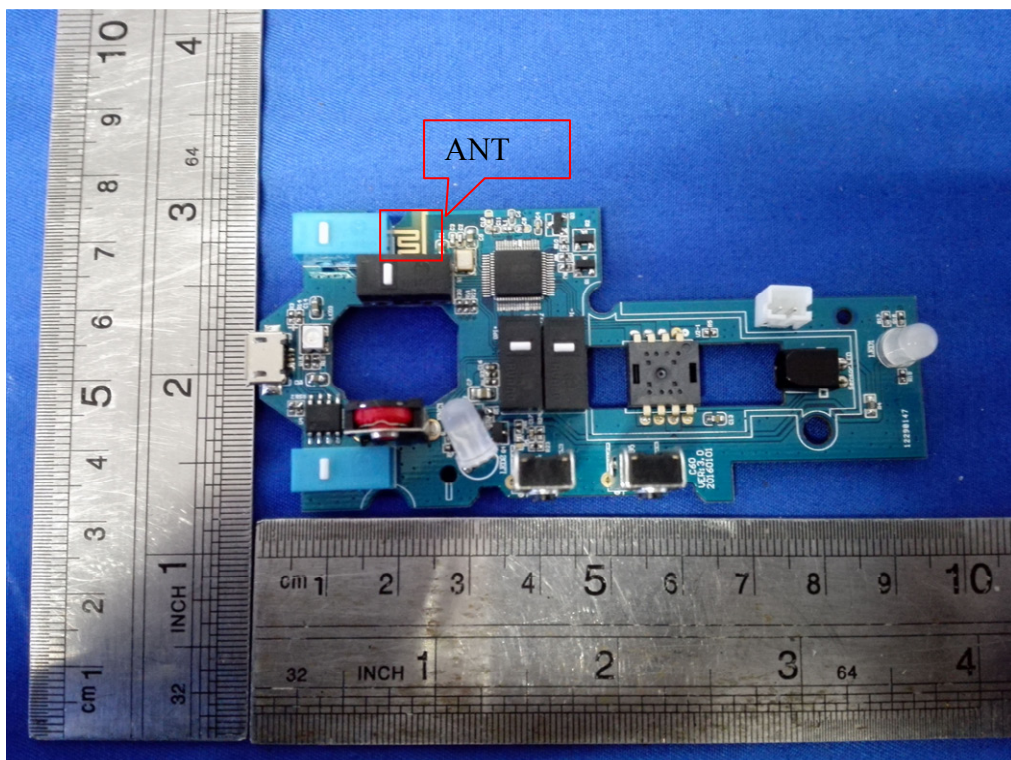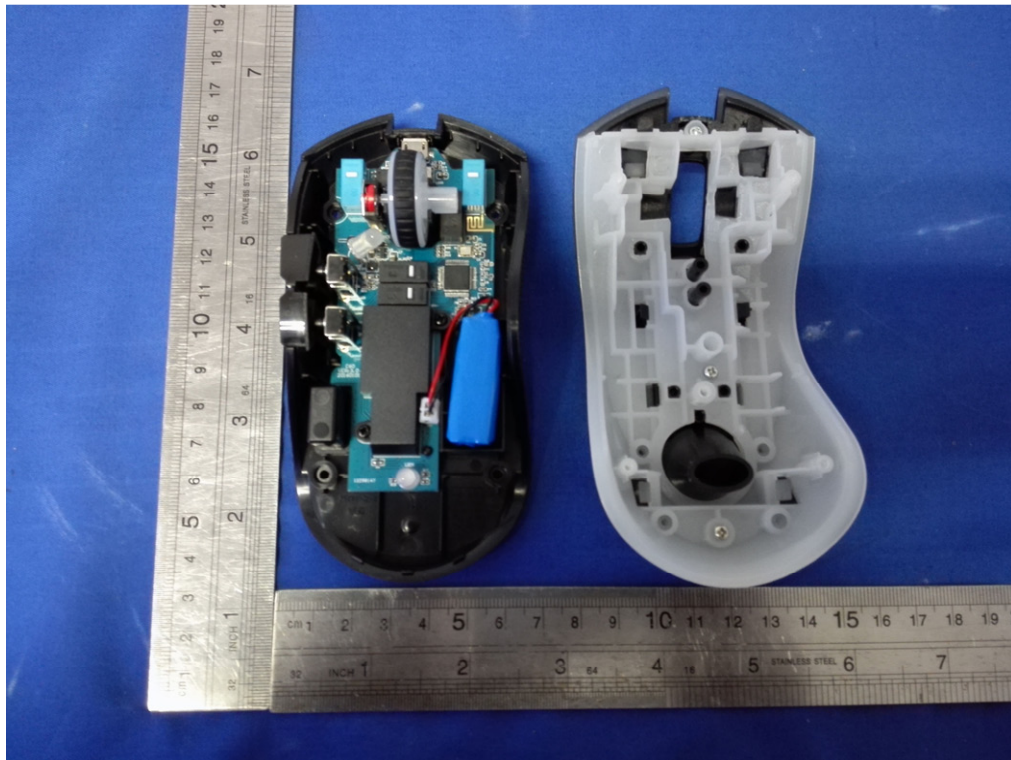



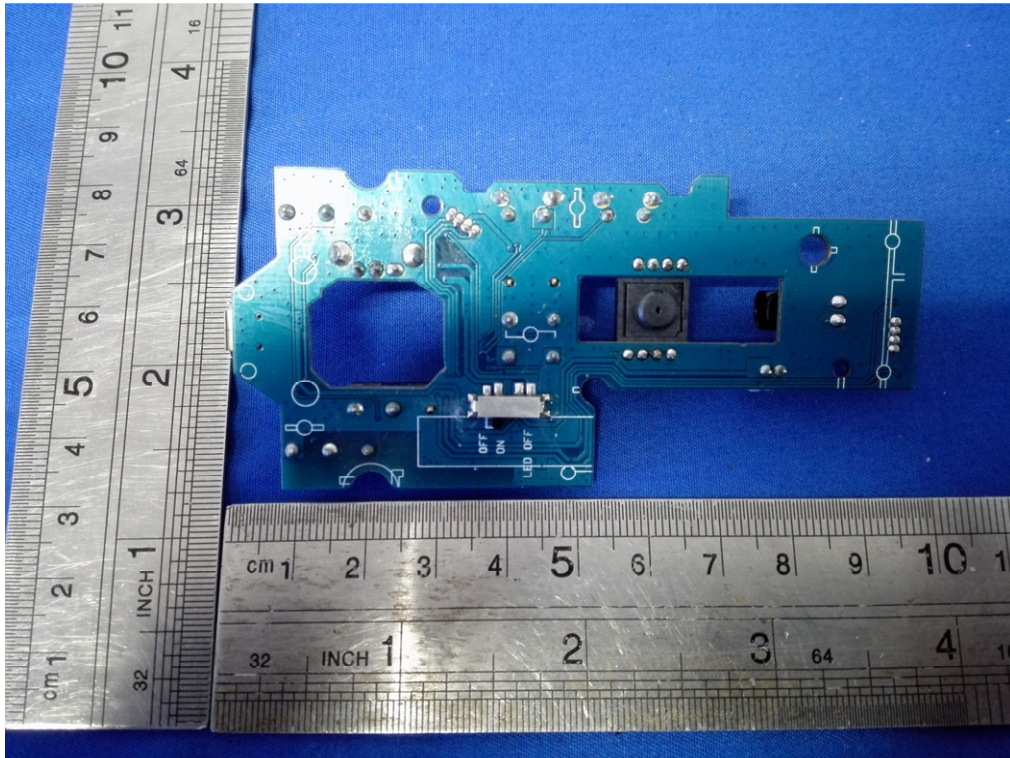

-----END-----