TEST REPORT

No. I15Z40867-CTE02

for

TCL Communication Ltd.

CDMA+LTE mobile phone for Sprint

Model Name: 7046T

FCC ID: 2ACCJN003

with

Hardware Version: HW0001

Software Version: 7046TC01

Issued Date: 2015-06-04

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No.733176

CTTL,Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@catr.cn, website: www.chinattl.com

CONTENTS

1. Test Laboratory

1.1. Testing Location

Company Name: CTTL,Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191

Postal Code: 100191

1.2. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: May 14th,2015

Testing End Date: May 20th,2015

1.4. Signature

Shen Yi

(Prepared this test report)

Zhong Nan

(Reviewed this test report)

Sun Xiang Qian

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China.
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Zhizhou Gong
Contact Email:	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260
Fax:	+86 21 61460602

2.2. Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road, ZhangJiang High-Tech Park, Pudong Area, Shanghai, P.R. China.
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Zhizhou Gong
Contact Email:	zhizhou.gong@tcl.com
Telephone:	+86 21 51798260
Fax:	+86 21 61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	CDMA+LTE mobile phone for Sprint
Model	7046T
FCC ID	2ACCJN003
Frequency	CDMA800MHz(BC0);CDMA1900MHz(BC1);Secondary800MHz(BC10)
Antenna	Internal
Power supply	Battery or Charger (AC Adaptor)
Extreme vol. Limits	3.5VDC to 4.35VDC (nominal: 3.8 VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or MEID	HW Version	SW Version
UT06a	86708702001445	HW0001	7046TC01

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Traveler Charger	/

AE1

Model	TLp025A2
Manufacturer	SCUD
Capacitance	2500mAh
Nominal Voltage	3.8V

AE2

Model	CBA0057AG0C1
Manufacturer	BYD

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting
Fully charged battery was used during the test.

3.5. General Description
The Equipment Under Test (EUT) is a model of CDMA+LTE mobile phone for Sprint with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-13 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB971168 D01	Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems	v02r02

5. LABORATORY ENVIRONMENT

Shielding chamber did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

6. SUMMARY OF TEST RESULTS

Items	List	Clause in FCC rules	Verdict
1	Output Power	90.635	P
2	Frequency Stability	2.1055/90.213	P
3	Occupied Bandwidth	2.1049	P
4	Emission Bandwidth	2.1049	P
5	Conducted Spurious Emission	2.1051/90.691	P

7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CALIBRATION INTERVAL	CAL DUE DATE
1	Spectrum Analyzer	FSV30	101576	R&S	1 Year	2015-11-4
2	Wireless Communications Test Set	8960(E5515C)	GB461603 13	Agilent	1 Year	2015-7-22
3	Climatic chamber	SH-641	92009050	ESPEC	2 Years	2017-2-16

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Agilent Wireless Communications Test Set (8960(E5515C)) to ensure max power transmission and proper modulation.

This result is peak output power conducted measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 2 frequencies of CDMA BC10 (bottom and top of operational frequency range).

CDMA BC10

Measurement result

Channel	Frequency(MHz)	Channel power(dBm)		
		1xRTT	1xEVDO	
			Rel0	RevA
476	817.90	23.91	23.94	23.99
580	820.50	23.97	24.00	24.02
684	823.10	24.03	24.01	24.03

A.2 FREQUENCY STABILITY

A.2.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of Agilent 8960(E5515C) Wireless Communications Test Set.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30℃.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of CDMA BC10, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10℃ increments from -30℃ to +50℃. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50℃.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50℃ to -30℃. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5℃ during the measurement procedure.

A.2.2 Measurement Limit

A.2.2.1 For Hand carried battery powered equipment

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.2.2.2 For equipment powered by primary supply voltage

For Part 90.213, the frequency stability of the transmitter shall be maintained within ±2.5ppm of the center frequency. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.2.3 Measurement results

CDMA BC 10
Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	-0.37	0.001
3.8	-0.31	0.001
4.35	-0.45	0.001

Frequency Error vs Temperature

temperature(℃)	Frequency error(Hz)	Frequency error(ppm)
-30	-0.52	0.001
-20	-0.48	0.001
-10	-0.32	0.001
0	-0.22	0.001
10	-0.34	0.001
20	-0.31	0.001
30	-0.25	0.001
40	-0.04	0.001
50	0.18	0.001

A.3 OCCUPIED BANDWIDTH

A.3.1 Occupied Bandwidth Results

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

Test Condition

| RBW	VBW	Span	Sweeptime	Detector	Trace Mode
20KHz	50KHz	5MHz	40ms	Peak	Max Hold

The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 99% bandwidth.

CDMA BC10 (99% BW)

Channel	Occupied Bandwidth (99% BW)(MHz)
476	1.274
684	1.274

CDMA BC10
Channel 476-Occupied Bandwidth (99% BW)
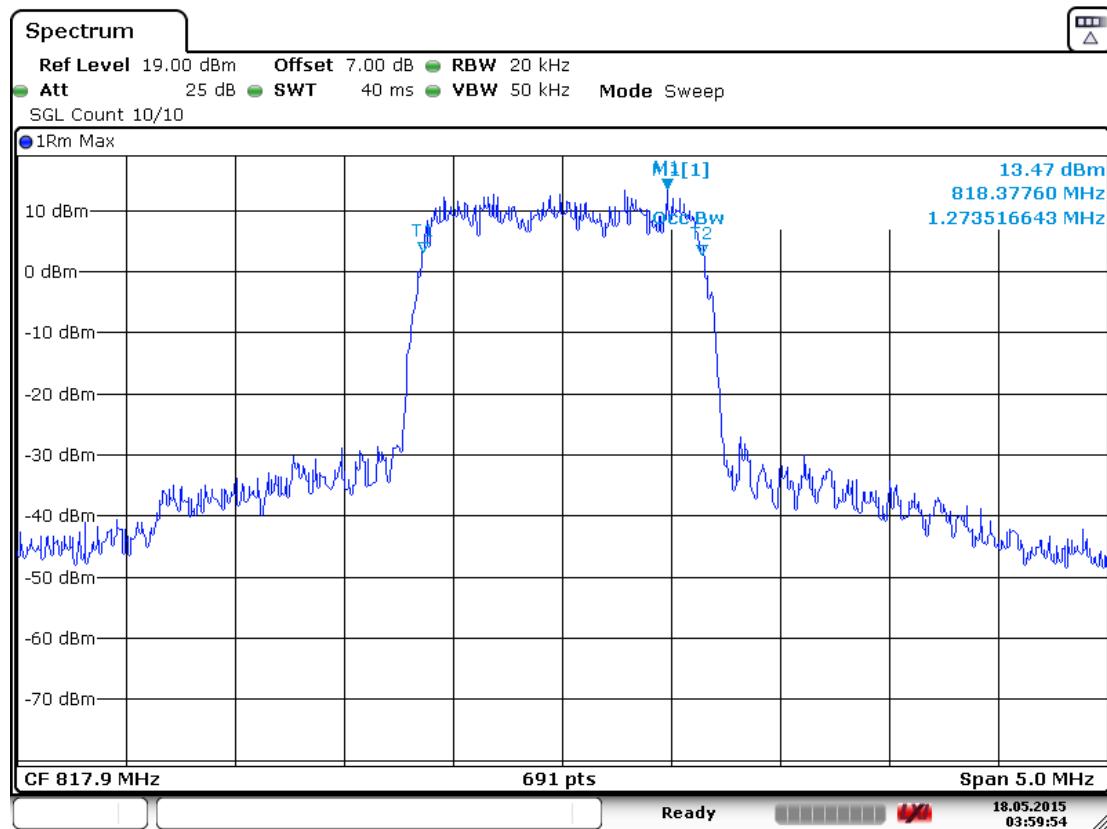
Date: 18.MAY.2015 03:59:54

Channel 684-Occupied Bandwidth (99% BW)
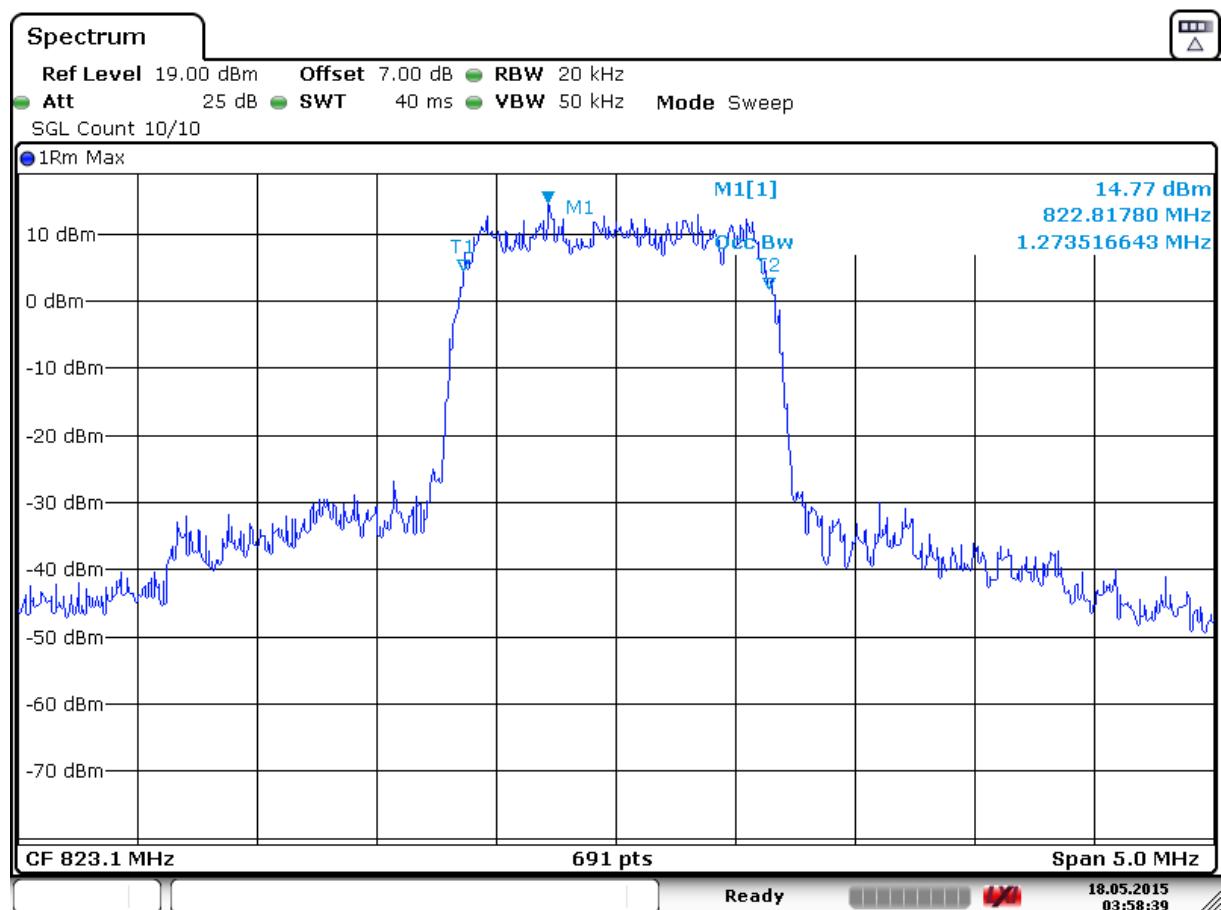
Date: 18.MAY.2015 03:58:40

A.4 EMISSION BANDWIDTH

A.4.1Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. Table below lists the measured 100% BW. Spectrum analyzer plots are included on the following pages.

Test Condition

RBW	VBW	Span	Sweeptime	Detector	Trace Mode
20KHz	50KHz	5MHz	40ms	Peak	Max Hold

The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 100% bandwidth.

CDMA BC10 (100% BW)

| Channel	Emission Bandwidth (100% BW) (MHz)
476	1.353
684	1.353

CDMA BC10

Channel 476- Emission Bandwidth (100% BW)
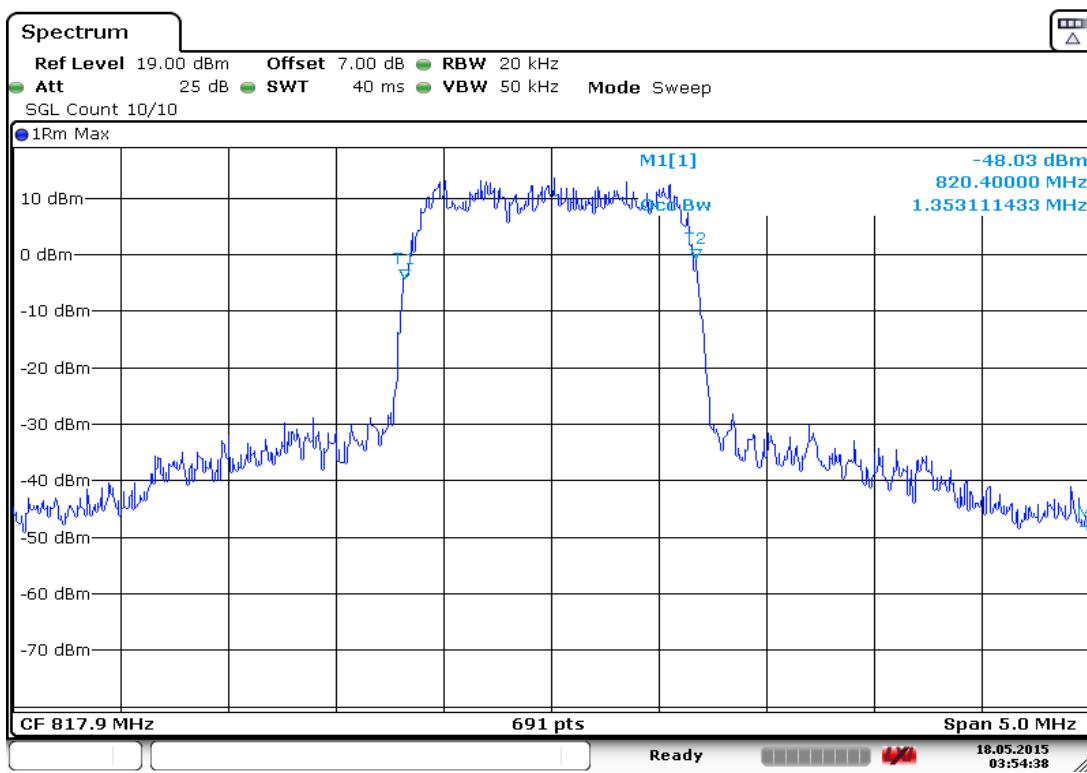
Date: 18.MAY.2015 03:54:38

Channel 684- Emission Bandwidth (100% BW)

Date: 18.MAY.2015 03:53:24
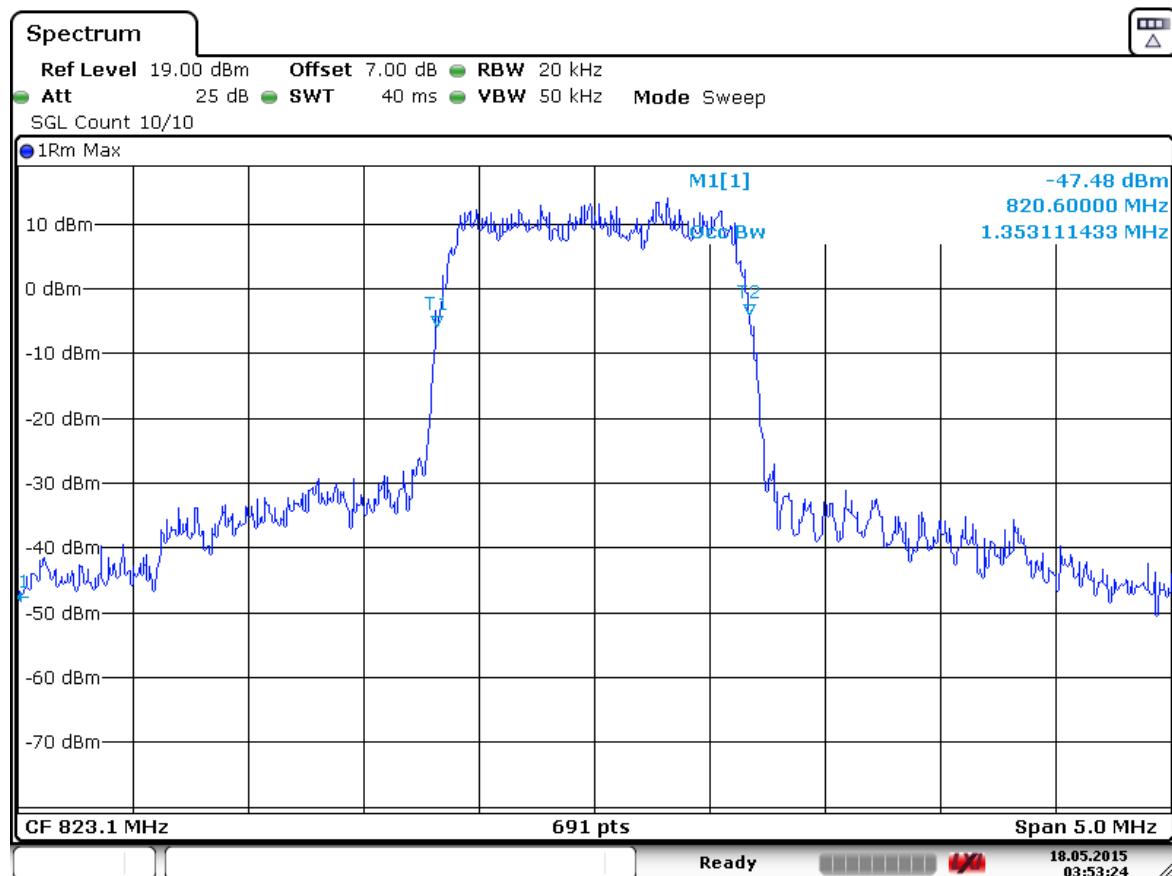
A.5 CONDUCTED SPURIOUS EMISSION

A.5.1 Measurement Method

The spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For CDMA BC10, data taken from 30 MHz to 10GHz.

Out-of-band emission requirement shall apply only to the ''outer'' channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116Log_{10}(f/6.1)$ decibels or $50 + 10 Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10Log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

CDMA BC10 Transmitter

| Channel	Frequency (MHz)
476	817.9
684	823.1

A.5.2 Measurement result

## CDMA BC10

A. 5.2.1 Channel 476: 30MHz –1GHz

Spurious emission limit –13dBm.

## NOTE: peak above the limit line is the carrier frequency.
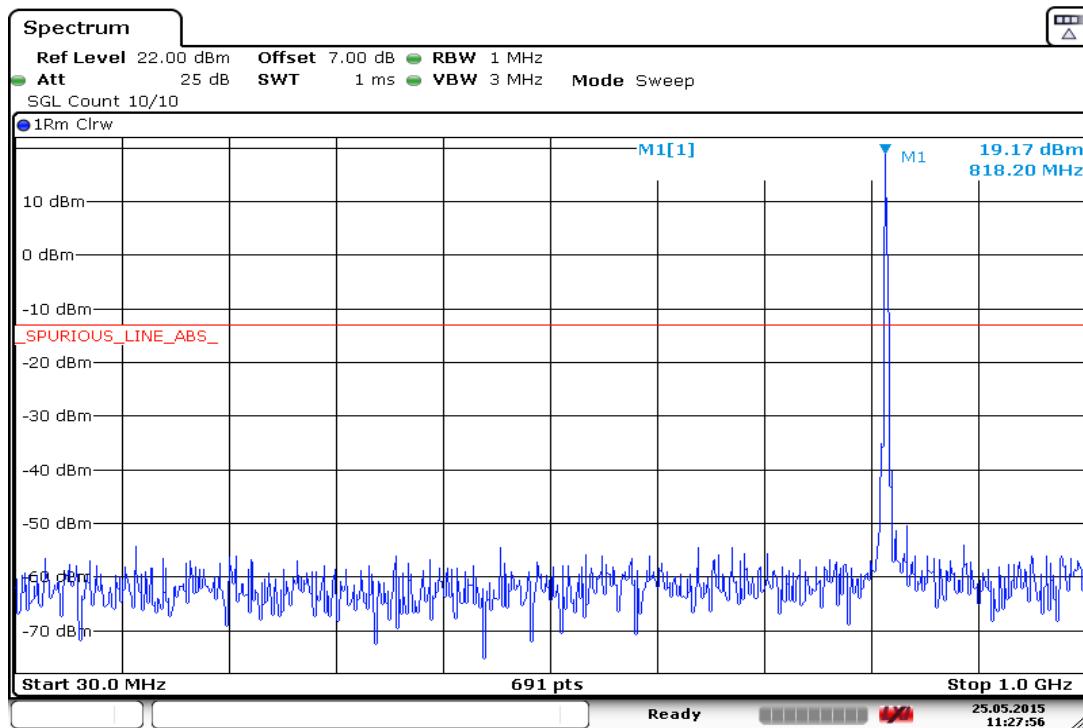
Date: 25.MAY.2015 11:27:57

A.5.2.2 Channel 476: 1GHz –2.5GHz

Spurious emission limit –13dBm.
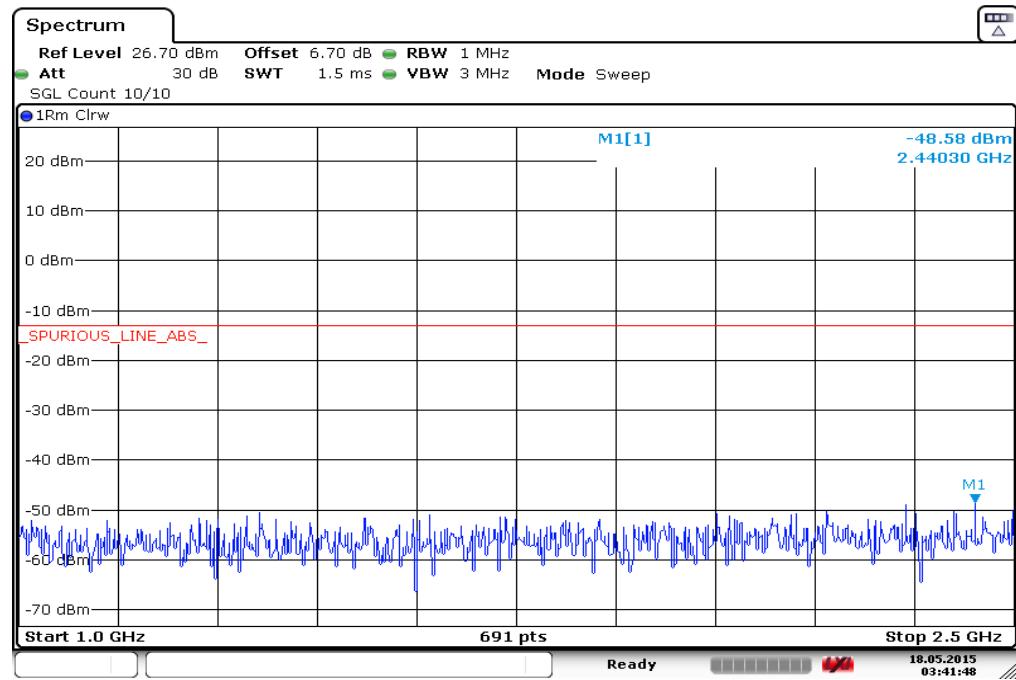
Date: 18.MAY.2015 03:41:48

A.5.2.3 Channel 476: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.

Date: 18.MAY.2015 03:45:25
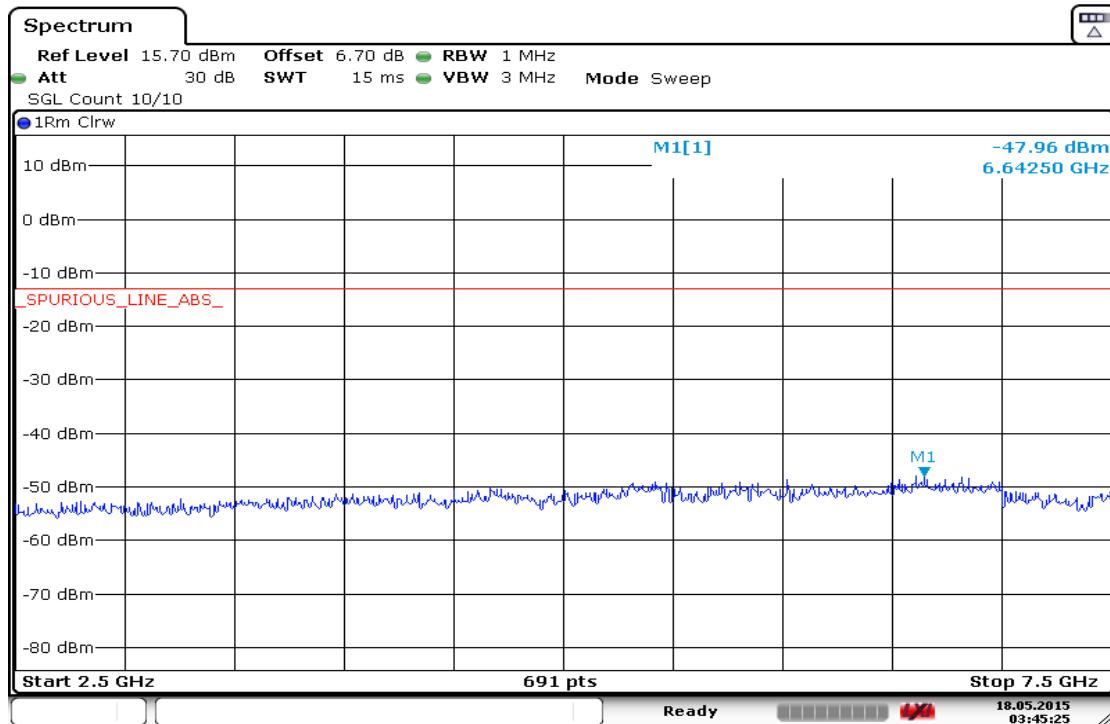
A.5.2.4 Channel 476: 7.5GHz –10GHz

Spurious emission limit –13dBm.

Date: 18.MAY.2015 03:50:41
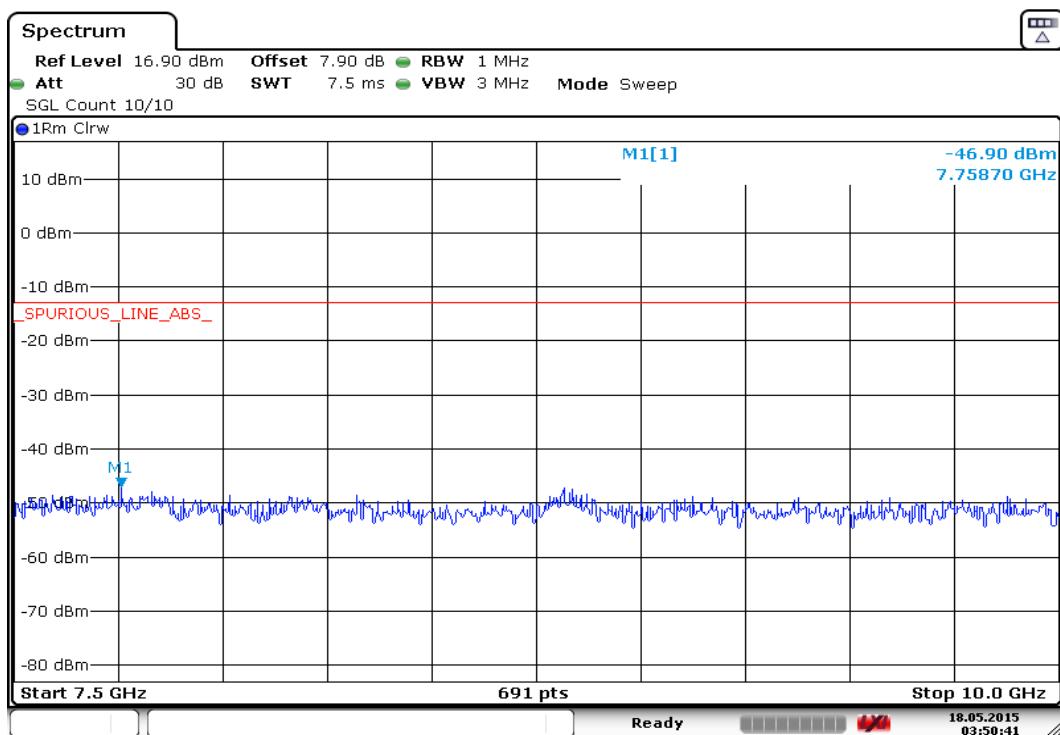
A.5.2.5 Channel 476: Band Edge

Spurious emission limit –20dBm.
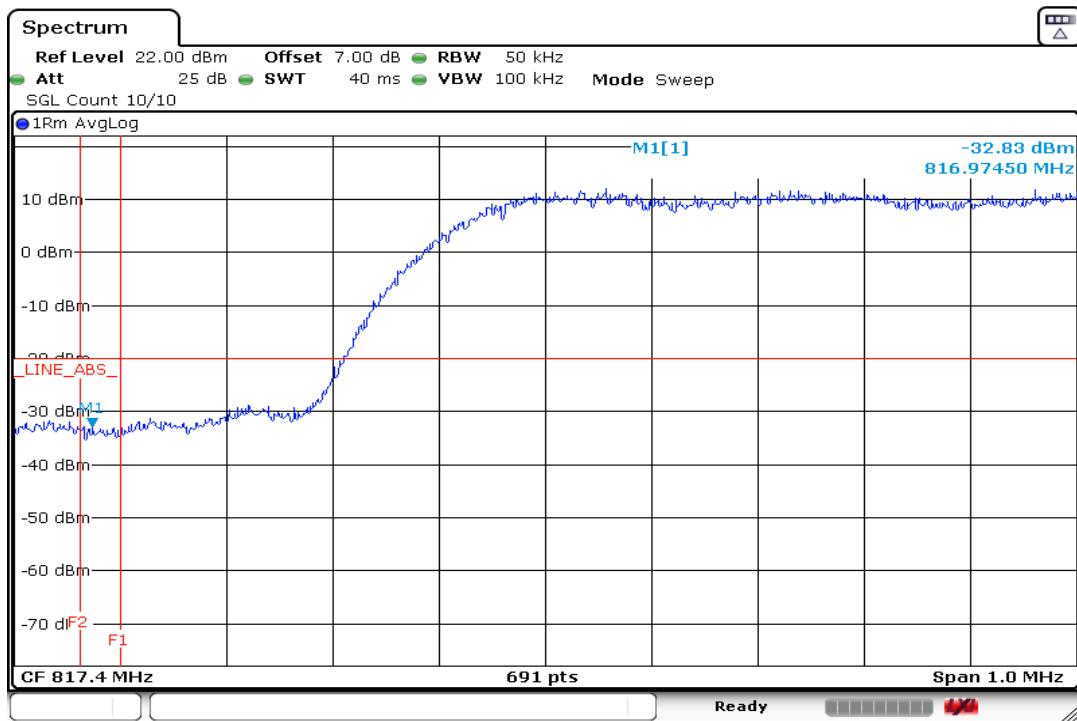
Date: 3.JUN.2015 11:38:58

A.5.2.6 Channel 476: Outer Extended Band Edge

Spurious emission limit –13dBm.
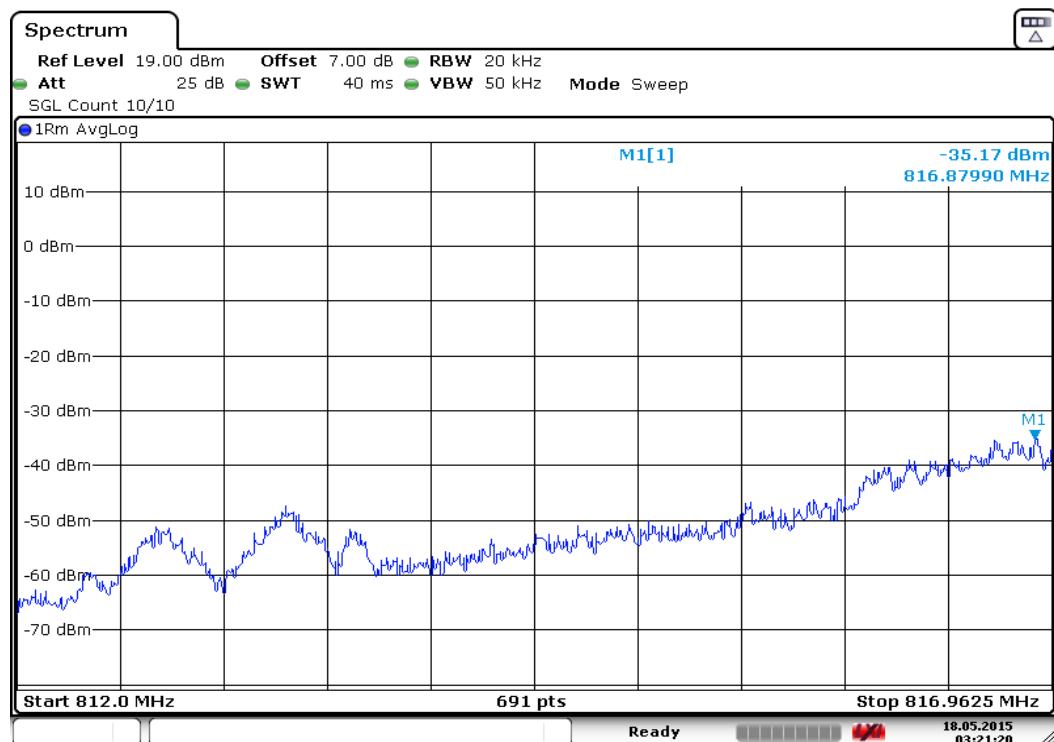
Date: 18.MAY.2015 03:21:20

A. 5.2.7 Channel 684: 30MHz –1GHz

Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**
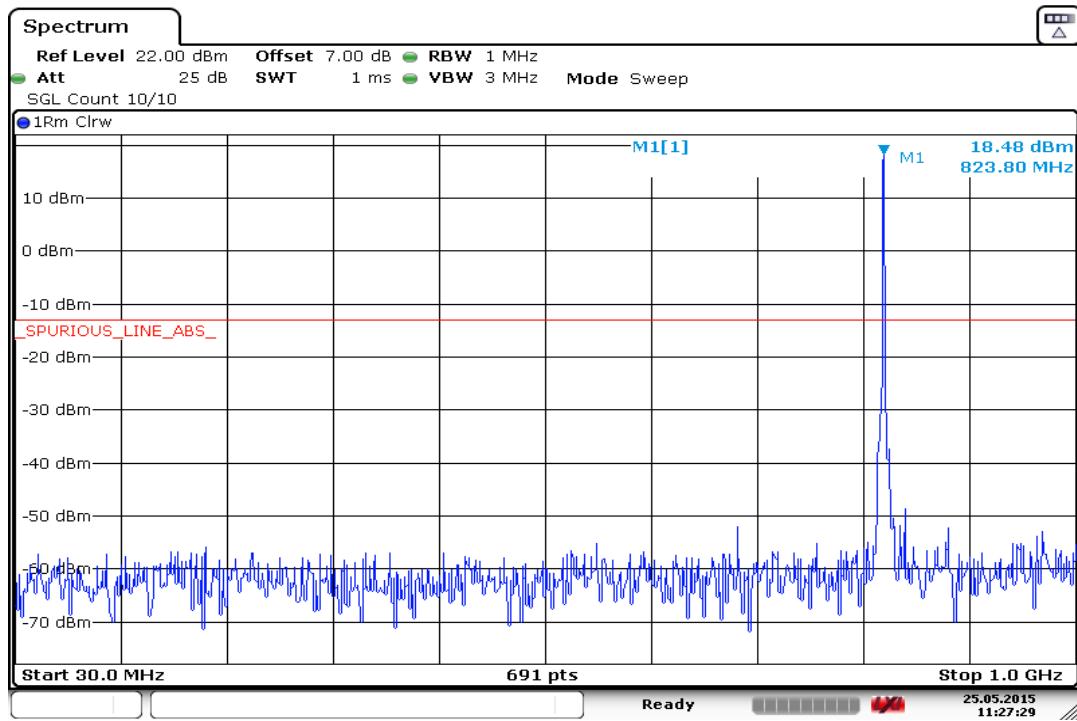
Date: 25.MAY.2015 11:27:29

A.5.2.8 Channel 684: 1GHz –2.5GHz

Spurious emission limit –13dBm.
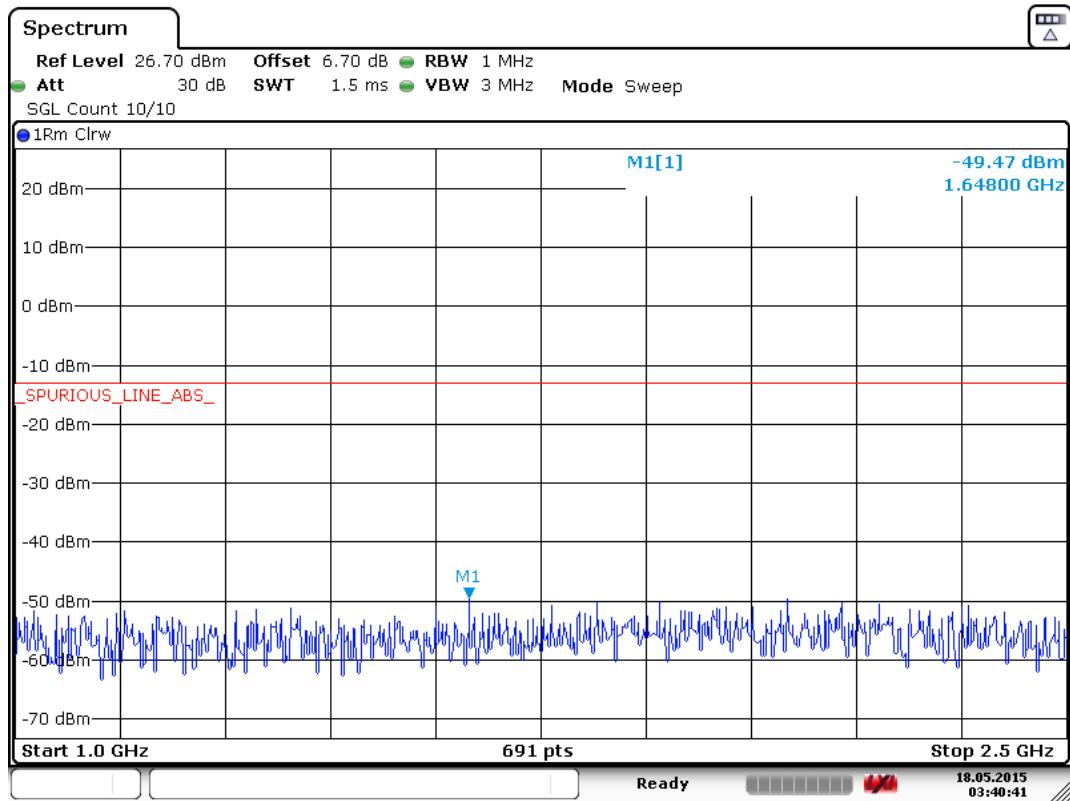
Date: 18.MAY.2015 03:40:42

A.5.2.9 Channel 684: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.
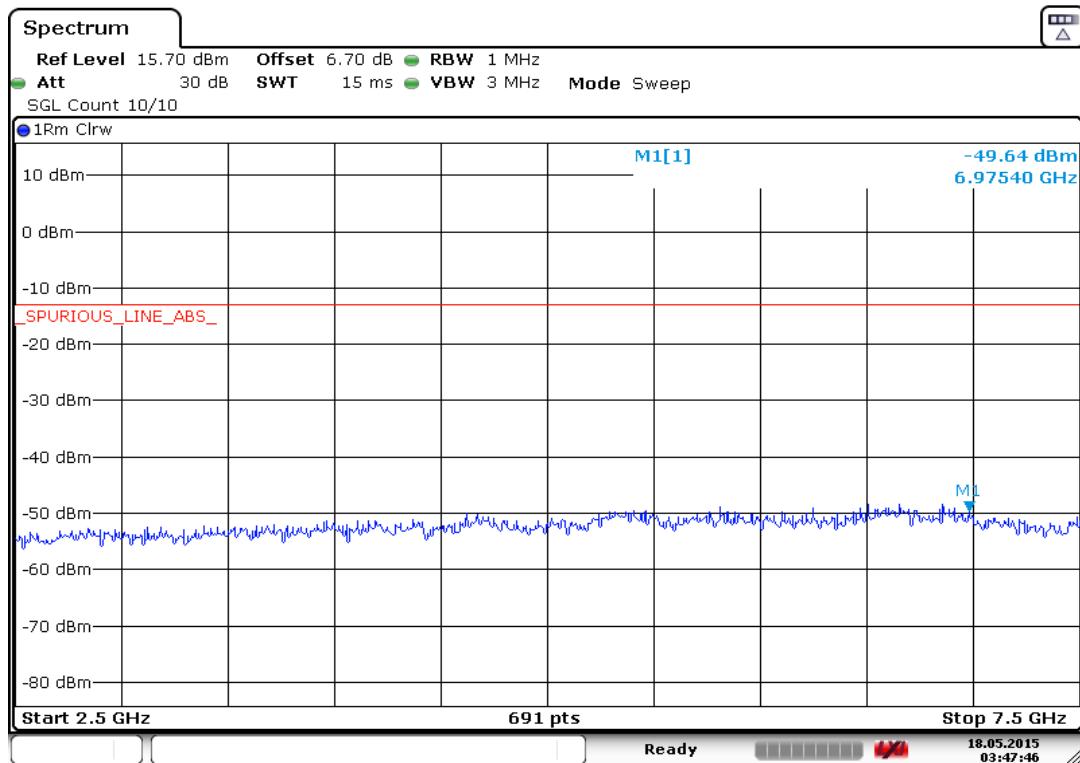
Date: 18.MAY.2015 03:47:46

A.5.2.10 Channel 684: 7.5GHz –10GHz

Spurious emission limit –13dBm.
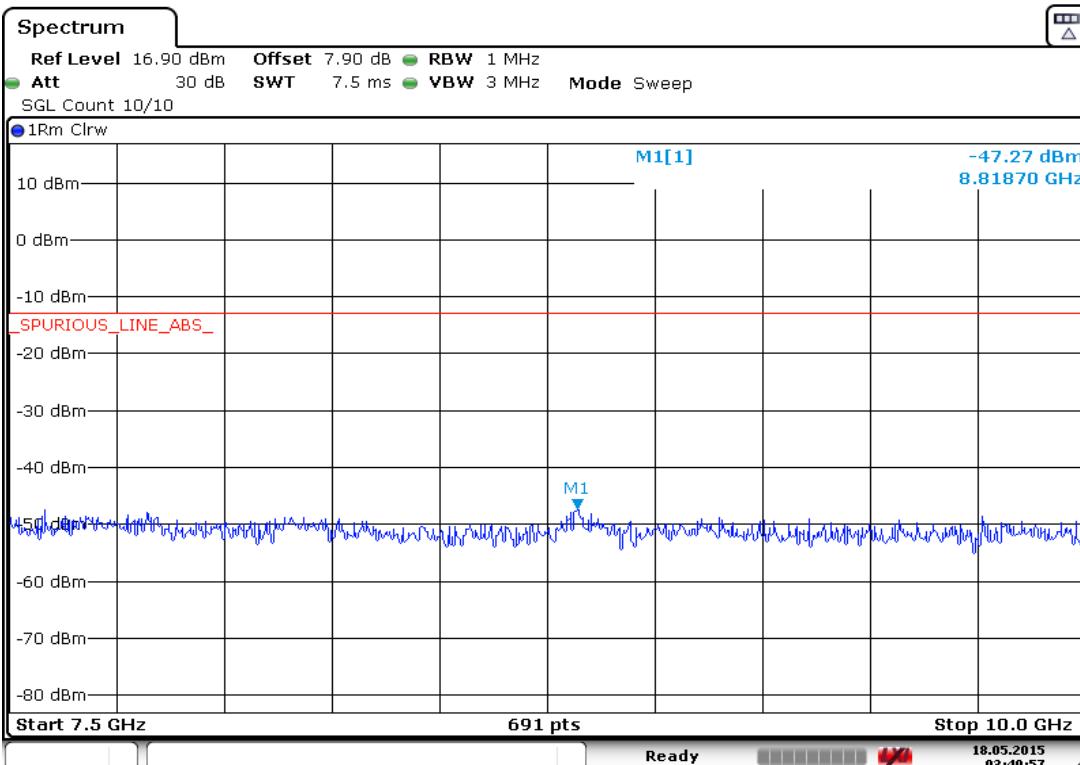
Date: 18.MAY.2015 03:49:57

A.5.2.11 Channel 684: Band Edge

Spurious emission limit –20dBm.
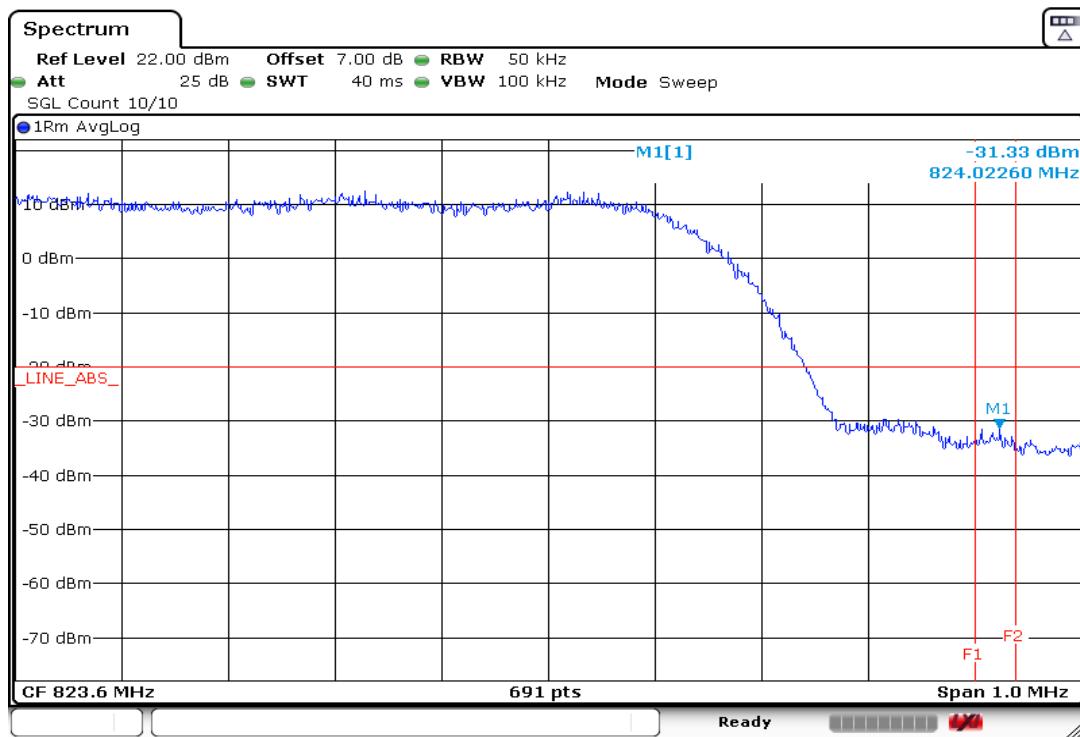
Date: 3.JUN.2015 11:44:53

A.5.2.12 Channel 684: Outer Extended Band Edge

Spurious emission limit –13dBm.
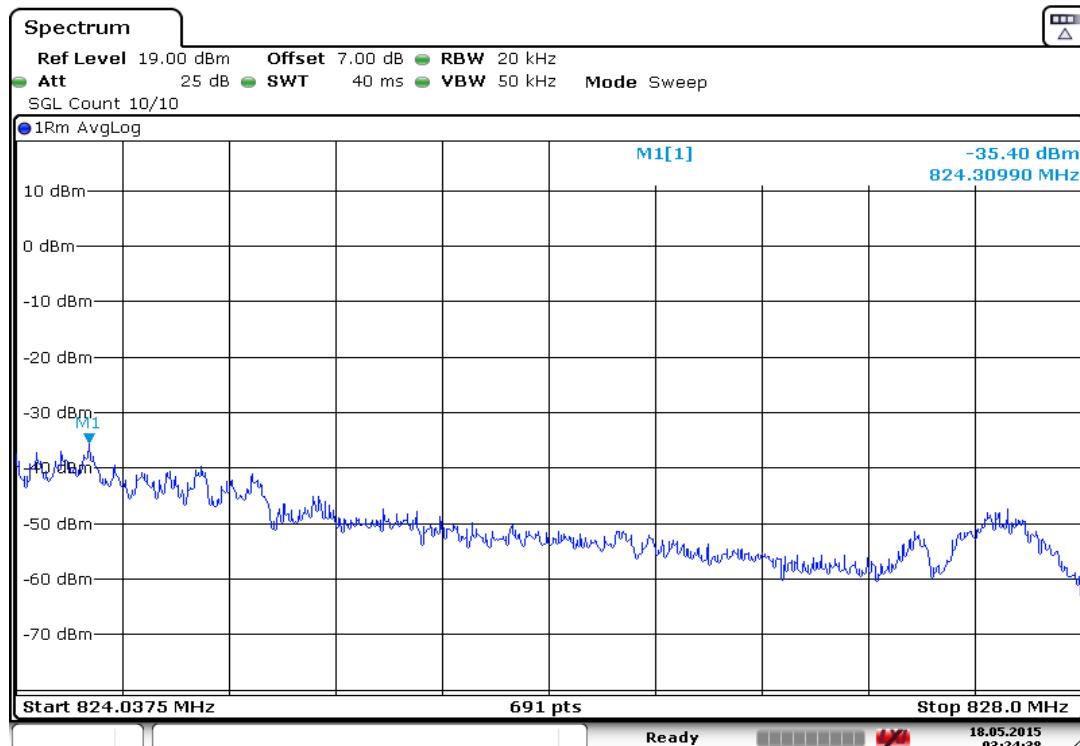
Date: 18.MAY.2015 03:24:38

END OF REPORT