

TEST REPORT

Reference No..... : WTS14S0513838E
FCC ID..... : 2ACEZPT-700D
Applicant..... : Shenzhen Potato Technology Co.,Ltd
Address..... : 3rd Floor, A Block of Juyin Industry Zone, Buji Shangliliang, Longgang District, Shenzhen, Guangdong, China
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Tablet PC
Model No..... : PT-700A, PT-700B, PT-700C, PT-700D, PT-700E, PT-700F, PT-700G, PT-701A, PT-701B, PT-701C, PT-701D, PT-701E, PT-701F, PT-701G, PT-702A, PT-702B, PT-702C, PT-702D, PT-702E, PT-702F, PT-702G
Standards..... : FCC CFR47 Part 15 C Section 15.247:2012
Date of Receipt sample..... : May 12, 2014
Date of Test..... : May 13-23, 2014
Date of Issue..... : Jun.12, 2014
Test Result..... : Pass *

***Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Testing location: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.....	5
4.2 DETAILS OF E.U.T.....	5
4.3 CHANNEL LIST.....	5
4.4 TEST MODE.....	6
4.5 TEST FACILITY.....	6
5 EQUIPMENT USED DURING TEST.....	7
5.1 EQUIPMENTS LIST.....	7
5.2 DESCRIPTION OF SUPPORT UNITS.....	7
5.3 MEASUREMENT UNCERTAINTY.....	8
5.4 TEST EQUIPMENT CALIBRATION.....	8
6 CONDUCTED EMISSION.....	9
6.1 E.U.T. OPERATION.....	9
6.2 EUT SETUP.....	9
6.3 MEASUREMENT DESCRIPTION.....	9
6.4 CONDUCTED EMISSION TEST RESULT.....	10
7 RADIATED EMISSIONS.....	12
7.1 EUT OPERATION.....	12
7.2 TEST SETUP.....	13
7.3 SPECTRUM ANALYZER SETUP.....	14
7.4 TEST PROCEDURE.....	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
7.6 SUMMARY OF TEST RESULTS.....	16
8 BAND EDGE MEASUREMENT.....	28
8.1 TEST PRODUCE.....	28
8.2 TEST RESULT.....	29
9 6 DB BANDWIDTH MEASUREMENT.....	33
9.1 TEST PROCEDURE:.....	33
9.2 TEST RESULT:.....	33
10 MAXIMUM PEAK OUTPUT POWER.....	40
10.1 TEST PROCEDURE:.....	40
10.2 TEST RESULT:.....	40
11 POWER SPECTRAL DENSITY.....	47
11.1 TEST PROCEDURE:.....	47
11.2 TEST RESULT:.....	47
12 ANTENNA REQUIREMENT.....	54
13 RF EXPOSURE.....	55
13.1 REQUIREMENTS.....	55
13.2 THE PROCEDURES / LIMIT.....	55
14 PHOTOGRAPHS – MODEL PT-700D TEST SETUP.....	56
14.1 CONDUCTED EMISSION.....	56
14.2 RADIATED EMISSION.....	56

15 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS..... 58

15.1 MODEL PT-700D –EXTERNAL VIEW.....58

15.2 MODEL PT-700D – INTERNAL VIEW.....62

4 General Information

4.1 General Description of E.U.T.

Product Name	: Tablet PC
Model No.	: PT-700A, PT-700B, PT-700C, PT-700D, PT-700E, PT-700F, PT-700G, PT-701A, PT-701B, PT-701C, PT-701D, PT-701E, PT-701F, PT-701G, PT-702A, PT-702B, PT-702C, PT-702D, PT-702E, PT-702F, PT-702G
Model Difference	: Only the model name is different. PT-700D is the tested sample.
Operation Frequency	: 2412MHz ~ 2462MHz, 2422MHz~2452MHz
The Lowest Oscillator	: 32.768kHz
Antenna Gain	: 2dBi
Type of modulation	: IEEE 802.11b (CCK/QPSK/BPSK, 11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM, 54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM, HT20:72Mbps max., HT40:150Mbps max.)

4.2 Details of E.U.T.

Technical Data	: (1)DC 5V, 2000mA by adapter (Adapter Input: AC 100-240V, 50/60Hz, 0.5A) (2)DC 3.7V by battery (Capacity: 2800mAh)
Adapter	: M/N: RCL050200

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	108 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

Table 2 Tests Carried Out Under FCC part 15.207 & FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A-1, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions at Mains Terminals Disturbance Voltage						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.18,2013	Sep.17,2014
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.18,2013	Sep.17,2014
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.18,2013	Sep.17,2014
4.	Cable	LARGE	RF300	-	Sep.18,2013	Sep.17,2014
3m Semi-anechoic Chamber for Radiation						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.18,2013	Sep.17,2014
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2014	Apr.18,2015
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.18,2013	Sep.17,2014
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2014	Apr.18,2015
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2014	Apr.18,2015
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.18,2013	Sep.17,2014
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.18,2013	Sep.17,2014
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	May 16,2014	May 15,2015

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Headphone	Qisheng	S-325	N/A

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in communication mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

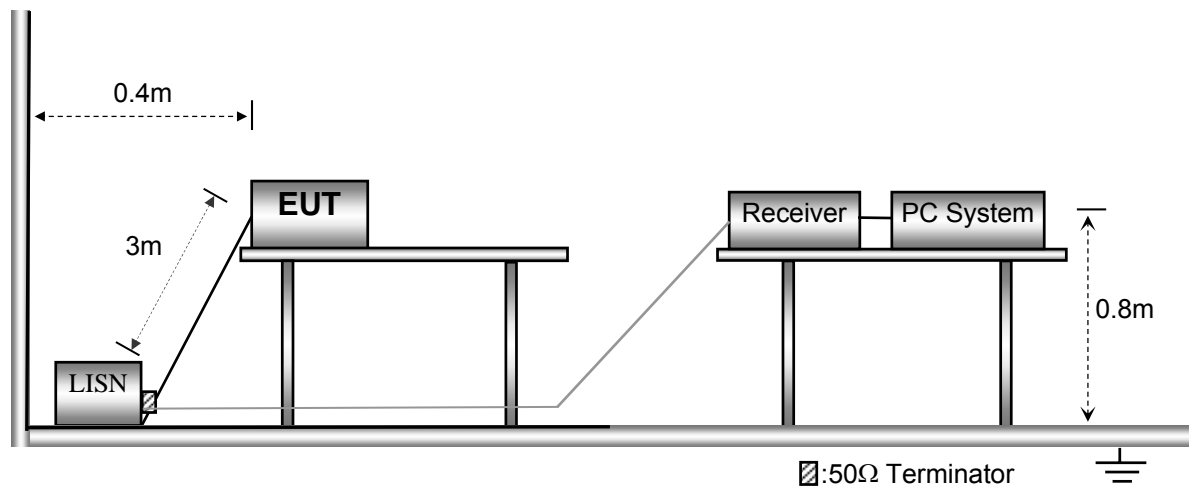


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

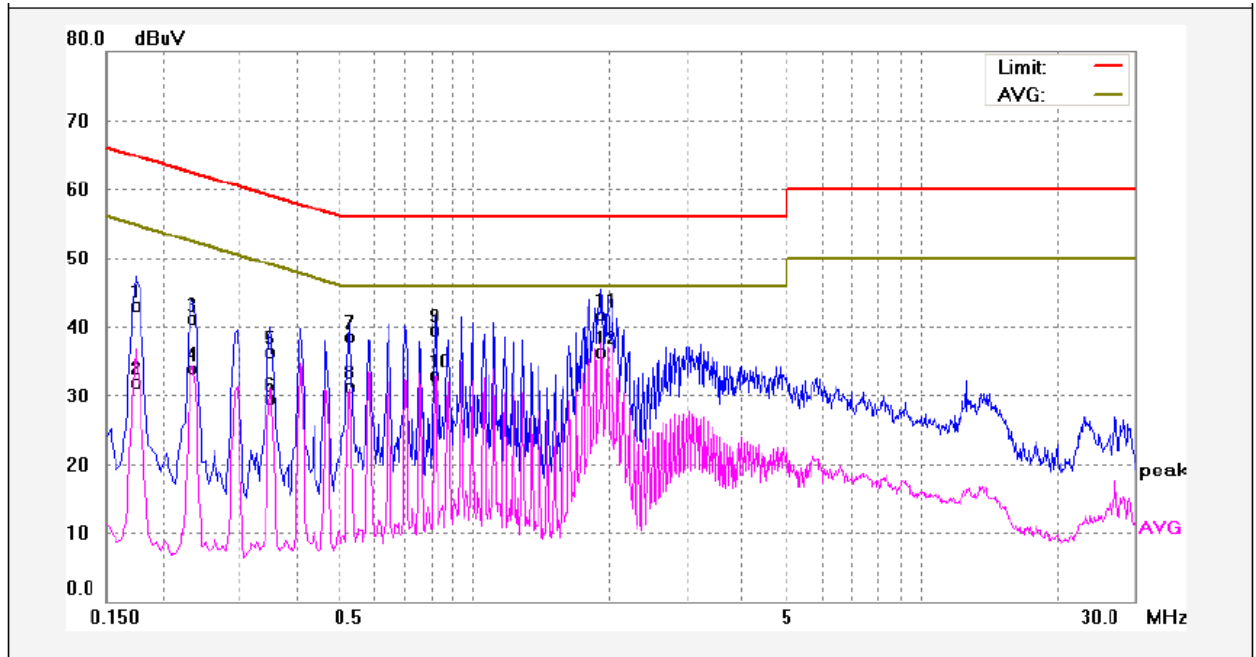

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1760	32.65	10.48	43.13	64.76	-21.63	QP	
2	0.1760	21.42	10.48	31.90	54.76	-22.86	AVG	
3	0.2320	30.63	10.48	41.11	62.30	-21.13	QP	
4	0.2320	23.40	10.48	33.88	52.30	-18.42	AVG	
5	0.3410	25.91	10.48	36.39	58.96	-22.57	QP	
6	0.3410	18.95	10.48	29.43	48.96	-19.53	AVG	
7	0.5250	28.10	10.50	38.60	56.00	-17.40	QP	
8	0.5250	20.87	10.50	31.37	46.00	-14.63	AVG	
9	0.8135	28.95	10.60	39.55	56.00	-16.47	QP	
10	0.8135	22.30	10.60	32.90	46.00	-13.10	AVG	
11	1.9262	31.09	10.63	41.72	56.00	-14.28	QP	
12	1.9262	25.70	10.63	36.33	46.00	-9.67	AVG	

Neutral line:

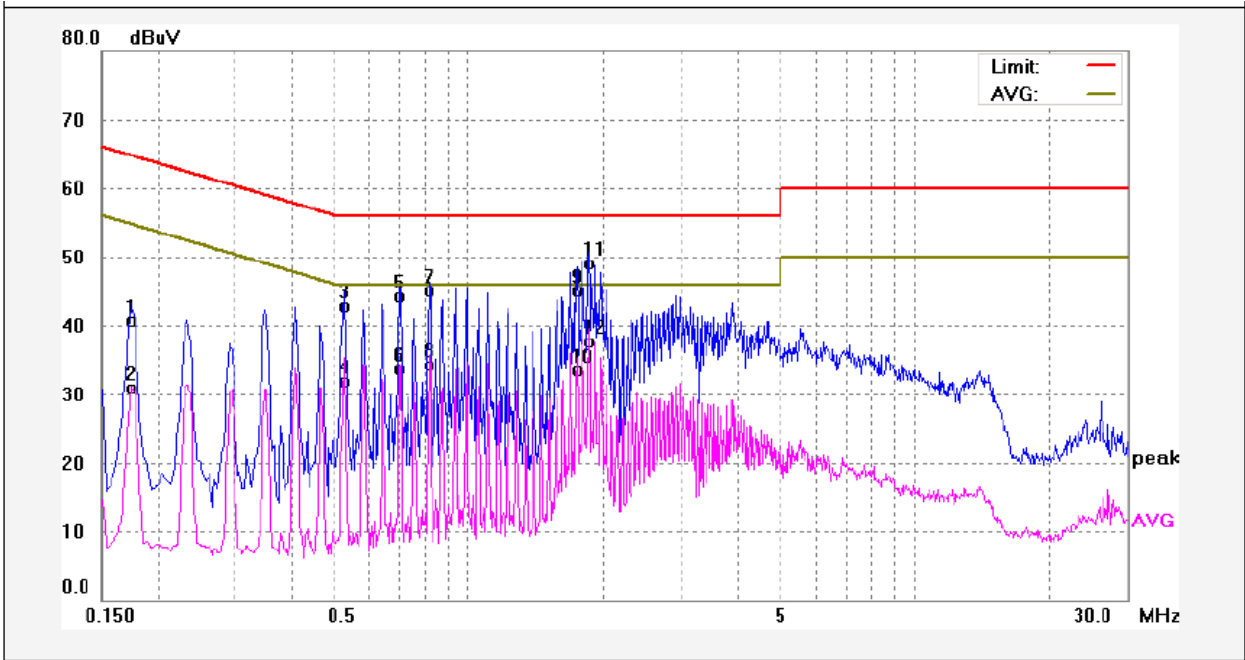

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1760	30.10	10.48	40.75	64.76	-24.01	QP	
2	0.1760	20.33	10.48	30.81	54.76	-23.95	AVG	
3	0.5250	32.31	10.50	42.81	56.00	-13.19	QP	
4	0.5250	21.36	10.50	31.86	46.00	-14.14	AVG	
5	0.6970	33.62	10.59	44.21	56.00	-11.79	QP	
6	0.6970	23.20	10.59	33.79	46.00	-12.30	AVG	
7	0.8135	34.45	10.60	45.05	56.00	-10.95	QP	
8	0.8135	23.76	10.60	34.36	46.00	-11.64	AVG	
9	1.7510	34.50	10.62	45.12	56.00	-10.88	QP	
10	1.7510	22.95	10.62	33.57	46.00	-12.43	AVG	
11	1.8630	38.34	10.63	48.06	56.00	-7.49	QP	
12	1.8630	26.94	10.63	37.11	46.00	-8.89	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

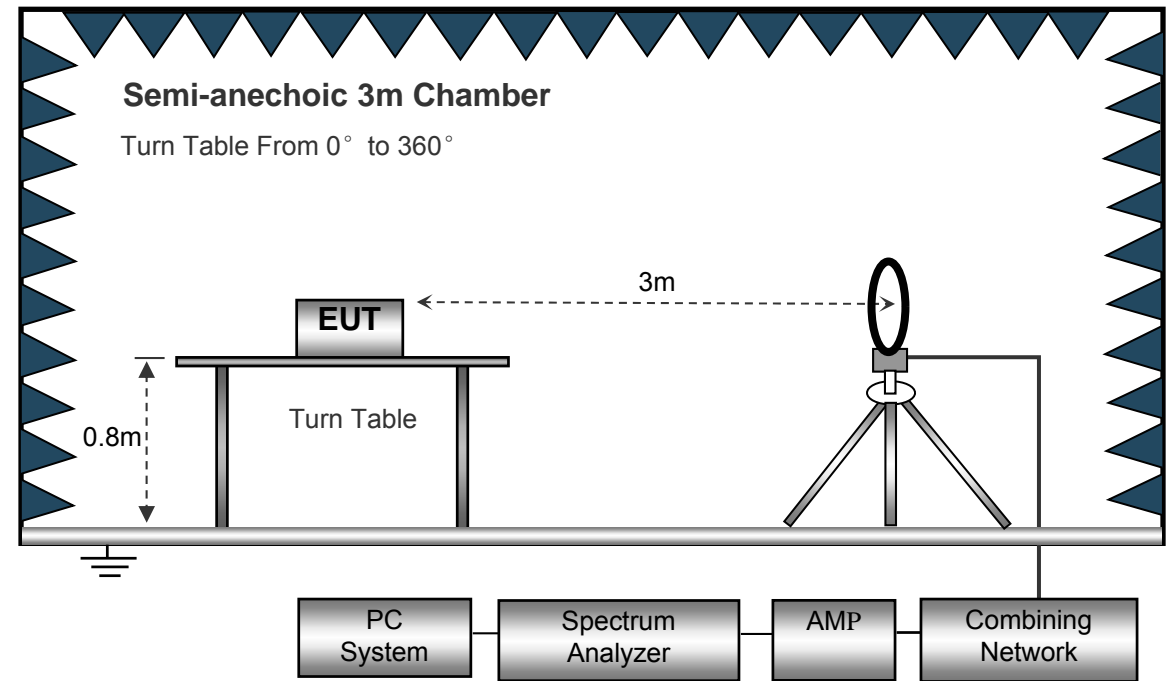

The test setup for emission measurement from 30 MHz to 1 GHz.

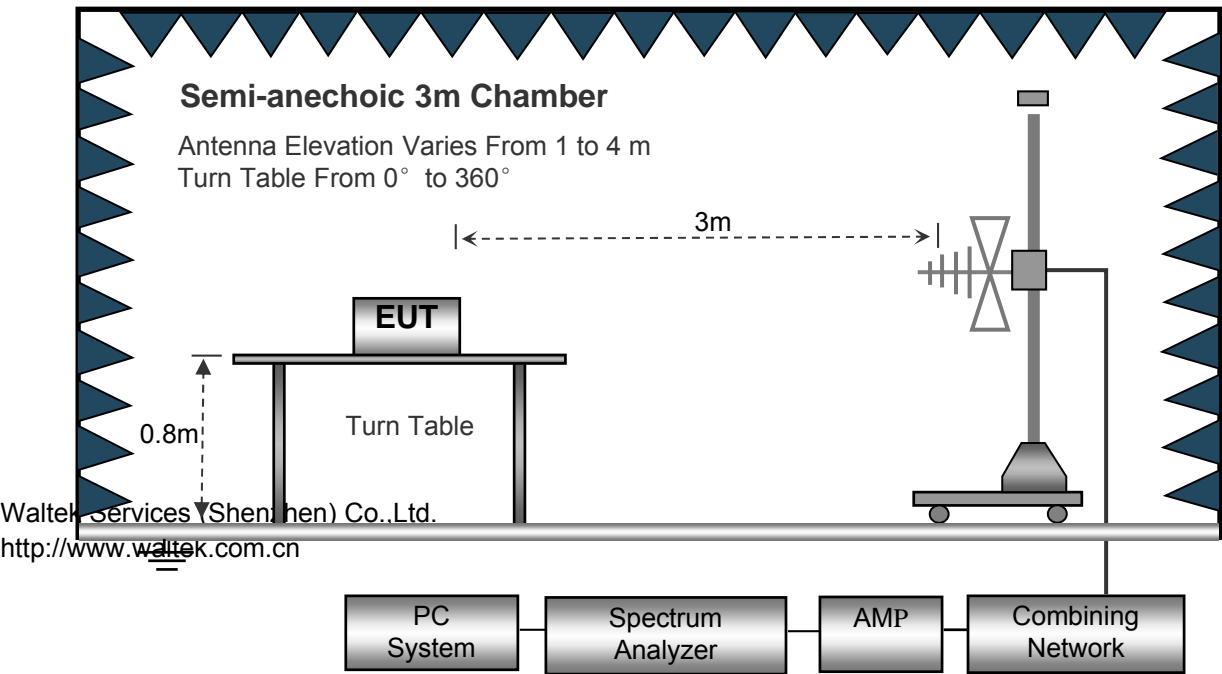

The test setup for emission measurement above 1 GHz.

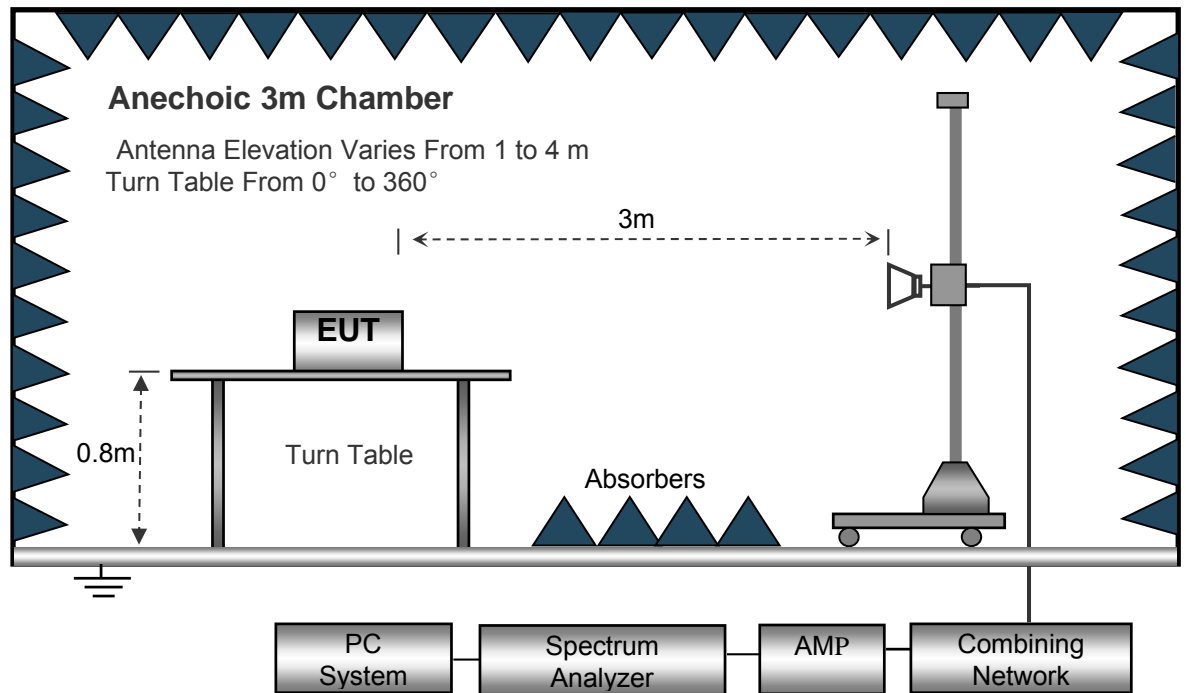

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed..... Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed..... Auto
 Detector..... PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed..... Auto
 Detector..... PK
 Resolution Bandwidth..... 1MHz

Video Bandwidth..... 3MHz
Detector..... Ave.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Corr. Ampl.} - \text{Limit} \\ \text{Corrected factor} &= \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain} \end{aligned}$$

7.6 Summary of Test Results

Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
368.52	18.62	PK	344	1.5	H	20.52	39.14	46.00	-6.86
368.52	15.27	PK	251	1.1	V	20.52	35.79	46.00	-10.21
4824.00	56.74	PK	297	1.5	H	-2.36	54.38	74.00	-19.62
4824.00	50.51	Ave	297	1.5	H	-2.36	48.15	54.00	-5.85
7236.00	50.25	PK	269	1.9	H	-0.38	49.87	74.00	-24.13
7236.00	43.51	Ave	269	1.9	H	-0.38	43.13	54.00	-10.87
2322.75	46.89	PK	301	1.3	V	-13.19	33.70	74.00	-40.30
2322.75	38.04	Ave	301	1.3	V	-13.19	24.85	54.00	-29.15
2363.30	42.60	PK	62	1.8	H	-13.14	29.46	74.00	-44.54
2363.30	37.52	Ave	62	1.8	H	-13.14	24.38	54.00	-29.62
2492.09	43.03	PK	255	1.8	V	-13.08	29.95	74.00	-44.05
2492.09	38.93	Ave	255	1.8	V	-13.08	25.85	54.00	-28.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
368.52	18.32	PK	179	1.6	H	20.52	38.84	46.00	-7.16
368.52	15.37	PK	305	1.0	V	20.52	35.89	46.00	-10.11
4874.00	55.68	PK	298	1.6	H	0.09	55.77	74.00	-18.23
4874.00	49.37	Ave	298	1.6	H	0.09	49.46	54.00	-4.54
7311.00	48.69	PK	79	1.2	H	3.01	51.70	74.00	-22.30
7311.00	42.57	Ave	79	1.2	H	3.01	45.58	54.00	-8.42
9748.00	45.63	PK	116	1.4	H	3.07	48.70	74.00	-25.30
9748.00	38.52	Ave	116	1.4	H	3.07	41.59	54.00	-12.41
2375.31	43.35	PK	194	1.2	V	-13.14	30.21	74.00	-43.79
2375.31	36.86	Ave	194	1.2	V	-13.14	23.72	54.00	-30.28
2492.50	43.32	PK	21	1.0	H	-13.08	30.24	74.00	-43.76
2492.50	37.98	Ave	21	1.0	H	-13.08	24.90	54.00	-29.10

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
368.52	18.46	PK	130	1.6	H	20.52	38.98	46.00	-7.02
368.52	16.03	PK	113	1.9	V	20.52	36.55	46.00	-9.45
4924.00	51.31	PK	219	1.3	H	0.02	51.33	74.00	-22.67
4924.00	43.74	Ave	219	1.3	H	0.02	43.76	54.00	-10.24
7386.00	48.31	PK	132	1.7	H	2.58	50.89	74.00	-23.11
7386.00	39.50	Ave	132	1.7	H	2.58	42.08	54.00	-11.92
2324.49	45.99	PK	343	1.1	V	-13.19	32.80	74.00	-41.20
2324.49	38.48	Ave	343	1.1	V	-13.19	25.29	54.00	-28.71
2355.79	43.17	PK	93	2.0	H	-13.14	30.03	74.00	-43.97
2355.79	36.12	Ave	93	2.0	H	-13.14	22.98	54.00	-31.02
2487.07	43.87	PK	356	1.3	V	-13.08	30.79	74.00	-43.21
2487.07	38.56	Ave	356	1.3	V	-13.08	25.48	54.00	-28.52

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
368.52	17.62	PK	165	1.9	H	22.85	40.47	46.00	-5.53
368.52	14.86	PK	90	1.6	V	22.85	37.71	46.00	-8.29
4824.00	58.51	PK	234	1.2	H	-2.36	56.15	74.00	-17.85
4824.00	47.32	Ave	234	1.2	H	-2.36	44.96	54.00	-9.04
7236.00	52.58	PK	240	1.0	H	-0.38	52.20	74.00	-21.80
7236.00	41.51	Ave	240	1.0	H	-0.38	41.13	54.00	-12.87
2325.00	46.59	PK	333	1.7	V	-13.19	33.40	74.00	-40.60
2325.00	38.52	Ave	333	1.7	V	-13.19	25.33	54.00	-28.67
2354.90	44.94	PK	263	1.5	H	-13.14	31.80	74.00	-42.20
2354.90	36.68	Ave	263	1.5	H	-13.14	23.54	54.00	-30.46
2499.62	44.37	PK	185	1.5	V	-13.08	31.29	74.00	-42.71
2499.62	37.98	Ave	185	1.5	V	-13.08	24.90	54.00	-29.10

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
368.52	17.35	PK	355	1.7	H	22.85	40.20	46.00	-5.80
368.52	14.62	PK	169	1.8	V	22.85	37.47	46.00	-8.53
4874.00	58.36	PK	258	1.5	H	0.09	58.45	74.00	-15.55
4874.00	47.13	Ave	258	1.5	H	0.09	47.22	54.00	-6.78
7311.00	52.63	PK	26	1.2	H	3.01	55.64	74.00	-18.36
7311.00	40.89	Ave	26	1.2	H	3.01	43.90	54.00	-10.10
9748.00	45.63	PK	67	1.5	H	3.07	48.70	74.00	-25.30
9748.00	36.74	Ave	67	1.5	H	3.07	39.81	54.00	-14.19
2363.59	42.86	PK	68	1.0	V	-13.14	29.72	74.00	-44.28
2363.59	36.28	Ave	68	1.0	V	-13.14	23.14	54.00	-30.86
2488.61	42.56	PK	6	1.9	H	-13.08	29.48	74.00	-44.52
2488.61	36.15	Ave	6	1.9	H	-13.08	23.07	54.00	-30.93

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
368.52	17.74	PK	299	1.7	H	22.85	40.59	46.00	-5.41
368.52	14.52	PK	278	1.2	V	22.85	37.37	46.00	-8.63
4924.00	59.02	PK	301	1.1	H	0.02	59.04	74.00	-14.96
4924.00	47.87	Ave	301	1.1	H	0.02	47.89	54.00	-6.11
7386.00	52.78	PK	137	1.1	H	2.58	55.36	74.00	-18.64
7386.00	41.52	Ave	137	1.1	H	2.58	44.10	54.00	-9.90
2336.31	46.76	PK	279	1.9	V	-13.19	33.57	74.00	-40.43
2336.31	37.48	Ave	279	1.9	V	-13.19	24.29	54.00	-29.71
2386.98	43.37	PK	180	2.0	H	-13.14	30.23	74.00	-43.77
2386.98	36.95	Ave	180	2.0	H	-13.14	23.81	54.00	-30.19
2492.94	45.00	PK	353	1.7	V	-13.08	31.92	74.00	-42.08
2492.94	36.07	Ave	353	1.7	V	-13.08	22.99	54.00	-31.01

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
368.52	18.32	PK	25	1.6	H	20.56	38.88	46.00	-7.12
368.52	15.06	PK	92	1.6	V	20.56	35.62	46.00	-10.38
4824.00	57.86	PK	226	1.9	H	-2.36	55.50	74.00	-18.50
4824.00	46.32	Ave	226	1.9	H	-2.36	43.96	54.00	-10.04
7236.00	52.58	PK	300	1.9	H	-0.38	52.20	74.00	-21.80
7236.00	41.51	Ave	300	1.9	H	-0.38	41.13	54.00	-12.87
2316.63	46.43	PK	188	1.6	V	-13.19	33.24	74.00	-40.76
2316.63	39.03	Ave	188	1.6	V	-13.19	25.84	54.00	-28.16
2387.25	43.84	PK	88	1.5	H	-13.14	30.70	74.00	-43.30
2387.25	38.94	Ave	88	1.5	H	-13.14	25.80	54.00	-28.20
2494.40	44.35	PK	72	1.2	V	-13.08	31.27	74.00	-42.73
2494.40	37.55	Ave	72	1.2	V	-13.08	24.47	54.00	-29.53

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
368.52	17.93	PK	150	1.1	H	20.56	38.49	46.00	-7.51
368.52	15.63	PK	360	2.0	V	20.56	36.19	46.00	-9.81
4874.00	57.62	PK	224	1.8	H	0.09	57.71	74.00	-16.29
4874.00	46.42	Ave	224	1.8	H	0.09	46.51	54.00	-7.49
7311.00	51.82	PK	116	1.1	H	3.01	54.83	74.00	-19.17
7311.00	40.08	Ave	116	1.1	H	3.01	43.09	54.00	-10.91
9748.00	44.63	PK	120	1.6	H	3.07	47.70	74.00	-26.30
9748.00	35.84	Ave	120	1.6	H	3.07	38.91	54.00	-15.09
2383.54	43.83	PK	301	1.9	V	-13.14	30.69	74.00	-43.31
2383.54	37.43	Ave	301	1.9	V	-13.14	24.29	54.00	-29.71
2498.72	43.53	PK	359	1.3	H	-13.08	30.45	74.00	-43.55
2498.72	36.35	Ave	359	1.3	H	-13.08	23.27	54.00	-30.73

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
368.52	18.75	PK	28	1.7	H	20.56	39.31	46.00	-6.69
368.52	15.24	PK	152	1.3	V	20.56	35.80	46.00	-10.20
4924.00	58.21	PK	188	1.3	H	0.02	58.23	74.00	-15.77
4924.00	47.03	Ave	188	1.3	H	0.02	47.05	54.00	-6.95
7386.00	52.32	PK	98	2.0	H	2.58	54.90	74.00	-19.10
7386.00	41.18	Ave	98	2.0	H	2.58	43.76	54.00	-10.24
2327.64	45.32	PK	48	1.3	V	-13.19	32.13	74.00	-41.87
2327.64	39.26	Ave	48	1.3	V	-13.19	26.07	54.00	-27.93
2368.98	43.23	PK	273	1.6	H	-13.14	30.09	74.00	-43.91
2368.98	38.04	Ave	273	1.6	H	-13.14	24.90	54.00	-29.10
2499.84	42.79	PK	126	2.0	V	-13.08	29.71	74.00	-44.29
2499.84	37.32	Ave	126	2.0	V	-13.08	24.24	54.00	-29.76

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Low Channel 2422MHz									
368.52	15.32	PK	320	1.9	H	25.30	40.62	46.00	-5.38
368.52	13.21	PK	238	1.3	V	25.30	38.51	46.00	-7.49
4844.00	57.62	PK	262	1.1	H	-2.15	55.47	74.00	-18.53
4844.00	46.32	Ave	262	1.1	H	-2.15	44.17	54.00	-9.83
7236.00	53.21	PK	312	1.7	H	-0.17	53.04	74.00	-20.96
7236.00	41.67	Ave	312	1.7	H	-0.17	41.50	54.00	-12.50
2327.15	46.43	PK	324	1.4	V	-13.19	33.24	74.00	-40.76
2327.15	39.51	Ave	324	1.4	V	-13.19	26.32	54.00	-27.68
2370.92	43.42	PK	76	1.5	H	-13.14	30.28	74.00	-43.72
2370.92	37.80	Ave	76	1.5	H	-13.14	24.66	54.00	-29.34
2493.54	42.48	PK	357	1.5	V	-13.08	29.40	74.00	-44.60
2493.54	38.21	Ave	357	1.5	V	-13.08	25.13	54.00	-28.87

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Middle Channel 2437MHz									
368.52	14.68	PK	292	1.5	H	25.30	39.98	46.00	-6.02
368.52	11.52	PK	12	1.9	V	25.30	36.82	46.00	-9.18
4874.00	58.02	PK	309	1.0	H	0.09	58.11	74.00	-15.89
4874.00	46.91	Ave	309	1.0	H	0.09	47.00	54.00	-7.00
7311.00	53.62	PK	243	2.0	H	3.01	56.63	74.00	-17.37
7311.00	42.17	Ave	243	2.0	H	3.01	45.18	54.00	-8.82
9748.00	44.63	PK	70	1.9	H	3.07	47.70	74.00	-26.30
9748.00	34.87	Ave	70	1.9	H	3.07	37.94	54.00	-16.06
2372.00	43.49	PK	12	1.4	V	-13.14	30.35	74.00	-43.65
2372.00	37.77	Ave	12	1.4	V	-13.14	24.63	54.00	-29.37
2486.76	43.16	PK	247	1.6	H	-13.08	30.08	74.00	-43.92
2486.76	38.36	Ave	247	1.6	H	-13.08	25.28	54.00	-28.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: High Channel 2452MHz									
368.52	14.39	PK	136	1.8	H	25.30	39.69	46.00	-6.31
368.52	11.17	PK	35	1.1	V	25.30	36.47	46.00	-9.53
4904.00	58.46	PK	108	1.2	H	0.09	58.55	74.00	-15.45
4904.00	47.36	Ave	108	1.2	H	0.09	47.45	54.00	-6.55
7356.00	53.41	PK	113	1.7	H	2.58	55.99	74.00	-18.01
7356.00	42.38	Ave	113	1.7	H	2.58	44.96	54.00	-9.04
2313.33	45.32	PK	335	1.1	V	-13.19	32.13	74.00	-41.87
2313.33	39.38	Ave	335	1.1	V	-13.19	26.19	54.00	-27.81
2372.95	43.58	PK	12	1.7	H	-13.14	30.44	74.00	-43.56
2372.95	38.11	Ave	12	1.7	H	-13.14	24.97	54.00	-29.03
2490.42	44.18	PK	300	1.6	V	-13.08	31.10	74.00	-42.90
2490.42	38.42	Ave	300	1.6	V	-13.08	25.34	54.00	-28.66

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB558074 D01 DTS Meas Guidance v03r02
Test Mode:	Transmitting

8.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result


Test result plots shown as follows:

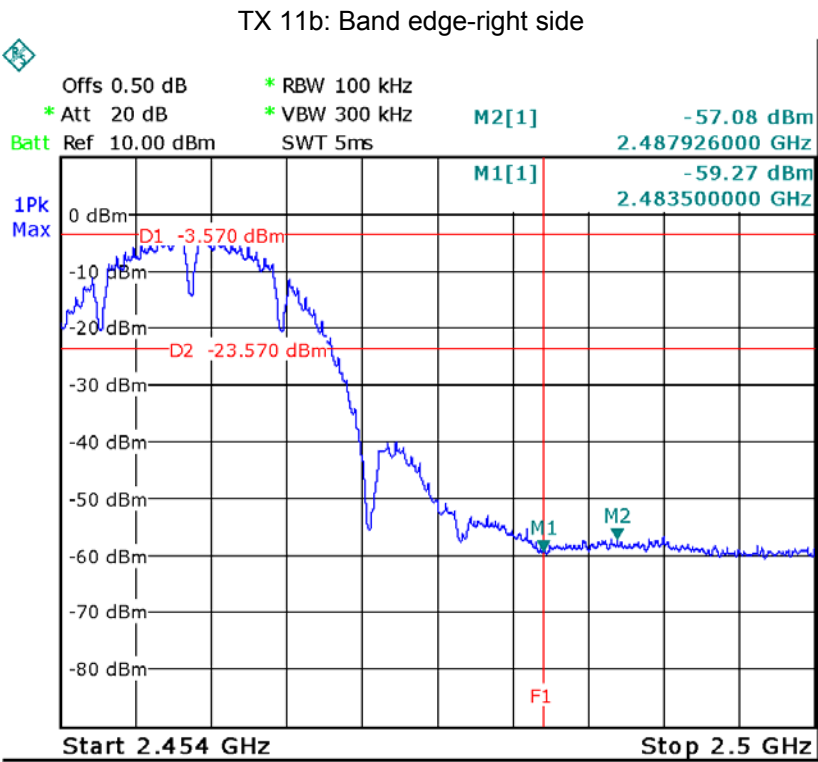
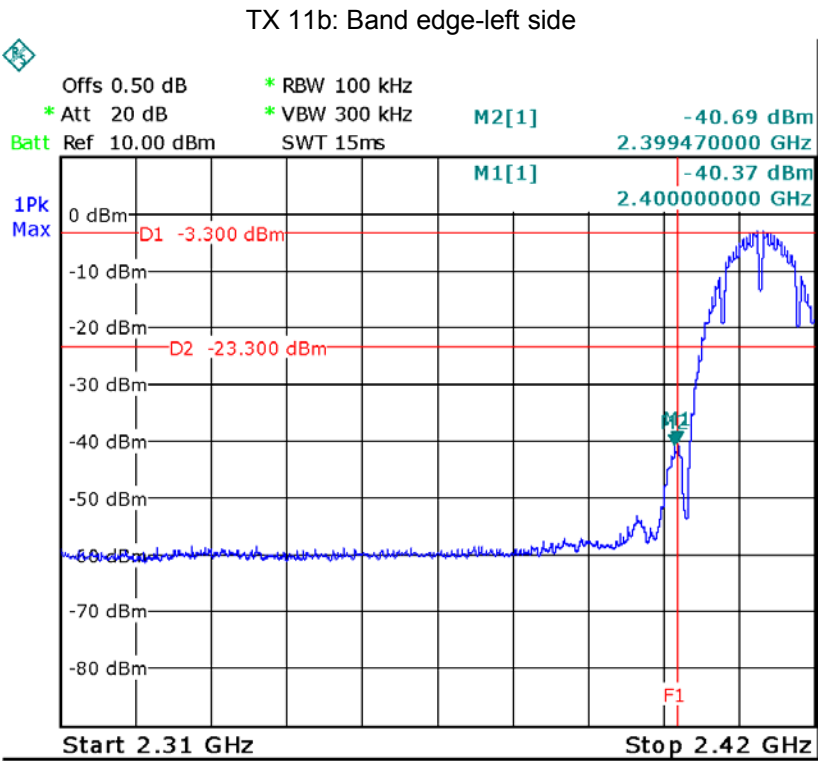




TX 11g: Band edge-left side

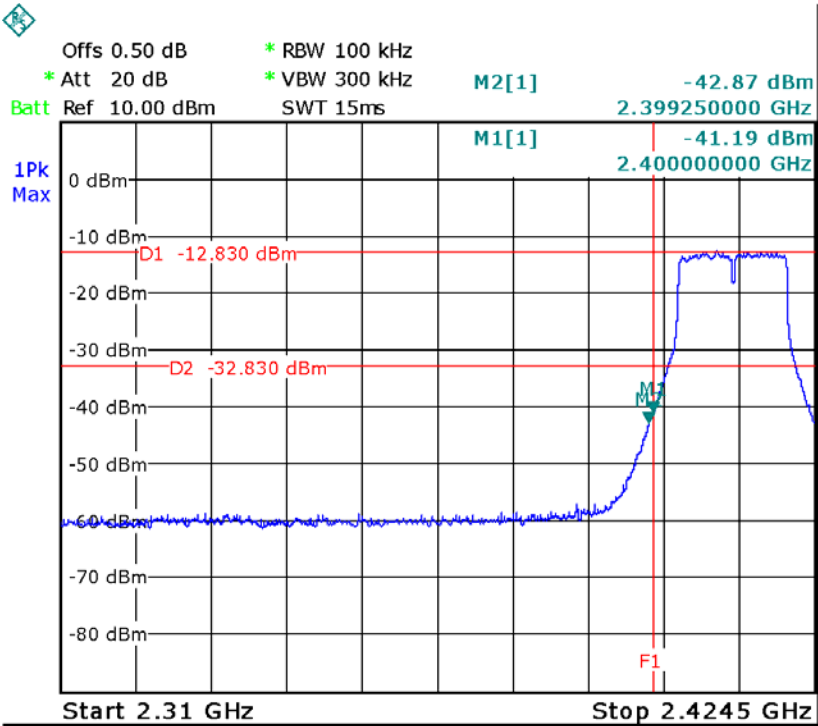

TX 11g: Band edge-right side

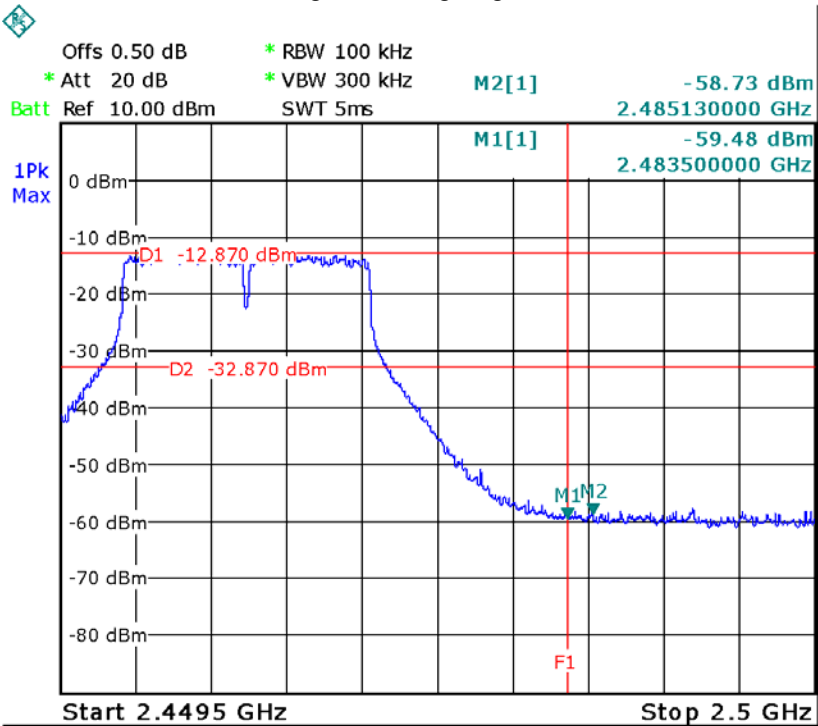

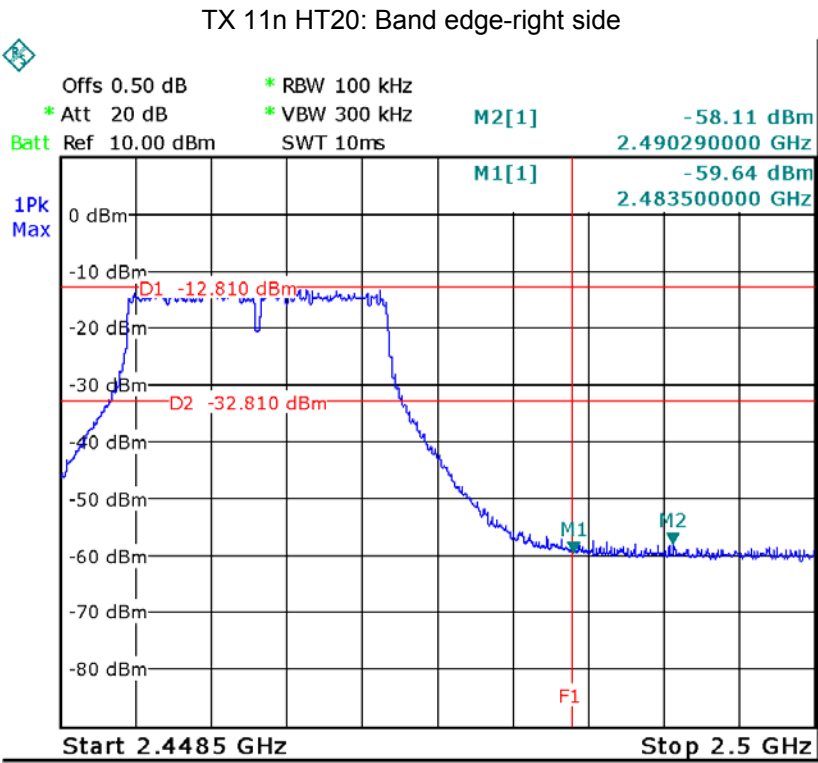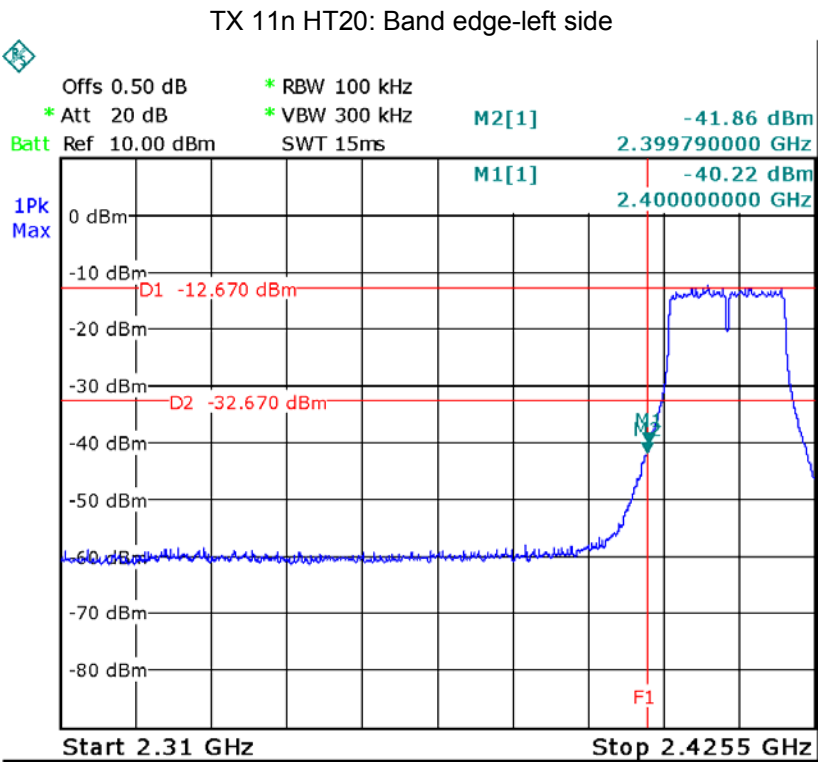

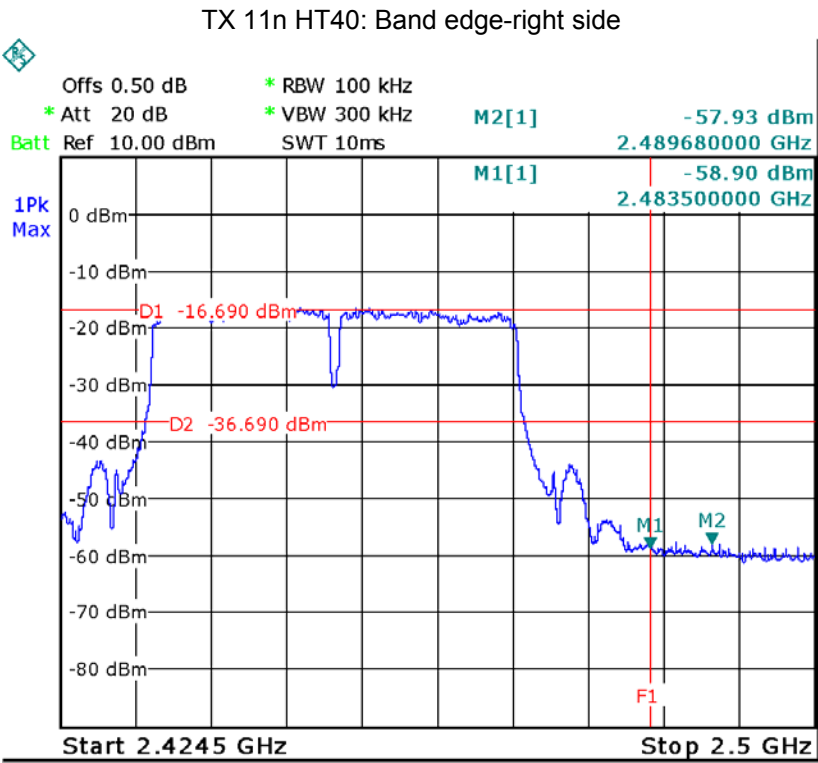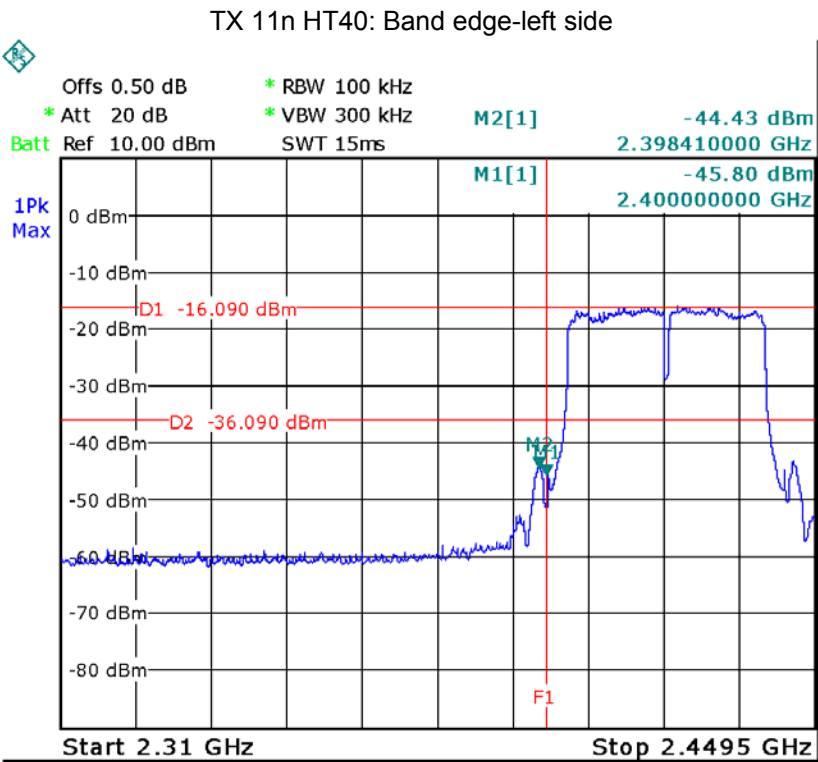

9 6 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB558074 D01 DTS Meas Guidance v03r02


9.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



9.2 Test Result:



Operation mode	Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11
	10.06	10.06	10.06
TX 11g	Channel 1	Channel 6	Channel 11
	16.62	16.62	16.62
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.84	17.84	17.84
TX 11n HT40	Channel 3	Channel 6	Channel 9
	36.56	36.56	36.56



Test result plot as follows:


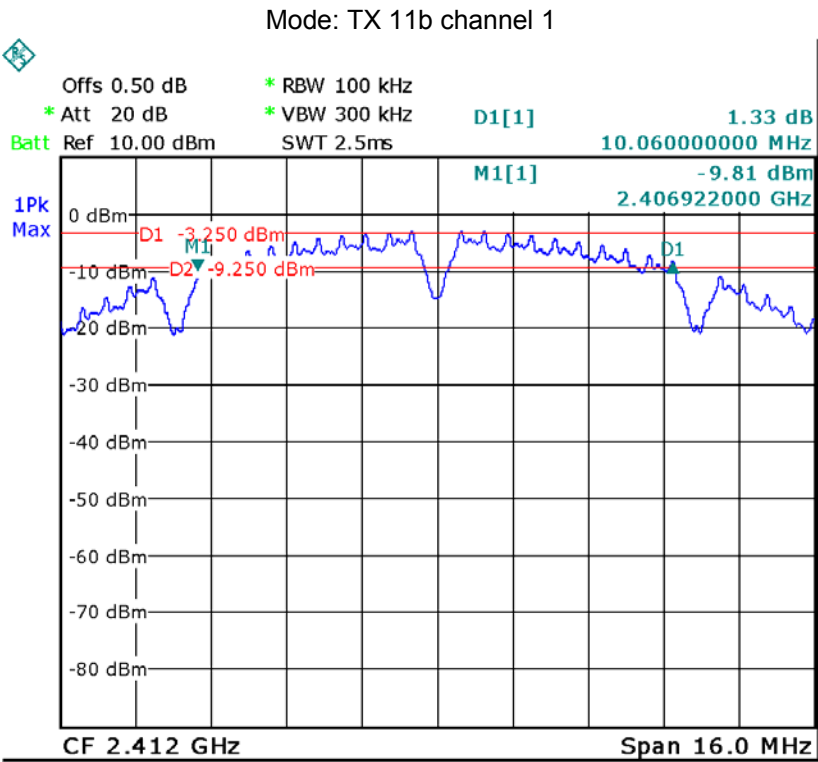


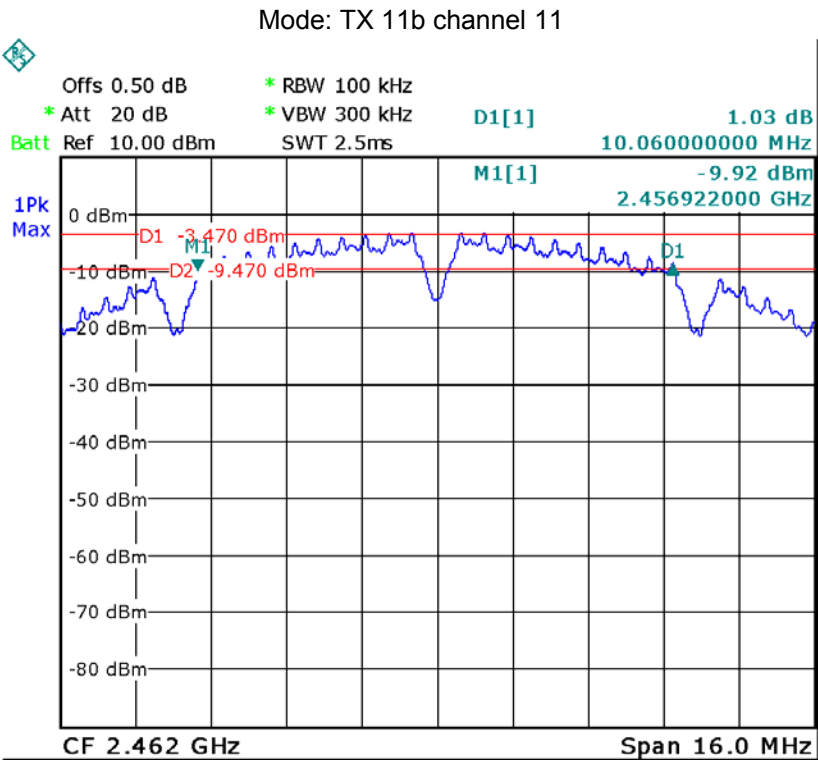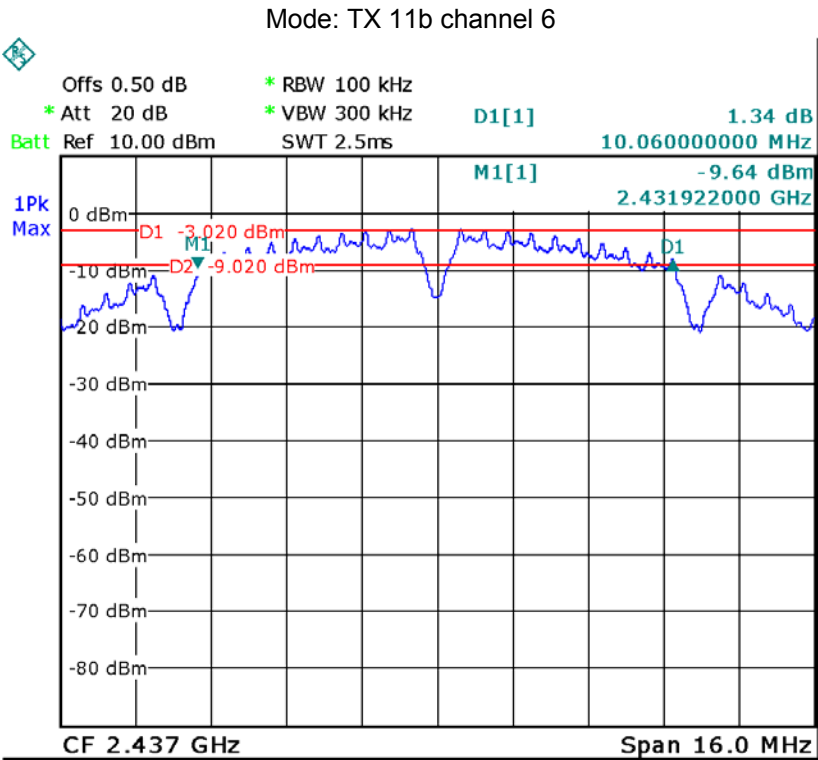


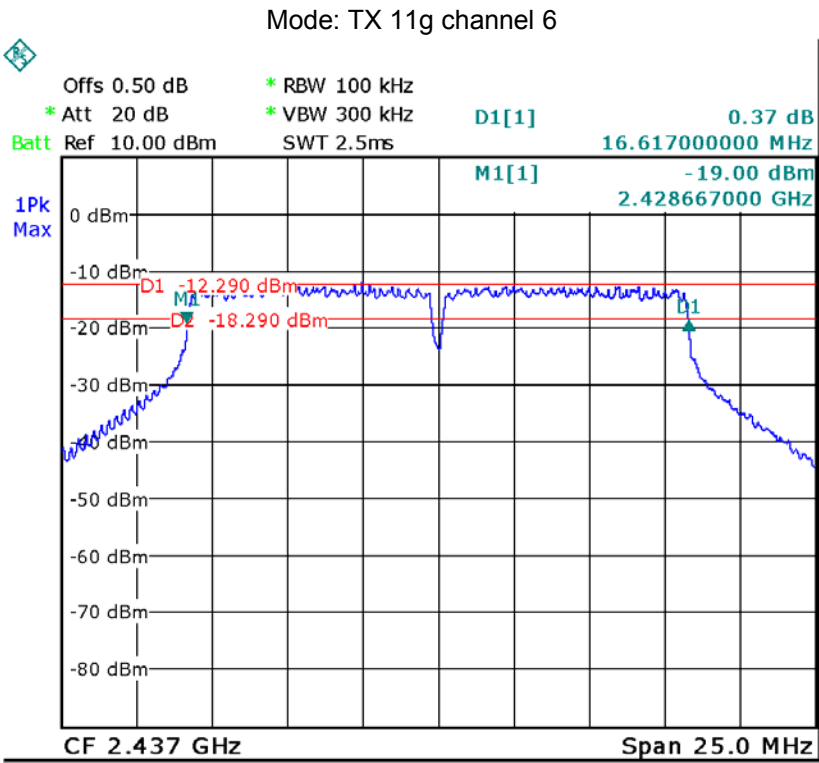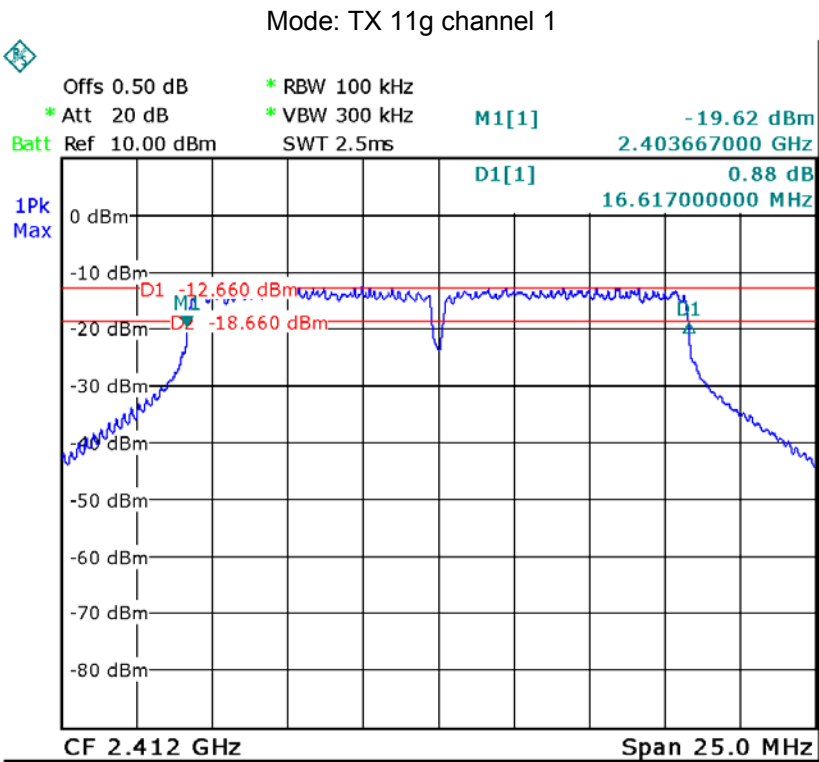

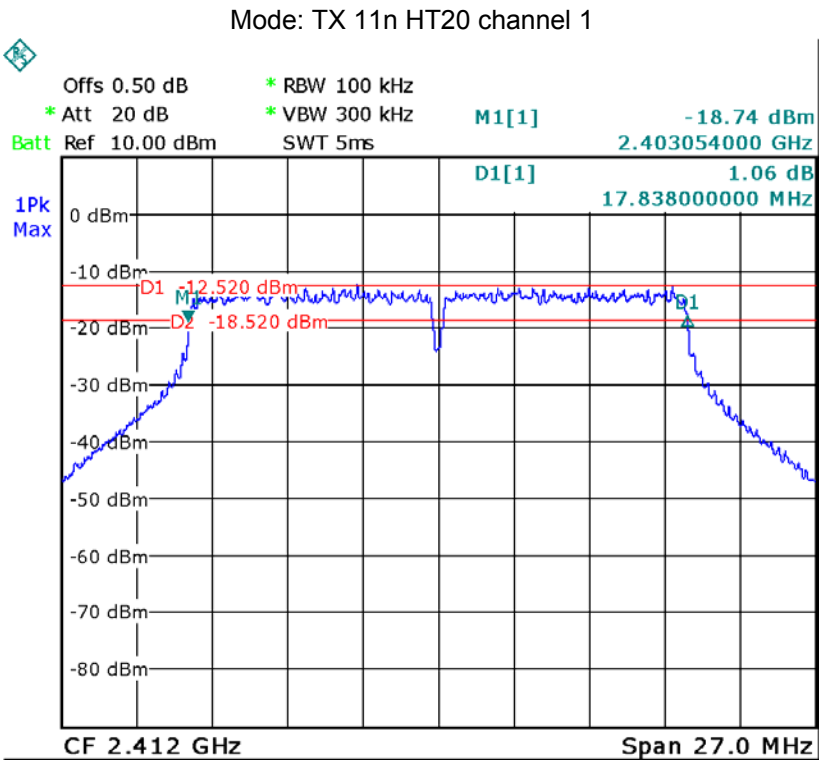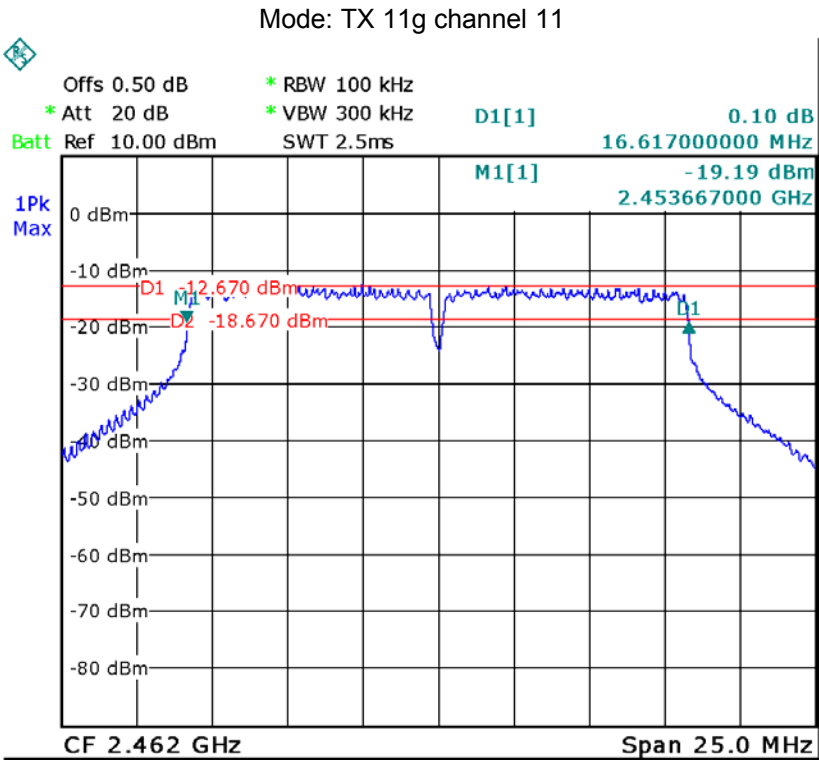

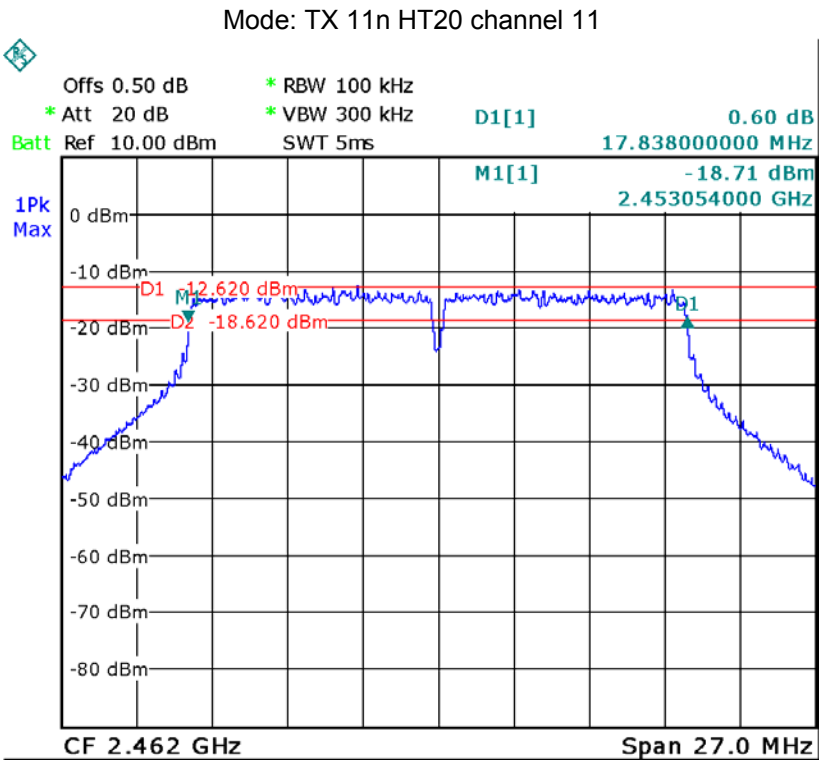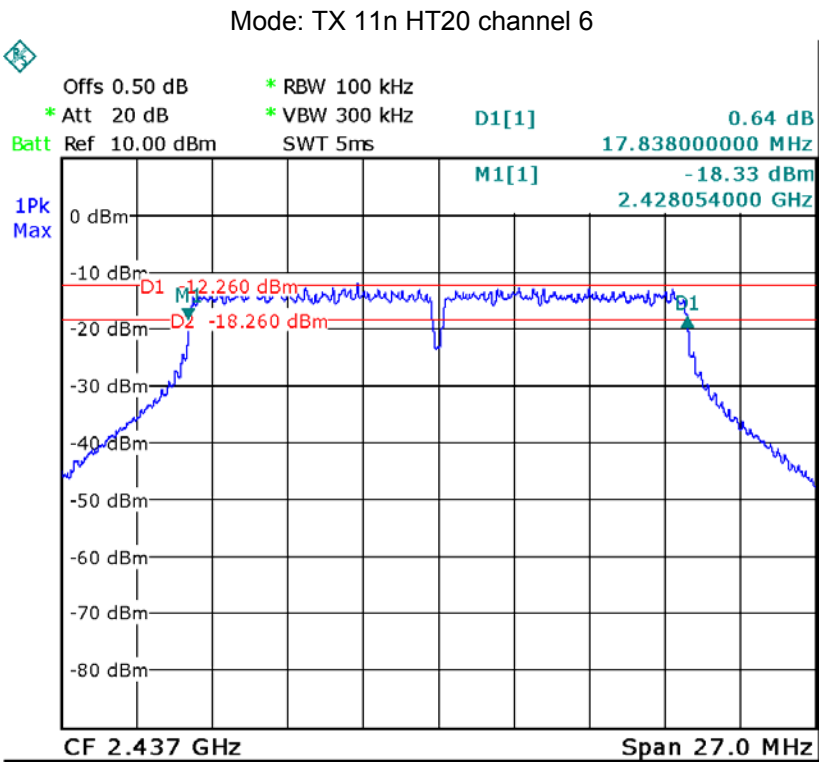

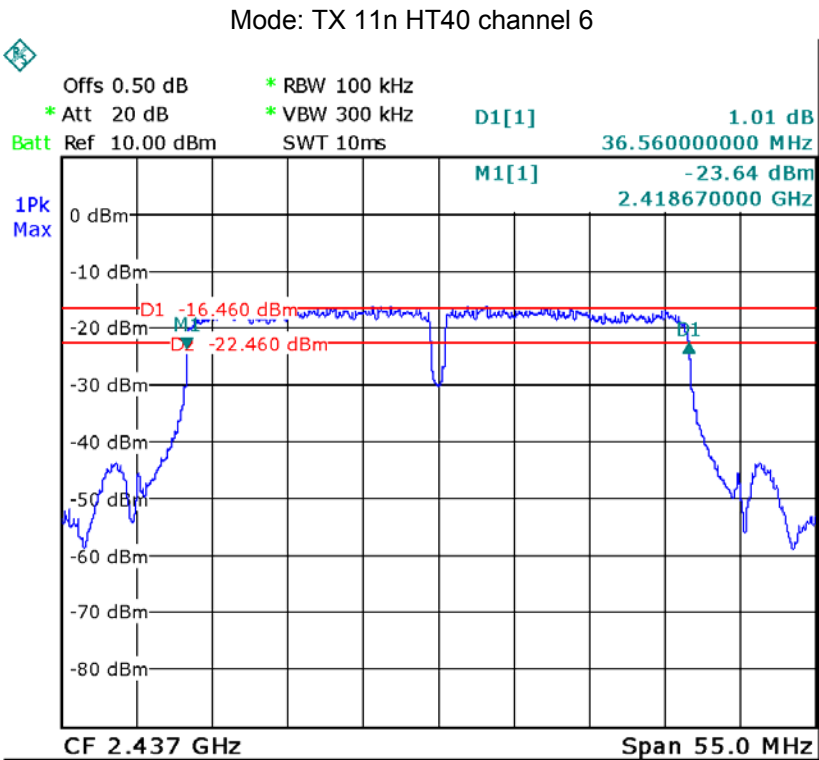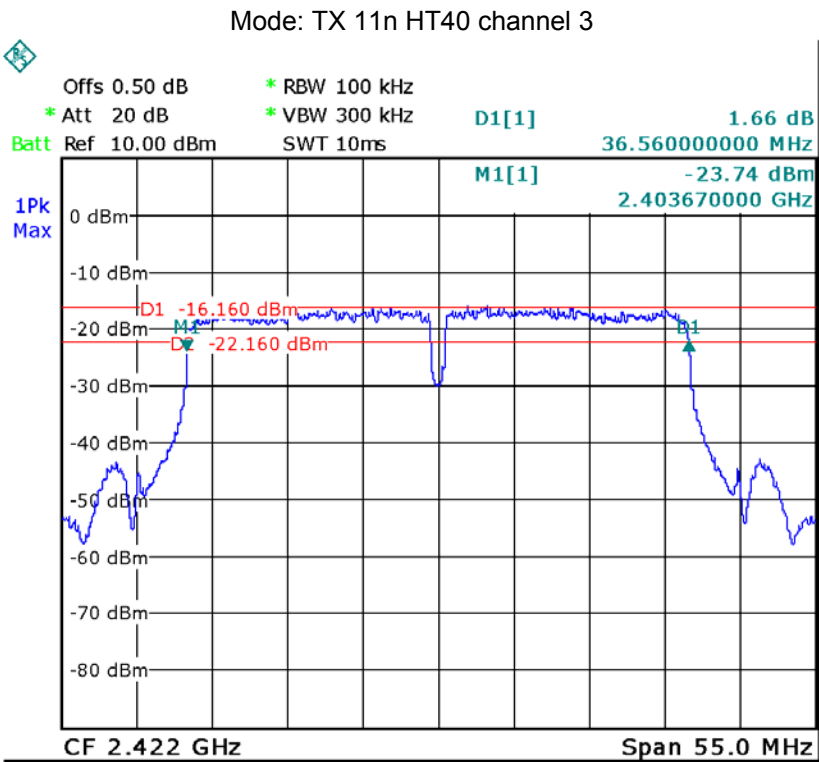

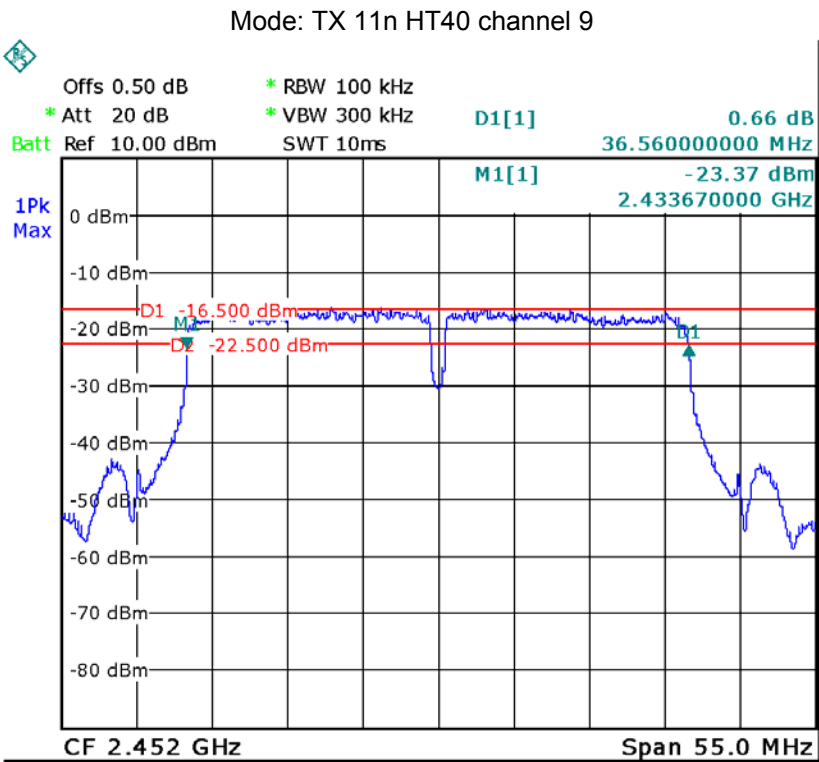

10 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB558074 D01 DTS Meas Guidance v03r02

10.1 Test Procedure:

KDB558074 D01 DTS Meas Guidance v03r02 section 9.1.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



10.2 Test Result:



Test mode :TX 11b		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.40	9.65	9.27
Limit: 1W/30dBm		
1W/30dBm		



Test mode :TX 11g		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.25	9.51	9.07
Limit		
1W/30dBm		



Test mode :TX 11n HT20		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.33	9.55	9.18
Limit		
1W/30dBm		



Test mode : TX 11n HT40		
10 Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.58	9.57	9.37
Limit		
1W/30dBm		

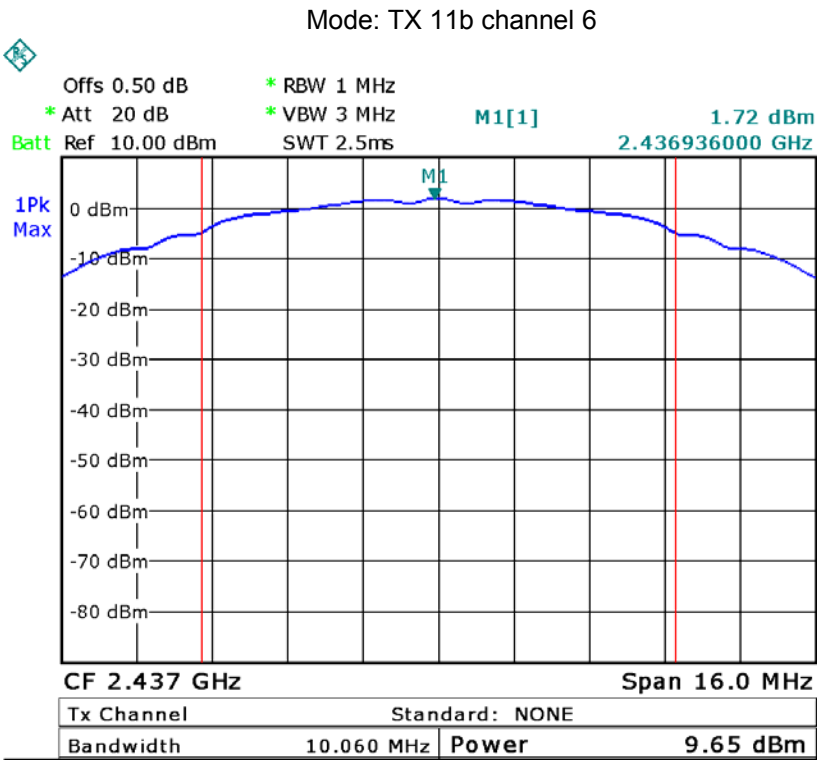
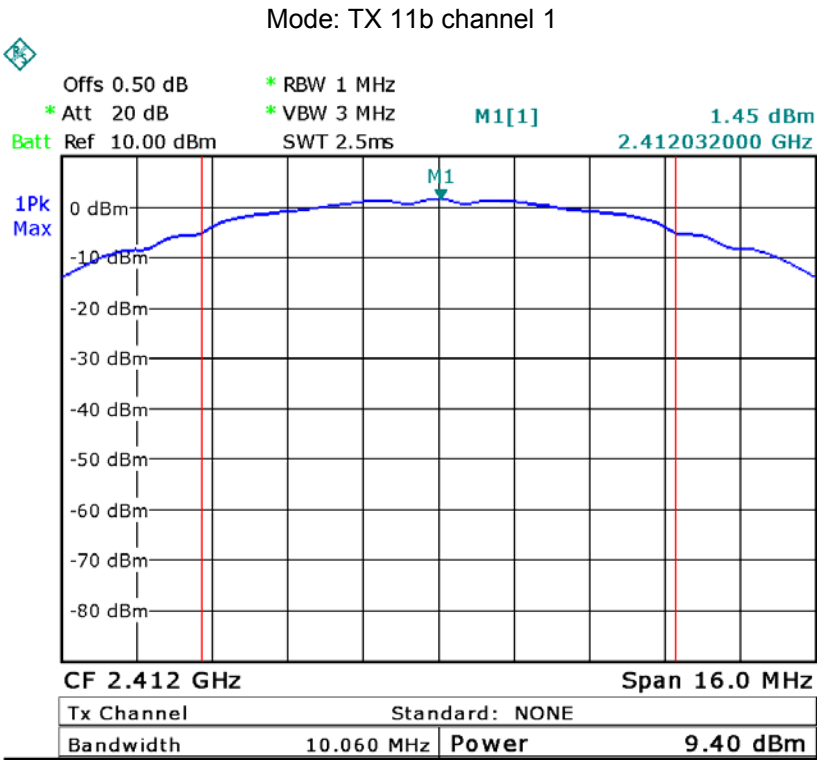


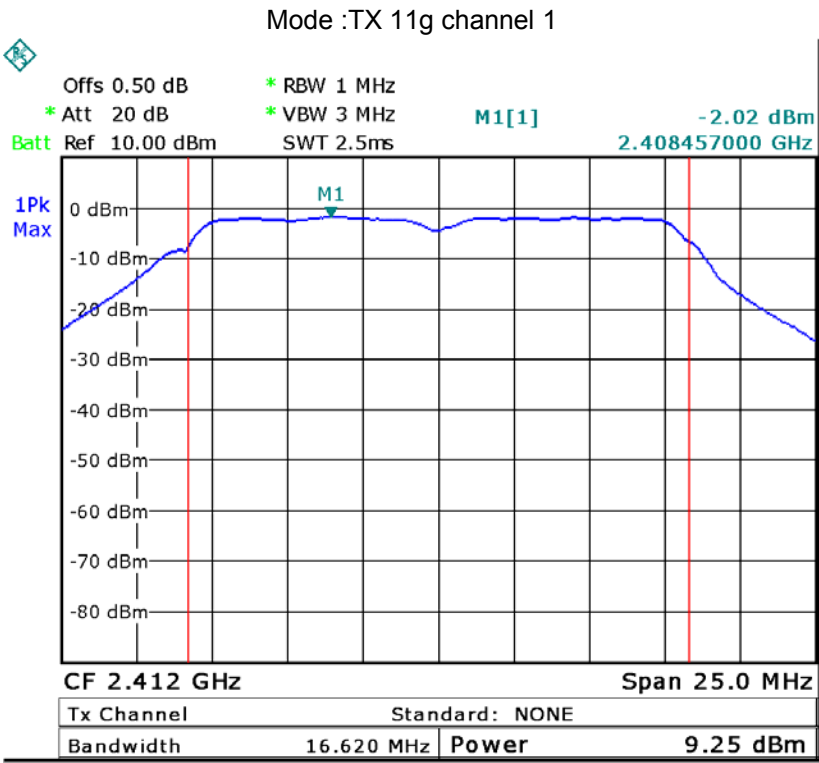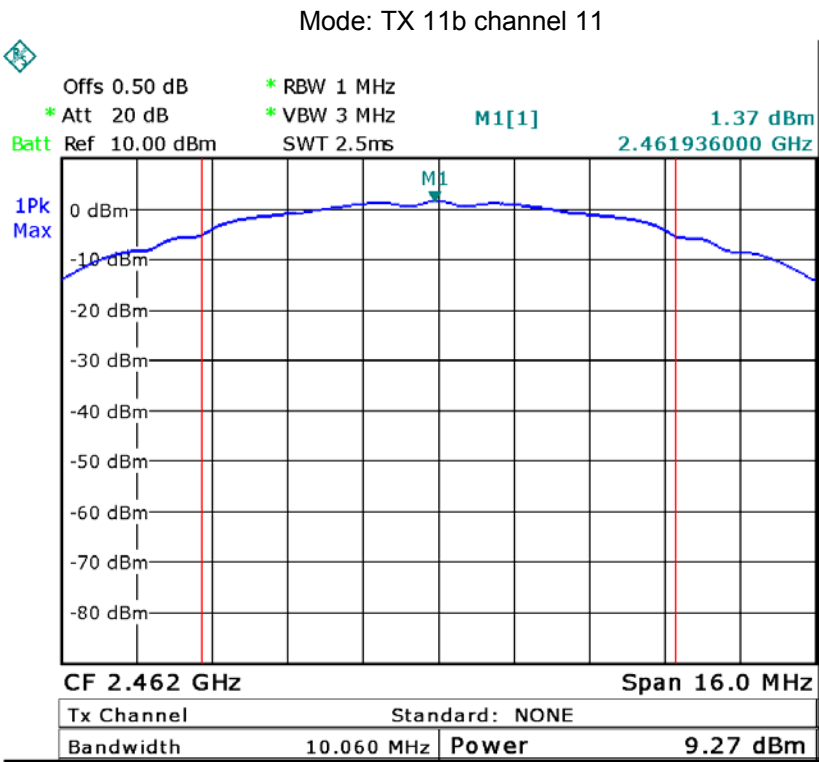

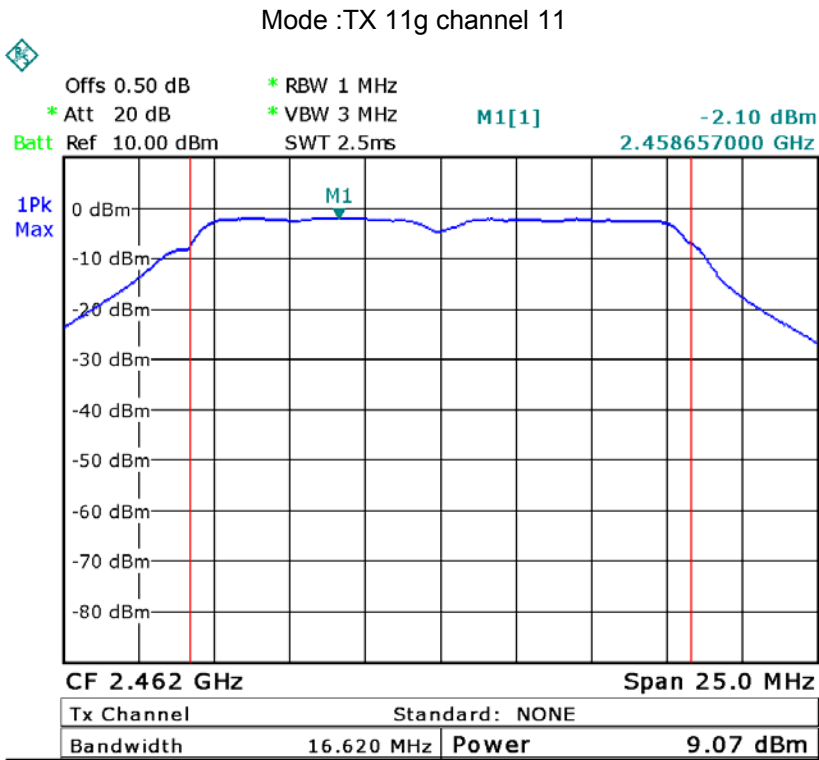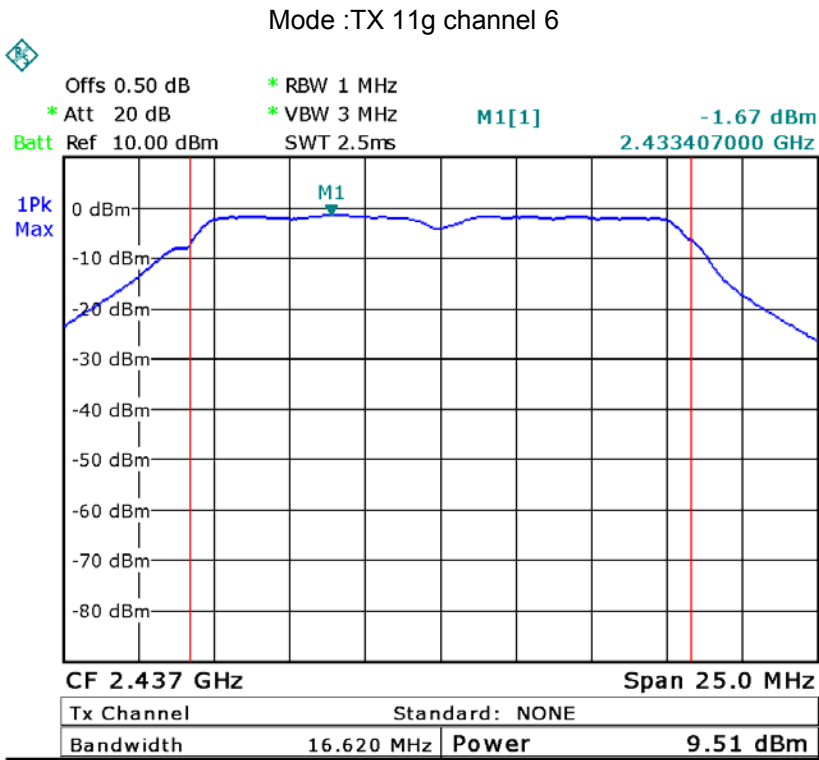

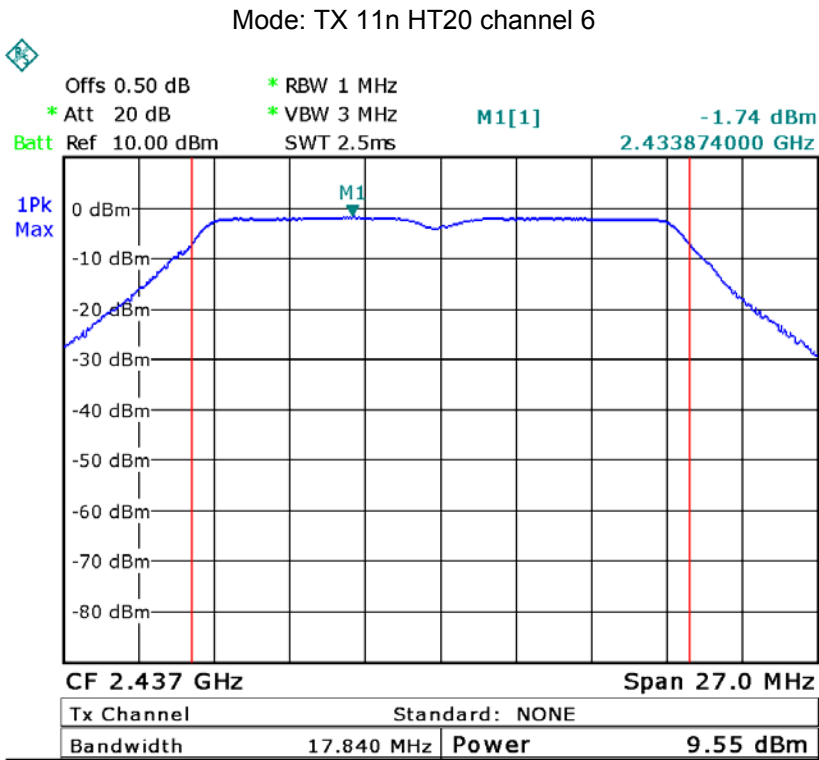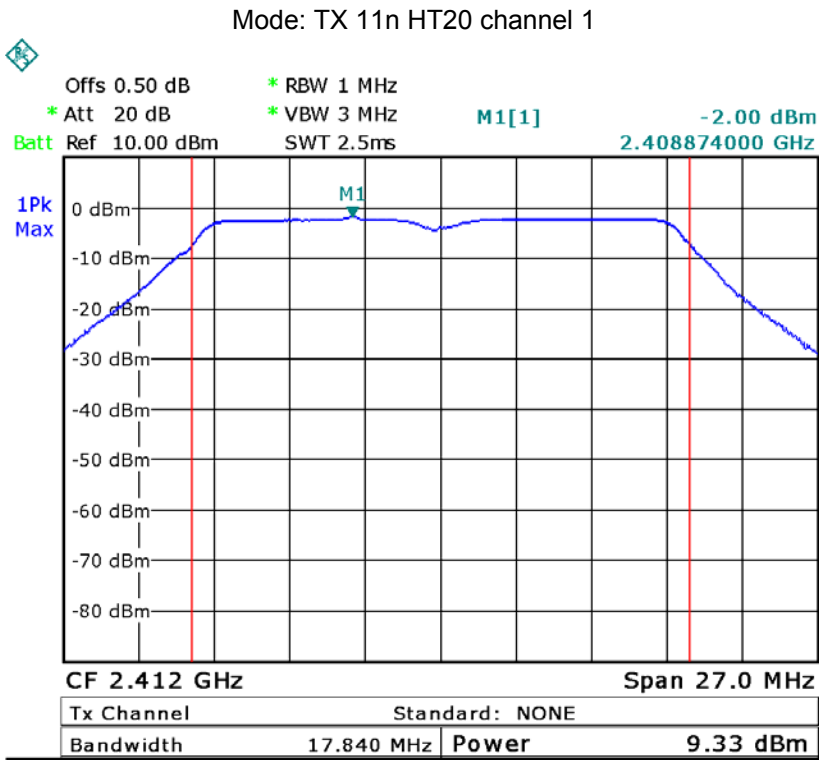

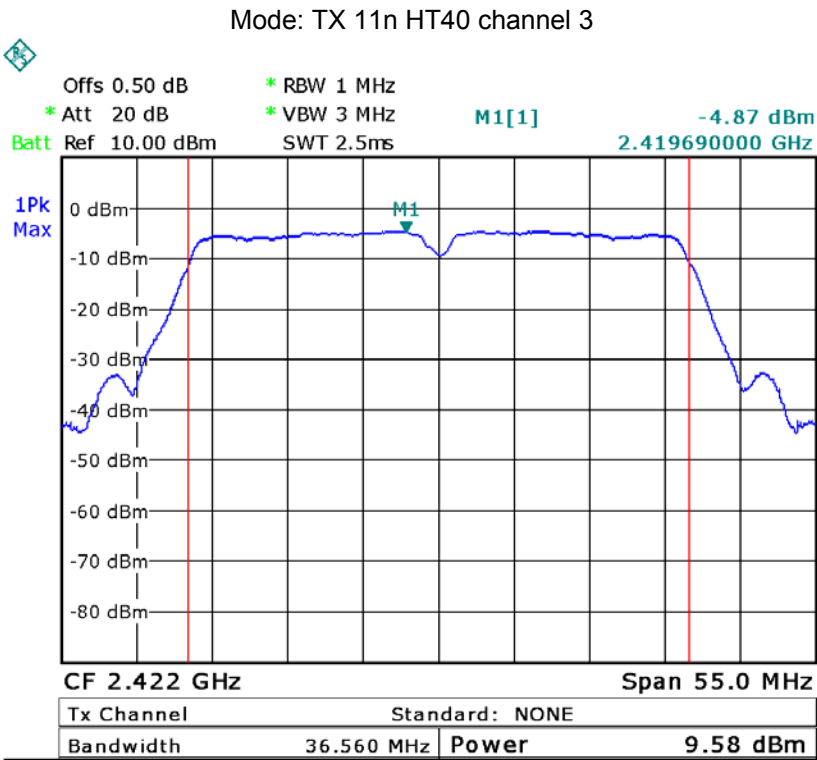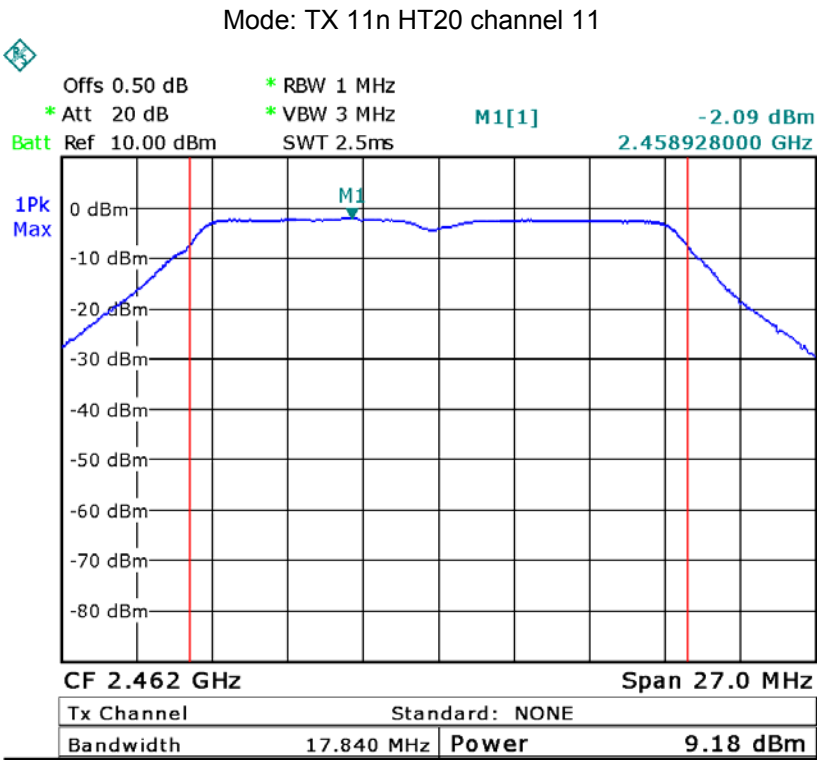

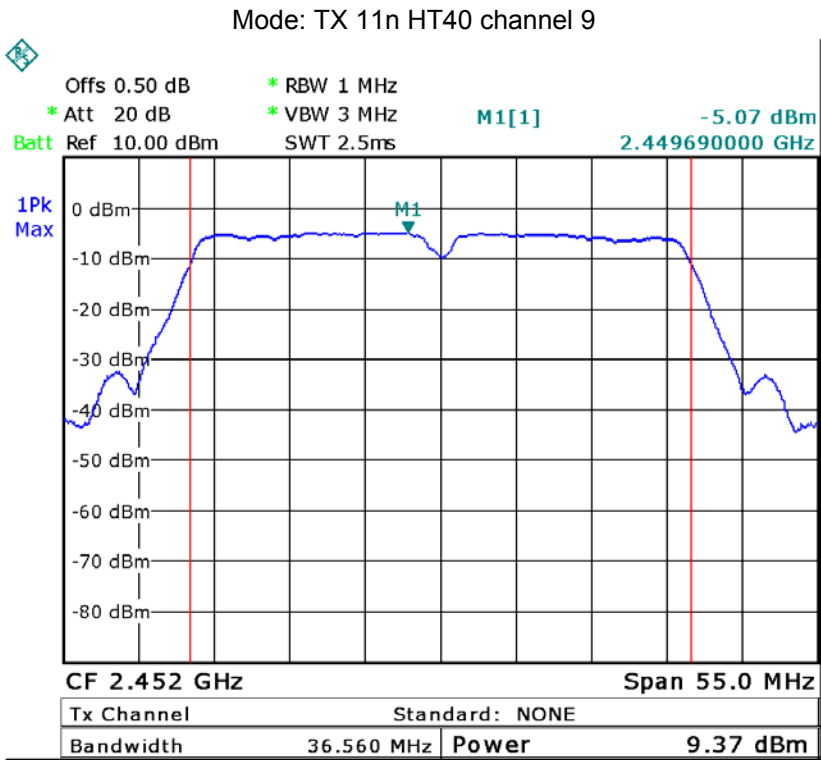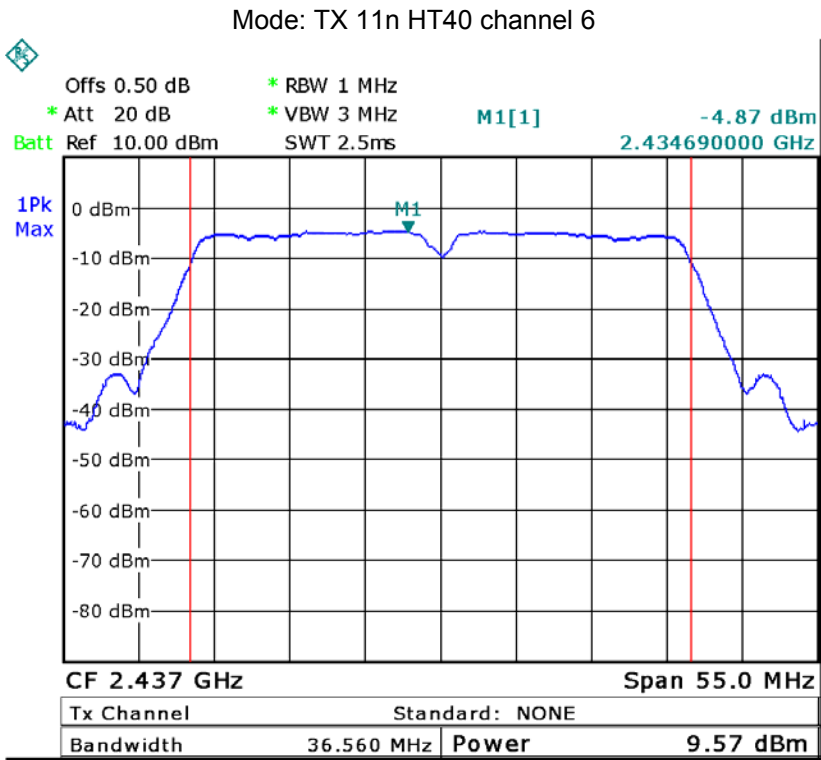

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB558074 D01 DTS Meas Guidance v03r02

11.1 Test Procedure:

KDB558074 D01 DTS Meas Guidance v03r02 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



11.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-23.45	-23.32	-23.77
Limit: 1W/30dBm		
8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-27.40	-27.07	-27.59
Limit		
8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-26.89	-26.59	-26.94
Limit		
8dBm per 3kHz		



Test mode : TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-29.11	-28.70	-29.28
Limit		
8dBm per 3kHz		

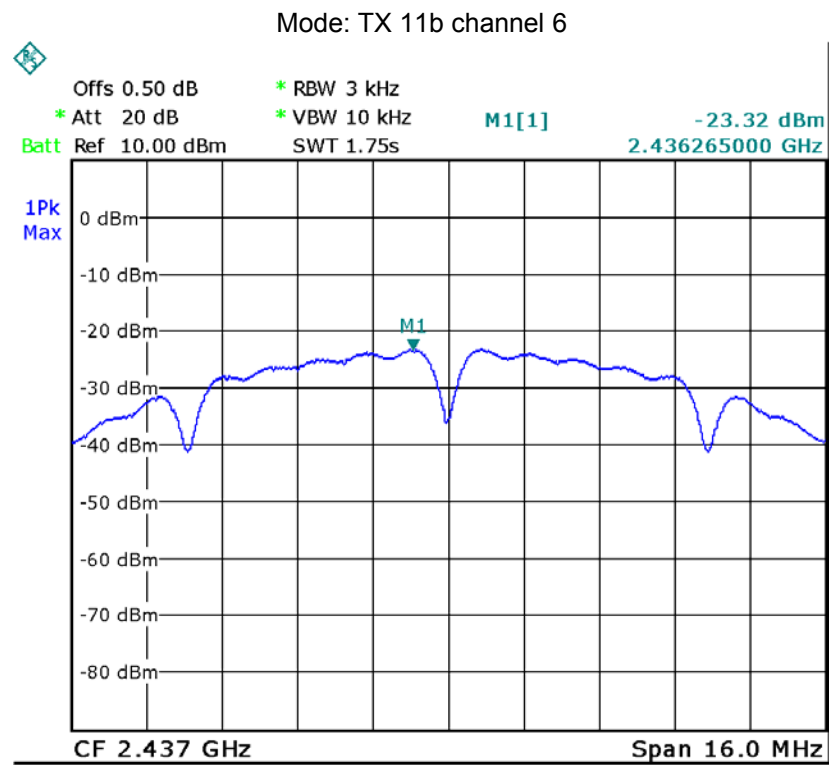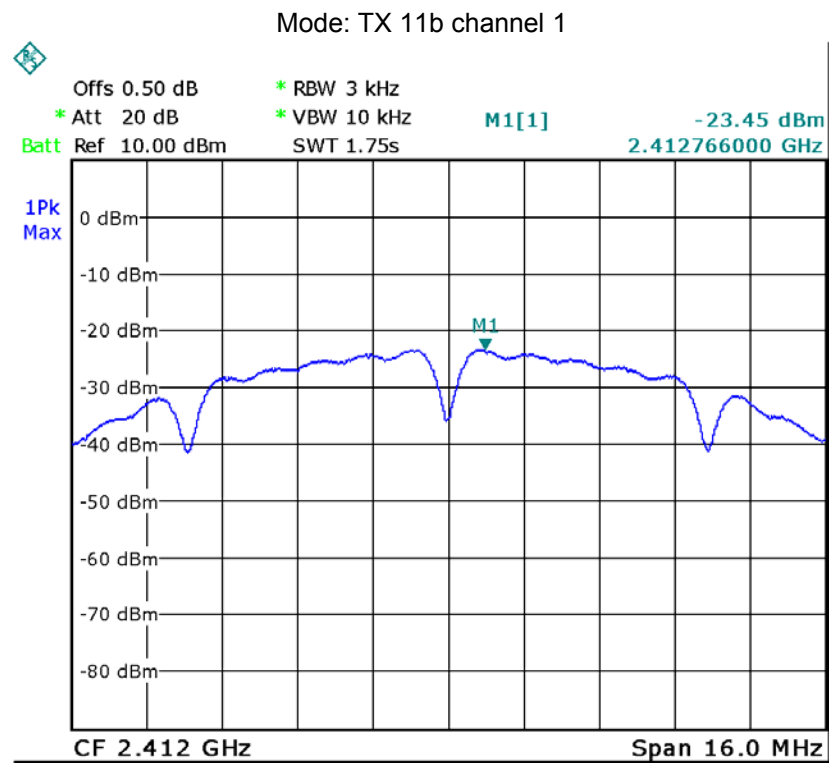

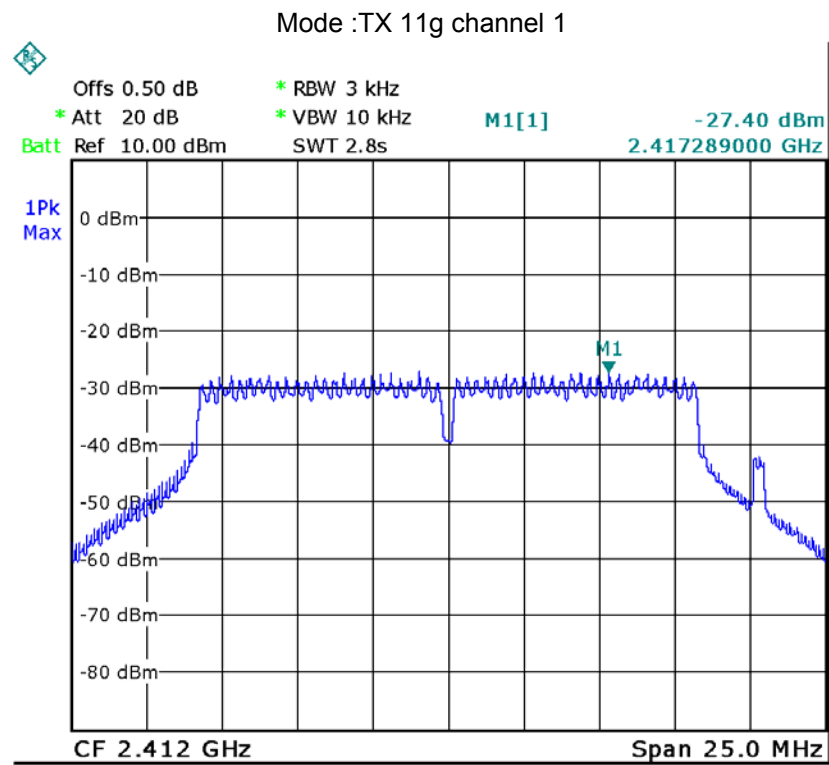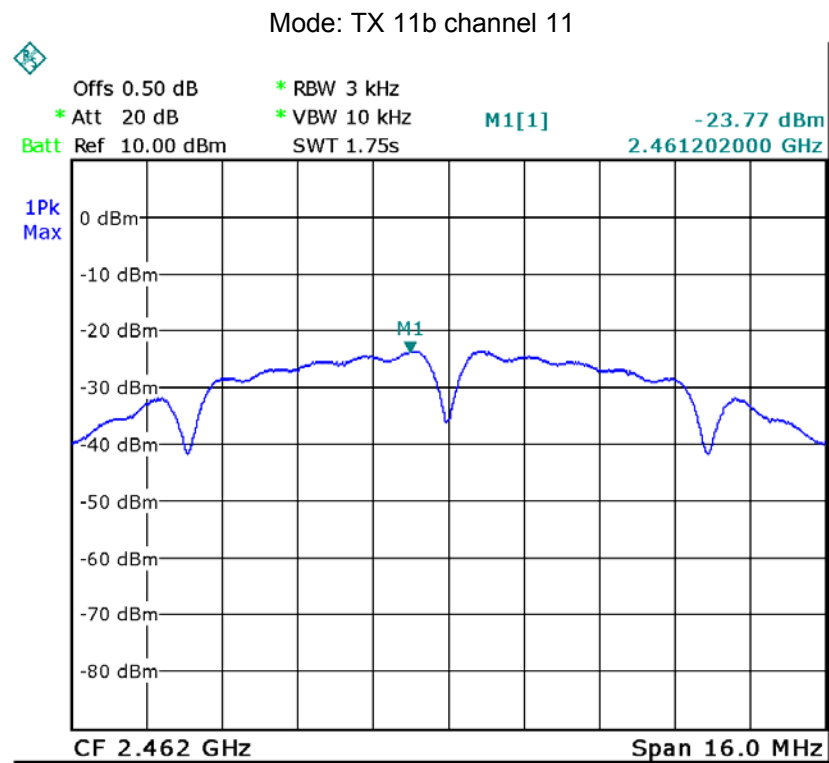


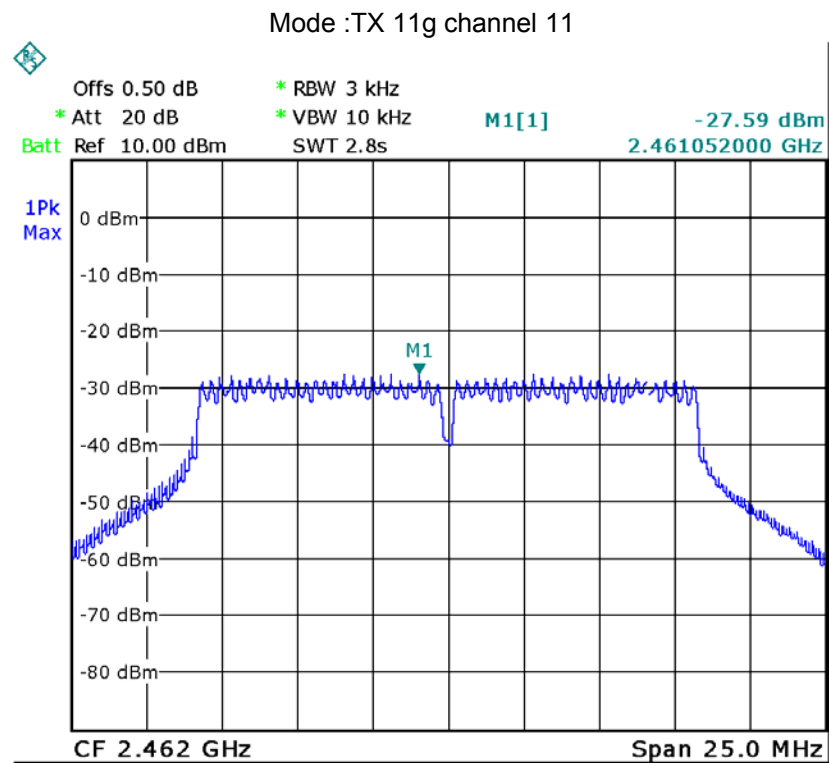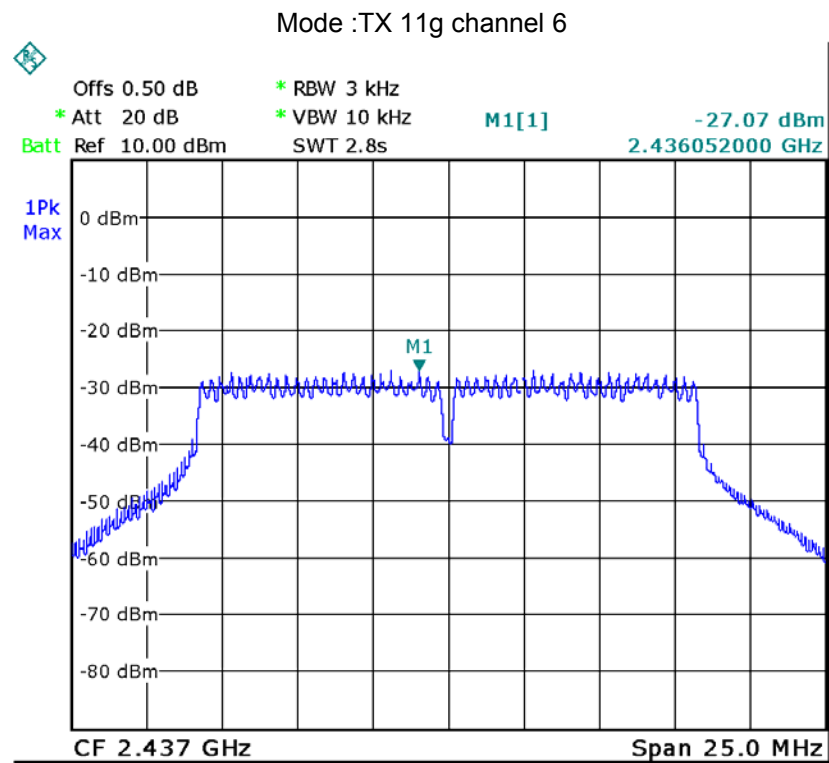

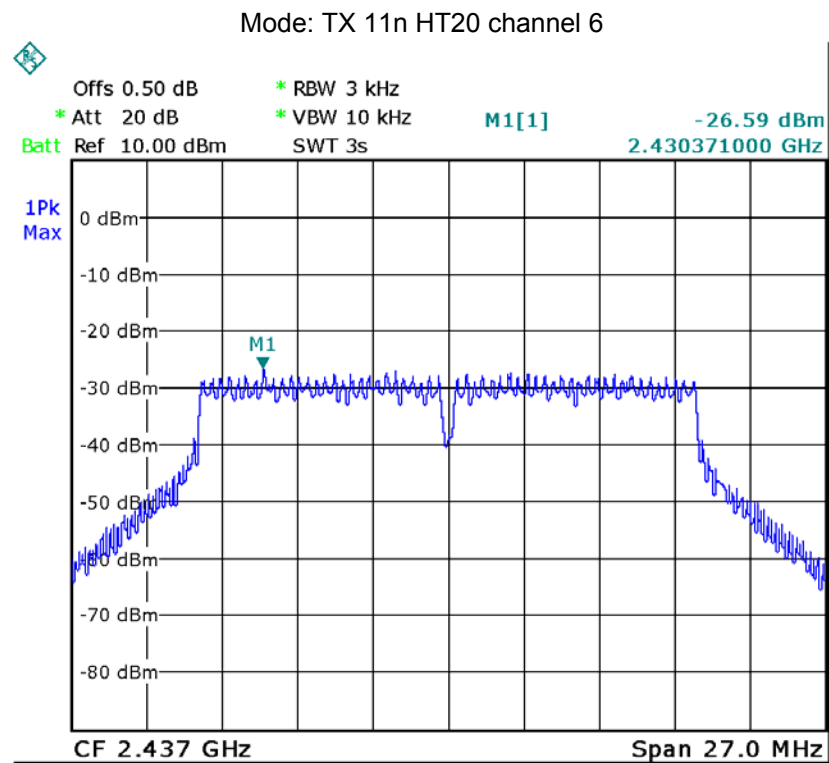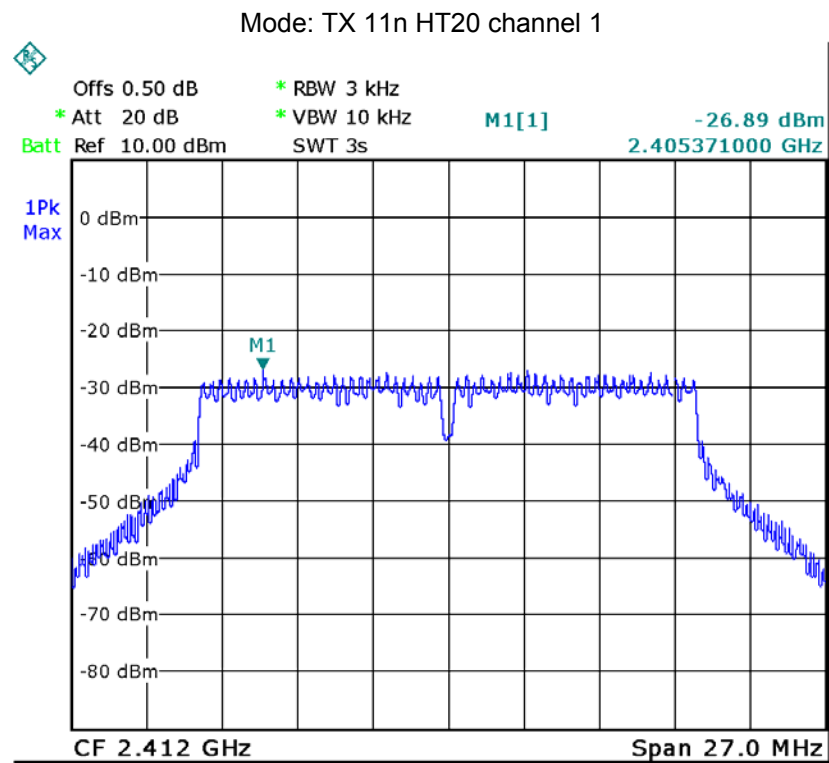


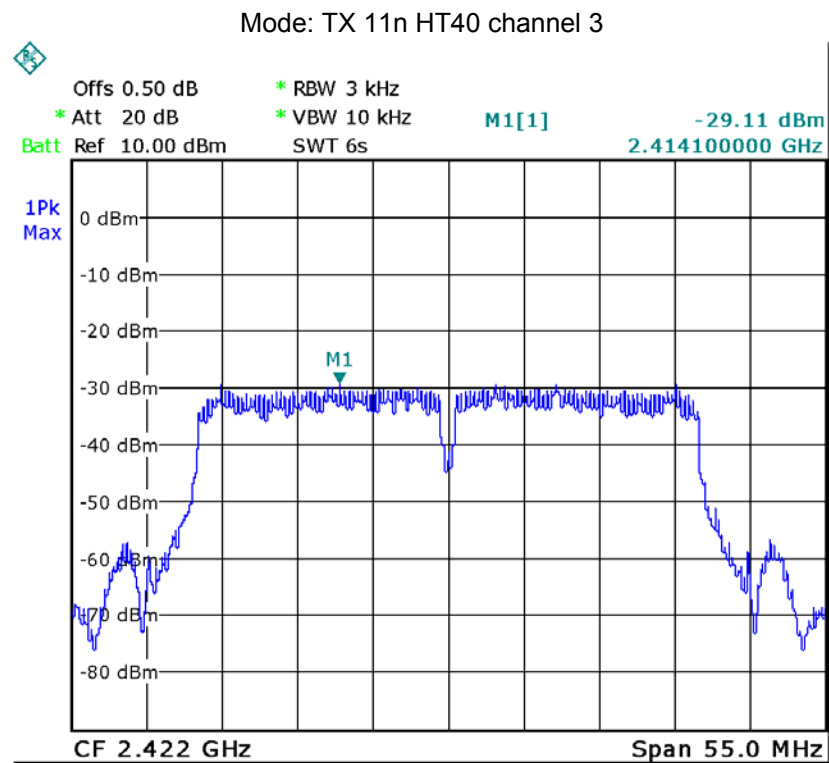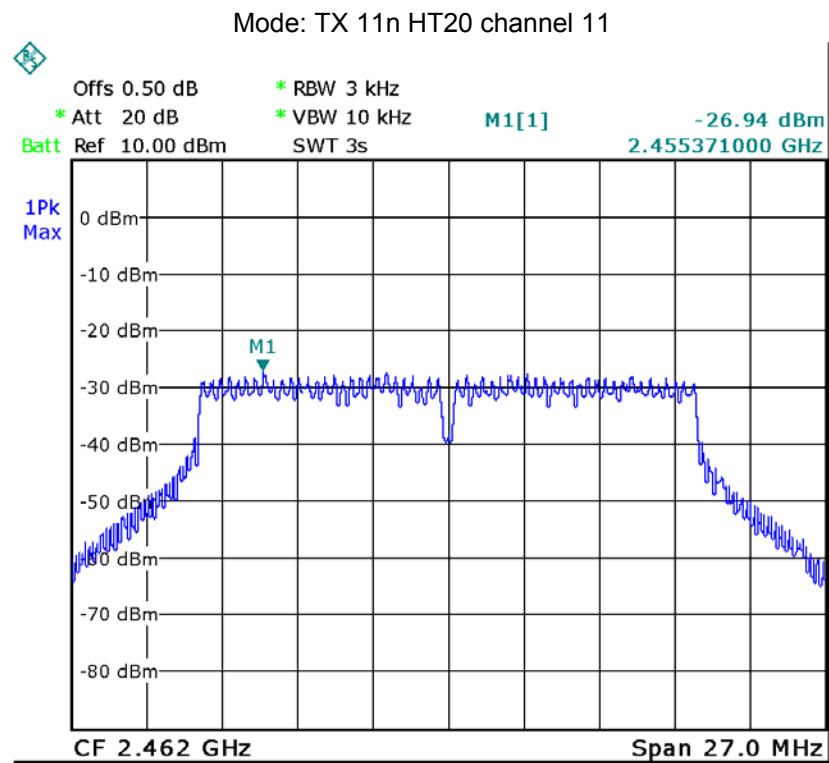

Mode: TX 11n HT40 channel 6

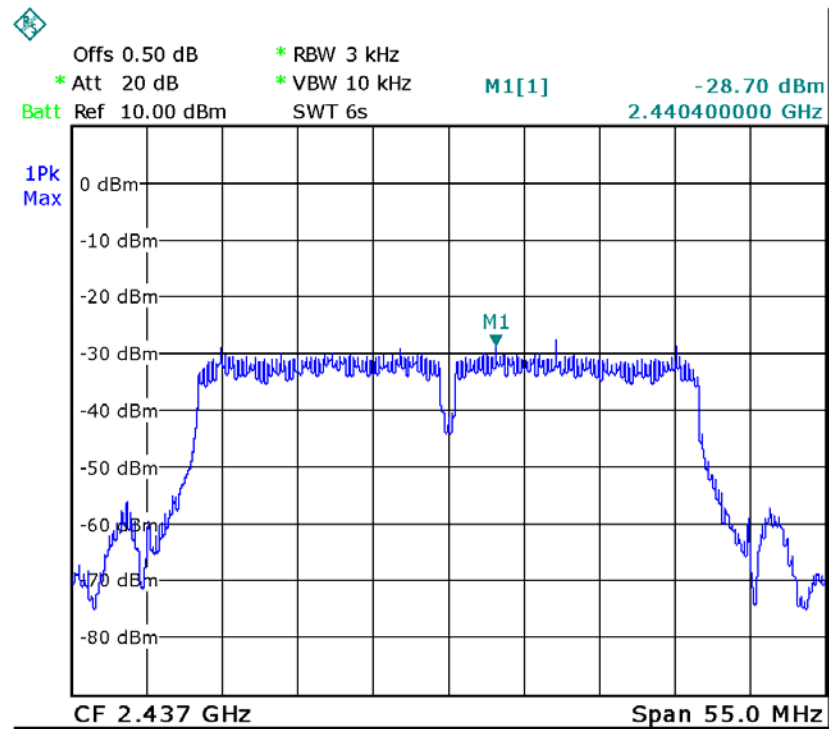

Mode: TX 11n HT40 channel 9

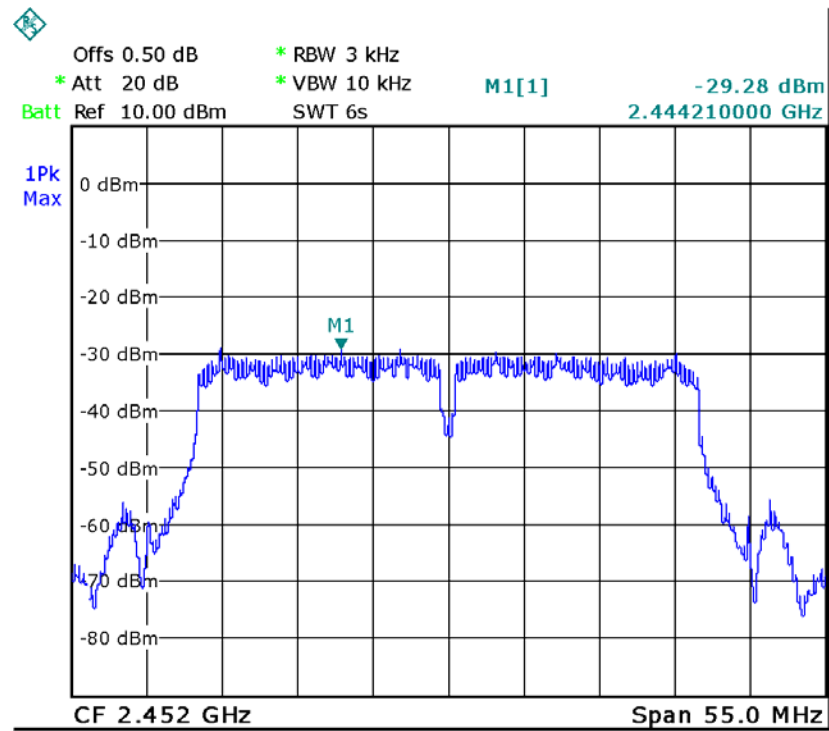

12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a internal integrated antenna fulfill the requirement of this section.

13 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method KDB 447498 D01 General RF Exposure Guidance v05

13.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

13.2 The procedures / limit

Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds(mW)
9.65	9.226	9.226	5	10

Remark: Max. duty factor is 100%

Calculation formula: Source-based time-averaged maximum conducted output power(mW) = Conducted peak power(mW) * Duty factor


14 Photographs – Model PT-700D Test Setup

14.1 Conducted Emission




14.2 Radiated Emission


Test frequency below 30MHz

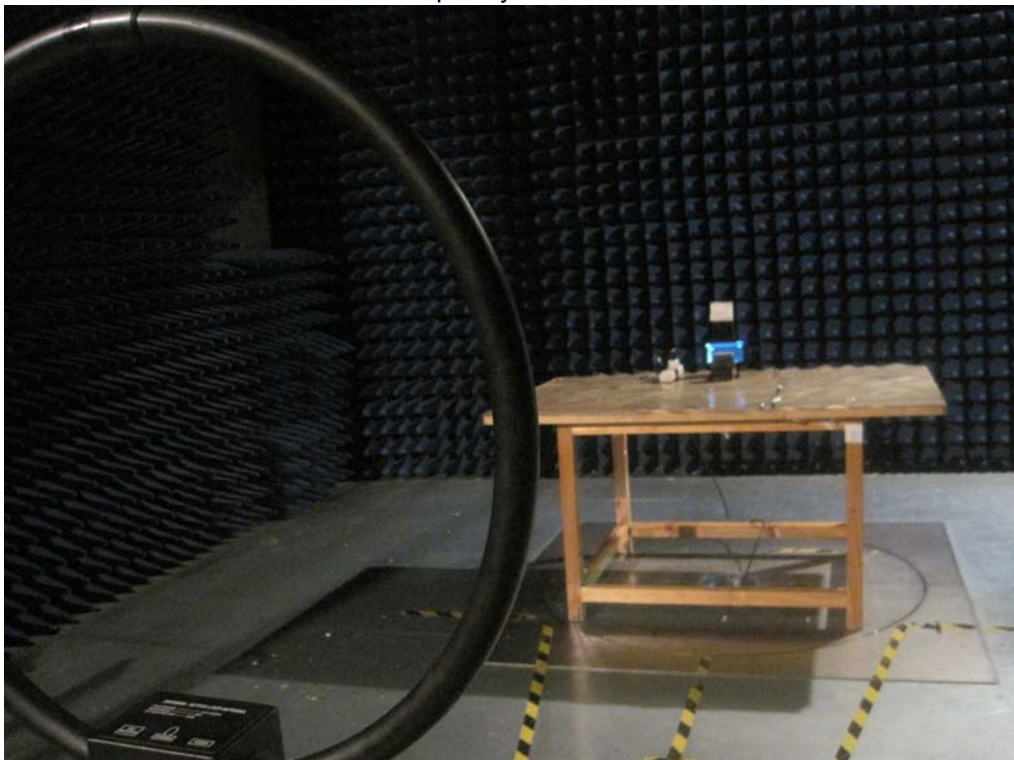

Test frequency from 30MHz to 1GHz

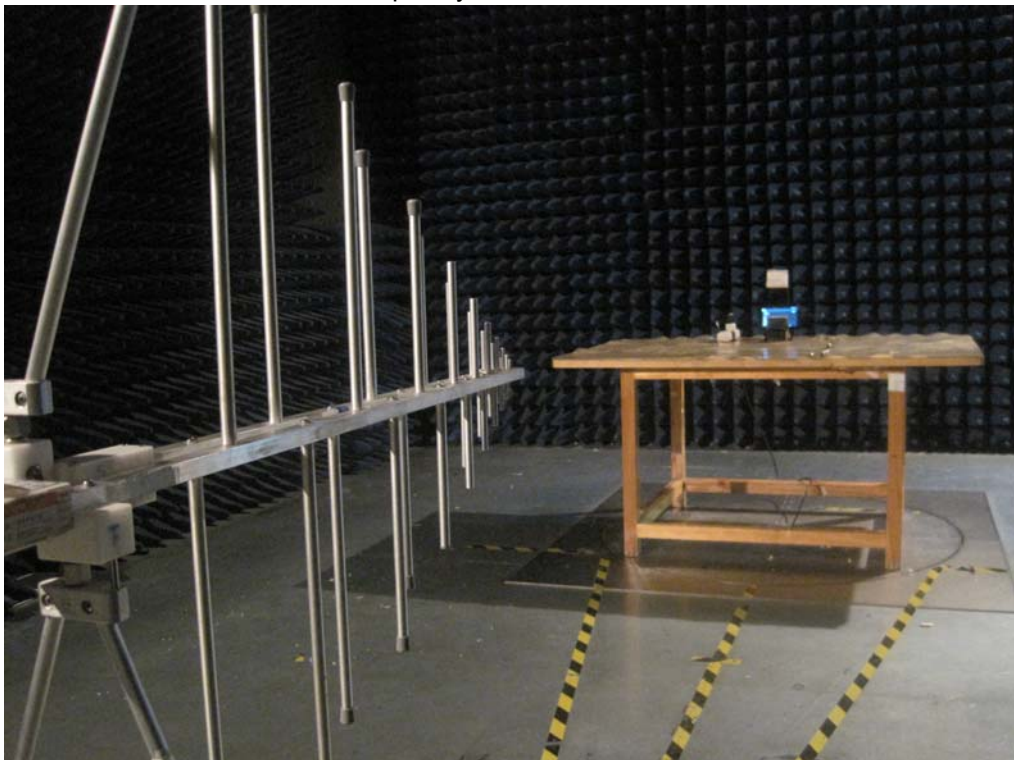

Test frequency above 1GHz

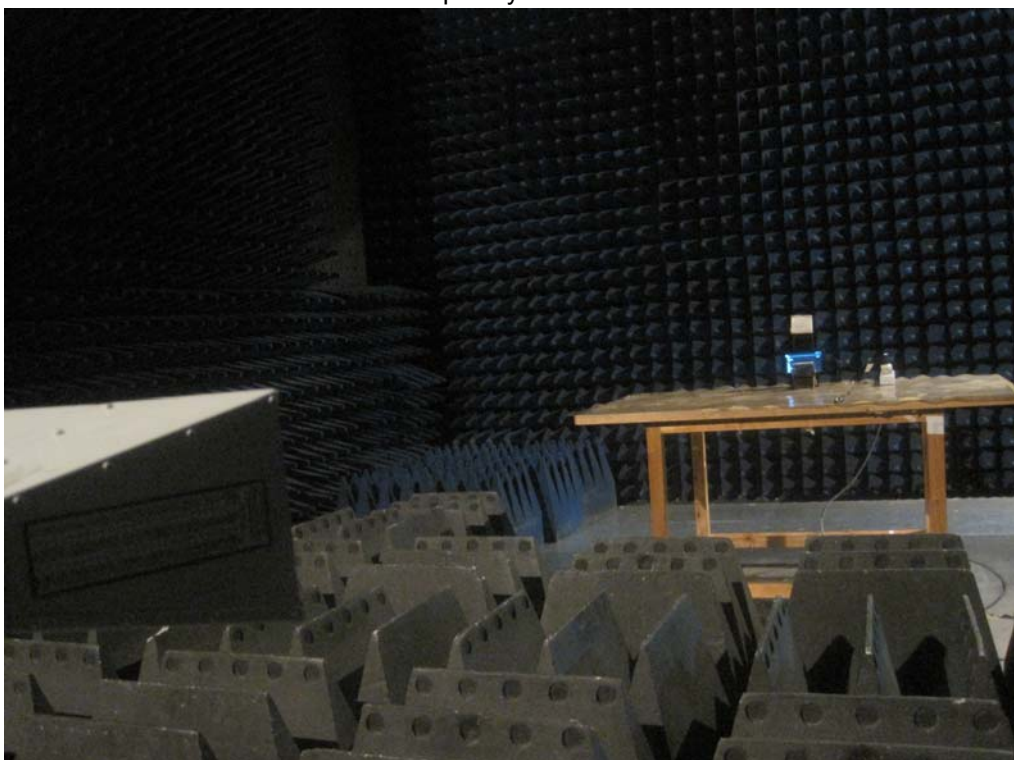

15 Photographs - Constructional Details

15.1 Model PT-700D –External View















15.2 Model PT-700D – Internal View



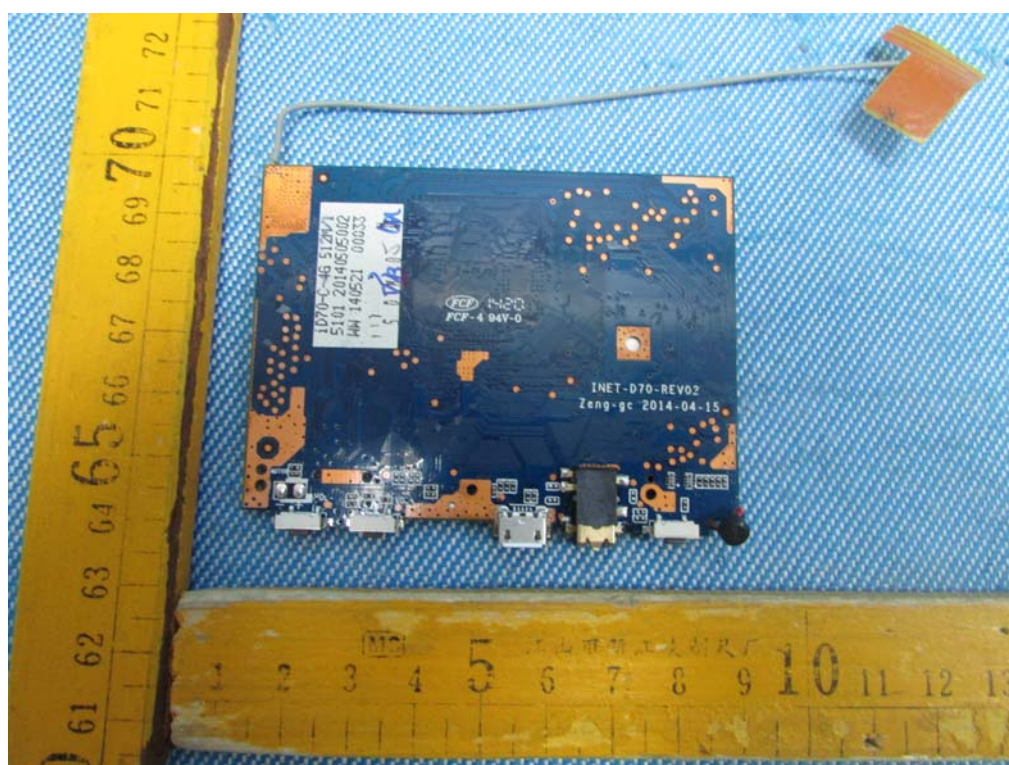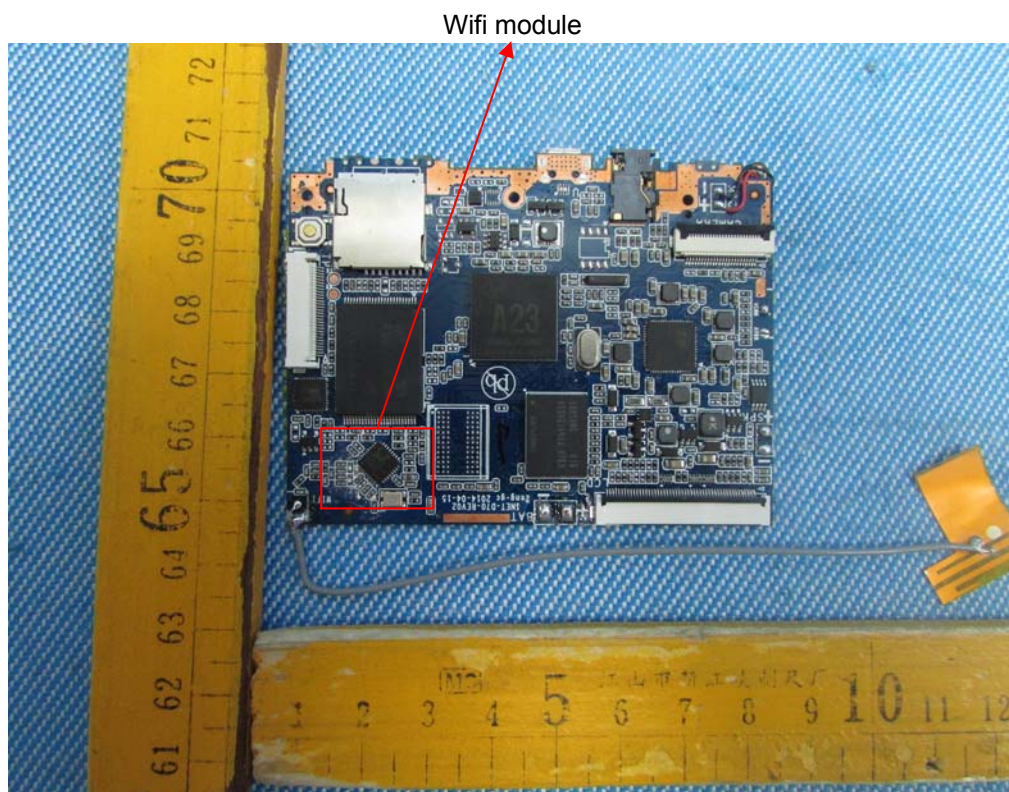

Wifi ANT

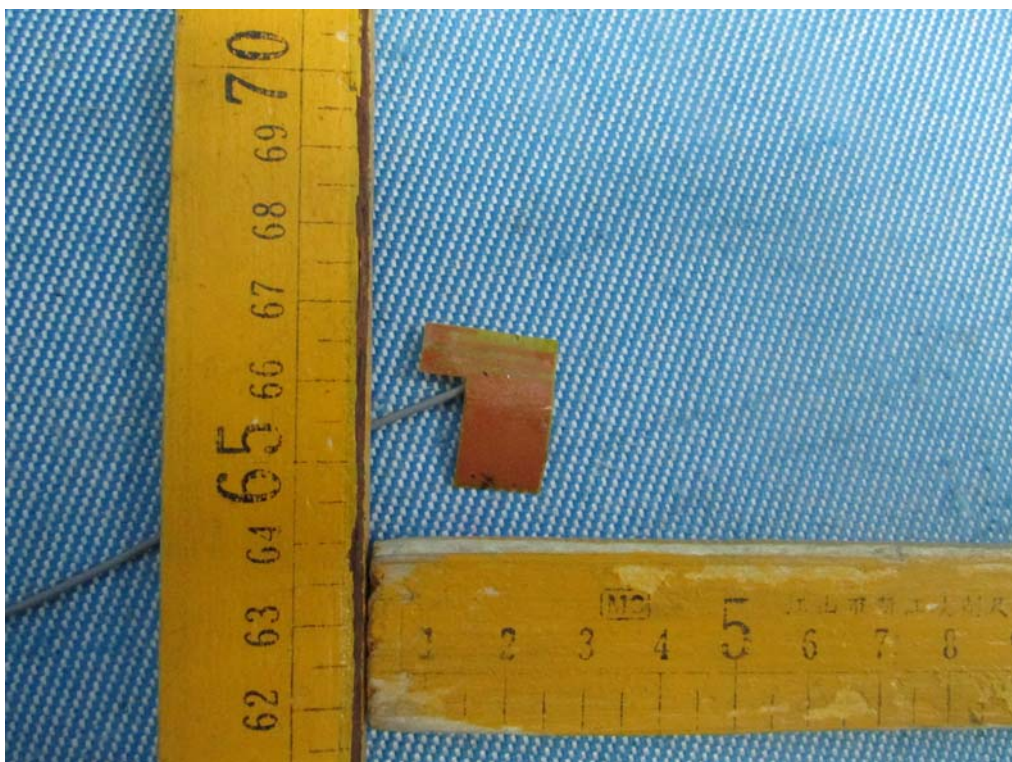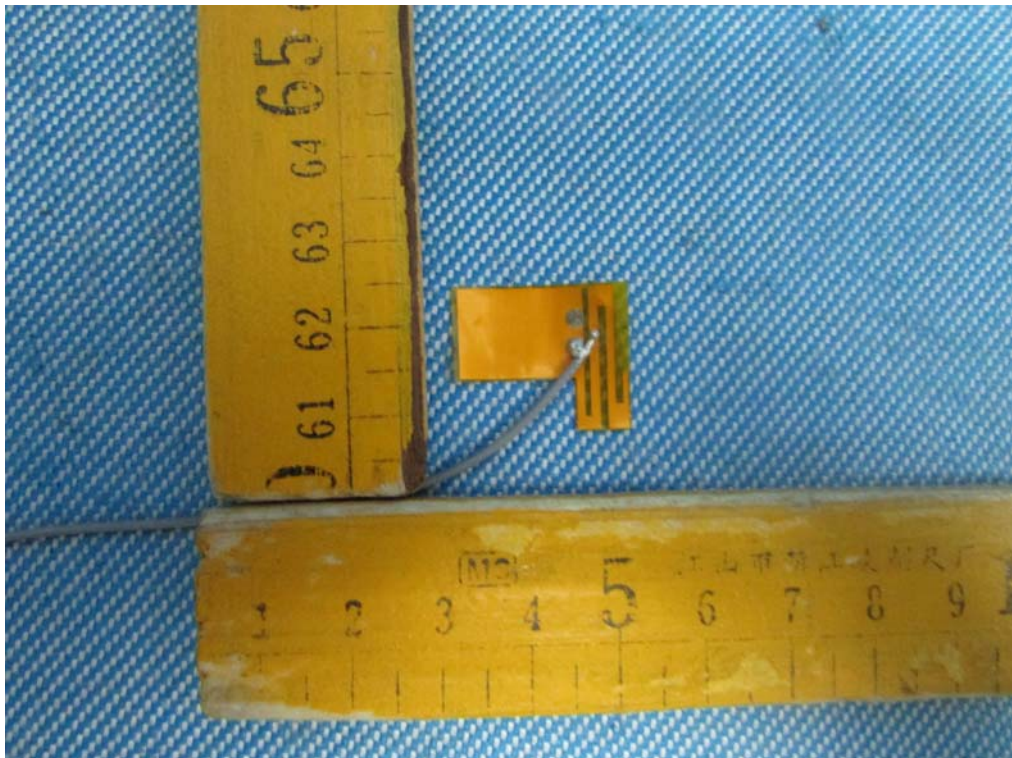



=====End of Report=====