

FCC TEST REPORT

FCC ID: 2ACWDY2014

Product:	Bar-code Scanner
Trade Name:	Yumite
Model Name:	YT-880, YT-890, YT-900
Report No.:	PT1508248115E-FC01
Date of Issue:	Dec 8, 2015

Prepared for

Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Buiness Building, No.1, Dezheng Road,
Shilong community, Shiyan, Bao'an District, Shenzhen

Prepared by

DongGuan Precise Testing Service Co.,Ltd.
Building D, Baoding Technology Park, Guangming Road 2, Guangming
Community,Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen World Reputation Electronics Technology Co., Ltd.

Address : 6F, B Building, B Area, Xingqiang Buiness Building, No.1,
Dezheng Road, Shilong community, Shiyan, Bao'an District,
Shenzhen

Manufacture's Name : Shenzhen World Reputation Electronics Technology Co.,Ltd

Address : 6F, B Building, B Area, Xingqiang Buiness Building, No.1,
Dezheng Road, Shilong community, Shiyan, Bao'an District,
Shenzhen

Product description

Product name : Bar-code Scanner

Model and/or type reference : YT-880, YT-890, YT-900

Rating(s) : DC 3.7V by battery

Standards : FCC Part15.231e

Test procedure ANSI C63.10-2013

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS , personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : Dec 2, 2015 ~Dec 8, 2015


Test Result..... : **Pass**

Testing Engineer :



(Juan Zeng)

Authorized Signatory :



(Chris Du)

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3 . ANTENNA REQUIREMENT	11
3.1 STANDARD REQUIREMENT	11
3.2 EUT ANTENNA	11
3.3 CONDUCTED EMISSION MEASUREMENT	12
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.3.2 TEST PROCEDURE	13
3.3.3 DEVIATION FROM TEST STANDARD	13
3.3.4 TEST SETUP	13
3.2.5 TEST RESULT	14
3.4 RADIATED EMISSION MEASUREMENT	15
3.4.1 RADIATED EMISSION LIMITS	15
3.4.2 TEST PROCEDURE	16
3.4.3 DEVIATION FROM TEST STANDARD	16
3.4.4 TEST SETUP	16
3.4.5 TEST RESULTS (BLOW 30MHZ)	19
3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	20
4 . BANDWIDTH TEST	22
4.1 TEST PROCEDURE	22
4.2 DEVIATION FROM STANDARD	22
4.3 TEST SETUP	22
4.4 TEST RESULTS	23
5 . PERIODIC RATE EXCEEDING	24
5.1 REQUIREMENTS	24
5.2 TEST PROCEDURE	24
5.3 TEST SETUP	24
5.4 TEST RESULTS	24
6 . EUT TEST PHOTO	26
7. PHOTOGRAPHS OF EUT	27
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.231)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	Note(1)
15.203	Antenna Requirement	Pass	
15.231e	Radiated Spurious Emission	Pass	
15.231e	Occupied Bandwidth	Pass	
15.231e	Deactivation Time	Pass	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report.

1.1 TEST FACILITY

Dongguan Precise Testing Service Co., Ltd.

Add. : Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.

FCC Registration No.: 371540, IC Registration No.: 12191A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bar-code Scanner	
Trade Name	Yumite	
Model Name	YT-880, YT-890, YT-900	
Model Difference	Only model name is different.	
Product Description	The EUT is a Bar-code Scanner	
	Product Type	Remote Control
	Operation Frequency:	433.92MHz
	Modulation Type:	FSK
	Number Of Channel	1CH
	Antenna Designation:	Internal antenna
	Antenna Gain(Peak)	0.8dBi
	Output Power:	68.94 dBuV/m @3m(AV Max.)
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification please refer to the User's Manual.	
Channel List	N/A	
Adapter	N/A	
Battery	DC 3.7V	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Internal antenna	NA	0.8	Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX

For Conducted Emission	
Final Test Mode	Description
Mode 1	N/A


For Radiated Emission	
Final Test Mode	Description
Mode 1	TX

Note:

(1) The EUT use new battery.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

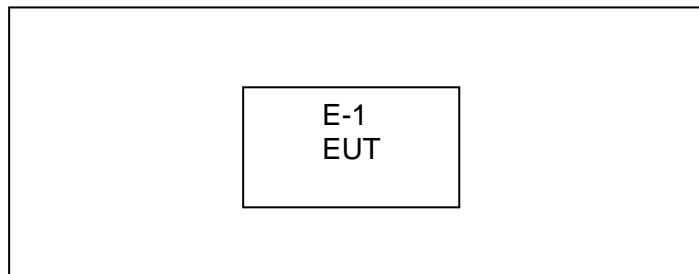

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Bar-code Scanner	Yumite	YT-880	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.4.1EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	Aug. 4, 2016
2	Test Receiver	Rohde&Schwarz	ESCI	101417	July 14, 2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	Aug. 4, 2016
4	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1247	Aug. 4, 2016
5	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	Aug. 4, 2016
6	Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 14, 2016
7	Loop Antenna	ARA	PLA-1030/B	1029	July 14, 2016
8	Power Meter	R&S	NRVS	100696	July 14, 2016
9	RF Cable	SCHWARZBECK	AK9515E	96221	July 14, 2016

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	Rohde&Schwarz	ESCI	101417	July 14, 2016
2	LISN	Narda	L2-16B	000WX31025	July 14, 2016
3	LISN	Narda	L2-16B	000WX31026	July 14, 2016
4	RF Cable	SCHWARZBECK	AK9515E	96222	July 14, 2016

3. ANTENNA REQUIREMENT

3.1 STANDARD REQUIREMENT

15.203 requirements: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.2 EUT ANTENNA

The EUT antenna is Internal Antenna. It complies with the standard requirement.

3.3 CONDUCTED EMISSION MEASUREMENT

3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

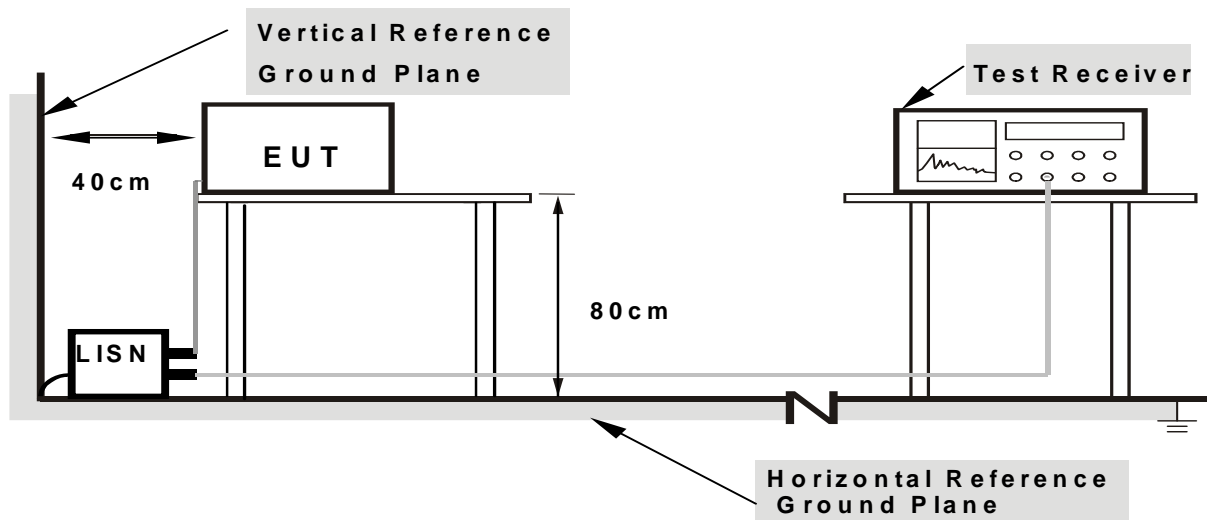

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.2.5 TEST RESULT

EUT :	Bar-code Scanner	Model Name. :	YT-880
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	N/A	Test Mode :	N/A

Owing to the EUT use battery supply voltage, this test item is not performed.

3.4 RADIATED EMISSION MEASUREMENT

3.4.1 Radiated Emission Limits (FCC 15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RADIATED EMISSION MEASUREMENT (FCC 15.231)

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 1,50 **
174 - 260	1,500	1,50
260 - 470	1,500 to 5,000 **	1,50 to 5,00 **
Above 470	5,000	5,00

Notes:

- (1) ** linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 22.72727(F) - 2454.545; for the band 260-470 MHz, uV/m at 3 meters = 16.6667(F) - 2833.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.] The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 93 Section 15.209, whichever limit permits a higher field strength.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.4.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than AV Mode Limit, the EUT shall be deemed to meet AV Limits and then no additional AV Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.4.3 DEVIATION FROM TEST STANDARD


No deviation

3.4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

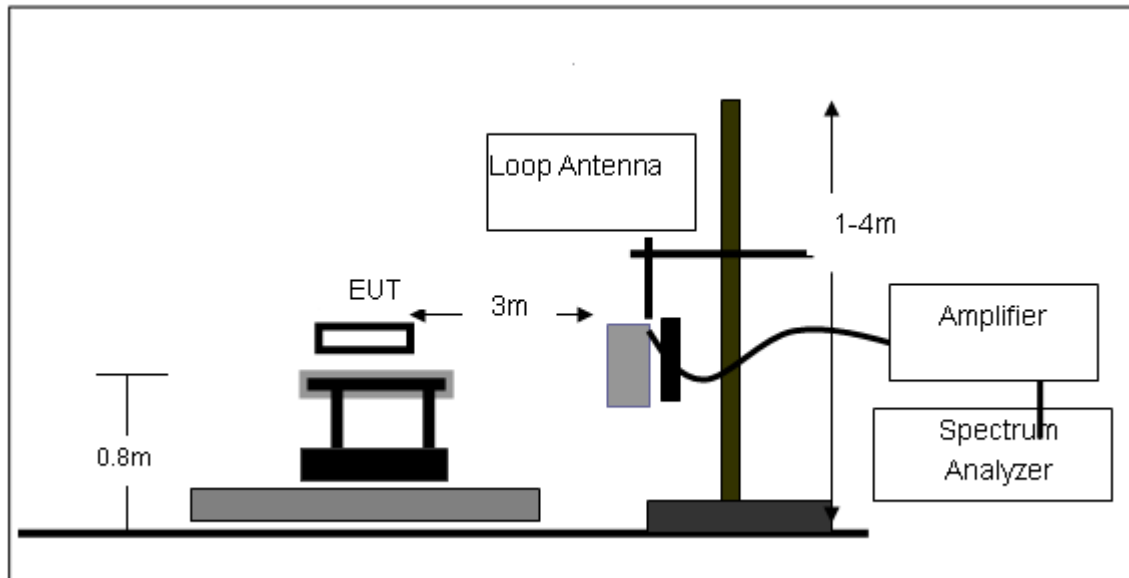

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

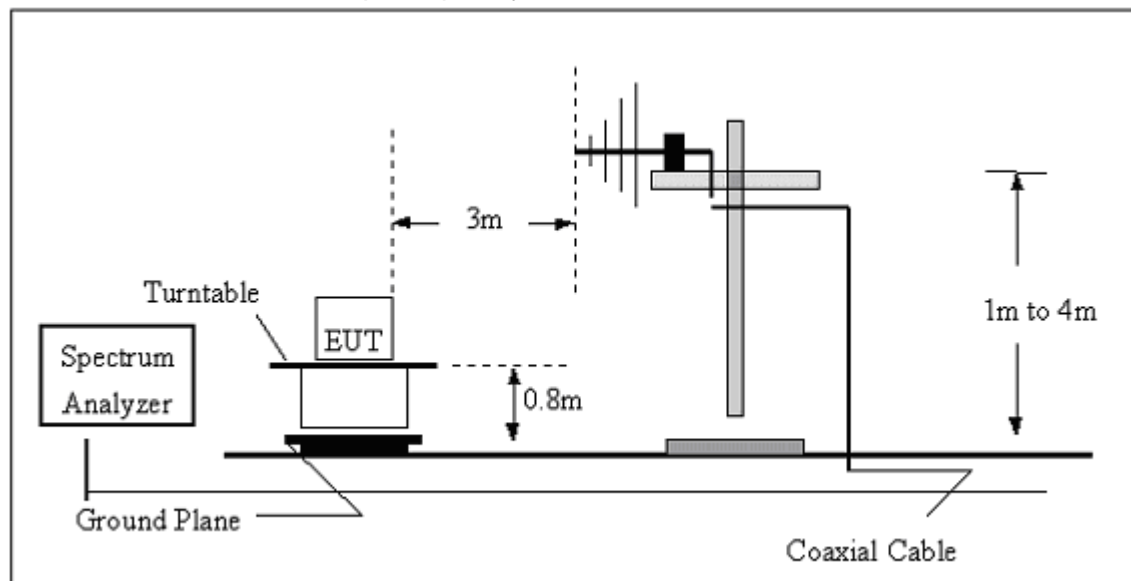

(C) Radiated Emission Test-Up Frequency Above 1GHz

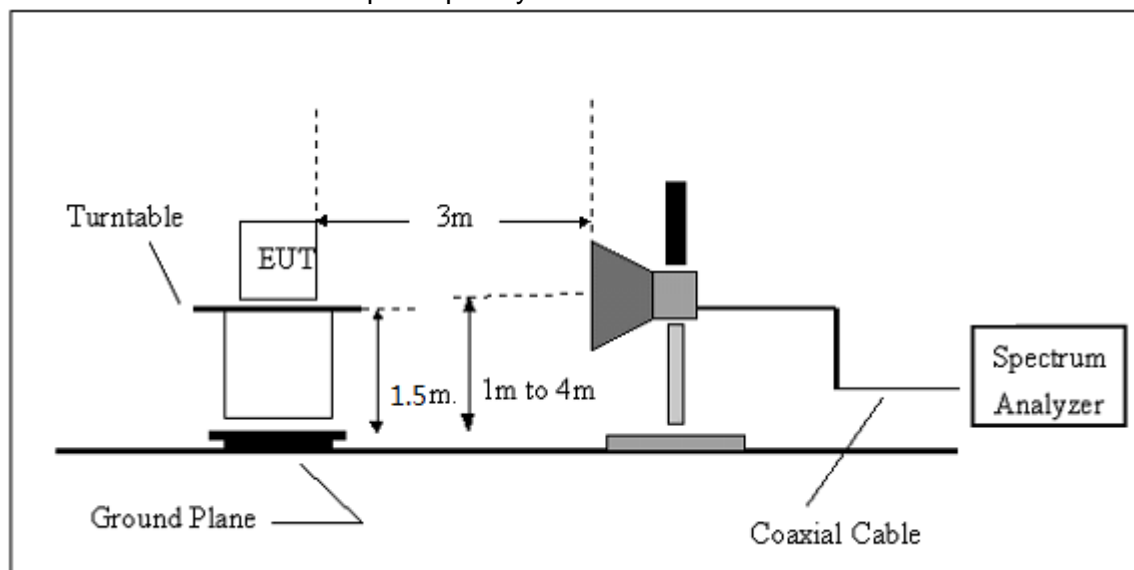

3.4.5 TEST RESULTS (BLOW 30MHz)

EUT :	Bar-code Scanner	Model Name. :	YT-880
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

The duty cycle is simply the on time divided by the period:

The duration of one cycle = 73.5ms

On time of one signal=0.425ms,


DC = $0.425\text{ms} \times 37 / 73.5 = 0.214$

Therefore, the average factor is found by $20\log 0.214 = -13.39\text{dB}$

The duration of one cycle



On time and off time of one signal

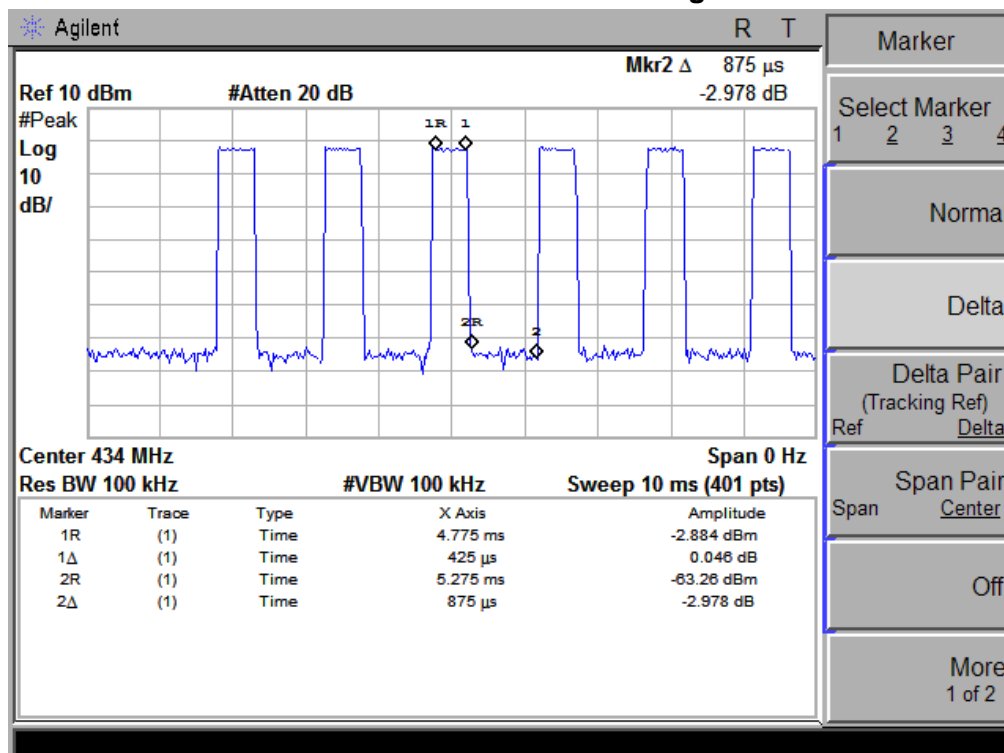

EUT :	Bar-code Scanner	Model Name :	YT-880
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	Horizontal

Frequency	Average Factor	Field Strength	Field Strength	Limit(PK)	Limit(AV)	State
MHz	dB	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
433.920	-13.39	82.33	68.94	92.90	72.90	pass
869.1301	-13.39	50.58	37.19	72.90	52.90	pass
1737.500	-13.39	52.77	--	74.00	54.00	pass
2175.000	-13.39	48.23	--	74.00	54.00	pass
--	--	--	--	74.00	54.00	pass
--	--	--	--	74.00	54.00	pass

EUT :	Bar-code Scanner	Model Name :	YT-880
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	Vertical

Frequency	Average Factor	Field Strength	Field Strength	Limit(PK)	Limit(AV)	State
MHz	dB	dBuV/m (PK)	dBuV/m (AV)	dBuV/m	dBuV/m	
433.920	-13.39	79.92	66.53	92.90	72.90	pass
869.1301	-13.39	49.34	35.95	72.90	52.90	pass
1737.500	-13.39	45.84	--	74.00	54.00	pass
2175.000	-13.39	52.33	--	74.00	54.00	pass
--	--	--	--	74.00	54.00	pass
--	--	--	--	74.00	54.00	pass

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. FCC Limit for Average Measurement = $16.6667(433.92) - 2833.3333 = 4398.68\text{uV/m}$
=72.90dBuV/m

4. BANDWIDTH TEST

4.1 TEST PROCEDURE


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Limit: $433.92\text{MHz} \times 0.25\% = 1.08\text{MHz}$

4.2 DEVIATION FROM STANDARD

No deviation.


4.3 TEST SETUP

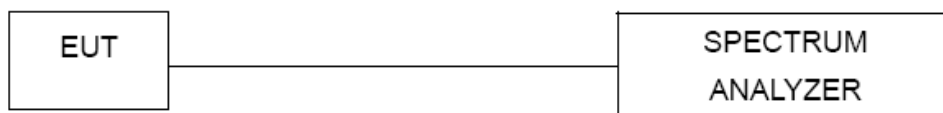

4.4 TEST RESULTS

EUT :	Bar-code Scanner	Model Name :	YT-880
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.7V
Test Mode :	TX CH 1		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (MHz)	Limit (MHz)
CH01	433.92	0.2726	1.08

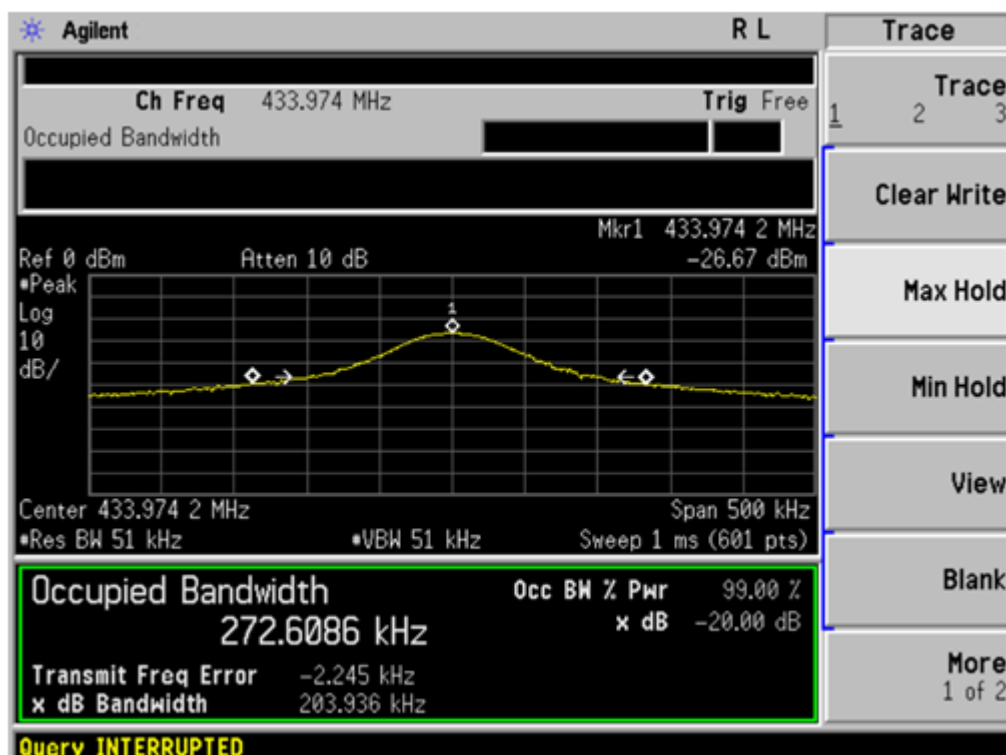

5. PERIODIC RATE EXCEEDING

5.1 REQUIREMENTS

In addition, devices operated under the provisions of this paragraph shall be provided with a means For automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the but in no case less than 10 seconds.

5.2 TEST PROCEDURE

- (1) Connect the EUT to the Spectrum and Power on.
- (2) Set center frequency of spectrum analyzer = operating frequency.
- (3) Set the spectrum analyzer as RBW=100kHz, VBW=100kHz, Span=0Hz, Adjust Sweep=130s.
- (4) Record the duration time

5.3 TEST SETUP




5.4 TEST RESULTS


EUT :	Bar-code Scanner	Model Name :	YT-880
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.7V
Test Mode :	TX		

Frequency(MHz)	Each transmission time(s)	Silent period between transmissions(s)
433.92	0.870	57.2
Limit	<1s	>10s and > 30*(duration of transmission)
Result	Pass	

Each transmission time

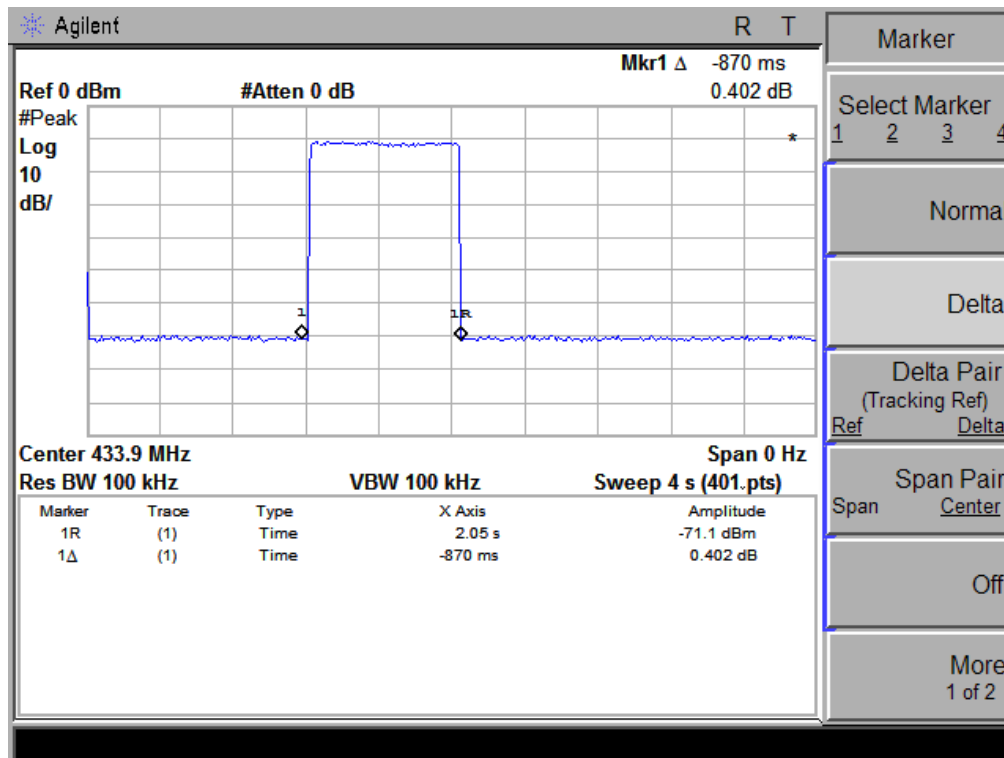


Silent period between transmissions

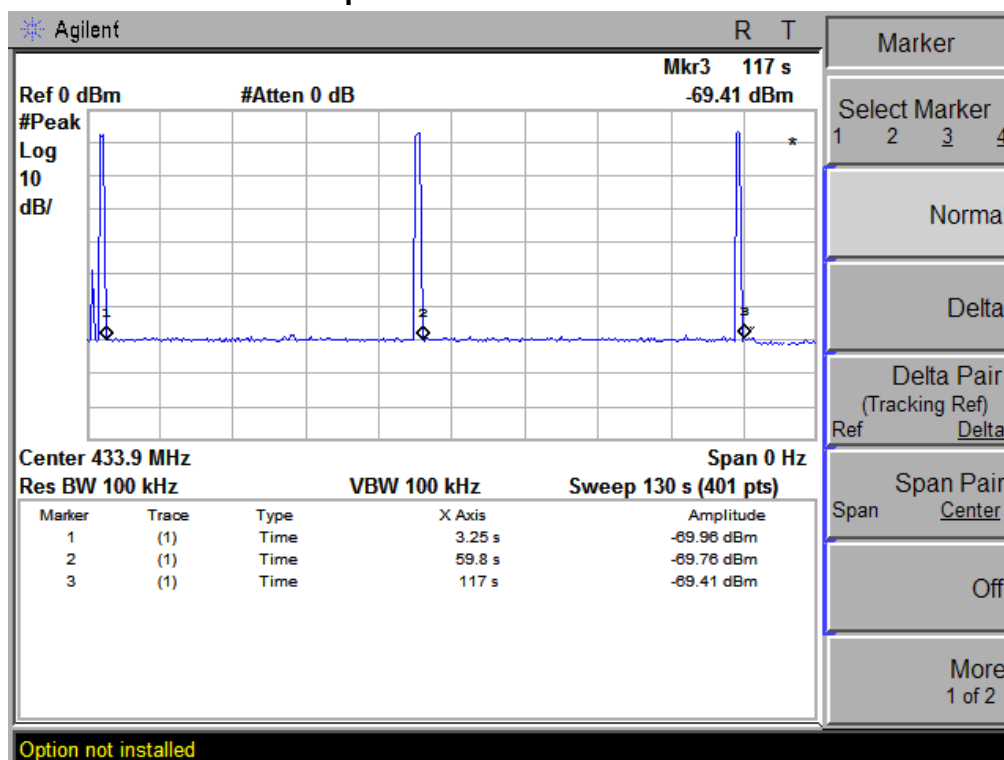

6. EUT TEST PHOTO


Radiated Measurement Photos

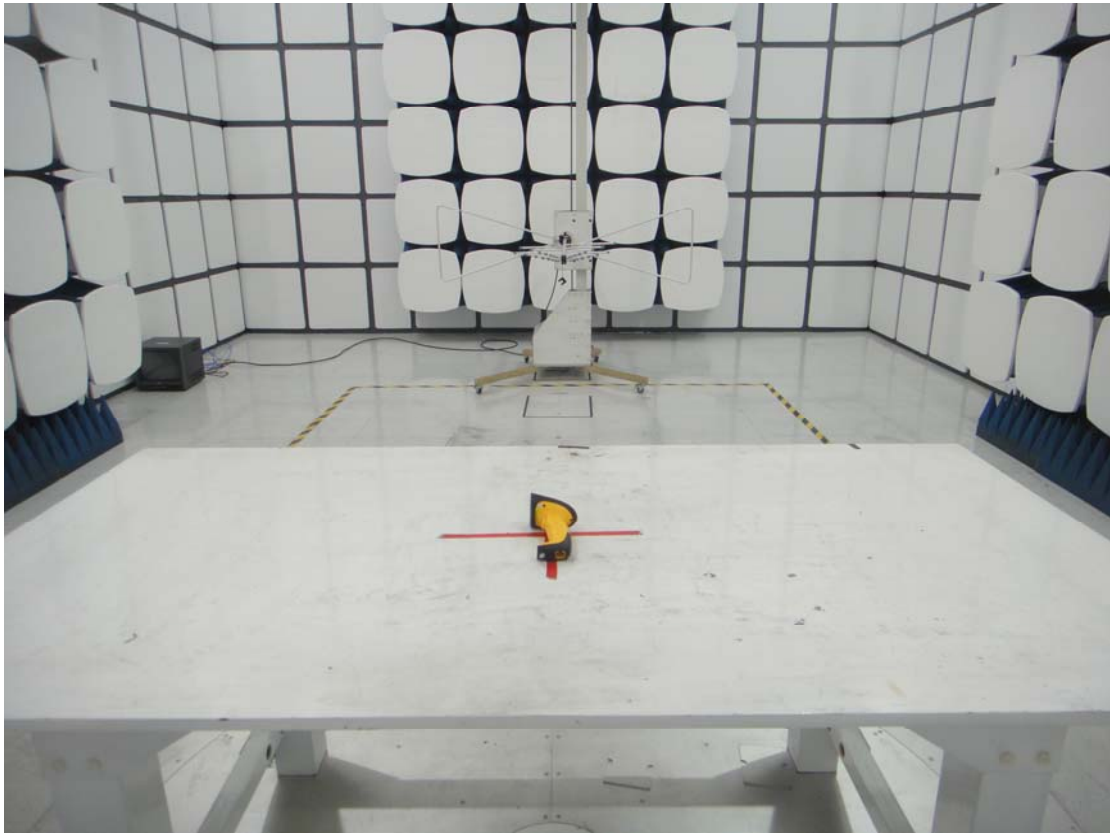


7. PHOTOGRAPHS OF EUT







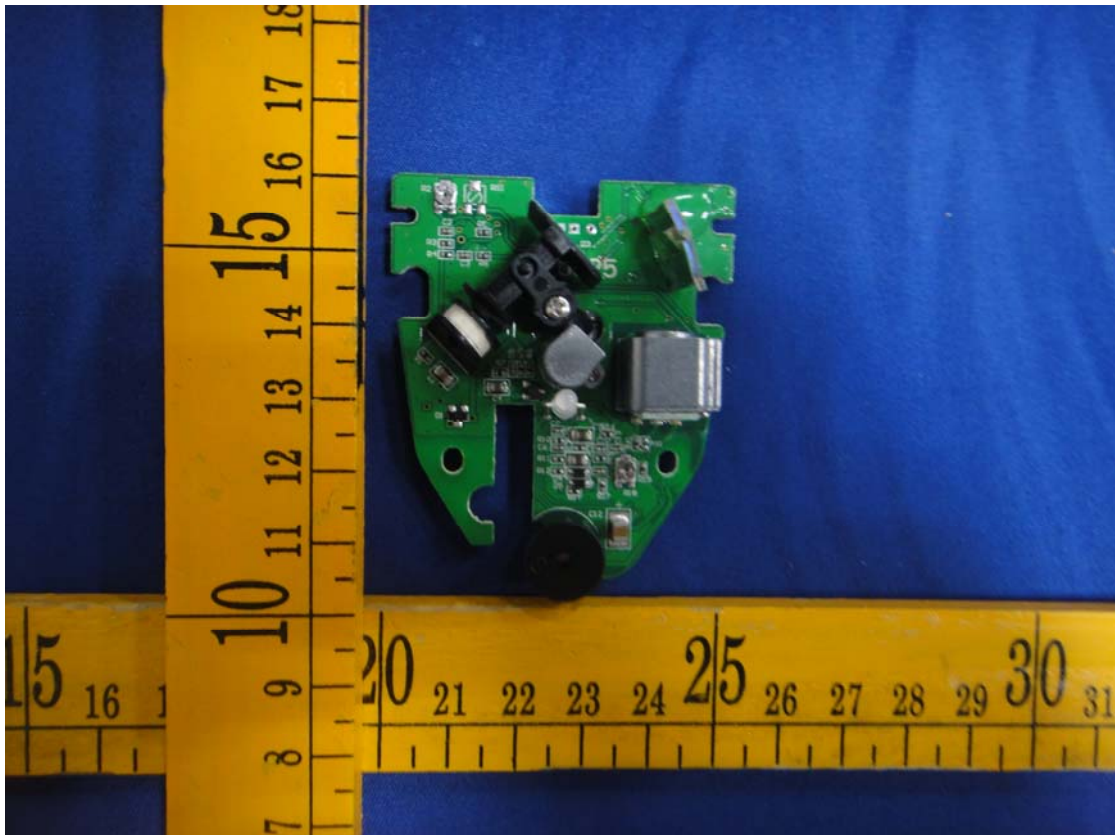

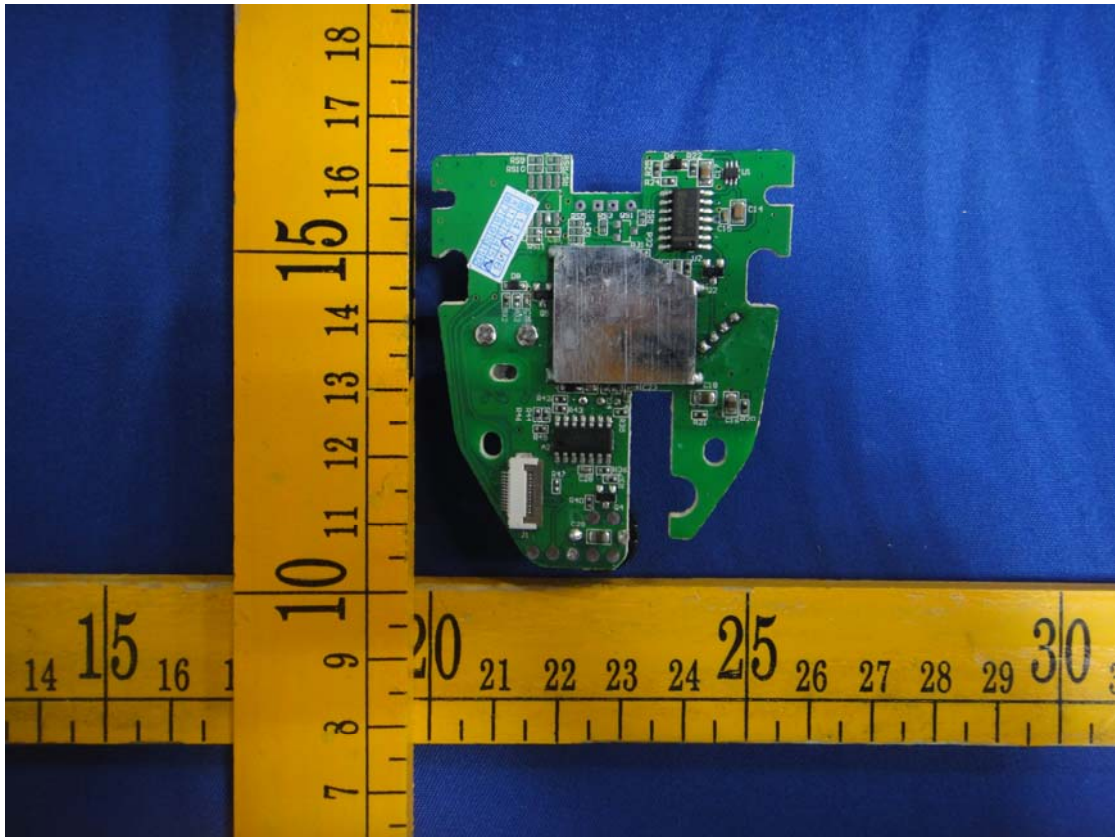

Antenna

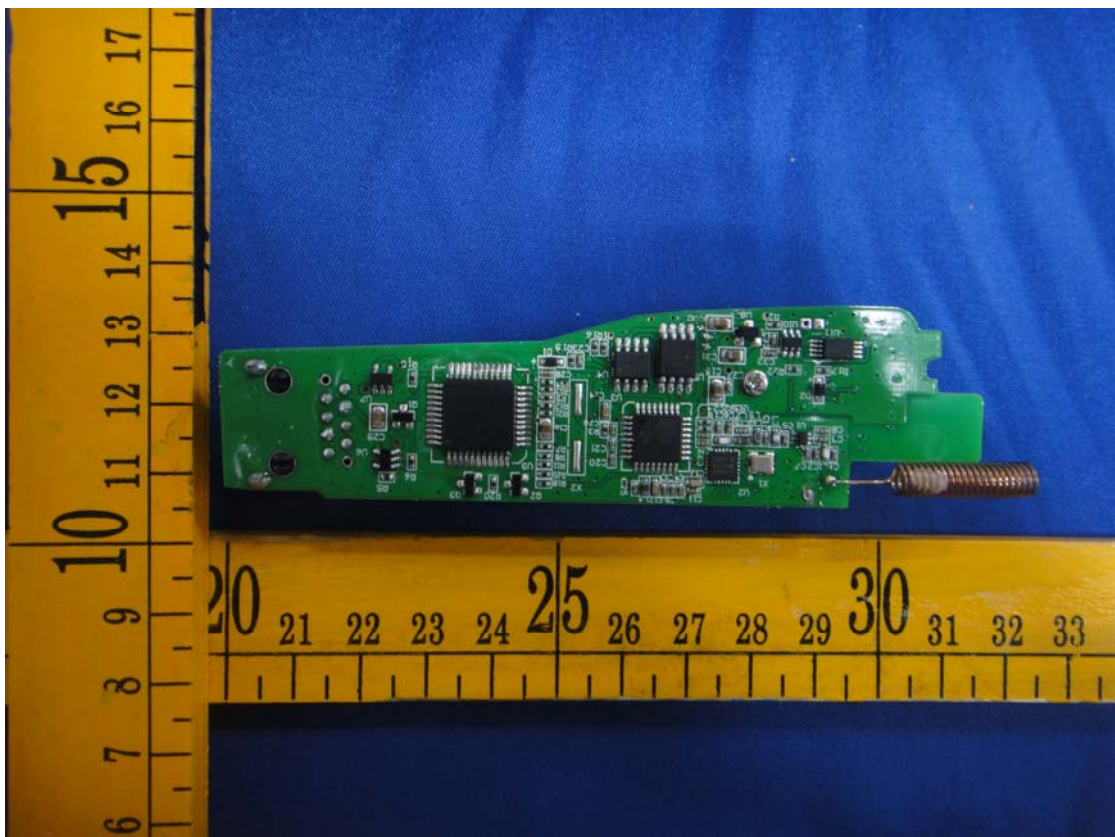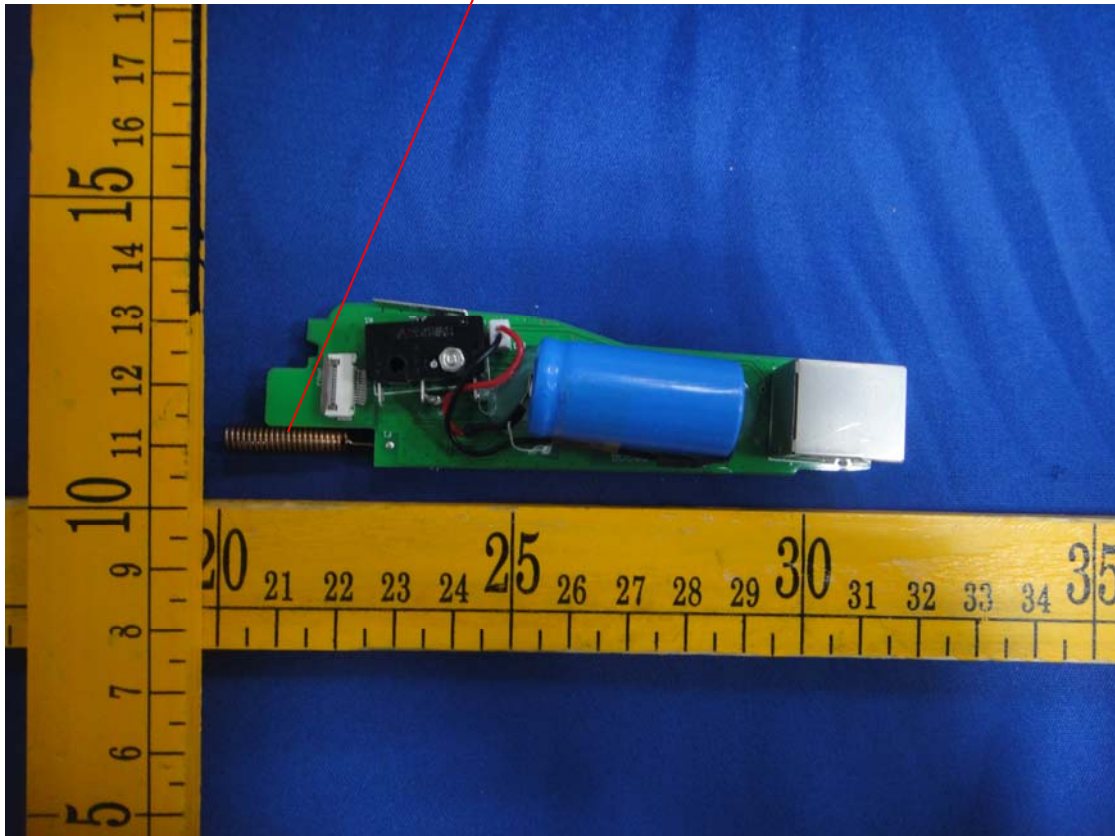

----- The end of report -----