



REPORT No. : SZ14120072W01

# FCC RF TEST REPORT

**APPLICANT** : Shenzhen guogee Intelligent Technology Limited

**PRODUCT NAME** : ISmart IOT module V2.02

**MODEL NAME** : F1RV0202

**TRADE NAME** : GUOGEE

**BRAND NAME** : GUOGEE

**FCC ID** : 2ADKR-F1RV0202

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**ISSUE DATE** : 2014-12-12



**SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.**

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB GROUP**

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,  
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

[Http://www.morlab.com](http://www.morlab.com)

Fax: 86-755-36698525

E-mail: [service@morlab.cn](mailto:service@morlab.cn)



## DIRECTORY

### **TEST REPORT DECLARATION.....4**

### **1. TECHNICAL INFORMATION.....5**

#### **1.1. APPLICANT INFORMATION.....5**

#### **1.2. EQUIPMENT UNDER TEST (EUT) DESCRIPTION.....5**

##### **1.2.1. IDENTIFICATION OF ALL USED EUTS .....5**

#### **1.3. TEST STANDARDS AND RESULTS.....6**

##### **1.3.1. TEST ENVIRONMENT CONDITIONS.....6**

### **2. 47 CFR PART 15C REQUIREMENTS .....7**

#### **2.1. ANTENNA REQUIREMENT .....7**

##### **2.1.1. APPLICABLE STANDARD .....7**

##### **2.1.2. RESULT: COMPLIANT.....7**

#### **2.2. PEAK OUTPUT POWER .....7**

##### **2.2.1. REQUIREMENT .....7**

##### **2.2.2. TEST DESCRIPTION .....7**

##### **2.2.3. TEST RESULT .....8**

#### **2.3. 6dB BANDWIDTH.....11**

##### **2.3.1. REQUIREMENT ..... 11**

##### **2.3.2. TEST DESCRIPTION ..... 11**

##### **2.3.3. TEST RESULT ..... 11**

#### **2.4. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE .....14**

##### **2.4.1. REQUIREMENT ..... 14**

##### **2.4.2. TEST DESCRIPTION ..... 14**

##### **2.4.3. TEST RESULT ..... 14**

#### **2.5. POWER SPECTRAL DENSITY (PSD).....18**

##### **2.5.1. REQUIREMENT ..... 18**

##### **2.5.2. TEST DESCRIPTION ..... 18**

##### **2.5.3. TEST RESULT ..... 18**

#### **2.6. RESTRICTED FREQUENCY BANDS .....21**

##### **2.6.1. REQUIREMENT ..... 21**

##### **2.6.2. TEST DESCRIPTION ..... 21**

##### **2.6.3. TEST RESULT ..... 22**



<b>2.7. CONDUCTED EMISSION</b>	<b>25</b>
2.7.1. REQUIREMENT	25
2.7.2. TEST DESCRIPTION	25
2.7.3. TEST RESULT	26
<b>2.8. RADIATED EMISSION</b>	<b>28</b>
2.8.1. REQUIREMENT	28
2.8.2. TEST DESCRIPTION	28
2.8.3. TEST RESULT	31
<b>2.9. RF EXPOSURE EVALUATION</b>	<b>35</b>
<b>RESULT:</b>	<b>35</b>

## **ANNEX A GENERAL INFORMATION** .....37

<b>1.1 IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY</b>	<b>37</b>
<b>1.2 IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION</b>	<b>37</b>
<b>1.3 FACILITIES AND ACCREDITATIONS</b>	<b>37</b>
<b>1.4 TEST EQUIPMENTS UTILIZED</b>	<b>38</b>
1.4.1 CONDUCTED TEST EQUIPMENTS	38
1.4.2 CONDUCTED EMISSION TEST EQUIPMENTS	38
1.4.3 RADIATED TEST EQUIPMENTS	38
1.4.4 CLIMATE CHAMBER	39
1.4.5 VIBRATION TABLE	39
1.4.6 ANECHOIC CHAMBER	39

Change History		
Issue	Date	Reason for change
1.0	2014-12-14	First edition





REPORT No. : SZ14120072W01

### Test Report Declaration

Applicant	Shenzhen Guogee Intelligent Technology Limited
Applicant Address	Room 416, Block 1, Building B, Shenzhen Mingyou Industrial Products Exhibition & Procurement Center, Baoyuan Road, Xixing Sub-district, Bao'an District, 518102, Shenzhen, P.R.China
Manufacturer	Shenzhen Guogee Intelligent Technology Limited
Manufacturer Address	Room 416, Block 1, Building B, Shenzhen Mingyou Industrial Products Exhibition & Procurement Center, Baoyuan Road, Xixing Sub-district, Bao'an District, 518102, Shenzhen, P.R.China
Product Name	ISmart IOT module V2.02
Model Name	F1RV0202
Brand Name	GUOGEE
HW Version	V2.02
SW Version	N/A
Test Standards	47 CFR Part 15 Subpart C
Test Date	2014-10-28 to 2014-11-03
Test Result	PASS

Tested by : Wu Jianwu  
Wu Jianwu

Reviewed by : Qiu Xiaojun  
Qiu Xiaojun

Approved by : Zeng Dexin  
Zeng Dexin



# 1. Technical Information

Note : Provide by applicant.

## 1.1. Applicant Information

Company :	Shenzhen Guogee Intelligent Technology Limited
Address :	Room 416, Block 1, Building B, Shenzhen Mingyou Industrial Products Exhibition & Procurement Center, Baoyuan Road, Xixing Sub-district, Bao'an District, 518102, Shenzhen, P.R.China

## 1.2. Equipment under Test (EUT) Description

Brand Name:	N.A
Trade Name:	GUOGEE
Model Name:	F1RV0202
Frequency Range:	2.4G ISM Band
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	1dBi

### NOTE:

The EUT is ISmart IOT module V2.02, it contain RF module( IEEE 802.15.4 ) operating at 2.4GHz ISM band; the frequencies allocated for the zigbee is  $F(\text{MHz})=2405+5*(n-1)$  ( $1 \leq n \leq 15$ ). The lowest, middle, highest channel numbers of the RF module ( IEEE 802.15.4 ) used and test. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufactured in this report are separately 1 (2405MHz), 8 (2440MHz) and 15 (2475MHz).

### 1.2.1. Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.





EUT Identity	Hardware Version	Software Version
A01	V2.02	N/A

### 1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Zigbee, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.203	Antenna Requirement	<u>PASS</u>
2	15.247(b)	Peak Output Power	<u>PASS</u>
3	15.247(a)	Bandwidth	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	<u>PASS</u>
6	15.207	Conducted Emission	<u>PASS</u>
7	15.209 ,15.247(d)	Radiated Emission	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 v03r02 (05/06/2014).

#### 1.3.1. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

### 2.2. Peak Output Power


#### 2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 2.2.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

##### A. Test Setup:

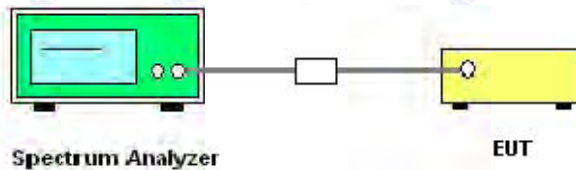

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

#### B. Equipments List:

Please reference ANNEX A(1.4).

### 2.2.3. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

#### A. Test Verdict:


Channel	Frequency (MHz)	Measured Output Peak Power		Refer to Plot	Limit		Verdict
		dBm	W		dBm	W	
0	2405	14.91	0.030974	Plot A	30	1	PASS
8	2440	14.36	0.027290	Plot B			PASS
15	2475	13.47	0.022230	Plot C			PASS

#### B. Test Plots:






REPORT No. : SZ14120072W01

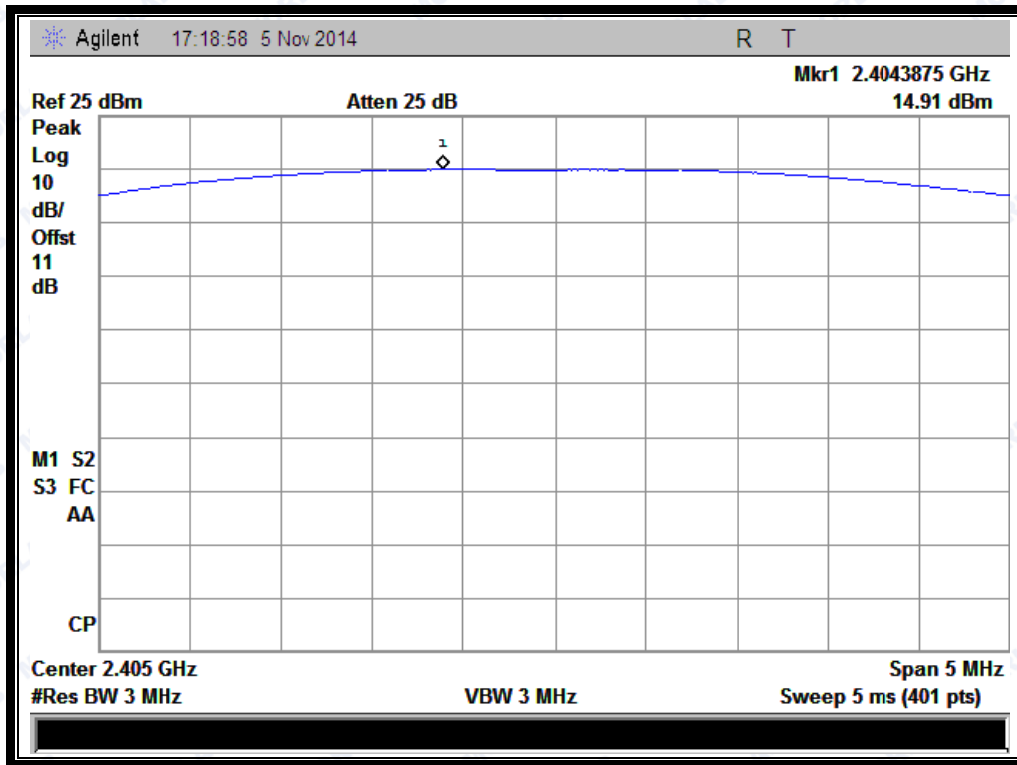


(Plot A: Channel 0: 2405MHz)

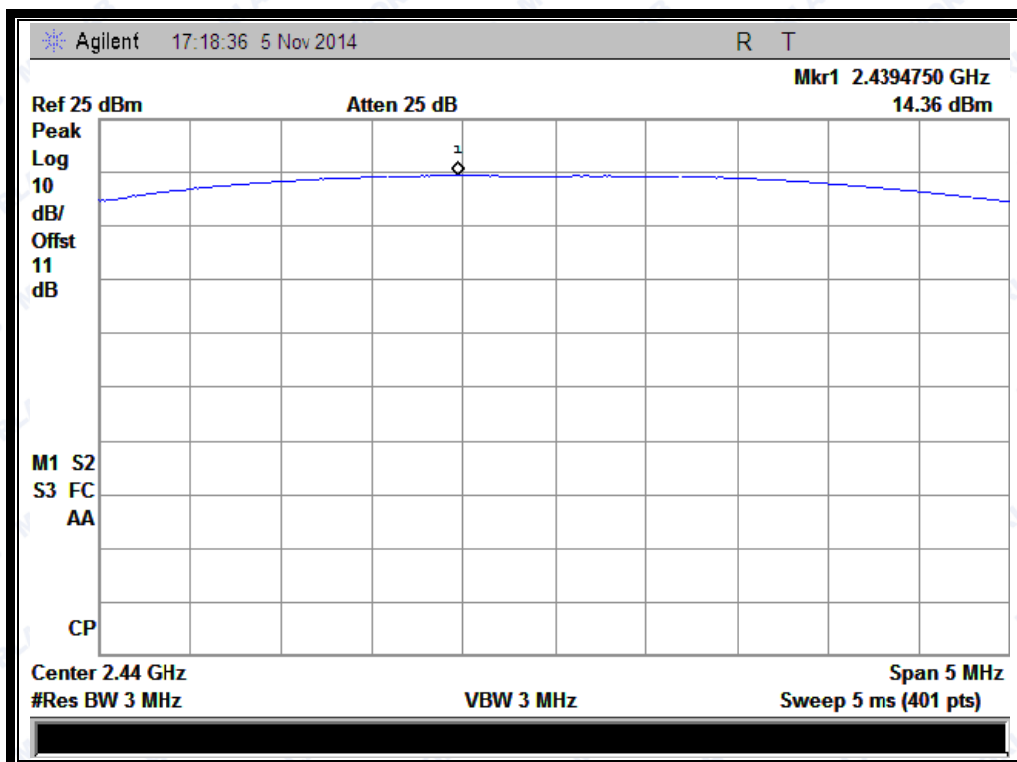

(Plot B: Channel 8: 2440MHz)



REPORT No. : SZ14120072W01

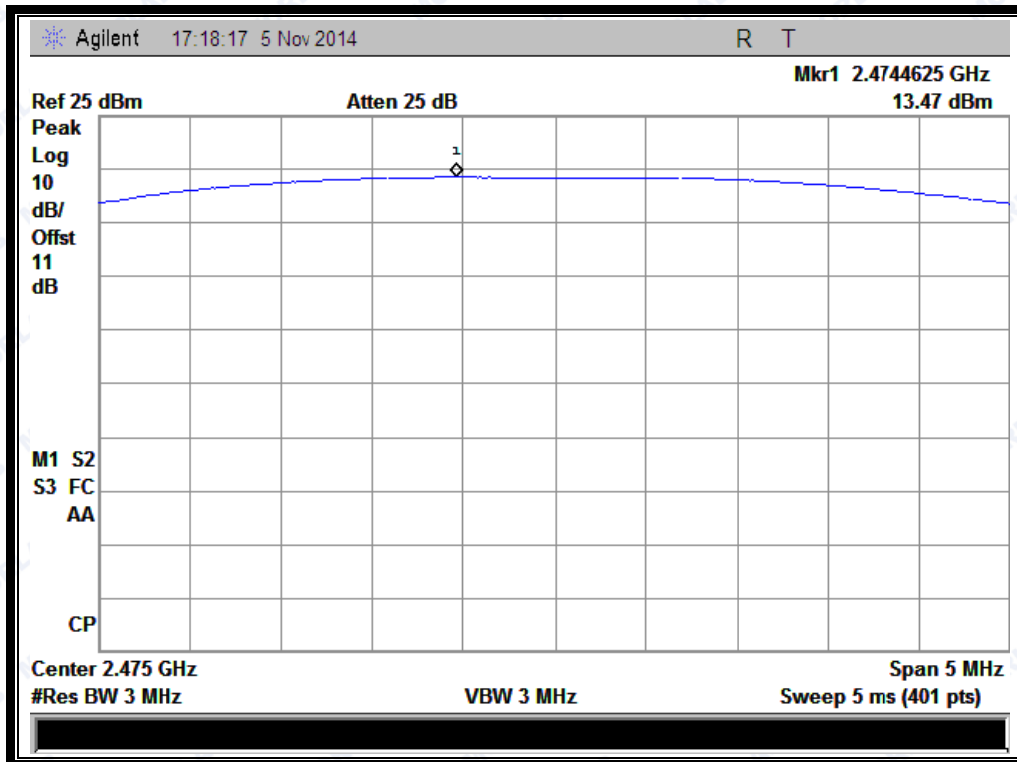

(Plot C: Channel 15: 2475MHz)


## 2.3. 6dB Bandwidth

### 2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2. Test Description

#### A. Test Set:

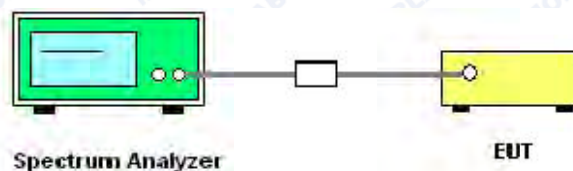

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### B. Equipments List:

Please reference ANNEX A(1.4).

### 2.3.3. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.






REPORT No. : SZ14120072W01

**A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
0	2405	1.625	Plot A	≥500	PASS
8	2440	1.613	Plot B	≥500	PASS
15	2475	1.625	Plot C	≥500	PASS


**B. Test Plots:**

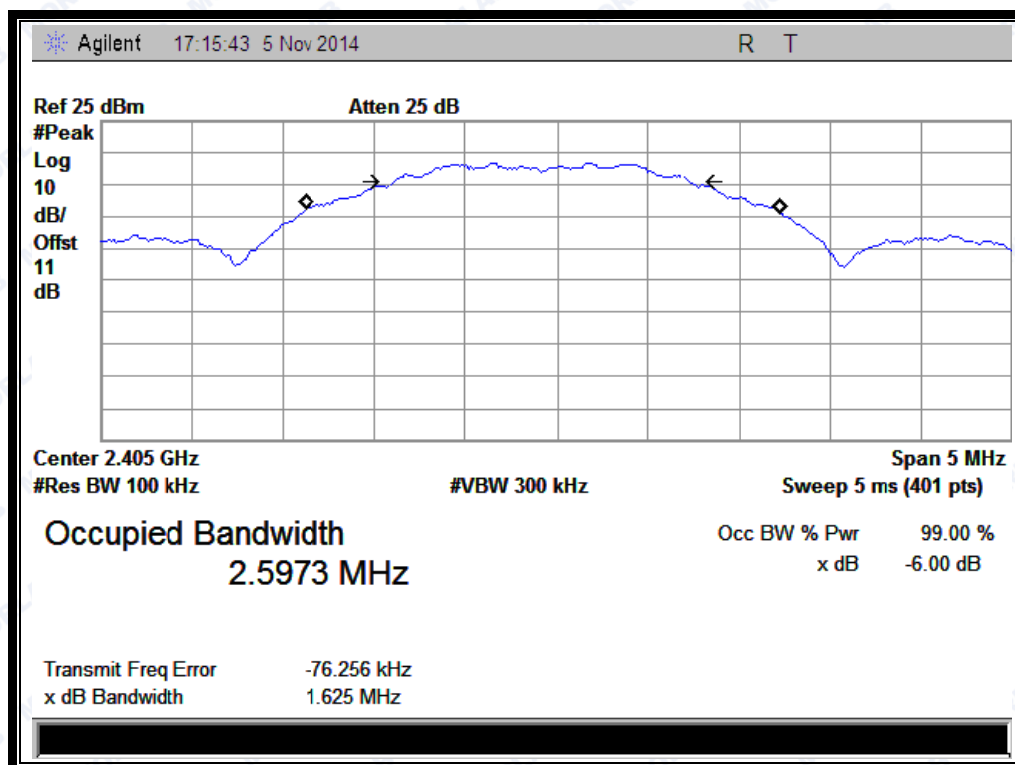


(Plot A: Channel 0: 2405MHz)



REPORT No. : SZ14120072W01

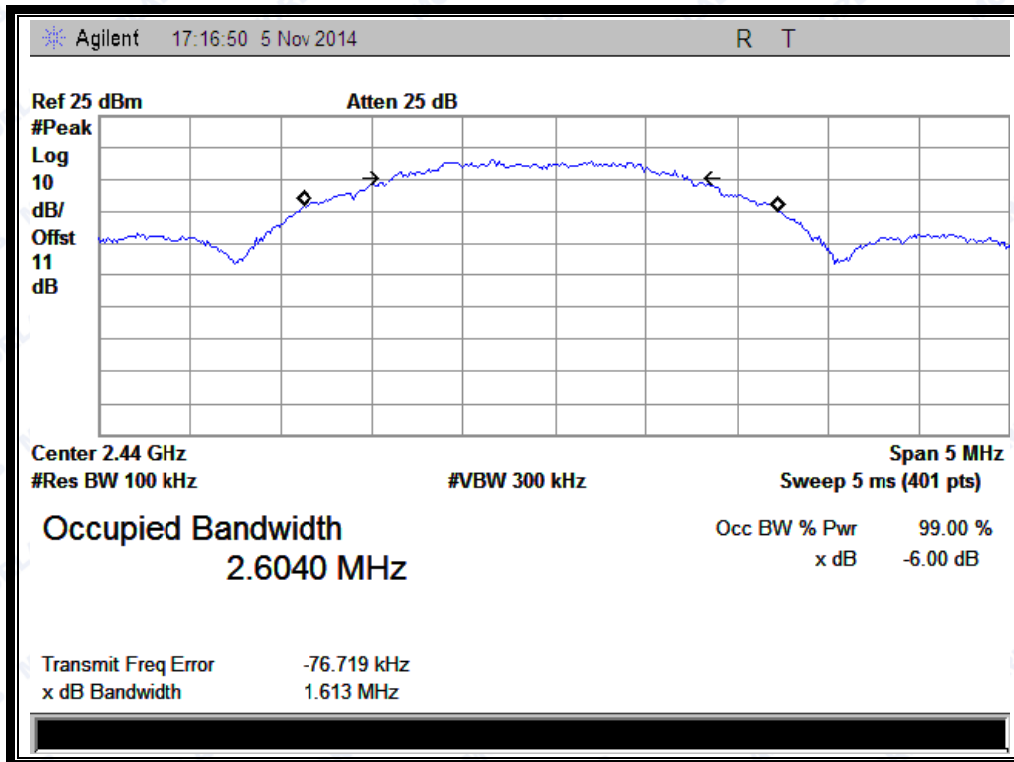

(Plot B: Channel 8: 2440 MHz)

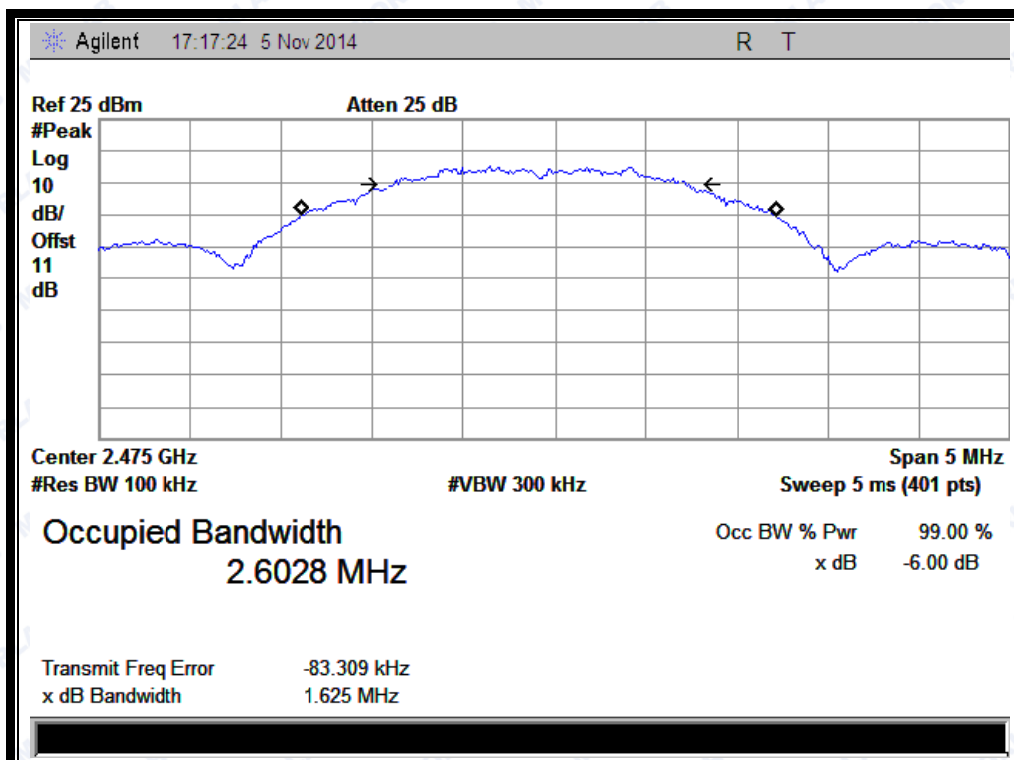

(Plot C: Channel 15: 2475MHz)


## 2.4. Conducted Spurious Emissions and Band Edge

### 2.4.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2. Test Description

#### A. Test Set:

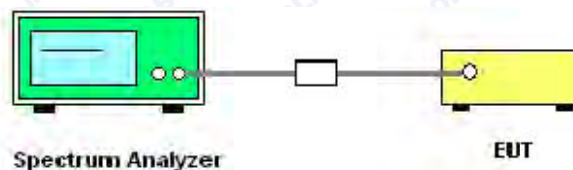

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### B. Equipments List:

Please reference ANNEX A(1.4).

### 2.4.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




**A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2405	-35.53	Plot A.1	12.130	-7.9	PASS
8	2440	-35.85	Plot B.1	10.510	-9.5	PASS
15	2475	-34.52	Plot C.1	9.174	-10.8	PASS

**B. Test Plots:**


**Note:** the power of the Module transmitting frequency should be ignored.

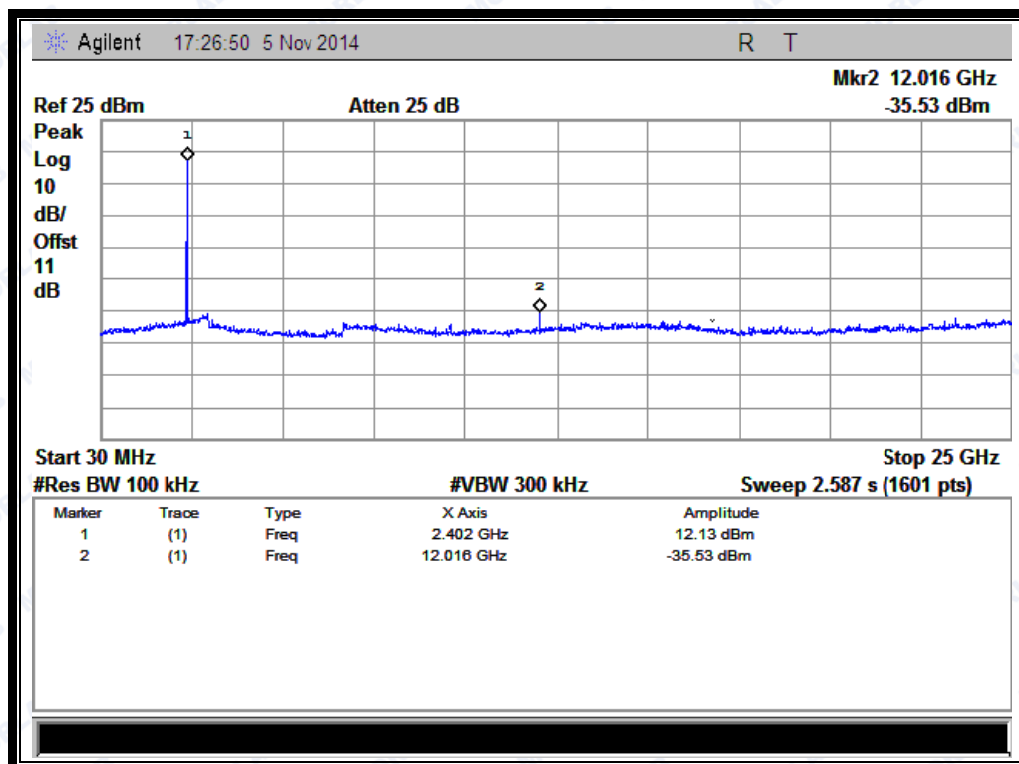


(Plot A.1: Channel = 0, 30MHz to 25GHz)



REPORT No. : SZ14120072W01

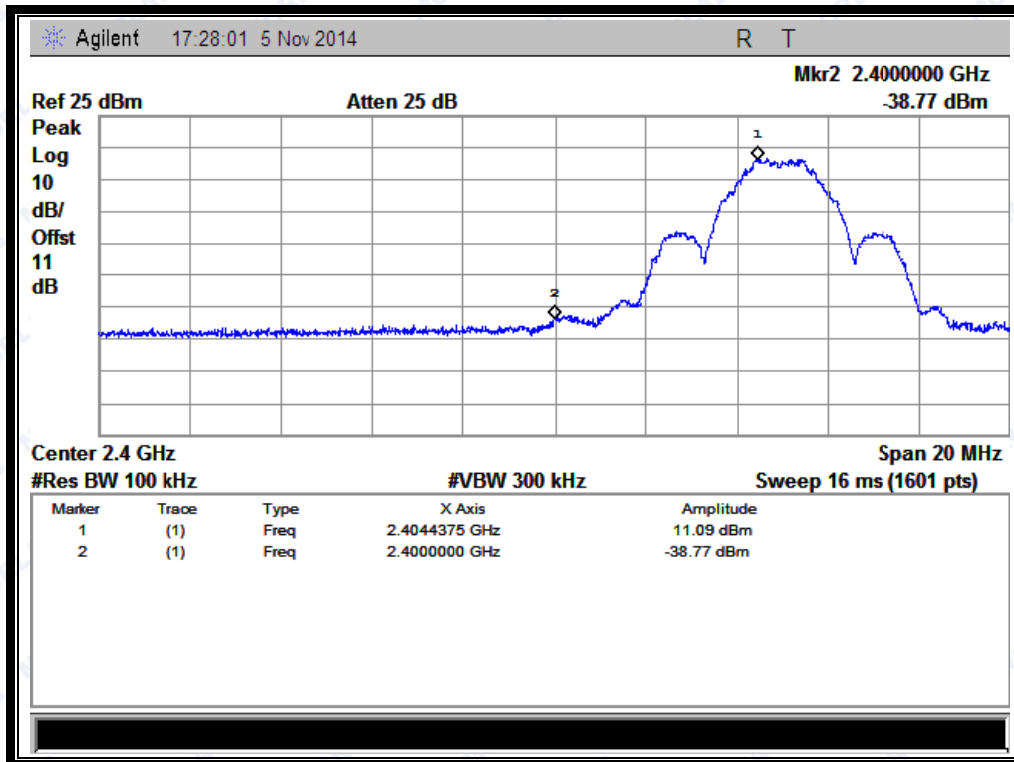


(Band Edge@ Channel = 0)

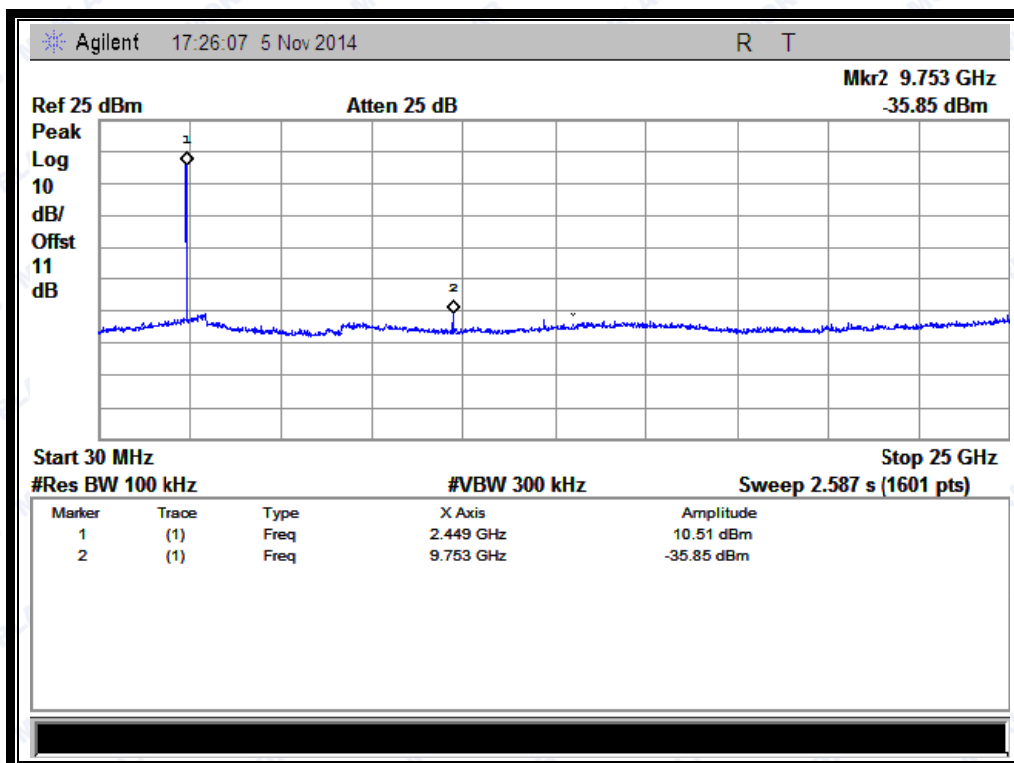


(Plot B.1: Channel = 8, 30MHz to 25GHz)



REPORT No. : SZ14120072W01

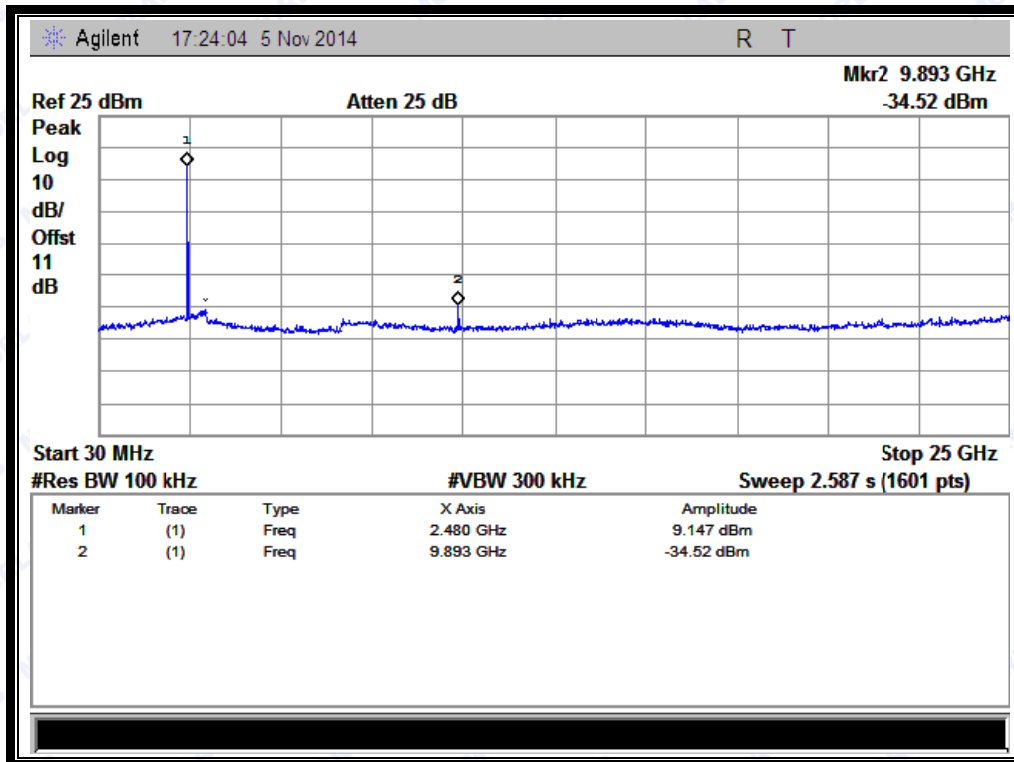

(Plot C.1: Channel = 15, 30MHz to 25GHz)

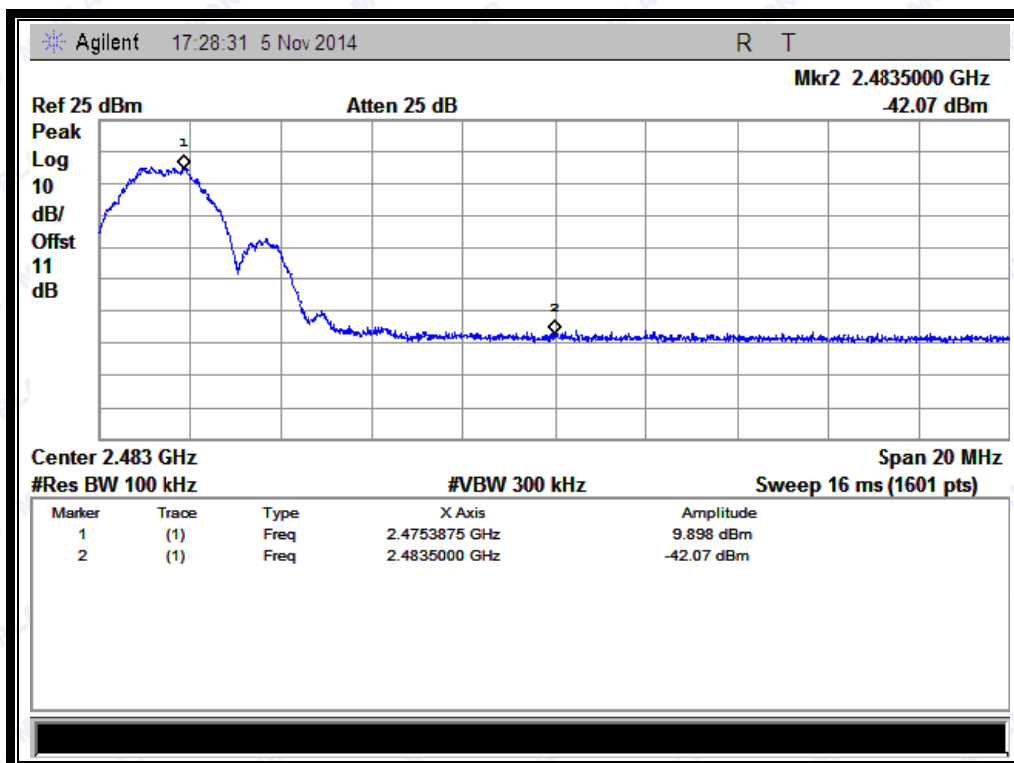

(Band Edge@ Channel = 15)




## 2.5. Power spectral density (PSD)

### 2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density

### 2.5.2. Test Description

#### A. Test Set:

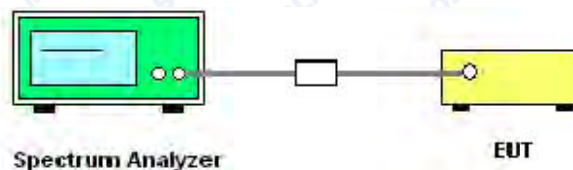

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

#### B. Equipments List:

Please reference ANNEX A(1.4).


### 2.5.3. Test Result

The lowest, middle and highest channels are tested.

#### A. Test Verdict:




Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
0	2405	0.376	Plot A	8	PASS
8	2440	-0.824	Plot B	8	PASS
15	2475	-0.670	Plot C	8	PASS
Measurement uncertainty: $\pm 1.3$ dB					

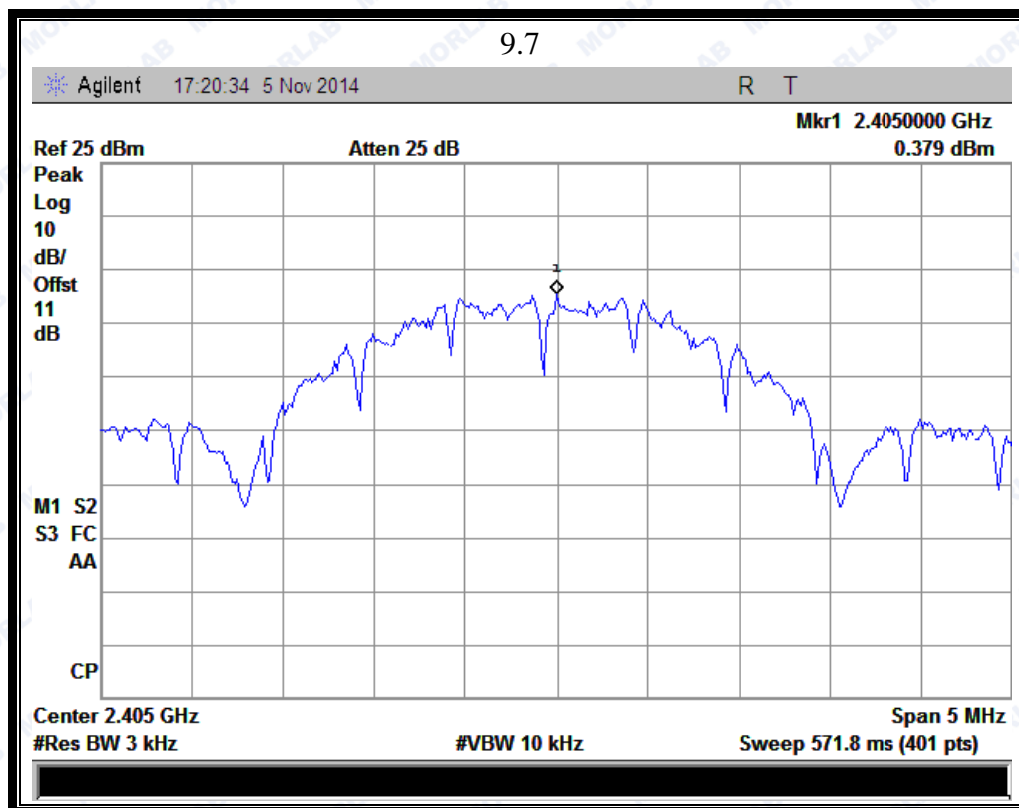**B. Test Plots:**


(Plot A: Channel = 1)



REPORT No. : SZ14120072W01

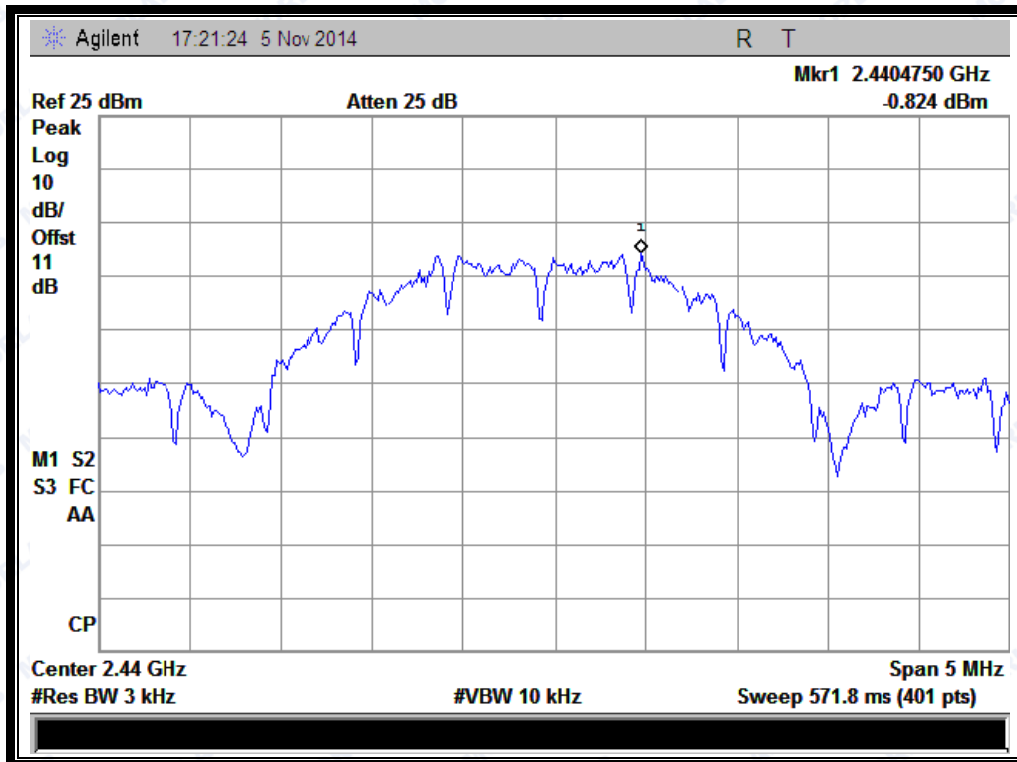

(Plot B: Channel = 8)

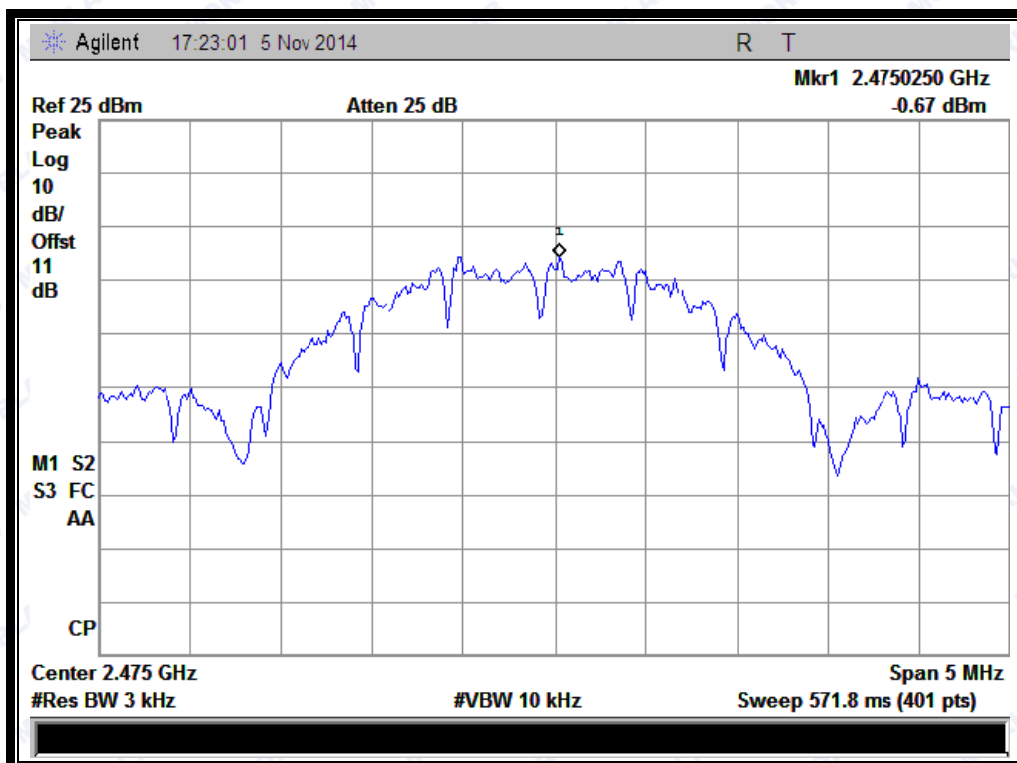

(Plot C: Channel = 15)




## 2.6. Restricted Frequency Bands

### 2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.6.2. Test Description

#### A. Test Setup

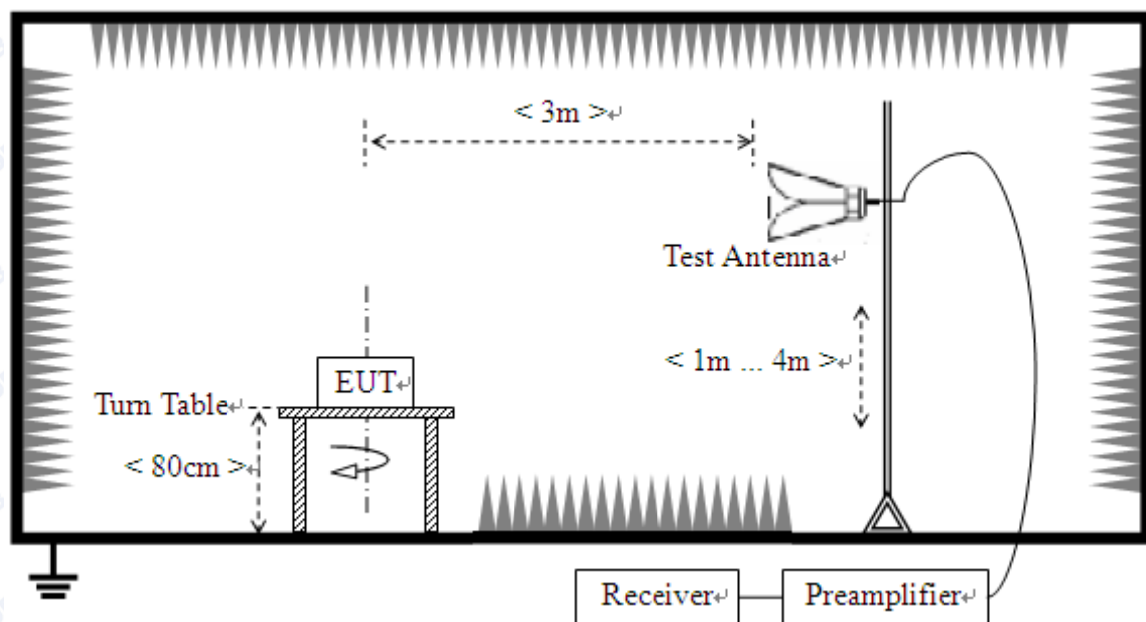

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the



ground to determine the maximum value of the field strength.

### B. Equipments List:

Please reference ANNEX A(1.4).

## 2.6.3. Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2382.24	PK	55.36	-33.63	32.56	54.29	74	Pass
1	2377.96	AV	44.54	-33.63	32.56	43.47	54	Pass
15	2483.5	PK	61.44	-33.18	32.5	60.76	74	Pass
15	2483.50	AV	52.55	-33.18	32.5	51.87	54	Pass


### B. Test Plots:



REPORT No. : SZ14120072W01

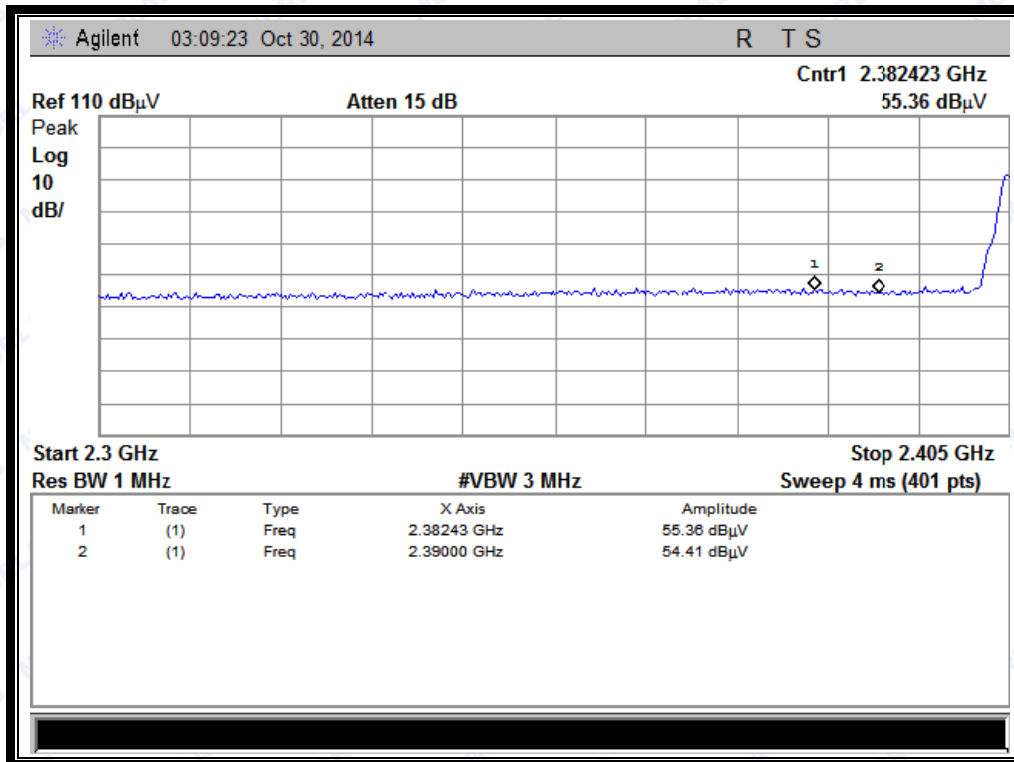

(Plot A1: Channel = 1 PEAK)

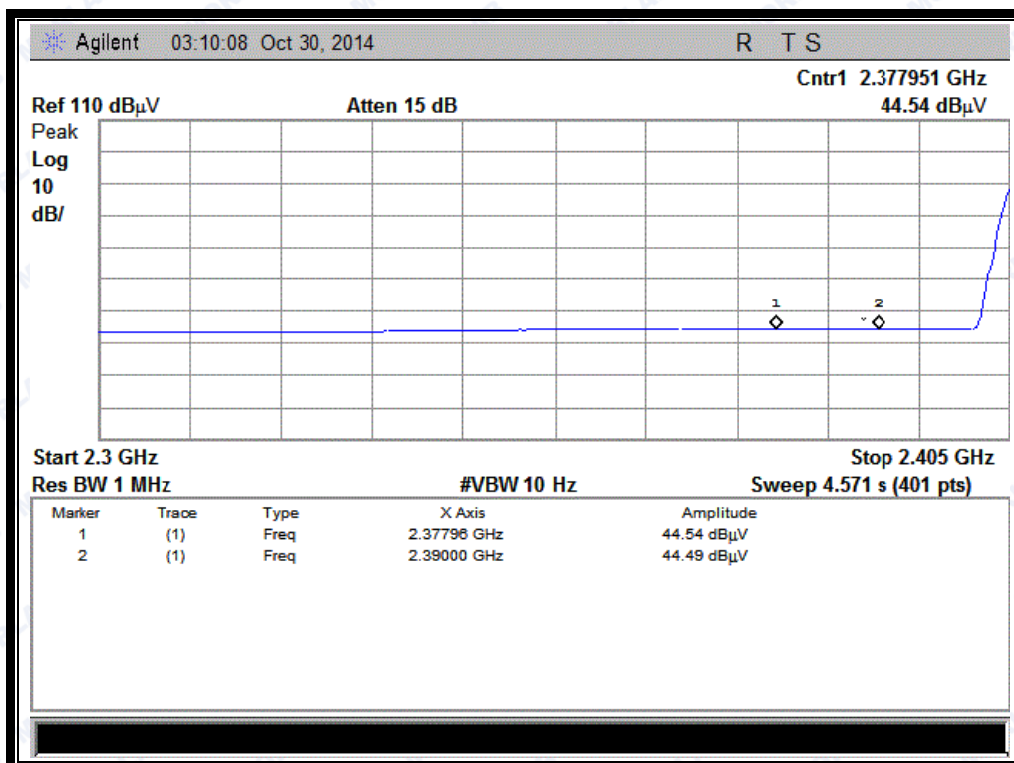


(Plot A2: Channel = 1 AVG)






REPORT No. : SZ14120072W01

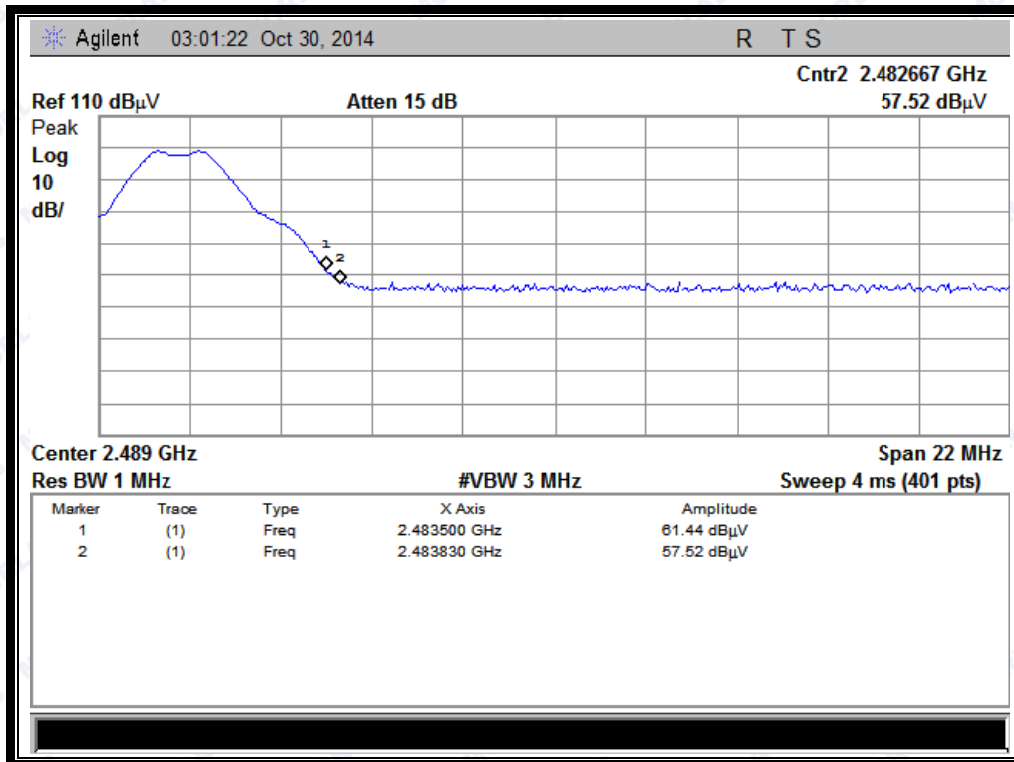

(Plot B1: Channel = 15 PEAK)

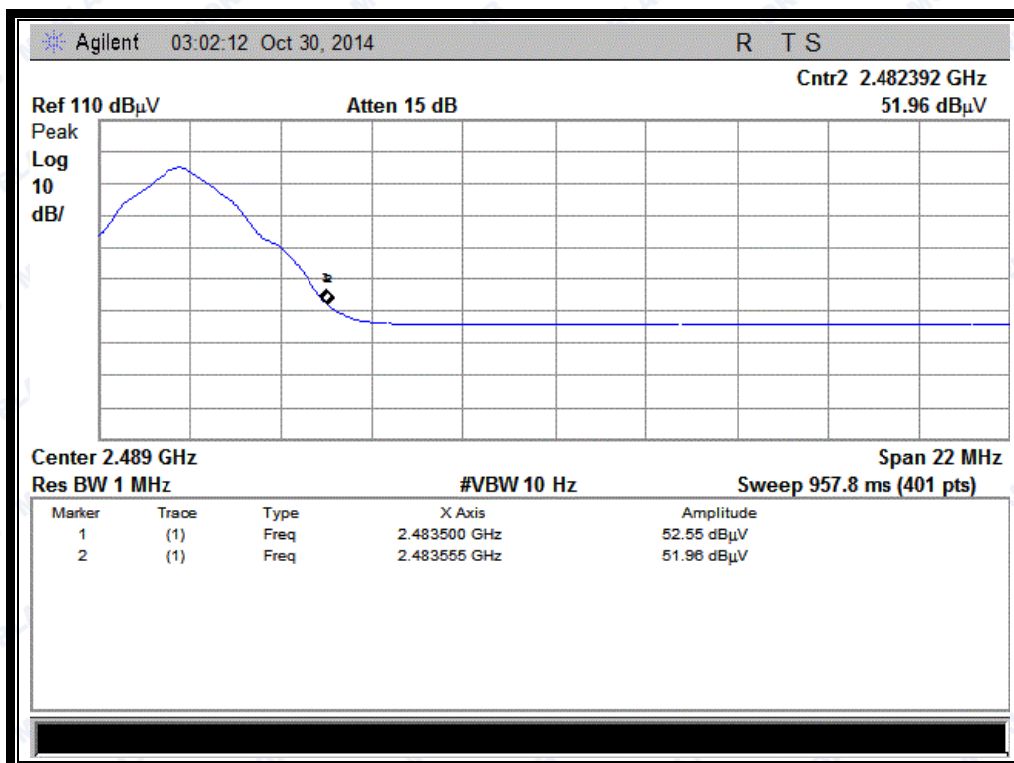

(Plot B2: Channel = 15 AVG)



## 2.7. Conducted Emission

### 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2. Test Description

#### A. Test Setup:

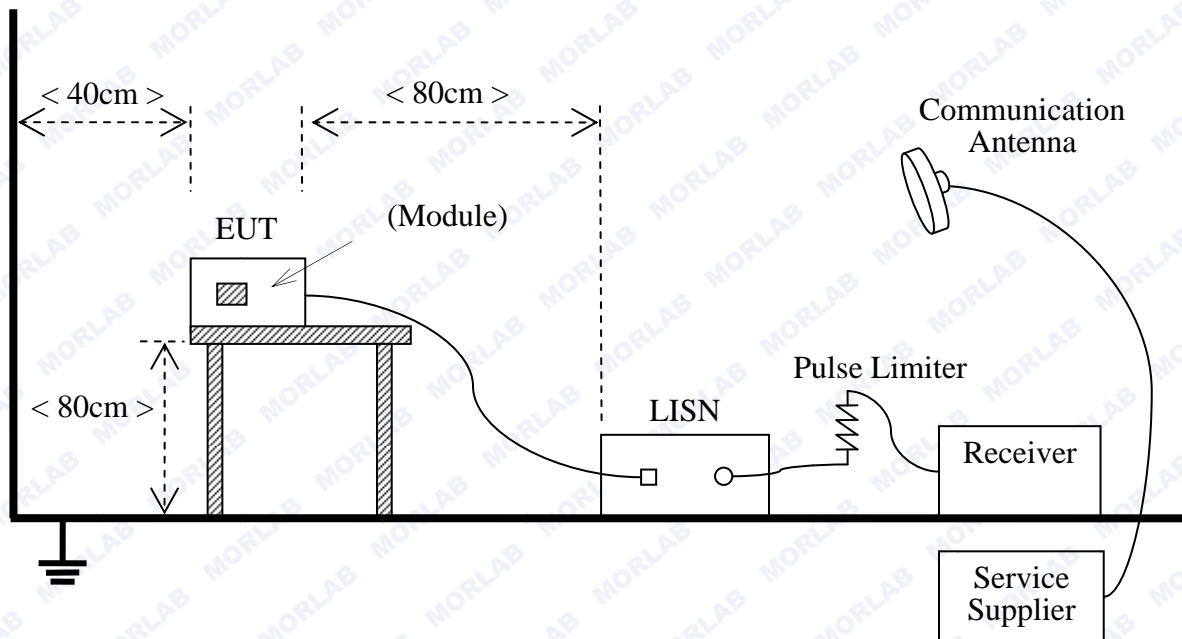

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

## B. Equipments List:

Please reference ANNEX A(1.4).

## 2.7.3. Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

### A. Test setup:


The EUT configuration of the emission tests is EUT + Link.

### B. Test Plots:



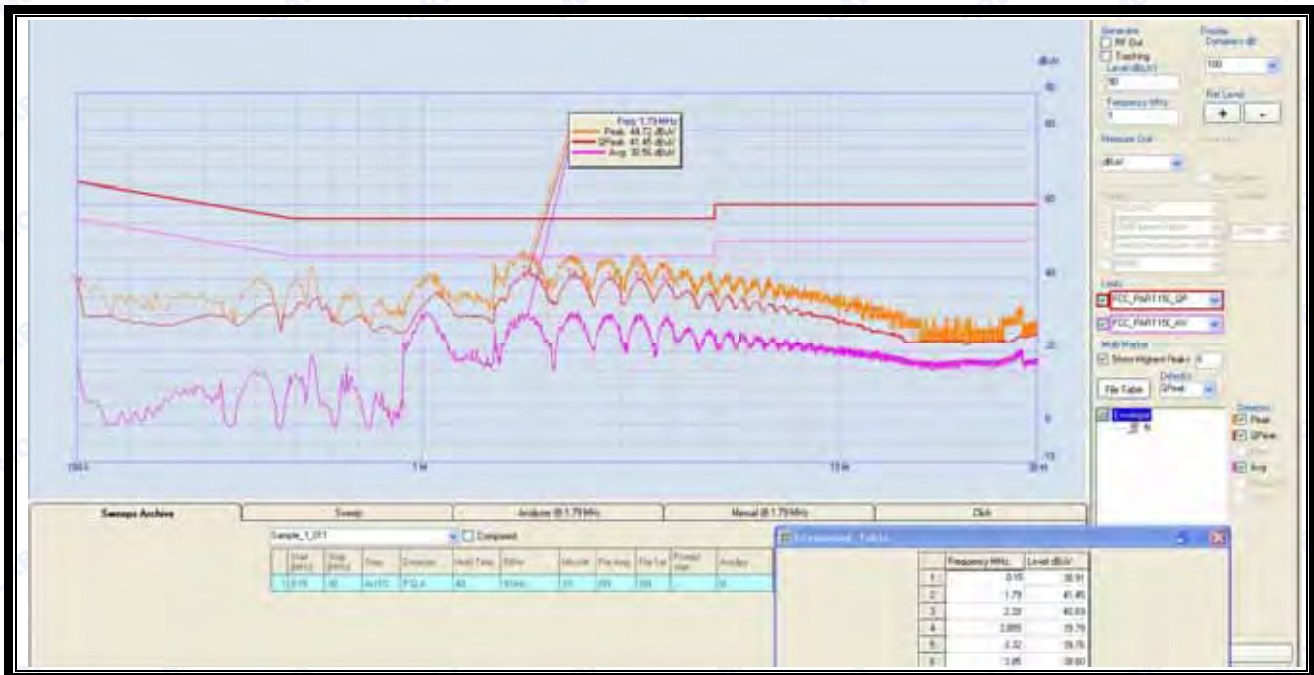

(Plot A: L Phase)

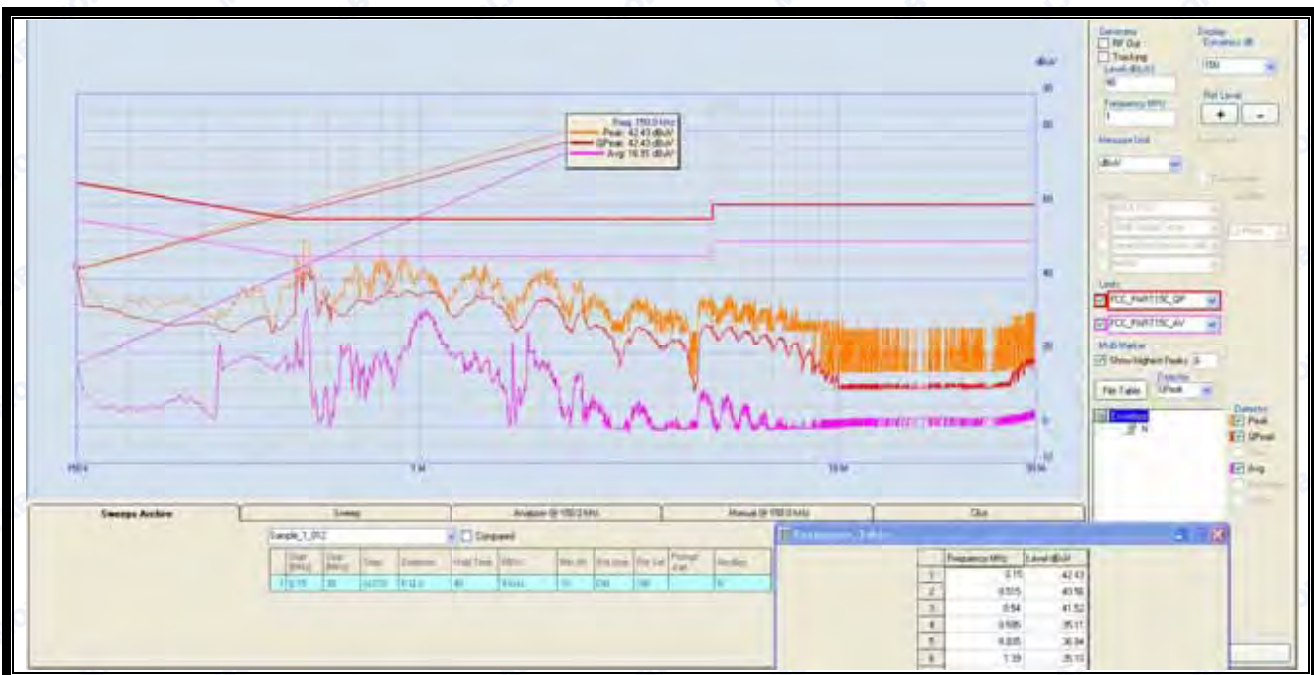

(Plot B: N Phase)



## 2.8. Radiated Emission

### 2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


### 2.8.2. Test Description

#### A. Test Setup:

- 1) For radiated emissions from 9kHz to 30MHz

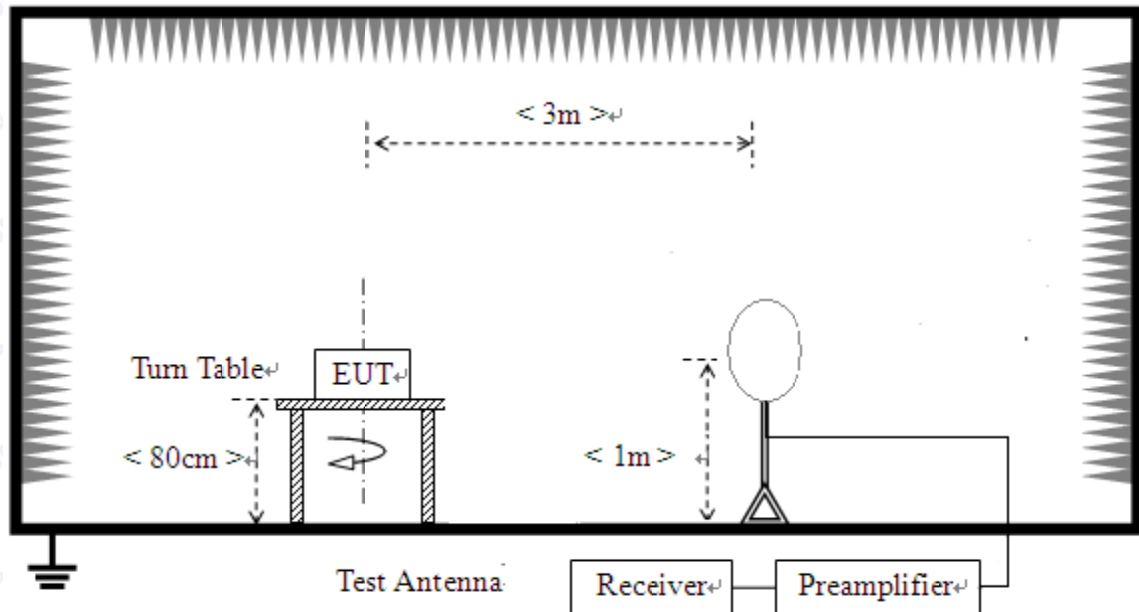


2) For radiated emissions from 30MHz to 1GHz

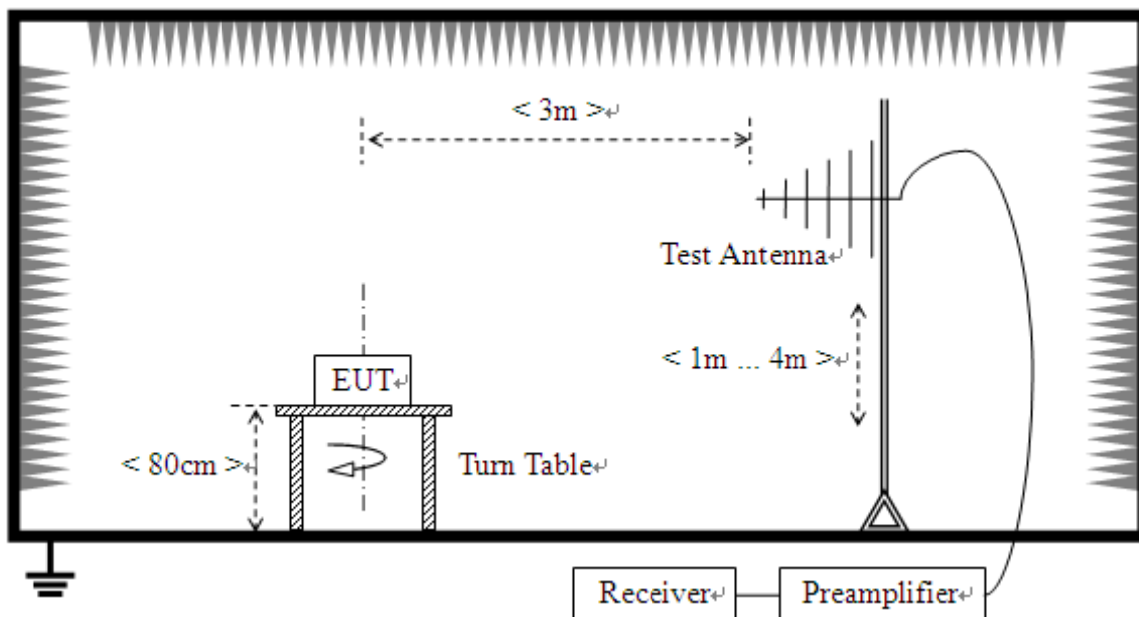



### 3) For radiated emissions above 1GHz

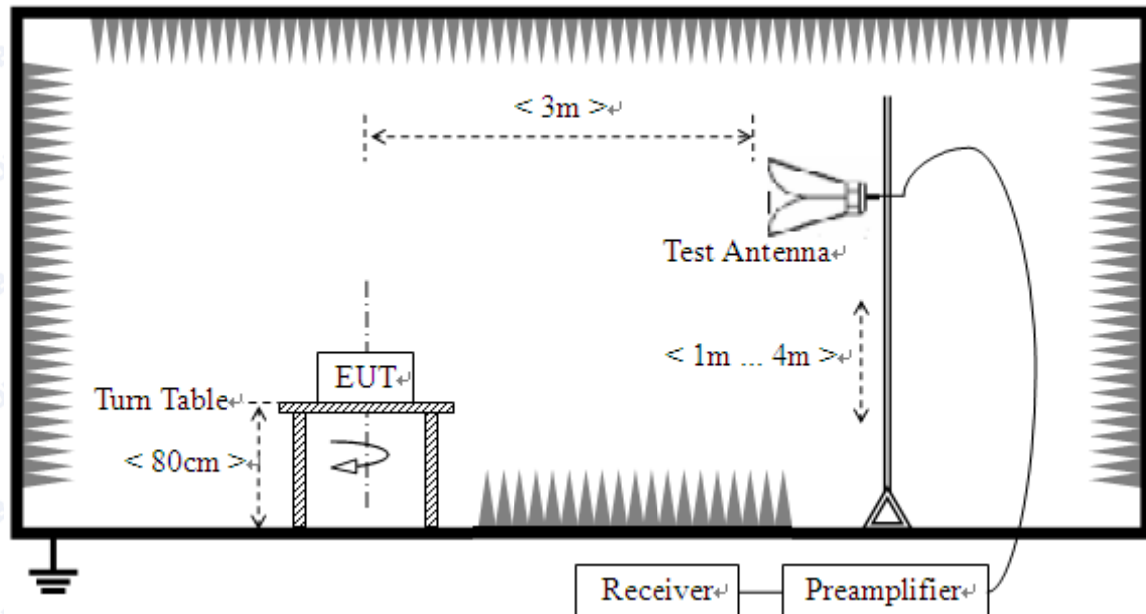

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

### B. Equipments List:



Please reference ANNEX A(1.4).

### 2.8.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

#### A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1




REPORT No. : SZ14120072W01

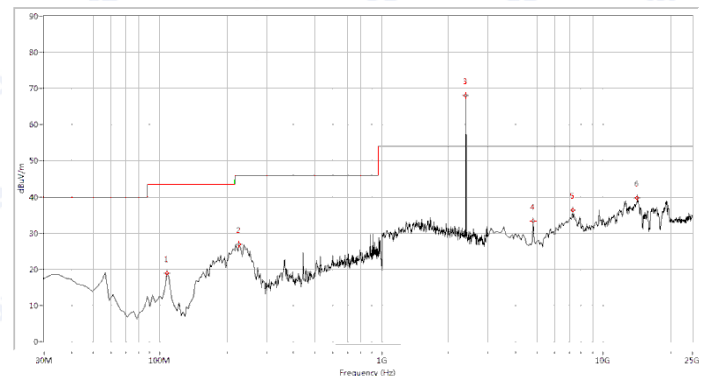

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
107.406	18.97	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
225.935	26.95	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2405.000	68.12	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
4810.474	33.39	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
7224.439	36.42	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
14192.020	39.66	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

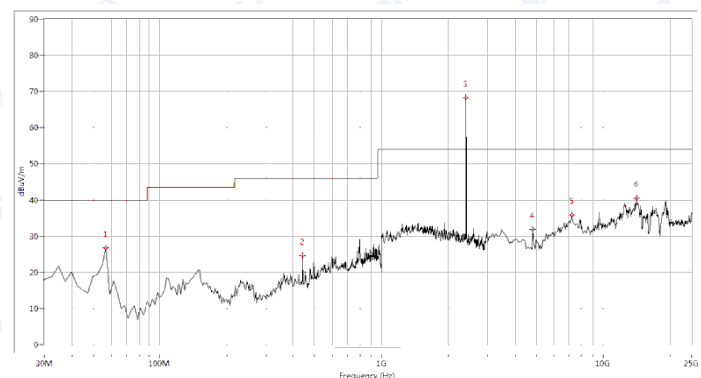


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
56.608	26.74	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
443.641	24.60	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2405.000	68.20	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
4810.474	31.91	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7224.439	35.87	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14137.157	40.40	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 8



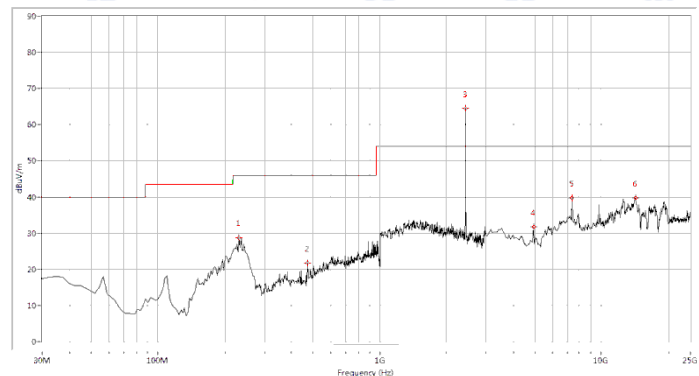

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
230.773	28.77	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
472.668	21.74	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2440.000	64.44	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
4920.200	31.73	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
7334.165	39.82	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
14246.883	39.71	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

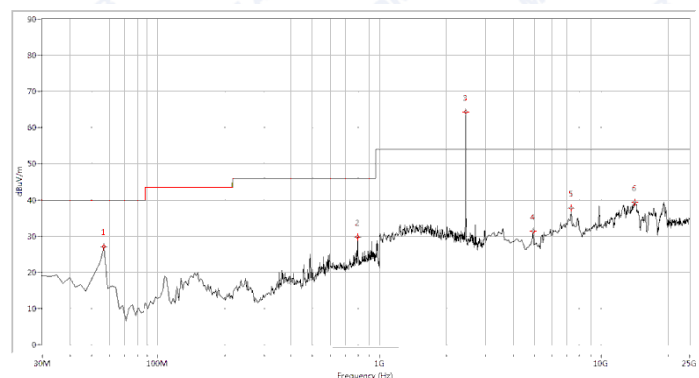

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
56.608	27.04	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
794.389	29.71	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2440.000	64.33	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
4920.200	31.30	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7334.165	37.81	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14137.157	39.44	N.A	N.A	74.0	N.A	54.0	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 15

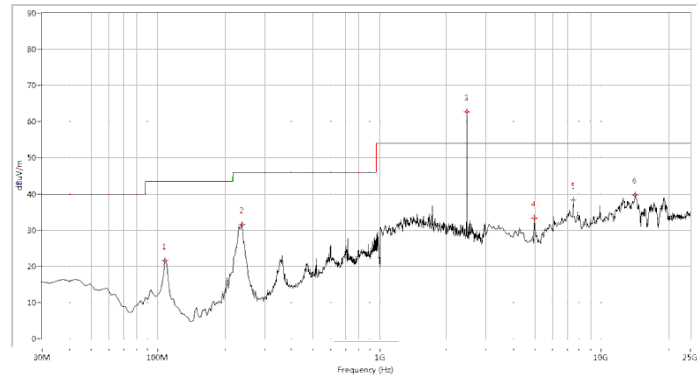

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
107.406	21.53	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
238.030	31.55	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2475.000	62.79	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
4975.062	33.30	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
7443.890	38.30	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
14192.020	39.66	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

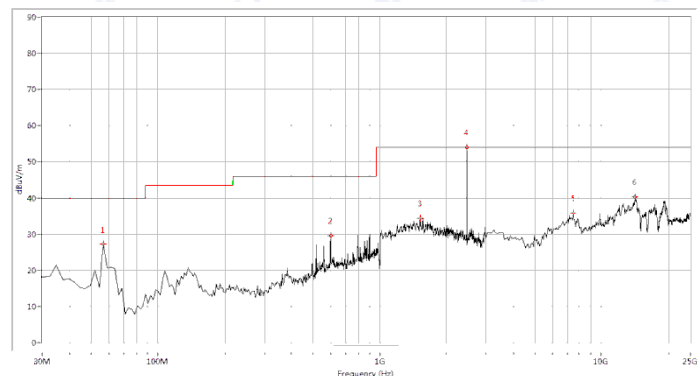

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
56.608	27.29	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
600.873	29.50	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
1508.728	34.32	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
2475.000	53.93	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
7443.890	35.89	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
14137.157	40.21	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



## 2.9. RF exposure evaluation

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Routine SAR evaluation refers to the specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

### Result:

This is portable device and the Max conducted peak output power is 14.91dBm, the maximum gain of antenna is 0dBi, the maximum output power is 14.91dBm (mW). which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.





REPORT No. : SZ14120072W01



## Annex A General Information

### 1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

### 1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

The IC registration number is 7183A-2.



REPORT No. : SZ14120072W01

## 1.4 Test Equipments Utilized

### 1.4.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2014.02.26	2015.02.25
2	Power Splitter	NW521	1506A	Weinschel	2014.02.26	2015.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2014.02.26	2015.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2014.02.26	2015.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2014.02.26	2015.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2014.02.26	2015.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

### 1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2014.02.26	2015.02.25
3	Service Supplier	100448	CMU200	R&S	2014.02.26	2015.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2014.02.26	2015.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

### 1.4.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25





REPORT No. : SZ14120072W01

2	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2014.02.26	2015.02.25
3	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2014.02.26	2015.02.25
4	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2014.02.26	2015.02.25
5	Test Antenna - Loop	1519-022	HL050S7	R&S	2014.02.26	2015.02.25
6	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2014.02.26	2015.02.25
7	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

### 1.4.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2014.02.26	2015.02.25

### 1.4.5 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2014.02.26	2015.02.25

### 1.4.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2014.02.26	2015.02.25

\*\*\*\*\* END OF REPORT \*\*\*\*\*