

TEST REPORT

Reference No. : WTS15S0323426-2E
FCC ID..... : 2AECE-ONE
Applicant : Xnovo Colombia SAS
Address : Carrera 22 #166-66, Bogota. D.C., Colombia
Manufacturer : The same as above
Address : The same as above
Product Name : Mobile Phone
Model No. : ONE
Brand..... : XNOVO
Standards..... : FCC CFR47 Part 15 Section 15.247:2014
Date of Receipt sample..... : Mar.05, 2015
Date of Test : Mar.06-12, 2015
Date of Issue : Mar.12, 2015
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
4.5 TEST FACILITY	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST	8
5.2 DESCRIPTION OF SUPPORT UNITS	9
5.3 MEASUREMENT UNCERTAINTY	9
5.4 TEST EQUIPMENT CALIBRATION	9
6 CONDUCTED EMISSION	10
6.1 E.U.T. OPERATION	10
6.2 EUT SETUP	10
6.3 MEASUREMENT DESCRIPTION	10
6.4 CONDUCTED EMISSION TEST RESULT	11
7 RADIATED EMISSIONS.....	13
7.1 EUT OPERATION.....	13
7.2 TEST SETUP	14
7.3 SPECTRUM ANALYZER SETUP	15
7.4 TEST PROCEDURE	16
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
7.6 SUMMARY OF TEST RESULTS	17
8 BAND EDGE MEASUREMENT	31
8.1 TEST PRODUCE	31
8.2 TEST RESULT	32
9 6 DB BANDWIDTH MEASUREMENT	37
9.1 TEST PROCEDURE:	37
9.2 TEST RESULT:	37
10 MAXIMUM PEAK OUTPUT POWER	46
10.1 TEST PROCEDURE:.....	46
10.2 TEST RESULT:	47
11 POWER SPECTRAL DENSITY	56
11.1 TEST PROCEDURE:.....	56
11.2 TEST RESULT:	56
12 ANTENNA REQUIREMENT	65
13 RF EXPOSURE.....	66

4 General Information

4.1 General Description of E.U.T.

Product Name	: Mobile Phone
Model No.	: ONE
Model Description	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS Class	: 12
WCDMA Band(s)	: FDD Band I/II/V
Wi-Fi Specification	: 802.11b/g/n HT20/n HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	: Xnovo_ONE
Software Version	: Xnovo_ONE_2014.12.01_V0.2

4.2 Details of E.U.T.

Operation Frequency	: GSM/GPRS 850: 824~849MHz GSM/GPRS 900: 925-960MHz DCS 1800: 1805-1880MHz PCS 1900: 1850~1910MHz WCDMA Band I: 1920-1980MHz WCDMA Band II: 1850-1910MHz WCDMA Band V: 824~849MHz WiFi: 802.11b/g/n HT20: 2412-2462MHz 802.11n HT40: 2422-2452MHz Bluetooth: 2402-2480MHz GPS: 1.57GHz
Max. RF output power	: GSM 850: 32.75dBm PCS1900: 30.35dBm WCDMA Band II: 22.25dBm WCDMA Band V: 22.57dBm WiFi: 9.29dBm Bluetooth: 2.79dBm
Type of Modulation	: GSM,GPRS: GMSK WCDMA: QPSK WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK,8DPSK

Antenna installation	: GSM/WCDMA: Wire antenna WiFi/Bluetooth: Metal Dome
Antenna Gain	: GSM 850: 0.5dBi PCS1900: 0.7dBi WCDMA Band II: 1.1dBi WCDMA Band V: 0.8dBi WiFi: 2.1dBi Bluetooth: 2.1dBi
Technical Data	: Battery DC 3.7V 1200mAh DC 5V, 700mA, charging from adapter (Adapter Input: 100-240V~50/60Hz, 0.2A)
Adapter	: Manufacture: Xnovo Colombia SAS Model No.: ONE

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	108 Mbps	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	1/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	1/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	1/19/39	TX
Band Edge	BT BLE	1 Mbps	1/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	1/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

Table 3 Tests Carried Out Under FCC part 15.207 & FCC part 15.209

Test Item	Test Mode
Conduction Emission, 0.15MHz to 30MHz	Communication(Wifi & BT BLE)

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions at Mains Terminals Disturbance Voltage						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
3m Semi-anechoic Chamber for Radiation						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2014	Apr.18,2015
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2014	Apr.18,2015
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	669	Apr.19,2014	Apr.18,2015
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2014	Mar.16,2015
8	Coaxial Cable (above 1GHz)	Top	1000MHz-25GHz	EW02014-7	Apr.10,2014	Apr.09,2015
9	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.15,2014	Sep.14,2015
10	Universal Radio Communication Tester	R&S	CMU 200	112461	Apr.11,2014	Apr.10,2015
11	Signal Generator	R&S	SMR20	100046	Sep.15,2014	Sep.14,2015
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Aug. 15,2014	Aug.14,2015
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Aug. 15,2014	Aug.14,2015
3.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Aug. 15,2014	Aug.14,2015

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode(Wifi /BT BLE), the worst data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

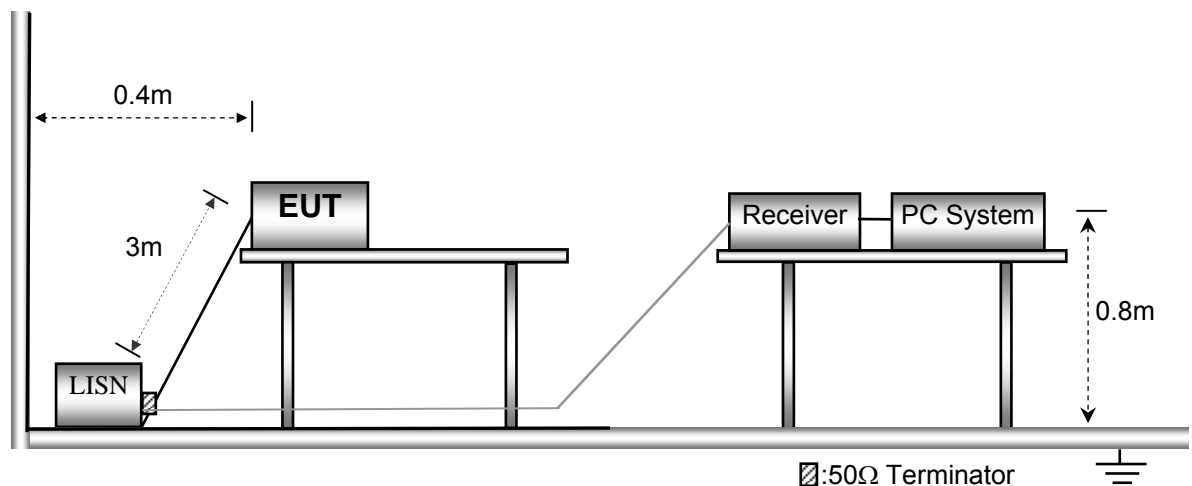

6.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: transmitting mode (Wifi)

Live line:

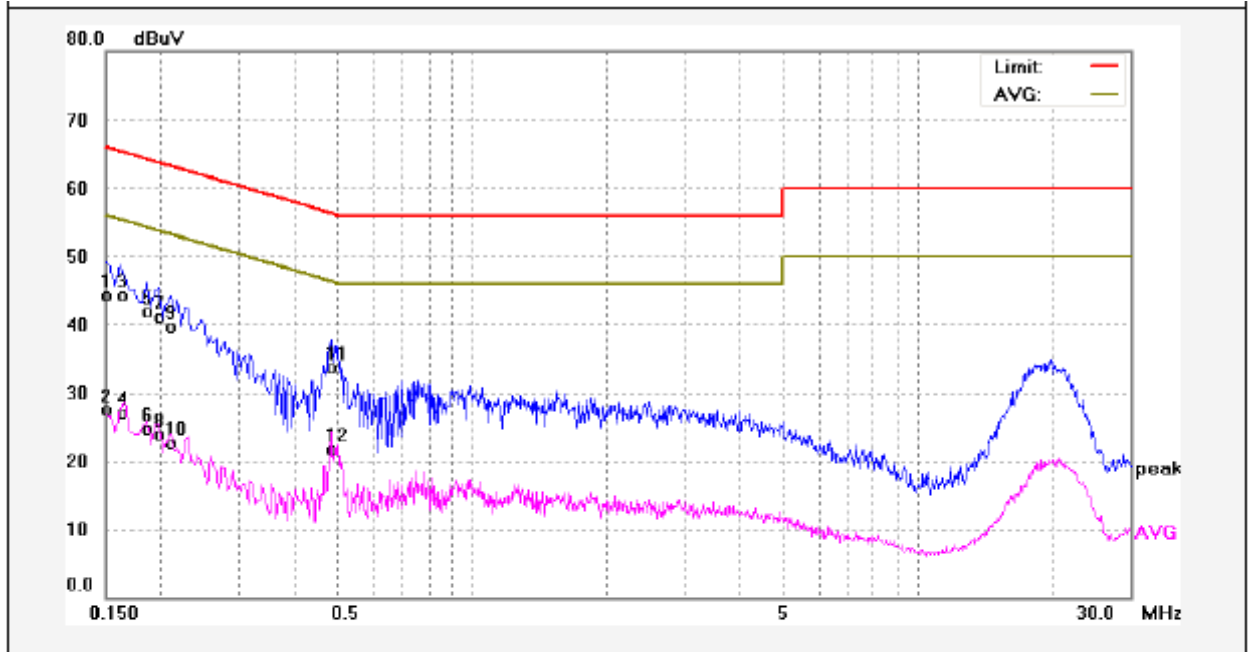

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	33.84	10.48	44.32	65.99	-21.67	QP	
2	0.1500	17.09	10.48	27.57	55.99	-28.42	AVG	
3	0.1620	33.74	10.48	44.22	65.36	-21.14	QP	
4	0.1620	16.70	10.48	27.18	55.36	-28.18	AVG	
5	0.1860	31.52	10.48	42.00	64.21	-22.21	QP	
6	0.1860	14.13	10.48	24.61	54.21	-29.60	AVG	
7	0.1980	30.63	10.48	41.11	63.69	-22.58	QP	
8	0.1980	13.43	10.48	23.91	53.69	-29.78	AVG	
9	0.2100	29.31	10.48	39.79	63.20	-23.41	QP	
10	0.2100	12.21	10.48	22.69	53.20	-30.51	AVG	
11	0.4820	23.30	10.49	33.79	56.30	-22.51	QP	
12	0.4820	11.26	10.49	21.75	46.30	-24.55	AVG	

Neutral line:

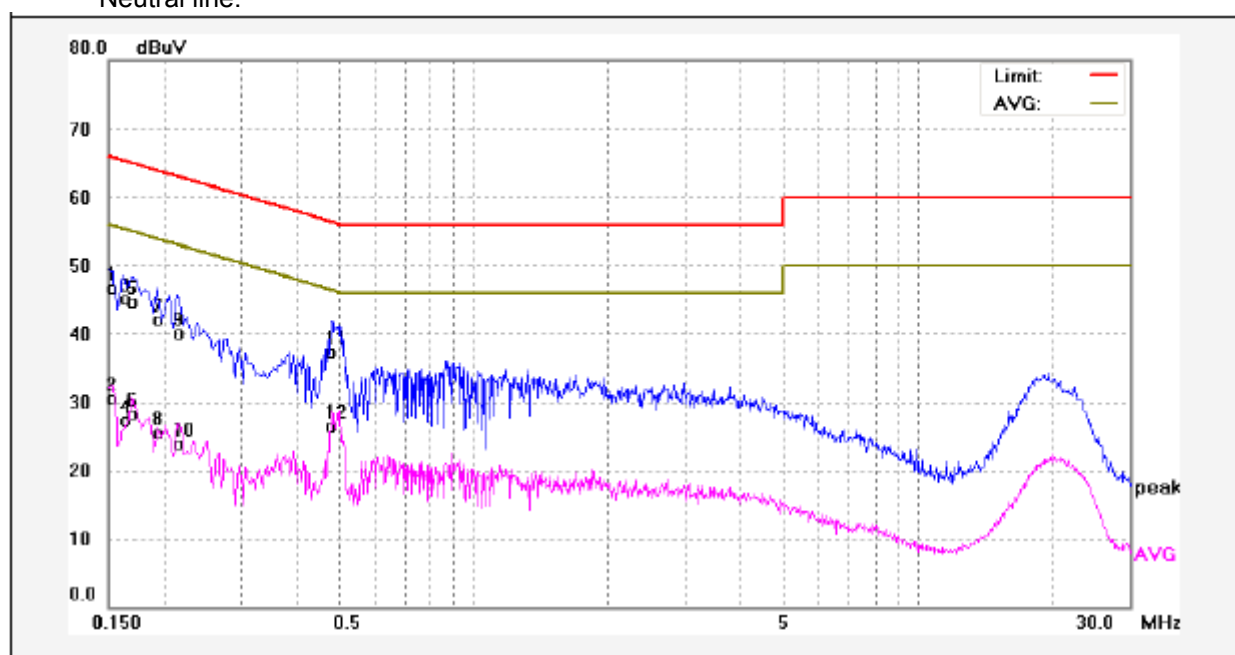

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1500	36.23	10.48	46.71	65.99	-19.28	QP	
2	0.1500	20.01	10.48	30.49	55.99	-25.50	AVG	
3	0.1620	34.57	10.48	45.05	65.36	-20.31	QP	
4	0.1620	16.84	10.48	27.32	55.36	-28.04	AVG	
5	0.1700	34.14	10.48	44.62	64.96	-20.34	QP	
6	0.1700	17.77	10.48	28.25	54.96	-26.71	AVG	
7	0.1940	31.59	10.48	42.07	63.86	-21.79	QP	
8	0.1940	15.00	10.48	25.48	53.86	-28.38	AVG	
9	0.2140	29.69	10.48	40.17	63.04	-22.87	QP	
10	0.2140	13.45	10.48	23.93	53.04	-29.11	AVG	
11	0.4780	26.83	10.49	37.32	56.37	-19.05	QP	
12	0.4780	15.94	10.49	26.43	46.37	-19.94	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.4:2003

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode(Wifi /BT BLE), the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

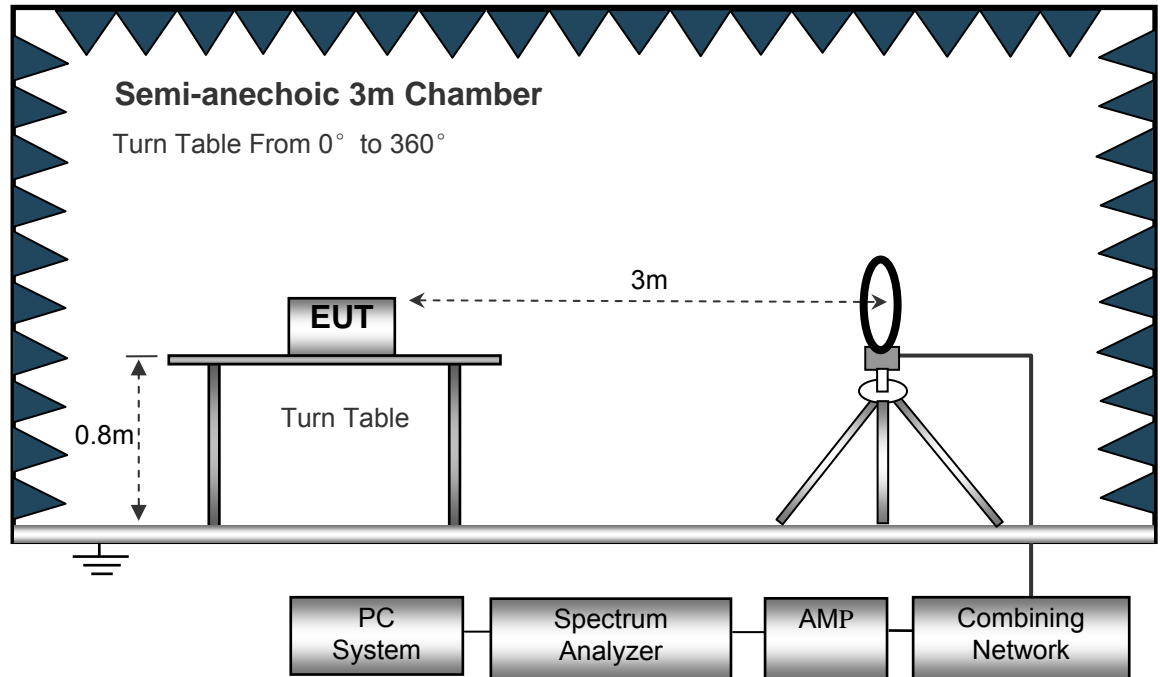

The test setup for emission measurement from 30 MHz to 1 GHz.

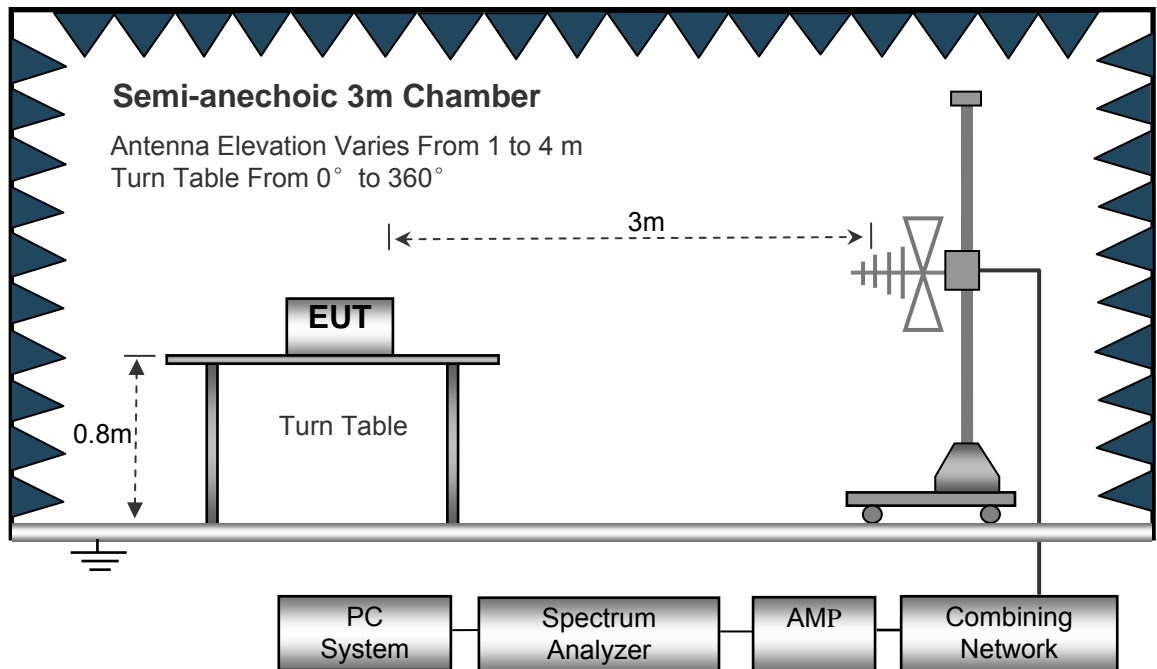

The test setup for emission measurement above 1 GHz.

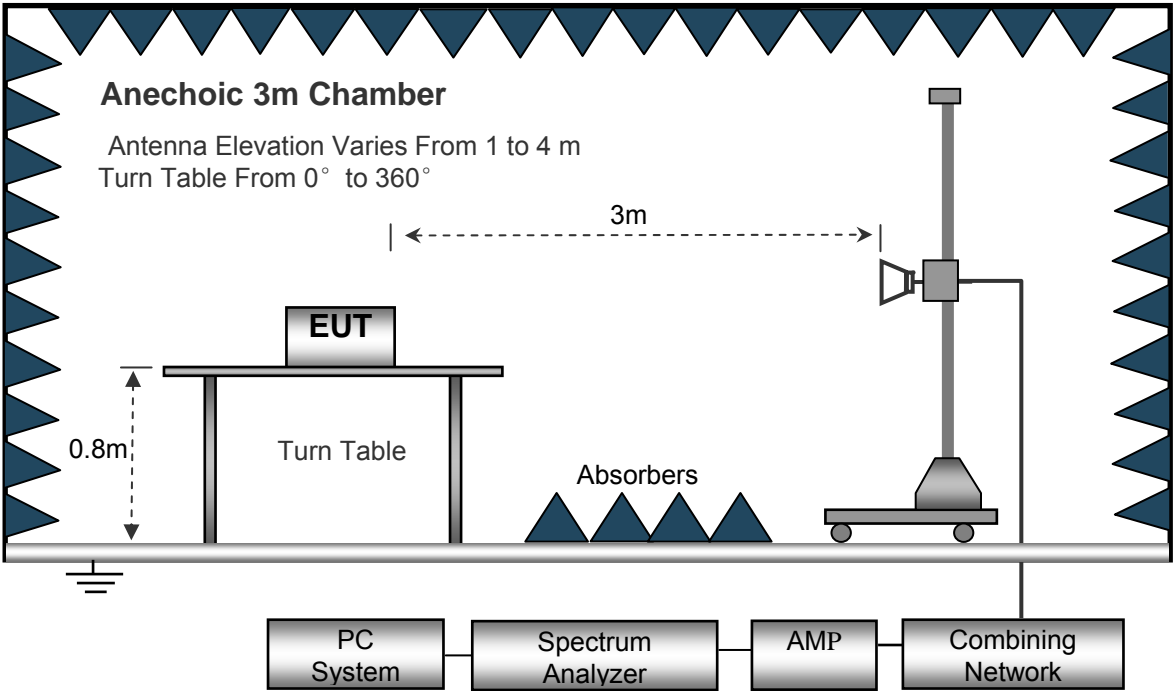

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Wifi:

Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
486.95	12.79	PK	5	1.5	H	21.09	33.88	46.00	-12.12
486.95	12.35	PK	162	2.0	V	21.09	33.44	46.00	-12.56
4824.00	50.49	PK	188	1.2	V	-1.06	49.43	74.00	-24.57
4824.00	48.65	Ave	188	1.2	V	-1.06	47.59	54.00	-6.41
7236.00	46.19	PK	275	1.4	H	1.33	47.52	74.00	-26.48
7236.00	45.35	Ave	275	1.4	H	1.33	46.68	54.00	-7.32
2328.30	45.36	PK	283	1.4	V	-13.19	32.17	74.00	-41.83
2328.30	38.51	Ave	283	1.4	V	-13.19	25.32	54.00	-28.68
2389.22	43.33	PK	28	1.4	H	-13.14	30.19	74.00	-43.81
2389.22	36.09	Ave	28	1.4	H	-13.14	22.95	54.00	-31.05
2487.97	43.54	PK	118	1.1	V	-13.08	30.46	74.00	-43.54
2487.97	38.38	Ave	118	1.1	V	-13.08	25.30	54.00	-28.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
486.95	14.74	PK	240	1.6	H	21.09	35.83	46.00	-10.17
486.95	13.47	PK	133	1.0	V	21.09	34.56	46.00	-11.44
4874.00	49.49	PK	27	1.3	V	-0.62	48.87	74.00	-25.13
4874.00	47.13	Ave	27	1.3	V	-0.62	46.51	54.00	-7.49
7311.00	45.28	PK	38	1.1	H	2.21	47.49	74.00	-26.51
7311.00	44.72	Ave	38	1.1	H	2.21	46.93	54.00	-7.07
2311.00	45.71	PK	181	1.7	V	-13.19	32.52	74.00	-41.48
2311.00	39.82	Ave	181	1.7	V	-13.19	26.63	54.00	-27.37
2381.59	44.69	PK	242	1.6	H	-13.14	31.55	74.00	-42.45
2381.59	38.82	Ave	242	1.6	H	-13.14	25.68	54.00	-28.32
2491.43	43.23	PK	177	1.6	V	-13.08	30.15	74.00	-43.85
2491.43	36.00	Ave	177	1.6	V	-13.08	22.92	54.00	-31.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
486.95	14.56	PK	338	1.4	H	21.09	35.65	46.00	-10.35
486.95	13.17	PK	9	1.7	V	21.09	34.26	46.00	-11.74
4924.00	50.39	PK	234	1.6	V	-0.24	50.15	74.00	-23.85
4924.00	48.74	Ave	234	1.6	V	-0.24	48.50	54.00	-5.50
7386.00	48.28	PK	1	1.5	H	2.84	51.12	74.00	-22.88
7386.00	47.37	Ave	1	1.5	H	2.84	50.21	54.00	-3.79
2339.30	45.98	PK	230	1.9	V	-13.19	32.79	74.00	-41.21
2339.30	38.55	Ave	230	1.9	V	-13.19	25.36	54.00	-28.64
2389.72	44.77	PK	161	1.9	H	-13.14	31.63	74.00	-42.37
2389.72	36.36	Ave	161	1.9	H	-13.14	23.22	54.00	-30.78
2488.27	42.28	PK	139	1.5	V	-13.08	29.20	74.00	-44.80
2488.27	36.07	Ave	139	1.5	V	-13.08	22.99	54.00	-31.01

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
486.95	13.06	PK	83	1.1	H	21.09	34.15	46.00	-11.85
486.95	13.67	PK	11	1.4	V	21.09	34.76	46.00	-11.24
4824.00	51.67	PK	309	1.0	V	-1.06	50.61	74.00	-23.39
4824.00	48.39	Ave	309	1.0	V	-1.06	47.33	54.00	-6.67
7236.00	47.18	PK	202	1.3	H	1.33	48.51	74.00	-25.49
7236.00	46.47	Ave	202	1.3	H	1.33	47.80	54.00	-6.20
2326.68	45.95	PK	309	1.9	V	-13.19	32.76	74.00	-41.24
2326.68	37.63	Ave	309	1.9	V	-13.19	24.44	54.00	-29.56
2360.71	42.66	PK	66	1.9	H	-13.14	29.52	74.00	-44.48
2360.71	36.45	Ave	66	1.9	H	-13.14	23.31	54.00	-30.69
2499.23	44.36	PK	38	1.1	V	-13.08	31.28	74.00	-42.72
2499.23	38.02	Ave	38	1.1	V	-13.08	24.94	54.00	-29.06

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
486.95	13.90	PK	87	1.2	H	21.09	34.99	46.00	-11.01
486.95	12.57	PK	201	1.2	V	21.09	33.66	46.00	-12.34
4874.00	49.68	PK	122	1.8	V	-0.62	49.06	74.00	-24.94
4874.00	48.72	Ave	122	1.8	V	-0.62	48.10	54.00	-5.90
7311.00	47.48	PK	212	1.0	H	2.21	49.69	74.00	-24.31
7311.00	46.22	Ave	212	1.0	H	2.21	48.43	54.00	-5.57
2317.27	46.18	PK	348	1.1	V	-13.19	32.99	74.00	-41.01
2317.27	39.01	Ave	348	1.1	V	-13.19	25.82	54.00	-28.18
2354.96	43.70	PK	305	1.2	H	-13.14	30.56	74.00	-43.44
2354.96	38.02	Ave	305	1.2	H	-13.14	24.88	54.00	-29.12
2485.92	42.34	PK	340	1.2	V	-13.08	29.26	74.00	-44.74
2485.92	36.83	Ave	340	1.2	V	-13.08	23.75	54.00	-30.25

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
486.95	14.20	PK	28	1.4	H	21.09	35.29	46.00	-10.71
486.95	12.99	PK	61	1.4	V	21.09	34.08	46.00	-11.92
4924.00	50.73	PK	106	1.7	V	-0.24	50.49	74.00	-23.51
4924.00	49.46	Ave	106	1.7	V	-0.24	49.22	54.00	-4.78
7386.00	47.66	PK	24	1.4	H	2.84	50.50	74.00	-23.50
7386.00	46.46	Ave	24	1.4	H	2.84	49.30	54.00	-4.70
2319.52	46.39	PK	134	1.1	V	-13.19	33.20	74.00	-40.80
2319.52	37.50	Ave	134	1.1	V	-13.19	24.31	54.00	-29.69
2386.88	43.97	PK	350	1.2	H	-13.14	30.83	74.00	-43.17
2386.88	38.05	Ave	350	1.2	H	-13.14	24.91	54.00	-29.09
2491.08	42.68	PK	27	1.0	V	-13.08	29.60	74.00	-44.40
2491.08	38.19	Ave	27	1.0	V	-13.08	25.11	54.00	-28.89

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Low Channel 2412MHz									
486.95	14.14	PK	63	1.6	H	21.09	35.23	46.00	-10.77
486.95	12.94	PK	99	1.1	V	21.09	34.03	46.00	-11.97
4824.00	50.58	PK	161	1.9	V	-1.06	49.52	74.00	-24.48
4824.00	48.90	Ave	161	1.9	V	-1.06	47.84	54.00	-6.16
7236.00	47.04	PK	247	1.2	H	1.33	48.37	74.00	-25.63
7236.00	45.58	Ave	247	1.2	H	1.33	46.91	54.00	-7.09
2310.89	45.48	PK	286	1.7	V	-13.19	32.29	74.00	-41.71
2310.89	37.36	Ave	286	1.7	V	-13.19	24.17	54.00	-29.83
2353.02	43.85	PK	158	1.9	H	-13.14	30.71	74.00	-43.29
2353.02	37.40	Ave	158	1.9	H	-13.14	24.26	54.00	-29.74
2496.80	42.16	PK	47	1.1	V	-13.08	29.08	74.00	-44.92
2496.80	37.30	Ave	47	1.1	V	-13.08	24.22	54.00	-29.78

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: Middle Channel 2437MHz									
486.95	13.57	PK	23	1.8	H	21.09	34.66	46.00	-11.34
486.95	13.95	PK	207	2.0	V	21.09	35.04	46.00	-10.96
4874.00	50.37	PK	9	1.6	V	-0.62	49.75	74.00	-24.25
4874.00	48.45	Ave	9	1.6	V	-0.62	47.83	54.00	-6.17
7311.00	47.62	PK	56	1.7	H	2.21	49.83	74.00	-24.17
7311.00	45.33	Ave	56	1.7	H	2.21	47.54	54.00	-6.46
2330.92	46.00	PK	196	1.2	V	-13.19	32.81	74.00	-41.19
2330.92	37.08	Ave	196	1.2	V	-13.19	23.89	54.00	-30.11
2359.83	42.53	PK	179	1.3	H	-13.14	29.39	74.00	-44.61
2359.83	38.78	Ave	179	1.3	H	-13.14	25.64	54.00	-28.36
2494.27	42.14	PK	199	1.8	V	-13.08	29.06	74.00	-44.94
2494.27	38.22	Ave	199	1.8	V	-13.08	25.14	54.00	-28.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n20: High Channel 2462MHz									
486.95	14.32	PK	256	1.5	H	21.09	35.41	46.00	-10.59
486.95	14.31	PK	310	1.6	V	21.09	35.40	46.00	-10.60
4924.00	50.63	PK	296	1.6	V	-0.24	50.39	74.00	-23.61
4924.00	48.82	Ave	296	1.6	V	-0.24	48.58	54.00	-5.42
7386.00	47.35	PK	277	1.4	H	2.84	50.19	74.00	-23.81
7386.00	45.09	Ave	277	1.4	H	2.84	47.93	54.00	-6.07
2319.34	45.09	PK	269	1.3	V	-13.19	31.90	74.00	-42.10
2319.34	38.50	Ave	269	1.3	V	-13.19	25.31	54.00	-28.69
2369.57	43.15	PK	278	1.7	H	-13.14	30.01	74.00	-43.99
2369.57	36.48	Ave	278	1.7	H	-13.14	23.34	54.00	-30.66
2487.34	44.40	PK	247	1.6	V	-13.08	31.32	74.00	-42.68
2487.34	36.59	Ave	247	1.6	V	-13.08	23.51	54.00	-30.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Low Channel 2422MHz									
486.95	13.41	PK	77	1.0	H	21.09	34.50	46.00	-11.50
486.95	14.20	PK	321	1.3	V	21.09	35.29	46.00	-10.71
4844.00	50.72	PK	20	1.7	V	-1.06	49.66	74.00	-24.34
4844.00	48.53	Ave	20	1.7	V	-1.06	47.47	54.00	-6.53
7266.00	48.23	PK	74	2.0	H	1.33	49.56	74.00	-24.44
7266.00	47.83	Ave	74	2.0	H	1.33	49.16	54.00	-4.84
2341.53	45.62	PK	97	1.8	V	-13.19	32.43	74.00	-41.57
2341.53	39.29	Ave	97	1.8	V	-13.19	26.10	54.00	-27.90
2374.84	42.93	PK	13	1.5	H	-13.14	29.79	74.00	-44.21
2374.84	36.13	Ave	13	1.5	H	-13.14	22.99	54.00	-31.01
2498.98	43.19	PK	136	1.9	V	-13.08	30.11	74.00	-43.89
2498.98	37.11	Ave	136	1.9	V	-13.08	24.03	54.00	-29.97

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: Middle Channel 2437MHz									
486.95	13.77	PK	39	1.2	H	21.09	34.86	46.00	-11.14
486.95	13.29	PK	292	1.6	V	21.09	34.38	46.00	-11.62
4874.00	49.02	PK	133	1.1	V	-0.62	48.40	74.00	-25.60
4874.00	48.46	Ave	133	1.1	V	-0.62	47.84	54.00	-6.16
7311.00	47.36	PK	105	1.1	H	2.21	49.57	74.00	-24.43
7311.00	46.88	Ave	105	1.1	H	2.21	49.09	54.00	-4.91
2320.75	46.27	PK	188	1.2	V	-13.19	33.08	74.00	-40.92
2320.75	39.76	Ave	188	1.2	V	-13.19	26.57	54.00	-27.43
2379.28	42.51	PK	261	1.3	H	-13.14	29.37	74.00	-44.63
2379.28	38.99	Ave	261	1.3	H	-13.14	25.85	54.00	-28.15
2492.00	42.50	PK	296	1.0	V	-13.08	29.42	74.00	-44.58
2492.00	37.73	Ave	296	1.0	V	-13.08	24.65	54.00	-29.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
n40: High Channel 2452MHz									
486.95	14.15	PK	189	1.6	H	21.09	35.24	46.00	-10.76
486.95	14.33	PK	231	1.6	V	21.09	35.42	46.00	-10.58
4904.00	50.82	PK	192	1.2	V	-0.24	50.58	74.00	-23.42
4904.00	48.37	Ave	192	1.2	V	-0.24	48.13	54.00	-5.87
7356.00	48.01	PK	188	2.0	H	2.84	50.85	74.00	-23.15
7356.00	47.81	Ave	188	2.0	H	2.84	50.65	54.00	-3.35
2315.61	45.95	PK	121	1.7	V	-13.19	32.76	74.00	-41.24
2315.61	39.07	Ave	121	1.7	V	-13.19	25.88	54.00	-28.12
2373.57	43.48	PK	229	1.6	H	-13.14	30.34	74.00	-43.66
2373.57	36.40	Ave	229	1.6	H	-13.14	23.26	54.00	-30.74
2488.48	44.27	PK	101	1.2	V	-13.08	31.19	74.00	-42.81
2488.48	37.64	Ave	101	1.2	V	-13.08	24.56	54.00	-29.44

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BT BLE:**Test Frequency : 32.768kHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Low Channel 2402MHz									
486.95	14.29	PK	139	1.1	H	21.09	35.38	46.00	-10.62
486.95	12.40	PK	257	1.3	V	21.09	33.49	46.00	-12.51
4804	45.22	PK	242	1.4	V	-1.06	44.16	74.00	-29.84
4804	43.1	Ave	242	1.4	V	-1.06	42.04	54.00	-11.96
7206	44.69	PK	346	1.1	V	1.33	46.02	74.00	-27.98
7206	43.81	Ave	346	1.1	V	1.33	45.14	54.00	-8.86

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
Middle Channel 2440MHz									
486.95	13.32	PK	5	1.4	H	21.09	34.41	46.00	-11.59
486.95	12.47	PK	288	1.5	V	21.09	33.56	46.00	-12.44
4880	45.32	PK	270	1.3	V	-0.62	44.7	74.00	-29.30
4880	44.19	Ave	270	1.3	V	-0.62	43.57	54.00	-10.43
7320	44.09	PK	353	1.3	V	2.21	46.3	74.00	-27.70
7320	42.81	Ave	353	1.3	V	2.21	45.02	54.00	-8.98

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
High Channel 2480MHz									
486.95	13.26	PK	81	1.9	H	21.09	34.35	46.00	-11.65
486.95	13.57	PK	242	1.8	V	21.09	34.66	46.00	-11.34
4960	44.77	PK	324	1.6	V	-0.24	44.53	74.00	-29.47
4960	42.8	Ave	324	1.6	V	-0.24	42.56	54.00	-11.44
7440	43.02	PK	256	1.6	V	2.84	45.86	74.00	-28.14
7440	42.38	Ave	256	1.6	V	2.84	45.22	54.00	-8.78

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported

8 Band Edge Measurement


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 v03r02 06/05/2014
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

8.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result


Test result plots shown as follows:

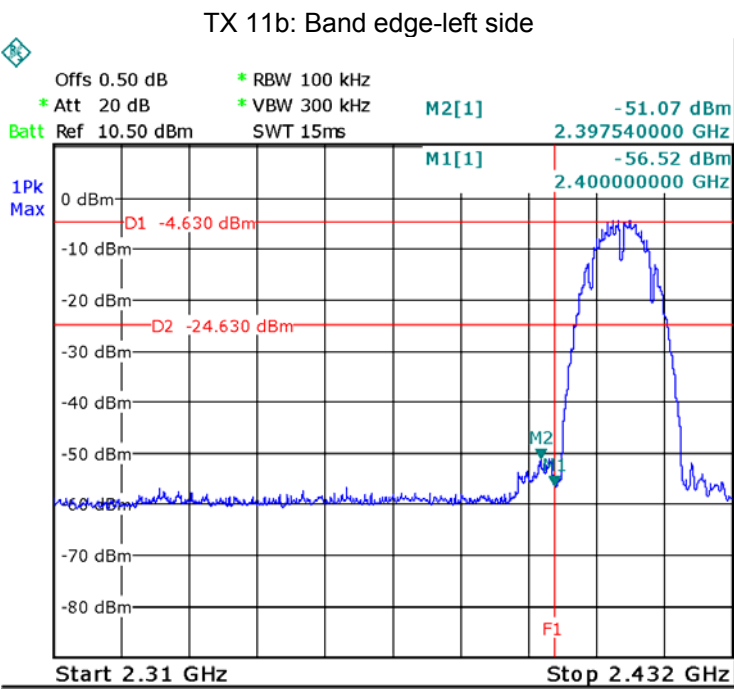


TX 11b: Band edge-right side


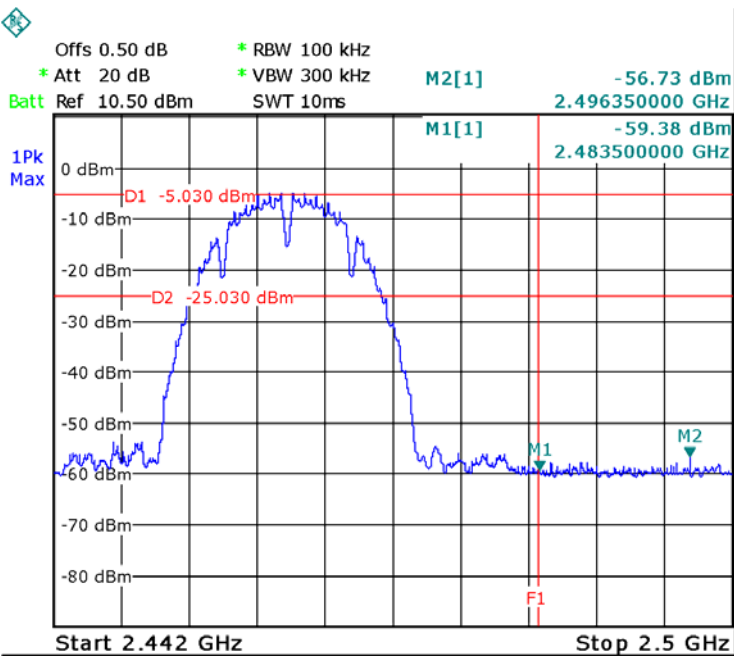




TX 11g: Band edge-left side


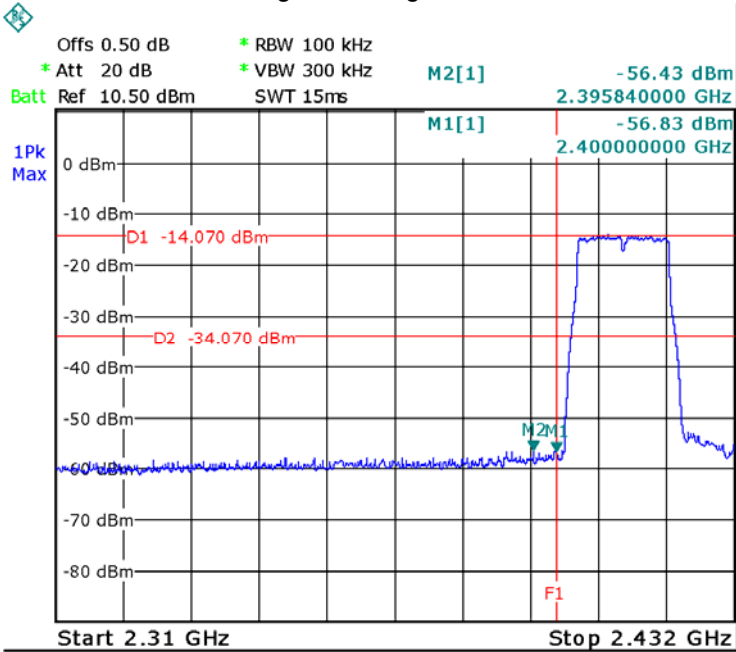


TX 11g: Band edge-right side

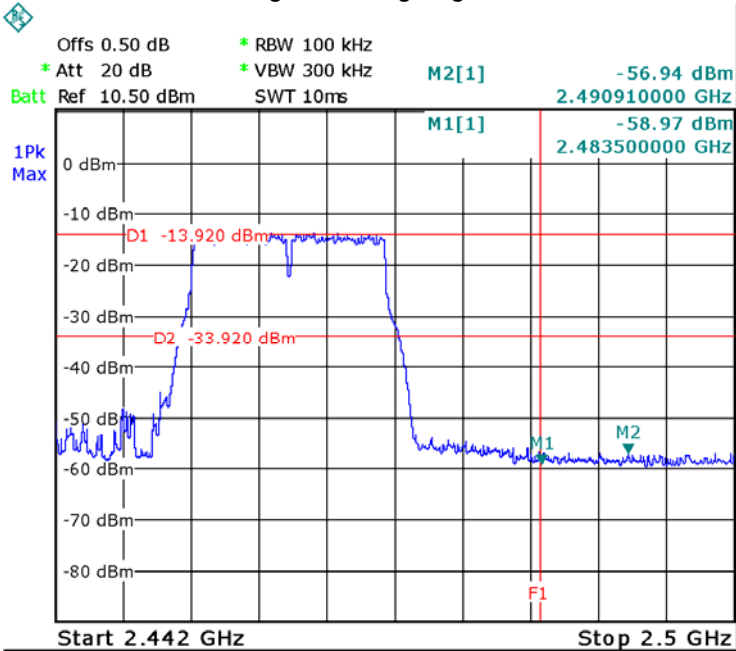

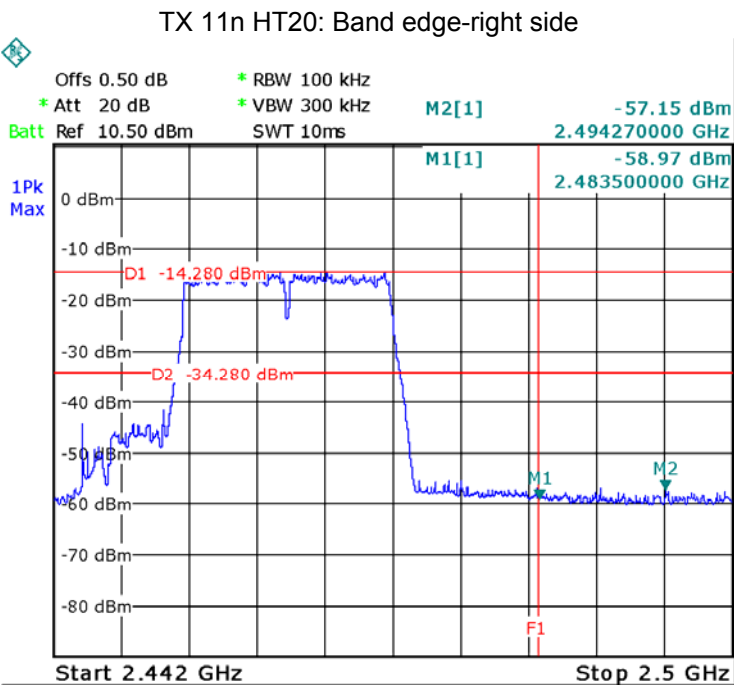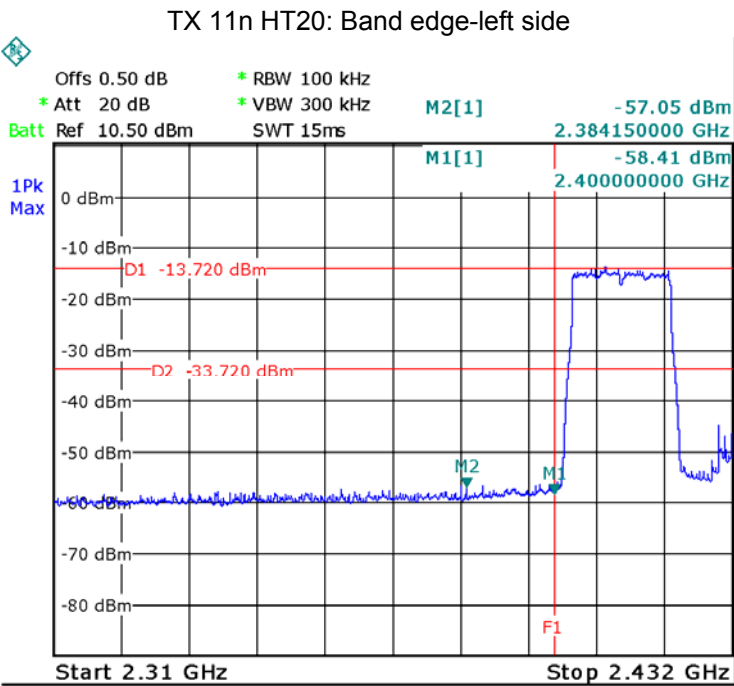

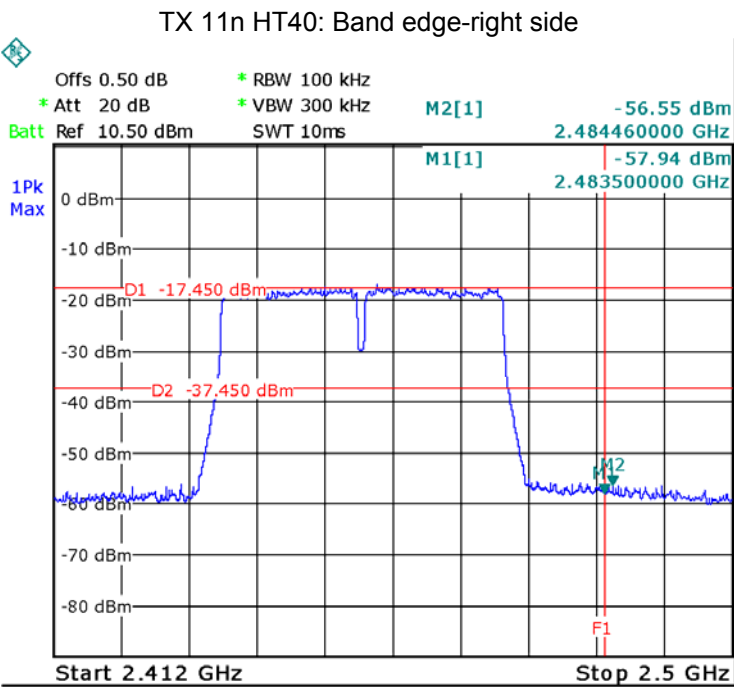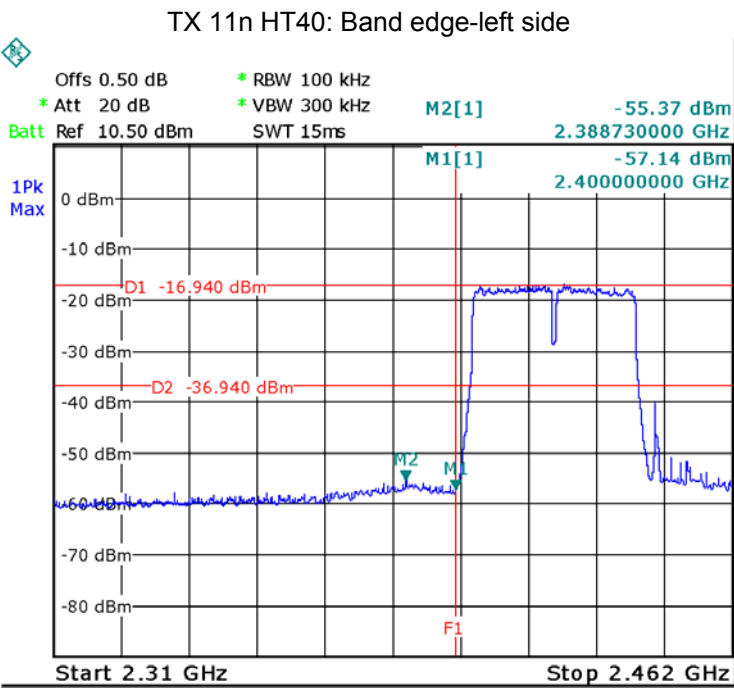

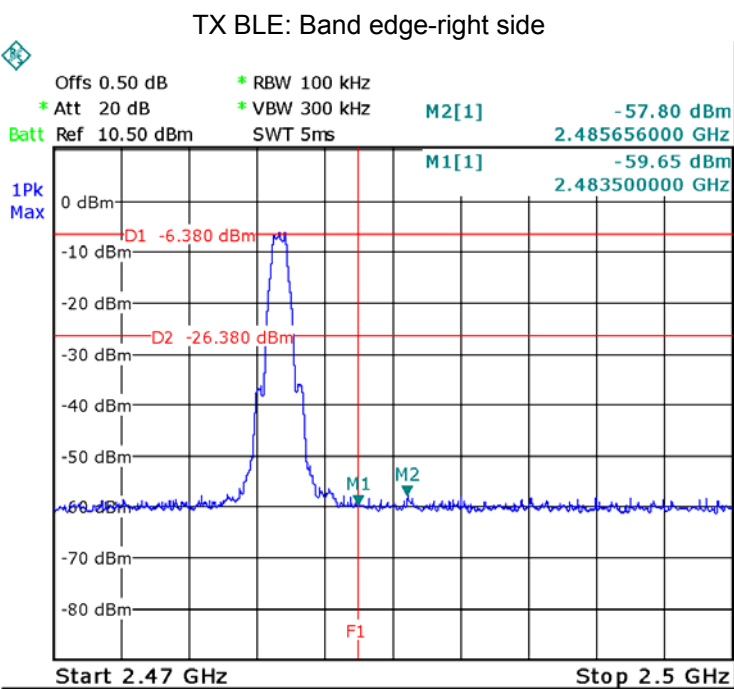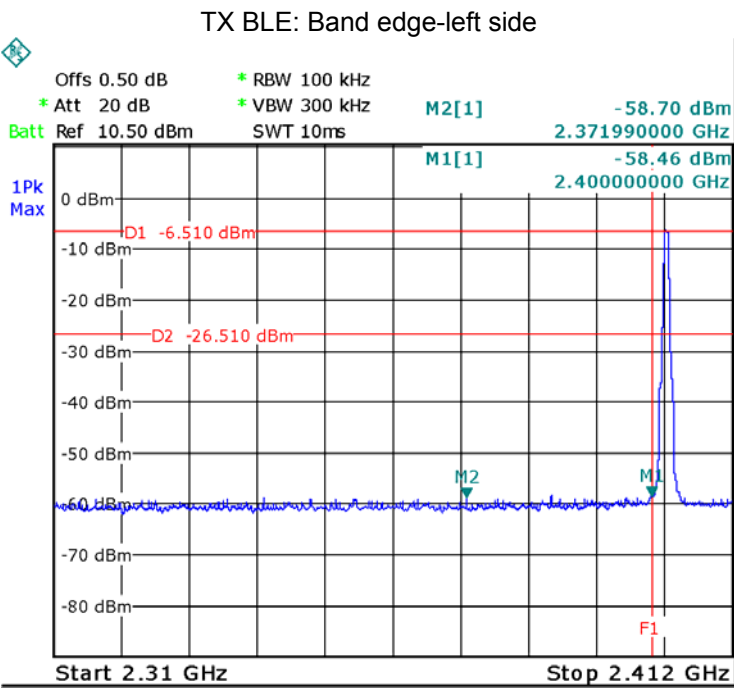

9 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 v03r02 06/05/2014



9.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



9.2 Test Result:



Operation mode	Bandwidth (MHz)		
TX 11b	Channel 1	Channel 6	Channel 11
	10.060	10.060	10.060
TX 11g	Channel 1	Channel 6	Channel 11
	16.617	16.617	16.617
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.838	17.838	17.838
TX 11n HT40	Channel 3	Channel 6	Channel 9
	36.560	36.560	36.560
BT BLE	Channel 0	Channel 19	Channel 39
	0.659	0.659	0.659



Test result plot as follows:

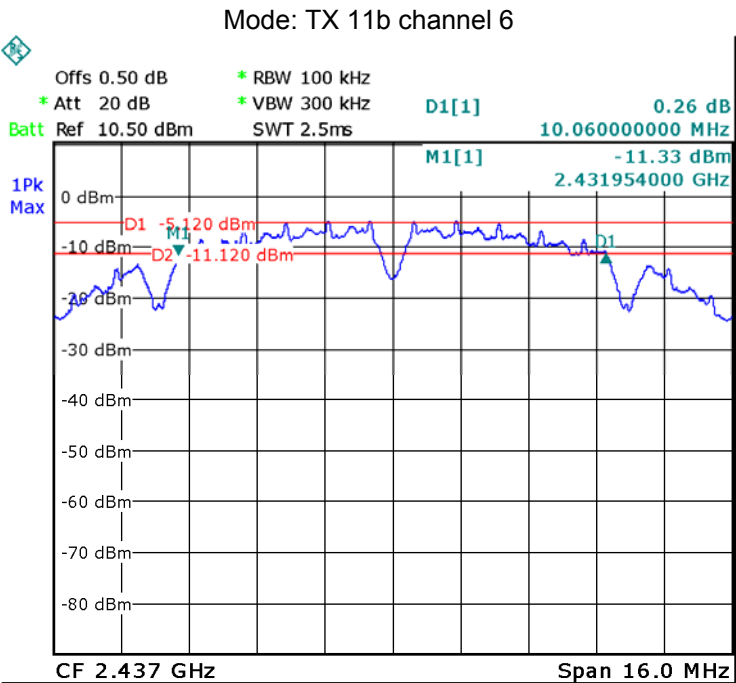
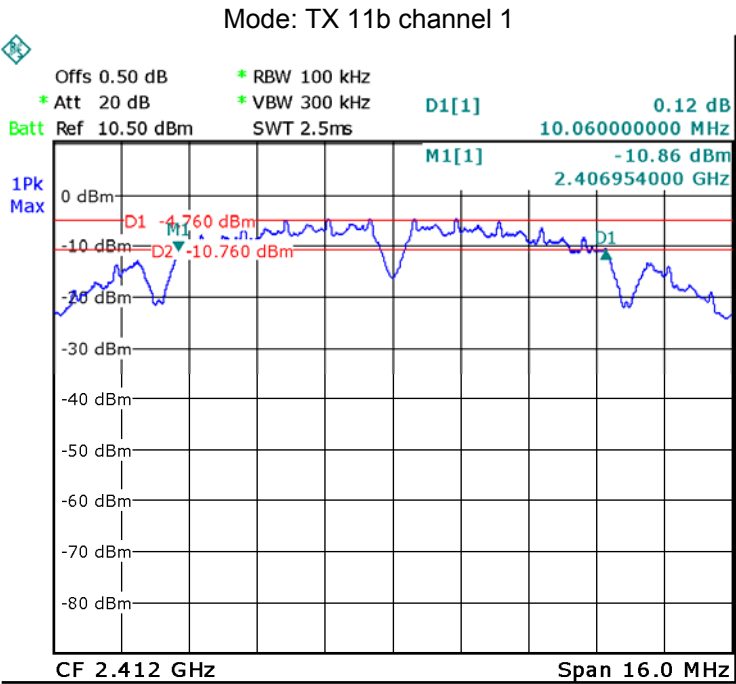


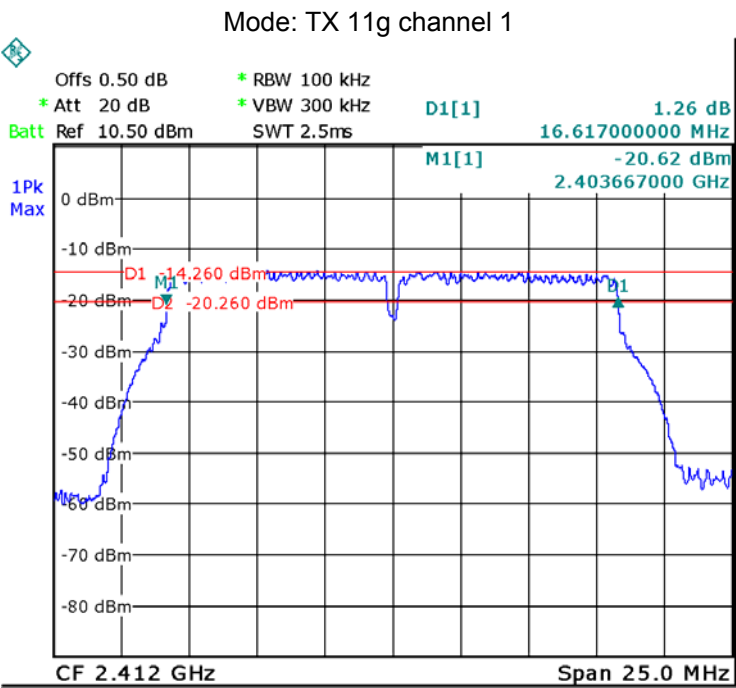
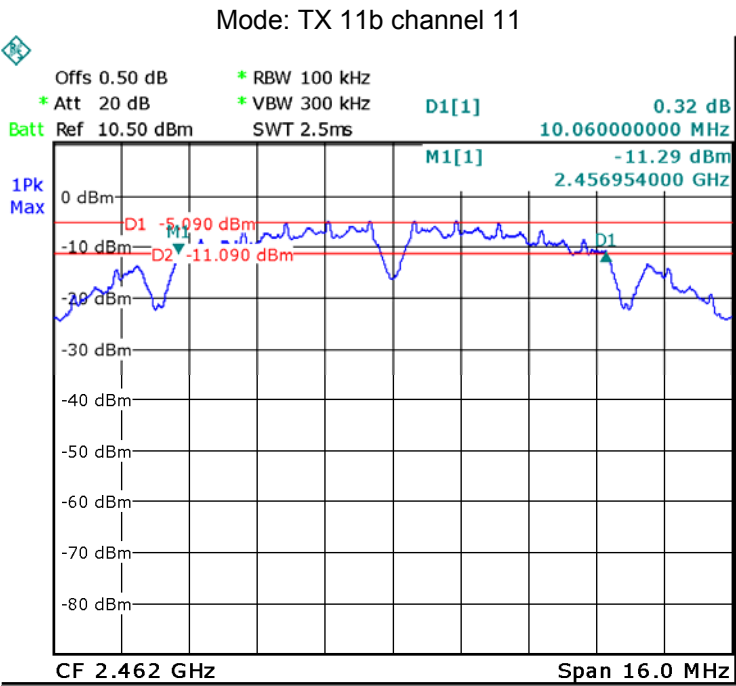


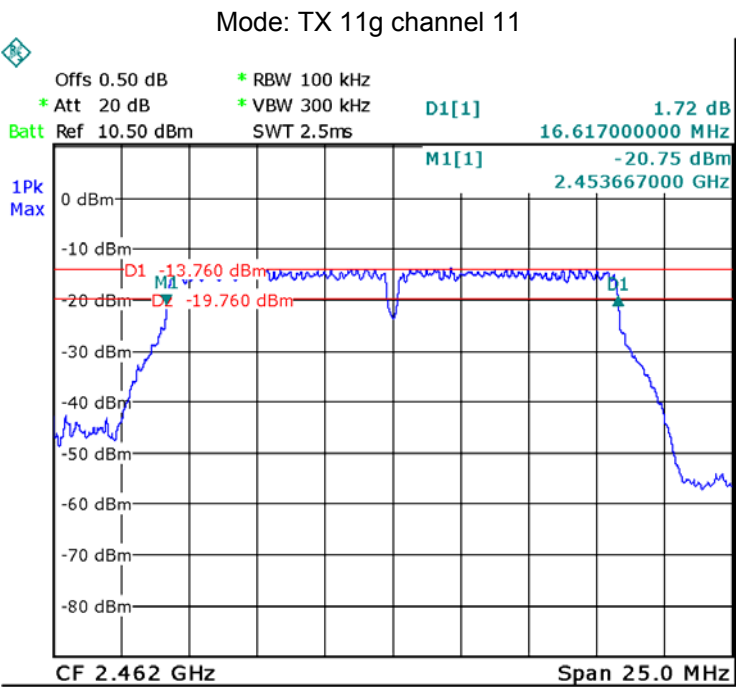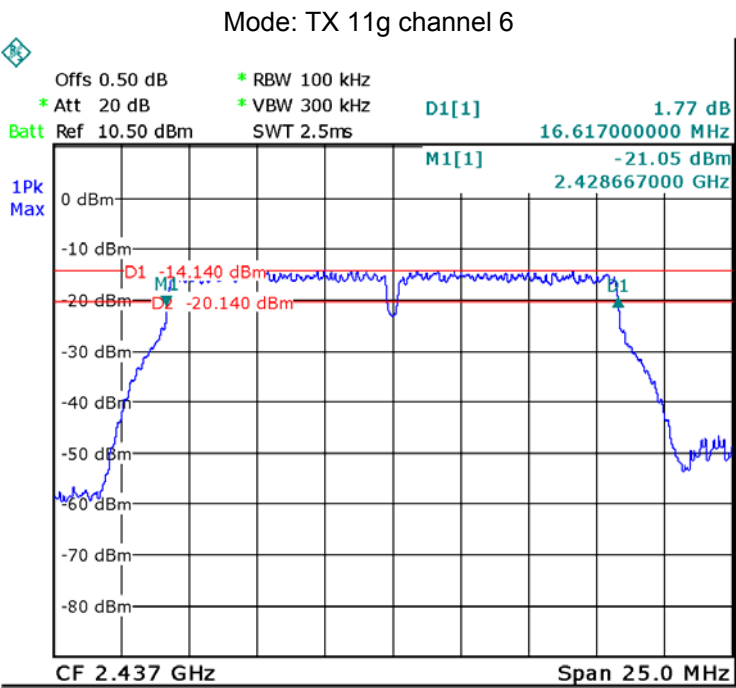


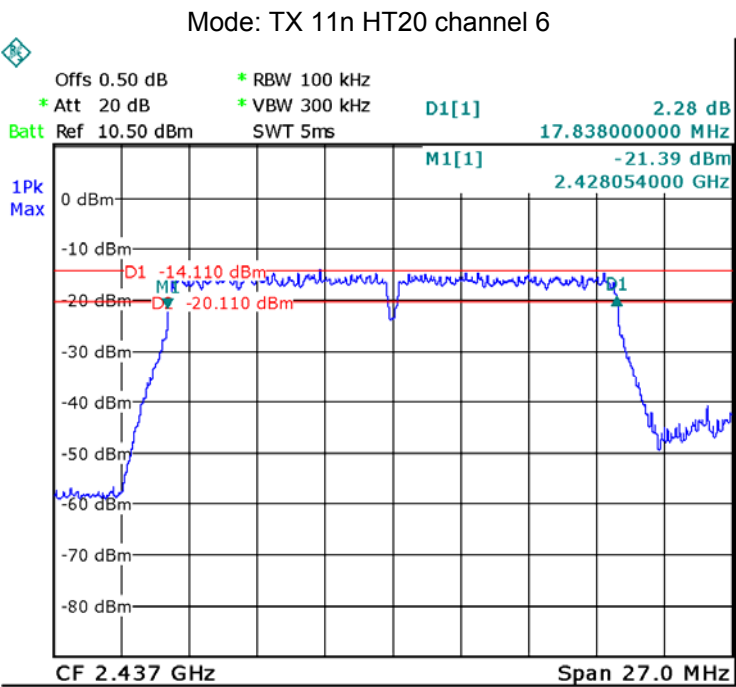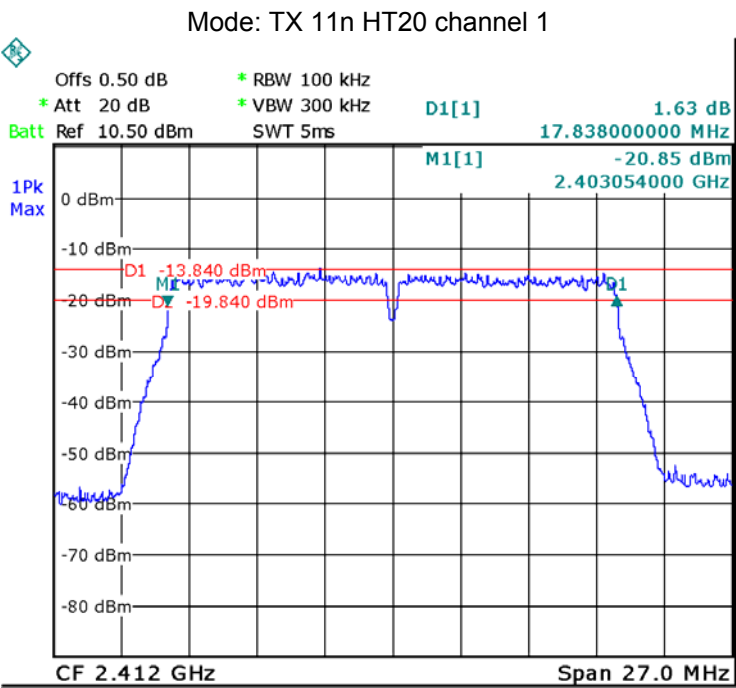

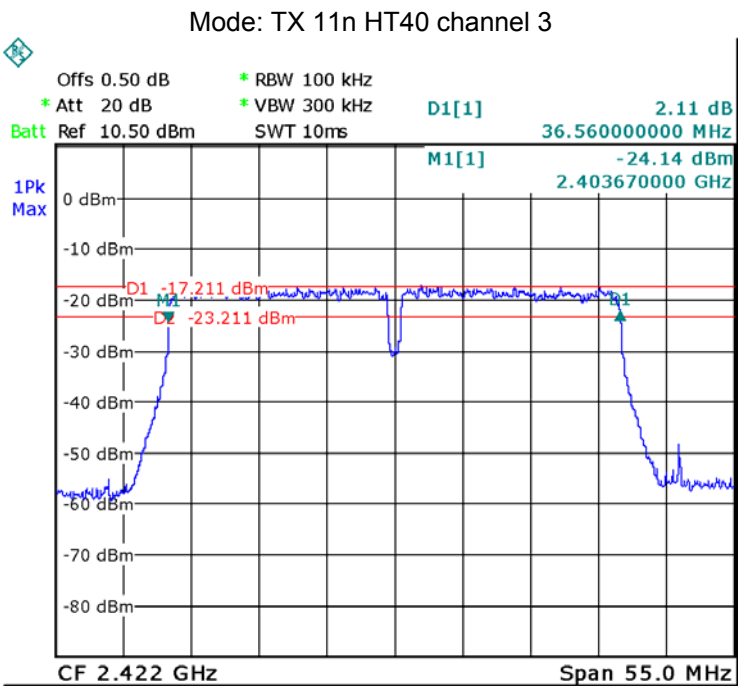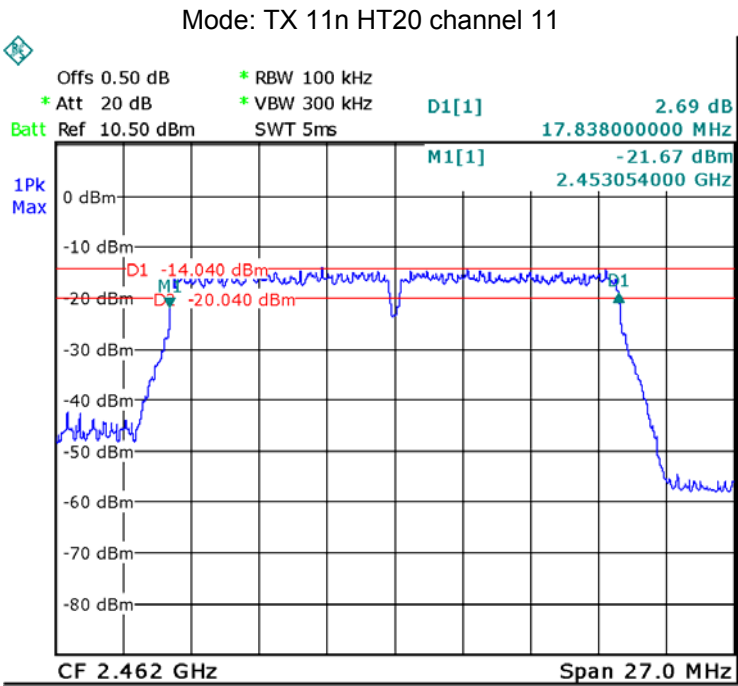

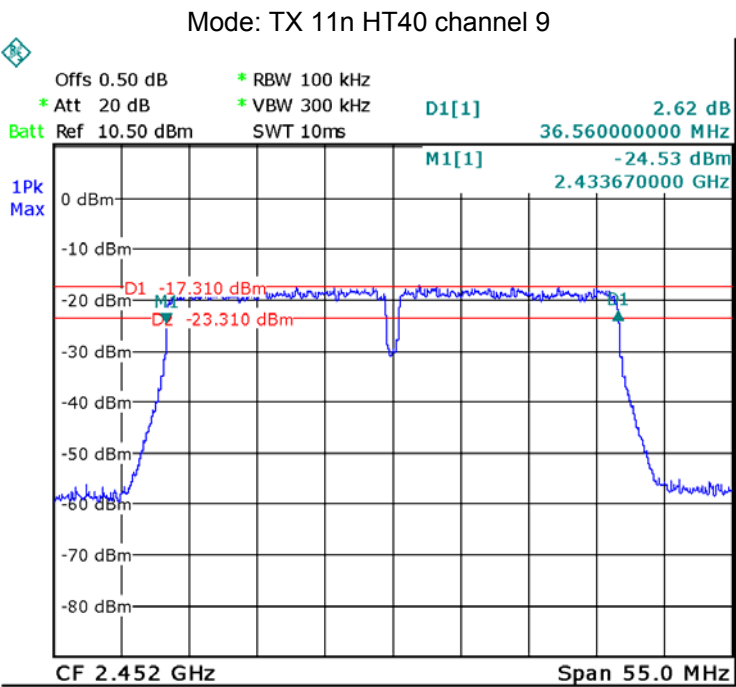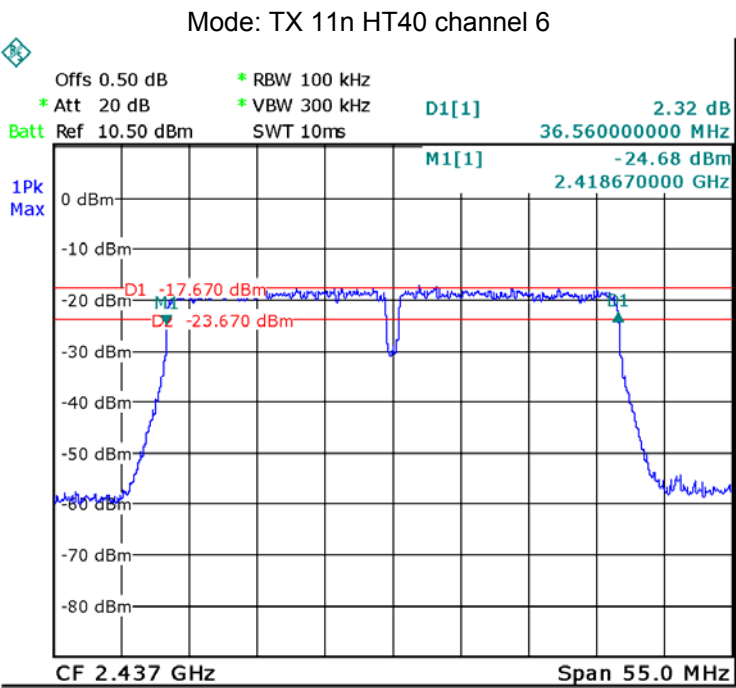

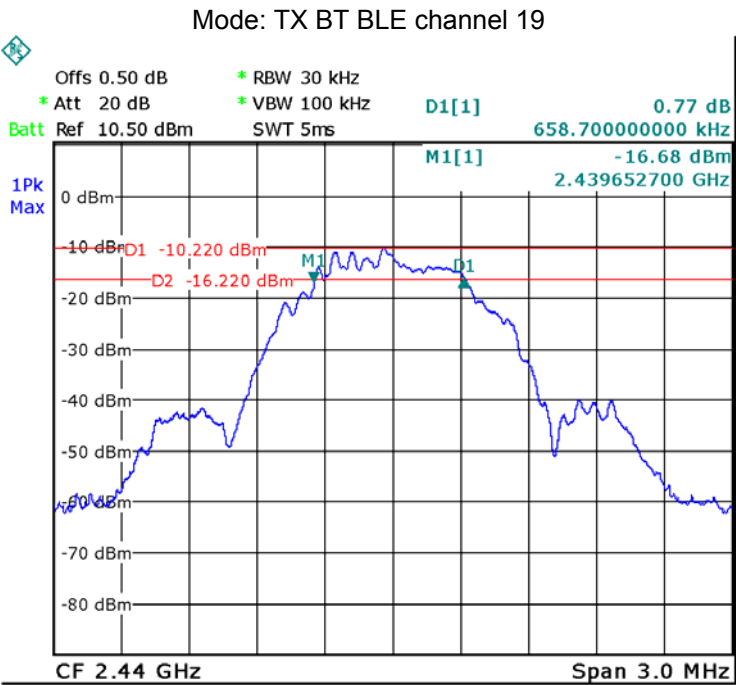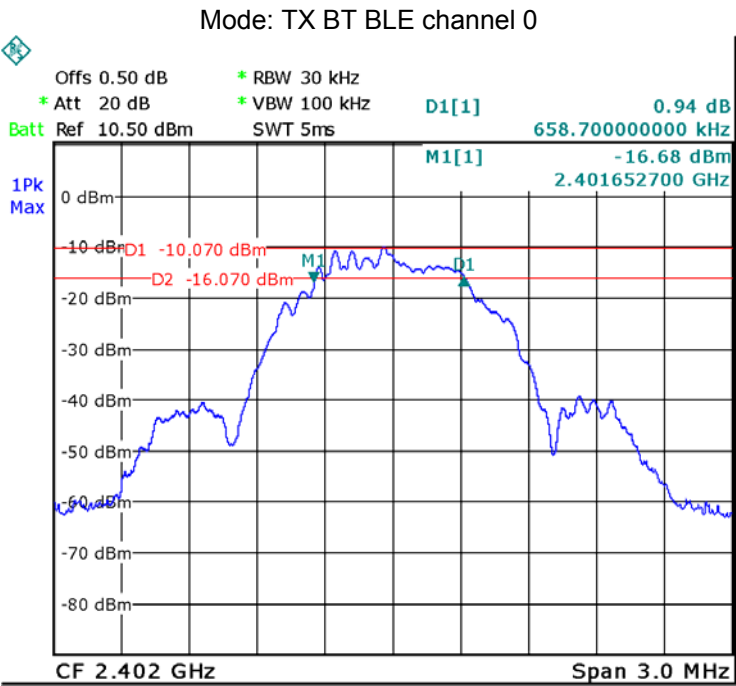

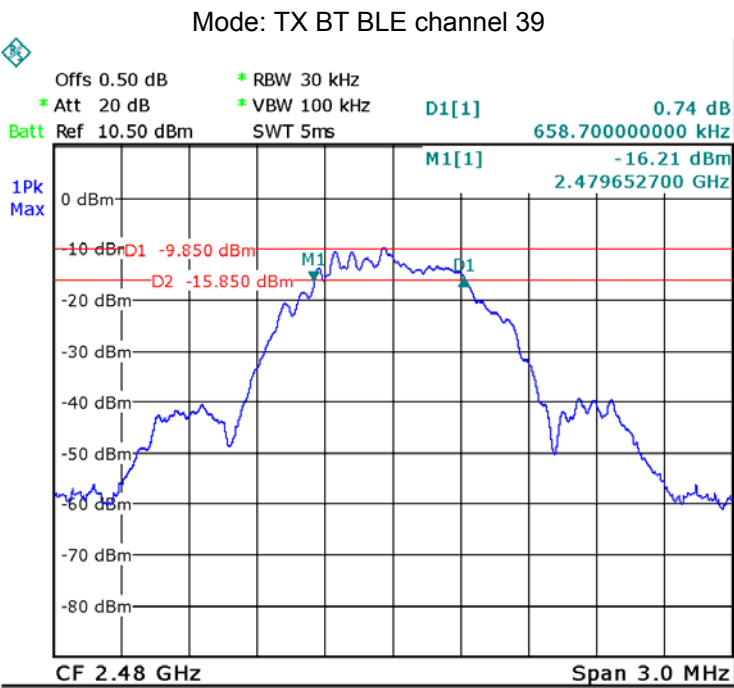

10 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 v03r02 06/05/2014

10.1 Test Procedure:

KDB 558074 D01 v03r02 06/05/2014

section 9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \quad RBW$.
- c) Set $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the $RBW = 1 \text{ MHz}$.
- b) Set the $VBW \geq 3 \quad RBW$
- c) Set the $span \geq 1.5 \times DTS$ bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

10.2 Test Result:



Test mode :TX 11b		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.14	9.06	9.12
Limit: 1W/30dBm		
1W/30dBm		



Test mode :TX 11g		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.02	9.20	9.13
Limit		
1W/30dBm		



Test mode :TX 11n HT20		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.29	9.02	9.21
Limit		
1W/30dBm		



Test mode : TX 11n HT40		
10 Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.09	9.12	9.14
Limit		
1W/30dBm		



Test mode : TX BT BLE		
10 Maximum Peak Output Power (dBm)		
2402MHz	2440MHz	2480MHz
-5.28	-5.50	-5.17
Limit		
1W/30dBm		

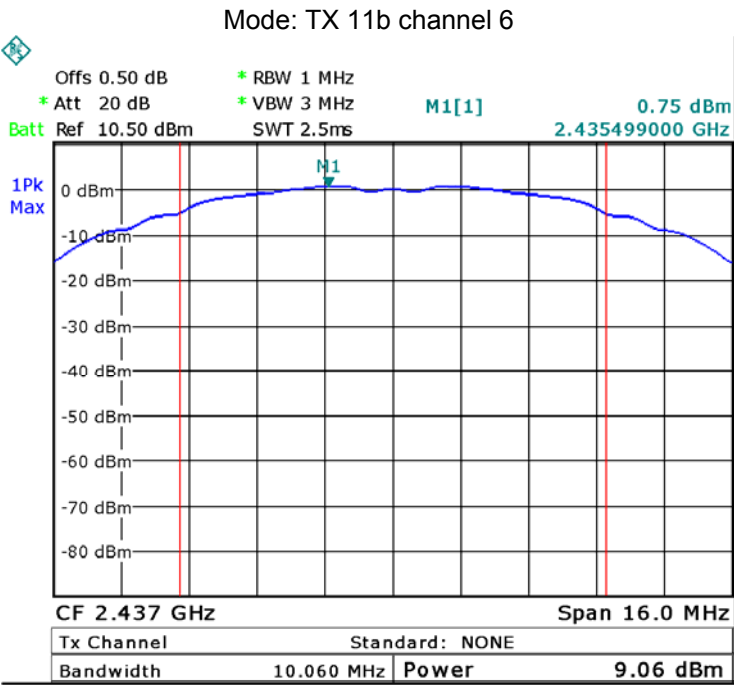
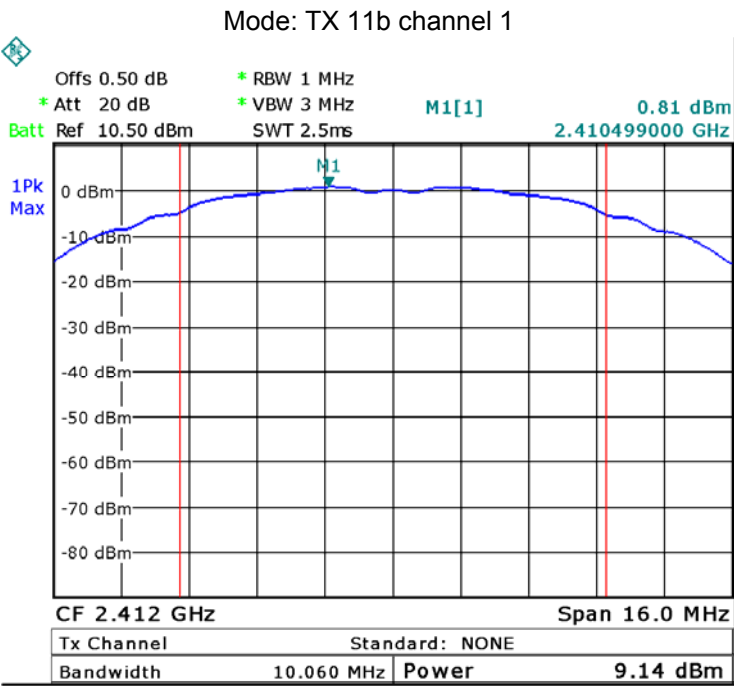


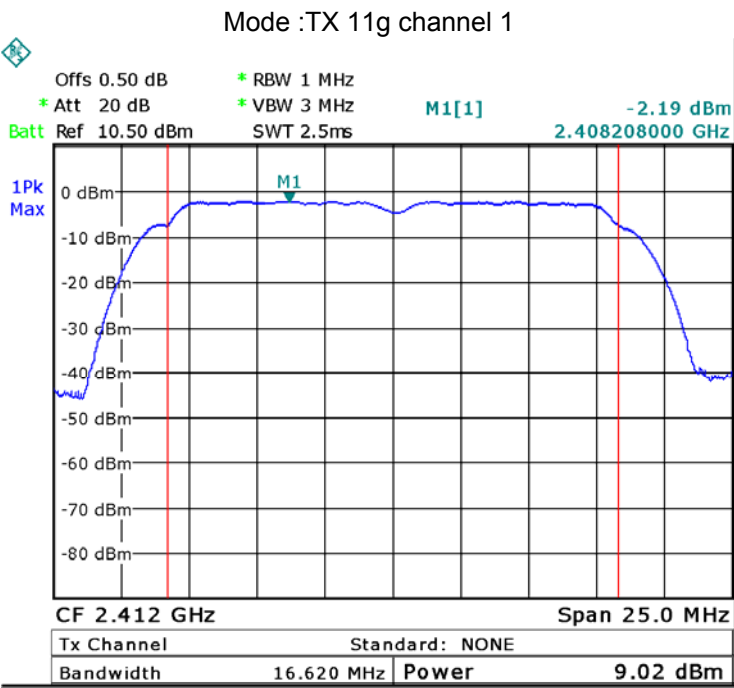
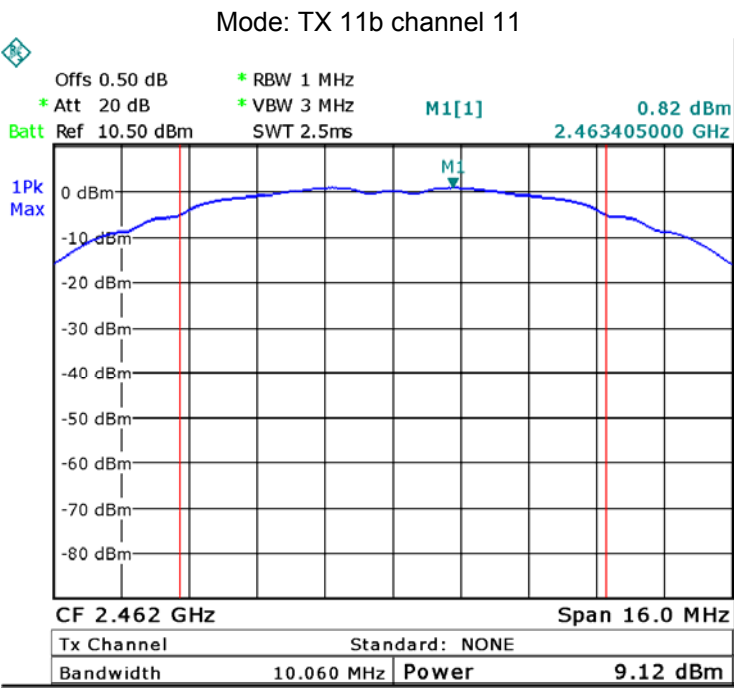


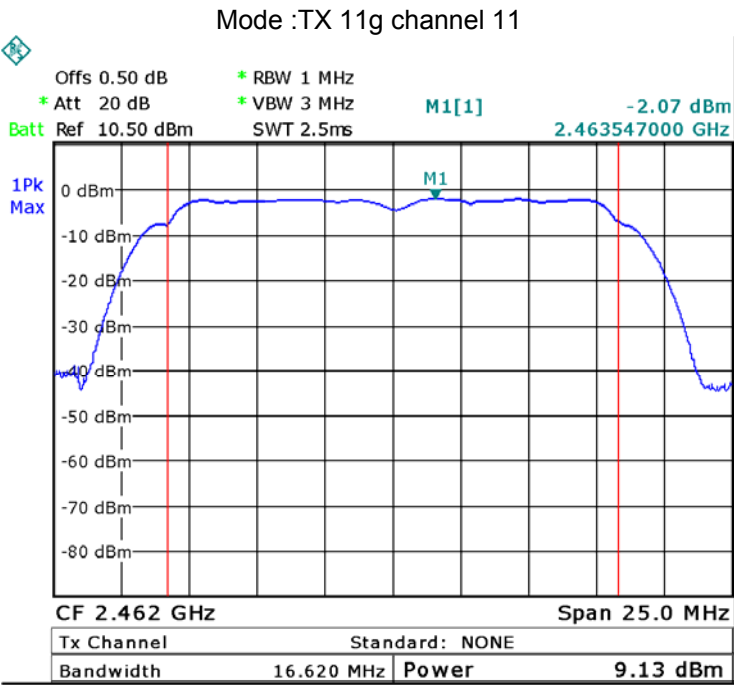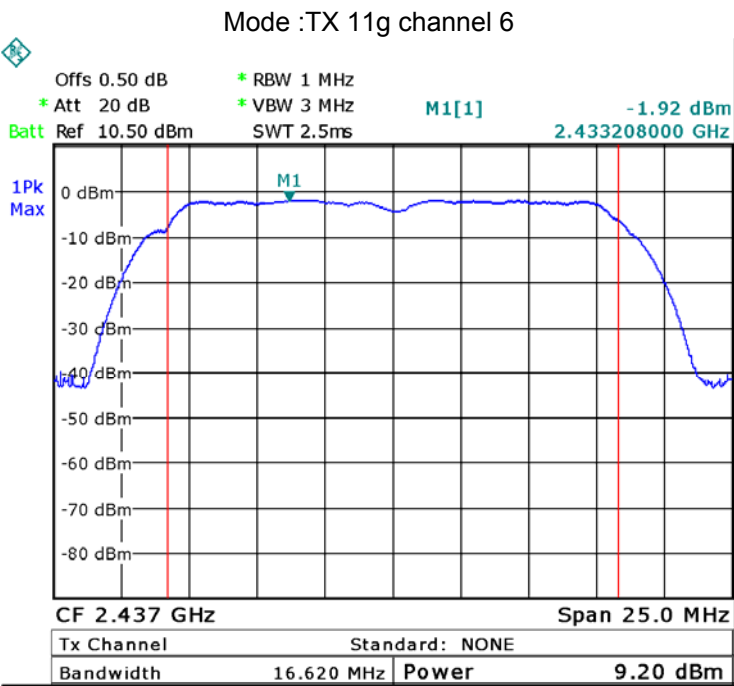


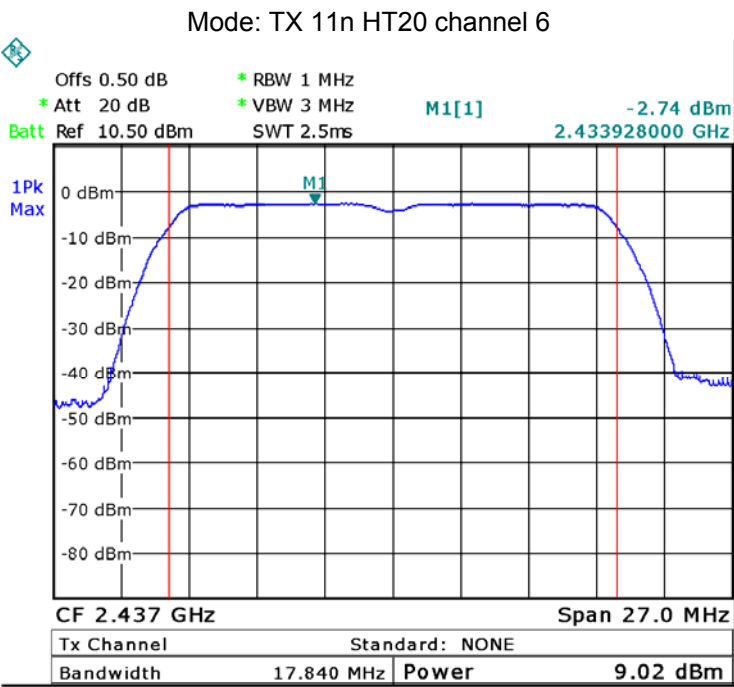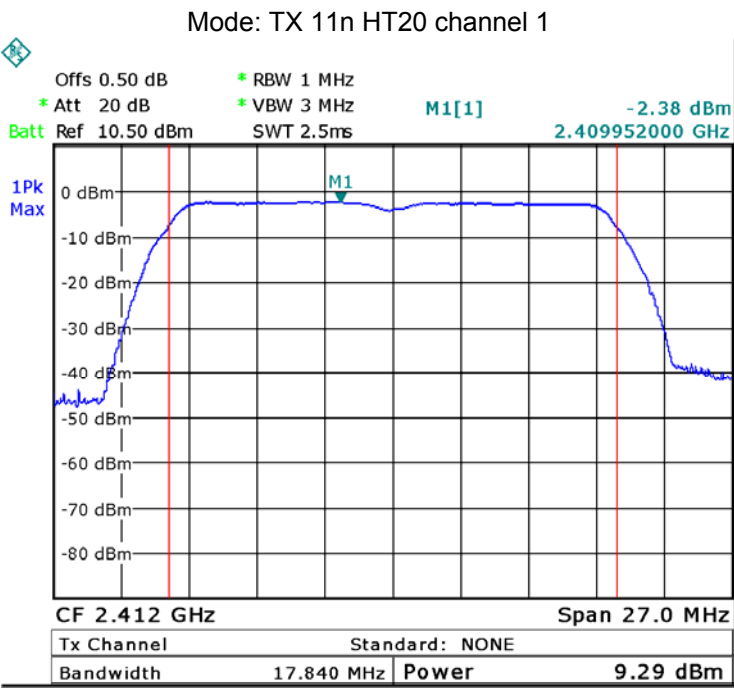

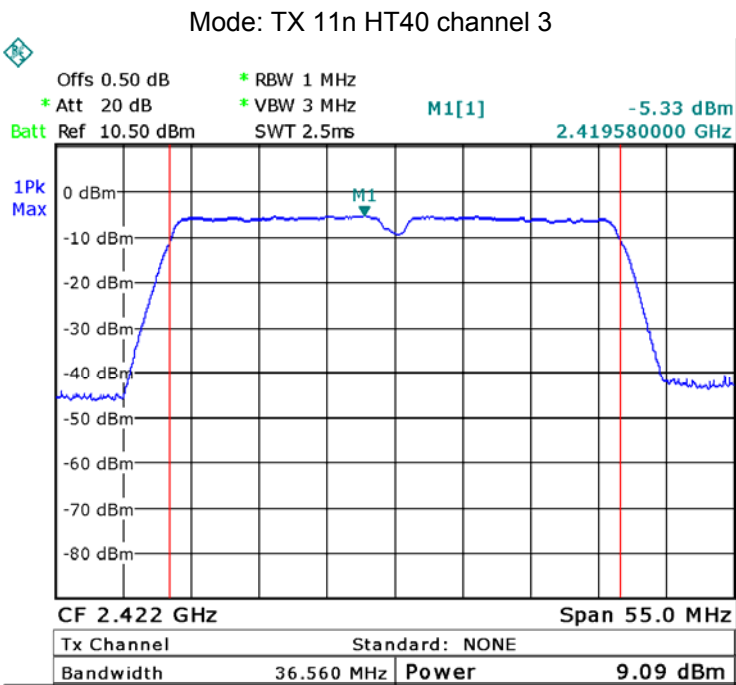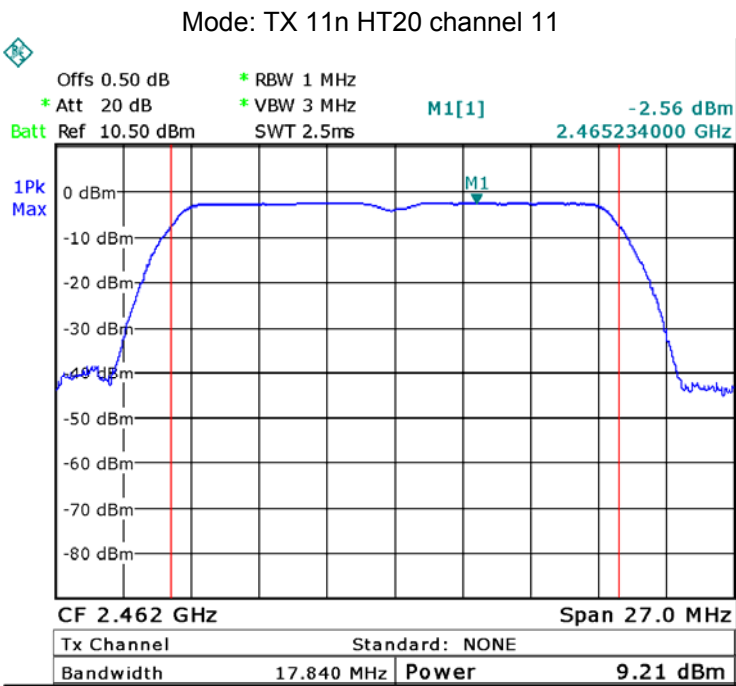

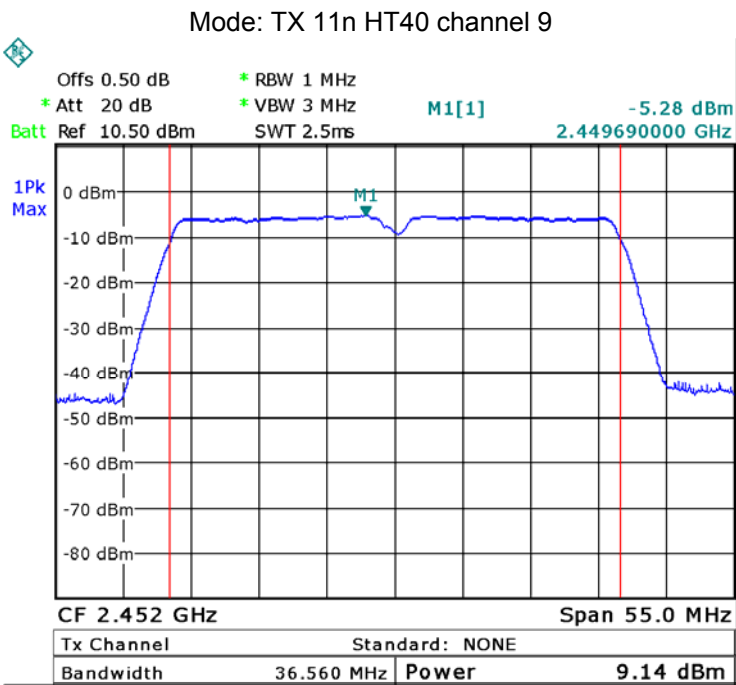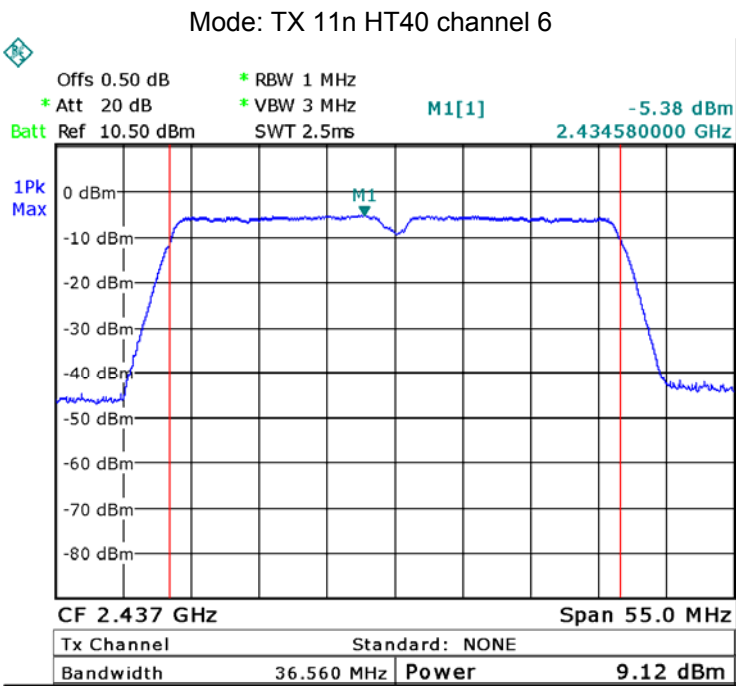

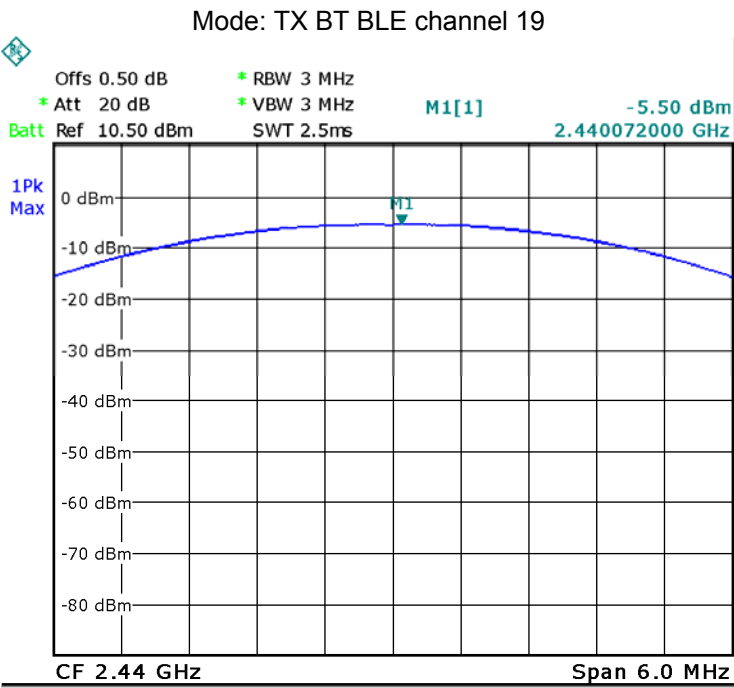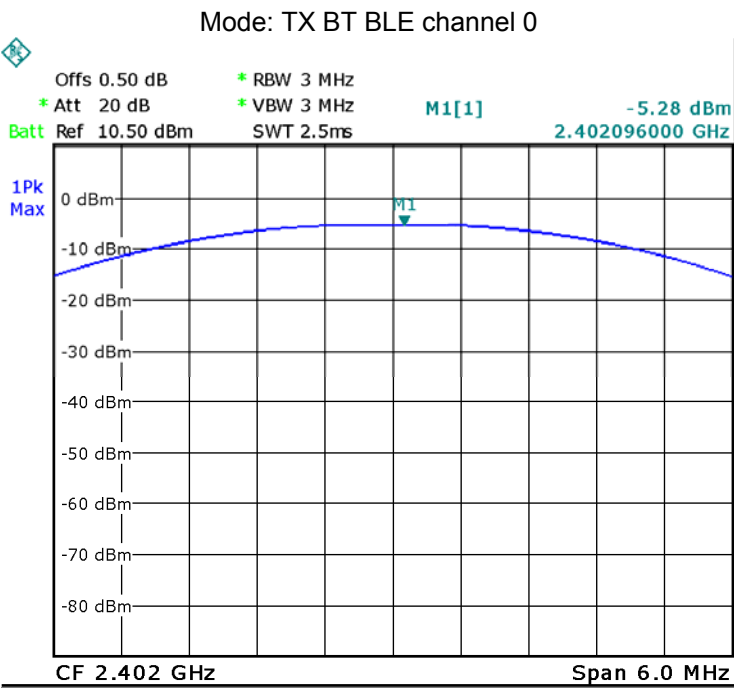

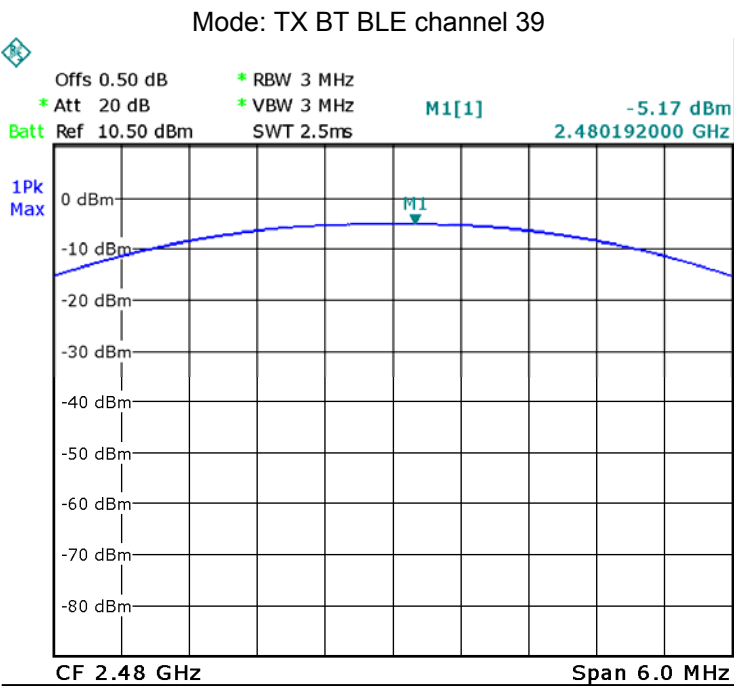

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 v03r02 06/05/2014

11.1 Test Procedure:

KDB 558074 D01 v03r02 06/05/2014 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.2 Test Result:


Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-22.45	-23.53	-23.26
Limit: 1W/30dBm		
8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-28.04	-28.61	-27.79
Limit		
8dBm per 3kHz		



Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-27.61	-28.37	-27.88
Limit		
8dBm per 3kHz		



Test mode : TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-30.04	-30.73	-29.01
Limit		
8dBm per 3kHz		



Test mode : TX BT BLE		
Power Spectral (dBm per 3kHz)		
2402MHz	2440MHz	2480MHz
-21.34	-21.44	-21.06
Limit		
8dBm per 3kHz		


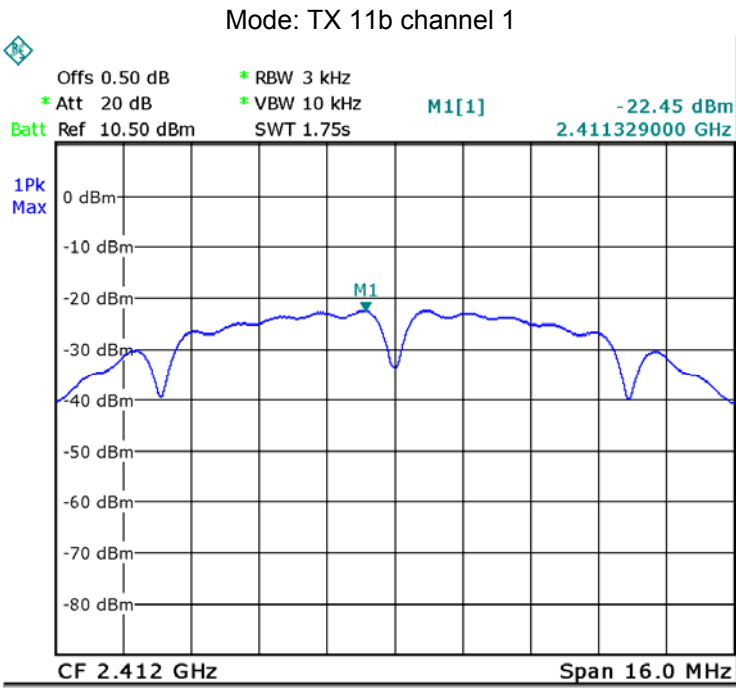


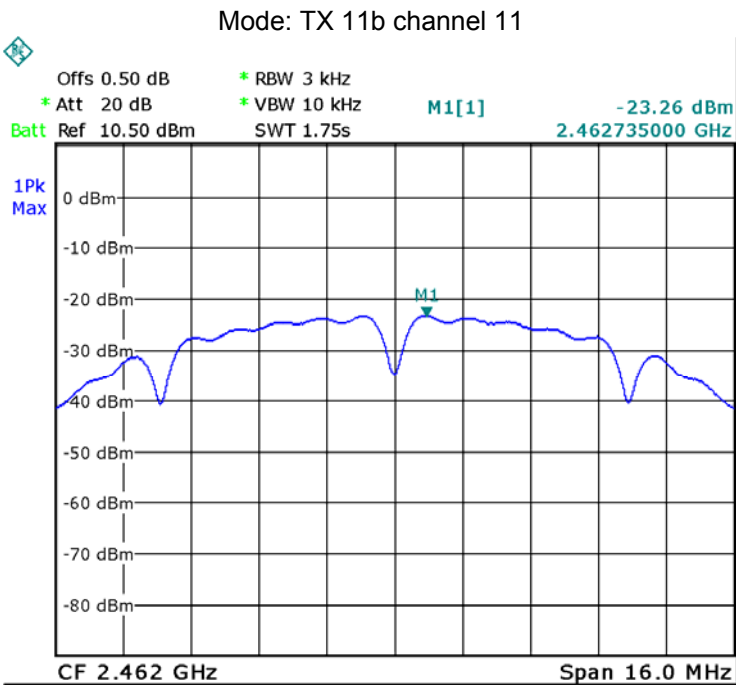
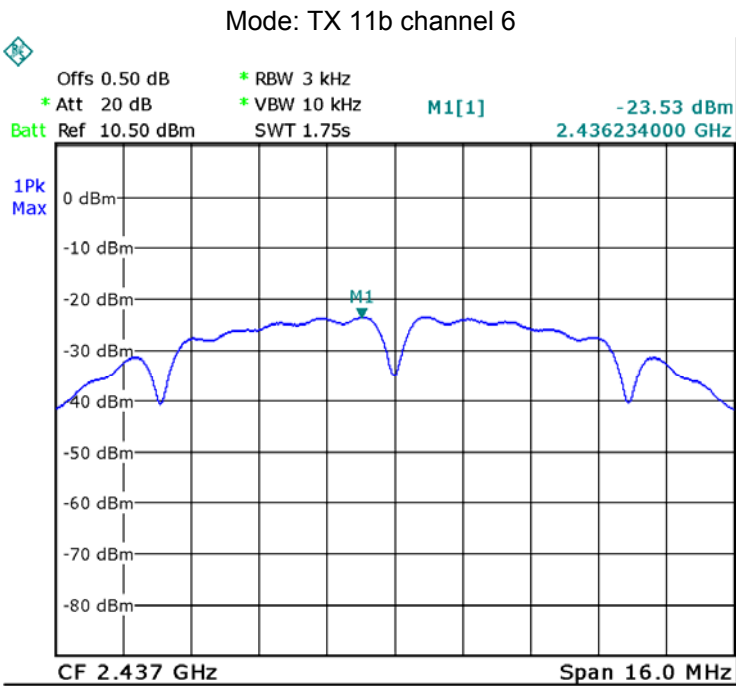


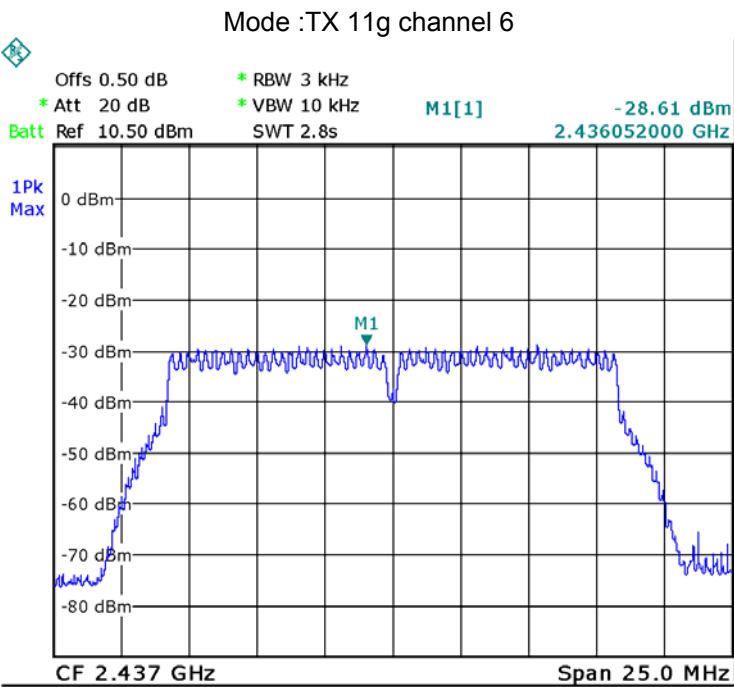
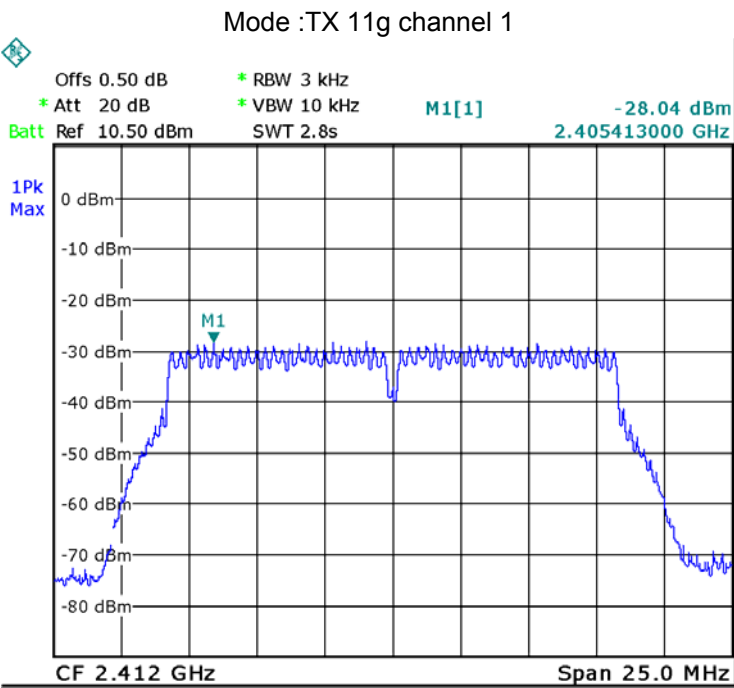


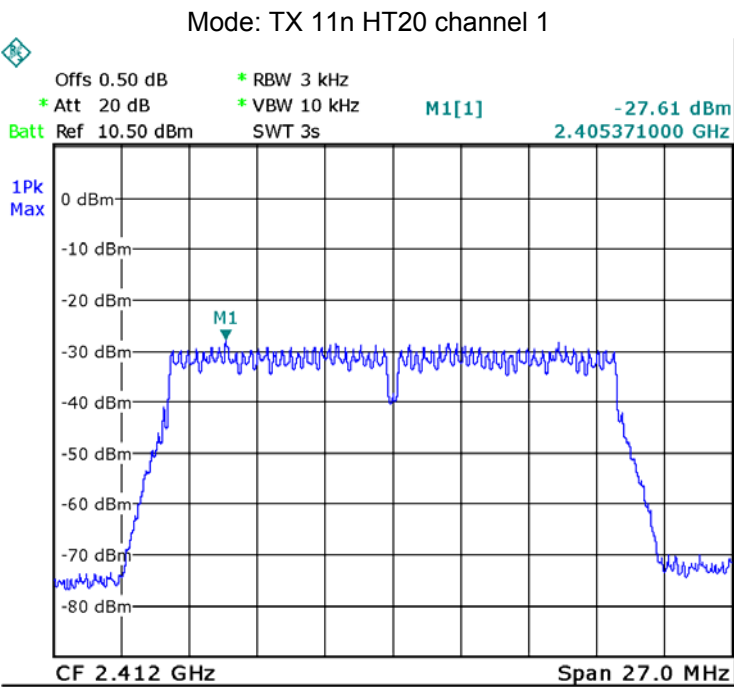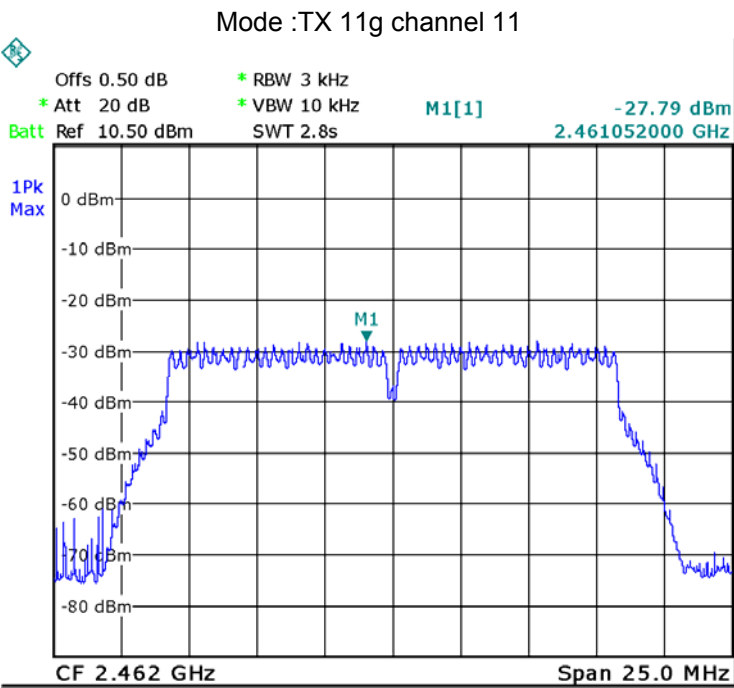

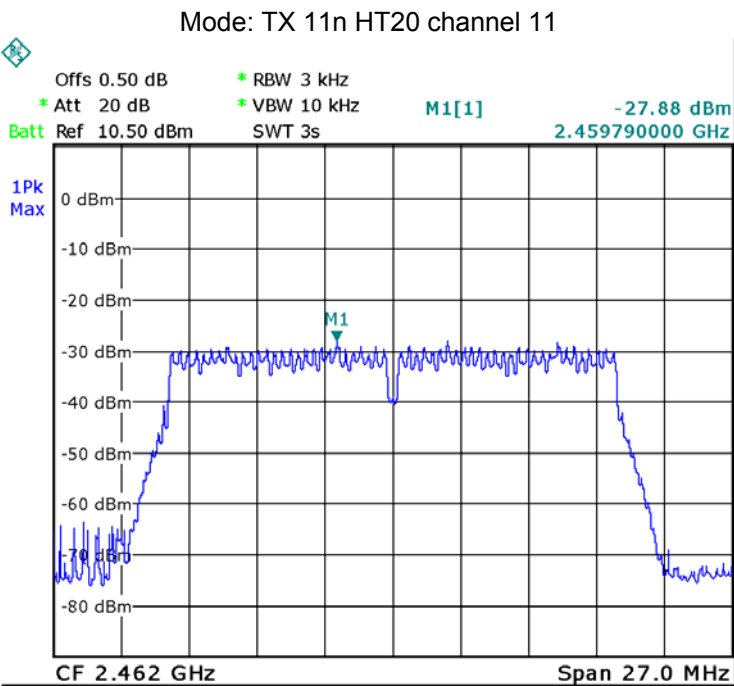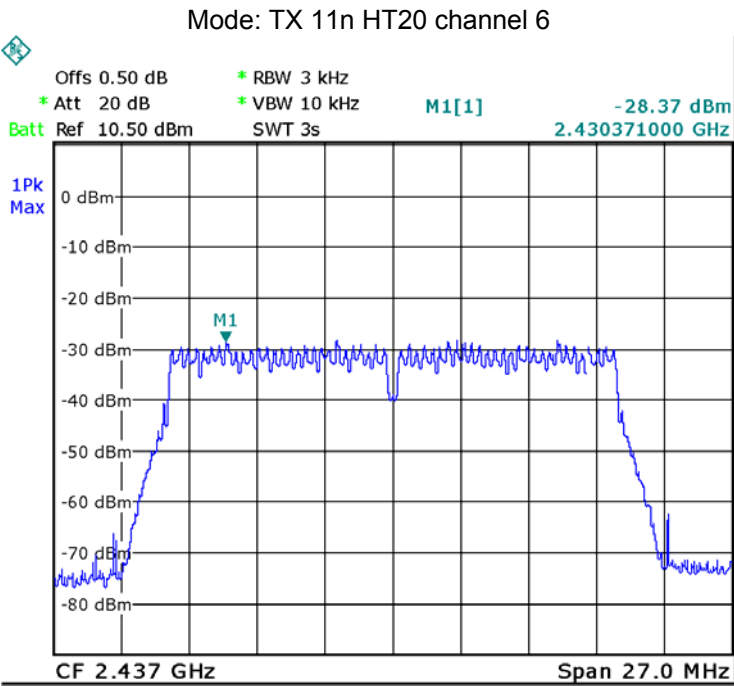

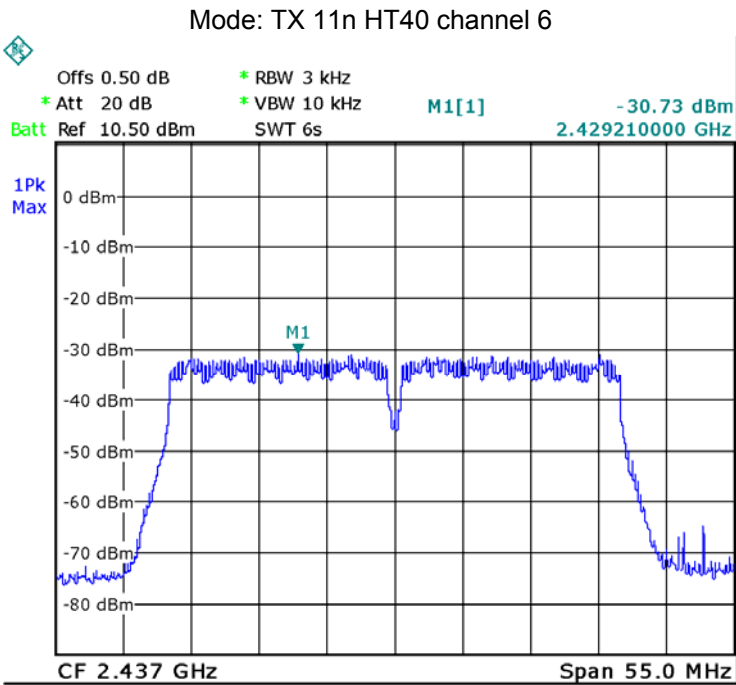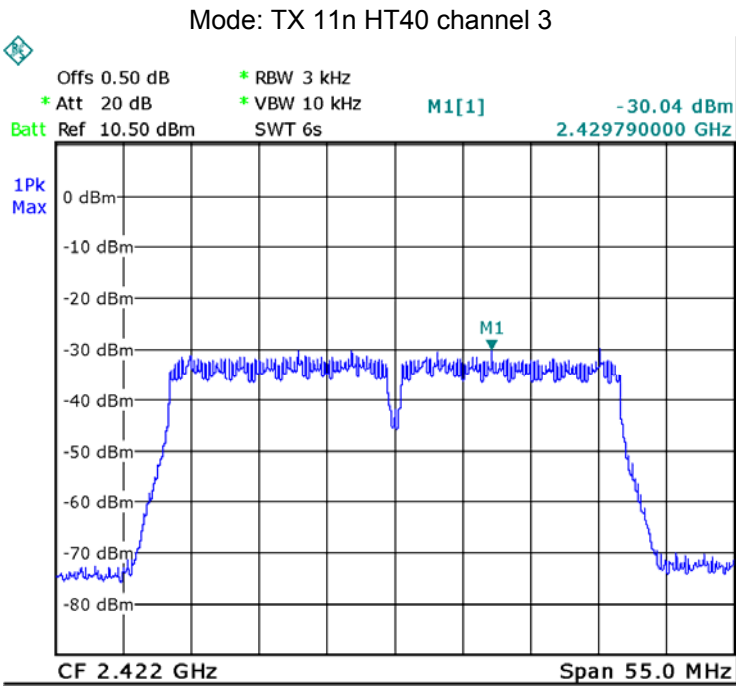

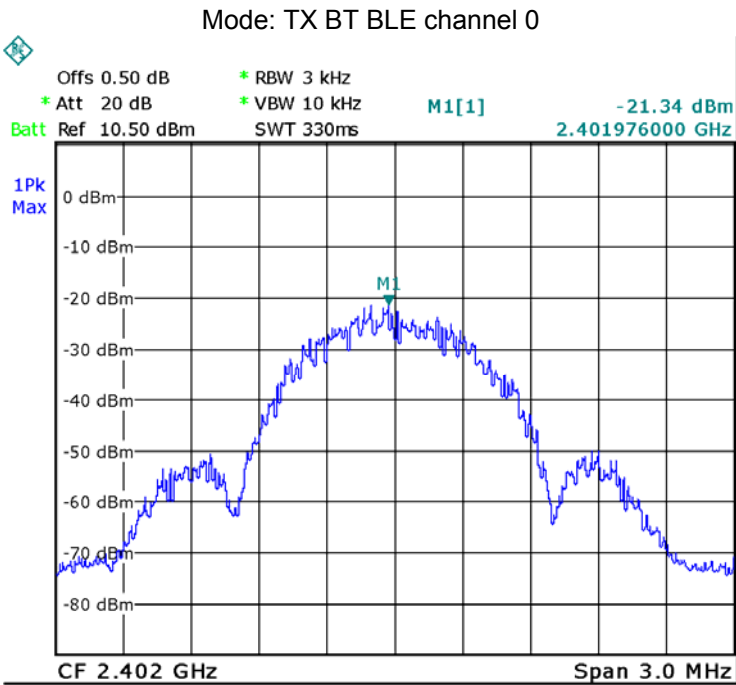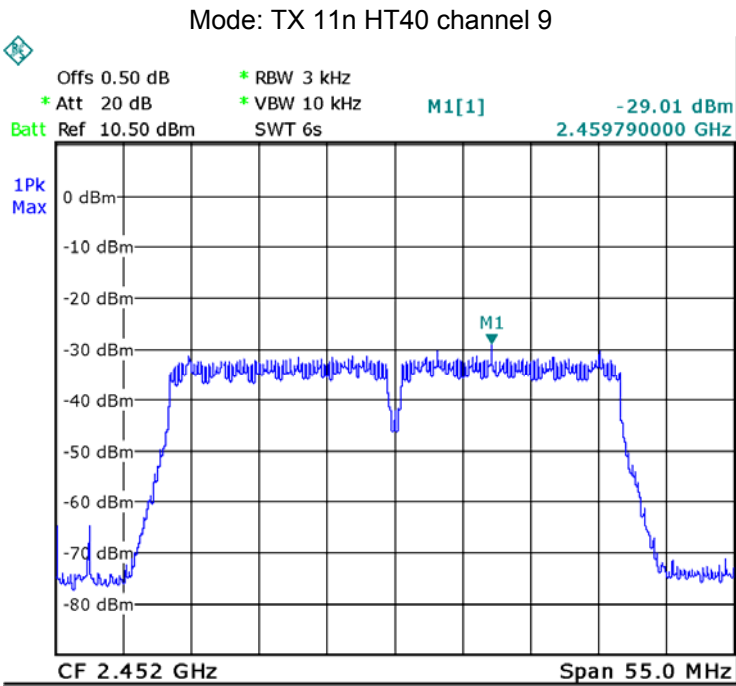

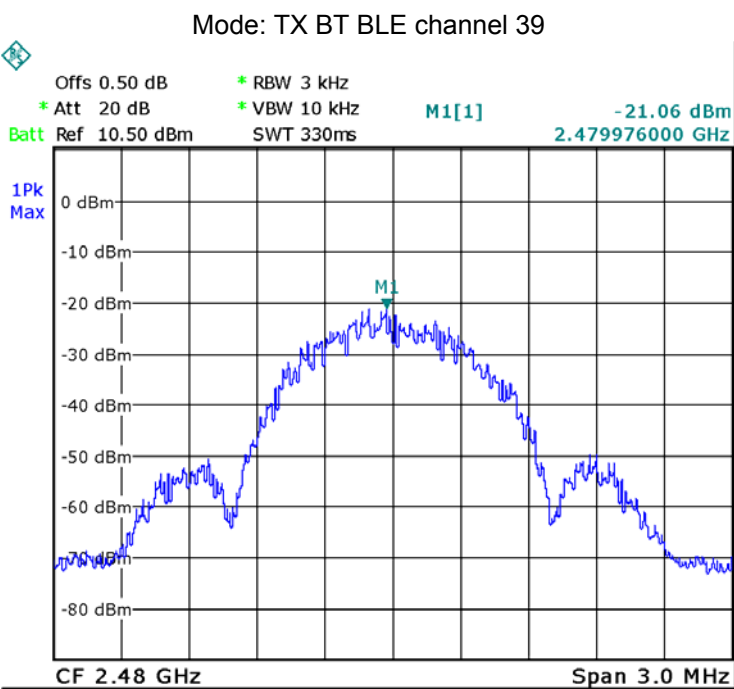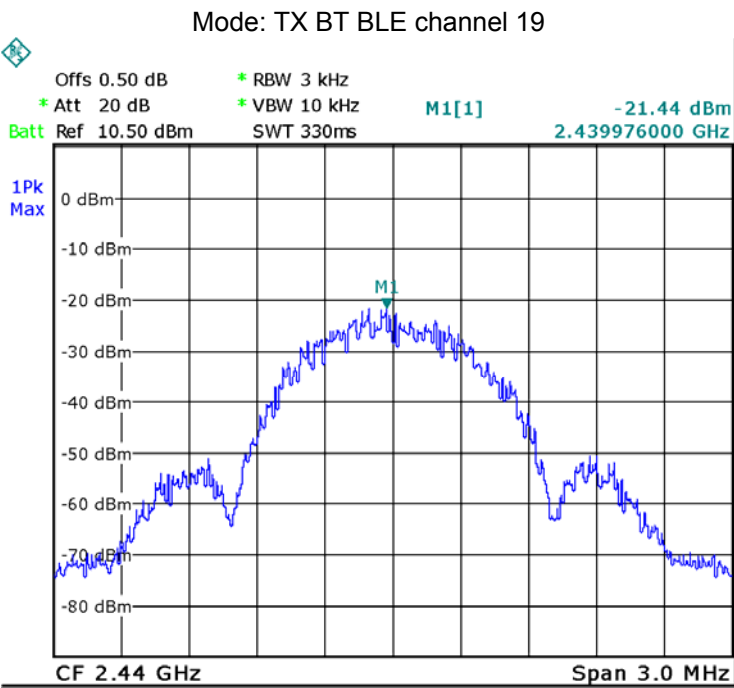

12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a integrated antenna fulfill the requirement of this section.

13 RF Exposure

Remark: refer to SAR test report: STR15038083H.

=====End of Report=====