

TEST REPORT

Reference No...... : WTS15S0323426-1E
FCC ID : 2AECE-ONE
Applicant..... : Xnovo Colombia SAS
Address..... : Carrera 22 #166-66, Bogota. D.C., Colombia
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Mobile Phone
Model No...... : ONE
Brand..... : XNOVO
Standards..... : FCC CFR47 Part 15 Section 15.247:2014
Date of Receipt sample : Mar.05, 2015
Date of Test : Mar.06-09, 2015
Date of Issue..... : Mar.12, 2015
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

| Test Items | Test Requirement | Result |
|---|----------------------------------|----------|
| Radiated Spurious Emissions | 15.205(a) 15.209 15.247(d) | PASS |
| Band edge | 15.247(d) 15.205(a) | PASS |
| Conduct Emission | 15.207 | PASS |
| 20dB Bandwidth | 15.247(a)(1) | PASS |
| Maximum Peak Output Power | 15.247(b)(1) | PASS |
| Frequency Separation | 15.247(a)(1) | PASS |
| Number of Hopping Frequency | 15.247(a)(1)(iii) | PASS |
| Dwell time | 15.247(a)(1)(iii) | PASS |
| Antenna Requirement | 15.203 | Complies |
| Maximum Permissible Exposure (Exposure of Humans to RF Fields) | 1.1307(b)(1) | PASS |

3 Contents

| | Page |
|--|-----------|
| 1 COVER PAGE..... | 1 |
| 2 TEST SUMMARY | 2 |
| 3 CONTENTS | 3 |
| 4 GENERAL INFORMATION..... | 5 |
| 4.1 GENERAL DESCRIPTION OF E.U.T. | 5 |
| 4.2 DETAILS OF E.U.T. | 5 |
| 4.3 CHANNEL LIST..... | 6 |
| 4.4 TEST MODE | 7 |
| 4.5 TEST FACILITY..... | 7 |
| 5 EQUIPMENT USED DURING TEST | 8 |
| 5.1 EQUIPMENTS LIST | 8 |
| 5.2 DESCRIPTION OF SUPPORT UNITS | 9 |
| 5.3 MEASUREMENT UNCERTAINTY | 9 |
| 5.4 TEST EQUIPMENT CALIBRATION | 9 |
| 6 CONDUCTED EMISSION | 10 |
| 6.1 E.U.T. OPERATION | 10 |
| 6.2 EUT SETUP..... | 10 |
| 6.3 MEASUREMENT DESCRIPTION | 10 |
| 6.4 CONDUCTED EMISSION TEST RESULT | 11 |
| 7 RADIATED SPURIOUS EMISSIONS..... | 13 |
| 7.1 EUT OPERATION..... | 13 |
| 7.2 TEST SETUP | 14 |
| 7.3 SPECTRUM ANALYZER SETUP | 15 |
| 7.4 TEST PROCEDURE | 16 |
| 7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION | 16 |
| 7.6 SUMMARY OF TEST RESULTS | 17 |
| 8 BAND EDGE MEASUREMENT | 20 |
| 8.1 TEST PROCEDURE | 20 |
| 8.2 TEST RESULT | 21 |
| 9 20 DB BANDWIDTH MEASUREMENT | 24 |
| 9.1 TEST PROCEDURE | 24 |
| 9.2 TEST RESULT | 24 |
| 10 MAXIMUM PEAK OUTPUT POWER | 30 |
| 10.1 TEST PROCEDURE..... | 30 |
| 10.2 TEST RESULT | 30 |
| 11 HOPPING CHANNEL SEPARATION | 36 |
| 11.1 TEST PROCEDURE..... | 36 |
| 11.2 TEST RESULT | 36 |
| 12 NUMBER OF HOPPING FREQUENCY | 42 |
| 12.1 TEST PROCEDURE..... | 42 |
| 12.2 TEST RESULT | 42 |
| 13 DWELL TIME | 44 |
| 13.1 TEST PROCEDURE..... | 44 |
| 13.2 TEST RESULT | 44 |

14 ANTENNA REQUIREMENT50

15 RF EXPOSURE.....51

4 General Information

4.1 General Description of E.U.T.

| | |
|---------------------|-----------------------------|
| Product Name | : Mobile Phone |
| Model No. | : ONE |
| Model Description | : N/A |
| GSM Band(s) | : GSM 850/900/1800/1900MHz |
| GPRS Class | : 12 |
| WCDMA Band(s) | : FDD Band I/II/V |
| Wi-Fi Specification | : 802.11b/g/n HT20/n HT40 |
| Bluetooth Version | : Bluetooth v4.0 with BLE |
| GPS | : Support |
| NFC | : N/A |
| Hardware Version | : Xnovo_ONE |
| Software Version | : Xnovo_ONE_2014.12.01_V0.2 |

4.2 Details of E.U.T.

| | |
|----------------------|--|
| Operation Frequency | : GSM/GPRS 850: 824~849MHz GSM/GPRS 900: 925-960MHz DCS 1800: 1805-1880MHz PCS 1900: 1850~1910MHz WCDMA Band I: 1920-1980MHz WCDMA Band II: 1850-1910MHz WCDMA Band V: 824~849MHz WiFi: 802.11b/g/n HT20: 2412-2462MHz 802.11n HT40: 2422-2452MHz Bluetooth: 2402-2480MHz GPS: 1.57GHz |
| Max. RF output power | : GSM 850: 32.75dBm PCS1900:30.35dBm WCDMA Band II: 22.25dBm WCDMA Band V: 22.57dBm WiFi: 9.29dBm Bluetooth: 2.79dBm |

| | |
|----------------------|--|
| Type of Modulation | : GSM,GPRS: GMSK WCDMA: QPSK WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK,8DPSK |
| Antenna installation | : GSM/WCDMA: Wire antenna WiFi/Bluetooth: Metal Dome |
| Antenna Gain | : GSM 850: 0.5dBi PCS1900: 0.7dBi WCDMA Band II: 1.1dBi WCDMA Band V: 0.8dBi WiFi: 2.1dBi Bluetooth: 2.1dBi |
| Technical Data | : Battery DC 3.7V 1200mAh DC 5V, 700mA, charging from adapter (Adapter Input: 100-240V~50/60Hz, 0.2A) |
| Adapter | : Manufacture: Xnovo Colombia SAS Model No.: ONE |

4.3 Channel List

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 0 | 2402 | 1 | 2403 | 2 | 2404 | 3 | 2405 |
| 4 | 2406 | 5 | 2407 | 6 | 2408 | 7 | 2409 |
| 8 | 2410 | 9 | 2411 | 10 | 2412 | 11 | 2413 |
| 12 | 2414 | 13 | 2415 | 14 | 2416 | 15 | 2417 |
| 16 | 2418 | 17 | 2419 | 18 | 2420 | 19 | 2421 |
| 20 | 2422 | 21 | 2423 | 22 | 2424 | 23 | 2425 |
| 24 | 2426 | 25 | 2427 | 26 | 2428 | 27 | 2429 |
| 28 | 2430 | 29 | 2431 | 30 | 2432 | 31 | 2433 |
| 32 | 2434 | 33 | 2435 | 34 | 2436 | 35 | 2437 |
| 36 | 2438 | 37 | 2439 | 38 | 2440 | 39 | 2441 |
| 40 | 2442 | 41 | 2443 | 42 | 2444 | 43 | 2445 |
| 44 | 2446 | 45 | 2447 | 46 | 2448 | 47 | 2449 |
| 48 | 2450 | 49 | 2451 | 50 | 2452 | 51 | 2453 |
| 52 | 2454 | 53 | 2455 | 54 | 2456 | 55 | 2457 |
| 56 | 2458 | 57 | 2459 | 58 | 2460 | 59 | 2461 |
| 60 | 2462 | 61 | 2463 | 62 | 2464 | 63 | 2465 |
| 64 | 2466 | 65 | 2467 | 66 | 2468 | 67 | 2469 |
| 68 | 2470 | 69 | 2471 | 70 | 2472 | 71 | 2473 |
| 72 | 2474 | 73 | 2475 | 74 | 2476 | 75 | 2477 |
| 76 | 2478 | 77 | 2479 | 78 | 2480 | - | - |

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

| Test mode | Low channel | Middle channel | High channel |
|--------------|-------------|----------------|--------------|
| Transmitting | 2402MHz | 2441MHz | 2480MHz |

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

| Conducted Emissions Test Site 1# | | | | | | |
|---|----------------------------|----------------------------------|--------------|-----------------|-----------------------|----------------------|
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1. | EMI Test Receiver | R&S | ESCI | 100947 | Sep.15,2014 | Sep.14,2015 |
| 2. | LISN | R&S | ENV216 | 101215 | Sep.15,2014 | Sep.14,2015 |
| 3. | Cable | Top | TYPE16(3.5M) | - | Sep.15,2014 | Sep.14,2015 |
| Conducted Emissions Test Site 2# | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1. | EMI Test Receiver | R&S | ESCI | 101155 | Sep.15,2014 | Sep.14,2015 |
| 2. | LISN | SCHWARZBECK | NSLK 8128 | 8128-289 | Sep.15,2014 | Sep.14,2015 |
| 3. | Limiter | York | MTS-IMP-136 | 261115-001-0024 | Sep.15,2014 | Sep.14,2015 |
| 4. | Cable | LARGE | RF300 | - | Sep.15,2014 | Sep.14,2015 |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 1# | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1 | EMC Analyzer | Agilent | E7405A | MY45114943 | Sep.15,2014 | Sep.14,2015 |
| 2 | Active Loop Antenna | Beijing Dazhi | ZN30900A | - | Sep.15,2014 | Sep.14,2015 |
| 3 | Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 336 | Apr.19,2014 | Apr.18,2015 |
| 4 | Coaxial Cable (below 1GHz) | Top | TYPE16(13M) | - | Sep.15,2014 | Sep.14,2015 |
| 5 | Broad-band Horn Antenna | SCHWARZBECK | BBHA 9120 D | 667 | Apr.19,2014 | Apr.18,2015 |
| 6 | Broad-band Horn Antenna | SCHWARZBECK | BBHA 9170 | 335 | Apr.19,2014 | Apr.18,2015 |
| 7 | Broadband Preamplifier | COMPLIANCE DIRECTION | PAP-1G18 | 2004 | Mar.17,2014 | Mar.16,2015 |
| 8 | Coaxial Cable (above 1GHz) | Top | 1GHz-25GHz | EW02014-7 | Apr.10,2014 | Apr.09,2015 |
| 3m Semi-anechoic Chamber for Radiation Emissions Test site 2# | | | | | | |
| Item | Equipment | Manufacturer | Model No. | Serial No | Last Calibration Date | Calibration Due Date |
| 1 | Test Receiver | R&S | ESCI | 101296 | Sep.15,2014 | Sep.14,2015 |
| 2 | Trilog Broadband Antenna | SCHWARZBECK | VULB9160 | 9160-3325 | Sep.15,2014 | Sep.14,2015 |
| 3 | Amplifier | Compliance pirection systems inc | PAP-0203 | 22024 | Sep.15,2014 | Sep.14,2015 |
| 4 | Cable | HUBER+SUHNER | CBL2 | 525178 | Sep.15,2014 | Sep.14,2015 |

| RF Conducted Testing | | | | | | |
|----------------------|---------------------------------|--------------|-----------|------------|-----------------------|----------------------|
| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Calibration Date | Calibration Due Date |
| 1. | EMC Analyzer (9k~26.5GHz) | Agilent | E7405A | MY45114943 | Sep.15,2014 | Sep.14,2015 |
| 2. | Spectrum Analyzer (9k-6GHz) | R&S | FSL6 | 100959 | Sep.15,2014 | Sep.14,2015 |
| 3. | Signal Analyzer (9k~26.5GHz) | Agilent | N9010A | MY50520207 | Sep.15,2014 | Sep.14,2015 |

5.2 Description of Support Units

| Equipment | Manufacturer | Model No. | Series No. |
|-----------|--------------|-----------|------------|
| Headphone | Qisheng | S-325 | N/A |

5.3 Measurement Uncertainty

| Parameter | Uncertainty |
|-----------------------------------|---|
| Radio Frequency | $\pm 1 \times 10^{-6}$ |
| RF Power | ± 1.0 dB |
| RF Power Density | ± 2.2 dB |
| Radiated Spurious Emissions test | ± 5.03 dB (Bilog antenna 30M~1000MHz) |
| | ± 5.47 dB (Horn antenna 1000M~25000MHz) |
| Conducted Spurious Emissions test | ± 3.64 dB (AC mains 150KHz~30MHz) |

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

| | |
|-------------------|--|
| Test Requirement: | FCC CFR 47 Part 15 Section 15.207 |
| Test Method: | ANSI C63.4:2003 |
| Test Result: | PASS |
| Frequency Range: | 150kHz to 30MHz |
| Class/Severity: | Class B |
| Limit: | 66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz |
| Detector: | Peak for pre-scan (9kHz Resolution Bandwidth) |

6.1 E.U.T. Operation

Operating Environment :


| | |
|-----------------------|-----------|
| Temperature: | 22.8 °C |
| Humidity: | 52.6 % RH |
| Atmospheric Pressure: | 101.2kPa |

EUT Operation :

The test was performed in communication mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003.

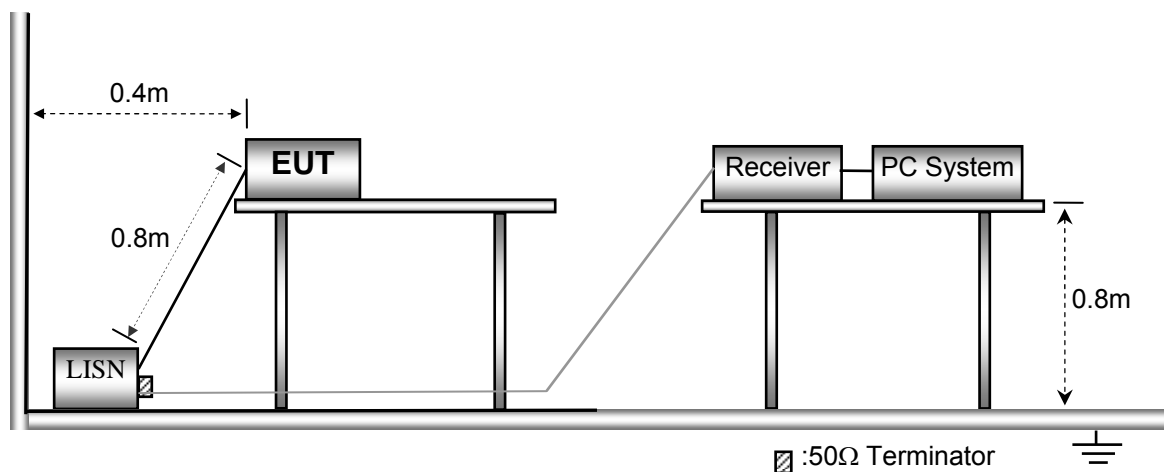


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.4 Conducted Emission Test Result

The worst mode: communication mode (Adapter Operation)

Live line:

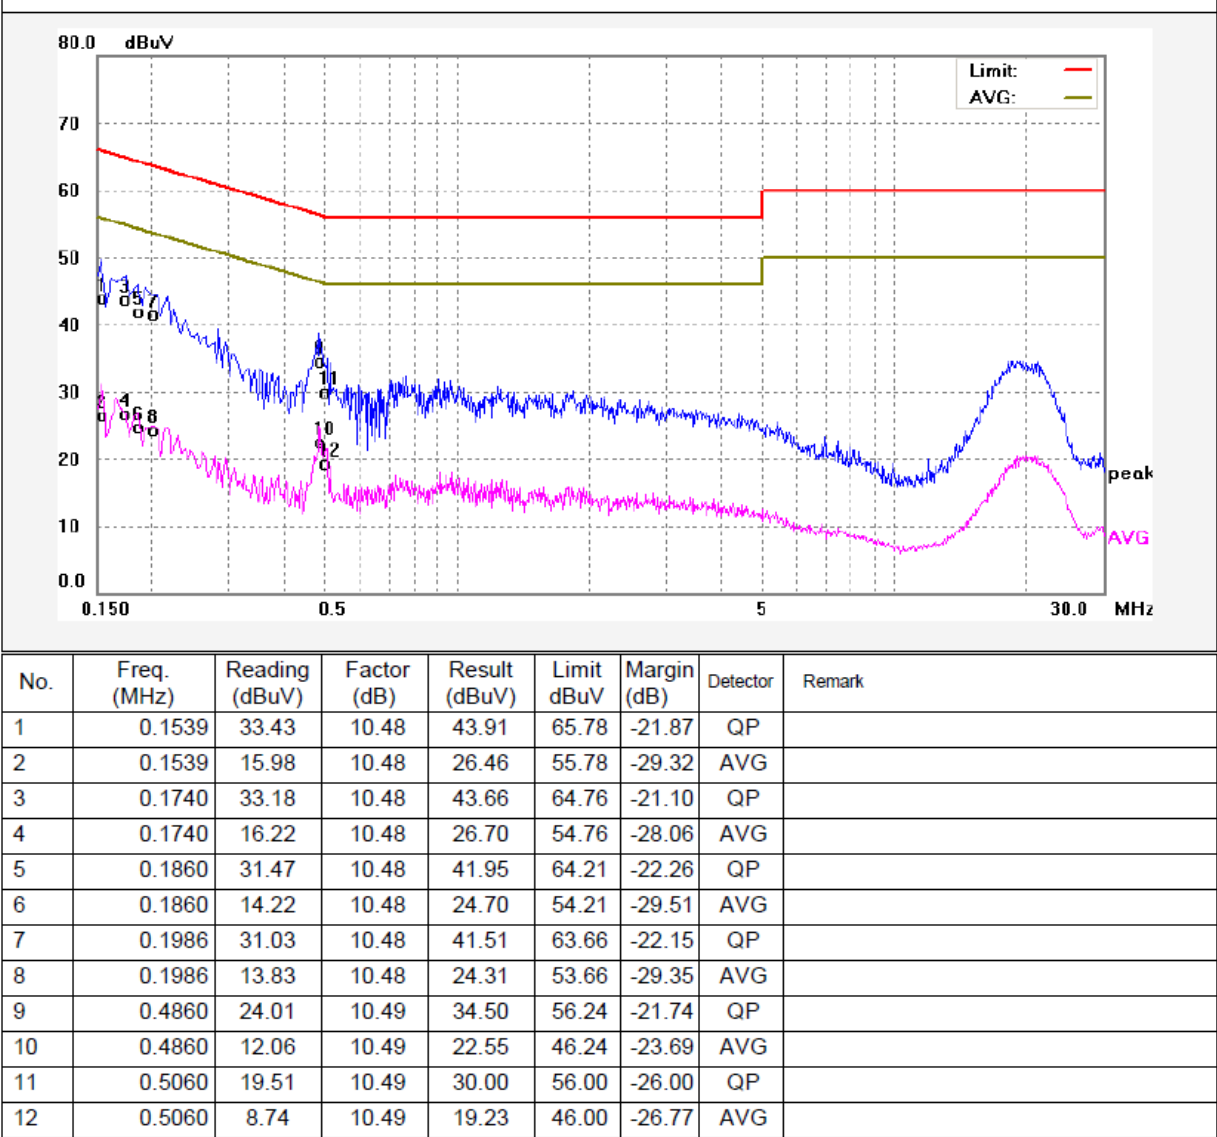

Neutral line:

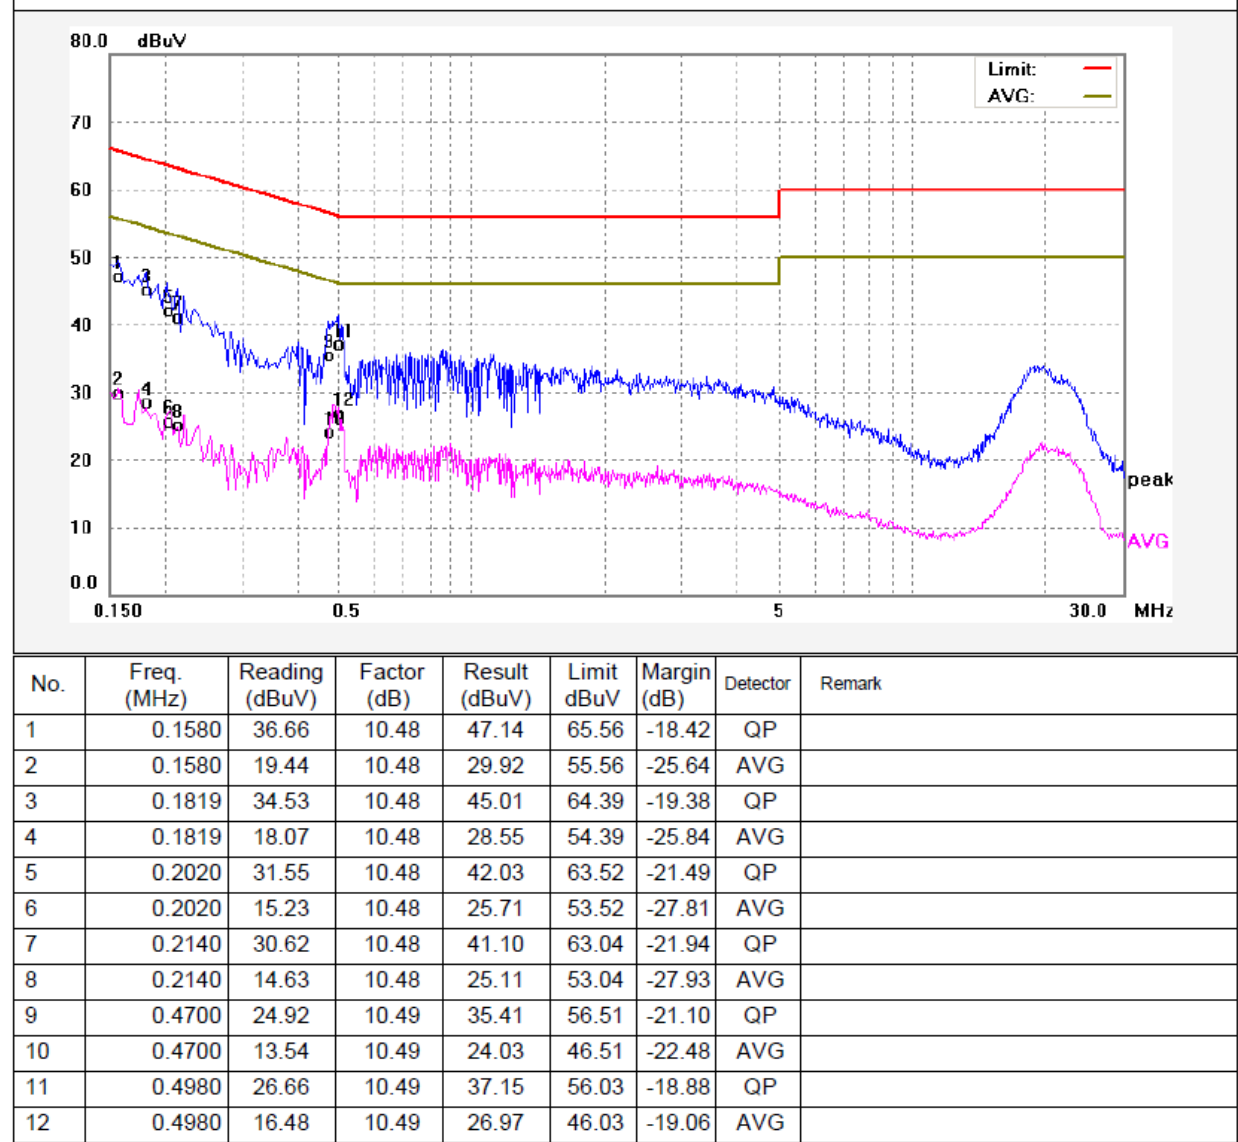

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

| Frequency (MHz) | Field Strength | | Field Strength Limit at 3m Measurement Dist | |
|--------------------|----------------|-----------------|---|---------------------------------------|
| | uV/m | Distance (m) | uV/m | dBuV/m |
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 | $10000 * 2400/F(\text{kHz})$ | $20\log^{(2400/F(\text{kHz}))} + 80$ |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 | $100 * 24000/F(\text{kHz})$ | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30 | 30 | 30 | $100 * 30$ | $20\log^{(30)} + 40$ |
| 30 ~ 88 | 100 | 3 | 100 | $20\log^{(100)}$ |
| 88 ~ 216 | 150 | 3 | 150 | $20\log^{(150)}$ |
| 216 ~ 960 | 200 | 3 | 200 | $20\log^{(200)}$ |
| Above 960 | 500 | 3 | 500 | $20\log^{(500)}$ |

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

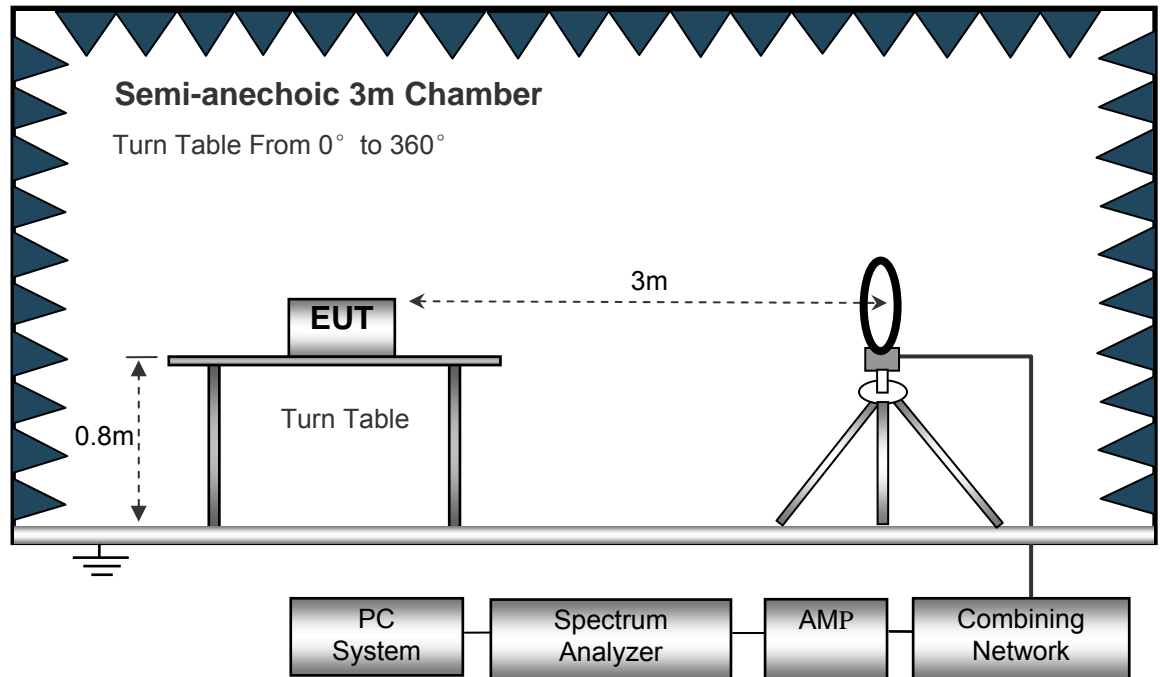

The test setup for emission measurement from 30 MHz to 1 GHz.

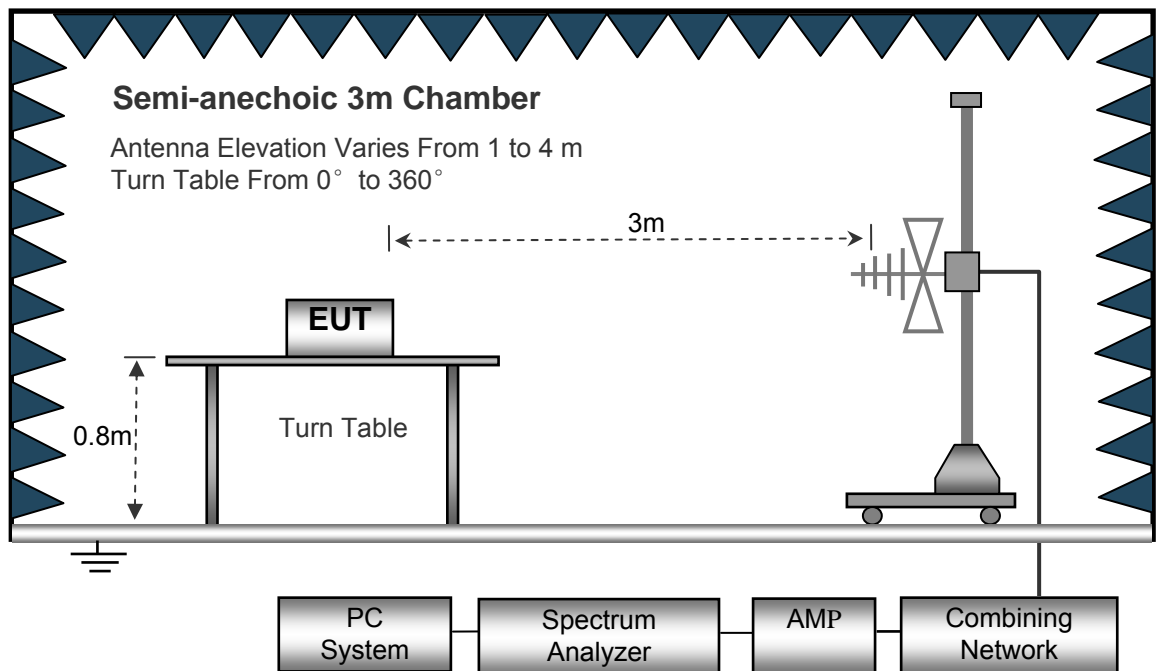

The test setup for emission measurement above 1 GHz.

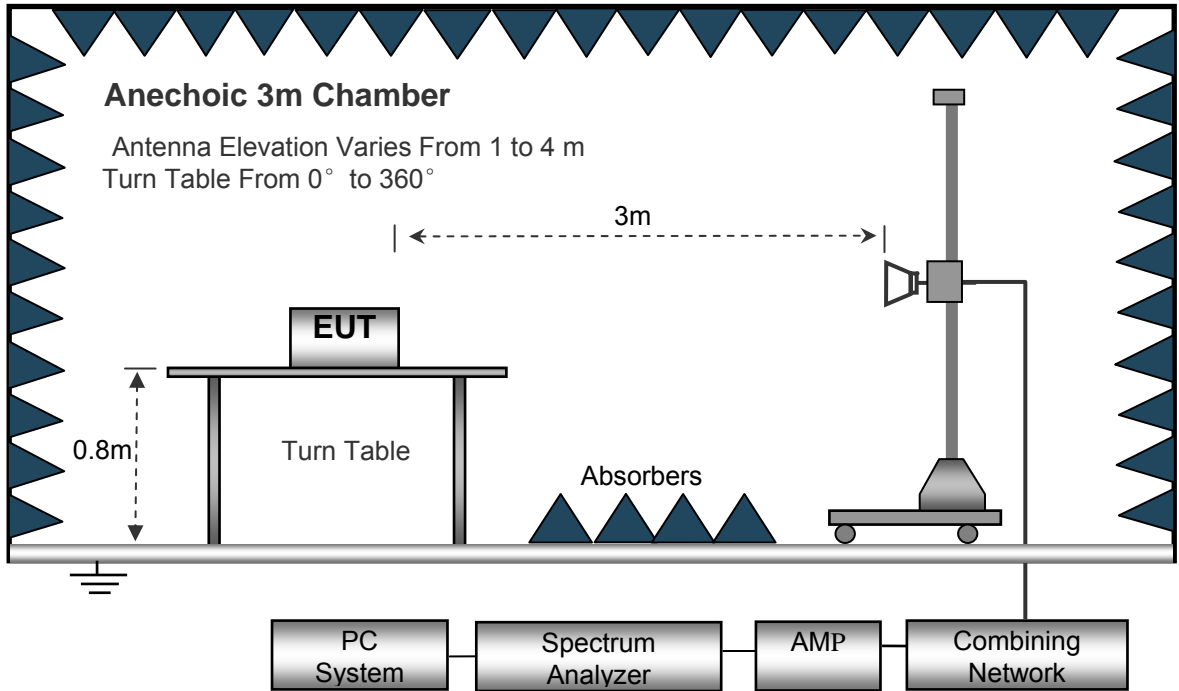

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth..... 100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth..... 1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth..... 1MHz
Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency: 32.768kHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were reported.

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | Limit | Margin |
|------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------|--------|
| | | | | Height | Polar | | | | |
| (MHz) | (dBμV) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dBμV/m) | (dBμV/m) | (dB) |
| GFSK Low Channel | | | | | | | | | |
| 175.68 | 22.61 | QP | 285 | 1.6 | H | 10.54 | 33.15 | 43.50 | -10.35 |
| 175.68 | 18.02 | QP | 206 | 1.4 | V | 10.54 | 28.56 | 43.50 | -14.94 |
| 4804.00 | 51.18 | PK | 342 | 1.6 | V | -1.05 | 50.13 | 74.00 | -23.87 |
| 4804.00 | 44.56 | Ave | 342 | 1.6 | V | -1.05 | 43.51 | 54.00 | -10.49 |
| 7206.00 | 53.11 | PK | 343 | 1.4 | H | 1.36 | 54.47 | 74.00 | -19.53 |
| 7206.00 | 43.97 | Ave | 343 | 1.4 | H | 1.36 | 45.33 | 54.00 | -8.67 |
| 2340.28 | 45.73 | PK | 187 | 1.8 | V | -13.18 | 32.55 | 74.00 | -41.45 |
| 2340.28 | 39.48 | Ave | 187 | 1.8 | V | -13.18 | 26.30 | 54.00 | -27.70 |
| 2387.22 | 44.10 | PK | 325 | 1.0 | H | -13.15 | 30.95 | 74.00 | -43.05 |
| 2387.22 | 38.16 | Ave | 325 | 1.0 | H | 13.15 | 51.31 | 54.00 | -2.69 |
| 2498.40 | 42.68 | PK | 201 | 1.0 | V | -13.05 | 29.63 | 74.00 | -44.37 |
| 2498.40 | 38.98 | Ave | 201 | 1.0 | V | -13.05 | 25.93 | 54.00 | -28.07 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | Limit | Margin |
|---------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------|--------|
| | | | | Height | Polar | | | | |
| (MHz) | (dBμV) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dBμV/m) | (dBμV/m) | (dB) |
| GFSK Middle Channel | | | | | | | | | |
| 175.68 | 21.45 | QP | 308 | 1.6 | H | 10.54 | 31.99 | 43.50 | -11.51 |
| 175.68 | 19.37 | QP | 237 | 1.2 | V | 10.54 | 29.91 | 43.50 | -13.59 |
| 4882.00 | 52.29 | PK | 155 | 1.1 | V | -0.62 | 51.67 | 74.00 | -22.33 |
| 4882.00 | 41.78 | Ave | 155 | 1.1 | V | -0.62 | 41.16 | 54.00 | -12.84 |
| 7323.00 | 52.27 | PK | 283 | 1.4 | H | 2.21 | 54.48 | 74.00 | -19.52 |
| 7323.00 | 44.30 | Ave | 283 | 1.4 | H | 2.21 | 46.51 | 54.00 | -7.49 |
| 2325.73 | 46.47 | PK | 63 | 1.3 | V | -13.19 | 33.28 | 74.00 | -40.72 |
| 2325.73 | 39.64 | Ave | 63 | 1.3 | V | -13.19 | 26.45 | 54.00 | -27.55 |
| 2377.27 | 43.07 | PK | 137 | 1.1 | H | -13.14 | 29.93 | 74.00 | -44.07 |
| 2377.27 | 37.04 | Ave | 137 | 1.1 | H | -13.14 | 23.90 | 54.00 | -30.10 |
| 2489.75 | 43.23 | PK | 184 | 1.8 | V | -13.08 | 30.15 | 74.00 | -43.85 |
| 2489.75 | 36.55 | Ave | 184 | 1.8 | V | -13.08 | 23.47 | 54.00 | -30.53 |

| Frequency | Receiver Reading | Detector | Turn table Angle | RX Antenna | | Corrected Factor | Corrected Amplitude | Limit | Margin |
|-------------------|------------------|-------------|------------------|------------|-------|------------------|---------------------|----------|--------|
| | | | | Height | Polar | | | | |
| (MHz) | (dBμV) | (PK/QP/Ave) | Degree | (m) | (H/V) | (dB) | (dBμV/m) | (dBμV/m) | (dB) |
| GFSK High Channel | | | | | | | | | |
| 175.68 | 20.64 | QP | 50 | 1.7 | H | 10.54 | 31.18 | 43.50 | -12.32 |
| 175.68 | 20.11 | QP | 273 | 1.9 | V | 10.54 | 30.65 | 43.50 | -12.85 |
| 4960.00 | 54.44 | PK | 230 | 1.2 | V | -0.24 | 54.20 | 74.00 | -19.80 |
| 4960.00 | 42.13 | Ave | 230 | 1.2 | V | -0.24 | 41.89 | 54.00 | -12.11 |
| 7440.00 | 54.83 | PK | 7 | 1.5 | H | 2.84 | 57.67 | 74.00 | -16.33 |
| 7440.00 | 41.14 | Ave | 7 | 1.5 | H | 2.84 | 43.98 | 54.00 | -10.02 |
| 2319.18 | 45.43 | PK | 245 | 1.6 | V | -13.19 | 32.24 | 74.00 | -41.76 |
| 2319.18 | 37.13 | Ave | 245 | 1.6 | V | -13.19 | 23.94 | 54.00 | -30.06 |
| 2360.15 | 44.40 | PK | 251 | 1.8 | H | -13.14 | 31.26 | 74.00 | -42.74 |
| 2360.15 | 36.98 | Ave | 251 | 1.8 | H | -13.14 | 23.84 | 54.00 | -30.16 |
| 2489.91 | 42.21 | PK | 140 | 1.1 | V | -13.08 | 29.13 | 74.00 | -44.87 |
| 2489.91 | 36.45 | Ave | 140 | 1.1 | V | -13.08 | 23.37 | 54.00 | -30.63 |

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported

8 Band Edge Measurement

| | |
|-------------------|--|
| Test Requirement: | Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). |
| Test Method: | DA 00-705 |
| Test Limit: | Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
| Test Mode: | Transmitting |


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


8.2 Test Result



Test plots



GFSK Band edge-left side

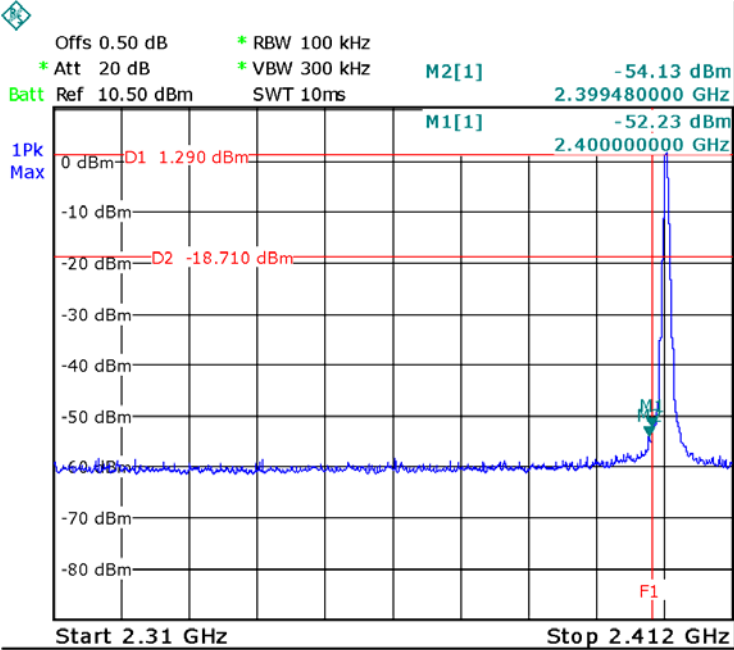

GFSK Band edge-right side

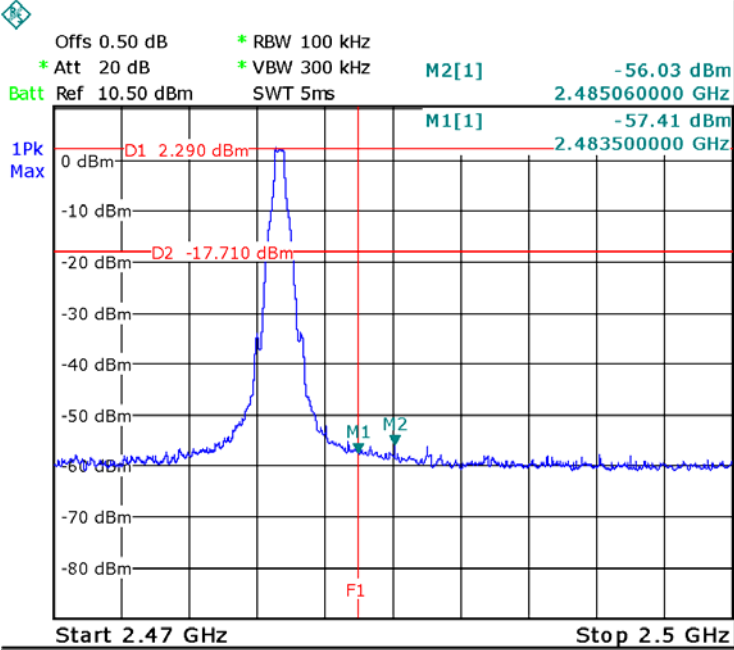

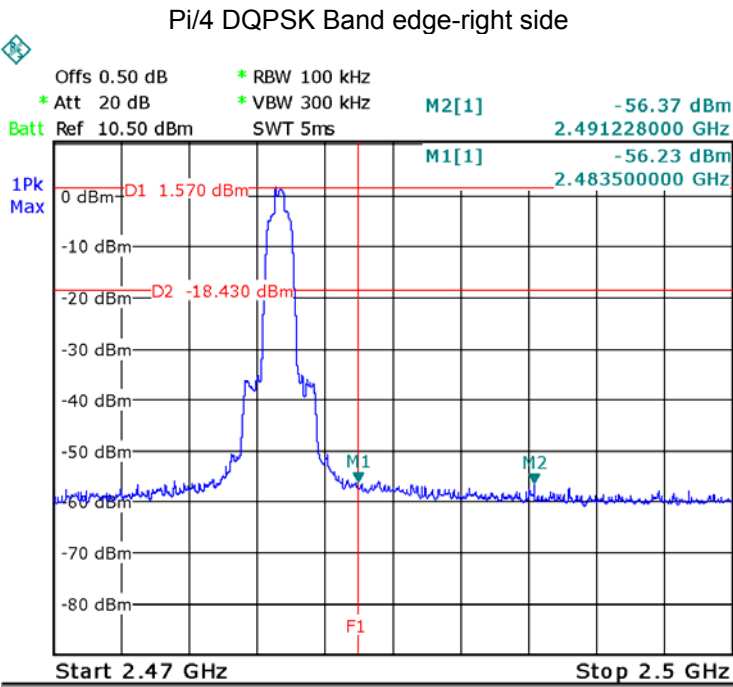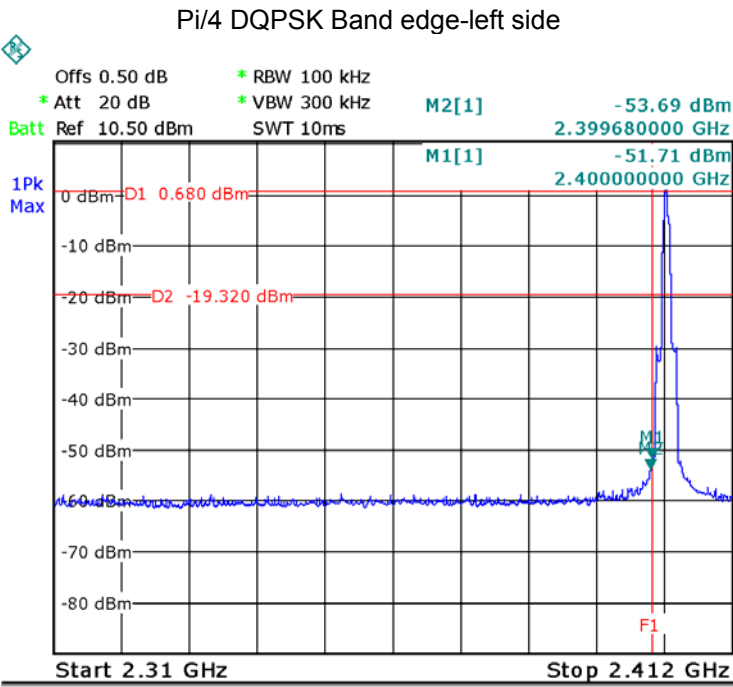

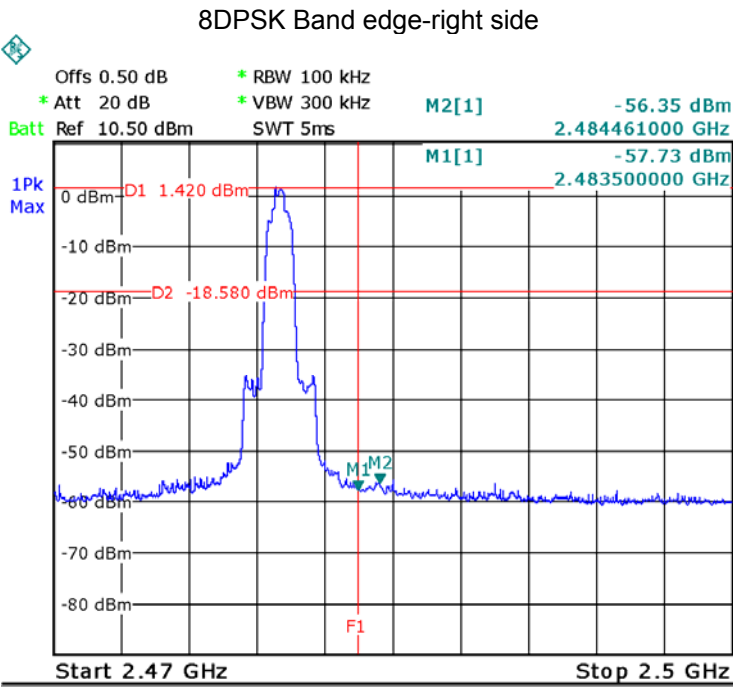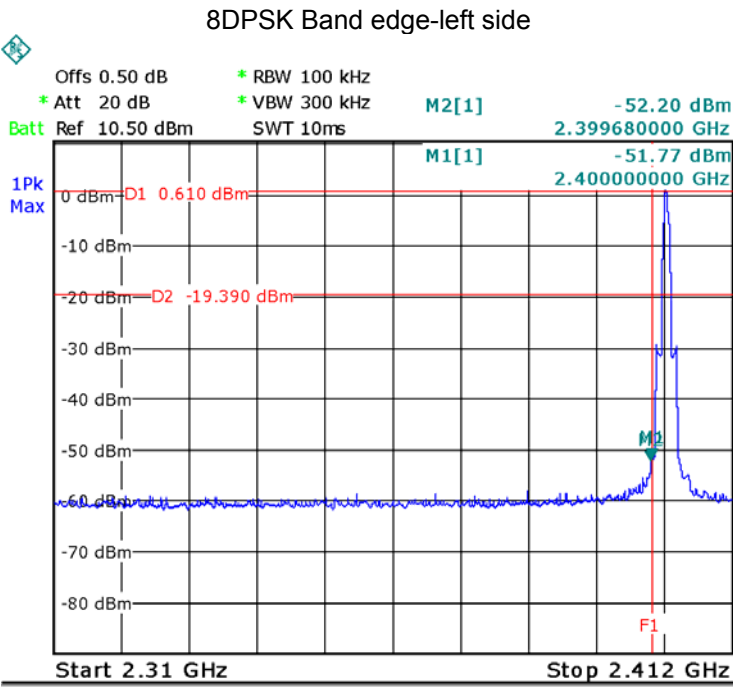

9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

9.2 Test Result


| Modulation | Test Channel | Bandwidth(MHz) |
|------------|--------------|----------------|
| GFSK | Low | 0.922 |
| GFSK | Middle | 0.922 |
| GFSK | High | 0.928 |
| Pi/4 DQPSK | Low | 1.252 |
| Pi/4 DQPSK | Middle | 1.252 |
| Pi/4 DQPSK | High | 1.252 |
| 8DPSK | Low | 1.264 |
| 8DPSK | Middle | 1.264 |
| 8DPSK | High | 1.264 |



Test plots



GFSK Low Channel


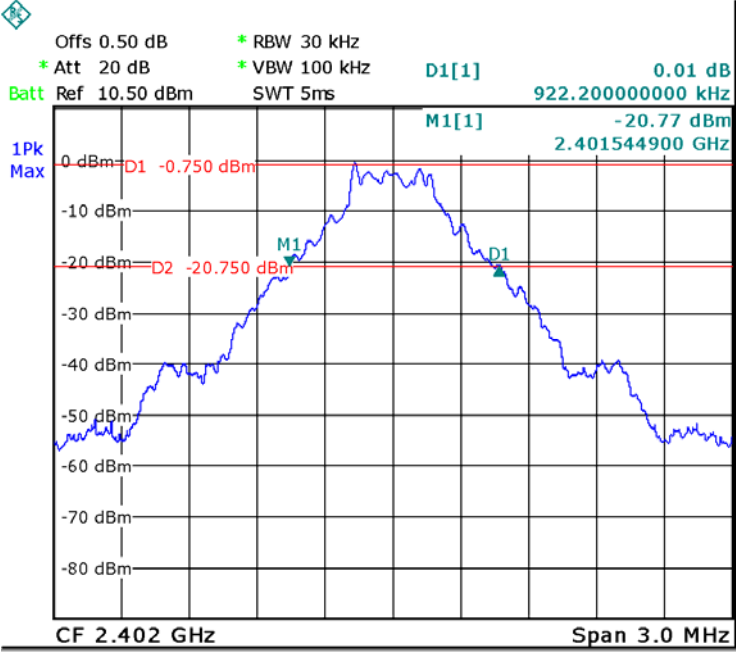



GFSK Middle Channel

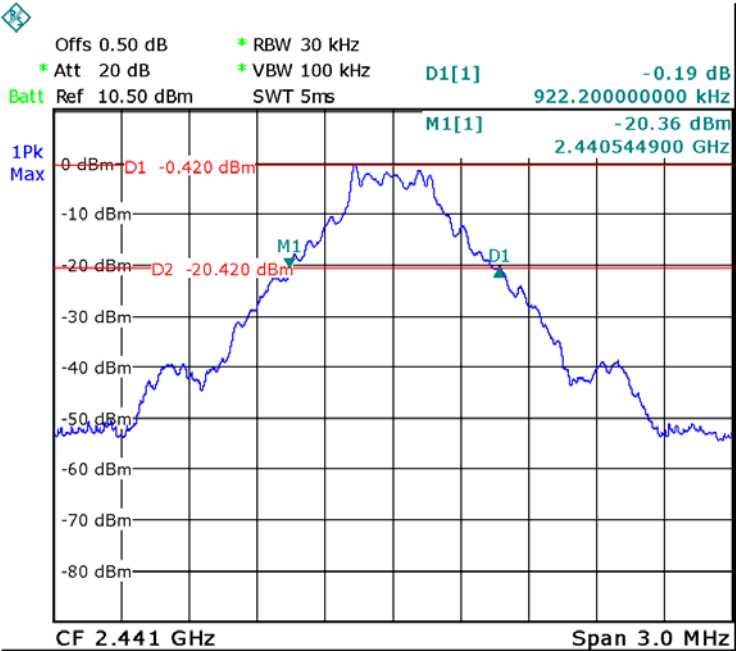

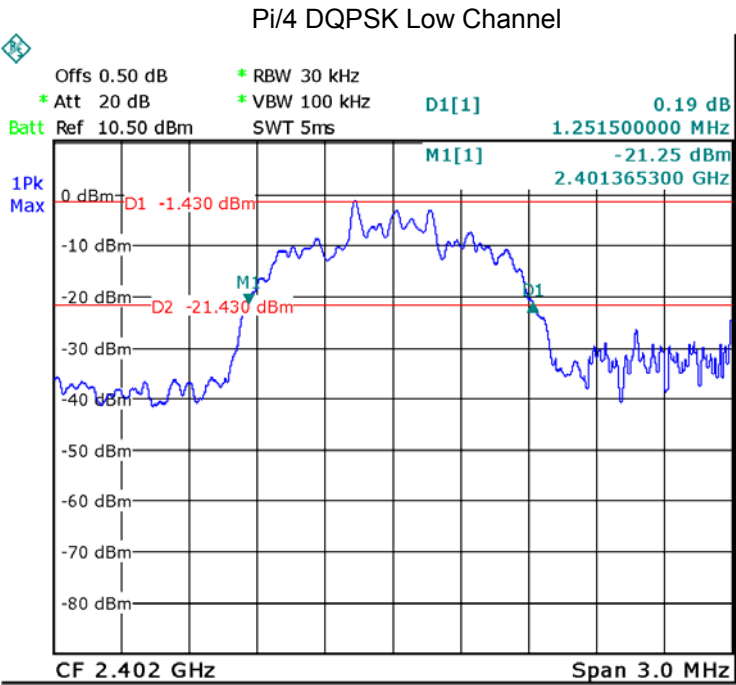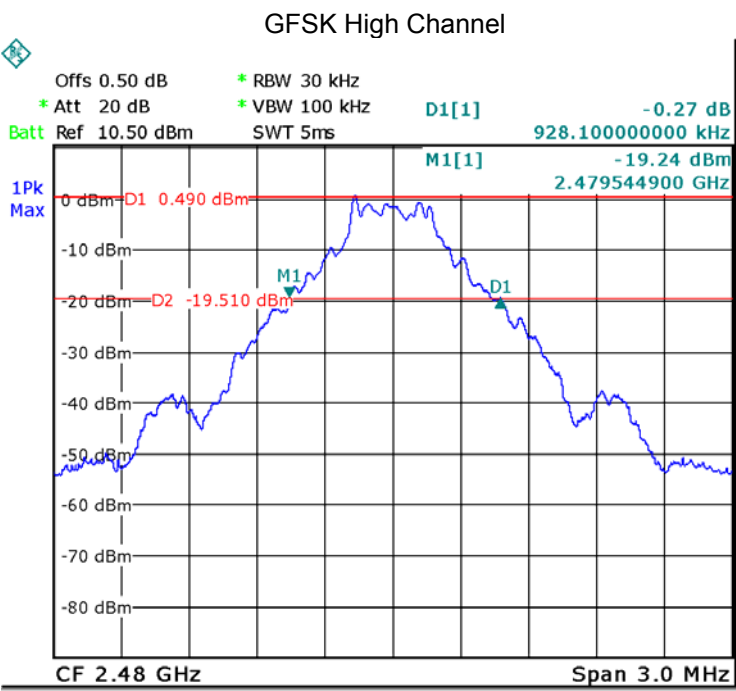

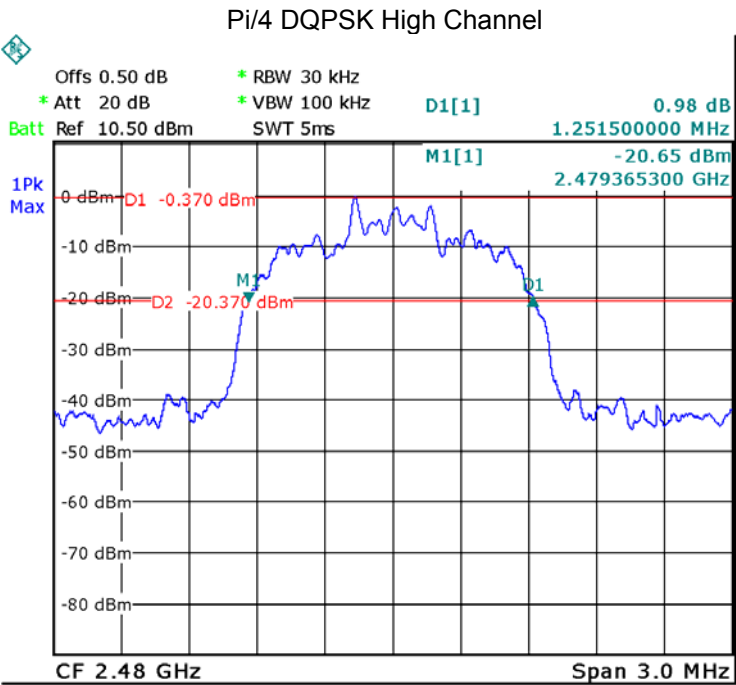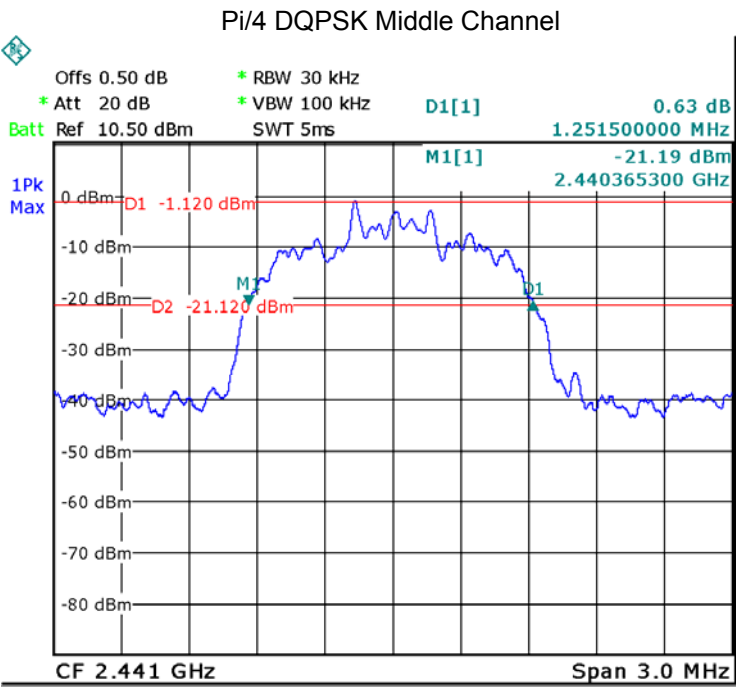

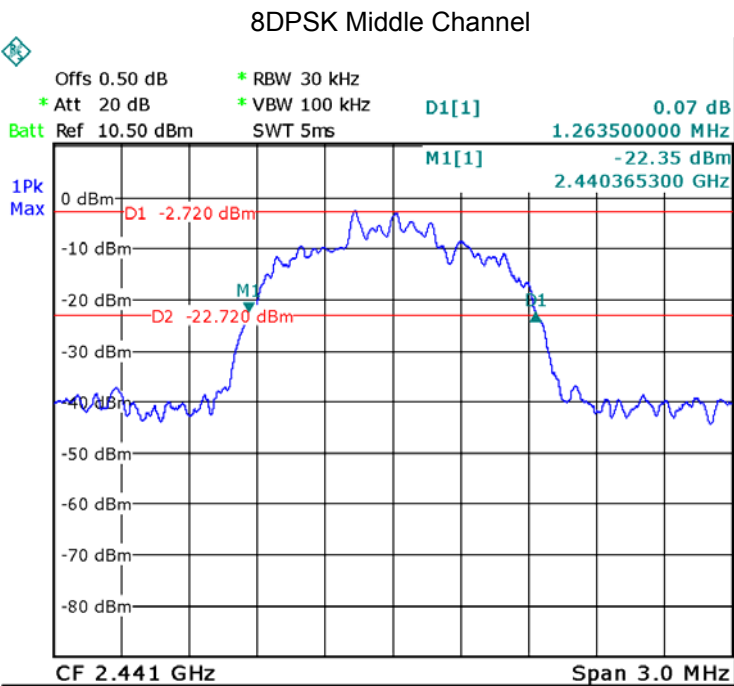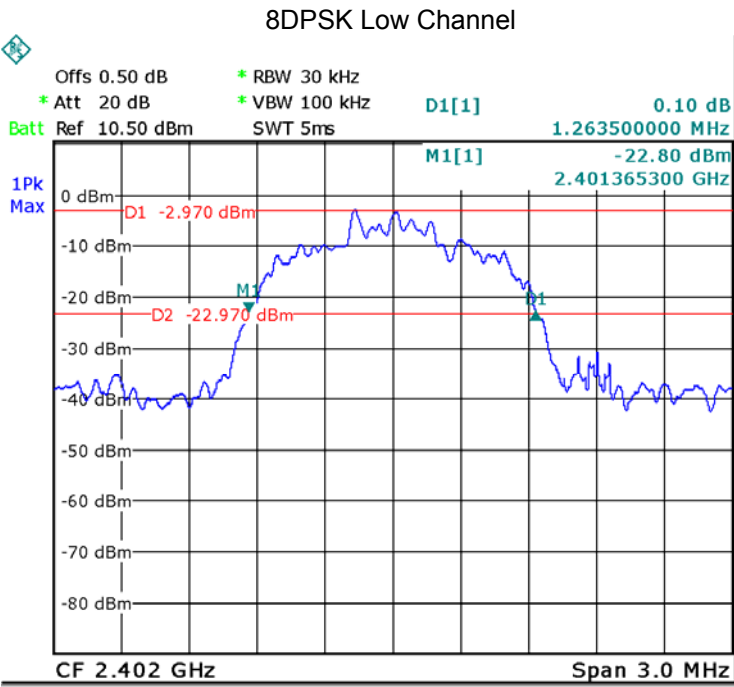

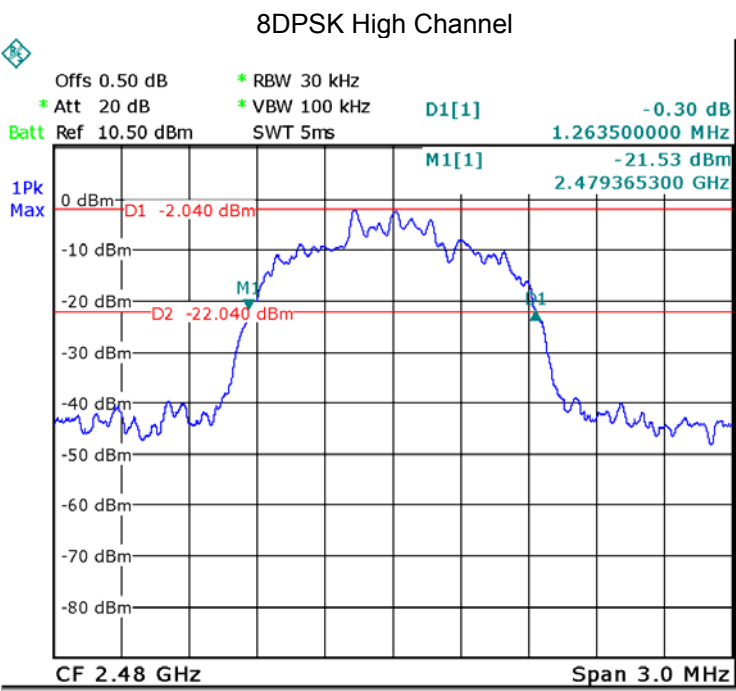

10 Maximum Peak Output Power

| | |
|-------------------|--|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247 |
| Test Method: | DA 00-705 |
| Test Limit: | Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. |
| Test mode: | Test in fixing frequency transmitting mode. |

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

10.2 Test Result


| Modulation | Test Channel | Output Power (dBm) | Limit (dBm) |
|------------|--------------|--------------------|-------------|
| GFSK | Low | 1.86 | 30 |
| GFSK | Middle | 1.98 | 30 |
| GFSK | High | 2.79 | 30 |
| Pi/4 DQPSK | Low | 1.63 | 30 |
| Pi/4 DQPSK | Middle | 1.60 | 30 |
| Pi/4 DQPSK | High | 2.35 | 30 |
| 8DPSK | Low | 1.86 | 30 |
| 8DPSK | Middle | 2.00 | 30 |
| 8DPSK | High | 2.69 | 30 |



Test plots


GFSK Low Channel

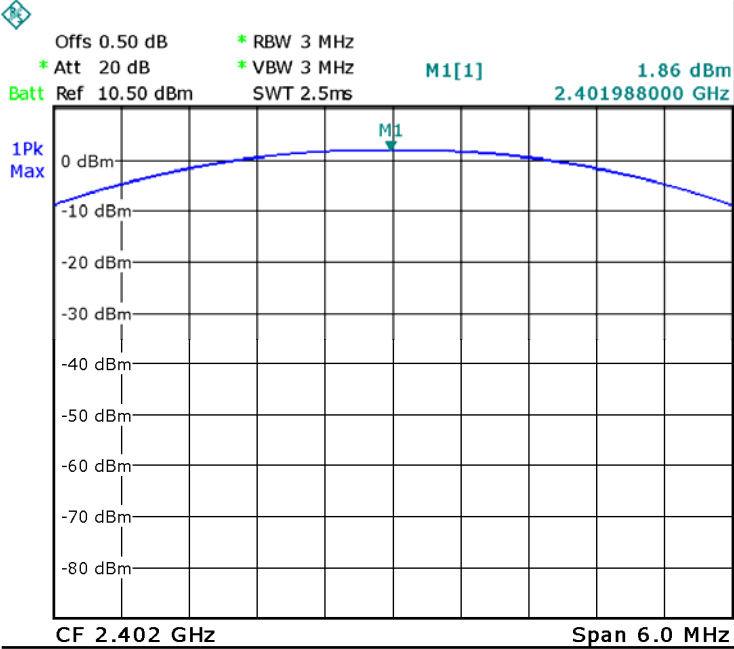

GFSK Middle Channel

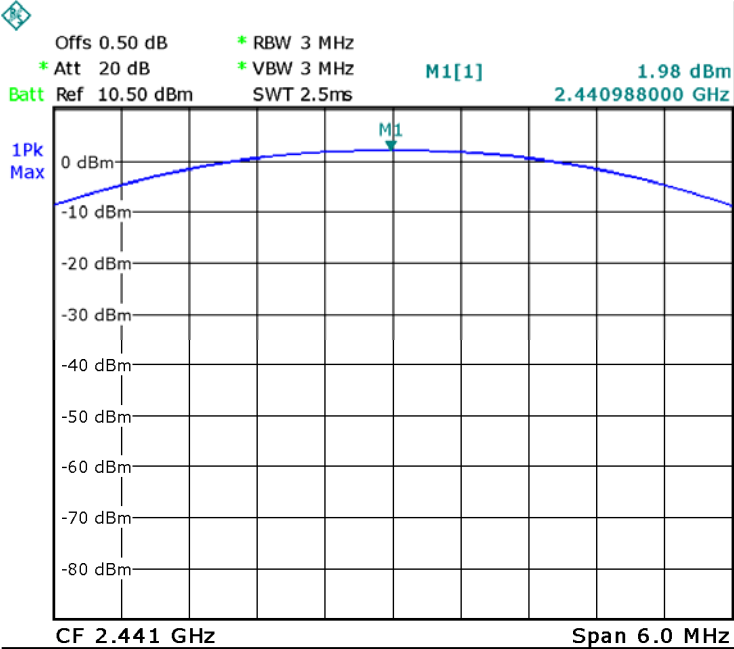

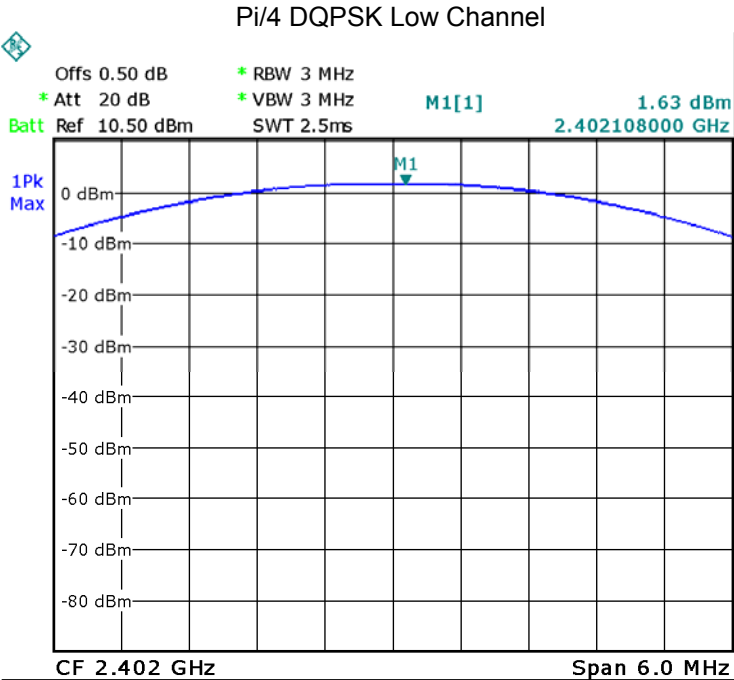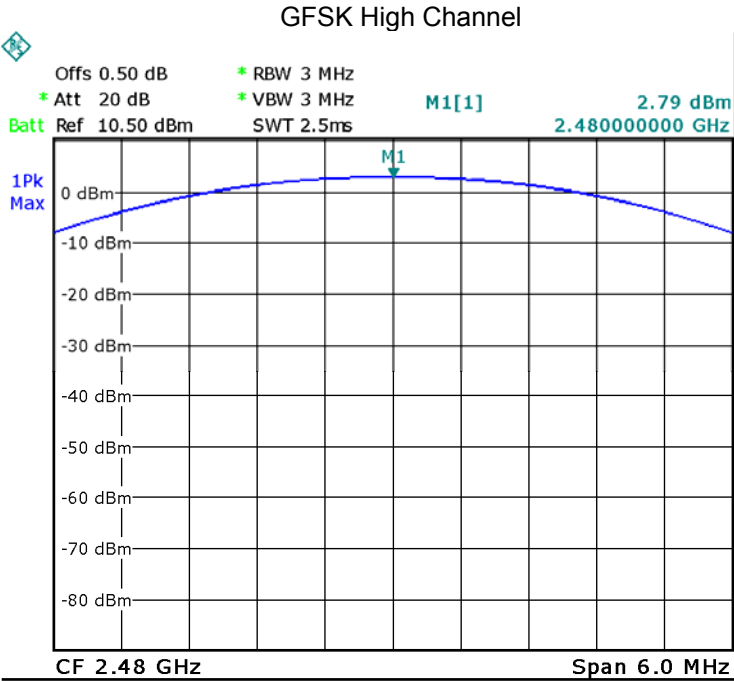

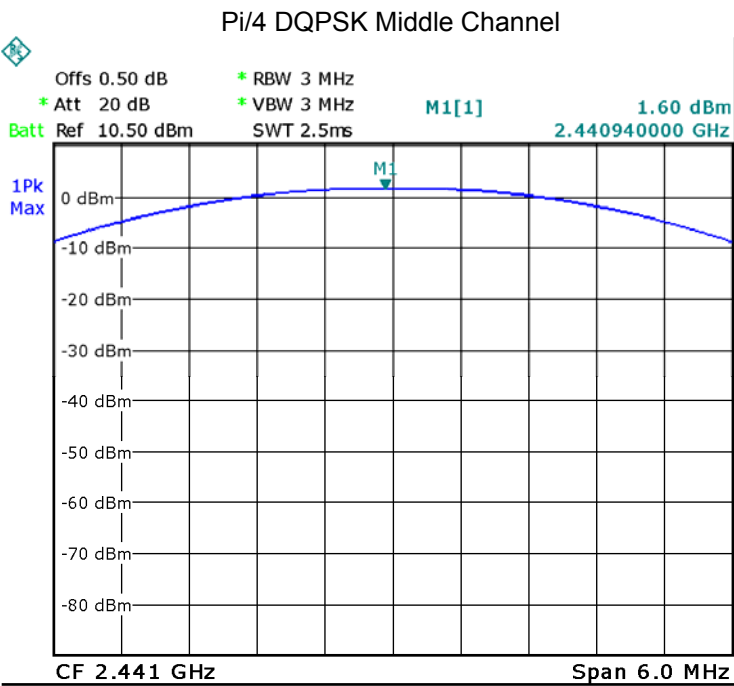




M1[1]



1.60 dBm



2.440940000 GHz

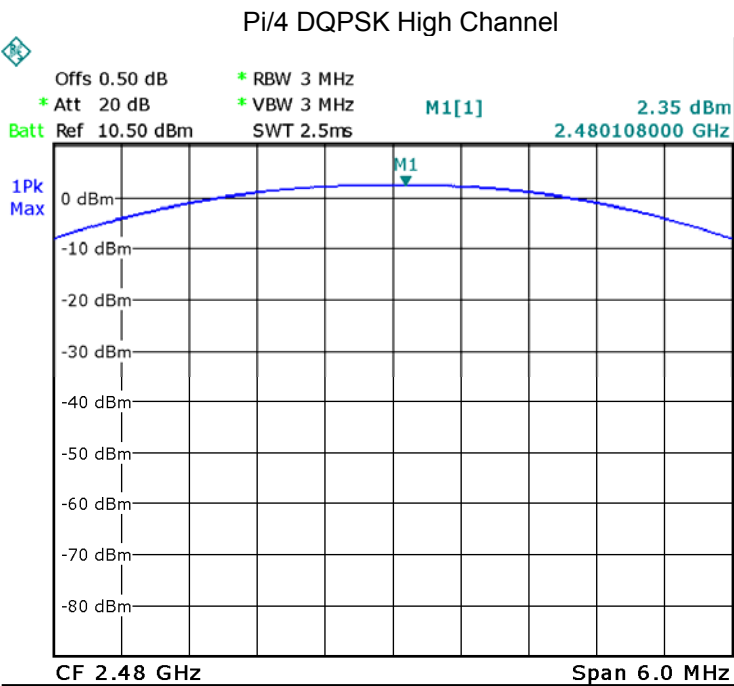





M1[1]




2.35 dBm



2.480108000 GHz

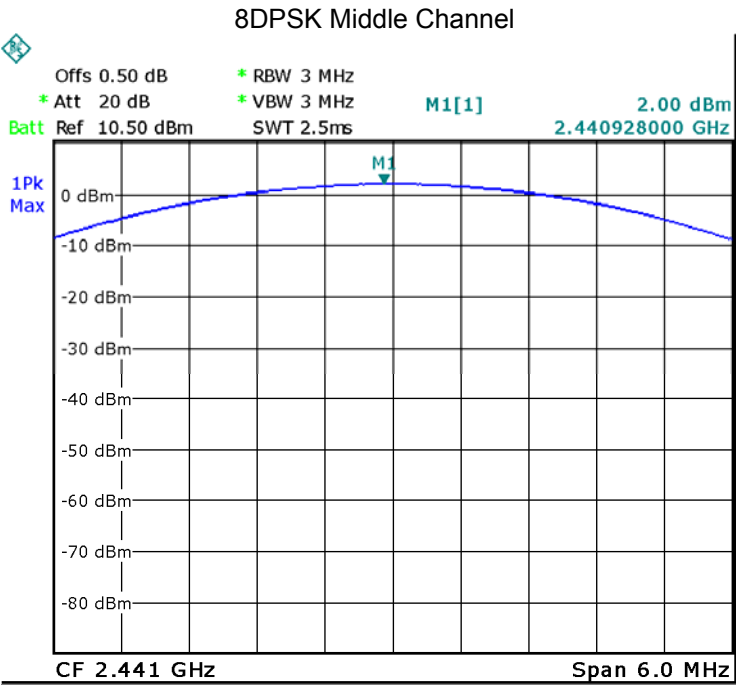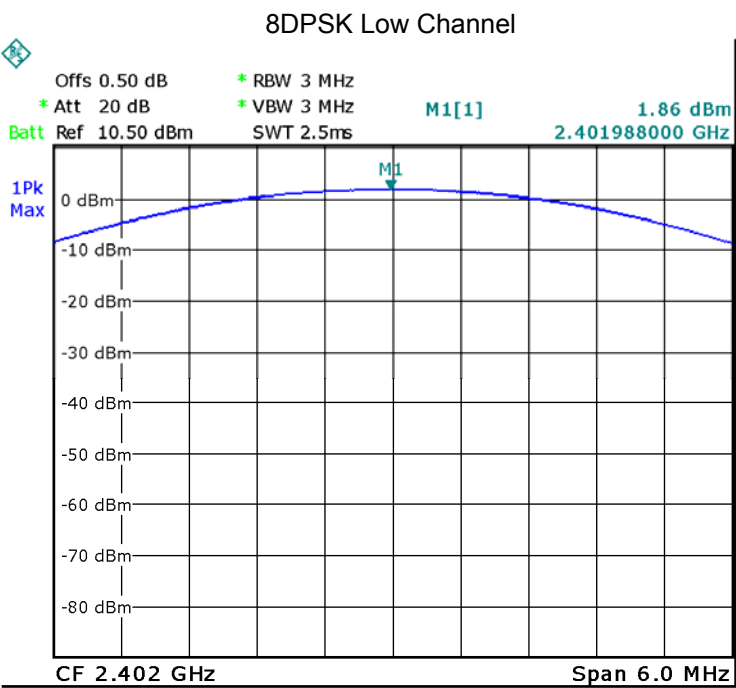

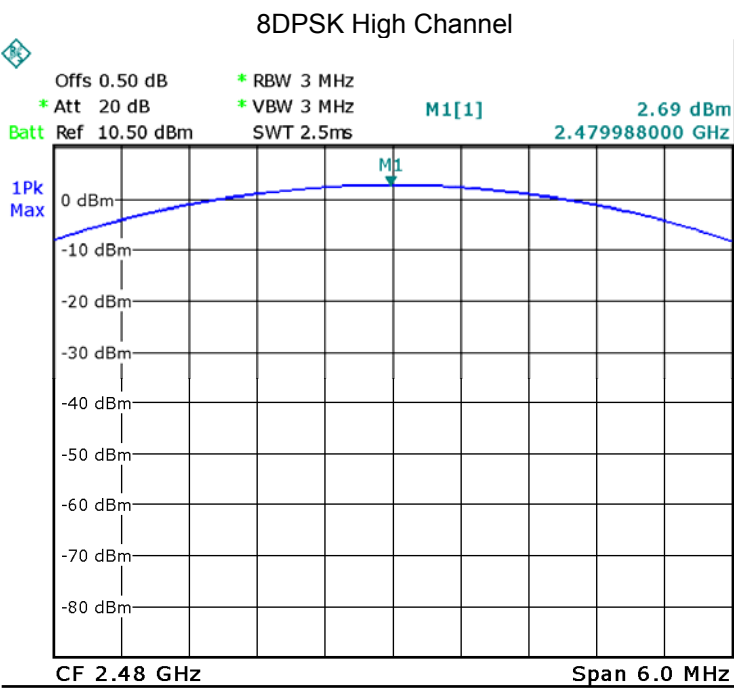

11 Hopping Channel Separation

| | |
|-------------------|--|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247 |
| Test Method: | DA 00-705 |
| Test Limit: | Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W. |
| Test Mode: | Test in hopping transmitting operating mode. |

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.2 Test Result


| Modulation | Test Channel | Separation (MHz) | Result |
|------------|--------------|------------------|--------|
| GFSK | Low | 1.00 | PASS |
| GFSK | Middle | 1.00 | PASS |
| GFSK | High | 1.00 | PASS |
| Pi/4 DQPSK | Low | 1.00 | PASS |
| Pi/4 DQPSK | Middle | 1.00 | PASS |
| Pi/4 DQPSK | High | 1.00 | PASS |
| 8DPSK | Low | 1.00 | PASS |
| 8DPSK | Middle | 1.00 | PASS |
| 8DPSK | High | 1.00 | PASS |



Test plots



GFSK Low Channel


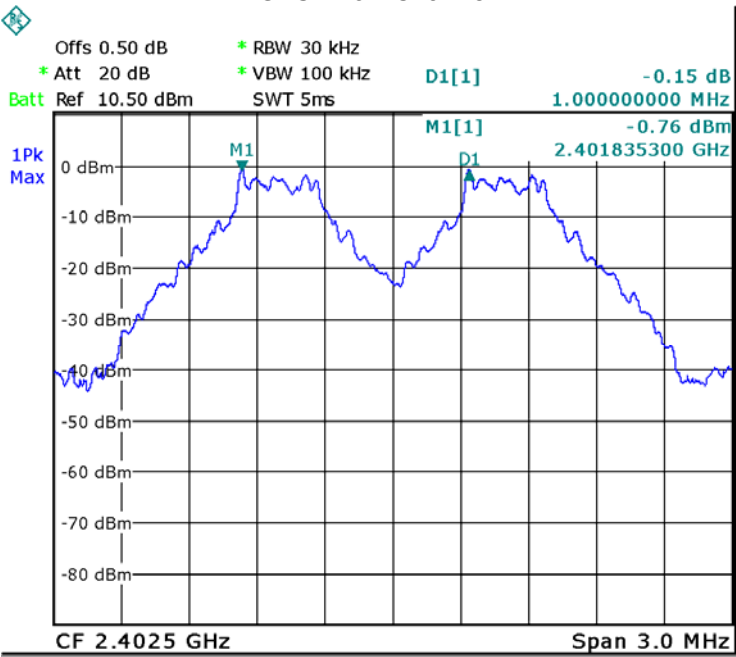



GFSK Middle Channel

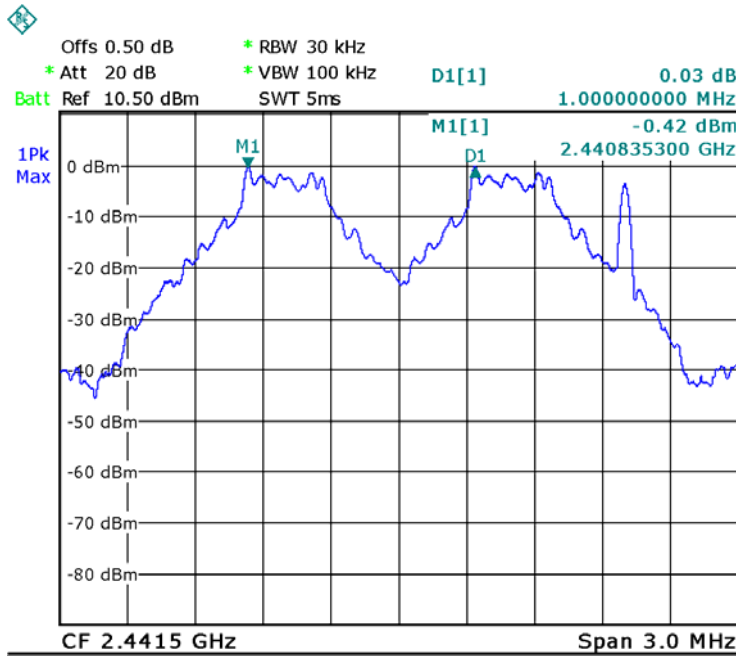

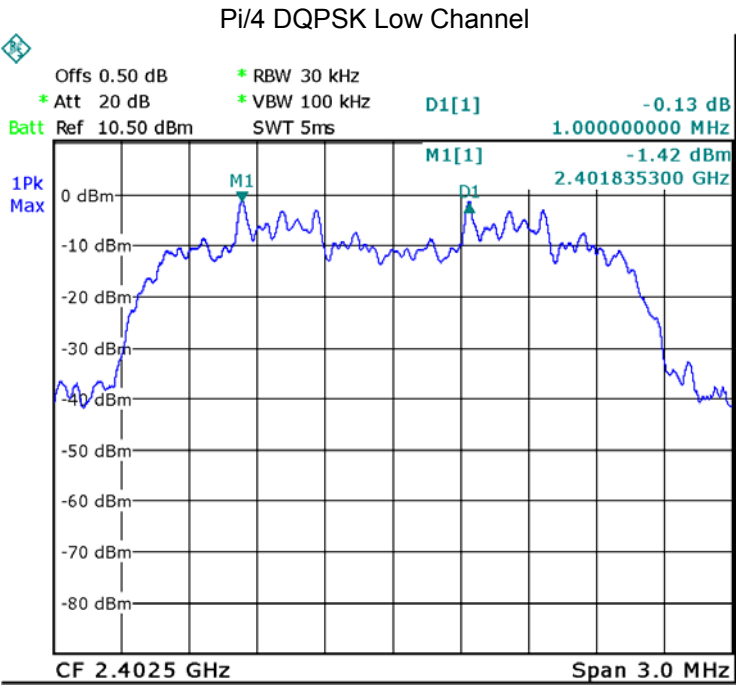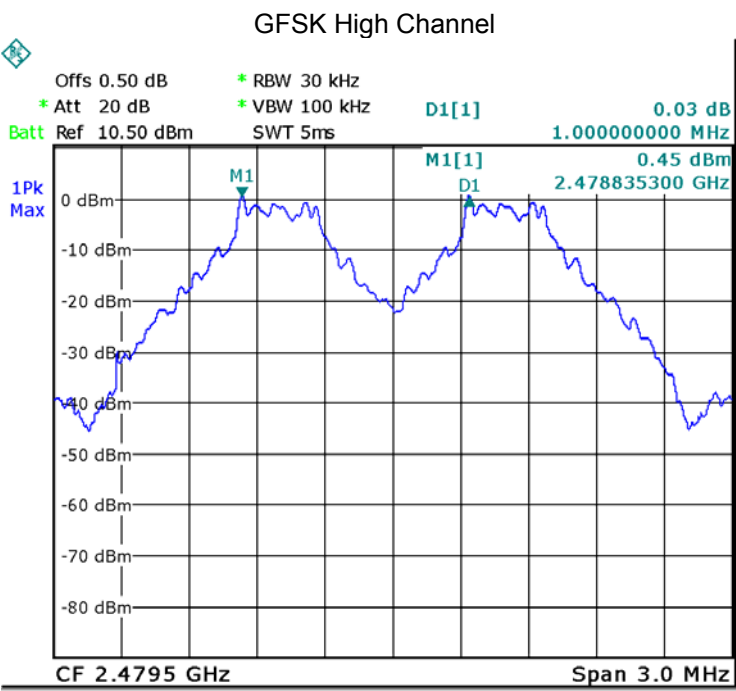

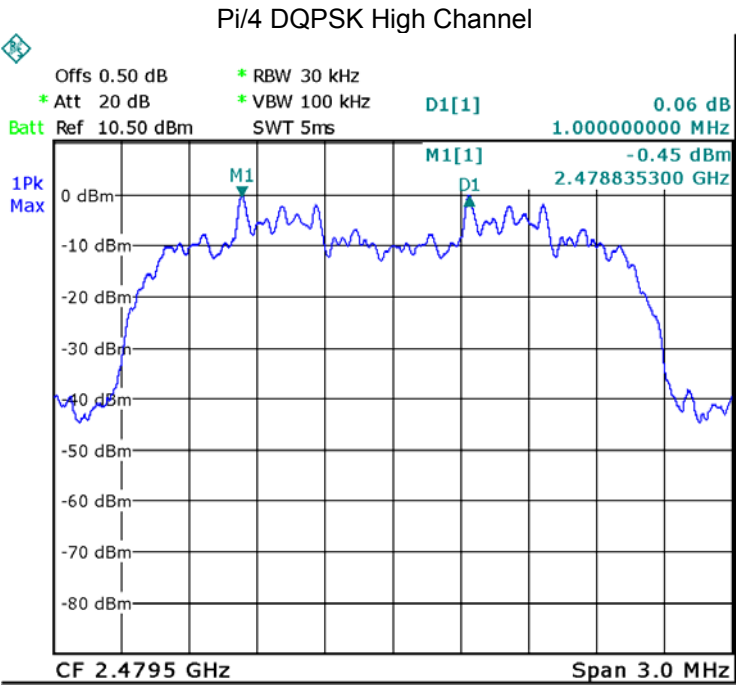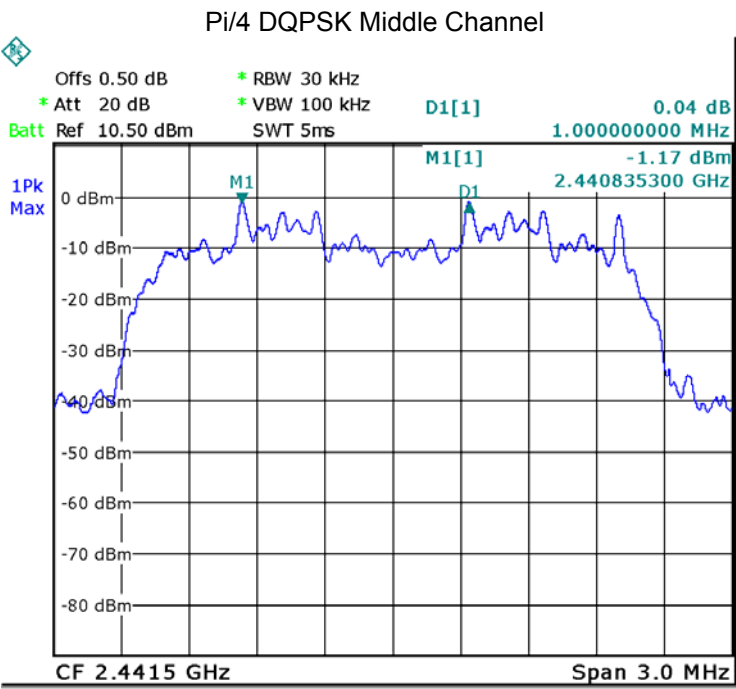

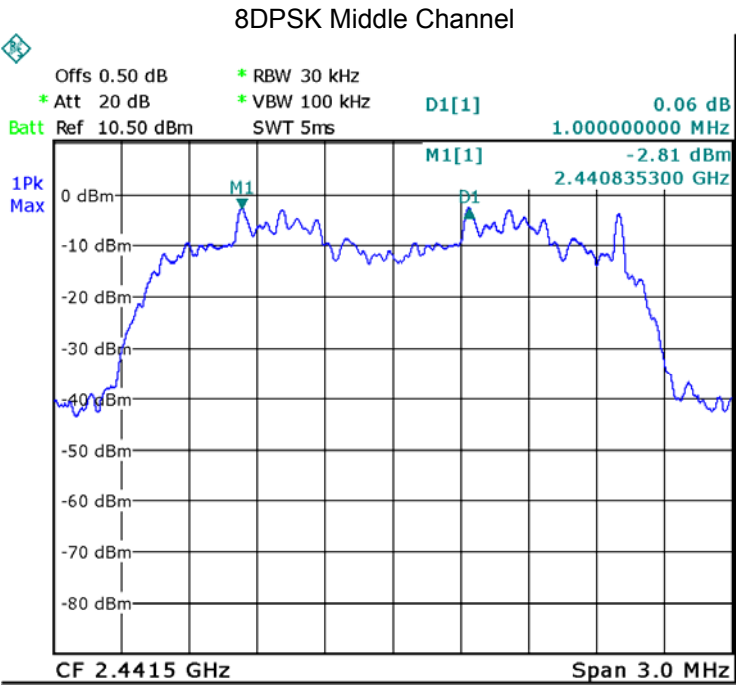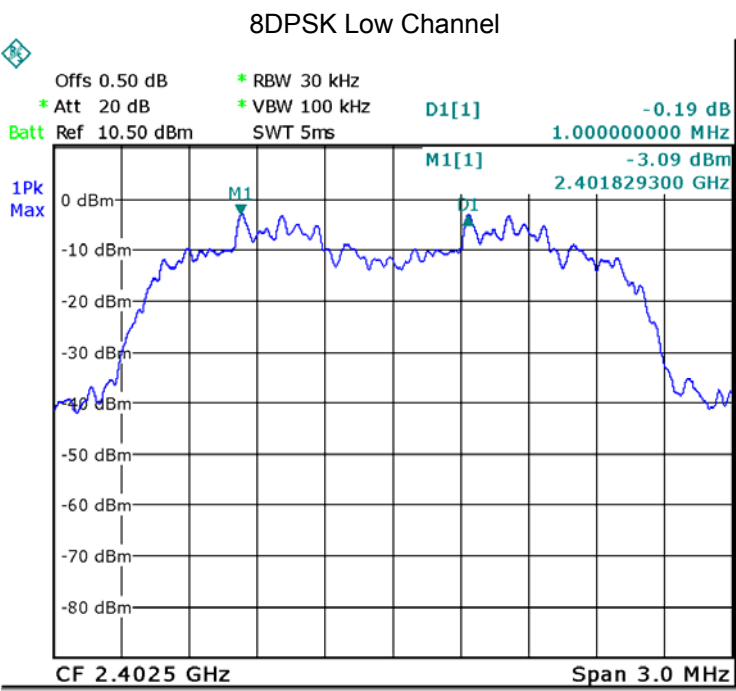

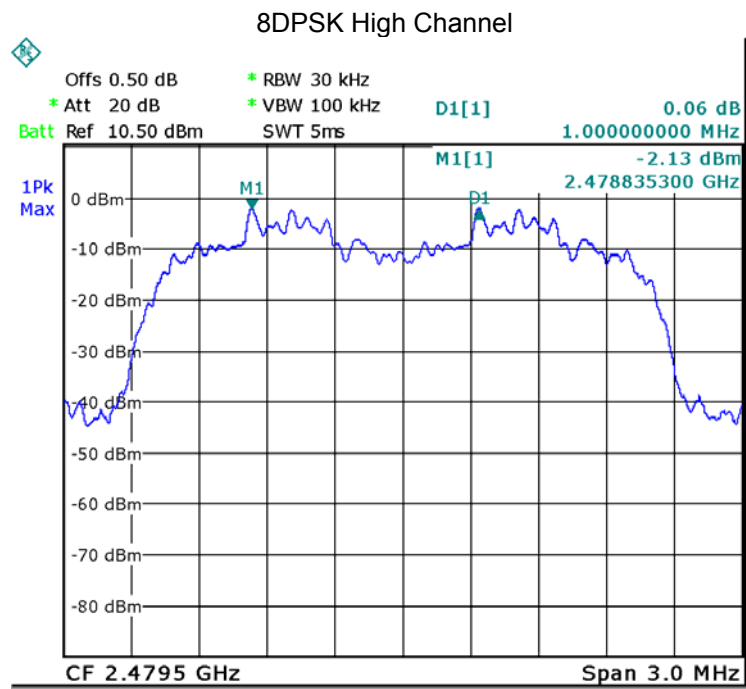

12 Number of Hopping Frequency


| | |
|-------------------|---|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247 |
| Test Method: | DA 00-705 |
| Test Limit: | Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. |
| Test Mode: | Test in hopping transmitting operating mode. |



12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

12.2 Test Result

Test Plot: 79 Channels in total

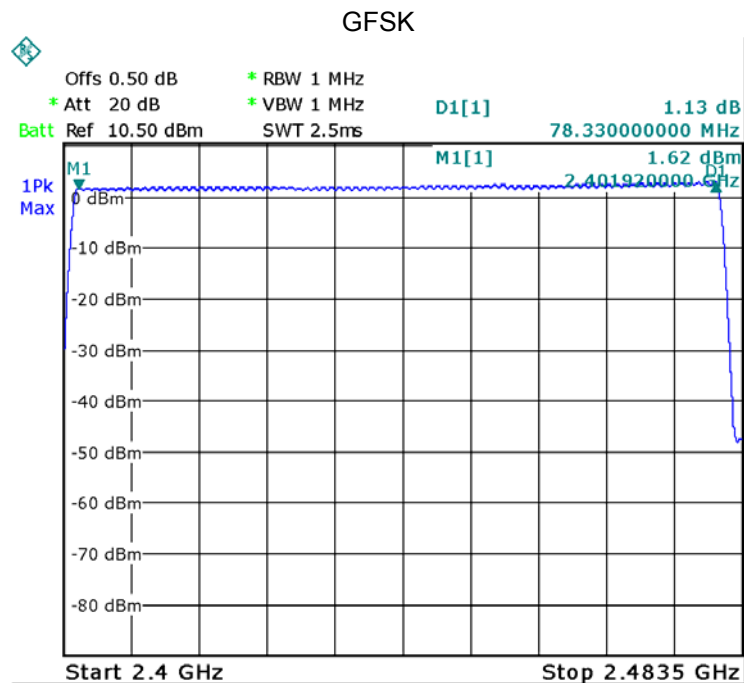

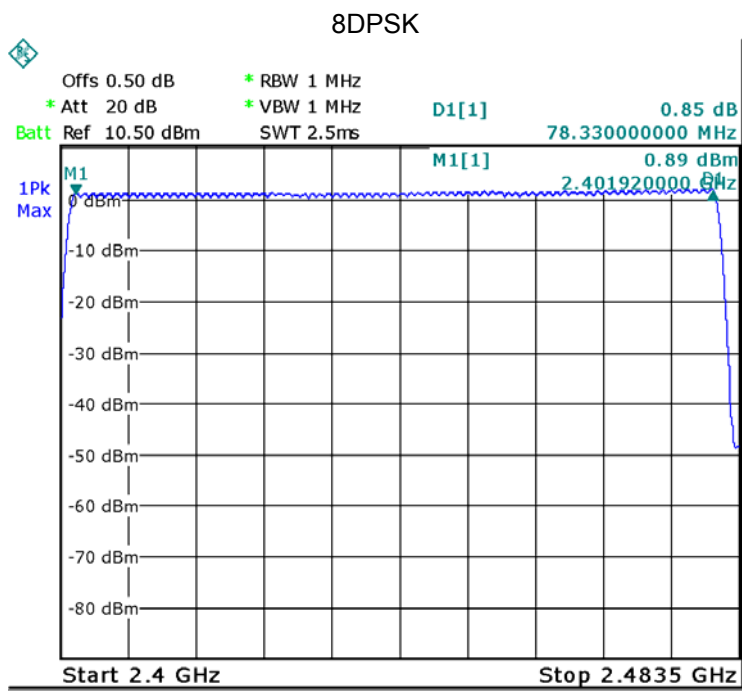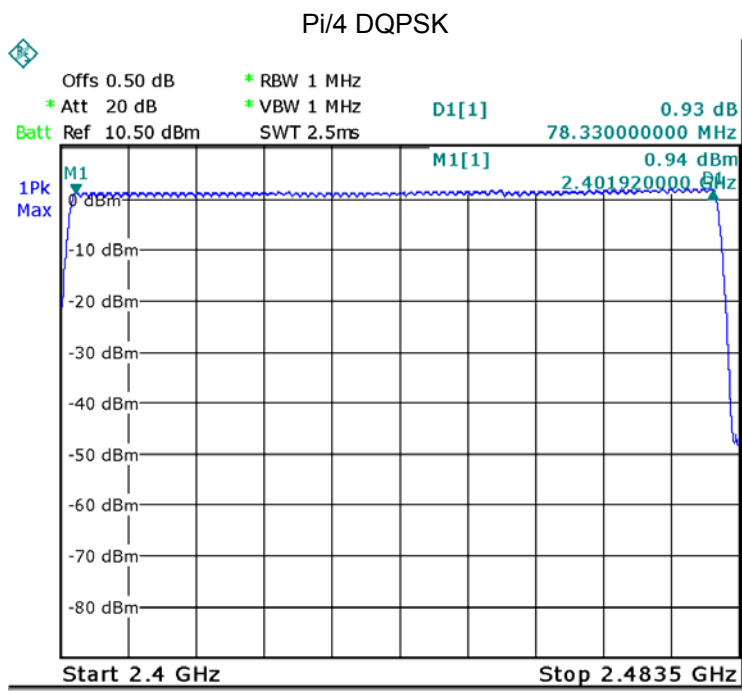

13 Dwell Time

| | |
|-------------------|--|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247 |
| Test Method: | DA 00-705 |
| Test Limit: | Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. |
| Test Mode: | Test in hopping transmitting operating mode. |

13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).



DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:



| Data Packet | Dwell Time(s) |
|---------------------------------------|------------------------------------|
| DH5 | $1600/79/6*0.4*79*(MkrDelta)/1000$ |
| DH3 | $1600/79/4*0.4*79*(MkrDelta)/1000$ |
| DH1 | $1600/79/2*0.4*79*(MkrDelta)/1000$ |
| Remark: Mkr Delta is once pulse time. | |



| Modulation | Data Packet | Channel | pulse time(ms) | Dwell Time(s) | Limits(s) |
|------------|-------------|---------|----------------|---------------|-----------|
| GFSK | DH5 | Low | 2.880 | 0.307 | 0.4 |
| | | middle | 2.880 | 0.307 | 0.4 |
| | | High | 2.880 | 0.307 | 0.4 |
| Pi/4DQPSK | DH5 | Low | 2.880 | 0.307 | 0.4 |
| | | middle | 2.880 | 0.307 | 0.4 |
| | | High | 2.880 | 0.307 | 0.4 |
| 8DPSK | DH5 | Low | 2.880 | 0.307 | 0.4 |
| | | middle | 2.880 | 0.307 | 0.4 |
| | | High | 2.880 | 0.307 | 0.4 |



Remark: only the worst data were recorded.

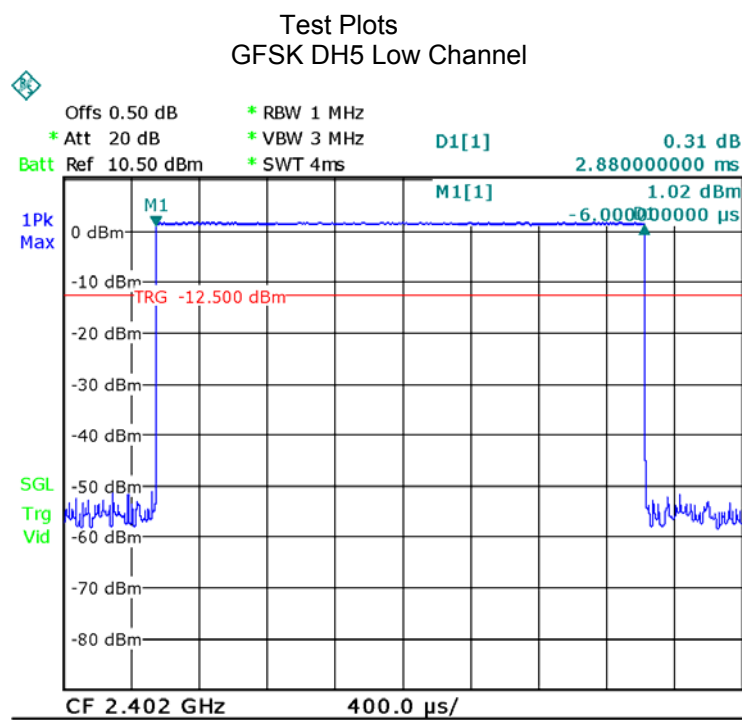

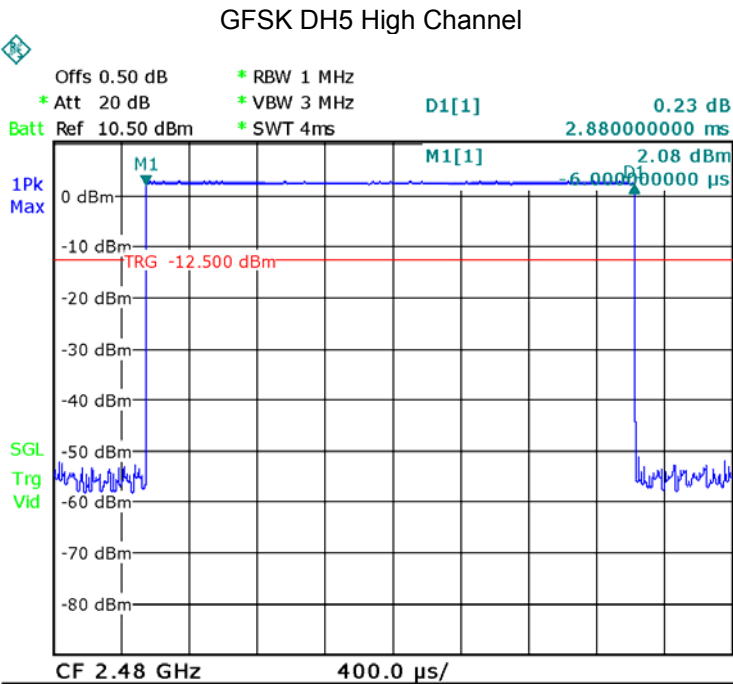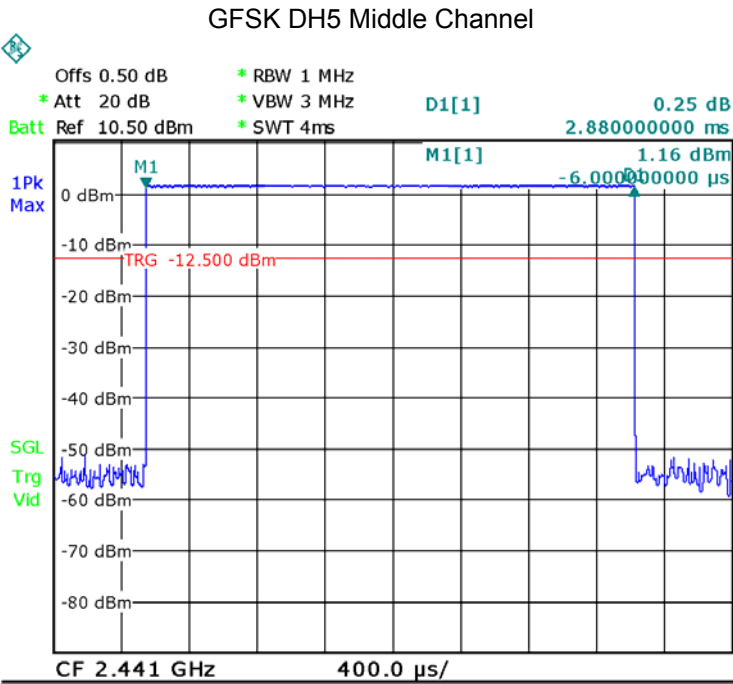

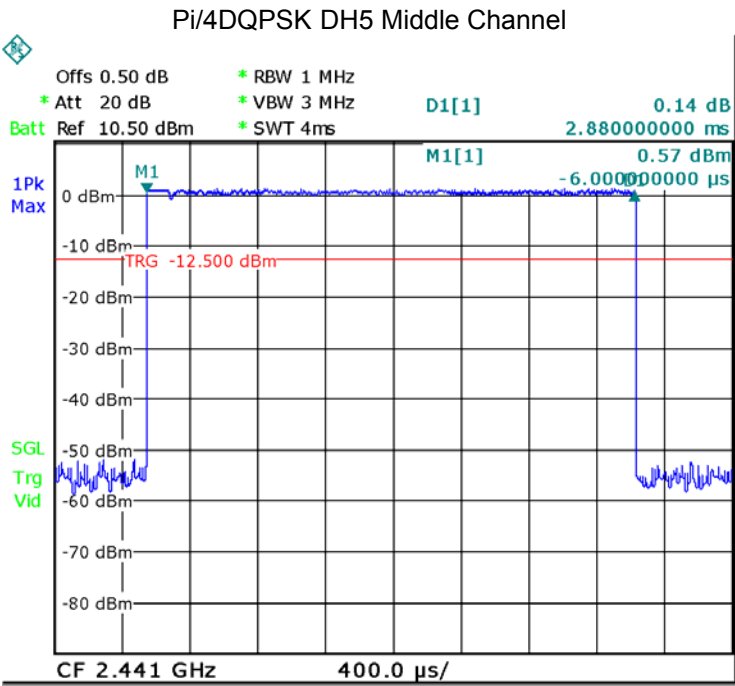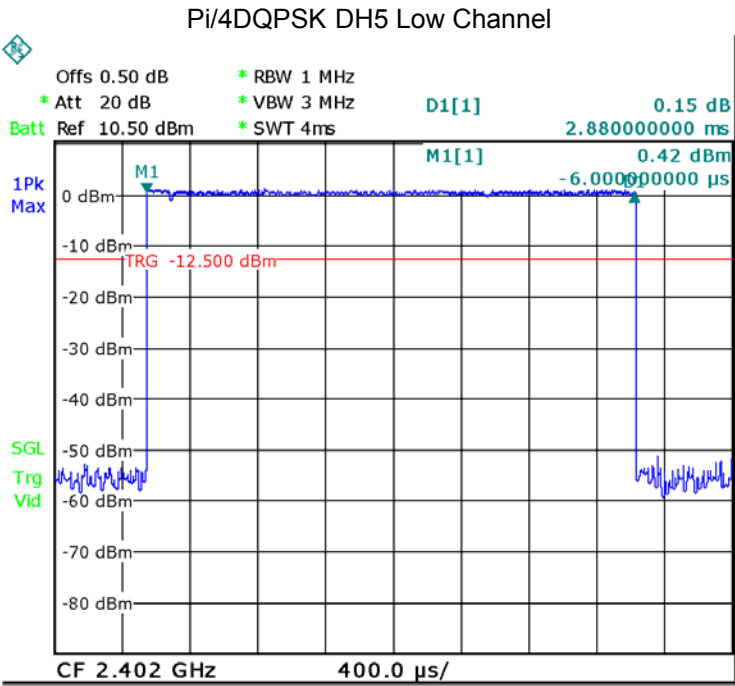

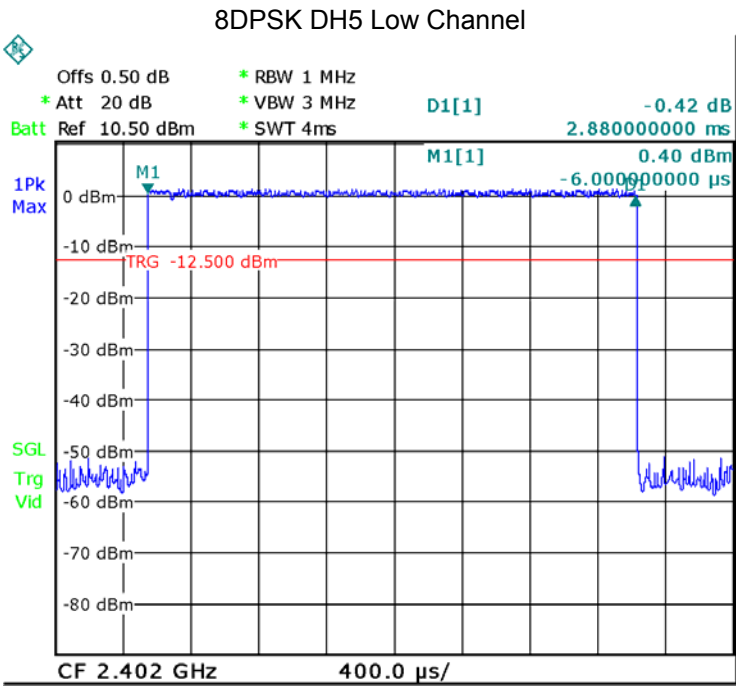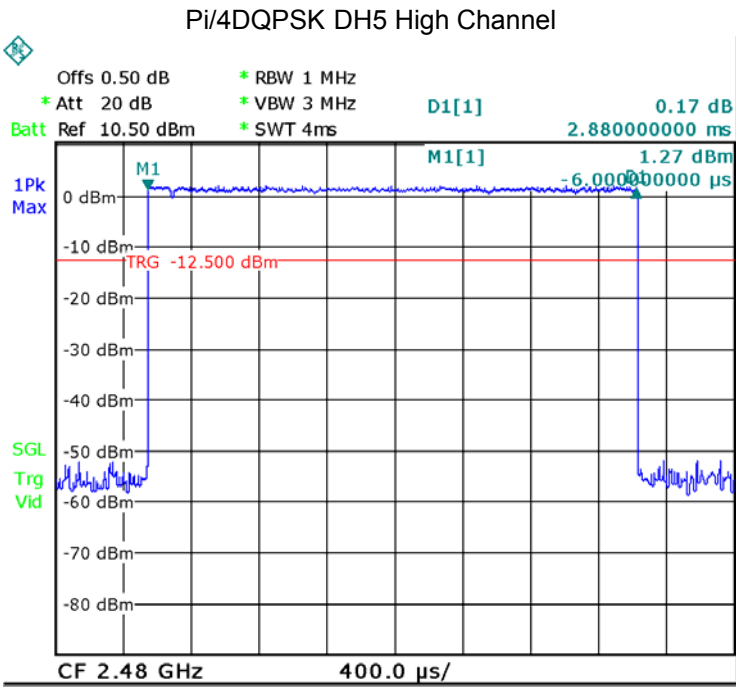

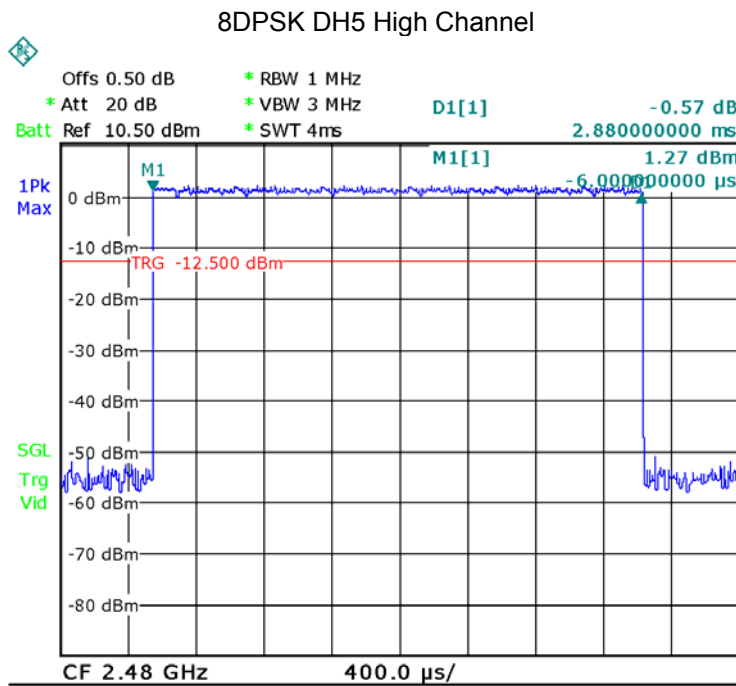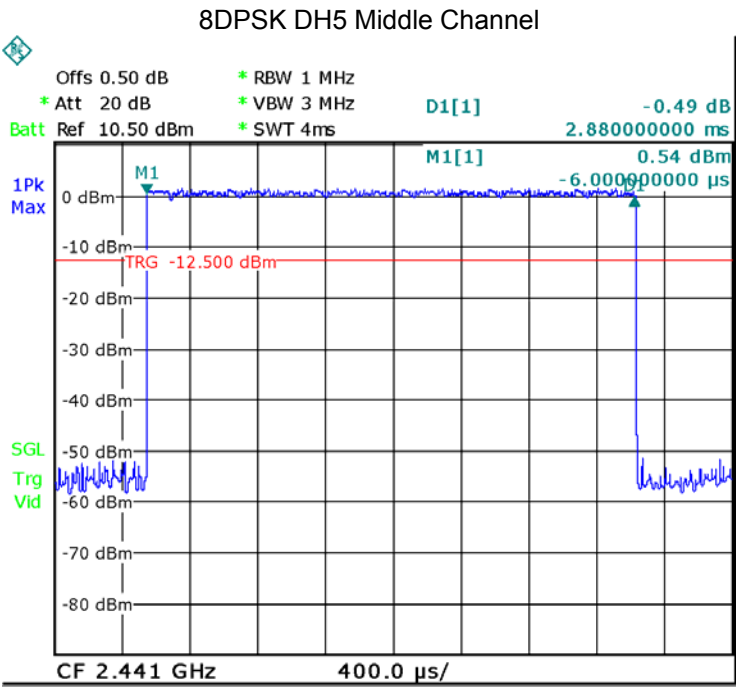

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a integrated antenna, fulfil the requirement of this section.

15 RF Exposure

Remark: refer to SAR test report: STR15038083H.

=====End of Report=====