



# **FCC RADIO TEST REPORT**

## **FCC ID:2AFBDFM-09**

**Product :** FM transmitter

**Trade Name :** N/A

**Model Name :** FM-09

**Serial Model :** FM-07, FM-05, FM-10

**Report No. :** NTEK-2015NT0616153F

### **Prepared for**

Ainovo Industry Limited

3rd Floor, 1st Building, Dongyida industry zone, Lougang Road, Songgang town, Bao'an District, Shenzhen, China

### **Prepared by**

NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: [www.ntek.org.cn](http://www.ntek.org.cn)

**TEST RESULT CERTIFICATION**

**Applicant's name** ..... : Ainovo Industry Limited  
**Address** ..... : 3rd Floor, 1st Building, Dongyida industry zone, Lougang Road, Songgang town, Bao'an District, Shenzhen, China  
**Manufacture's Name** ..... : Ainovo Industry Limited  
**Address** ..... : 3rd Floor, 1st Building, Dongyida industry zone, Lougang Road, Songgang town, Bao'an District, Shenzhen, China

**Product description**

**Product name** ..... : FM transmitter  
**Model and/or type reference** : FM-09  
**Serial Model** : FM-07, FM-05, FM-10  
**Rating(s)** ..... : DC 3.7V

**Standards** ..... : FCC Part15.239 01 Oct. 2014

**Test procedure** ..... ANSI C63.10-2013

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

**Date of Test** .....

**Date (s) of performance of tests** ..... 16 Jun. 2015 ~27 Jul. 2015

**Date of Issue** ..... 27 Jul. 2015

**Test Result** ..... **Pass**

**Testing Engineer** : Jason Chen  
(Jason Chen)

**Technical Manager** : Brown Lu  
(Brown Lu)

**Authorized Signatory** : Sam Chen  
(Sam Chen)

Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>4</b>
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
<b>2 . GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
<b>3 . ANTENNA REQUIREMENT</b>	<b>12</b>
3.1 STANDARD REQUIREMENT	12
3.2 EUT ANTENNA	12
3.3 CONDUCTED EMISSION MEASUREMENT	13
3.3.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.3.2 TEST PROCEDURE	14
3.3.3 DEVIATION FROM TEST STANDARD	14
3.3.4 TEST SETUP	14
3.2.5 TEST RESULT	15
3.4 RADIATED EMISSION MEASUREMENT	19
3.4.1 RADIATED EMISSION LIMITS	19
3.4.2 TEST PROCEDURE	20
3.4.3 DEVIATION FROM TEST STANDARD	20
3.4.4 TEST SETUP	21
3.4.5 TEST RESULTS (BLOW 30MHZ)	23
3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	24
3.4.7 TEST RESULTS (BAND EDGE EMISSION)	30
<b>4 . BANDWIDTH TEST</b>	<b>34</b>
4.1 TEST PROCEDURE	34
4.2 DEVIATION FROM STANDARD	34
4.3 TEST SETUP	34
4.4 TEST RESULTS	35
<b>5 . EUT TEST PHOTO</b>	<b>37</b>
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15, Subpart C (15.239)			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.239	Radiated Spurious Emission	Pass	
15.239	Occupied Bandwidth	Pass	
15.205	Band Edge Emission	Pass	

## 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC FRN Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	FM transmitter	
Trade Name	N/A	
Model Name	FM-09	
Serial Model	FM-07, FM-05, FM-10	
Model Difference	All the model are the same circuit and RF module, except the model name and colour.	
Product Description	The EUT is a FM transmitter	
	Product Type	Low Power Communication Device Transmitter
	Operation Frequency:	88.1-107.9MHz
	Modulation Type:	FM
	Number Of Channel	199CH.
	Antenna Designation:	PCB Antenna
	Antenna Gain(Peak)	1.0 dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	N/A	
Adapter	N/A	
Battery	3.7V,90mAh	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz

For Conducted Emission	
Final Test Mode	Description
Mode 1	98.1MHz


For Radiated Emission	
Final Test Mode	Description
Mode 1	88.1MHz
Mode 2	98.1MHz
Mode 3	107.9MHz

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT use fully charged battery.
- (3) During testing, the EUT was actively playing music set to its maximum audio volume in order to generate the worst case emissions (e.g. to generate the maximum bandwidth during bandwidth test). No test tones were used for testing. The tuning range of the EUT was manually verified and the conclusion is that it only works at selected channels within 88.1-107.9MHz, not below and not above this range.

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

### Conducted Emission Test

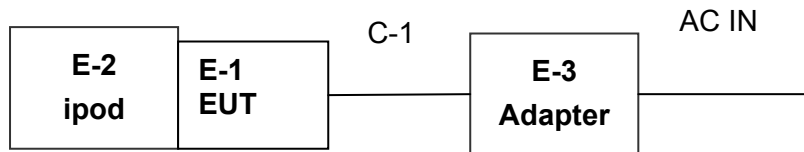

### Radiated Spurious Emission Test





## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	FM transmitter	N/A	FM-09	N/A	EUT
E-2	iPod	Apple	Touch 5	N/A	
E-3	Adapter	N/A	AD1	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2016
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2016
3	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06. 2016
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2016
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2016
6	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06. 2016
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2016
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2016
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2016
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2016

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	160400005	Jul. 06. 2015
2	Test Receiver	R&S	ESPI	101318	Jul. 06. 2015
3	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06. 2015
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	Jul. 06. 2015
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	Jul. 06. 2015
6	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06. 2015
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	Jul. 06. 2015
8	Amplifier	EM	EM-30180	060538	Jul. 06. 2015
9	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06. 2015
10	Power Meter	R&S	NRVS	100696	Jul. 06. 2015

**Conduction Test equipment**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2016
2	LISN	R&S	ENV216	101313	Jul. 06. 2016
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2016
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2016
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2016
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2016

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test Receiver	R&S	ESCI	101160	Jul. 06. 2015
2	LISN	R&S	ENV216	101313	Jul. 06. 2015
3	LISN	EMCO	3816/2	00042990	Jul. 06. 2015
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	Jul. 06. 2015
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	Jul. 06. 2015
6	Absorbing clamp	R&S	MOS-21	100423	Jul. 06. 2015

### **3. ANTENNA REQUIREMENT**

#### **3.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### **3.2 EUT ANTENNA**

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

### 3.3 CONDUCTED EMISSION MEASUREMENT

#### 3.3.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5			66 - 56 *	56 - 46 *	CISPR
0.50 -5.0			56.00	46.00	CISPR
5.0 -30.0			60.00	50.00	CISPR

0.15 -0.5			66 - 56 *	56 - 46 *	LP002.
0.50 -5.0			56.00	46.00	LP002.
5.0 -30.0			60.00	50.00	LP002.

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 3.3.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

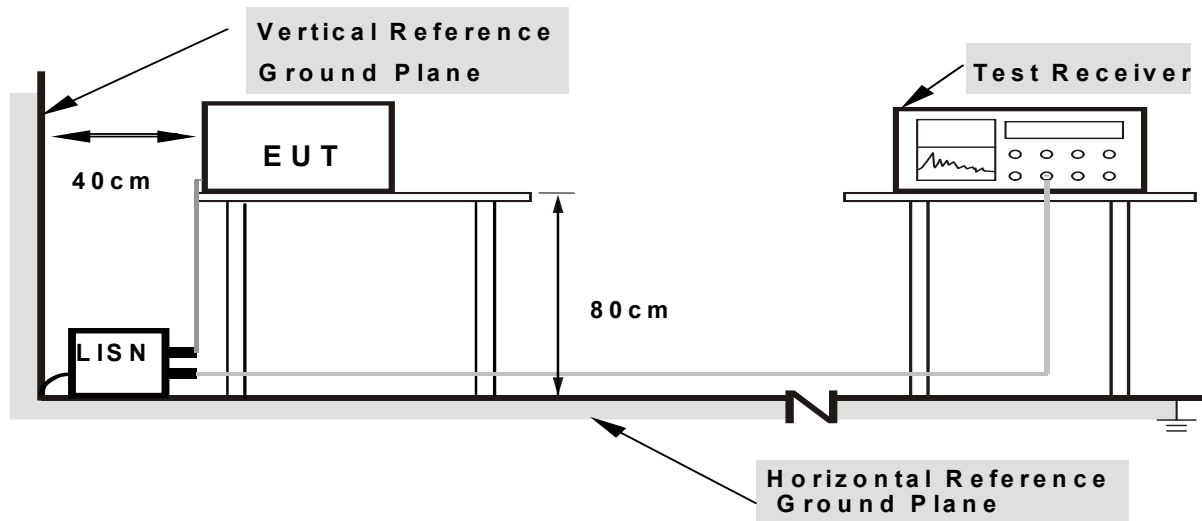

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


### 3.2.5 TEST RESULT

EUT :	FM transmitter	Model Name. :	FM-09
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L1
Test Voltage :	USB 5V for Adapter 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2500	33.02	9.67	42.69	61.75	-19.06	peak
0.2500	22.42	9.67	32.09	51.75	-19.66	AVG
0.5580	37.56	9.78	47.34	56.00	-8.66	peak
0.7260	35.76	9.77	45.53	56.00	-10.47	peak
0.7260	20.42	9.77	30.19	46.00	-15.81	AVG
2.0460	31.68	9.65	41.33	56.00	-14.67	peak
4.1579	31.20	9.70	40.90	56.00	-15.10	peak
4.1898	21.20	9.70	30.90	46.00	-15.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

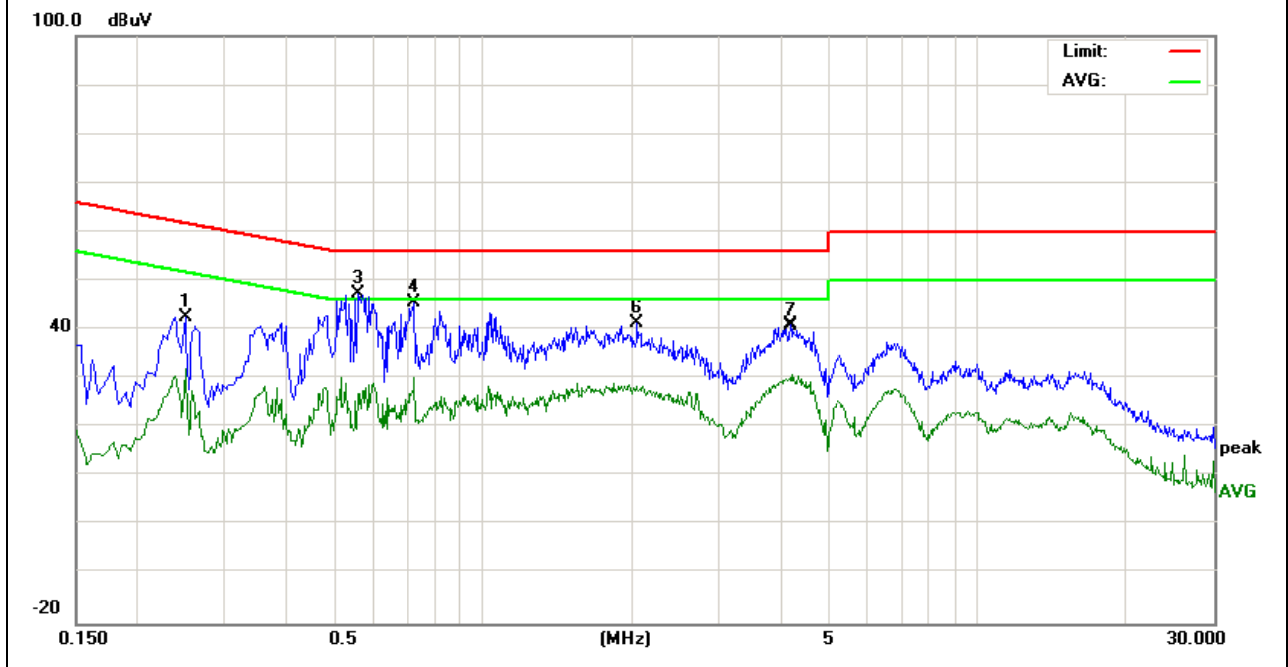


EUT :	FM transmitter	Model Name. :	FM-09
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	USB 5V for Adapter 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2340	33.90	9.61	43.51	62.30	-18.79	peak
0.7380	35.90	9.63	45.53	56.00	-10.47	peak
3.9300	28.68	9.51	38.19	56.00	-17.81	peak
0.4660	34.97	9.66	44.63	56.58	-11.95	peak
0.2580	25.55	9.62	35.17	51.49	-16.32	AVG
0.3899	25.24	9.64	34.88	48.06	-13.18	AVG
0.7380	27.58	9.63	37.21	46.00	-8.79	AVG
4.1179	19.79	9.51	29.30	46.00	-16.70	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

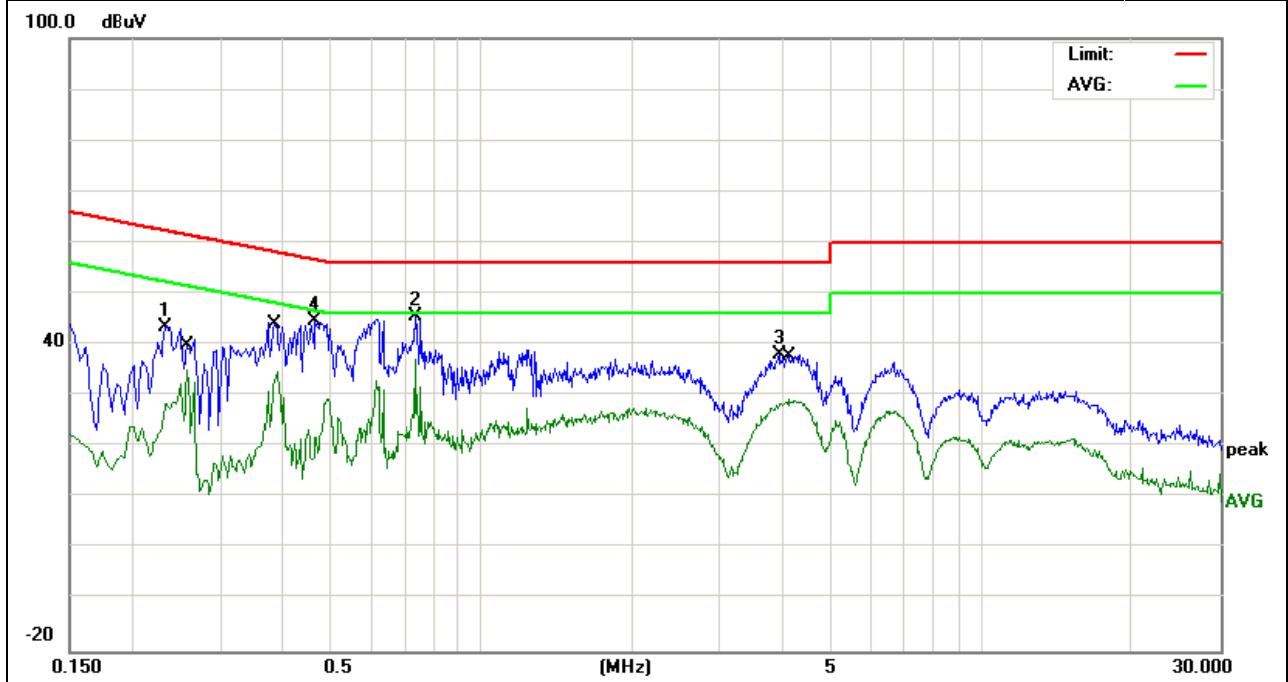




EUT :	FM transmitter	Model Name. :	FM-09
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L1
Test Voltage :	USB 5V for Adapter 230V/50Hz	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2500	30.15	9.67	39.82	61.75	-21.93	peak
0.4940	34.48	9.75	44.23	56.10	-11.87	peak
0.4940	26.58	9.75	36.33	46.10	-9.77	AVG
1.1740	31.16	9.72	40.88	56.00	-15.12	peak
1.2540	22.02	9.71	31.73	46.00	-14.27	AVG
3.2140	18.46	9.67	28.13	46.00	-17.87	AVG
3.7260	25.99	9.69	35.68	56.00	-20.32	peak

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

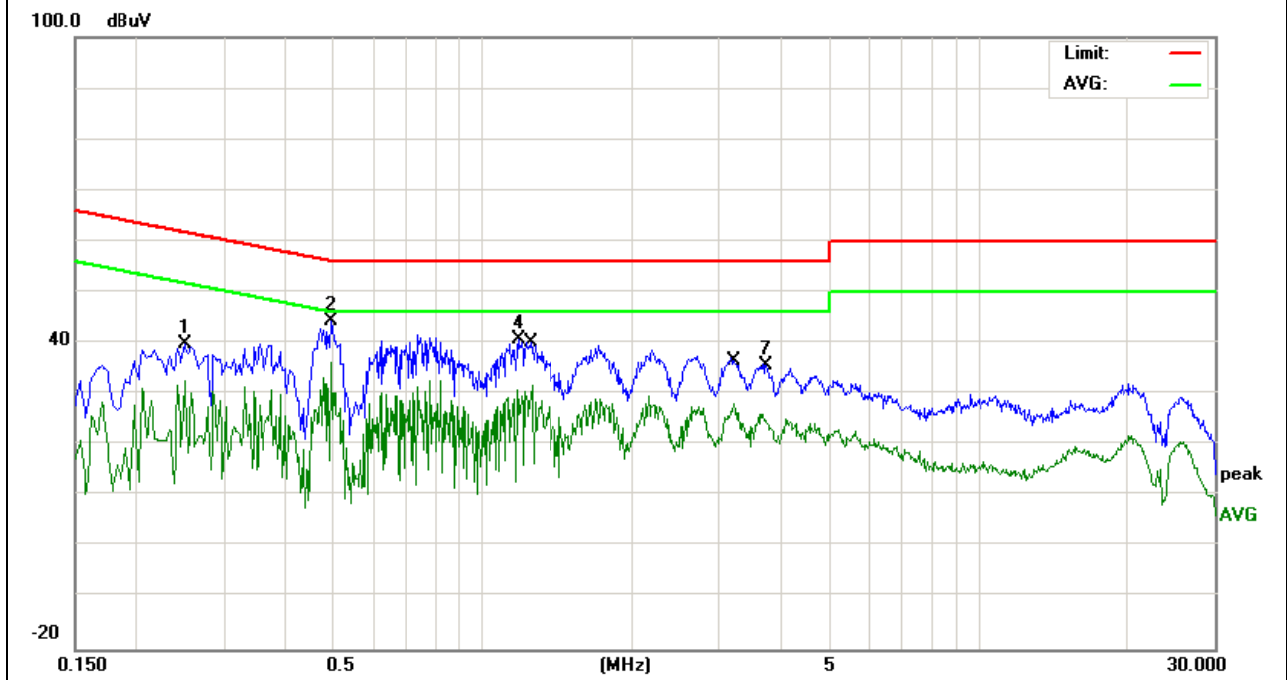


EUT :	FM transmitter	Model Name. :	FM-09
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	USB 5V for Adapter 230V/50Hz	Test Mode :	Mode 1

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2060	26.66	9.61	36.27	63.36	-27.09	peak
0.2060	17.72	9.61	27.33	53.36	-26.03	AVG
0.4940	29.23	9.68	38.91	56.10	-17.19	peak
0.4940	18.85	9.68	28.53	46.10	-17.57	AVG
1.2020	17.05	9.60	26.65	46.00	-19.35	AVG
1.2460	30.21	9.59	39.80	56.00	-16.20	peak
24.7340	29.62	9.95	39.57	60.00	-20.43	peak

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

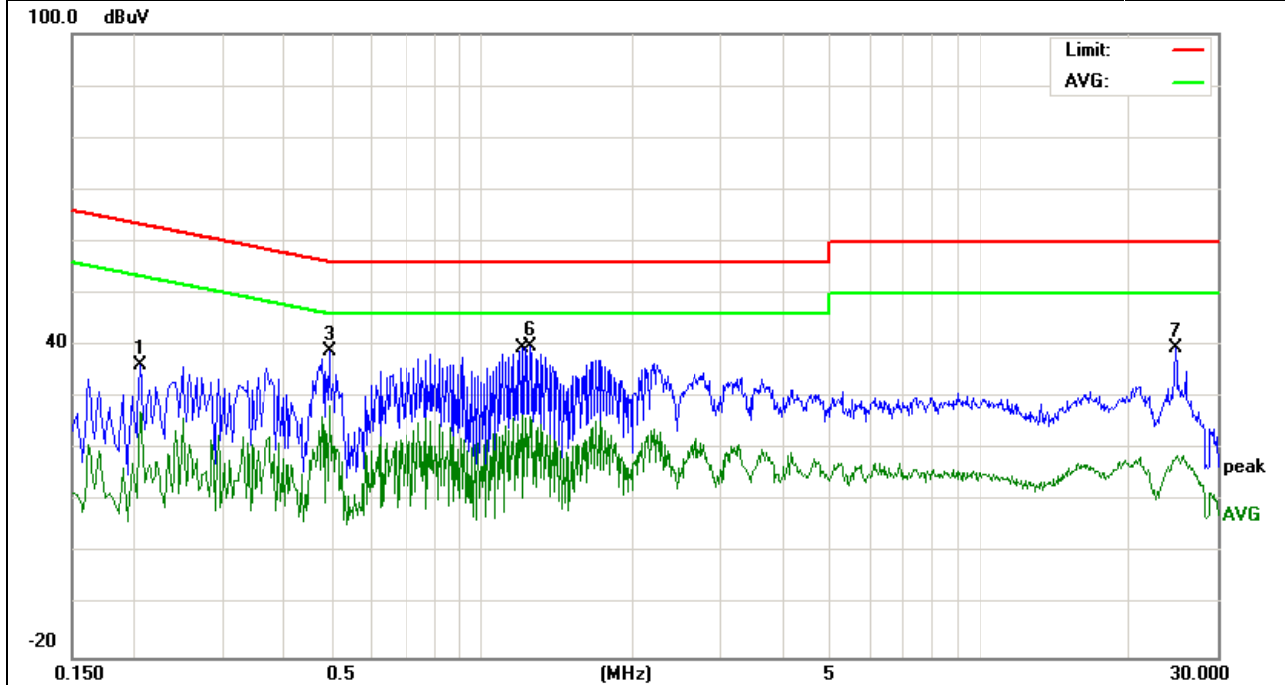

### 3.4 RADIATED EMISSION MEASUREMENT

#### 3.4.1 Radiated Emission Limits ( FCC 15.209 )

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RADIATED EMISSION MEASUREMENT ( FCC 15.239)

Frequency of Emission (MHz)	Field Strength of fundamental (dBμV/m)	
88-108	Peak	Average
	68	48

Notes:

- (1) Fcc part15.239 (b) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.4.2 TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

**3.4.3 DEVIATION FROM TEST STANDARD**


No deviation

### 3.4.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

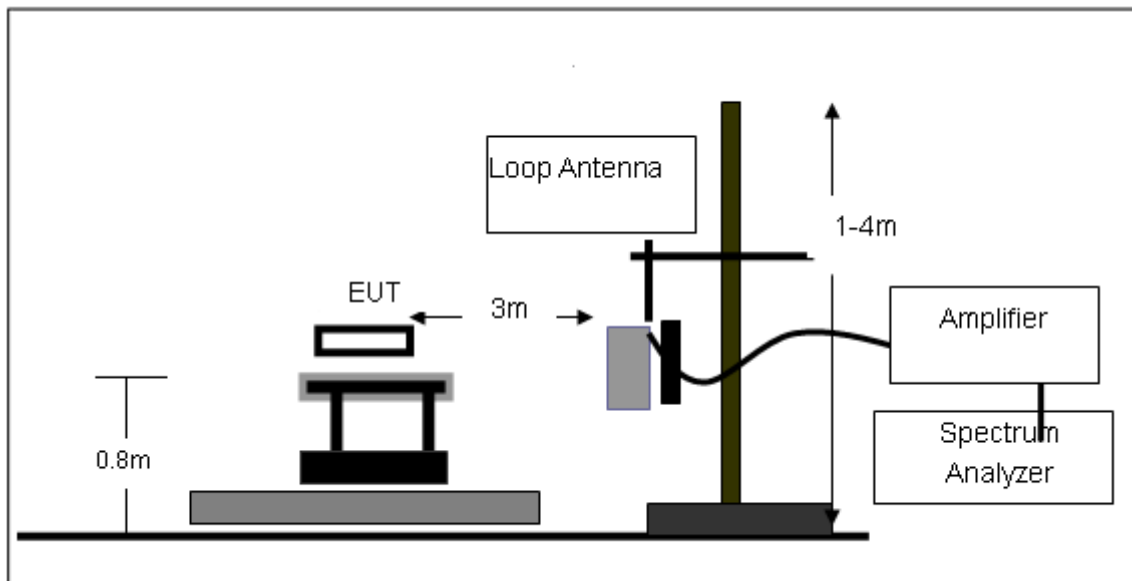

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

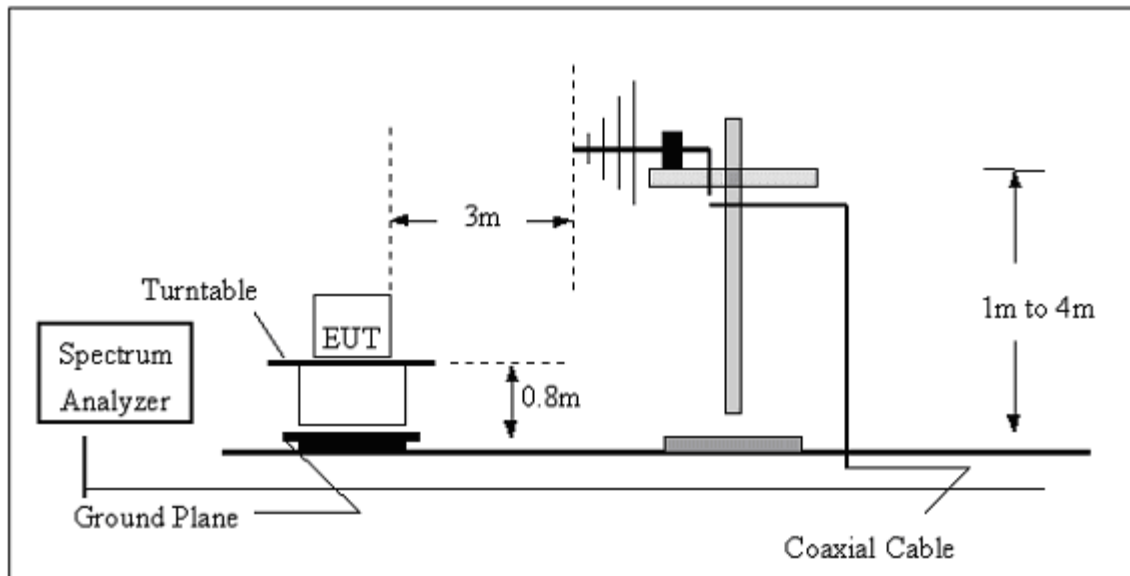

## (C) Radiated Emission Test-Up Frequency Above 1GHz

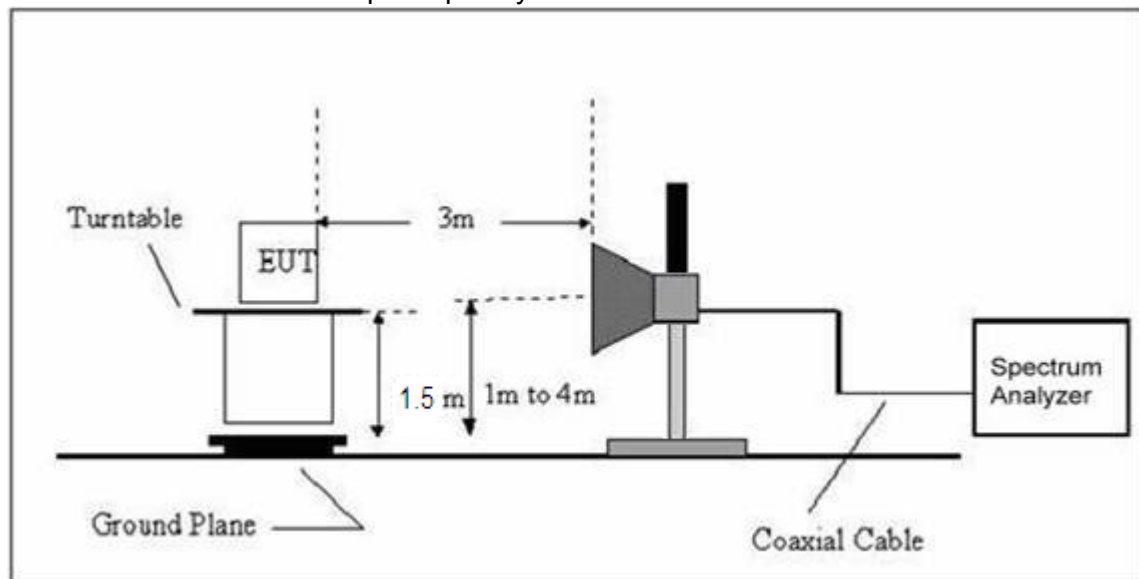

**3.4.5 TEST RESULTS (BLOW 30MHz)**

EUT :	FM transmitter	Model Name. :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $20 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.


### 3.4.6 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	88.1MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
35.6699	13.93	15.36	29.29	40	-10.71	QP
69.45	25.28	5.93	31.21	40	-8.79	QP
88.1	43.06	9.09	52.15	68	-15.85	peak
88.1	37.23	9.09	46.32	48	-1.68	AVG
176.2	26.56	9.69	36.25	43.5	-7.25	QP
264.3	23.34	13.94	37.28	46	-8.72	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

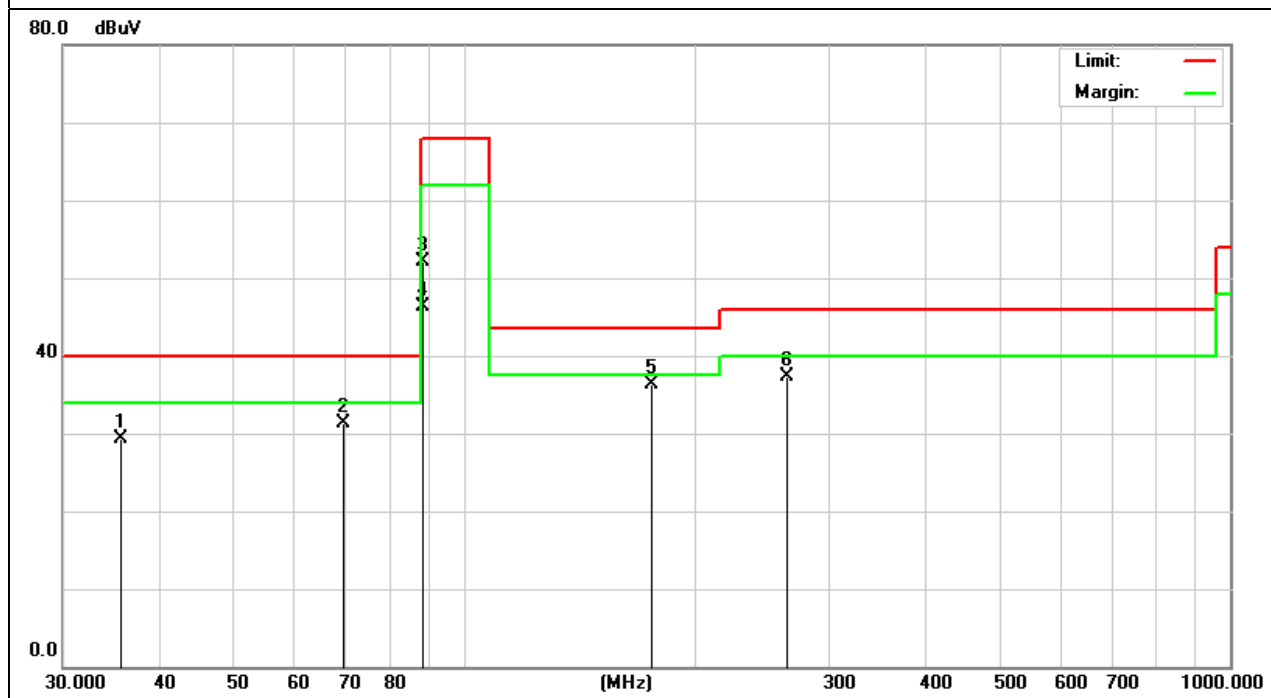




EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	88.1MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
50.12	17.07	8.12	25.19	40	-14.81	QP
70.45	29.02	6.09	35.11	40	-4.89	QP
88.1	40.1	9.09	49.19	68	-18.81	peak
88.1	35.24	9.09	44.33	48	-3.67	AVG
176.2	20.56	9.69	30.25	43.5	-13.25	QP
264.3	21.84	13.94	35.78	46	-10.22	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

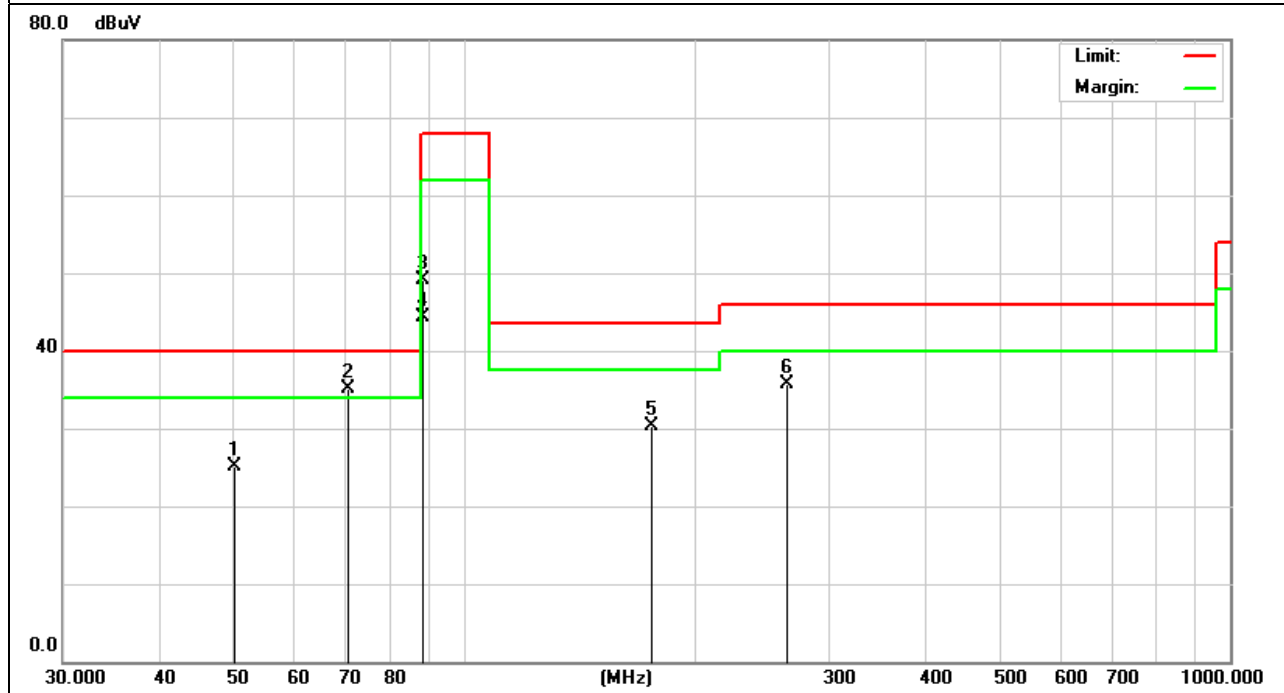


EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	98.1MHz	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
35.6699	13.93	15.36	29.29	40	-10.71	QP
69.45	25.28	5.93	31.21	40	-8.79	QP
98.1	40.89	10.3	51.19	68	-16.81	peak
98.1	35.59	10.3	45.89	48	-2.11	AVG
196.2	32.19	8.68	40.87	43.5	-2.63	QP
294.3	19.88	14.3	34.18	46	-11.82	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

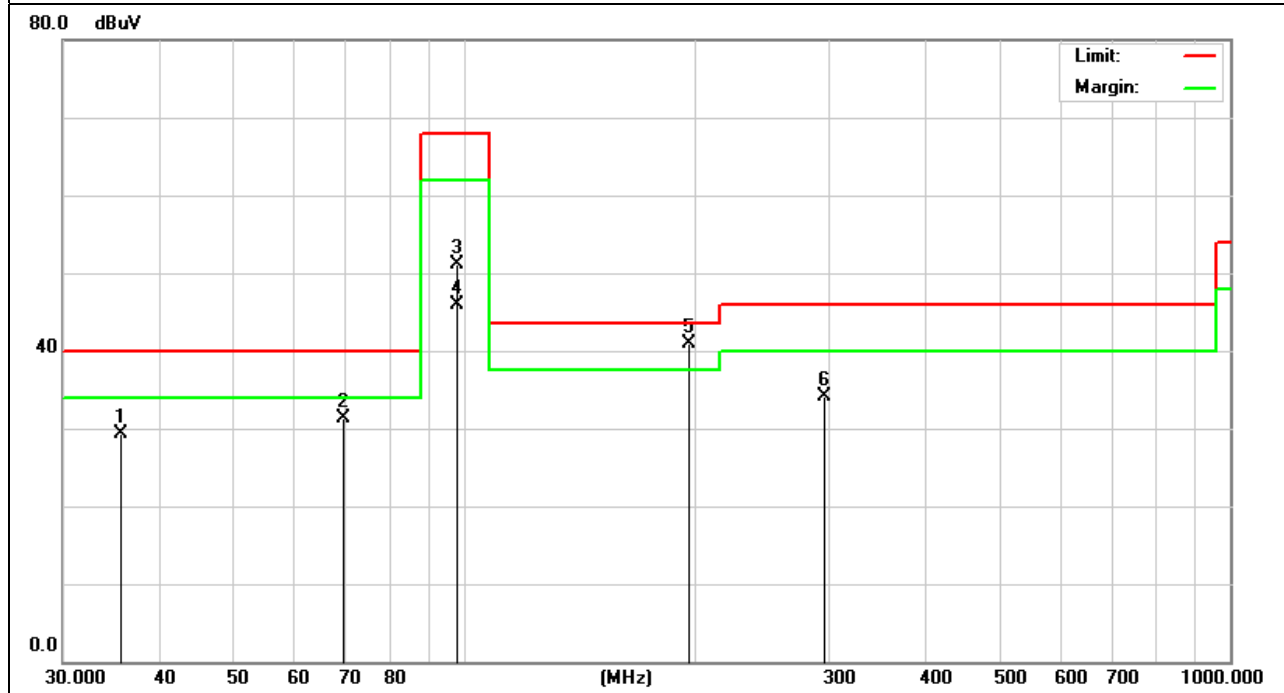


EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	98.1MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
50.12	17.07	8.12	25.19	40	-14.81	QP
70.45	29.02	6.09	35.11	40	-4.89	QP
98.1	42.48	10.3	52.78	68	-15.22	peak
98.1	34.43	10.3	44.73	48	-3.27	AVG
196.2	22.8	8.68	31.48	43.5	-12.02	QP
294.3	22.59	14.3	36.89	46	-9.11	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

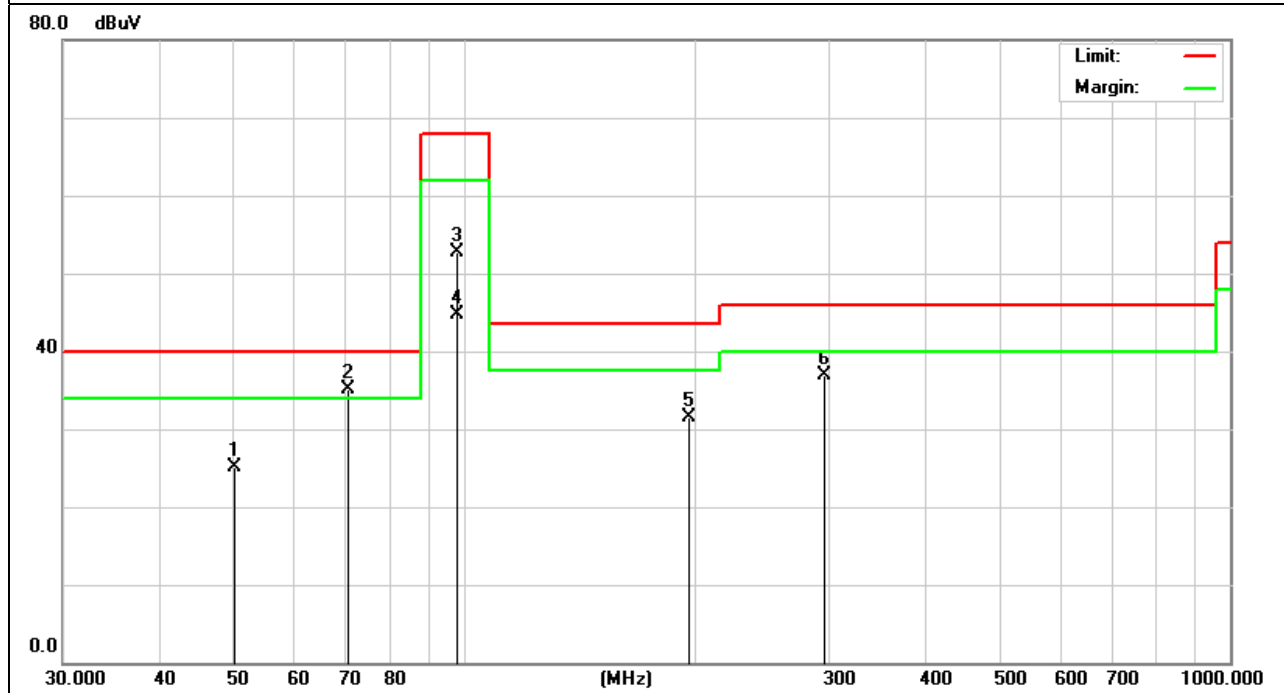


EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	107.9MHz	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
35.6699	13.93	15.36	29.29	40	-10.71	QP
69.45	25.28	5.93	31.21	40	-8.79	QP
107.9	41.67	11.21	52.88	68	-15.12	peak
107.9	35.06	11.21	46.27	48	-1.73	AVG
215.8	26.79	9.5	36.29	43.5	-7.21	QP
323.7	18.75	14.81	33.56	46	-12.44	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

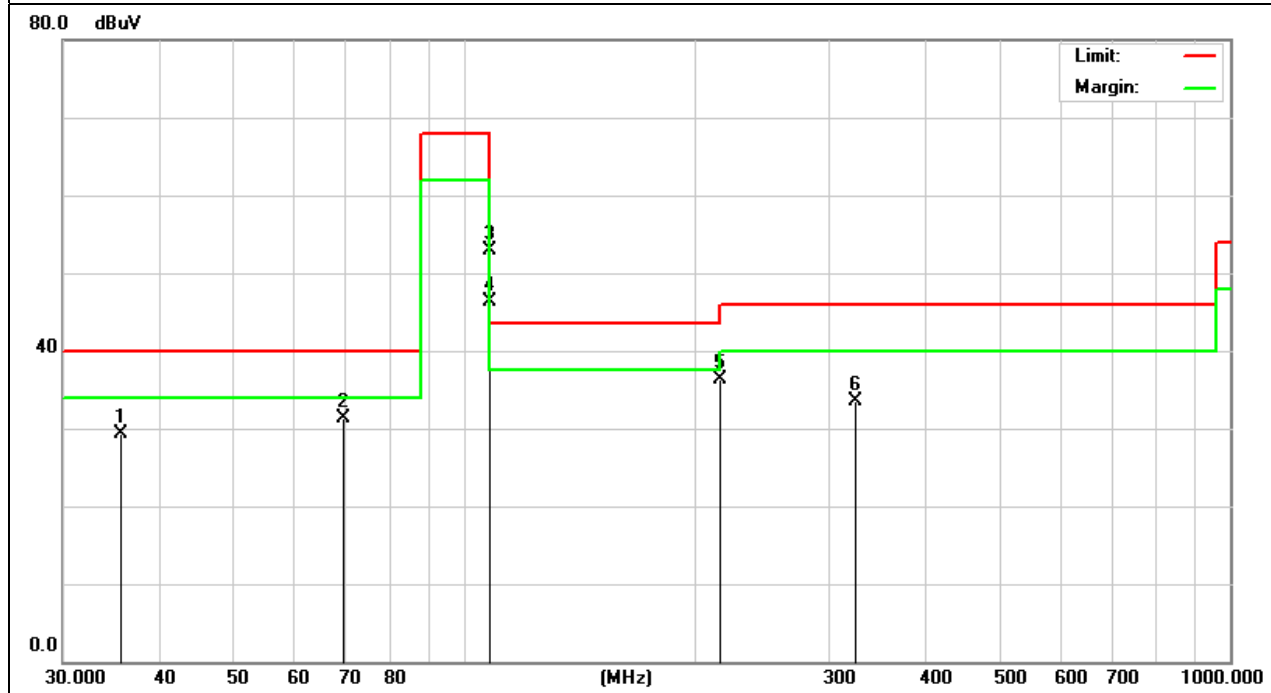


EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	107.9MHz	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
50.12	17.07	8.12	25.19	40	-14.81	QP
70.45	29.02	6.09	35.11	40	-4.89	QP
107.9	43.08	11.21	54.29	68	-13.71	peak
107.9	34.77	11.21	45.98	48	-2.02	AVG
215.8	20.75	9.5	30.25	43.5	-13.25	QP
323.7	21.1	14.81	35.91	46	-10.09	QP

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

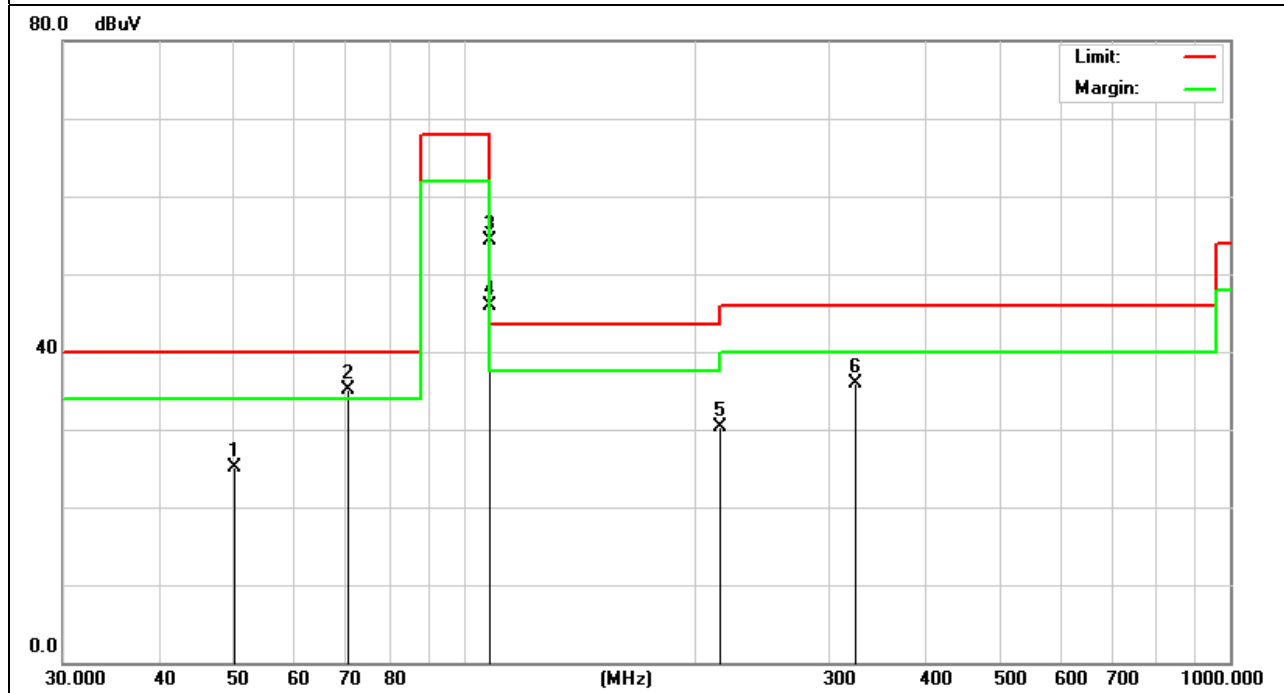


### 3.4.7 TEST RESULTS (BAND EDGE EMISSION)

EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	88.1MHz	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Remark
88.0000	30.90	7.50	38.40	40.00	-1.60	QP
88.2000	32.56	7.54	40.10	68.00	-27.90	PK

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

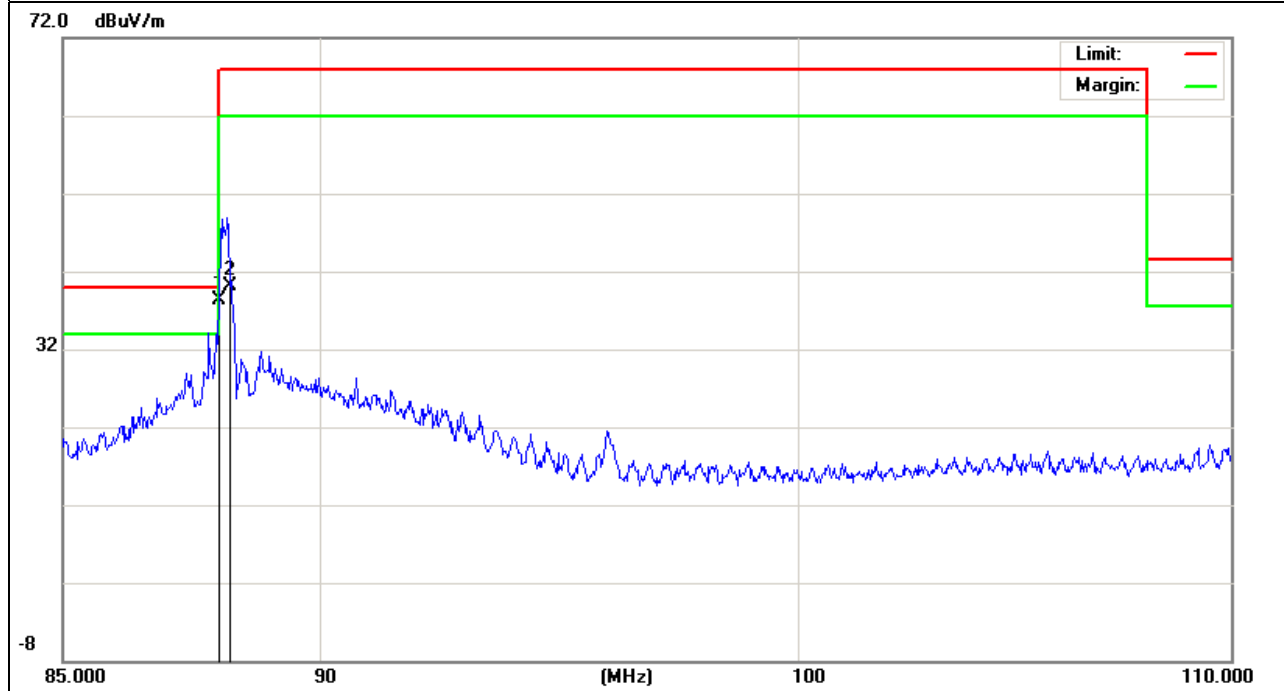


EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	88.1MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
88.0000	30.00	7.50	37.50	40.00	-2.50	QP
88.2000	31.36	7.54	38.90	68.00	-29.10	PK

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

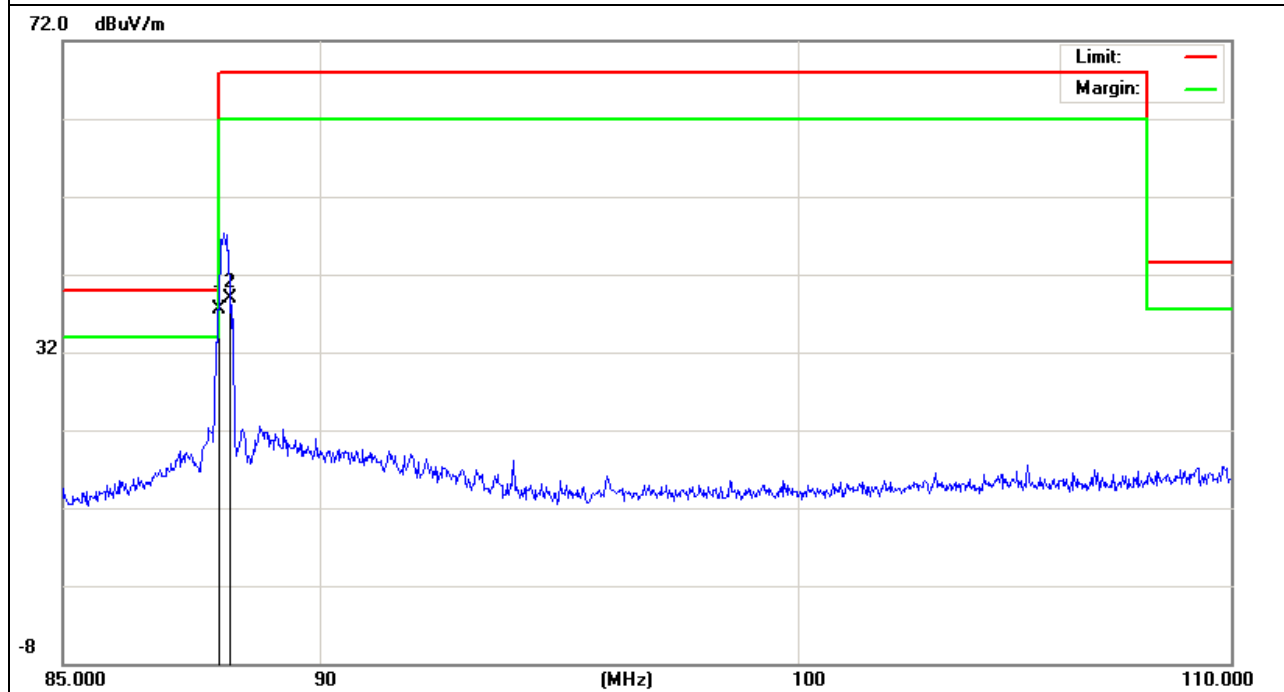


EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	107.9MHz	Polarization :	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
107.8000	33.22	9.74	42.96	68.00	-25.04	PK
108.0000	31.94	9.75	41.69	43.50	-1.81	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

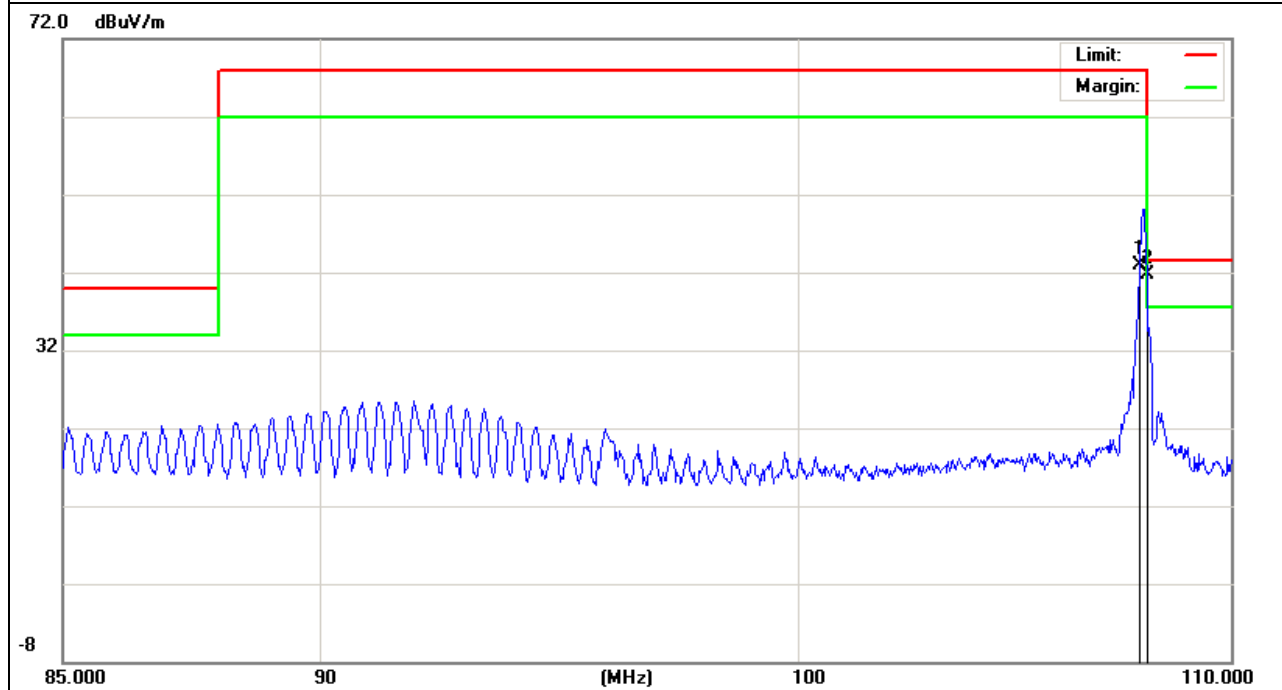




EUT :	FM transmitter	Model Name :	FM-09
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	107.9MHz	Polarization :	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
107.8000	33.38	9.74	43.12	68.00	-24.88	PK
108.0000	32.47	9.75	42.22	43.50	-1.28	QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

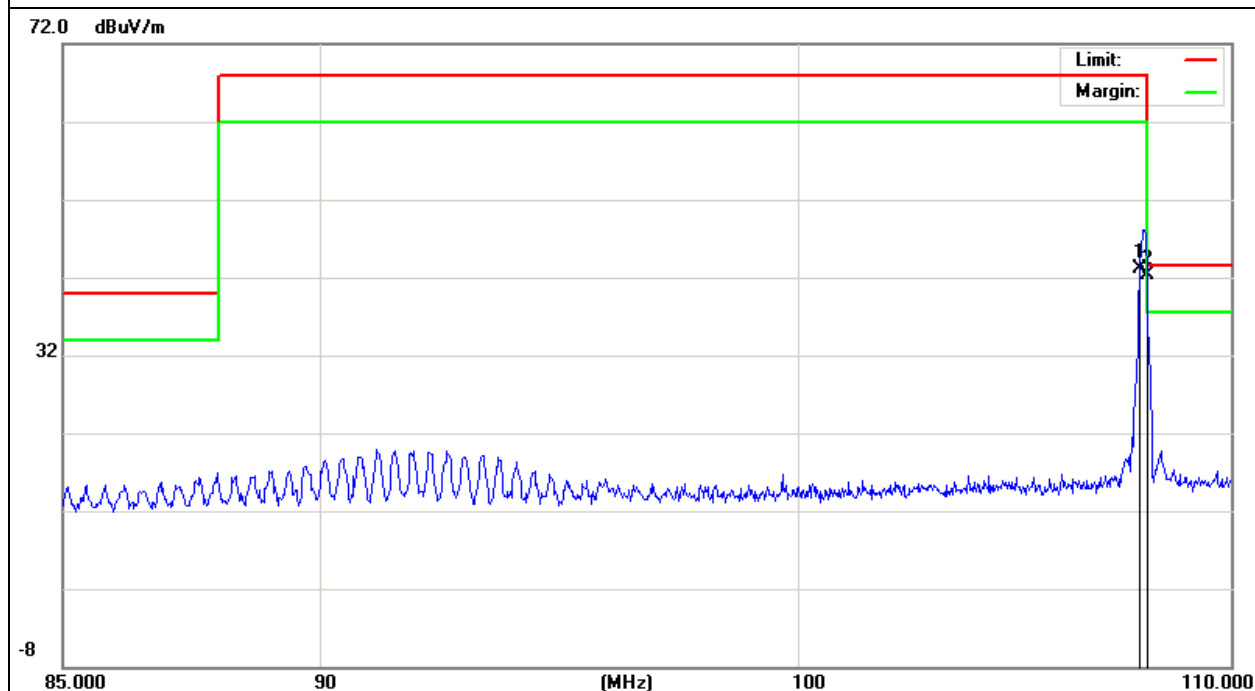

#### 4. BANDWIDTH TEST


##### 4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 10KHz, VBW $\geq$ RBW, Sweep time = Auto.

##### 4.2 DEVIATION FROM STANDARD

No deviation.

##### 4.3 TEST SETUP

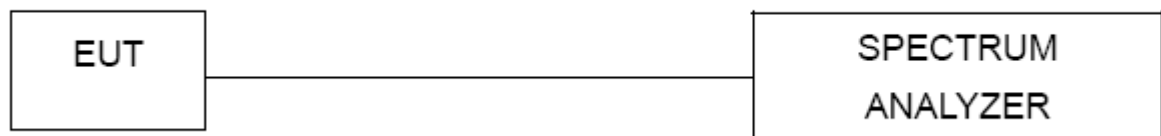


#### 4.4 TEST RESULTS


EUT :	FM transmitter	Model Name :	FM-09
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 3.7V
Test Mode :	TX		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (KHz)	Limit (KHz)
Low	88.1	94.206	200
Mid	98.1	91.494	200
High	107.9	101.865	200


#### The Lowest Channel:88.1MHz

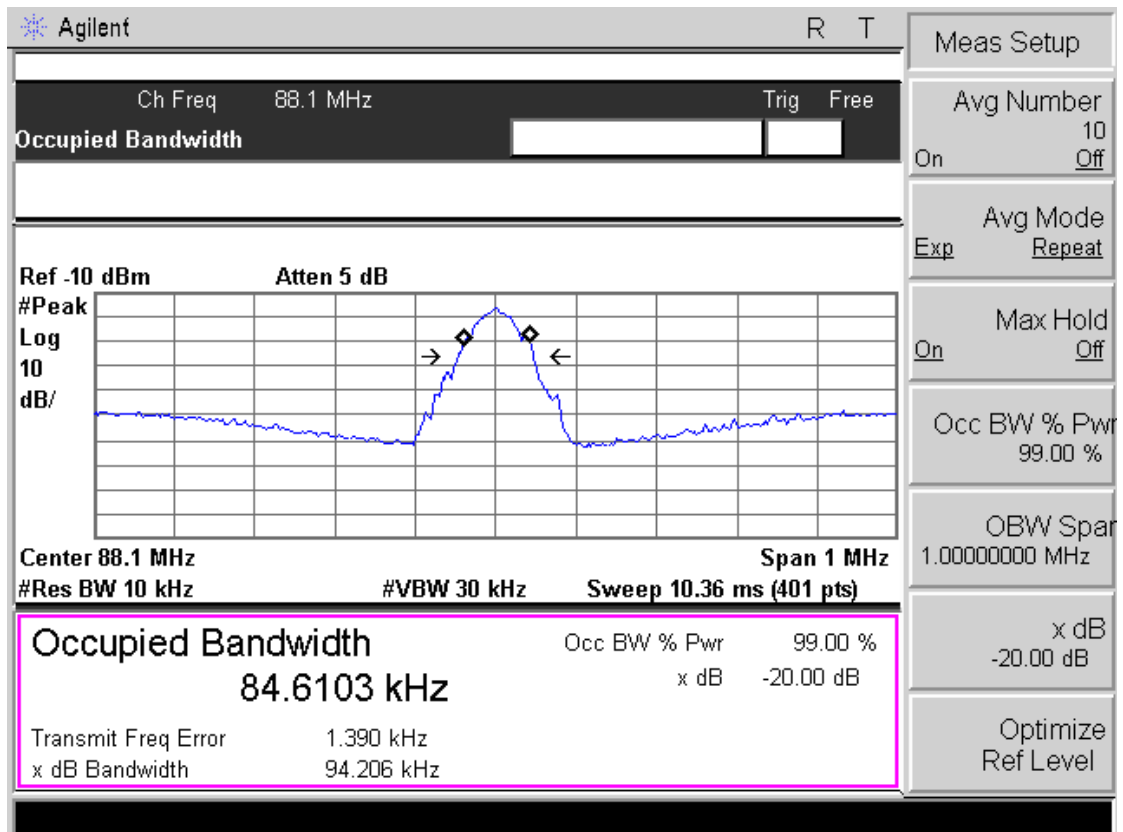

### The Middle Channel: 98.1MHz

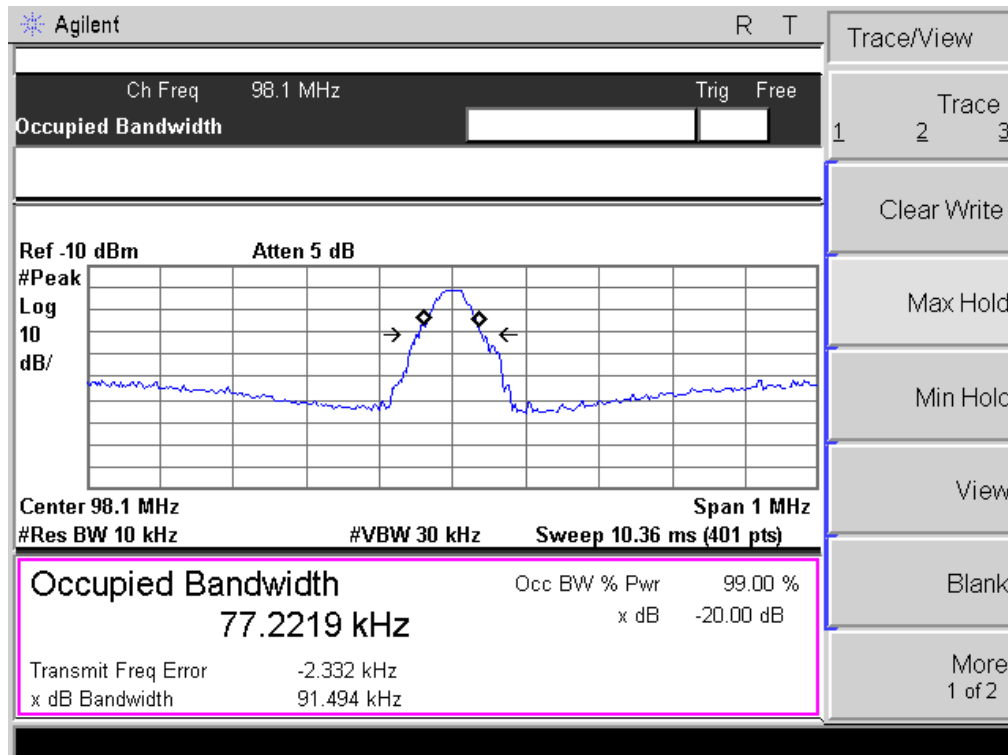


### The High Channel: 107.9MHz

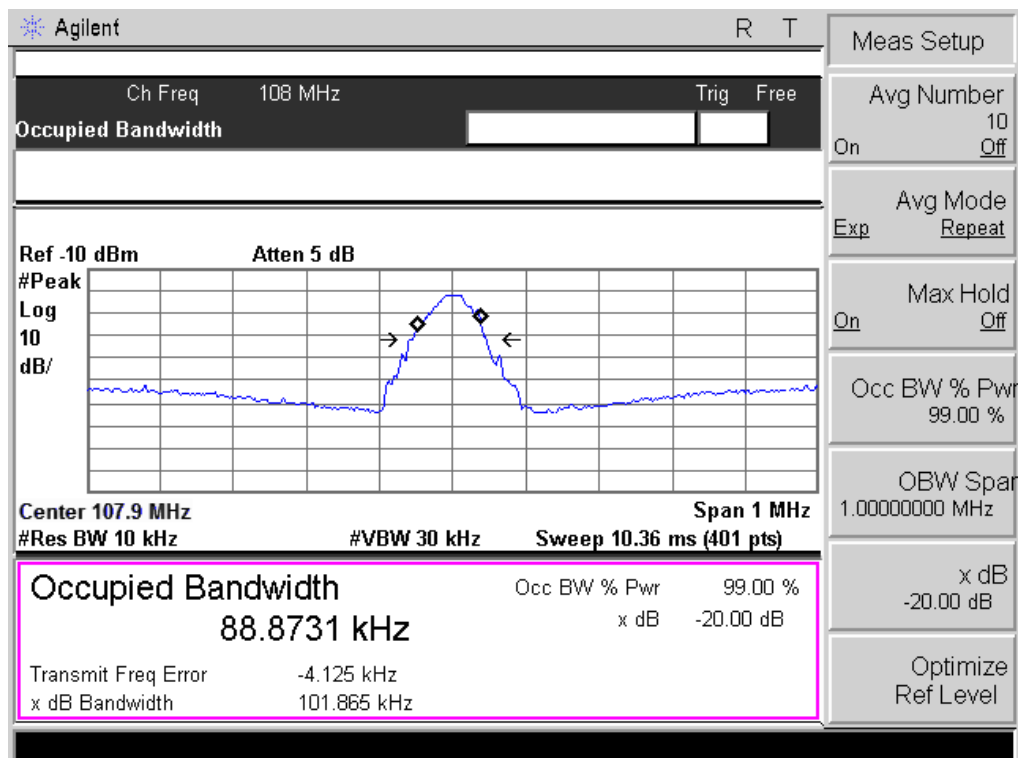

## 5. EUT TEST PHOTO

**Radiated Measurement Photos**

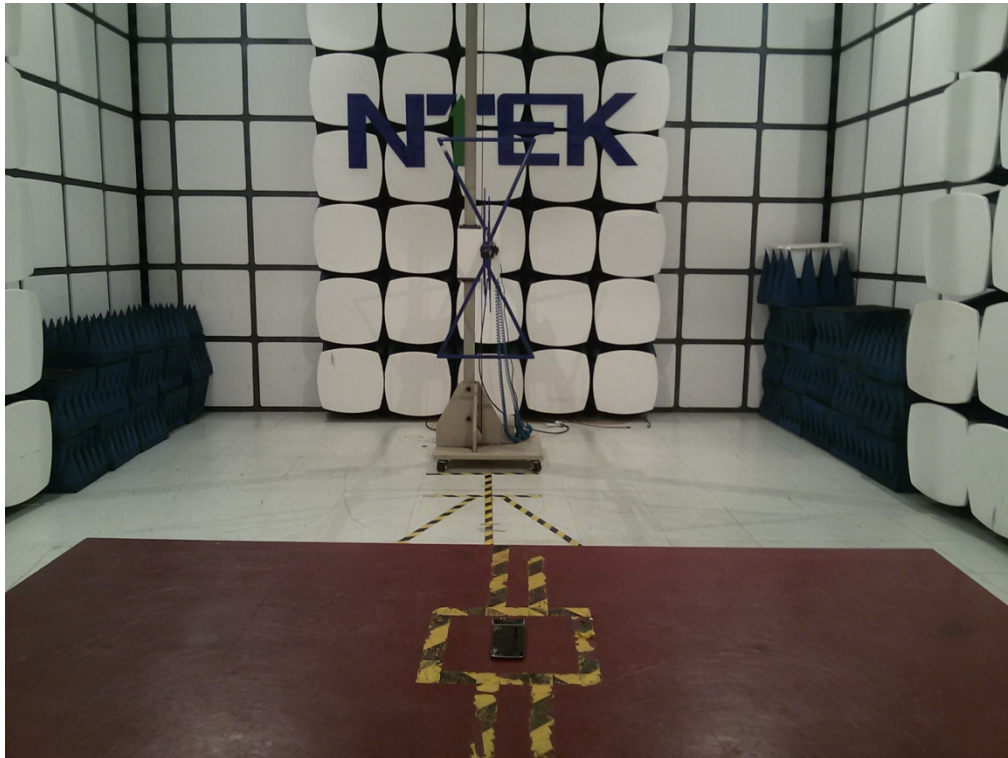

**Conducted Measurement Photos**

