

RF TEST REPORT



Report No.: 15070562-FCC-R

Supersede Report No.: N/A

Applicant	Shenzhen RoyStyle Technology Co., Ltd.	
Product Name	Bluetooth headset	
Model No.	BT-002	
Serial No.	BTH03, BH02, BH03, UB-BTH03-101	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	July 15 to 30, 2015	
Issue Date	July 31, 2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		
<i>Winnie Zhang</i>	<i>David Huang</i>	
Winnie Zhang Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15070562-FCC-R
Page	3 of 46

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 ANTENNA REQUIREMENT	8
6.2 CHANNEL SEPARATION	9
6.3 20DB BANDWIDTH	12
6.4 PEAK OUTPUT POWER	15
6.5 NUMBER OF HOPPING CHANNEL	18
6.6 TIME OF OCCUPANCY (DWEIL TIME)	20
6.7 BAND EDGE	23
6.8 AC POWER LINE CONDUCTED EMISSIONS	29
6.9 RADIATED SPURIOUS EMISSIONS	31
ANNEX A. TEST INSTRUMENT	36
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	37
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	42
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	45
ANNEX E. DECLARATION OF SIMILARITY	46

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070562-FCC-R	NONE	Original	July 31, 2015

2. Customer information

Applicant Name	Shenzhen RoyStyle Technology Co., Ltd.
Applicant Add	Room 2889, Electronic Technology Building C Block, Huaqiang North, Futian District, Shenzhen
Manufacturer	Shenzhen RoyStyle Technology Co., Ltd.
Manufacturer Add	Room 2889, Electronic Technology Building C Block, Huaqiang North, Futian District, Shenzhen

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Bluetooth headset
Main Model:	BT-002
Serial Model:	BTH03, BH02, BH03, UB-BTH03-101
Date EUT received:	July 14, 2015
Test Date(s):	July 15 to 30, 2015
Equipment Category :	DSS
Antenna Gain:	Bluetooth: 0.68dBi
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK
RF Operating Frequency (ies):	Bluetooth: 2402-2480 MHz
Max. Output Power:	3.361dBm
Number of Channels:	Bluetooth: 79CH
Port:	USB Port, Earphone Port
Input Power:	Battery: Spec: 3.7V 300mAh
Trade Name :	N/A
FCC ID:	2AFDUBT-002

Note: The EUT is charged, the BT can not run.

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	N/A
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antennas:

A permanently attached PCB antenna for Bluetooth, the gain is 0.68dBi for Bluetooth


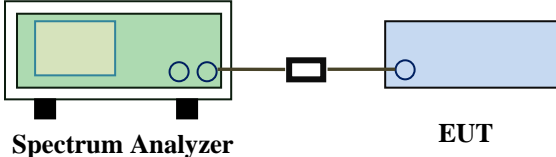
The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	July 29, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.695	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.696	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.699	Pass
	Adjacency Channel	2479			
CH Separation π / 4 DQPSK	Low Channel	2402	1.002	0.915	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.915	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.913	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result



GFSK - Low Channel



GFSK - Middle Channel



GFSK - High Channel



$\pi/4$ DPSK - Low Channel



$\pi/4$ DQPSK - Middle Channel




$\pi/4$ DQPSK - High Channel

6.3 20dB Bandwidth

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	July 29, 2015
Tested By :	Winnie Zhang

Requirement(s):

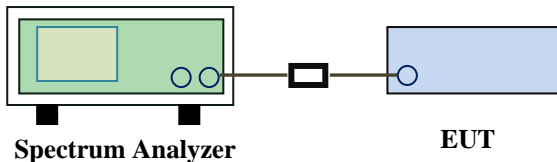Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference 		

Test Report	15070562-FCC-R
Page	13 of 46

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.042	0.932
	Mid	2441	1.044	0.933
	High	2480	1.048	0.931
$\pi/4$ DQPSK	Low	2402	1.373	1.208
	Mid	2441	1.372	1.206
	High	2480	1.370	1.207

Test Plots

20dB Bandwidth measurement result

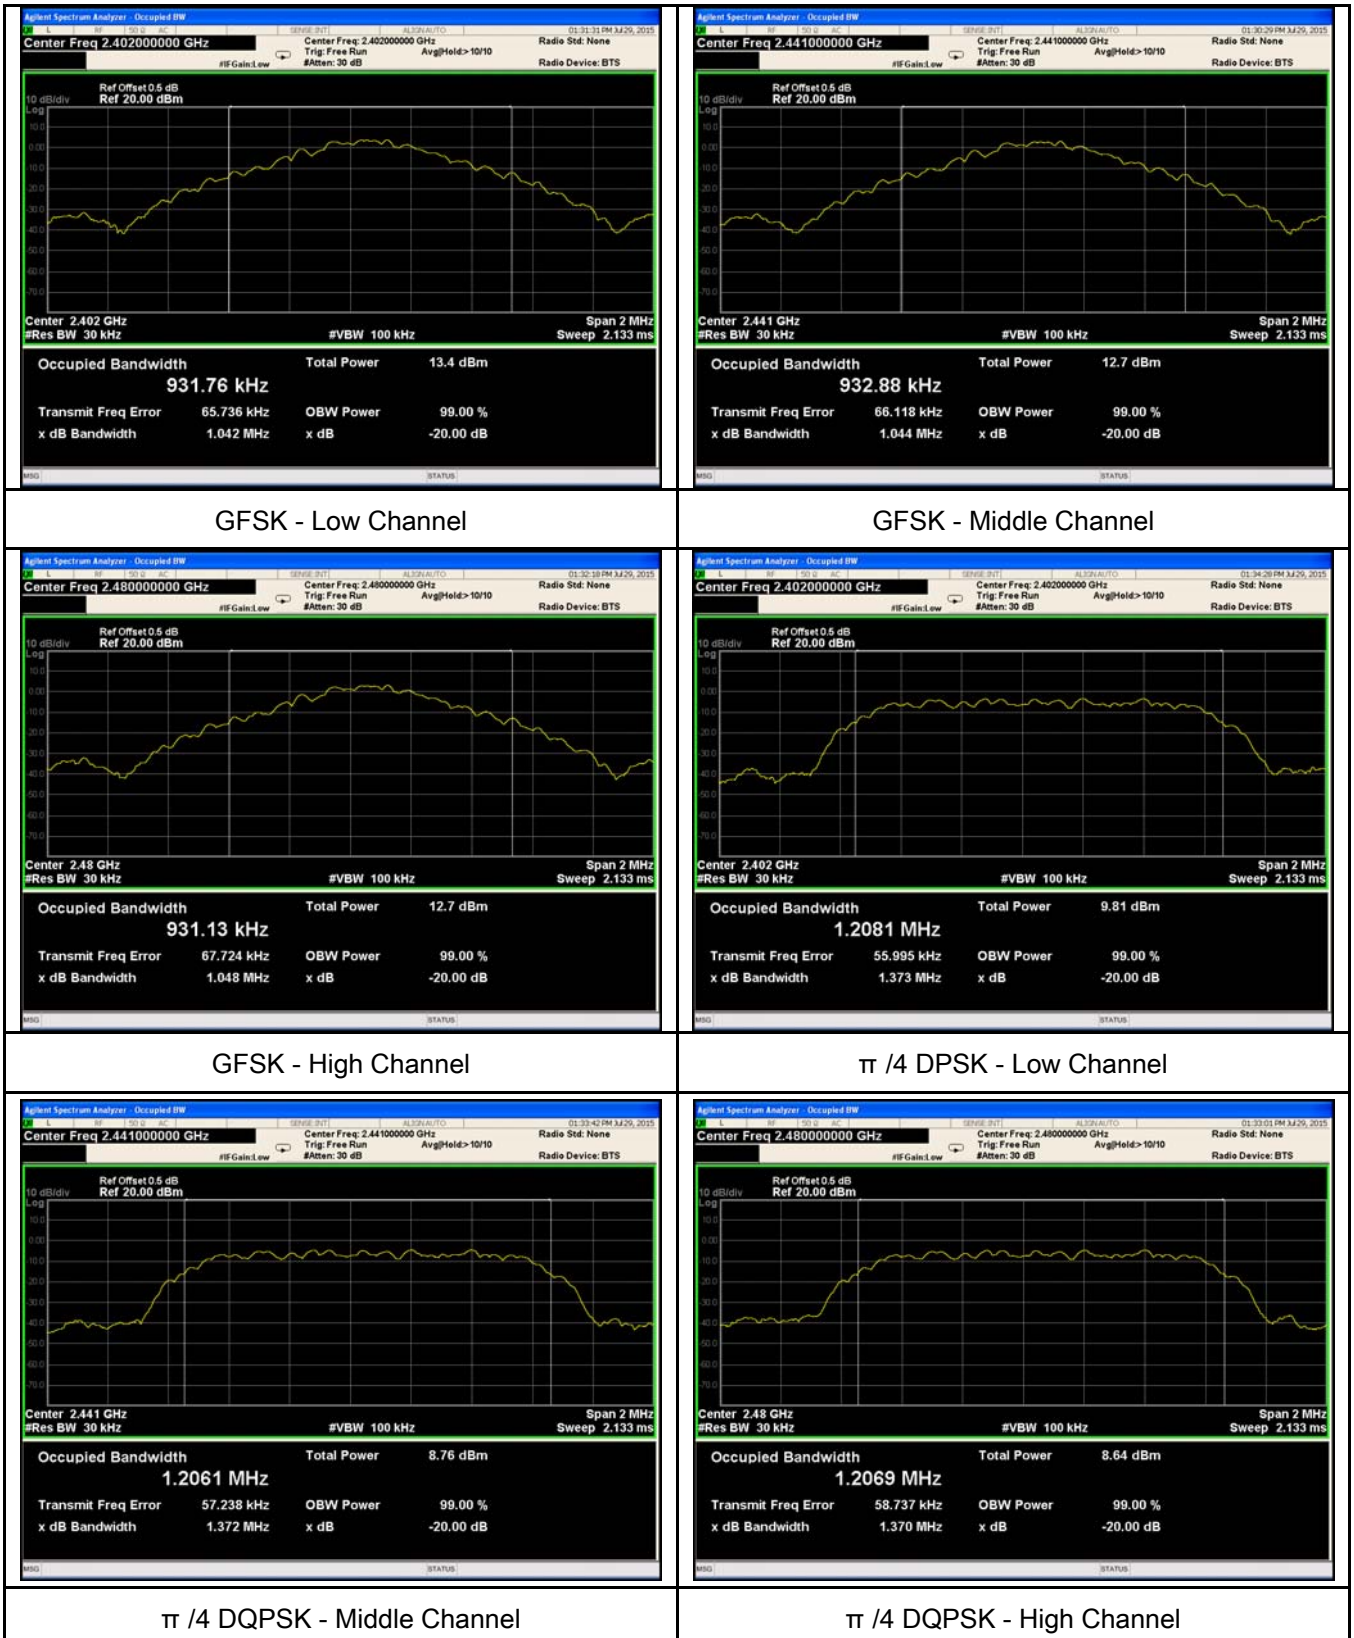


6.4 Peak Output Power

Temperature	22°C
Relative Humidity	53%
Atmospheric Pressure	1029mbar
Test date :	July 29, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW $>$ the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold
----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Report	15070562-FCC-R
Page	16 of 46

	<ul style="list-style-type: none"> - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	3.361	125	Pass
		Mid	2441	2.110	125	Pass
		High	2480	2.832	125	Pass
	π /4 DQPSK	Low	2402	2.297	125	Pass
		Mid	2441	0.866	125	Pass
		High	2480	1.461	125	Pass

Test Plots


Output Power measurement result



GFSK Output power - Low CH 2402




GFSK Output power - Mid CH 2441

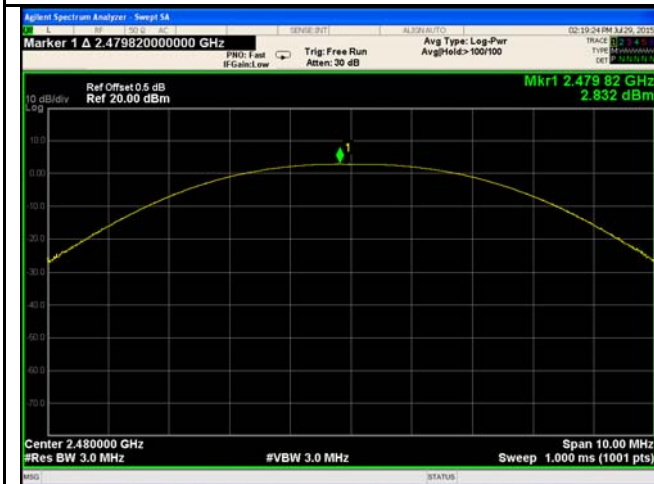


GFSK Output power - High CH 2480



$\pi/4$ DQPSK Output power - Low CH 2402

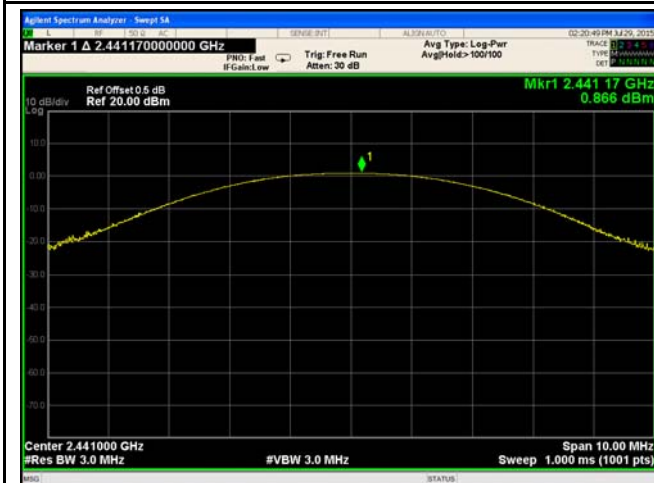

$\pi/4$ DQPSK Output power - Mid CH 2441

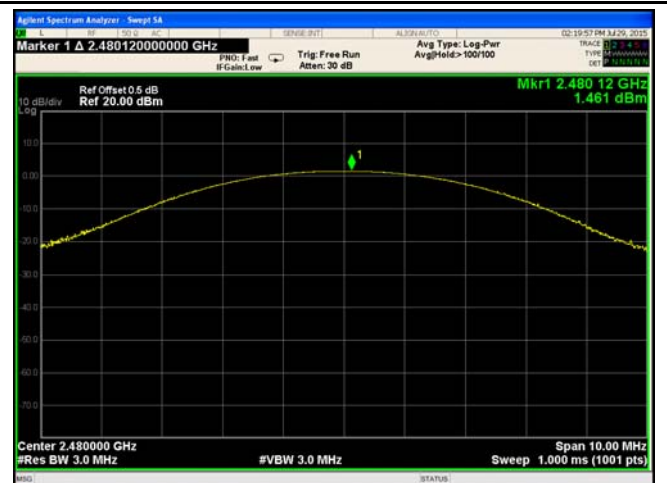


$\pi/4$ DQPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	23°C
Relative Humidity	54%
Atmospheric Pressure	1030mbar
Test date :	July 30, 2015
Tested By :	Winnie Zhang

Requirement(s):

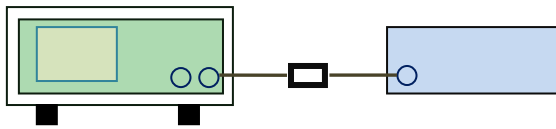Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz \geq 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW \geq 1% of the span - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	π /4 DQPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

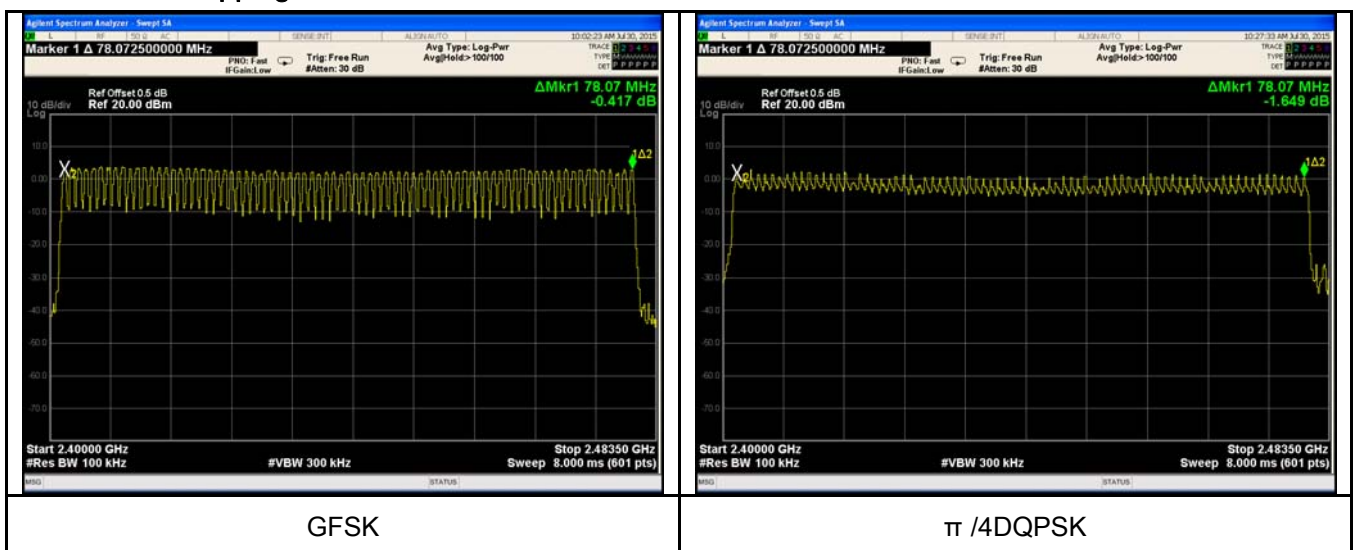

6.6 Time of Occupancy (Dwell Time)

Temperature	23°C
Relative Humidity	54%
Atmospheric Pressure	1030mbar
Test date :	July 30, 2015
Tested By :	Winnie Zhang

Requirement(s):

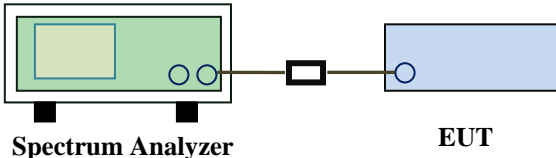Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.870	306.133	400	Pass
		Mid	2.860	305.067	400	Pass
		High	2.870	306.133	400	Pass
	$\pi/4$ DQPSK	Low	2.870	306.133	400	Pass
		Mid	2.870	306.133	400	Pass
		High	2.880	307.200	400	Pass
Note: Dwell time=Pulse Time (ms) \times (1600 \div 6 \div 79) \times 31.6						

Test Plots


Dwell Time measurement result

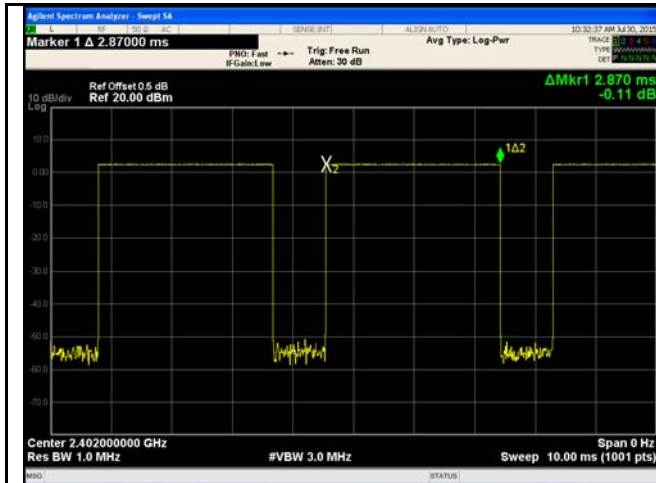


GFSK - Low CH 2402

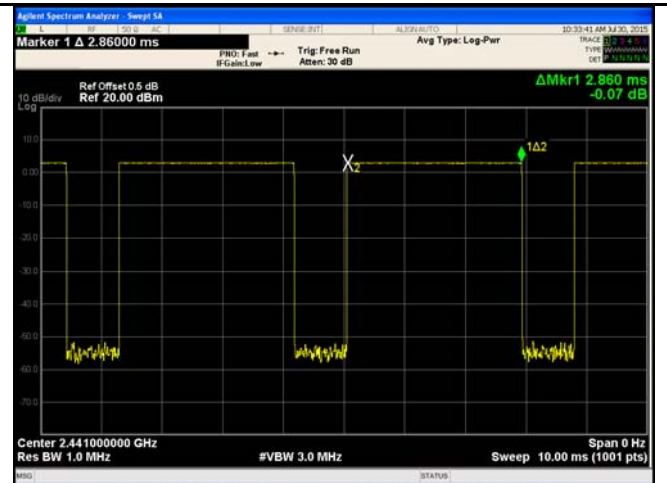

GFSK - Mid CH 2441

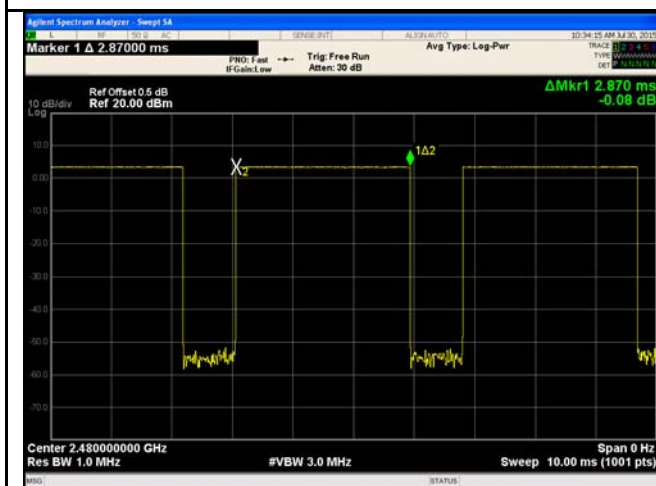


GFSK - High CH 2480

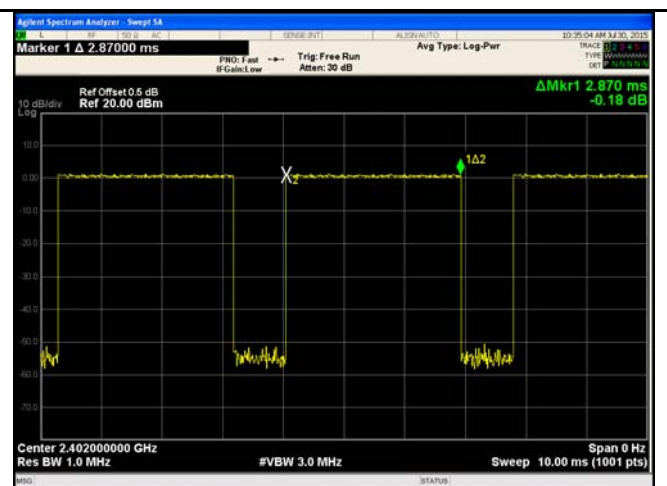

$\pi/4$ DQPSK - Low CH 2402



$\pi/4$ DQPSK - Mid CH 2441

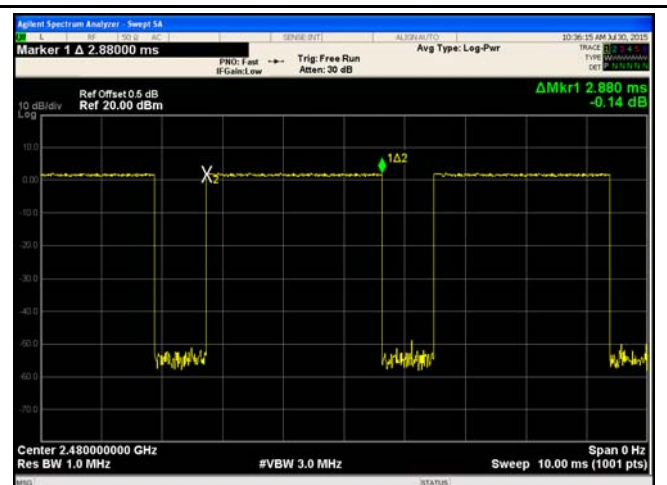


$\pi/4$ DQPSK - High CH 2480

6.7 Band Edge

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1027mbar
Test date :	July 27,2015
Tested By :	Winnie Zhang

Requirement(s):

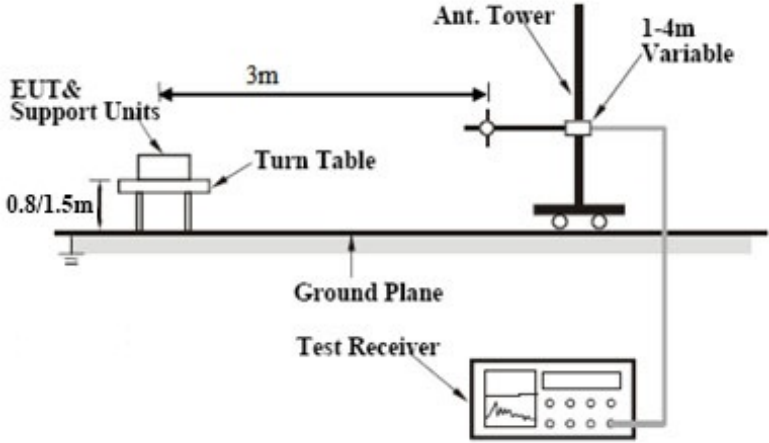Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, 		

Test Report	15070562-FCC-R
Page	24 of 46


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data ☐ Yes ☒ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Plots

GFSK Mode:

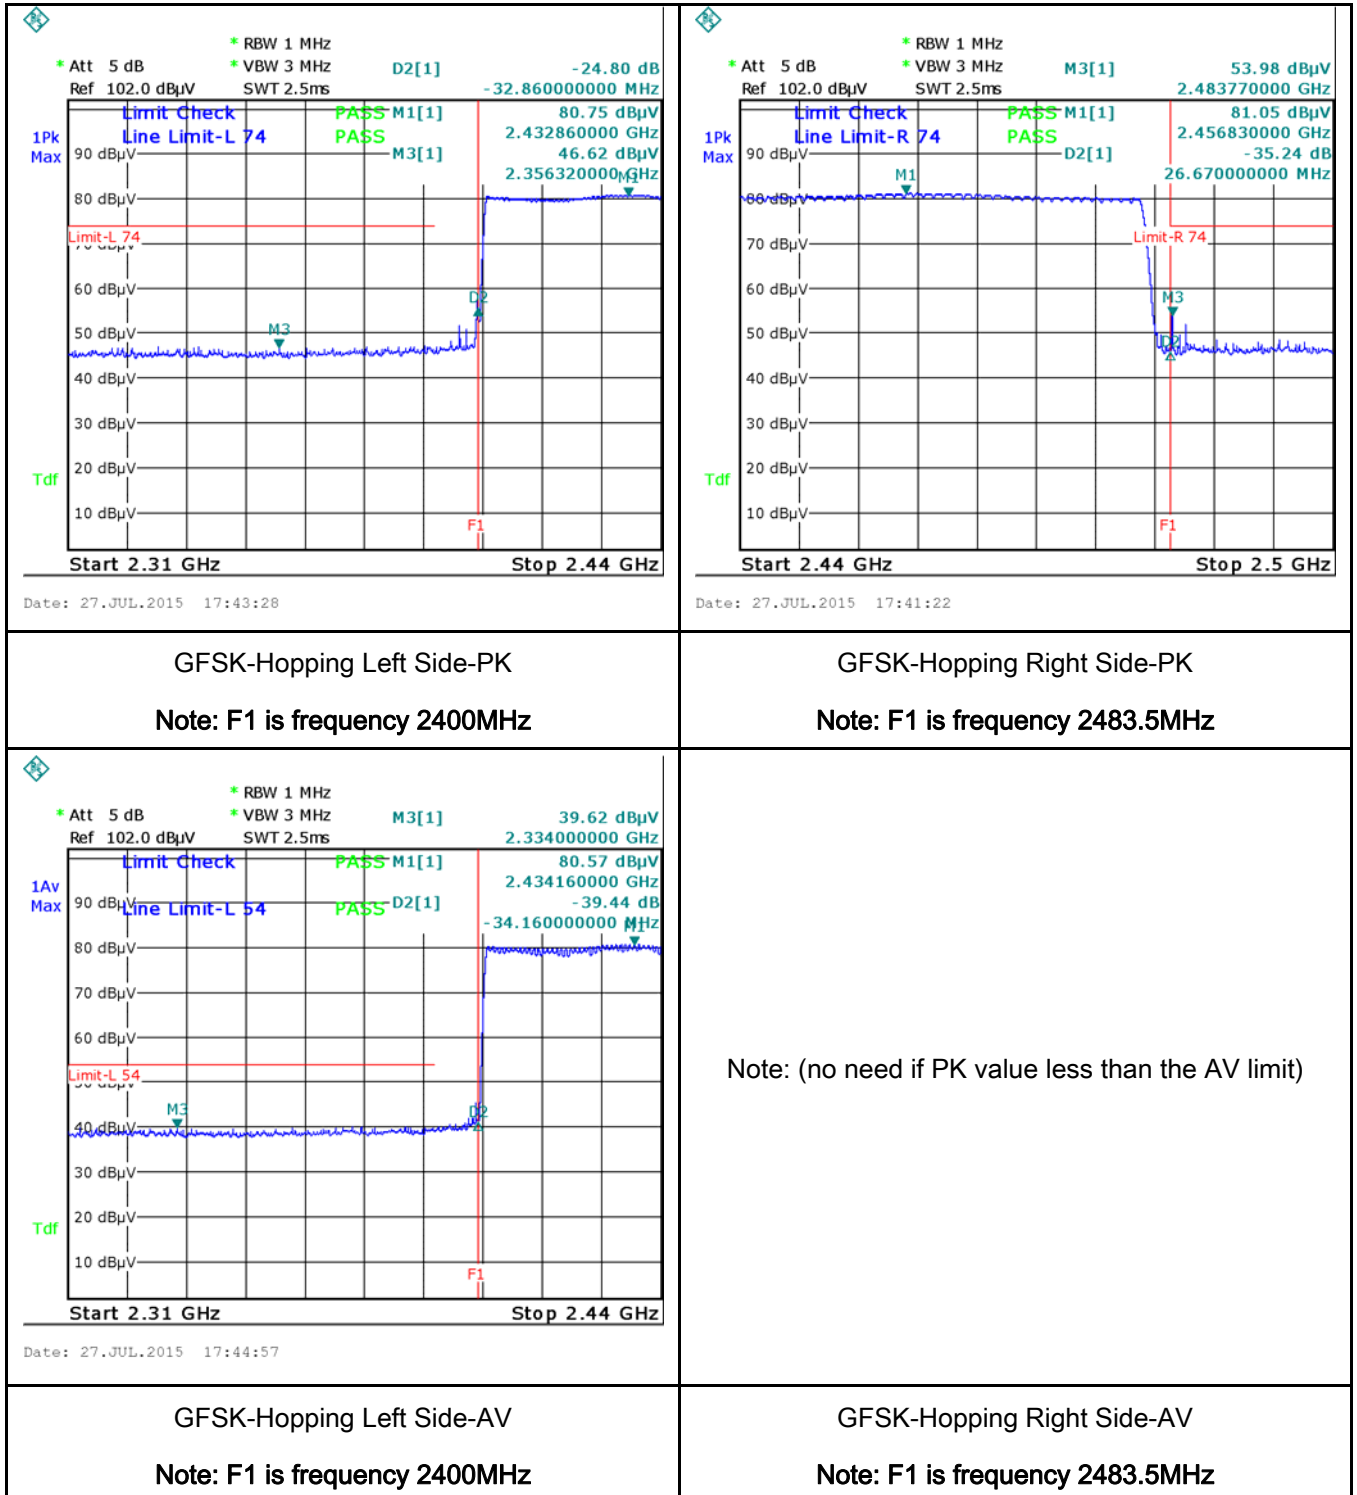


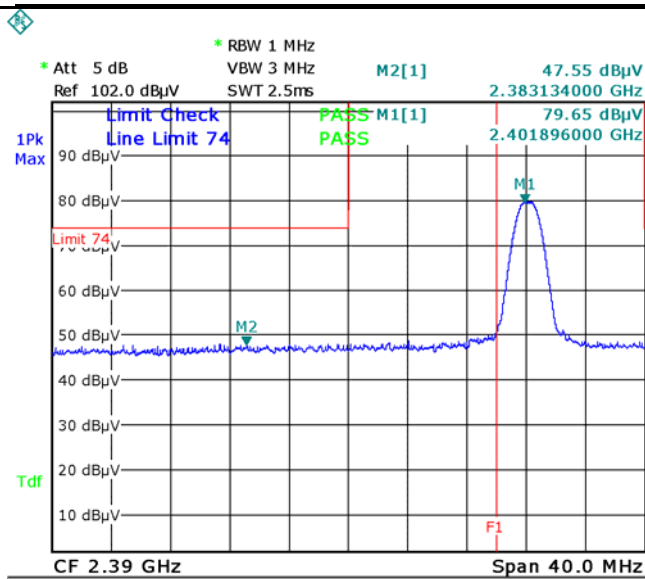

GFSK-Left Side-PK


Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

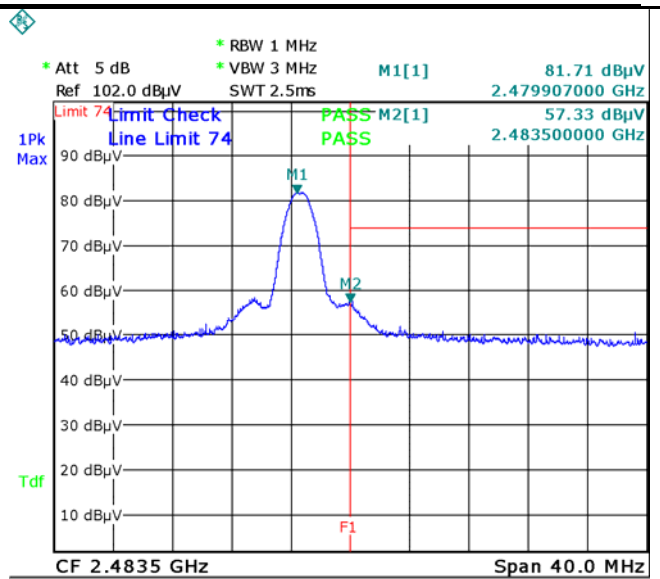

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

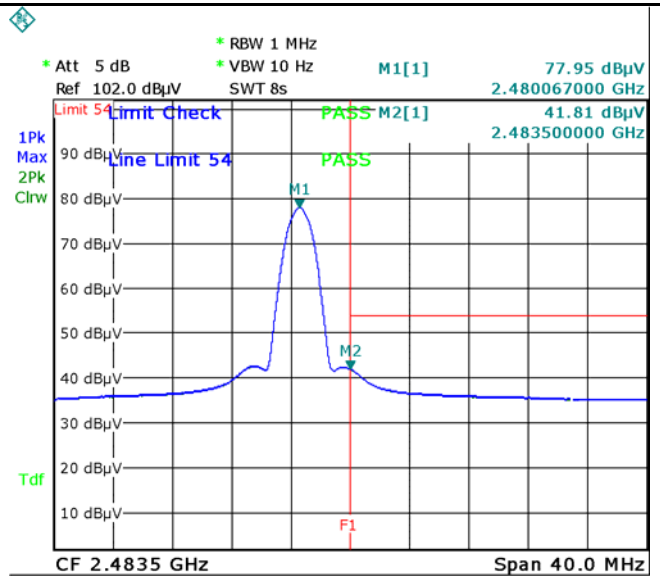



GFSK-Left Side-AV

Note: F1 is frequency 2400MHz

GFSK-Right Side-AV


Note: F1 is frequency 2483.5MHz

$\pi/4$ DQPSK Mode:

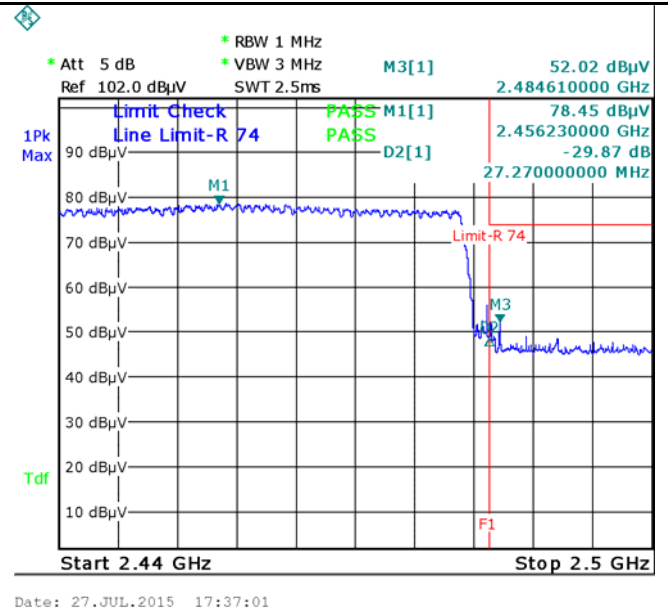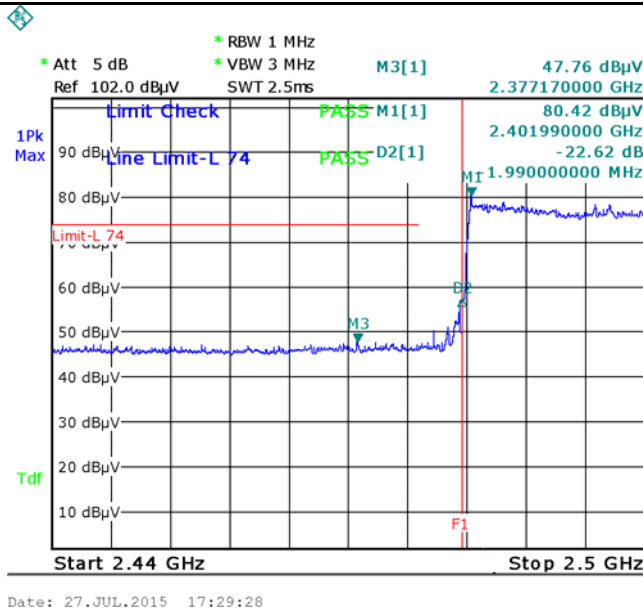


$\pi/4$ DQPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

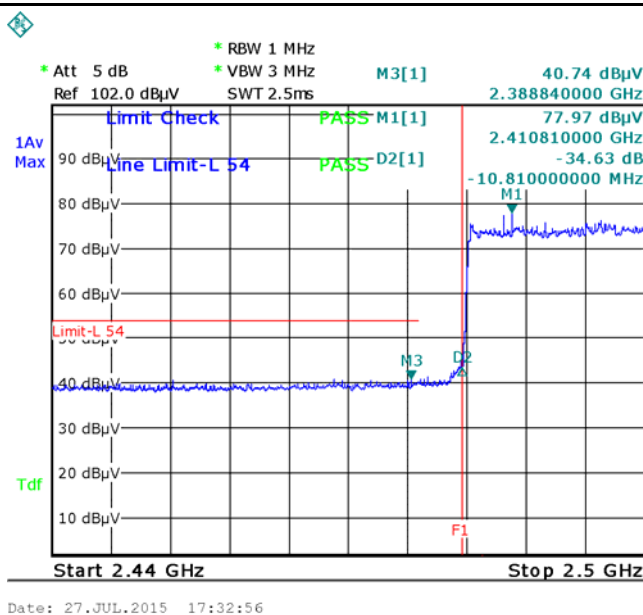

$\pi/4$ DQPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

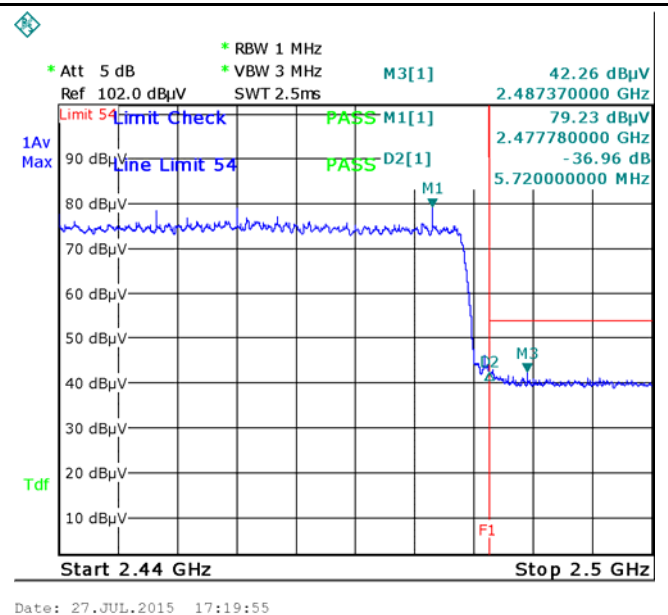


$\pi/4$ DQPSK-Hopping Left-AV


Note: F1 is frequency 2400MHz

$\pi/4$ DQPSK-Hopping Right-AV

Note: F1 is frequency 2483.5MHz

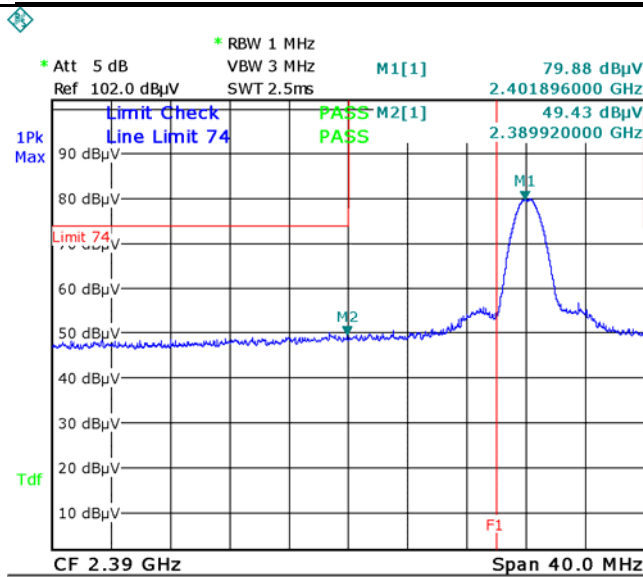

Date: 27.JUL.2015 15:52:27

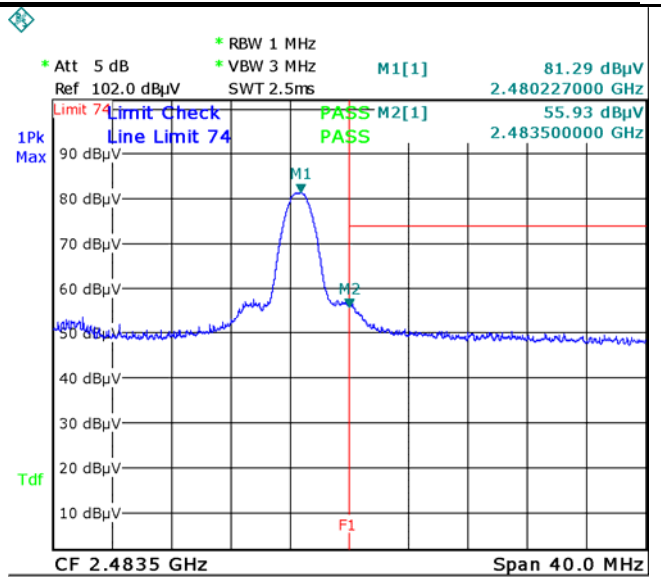


Date: 27.JUL.2015 15:59:45

$\pi/4$ DQPSK-Left Side-PK


Note: F1 is frequency 2400MHz

$\pi/4$ DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

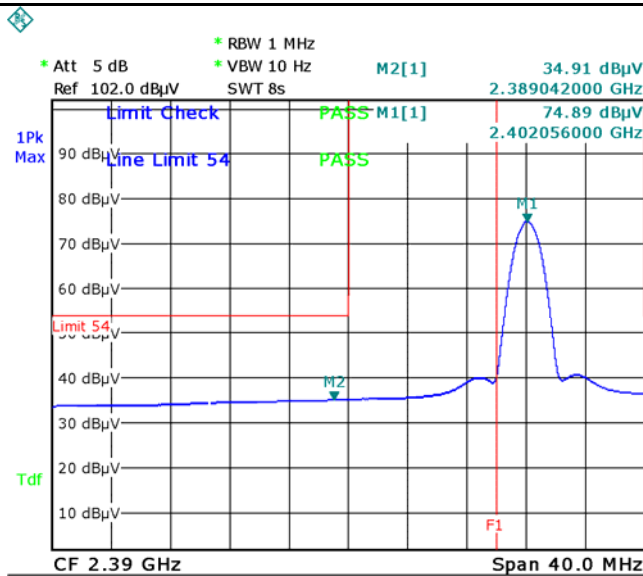

Date: 27.JUL.2015 15:53:29

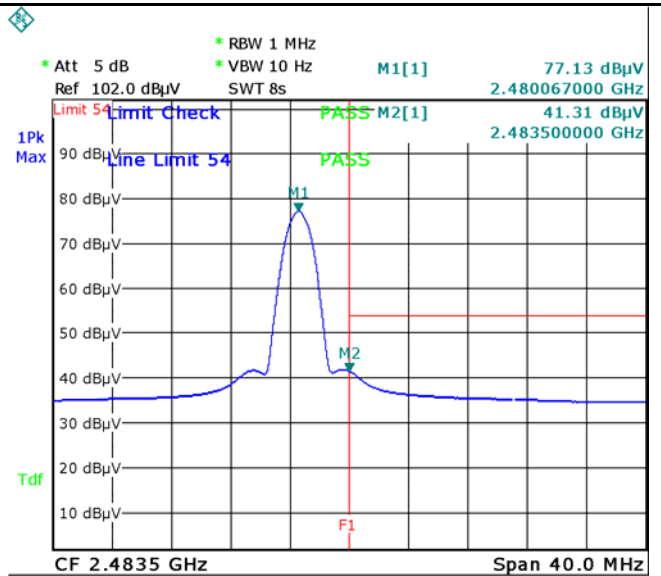

Date: 27.JUL.2015 16:00:49

$\pi/4$ DQPSK-Left Side-AV

Note: F1 is frequency 2400MHz

$\pi/4$ DQPSK-Right Side-AV

Note: F1 is frequency 2483.5MHz

6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1021mbar
Test date :	-----
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable		
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<div><input checked="" type="checkbox"/></div>		
		Frequency ranges (MHz)		Limit (dBµV)	
				QP	Average
		0.15 ~ 0.5		66 – 56	56 – 46
		0.5 ~ 5		56	46
5 ~ 30	60	50			

Test Setup	<p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Report	15070562-FCC-R
Page	30 of 46

	<p>coaxial cable.</p> <ol style="list-style-type: none"> 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input type="checkbox"/> Pass <input type="checkbox"/> Fail <input checked="" type="checkbox"/> N/A


Test Data ☐ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☐ N/A

6.9 Radiated Spurious Emissions

Temperature	25 °C
Relative Humidity	58%
Atmospheric Pressure	1016mbar
Test date :	July 16, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges		
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--

Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
-----------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Report	15070562-FCC-R
Page	32 of 46

	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Bluetooth Mode

Below 1GHz

80.0 dBuV/m

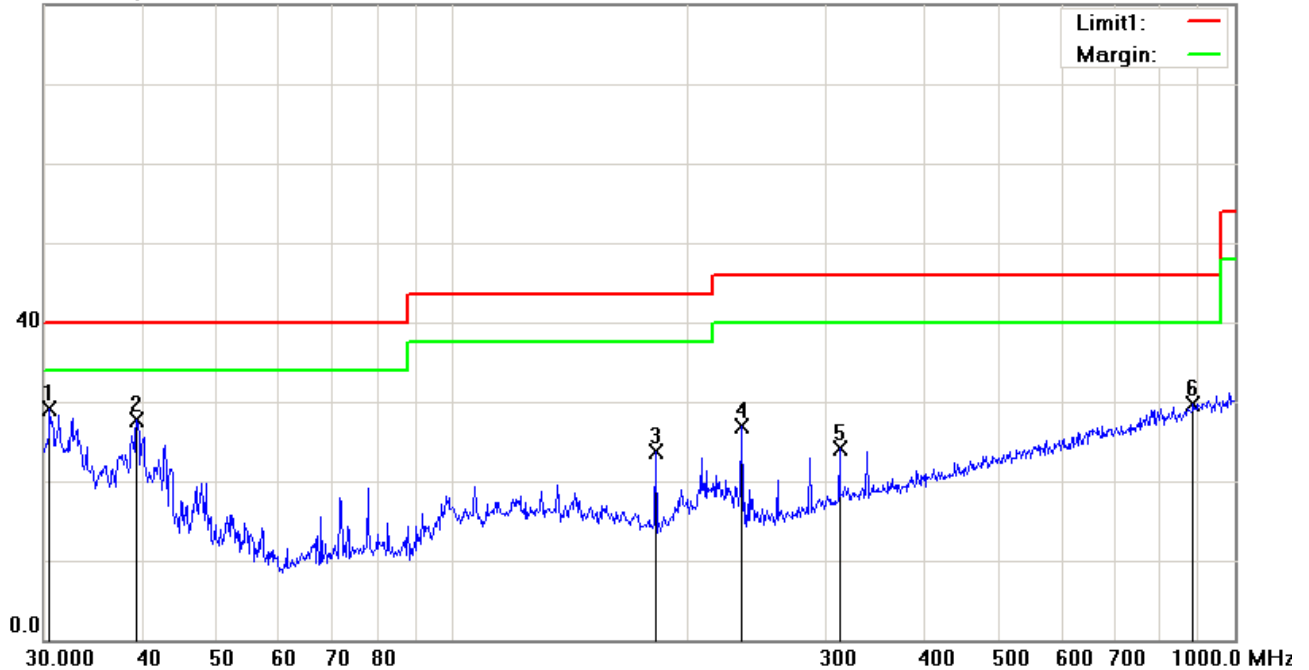


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	H	30.5306	29.79	peak	-0.66	29.13	40.00	-10.87	171	360	
2	H	39.4372	34.94	peak	-7.18	27.76	40.00	-12.24	113	360	
3	H	181.9202	33.39	peak	-9.76	23.63	43.50	-19.87	200	191	
4	H	234.1684	36.02	peak	-9.05	26.97	46.00	-19.03	100	239	
5	H	312.1794	30.61	peak	-6.55	24.06	46.00	-21.94	100	81	
6	H	884.5029	25.27	peak	4.42	29.69	46.00	-16.31	200	38	

Below 1GHz

80.0 dBuV/m

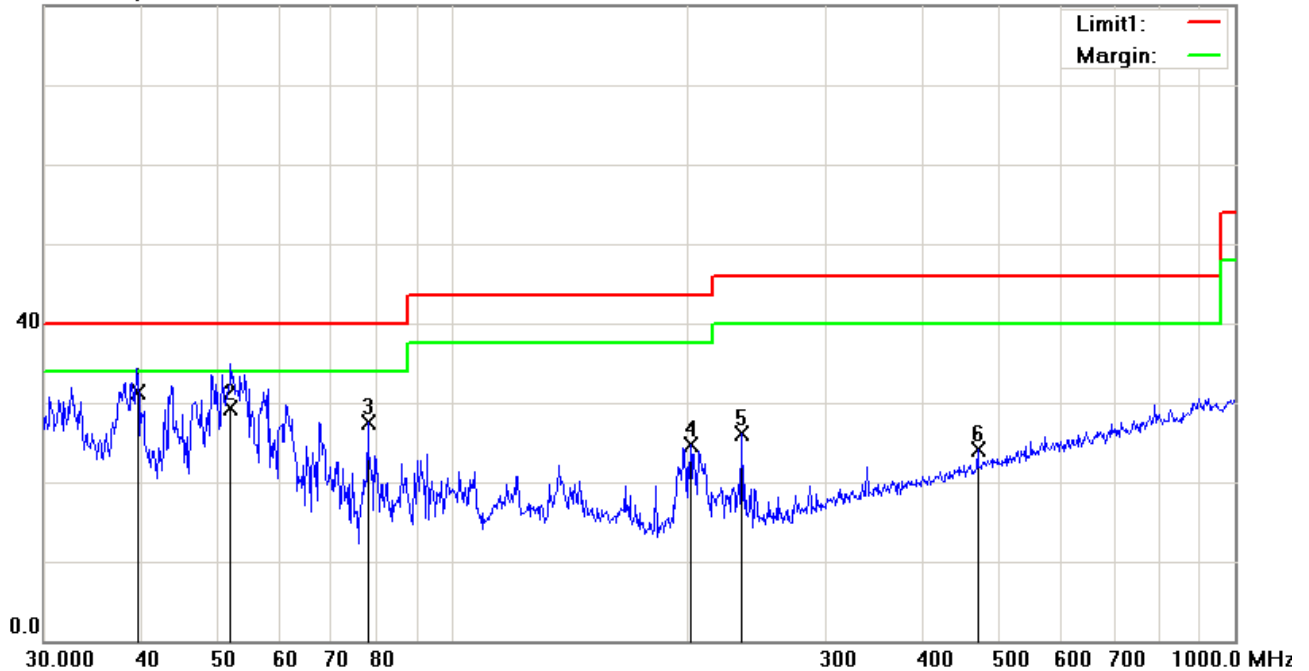

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	V	39.6817	38.61	QP	-7.36	31.25	40.00	-8.75	100	297	
2	V	51.9971	42.63	QP	-13.42	29.21	40.00	-10.79	100	11	
3	V	77.8654	41.23	peak	-13.76	27.47	40.00	-12.53	100	206	
4	V	201.3930	33.45	peak	-8.76	24.69	43.50	-18.81	100	270	
5	V	234.1684	35.14	peak	-9.05	26.09	46.00	-19.91	100	195	
6	V	468.8762	26.64	peak	-2.55	24.09	46.00	-21.91	100	158	

Test Mode:	Transmitting Mode
------------	-------------------

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	39.12	AV	V	33.83	6.86	31.72	48.09	54	-5.91
4804	38.96	AV	H	33.83	6.86	31.72	47.93	54	-6.07
4804	47.32	PK	V	33.83	6.86	31.72	56.29	74	-17.71
4804	46.86	PK	H	33.83	6.86	31.72	55.83	74	-18.17

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	38.98	AV	V	33.86	6.82	31.82	47.84	54	-6.16
4882	39.02	AV	H	33.86	6.82	31.82	47.88	54	-6.12
4882	46.16	PK	V	33.86	6.82	31.82	55.02	74	-18.98
4882	45.26	PK	H	33.86	6.82	31.82	54.12	74	-19.88

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	39.32	AV	V	33.9	6.76	31.92	48.06	54	-5.94
4960	40.05	AV	H	33.9	6.76	31.92	48.79	54	-5.21
4960	47.21	PK	V	33.9	6.76	31.92	55.95	74	-18.05
4960	46.37	PK	H	33.9	6.76	31.92	55.11	74	-18.89

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo



Whole Package - Top View



EUT - Front View



EUT - Rear View



EUT - Left View

Test Report	15070562-FCC-R
Page	38 of 46



EUT - Right View


Annex B.ii. Photograph: EUT Internal Photo




Cover Off - Top View 1




Cover Off - Top View 2

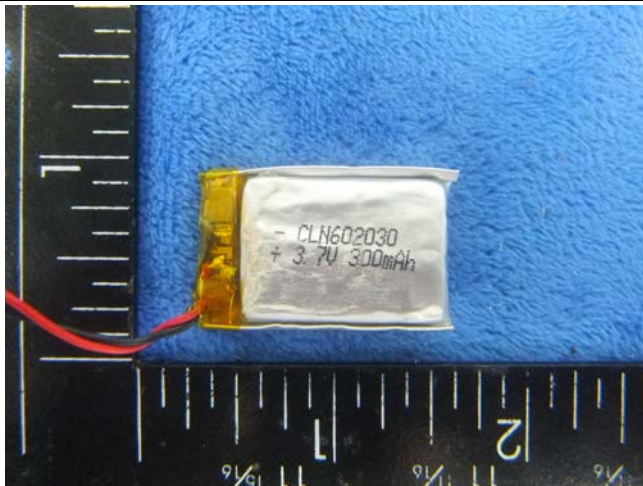


Battery - Front View

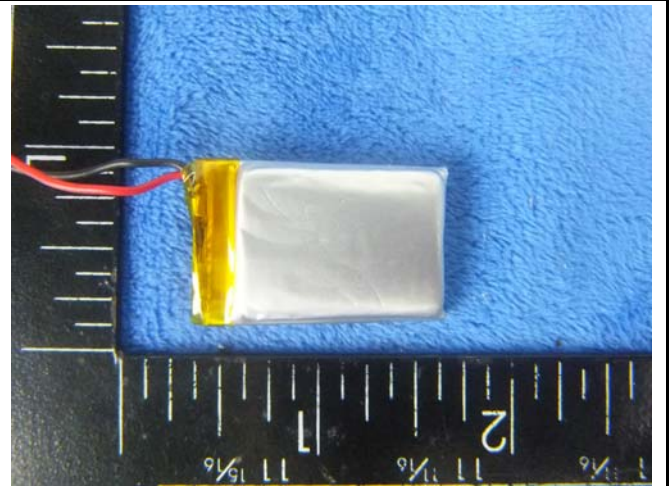

Battery - Rear View

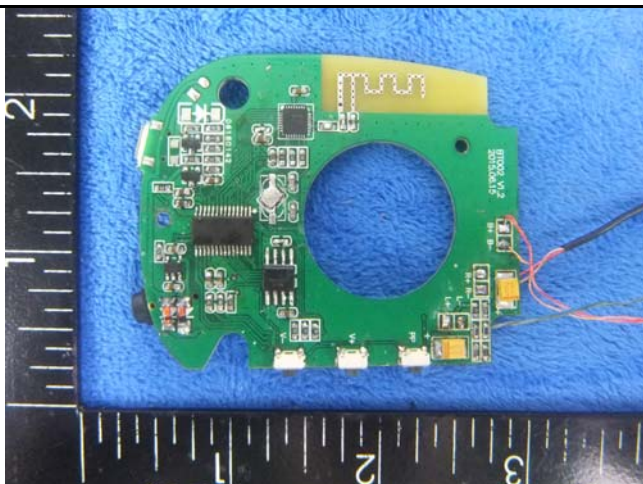


Mainboard With Shielding - Front View

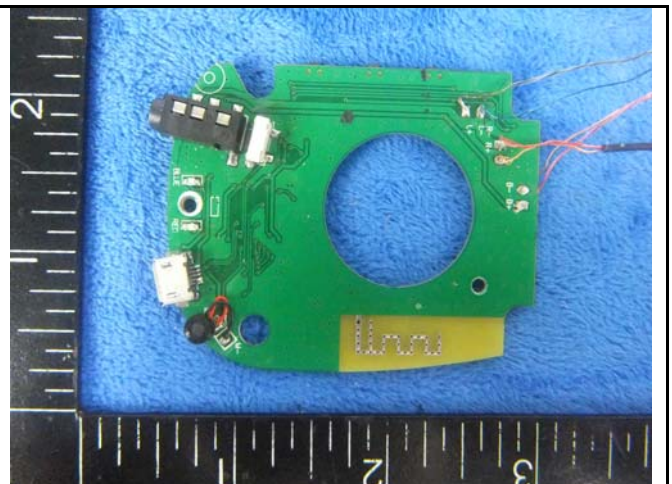

Mainboard Without Shielding - Rear View

Test Report	15070562-FCC-R
Page	40 of 46

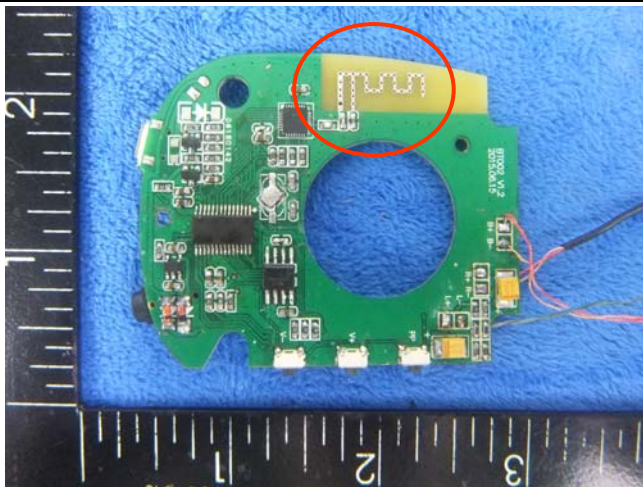


BT - Antenna View

Annex B.iii. Photograph: Test Setup Photo



Radiated Spurious Emissions Test Setup Below 1GHz

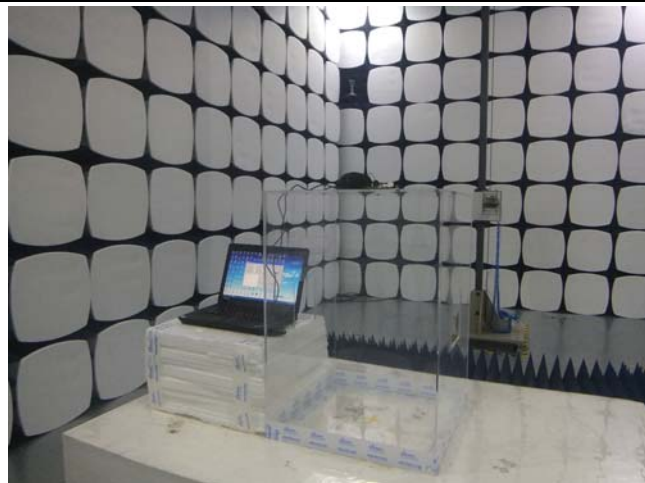


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emission (Below 1GHz) .

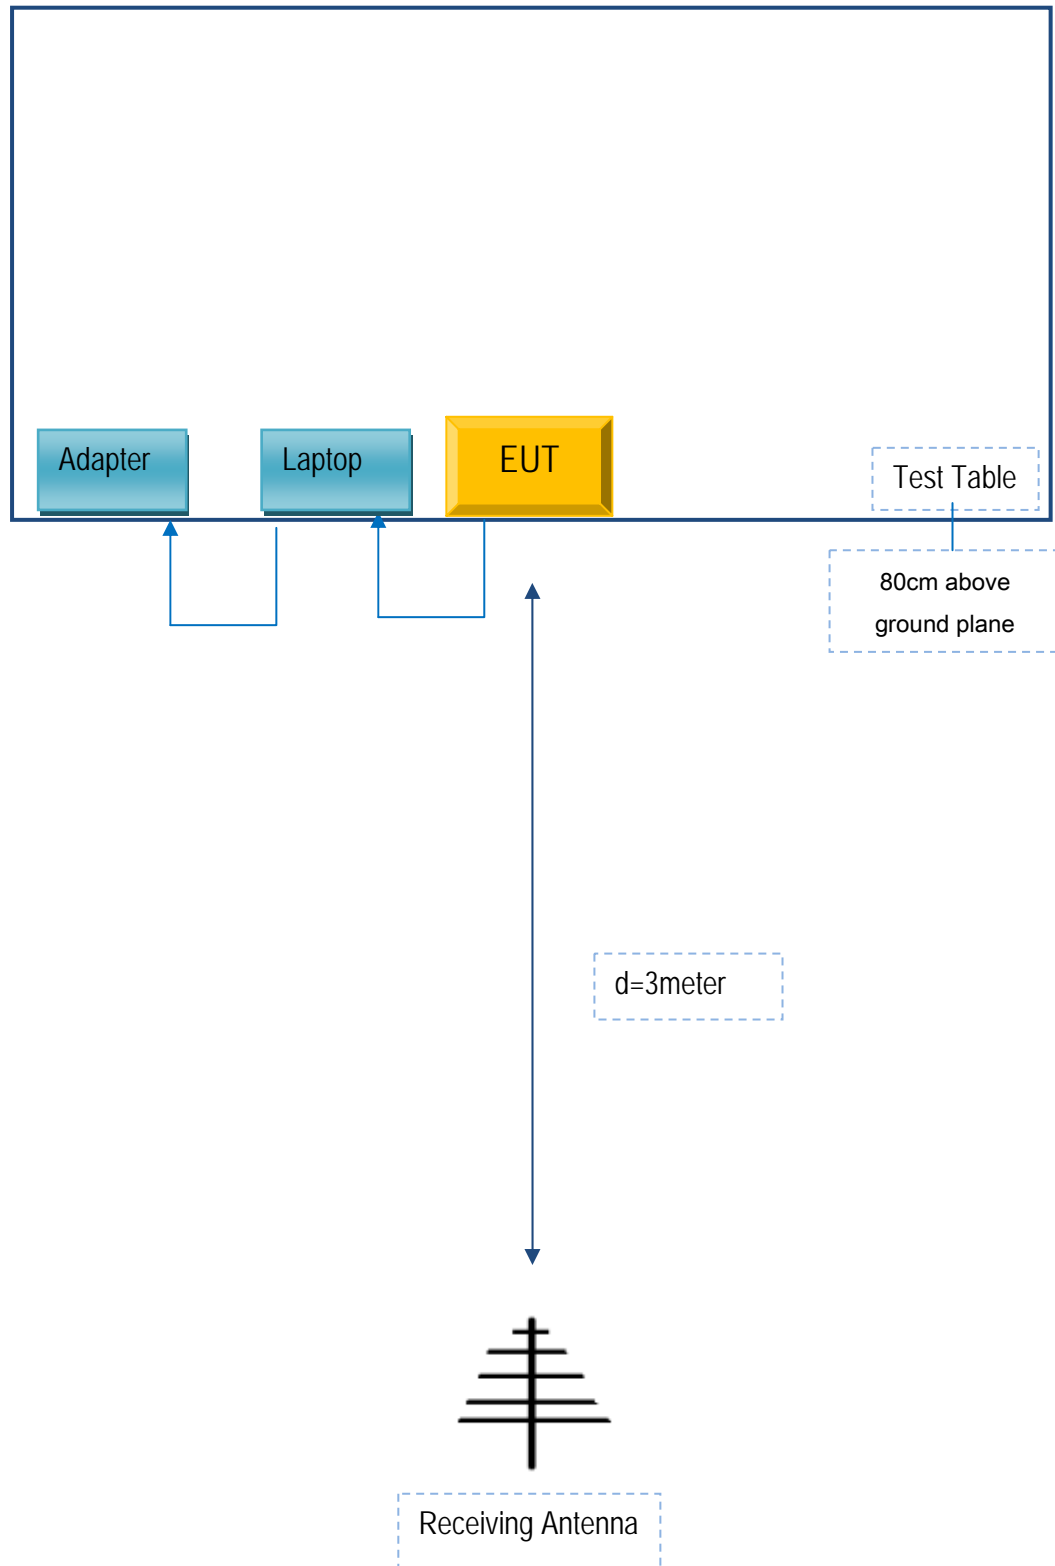

Block Configuration Diagram for Radiated Emission (Above 1GHz) .

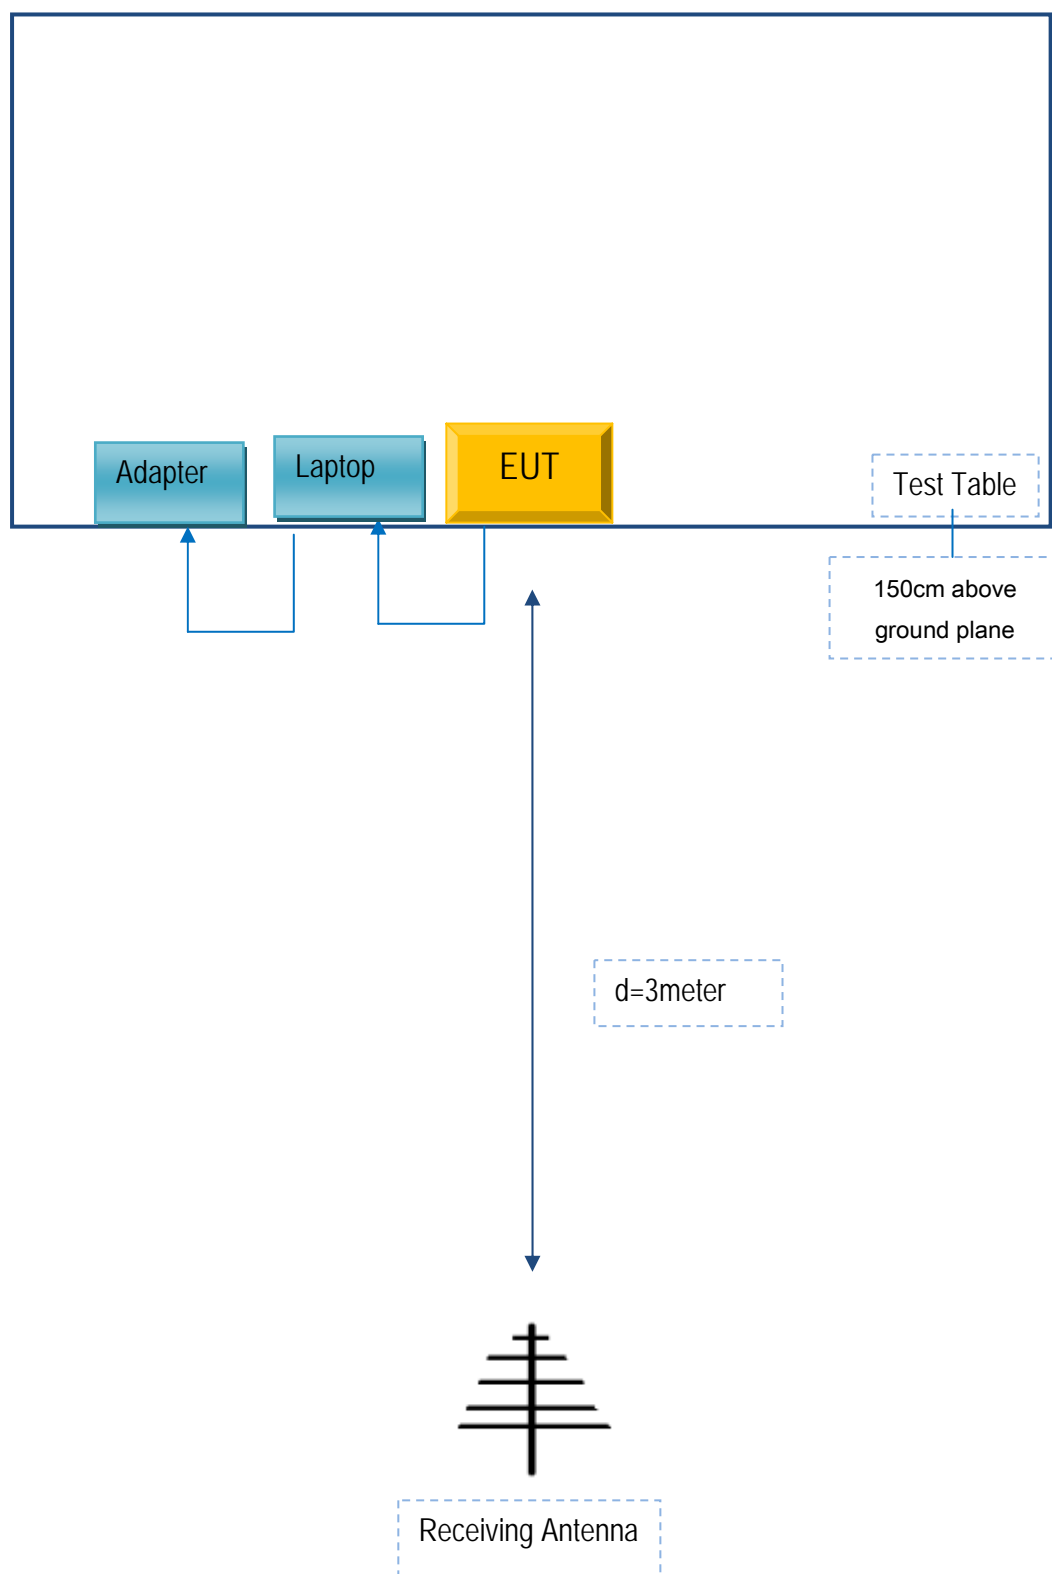

Test Report	15070562-FCC-R
Page	44 of 46

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
Lenovo	Lenovo Laptop	E40& 0579A52	N/A	N/A

Test Report	15070562-FCC-R
Page	45 of 46

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

Shenzhen RoyStyle Technology Co., Ltd.

To: 775 Montague Expressway Milpitas, CA 95035, USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 5 model numbers on The FCC reports, as following:
Model No.: BT-002, BTH03, BH02, BH03, UB-BTH03-101


We declare that : BT-002, BTH03, BH02, BH03, UB-BTH03-101, All models the same PCB and Appearance shape, accessories ,the difference of these is listed as below:

Main Model No	Serial Model No	Difference
BT-002	BTH03, BH02, BH03, UB-BTH03-101	The model No. are different

Thank you!

Sincerely,

Client's signature :



Client's name / title : roy.law / Manager
Contact information : +86-755-22665936

Address : Room 2889, Electronic Technology Building C Block, Huaqiang North, Futian District, Shenzhen