

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Test Report for FCC

FCC ID:2AFNU-ULBM-01

Report Number		ESTF151508-002		
Applicant	Company name	Ullighting Co.,Ltd.		
	Address	#102, 1F, 22, Samyang-ro, Seongbuk-go, Seoul, 136-717, Korea		
	Telephone	82-70-4713-6561		
	Contact person	Wonhee Han		
Product	Product name	BT Module		
	Model No.	ULBM	Manufacturer	Ullighting Co.,Ltd.
	Serial No.	NONE	Country of origin	KOREA
Test date	2015-08-06 ~ 2015-08-07		Date of issue	13-Aug-15
Testing location	347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do 467-811, R. O. Korea			
Standard	FCC PART 15 Subpart C (15.247); ANSI C 63.4(2009) , KDB 558074 D01(2015)			
Measurement facility registration number		659627		
Tested by	Manager J.H.Kim		(Signature)	
Reviewed by	Engineering Manager J.M.Yang		(Signature)	
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable			
<p>* Note</p> <ul style="list-style-type: none">- This test report is not permitted to copy partly without our permission- This test result is dependent on only equipment to be used- This test result based on a single evaluation of one sample of the above mentioned				



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel ; +02-31-031-0037 Fax ; +02-31-031-0039

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. DTS bandwidth	10
5.1 Test procedure	10
5.2 Test instruments and measurement setup	10
5.3 Measurement results	10
5.4 Trace data	11
6. Maximum Peak Output Power	13
6.1 Test procedure	13
6.2 Test instruments and measurement setup	13
6.3 Measurement results	13
7. Maximum conducted (average) output power	14
7.1 Test procedure	14
7.2 Test instruments and measurement setup	14
7.3 Measurement results	14
7.4 Trace data(Peak, Average).....	15
8. Maximum power spectral density level in the fundamental emission	18
8.1 Test procedure	18
8.2 Test instruments and measurement setup	18
8.3 Measurement results	18
8.4 Trace data	19
9. Emissions in non-restricted frequency bands	21
9.1 Test procedure	21
9.2 Test instruments and measurement setup	21
9.3 Measurement results	21
9.4 Trace data of band-edge & out of emissioin	22
10. Measurement of radiated emission	26
10.1 Measurement equipment	26
10.2 Environmental conditions	26
10.3 Measurement Instrument setting for Radiated Emission	27
10.4 Test Data for Bluetooth (LE).....	28
11. Measurement of conducted emission	36
11.1 Measurement equipment	36
11.2 Environmental conditions	36
11.3 Test Data for Bluetooth (LE).....	37
12. Photographs of test setup	38
12.1.Setup for Radiated Test : (30 ~ 1 000) MHz	38
12.2.Setup for Radiated Test : Above GHz	39
12.3. Setup for Conducted Test : (0.15 ~ 30) MHz.....	40
12.4. Photographs of EUT	41

Appendix 1. Special diagram

Appendix 2. Antenna Requirement



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-031-0037 Fax : +82-31-031-0039

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu, Seoul 153-759, R. O. Korea

EMC/Telecom/Safety Test Lab : 347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do 467-811, R. O. Korea

1.3 Official Qualification(s)

MSIP : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under APEC TEL MRA between the RRA and the FCC

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

2. Description of EUT

2.1 Summary of Equipment Under Test (Bluetooth)

Modulation Type	: Bluetooth (DSSS)
Transfer Rate	: 1 Mbps
Number of Channel	: 40 ch
PEAK Output Power	: DSSS : 0.087 mW
Rating	: INPUT : AC (100 ~ 240) V, (50 ~ 60) Hz, 0.35 A : OUTPUT : DC 12 V, 1.5 A
Receipt Date	: 20-Jul-15
X-tal list(s) or Frequencies generated	: The highest operating frequency is 2 480 MHz (Bluetooth) XTAL : 16 MHz ,32.768 KHz, Bluetooth : 2.4 GHz

2.2 General descriptions of EUT

- Bluetooth v4.1 specification compliant ; Bluetooth Smart ; Bluetooth Low Energy ; BLE
- Small: 17mm x 25mm
- Integrated chip antenna
- RSSI monitoring for proximity applications
- <900nA current consumption in dormant mode
- <20mA peak current consumption in RX active
- Programmable general purpose PIO controller
- 10-bit ADC
- 12 digital PIOs
- 3 analog AIOs
- 1 UART
- shared 1 I2C(only master) or 1 SPI(master/slave)
- 4 PWM modules
- Wake-up interrupt and watchdog timer
- 5 operating modes : Running, Idle, Deep sleep, Hibernate, Dormant
- Over-the-Air Configuration or Firmware Update service (by Smart-phone)

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

3. Test Standards

Test Standard : FCC PART 15 Subpart C (15.247)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2009) & KDB558074 D01(2015)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

Summary of Test Results

Applied Standard : 47 CFR Part 15 Subpart C				remark
Standard	Test Type	Result	Remark	Limit
15.207	AC Power Conducted Emission	Pass	Meet the requirement	
15.205 & 15.209	Restricted band / Intentional Radiated Emission	Pass	Meet the requirement	
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement	Min. 500 kHz
	Occupied Bandwidth			
15.247(b)(3)	Maximum Peak/average output power	Pass	Meet the requirement	Max. 30 dBm
15.247(c)	Transmitter Radiated Emission	Pass	Meet the requirement	Table 15.209
15.247(e)	Power Spectral Density	Pass	Meet the requirement	Max. 8 dBm
15.247(d)	Band Edge Measurement	Pass	Meet the requirement	20 dB less

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

4. Measurement Condition

4.1 EUT Operation

a. Channel

Ch.	Frequency	Ch.	Frequency
0	2402 MHz	21	2444 MHz
1	2404 MHz	22	2446 MHz
2	2406 MHz	23	2448 MHz
3	2408 MHz	24	2450 MHz
4	2410 MHz	25	2452 MHz
5	2412 MHz	26	2454 MHz
6	2414 MHz
...	...	39	2480 MHz
20	2442 MHz		

b. Measurement Channel : Bluetooth : Low(2402 MHz), Middle(2442 MHz),High(2480 MHz)

c. Test Mode : Continuous Output, DSSS

d. Test rate : 1 Mbps




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel ; +02-31-631-0037 Fax ; +02-31-631-0039

4.2 EUT Operation.

- * The EUT was in the following operation mode during all testing
- * Execute a RF test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- * Transmit mode were measured each channels(Low,Middle,High).
- * Check RF output power by spectrum analyzer.
- * The EUT was measured up to tenth harmonic or 40 GHz of the highest operating frequencies.

4.3 Configuration and Peripherals

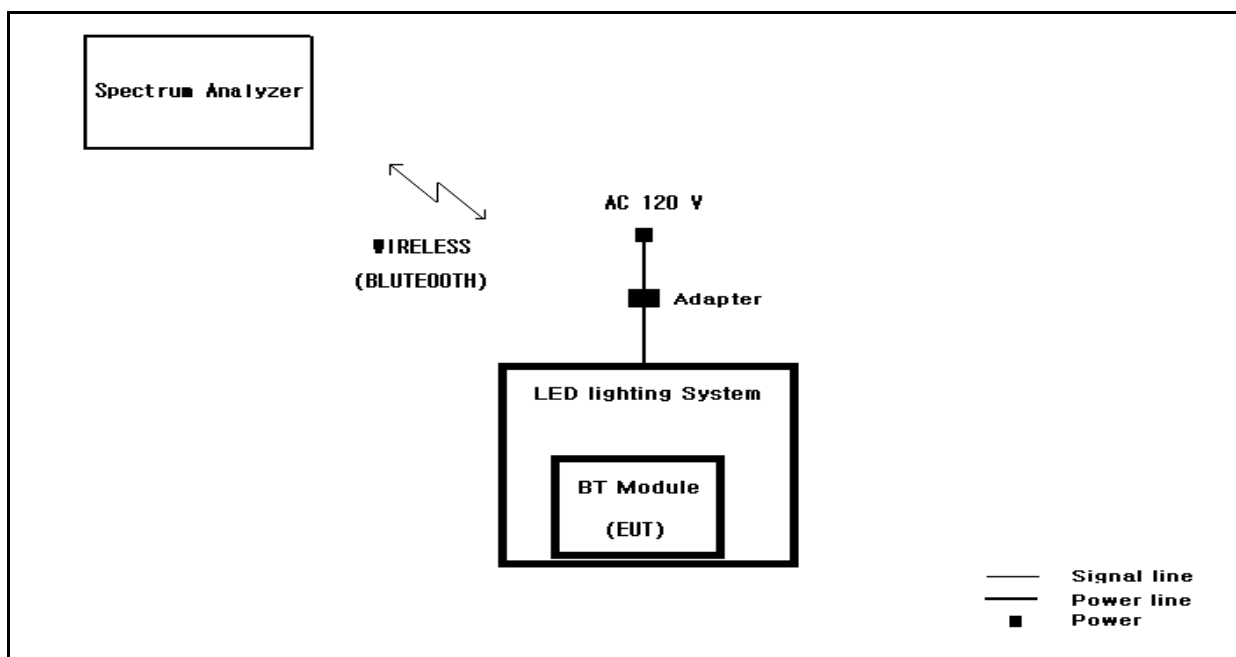

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

4.4 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
BT Module	ULBM	NONE	Uttlighting Co.,Ltd.	EUT
Adapter	SH-1215N	NONE	Advanced Power Supply	
LED lighting System	JUIDPL-S40	NONE	JPKKOREA Co., Ltd	
Spectrum Analyzer	R3273	110600592	ADVANTEST	

4.5 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
BT Module	WIRELESS (BLUETOOTH)	Spectrum Analyzer	WIRELESS (BLUETOOTH)	–	–	
LED lighting System	POWER	ADAPTER	–	1.5	Unshielded	





ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

4.6 DUTY CYCLE OF TEST SIGNAL

Duty cycle is < 98%, duty factor shall be considered.

duty cycle = $0.4133 / 0.626 = 0.660$, duty factor = $10 \cdot \log(1 / 0.660) = 1.804$

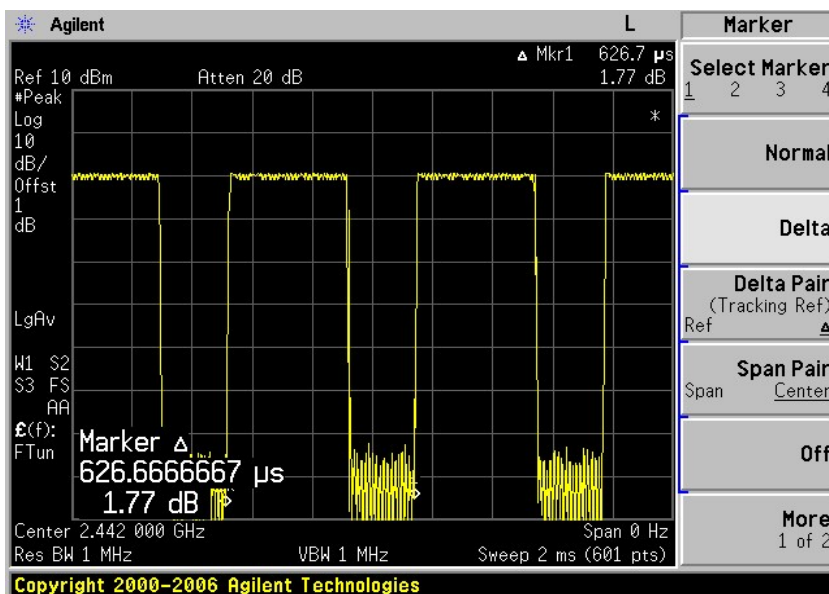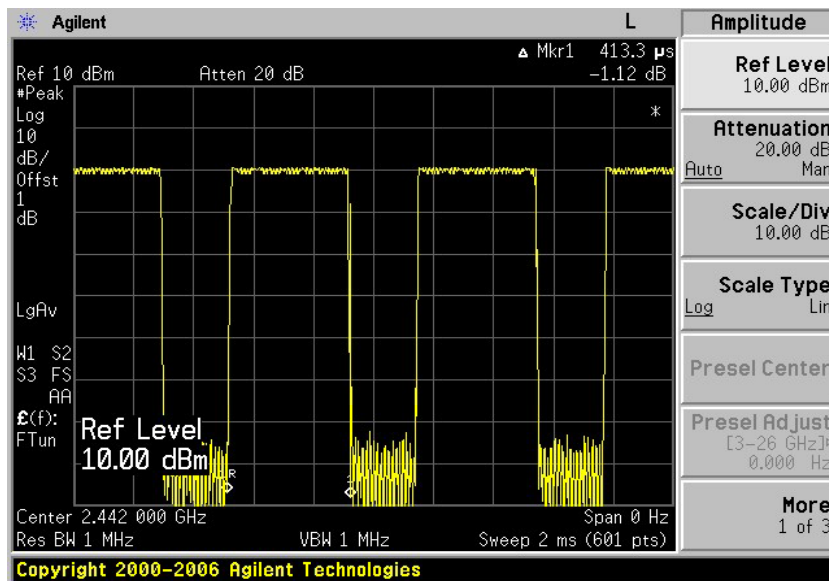

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

5. DTS bandwidth

5.1 Test procedure

558074 D01 DTS Meas Guidance v03r03 8.2 Option 2 & RSS 247 5.2

5.2 Test instruments and measurement setup

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3 X RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

Limits : FCC § 15.247(a)(2) & RSS 247 5.2

6dB Bandwidth Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	2016-01-15
RF Cable	Length: 6cm	–	
–Spectrum Analyzer <=> EUT	Loss: 1.0dB	–	

5.3 Measurement results

EUT	BT Module	MODEL	ULBM
MODE	DSSS	ENVIRONMENTAL CONDITION	24.0 °C, 44.0 % R.H.
INPUT POWER	5Vd.c.		


Channel Frequency (MHz)	Emission bandwidth	Bandwidth at 6dB below(MHz)	Minimum Limit (MHz)	PASS/FAIL
2402	1.047 MHz	0.69	0.5	PASS
2442	1.050 MHz	0.69	0.5	PASS
2480	1.048 MHz	0.69	0.5	PASS




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

5.4 Trace data (ch_0)

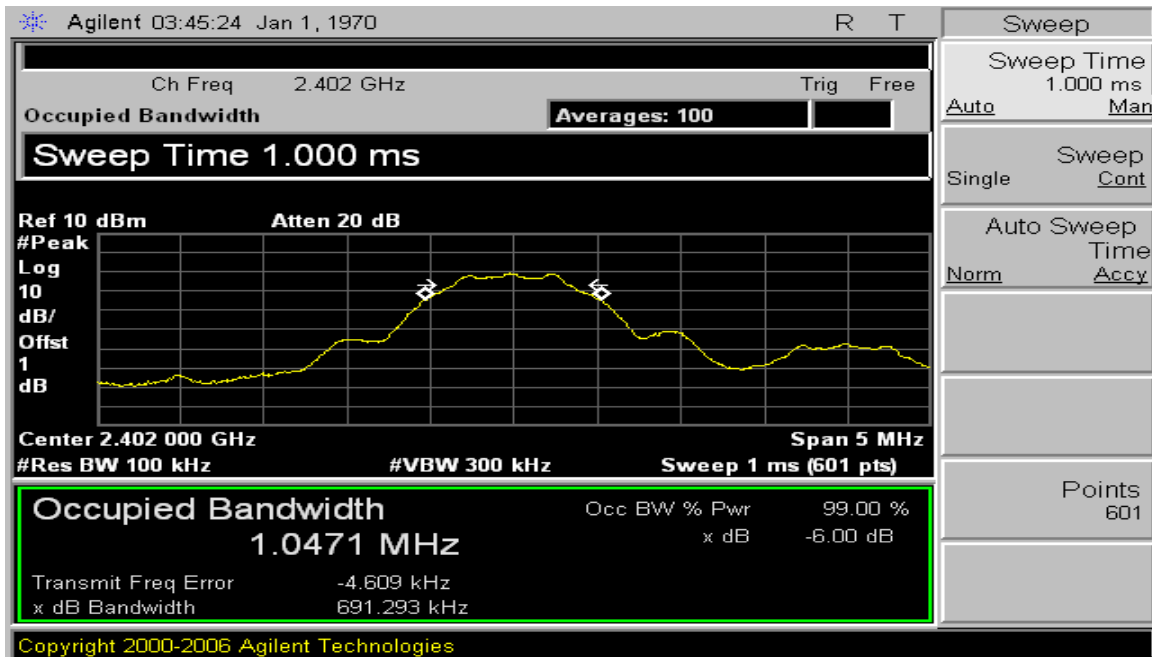

(ch_20)

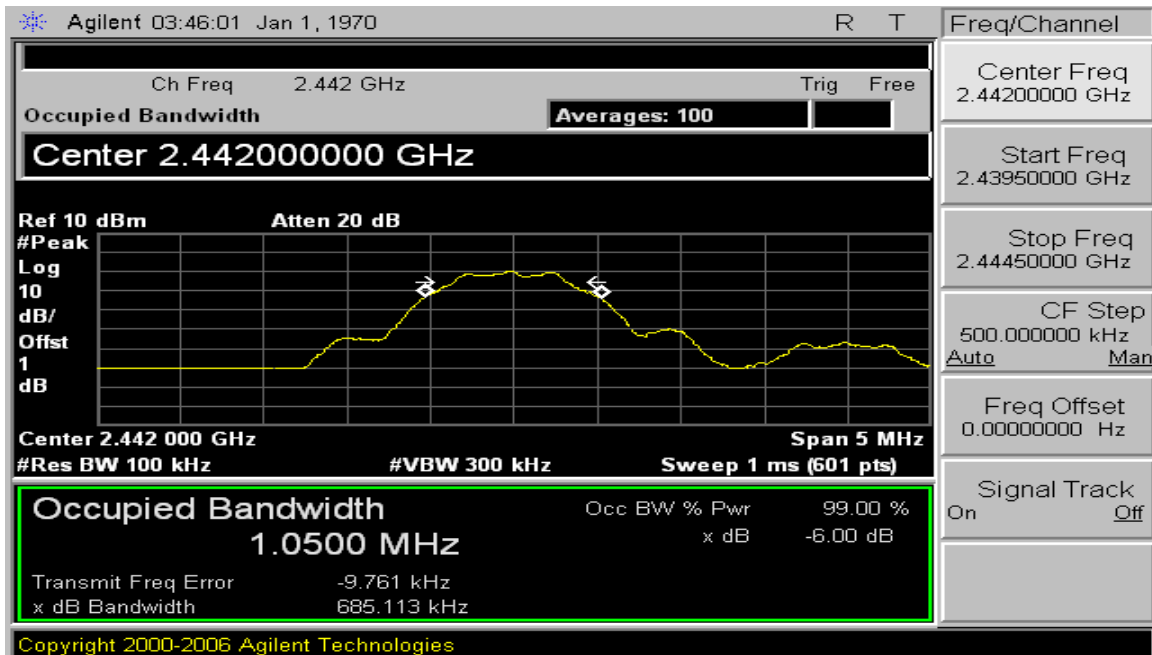




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-01-031-0037 Fax : +02-01-031-0039

(ch_39)

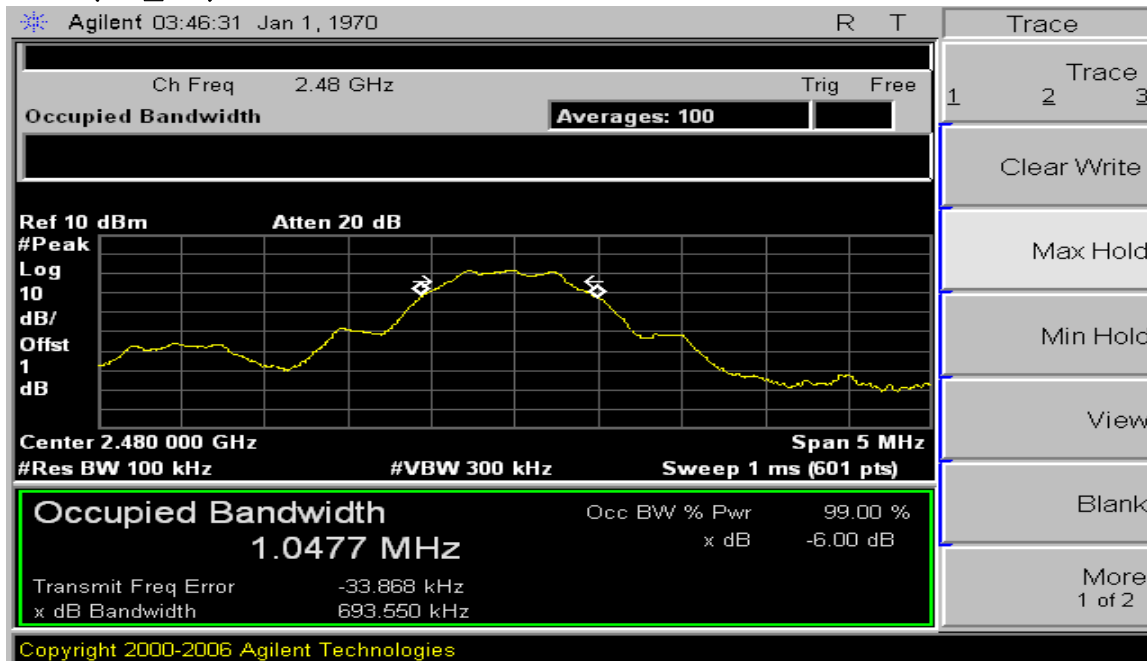

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

6. Maximum peak conducted output power

6.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 9.1.1 Integrated band power method

6.2 Test instruments and measurement setup

- Set the RBW = 1 MHz.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Limits : FCC § 15.247

Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	2016-01-15
RF Cable	Length: 6cm	—	
-Spectrum Analyzer <=> EUT	Loss: 1.0 dB	—	

6.3 Measurement results

EUT	BT Module	MODEL	ULBM
MODE	DSSS	ENVIRONMENTAL CONDITION	24.0 °C, 43.0 % R.H.
INPUT POWER	5Vd.c.		

CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Limit[1W] (dBm)	PASS/FAIL
		Detector	(dBm)	(mW)		
0	2402	PEAK	-13.8	0.04	30.0	PASS
20	2442	PEAK	-12.78	0.05	30.0	PASS
39	2480	PEAK	-10.76	0.08	30.0	PASS

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

7. Maximum conducted (average) output power

7.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 9.2.2.4 Method AVGSA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction)

7.2 Test instruments and measurement setup

- Measure the duty cycle, x , of the transmitter output signal as described in 6.0.
- Set span to at least 1.5 times the OBW.
- Set RBW = 1–5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- Do not use sweep triggering. Allow the sweep to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is 25 %.

Maximum Peak Output Power Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	2016-01-15
RF Cable	Length: 6cm	–	
–Spectrum Analyzer \Leftrightarrow EUT	Loss: 1.0 dB	–	

7.3 Measurement results

EUT	BT Module	MODEL			ULBM	
MODE	DSSS	ENVIRONMENTAL CONDITION			24 °C, 43 % R.H.	
INPUT POWER	5Vdc					
CHANNEL	Channel frequency (MHz)	Conducted Power Output(dBm)			Measured + Duty Cycle(dBm)	Measured + Duty Cycle(mW)
		Detector	(dBm)	Duty Cycle		
0	2402	AVG	–14.26	0.660	–13.6	0.044
20	2442	AVG	–13.22	0.660	–12.56	0.055
39	2480	AVG	–11.27	0.660	–10.61	0.087




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039


7.4 Trace data (Peak, Average)

(ch_0)

(Peak)

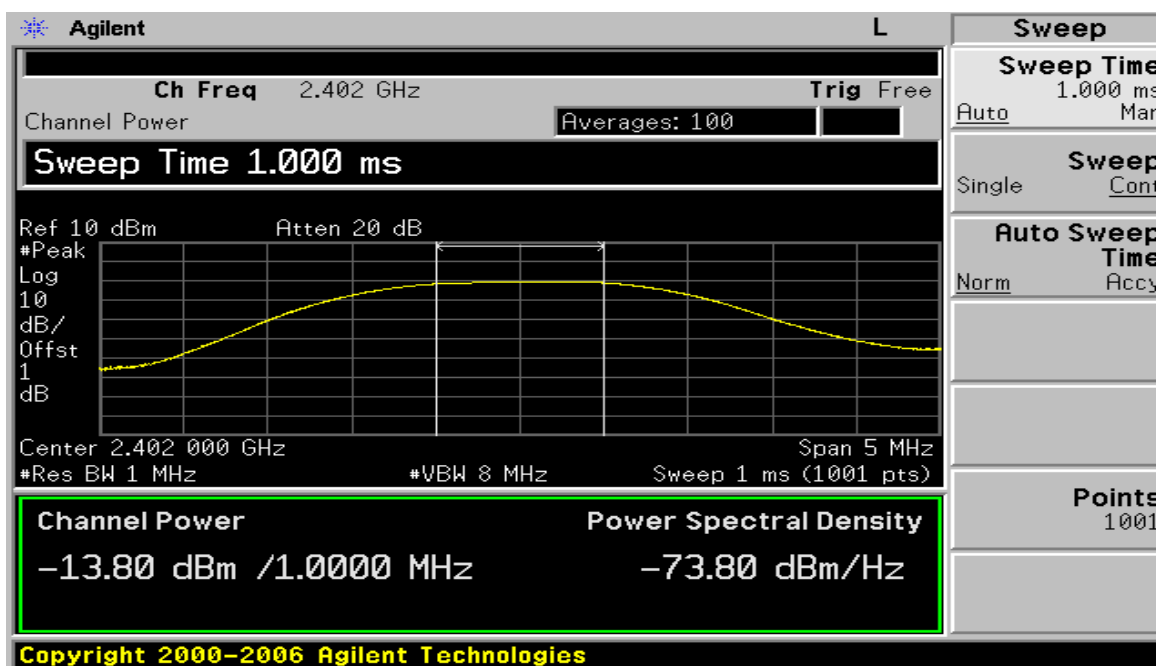

(Avg)

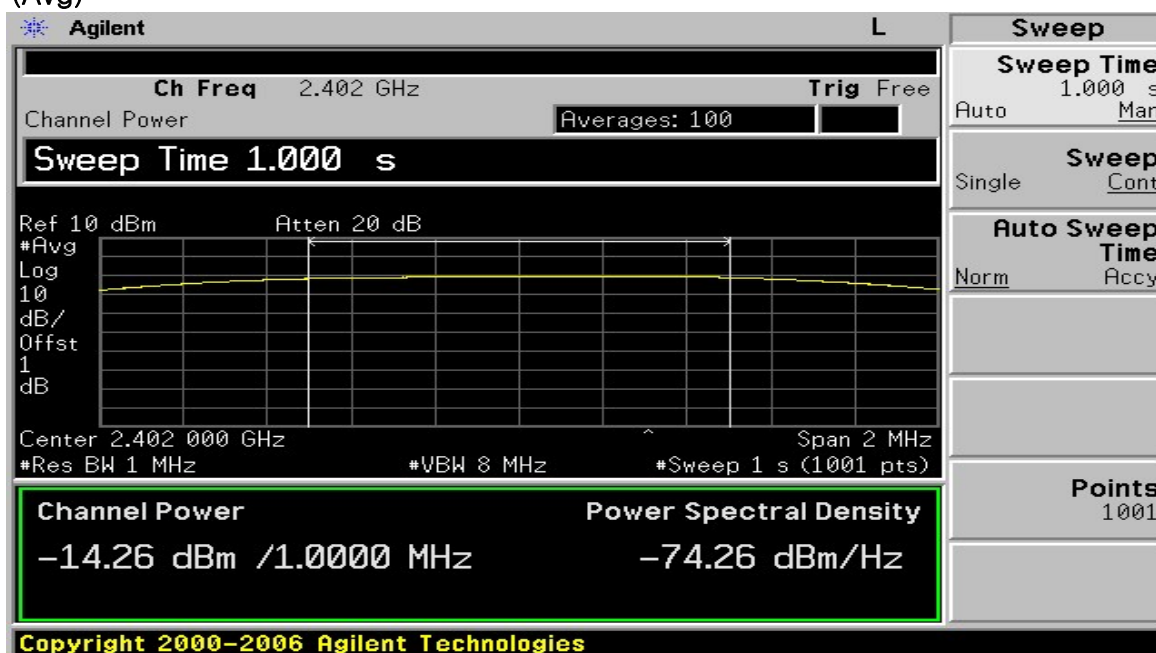




ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel ; +02-31-631-0037 Fax ; +02-31-631-0039

(ch_20)

(Peak)

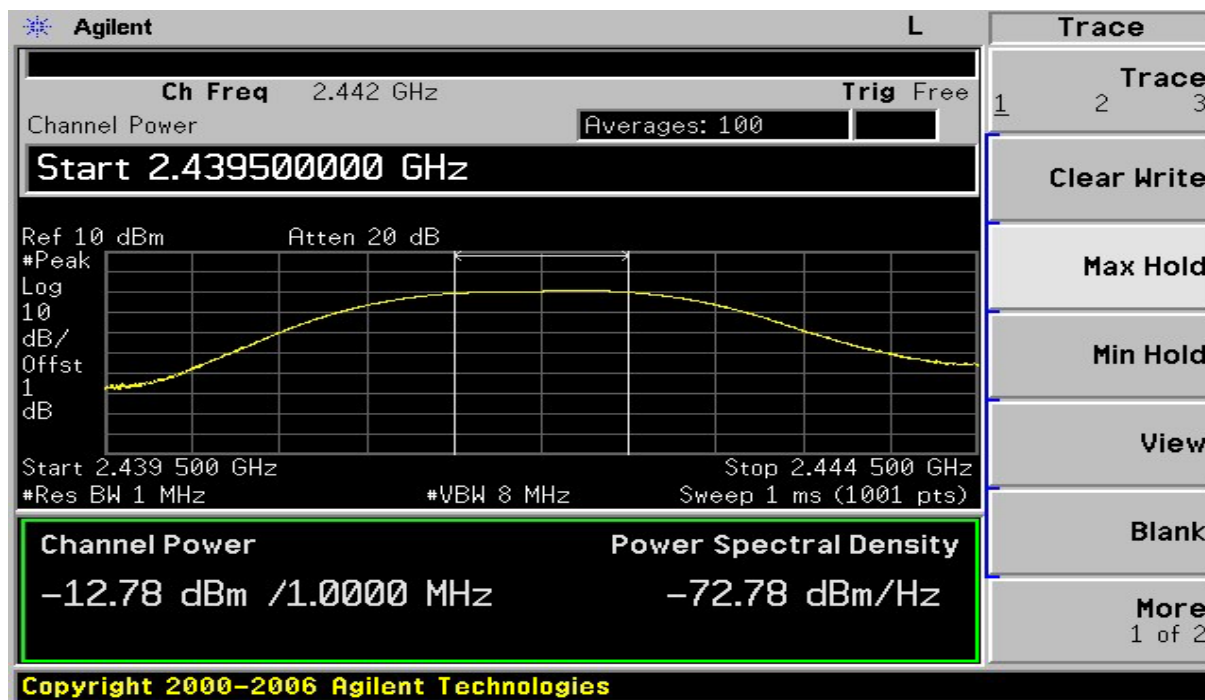

(Avg)

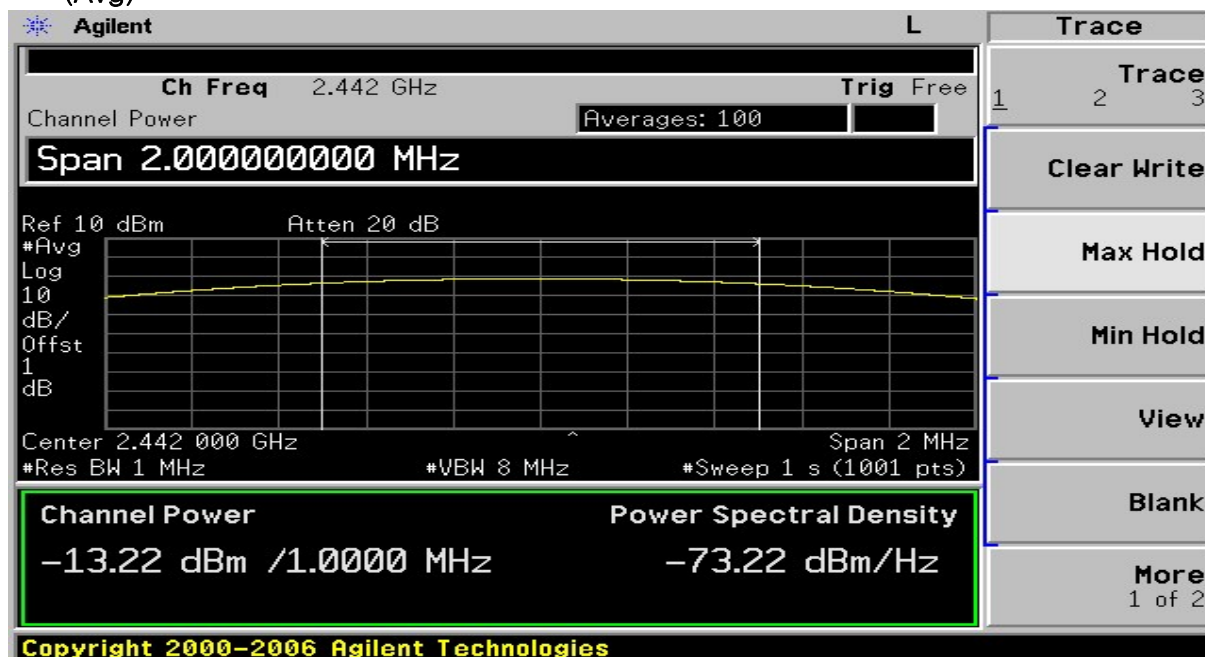




ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

(ch_39)

(Peak)

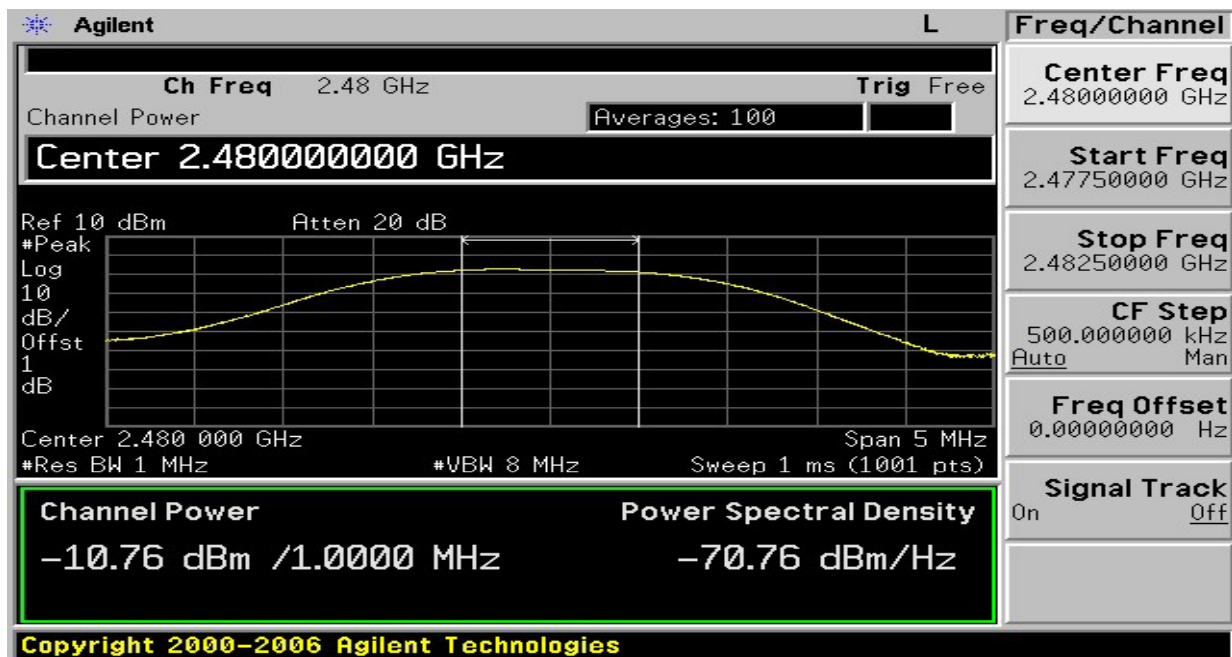

(Avg)

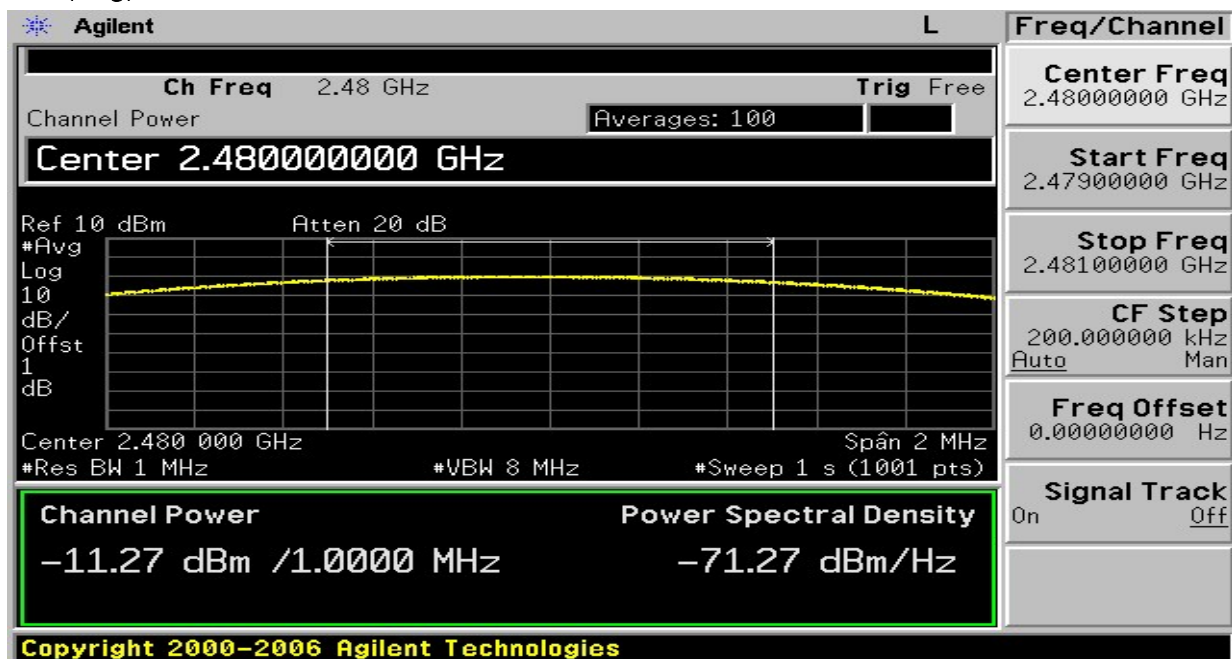

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

8. Maximum power spectral density level in the fundamental emission

8.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 10.2 Method PKPSD (peak PSD)

8.2 Test instruments and measurement setup

The spectrum analyzer is set to as following.

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Limits FCC § 15.247

The peak power density Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E440A	US42041291	2016-01-15
RF Cable	Length: 6cm	—	
—Spectrum Analyzer <=> EUT	Loss: 1.0 dB	—	

8.3 Measurement results

EUT	BT Module	MODEL	ULBM
MODE	DSSS	ENVIRONMENTAL CONDITION	23.0 °C, 43.0 % R.H.
INPUT POWER	5Vd.c.		


CHANNEL	Channel Frequency (MHz)	Measured Power Spectral Density (dBm)	Maximum Permissible Power Density (dBm/3kHz)	Margin
0	2402	-11.61	8.0	19.61
20	2442	-10.58	8.0	18.58
39	2480	-8.62	8.0	16.62




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

8.4 Trace data (ch_0)

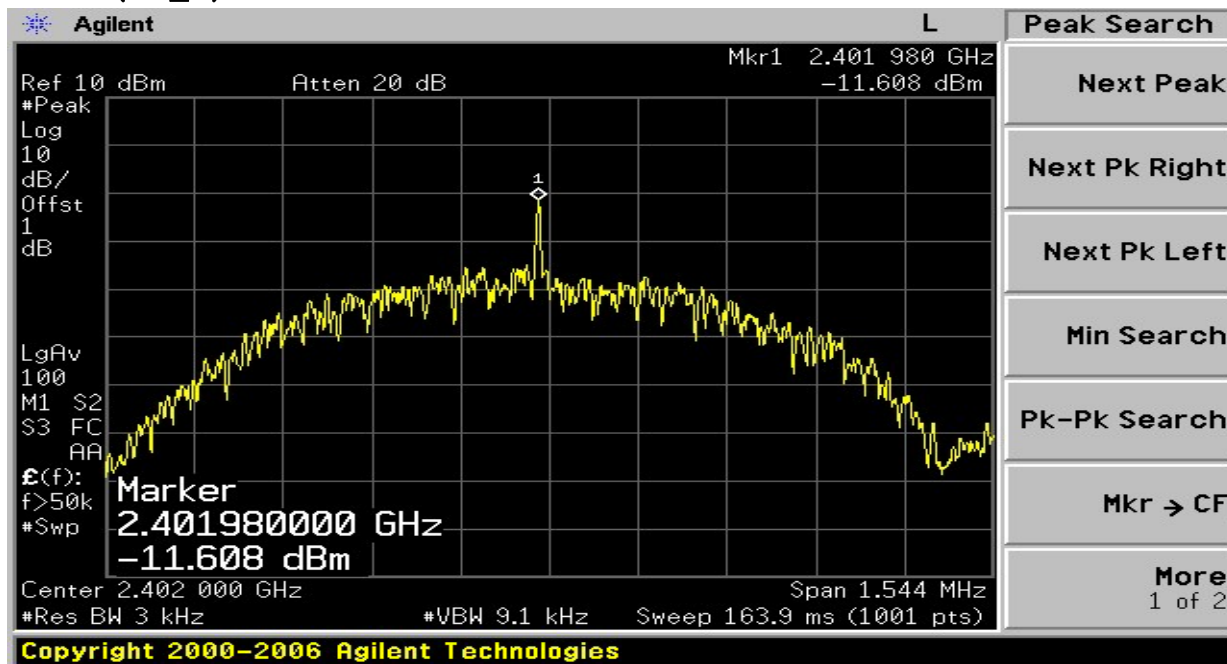

(ch_20)

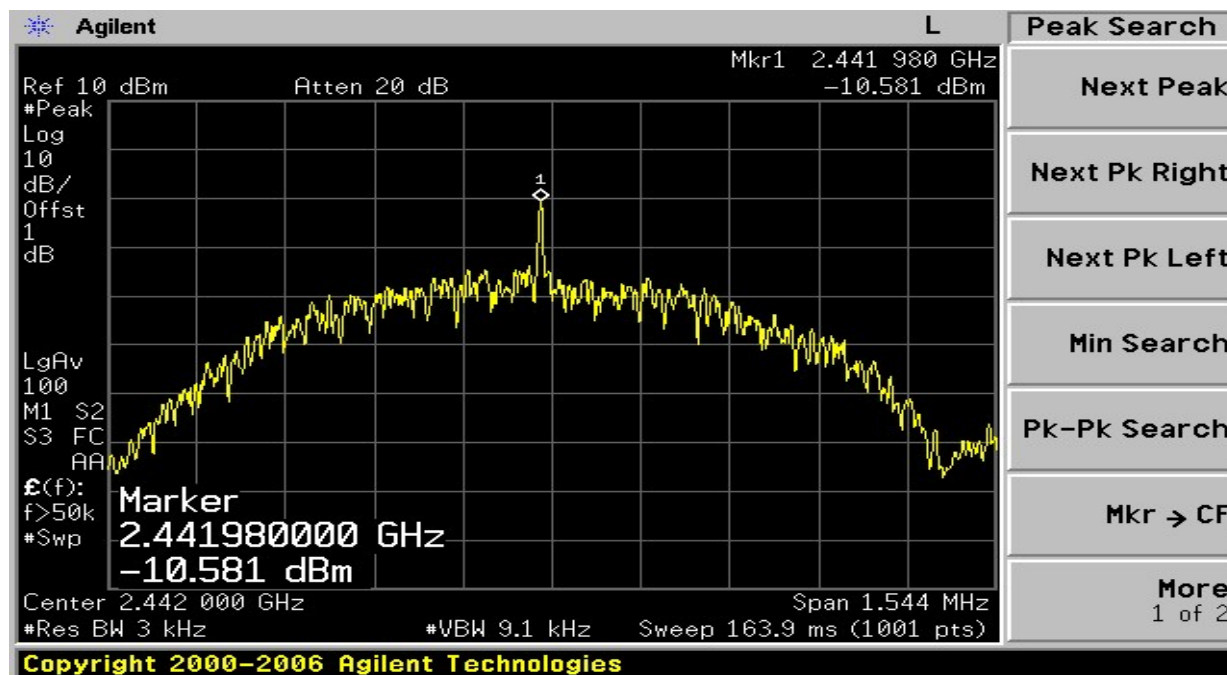




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

(ch_39)

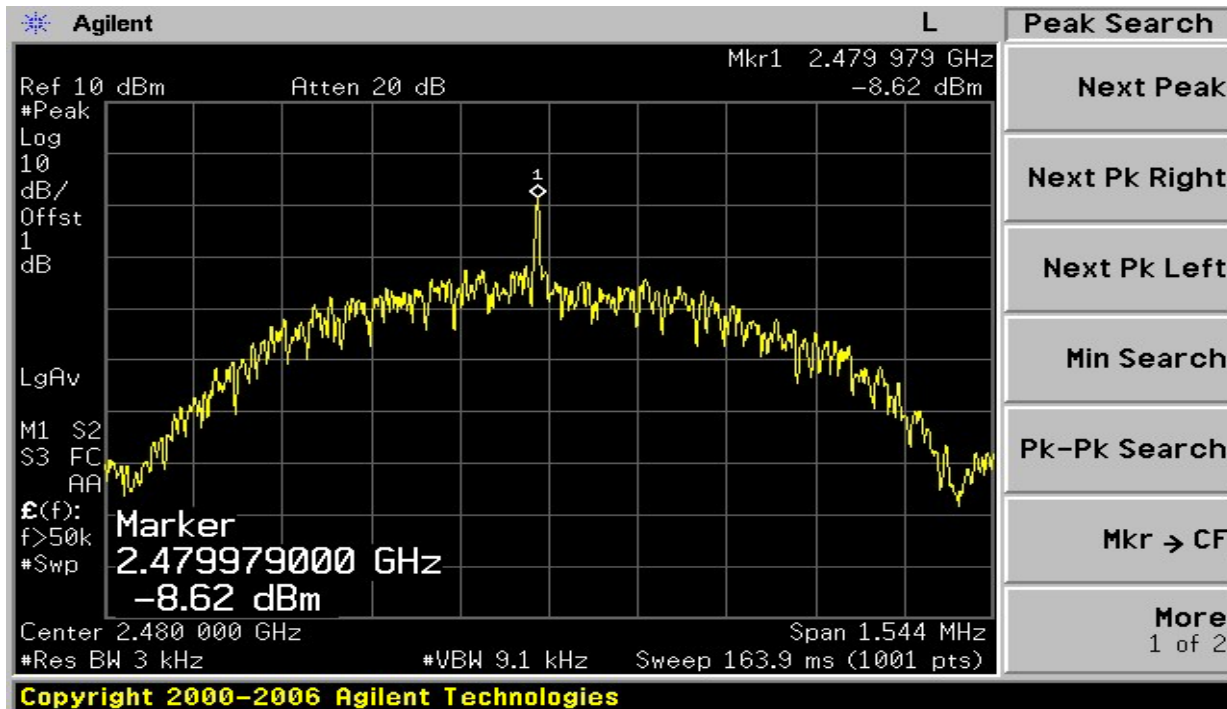

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

9. Emissions in non-restricted frequency bands

9.1 Test procedure

KDB 558074 D01 DTS Meas Guidance V03r03 11.0 Emissions in non-restricted frequency

9.2 Test instruments and measurement setup

The spectrum analyzer is set to as following.

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Limits FCC § 15.247

Band Edge&Out of Emission Test Instruments

Description	Model	Serial Number	Cal. Due Date
Spectrum Analyzer	E4440A	US42041291	2016-01-15
Spectrum Analyzer	FSV40	100939	2016-01-19
RF Cable	Length: 6cm		—
—Spectrum Analyzer <=> EUT	Loss: 1.0dB		—

9.3 Measurement results of band-edge & out of emission

EUT	BT Module	MODEL	ULBM
MODE	DSSS	ENVIRONMENTAL CONDITION	23.0 °C, 43.0 % R.H
INPUT POWER	5Vd.c.		


CHANNEL	Channel Frequency (MHz)	limit	PASS/FAIL
0	2402	20dBc	PASS
39	2480	20dBc	PASS




ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

9.4 Trace data of band-edge & Out of Emission (ch_0)

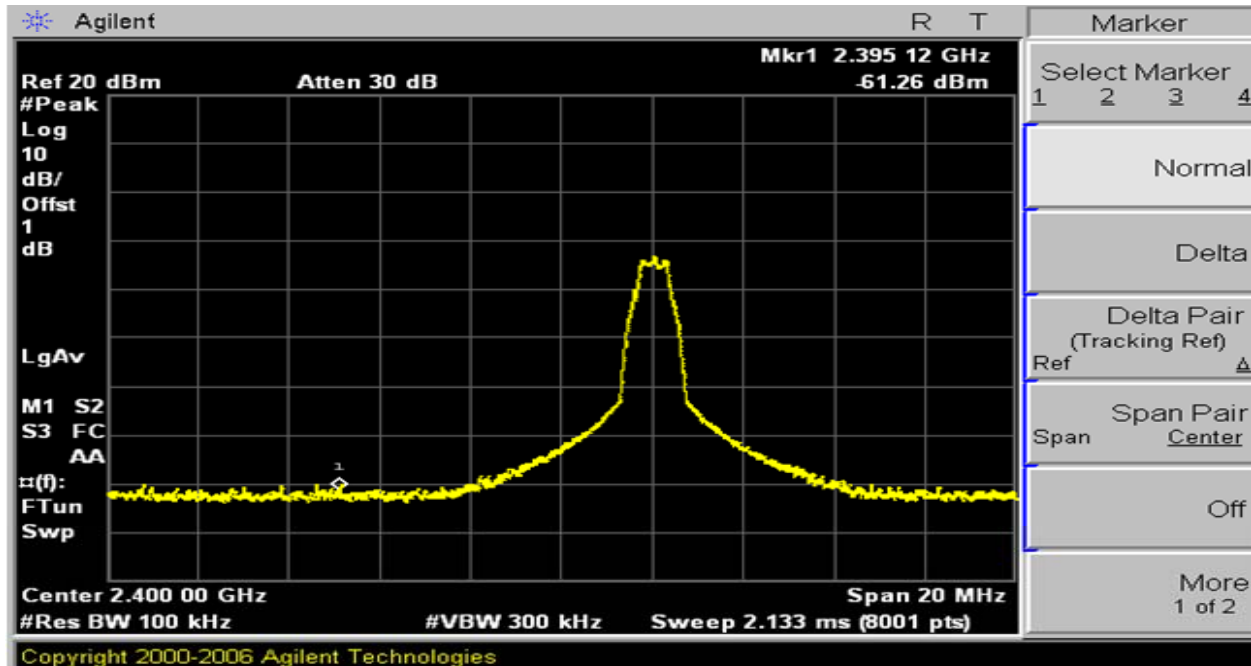

(ch_39)

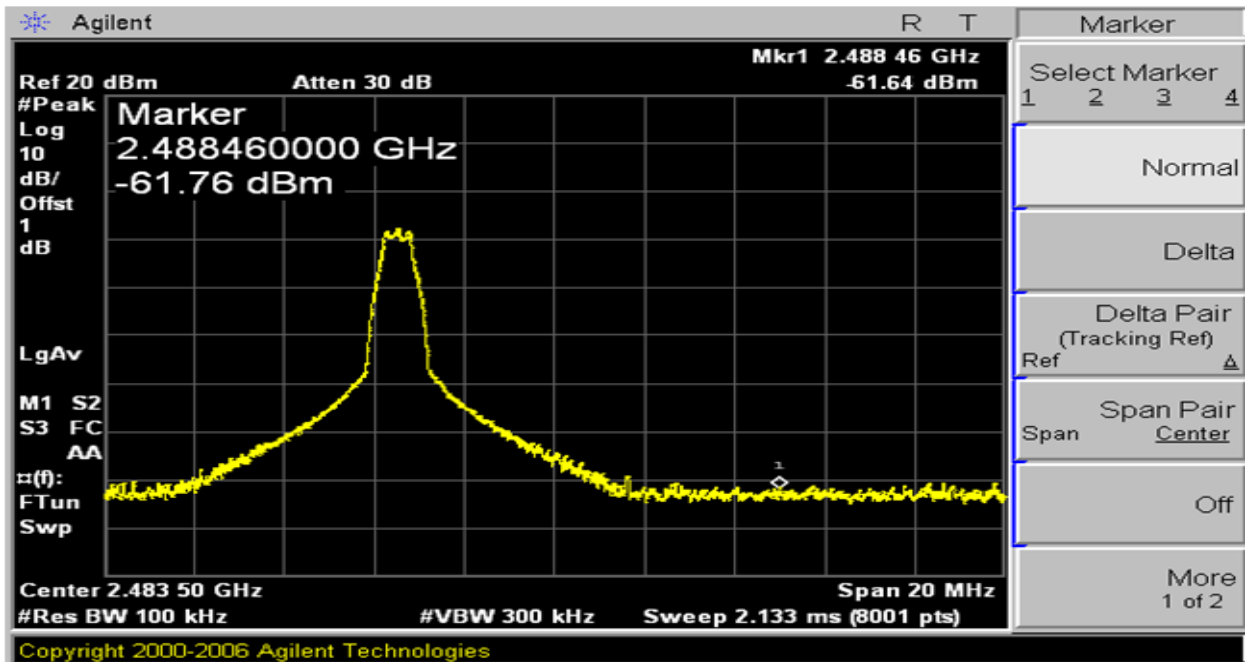



Spectrum

Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz
 Att 30 dB SWT 260 ms VBW 300 kHz Mode Auto Sweep

1Pk Max

M1[1] -49.96 dBm
 19.592510 GHz

M1

CF 13.015 GHz 32001 pts Span 25.97 GHz


Measuring...



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

(ch_20)

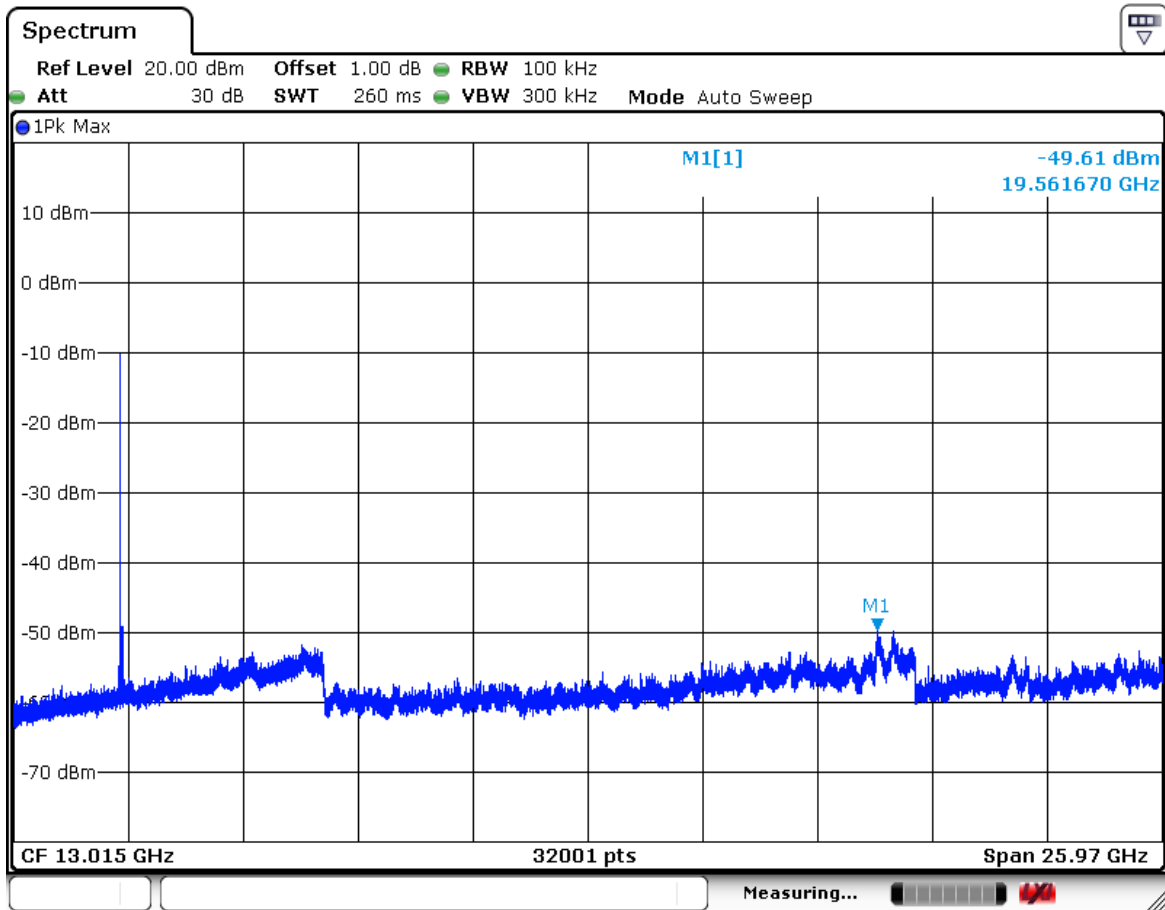




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

(ch_39)

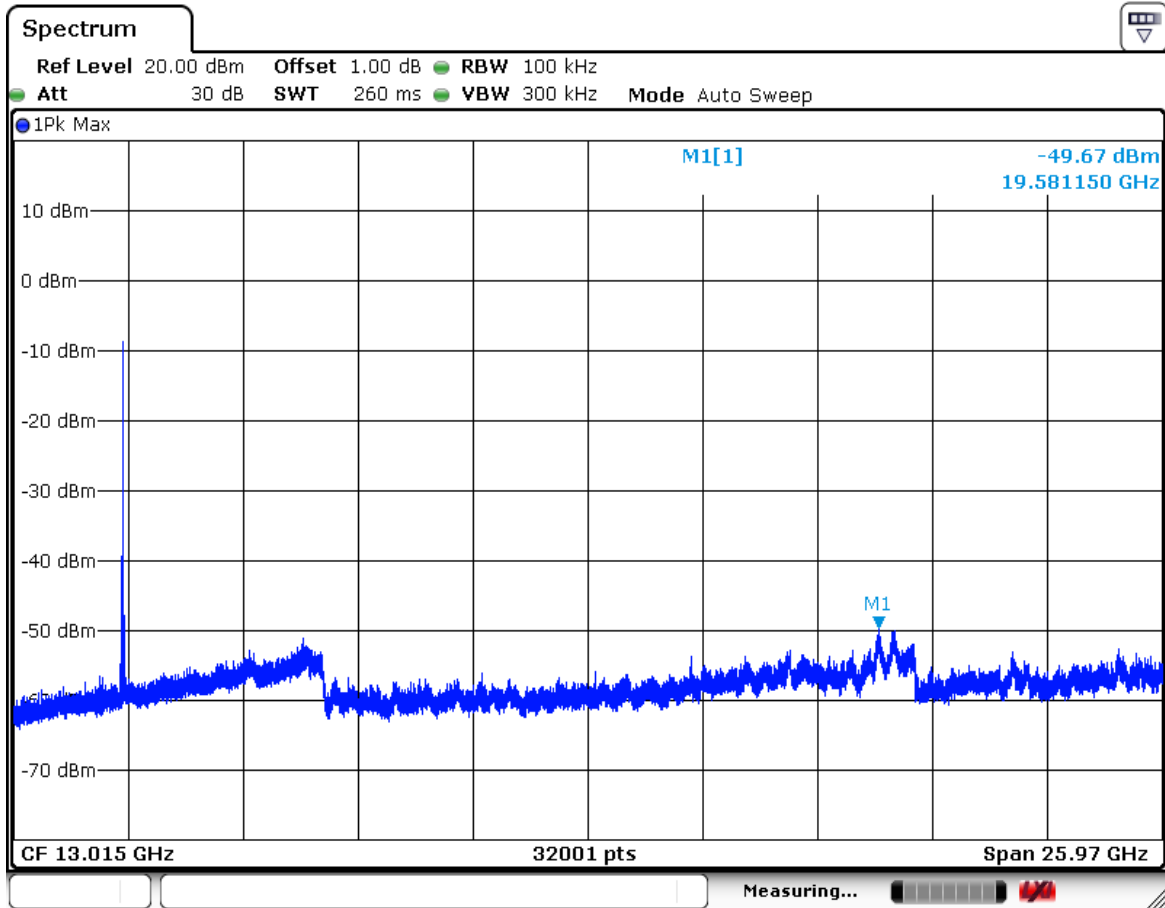

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

10. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC PART 15.205, 15.209 . The test setup was made according to ANSI C 63.4 (2009) & KDB 558074 D01 Semi-anechoic chamber, which allows a 3 m distance measurement. The EUT was placed in the center of styrofoam. turntable. The height of this table was 0.8 m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

10.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	13-Jan-16
Logbicon Antenna	VULB 9168	SCHWARZBECK	193	18-Sep-15
Turn Table	DT3000-2t	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
PREAMPLIFIER	8449B	AGILENT	3008A00595	13-Jan-16
Horn Antenna	BBHA9120D	SCHWARZBECK	469	16-Oct-15
Test Receiver	ESPI7	ROHDE & SCHWARZ	100185	13-Jan-16
Spectrum Analyzer	R3273	ADVANTEST	110600592	13-Jan-16
Turn Table	DT1500-S	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
Pyramidal Horn Antenna	3160-09-01	EST-LINDGREN	102642	14-Nov-15
Antenna Master & Turn table controller	C02000-P	Innco System GmbH	CO2000/642 /28051111/L	-

10.2 Environmental Condition

Below 1 GHz -Test Place : 10 m Semi-anechoic chamber

Bluetooth LE Mode

Temperature (°C) : 21.4 °C

Humidity (% R.H.) : 50.8 % R.H.

Above 1 GHz-Test Place : 3 m Semi-anechoic chamber

Bluetooth LE Mode

Temperature (°C) : 21.4 °C

Humidity (% R.H.) : 58.4 % R.H.

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

10.3 Measurement Instrument setting for Radiated Emission

10.3.1 Frequency range below 1 GHz

Detector : Quasi-Peak

10.3.2 Frequency range above 1 GHz

Peak Power Measurement Procedure (KDB 558074 section 12.2.4)

- a. RBW : 1 MHz , VBW : 3 MHz
- b. Trace mode = max hold
- c. Detector : Peak
- d. Sweep time = auto

Average Power Measurement Procedures (KDB 558074 section 12.2.5.3)

- a. Set analyzer center frequency to the frequency associated with the emission
- b. RBW : 1 MHz , VBW : 1 kHz
- c. Detector : Peak
- d. Sweep time = auto

Note

Band	Duty cycle(%)	Ton (ms)	Ton + Toff (ms)	DCF=10*log(1/Duty) (dB)
Bluetooth	66.0	0.413	0.627	1.80

*This was applied of duty cycle factor for average value because of measured with the EUT transmitting continuously less than 98% duty cycle at its maximum power control level.

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

10.4 Test Data for Bluetooth (BLE)

Test Date : 6-Aug-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
72.00	8.98	V	1.0	11.31	1.47	40.00	21.76	18.24
115.60	13.77	H	3.1	10.55	1.85	43.50	26.17	17.33
141.00	23.90	H	3.0	12.68	2.04	43.50	38.62	4.88
252.10	12.52	H	2.4	11.87	2.71	46.00	27.10	18.90
312.00	10.15	H	2.0	13.76	3.00	46.00	26.92	19.08
538.00	14.11	V	1.0	18.55	3.95	46.00	36.61	9.39
564.00	11.89	V	1.0	19.14	4.07	46.00	35.10	10.90
Remark	<p>H : Horizontal, V : Vertical TEST MODE : Bluetooth - LE (CH : 20 - 2 442 MHz)</p> <p>*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)</p> <p>*CL = Cable Loss(In case of below 1 000 MHz)</p> <p>*Result Value = Reading + Ant Factor + Cable loss</p> <p>*The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.</p>							

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

10.4-1 Test Data for Bluetooth (LE)

Test Date : 6-Aug-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2316.20	26.06	H	1.0	26.47	5.62	0.00	74.00	58.15	15.85
2316.20	24.51	V	1.0	26.47	5.62	0.00	74.00	56.60	17.40
2390.00	25.93	H	1.0	26.59	5.62	0.00	74.00	58.14	15.86
2390.00	24.48	V	1.0	26.59	5.62	0.00	74.00	56.69	17.31
4804.00	46.38	H	1.0	30.72	-24.20	0.00	74.00	52.90	21.10
4804.00	46.31	V	1.0	30.72	-24.20	0.00	74.00	52.83	21.17
AV(RBW: 1 MHz VBW: 1 kHz)									
2316.20	13.05	H	1.0	26.47	5.62	1.80	54.00	46.94	7.06
2316.20	13.03	V	1.0	26.47	5.62	1.80	54.00	46.92	7.08
2390.00	13.08	H	1.0	26.59	5.62	1.80	54.00	47.09	6.91
2390.00	12.99	V	1.0	26.59	5.62	1.80	54.00	47.00	7.00
4804.00	33.42	H	1.0	30.72	-24.20	1.80	54.00	41.74	12.26
4804.00	33.45	V	1.0	30.72	-24.20	1.80	54.00	41.77	12.23
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth – LE (CH : 0 – 2 402 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								
	FYI a. Ton Time : 0.413 ms b. duty cycle : 66 % c. DCF : 1.80 dB								

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

10.4-2 Test Data for Bluetooth (BLE)

Test Date : 6-Aug-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
4884.00	46.36	H	1.0	30.86	-23.96	0.00	74.00	53.25	20.75
4884.00	46.28	V	1.0	30.86	-23.96	0.00	74.00	53.17	20.83
AV(RBW: 1 MHz VBW: 1 kHz)									
4884.00	33.26	H	1.0	30.86	-23.96	1.71	54.00	41.86	12.14
4884.00	33.16	V	1.0	30.86	-23.96	1.71	54.00	41.76	12.24
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth – LE (CH : 20 – 2 442 MHz)								
	*The TX signal wasn't detected from 3th harmonics.								
	*Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position)								
	*Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction								
	FYI								
	a. Ton Time : 0.413 ms								
	b. duty cycle : 66 %								
	c. DCF : 1.80 dB								

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

10.4-3 Test Data for Bluetooth (BLE)

Test Date : 6-Aug-15

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Duty Cycle Correction(dB)	Result Value		
				Ant Factor (dB)	Cable (dB)		Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
PEAK(RBW: 1 MHz VBW: 3 MHz)									
2483.50	27.13	H	1.0	26.74	5.80	0.00	74.00	59.67	14.33
2483.50	25.59	V	1.0	26.74	5.80	0.00	74.00	58.13	15.87
2492.10	24.24	H	1.0	26.76	5.80	0.00	74.00	56.80	17.20
2492.10	24.10	V	1.0	26.76	5.80	0.00	74.00	56.66	17.34
4960.00	46.34	H	1.0	30.98	-23.87	0.00	74.00	53.45	20.55
4960.00	47.11	V	1.0	30.98	-23.87	0.00	74.00	54.22	19.78
AV(RBW: 1 MHz VBW: 1 kHz)									
2483.50	15.69	H	1.0	26.74	5.80	1.80	54.00	50.03	3.97
2483.50	13.84	V	1.0	26.74	5.80	1.80	54.00	48.18	5.82
2492.10	15.53	H	1.0	26.76	5.80	1.80	54.00	49.89	4.11
2492.10	12.95	V	1.0	26.76	5.80	1.80	54.00	47.31	6.69
4960.00	34.14	H	1.0	30.98	-23.87	1.80	54.00	43.05	10.95
4960.00	34.04	V	1.0	30.98	-23.87	1.80	54.00	42.95	11.05
Remark	H : Horizontal, V : Vertical TEST MODE : Bluetooth – LE (CH : 39 – 2 480 MHz)								
	*The TX signal wasn't detected from 3th harmonics. *Checked in all 3 axis and the maximum measured data were reported.(Worst data is Z axis of position) *Total = Reading Value + Antenna Factor + Cable Loss – Amp Gain + Duty Cycle Correction FYI a. Ton Time : 0.413 ms b. duty cycle : 66 % c. DCF : 1.80 dB								



ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

10.4-4 Restricted Band Edges for Bluetooth (LE)

Band Edges(CH Low)

Detector mode:Peak


Polarity:Horizontal

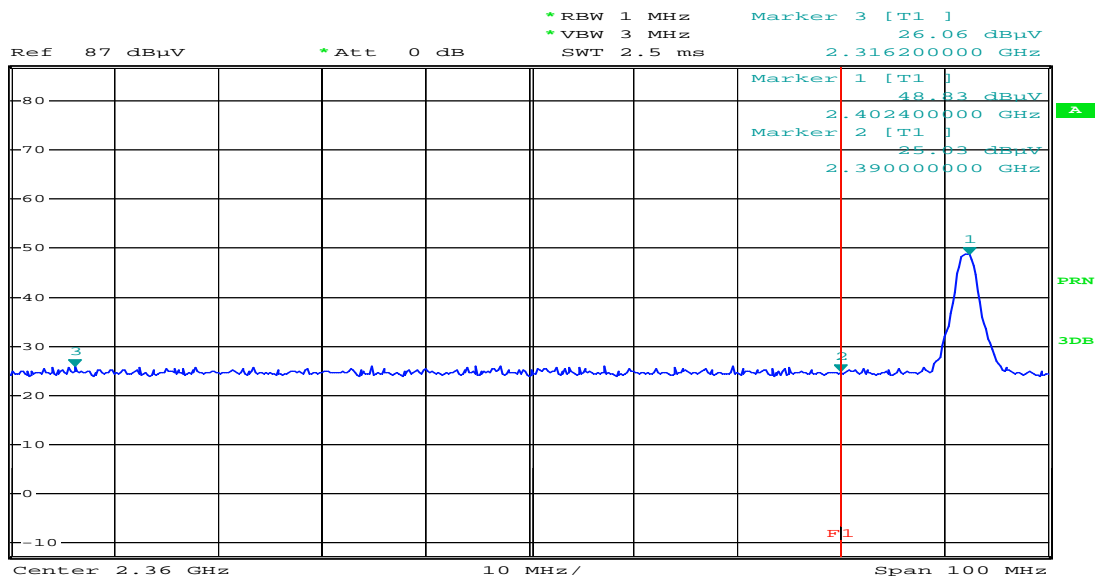

Comment: ESTC-15-01463 2402 MHz PK HOR
Date: 6.AUG.2015 12:23:37

Detector mode:Average

Polarity:Horizontal

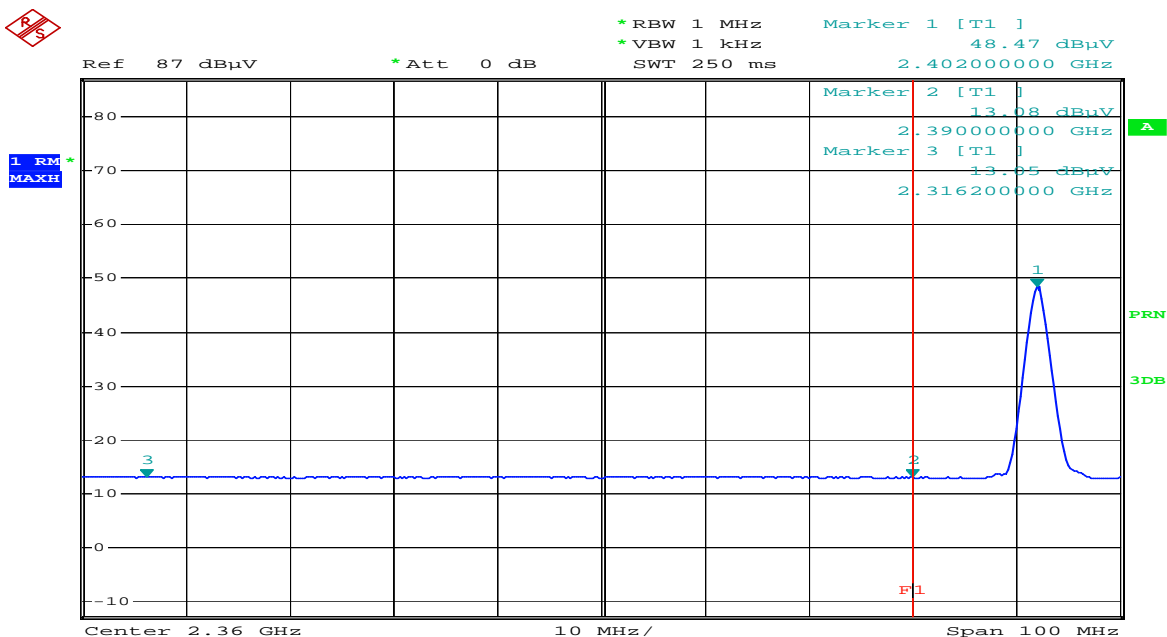

Comment: ESTC-15-01463 2402 MHz AV HOR
Date: 6.AUG.2015 12:26:30


ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

Band Edges(CH Low)

Detector mode:Peak


Polarity:Vertical

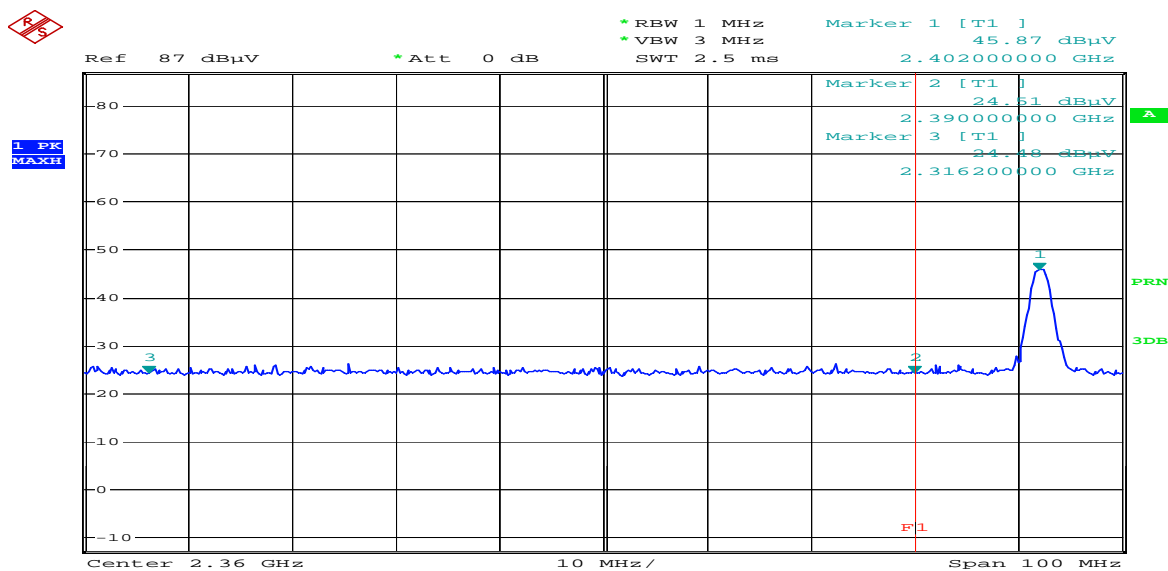

Comment: ESTC-15-01463 2402 MHz PK VER
Date: 6.AUG.2015 12:38:34

Detector mode:Average

Polarity:Vertical

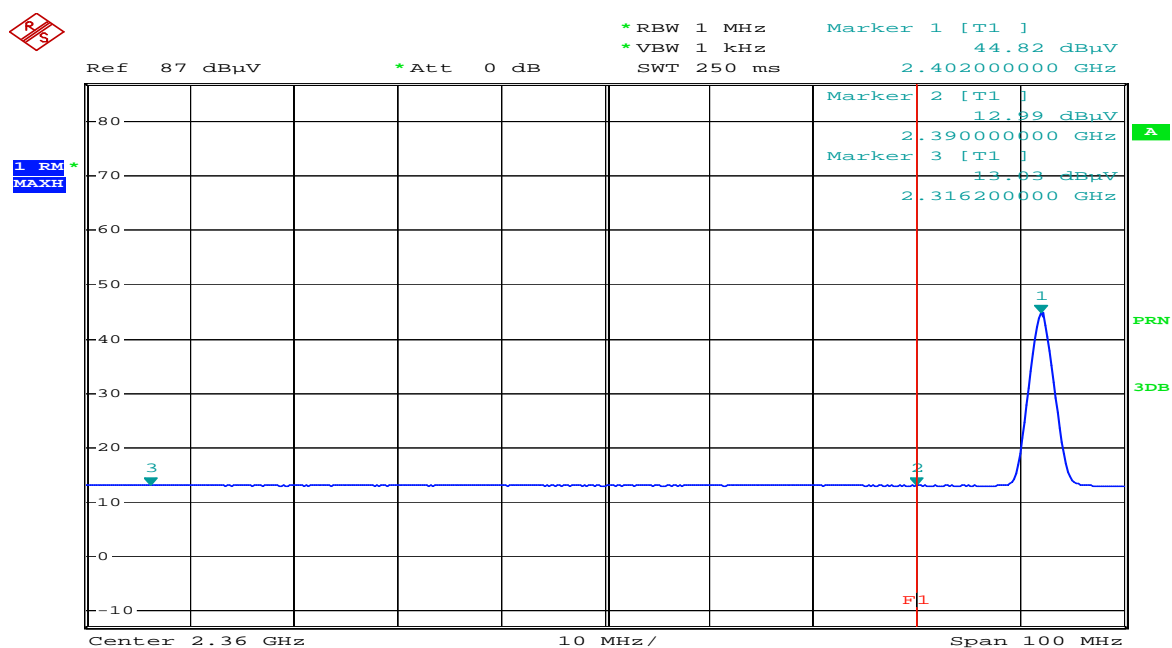


Comment: ESTC-15-01463 2402 MHz AV VER
Date: 6.AUG.2015 12:29:56

Band Edges(CH High)

Detector mode:Peak


Polarity:Horizontal

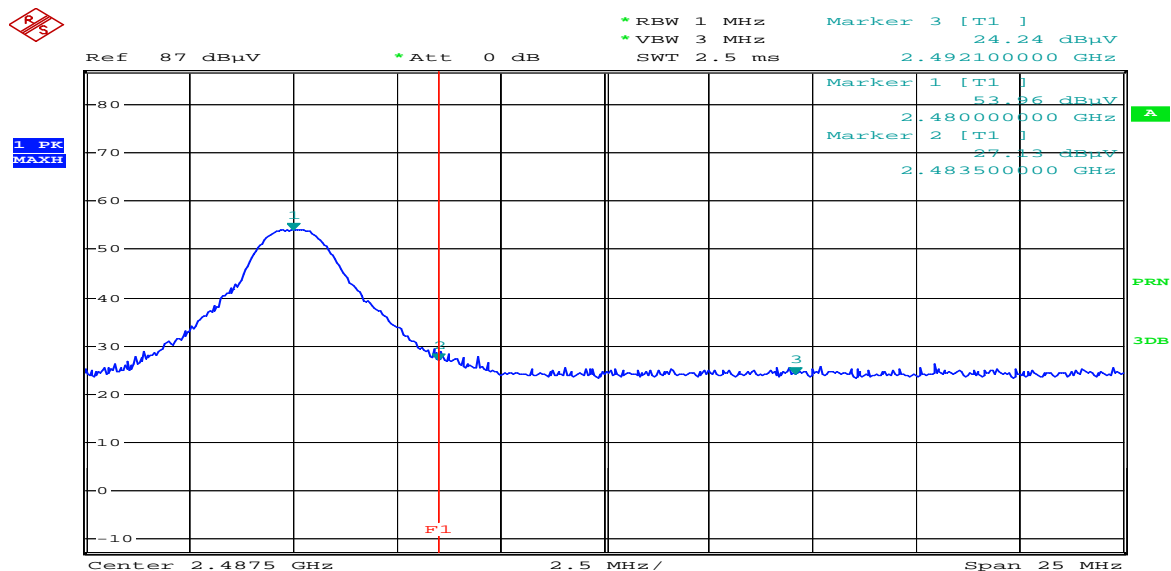

Comment: ESTC-15-01463 2480 MHz PK HOR
Date: 6.AUG.2015 14:13:21

Detector mode:Average

Polarity:Horizontal

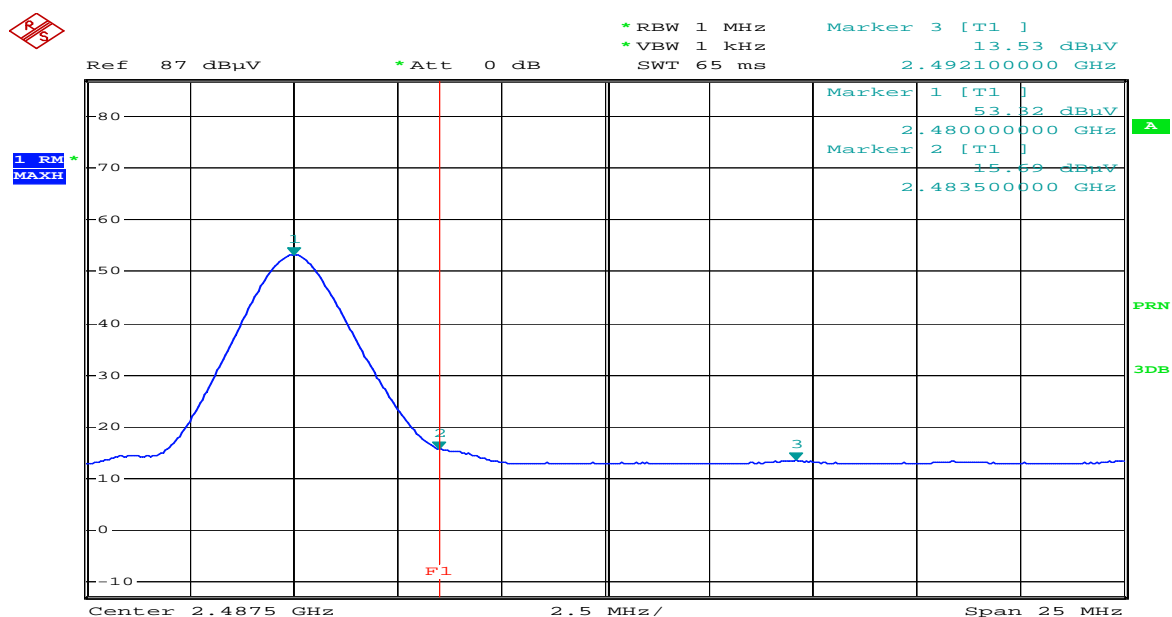

Comment: ESTC-15-01463 2480 MHz AV HOR
Date: 6.AUG.2015 14:09:04




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

Band Edges(CH High)

Detector mode:Peak


Polarity:Vertical

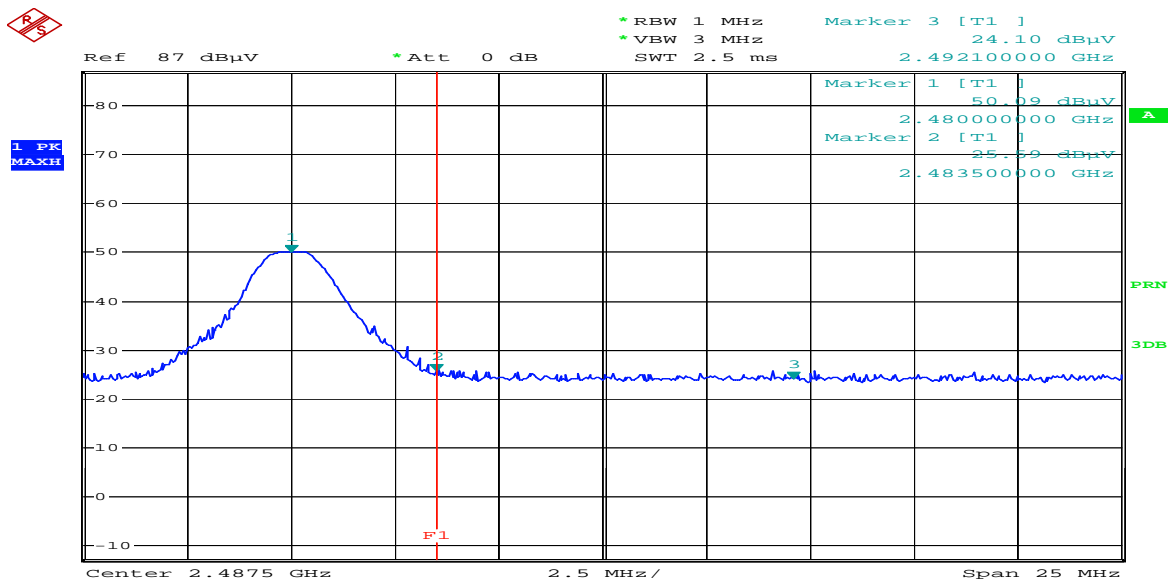

Comment: ESTC-15-01463 2480 MHz PK VER
Date: 6.AUG.2015 14:17:32

Detector mode:Average

Polarity:Vertical

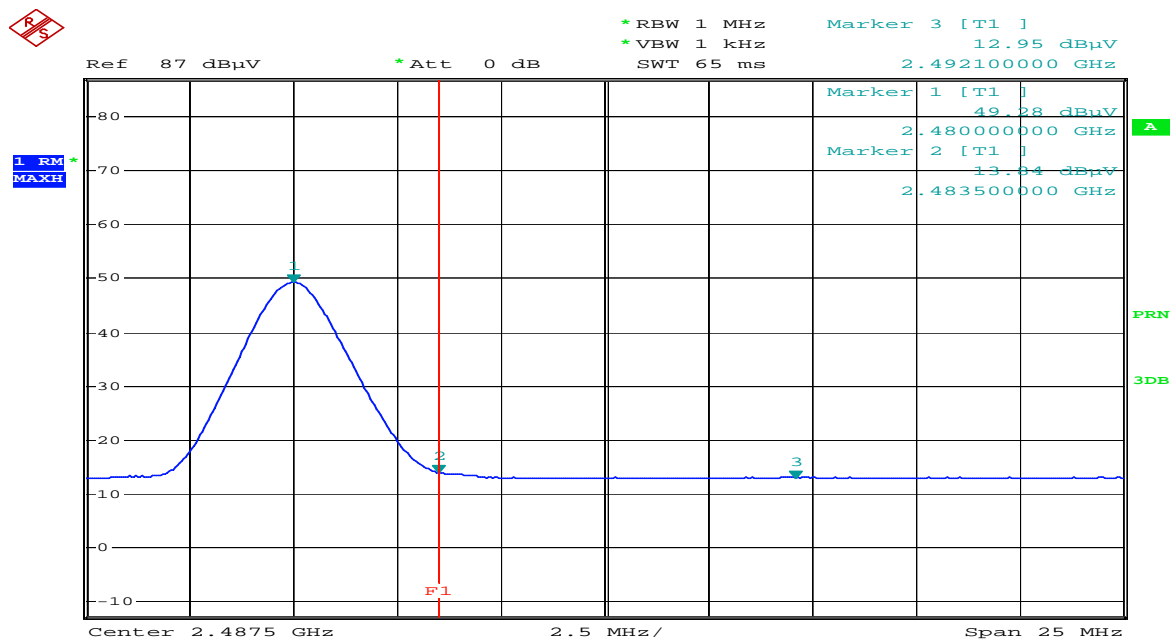

Comment: ESTC-15-01463 2480 MHz AV VER
Date: 6.AUG.2015 14:22:58

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-031-0037 Fax : +02-31-031-0039

11. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC PART 15.207. The test setup was made according to ANSI C 63.4 (2009) in a shielded room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

11.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST RECEIVER	ESPI	Rohde & Schwarz	100005	13-Jan-16
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	13-Jan-16
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	13-Jan-16

11.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 23.4 °C

Humidity (% R.H.) : 51.6 % R.H.

**ESTECH CO., Ltd.**

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-0037 Fax : +82-31-631-0039

11.3 Test Data for Bluetooth (BLE)

Test Date : 6-Aug-15

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dBμV)	Reading (dBμV)	Result (dBμV)	Limit (dBμV)	Reading (dBμV)	Result (dB)
0.15	0.12	0.12	H	66.00	35.67	35.91	56.00	21.00	21.24
0.17	0.10	0.12	N	65.06	42.56	42.78	55.06	24.04	24.26
0.58	0.12	0.14	H	56.00	42.37	42.63	46.00	26.86	27.12
0.59	0.10	0.14	N	56.00	42.56	42.80	46.00	27.22	27.46
1.45	0.11	0.14	N	56.00	34.63	34.88	46.00	22.10	22.35
1.54	0.12	0.14	H	56.00	35.35	35.61	46.00	22.81	23.07
2.47	0.11	0.14	N	56.00	34.51	34.76	46.00	19.29	19.54
3.35	0.12	0.14	H	56.00	33.98	34.24	46.00	18.57	18.83
12.95	0.14	0.16	H	60.00	33.36	33.66	50.00	19.51	19.81
13.40	0.11	0.15	N	60.00	32.41	32.67	50.00	18.45	18.71
19.84	0.11	0.14	N	60.00	36.04	36.29	50.00	21.51	21.76
20.91	0.16	0.21	H	60.00	36.67	37.04	50.00	22.60	22.97
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								




ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039


12. Photographs of test setup

12.1. Setup for Radiated Test : (30 ~ 1 000) MHz

[Front]

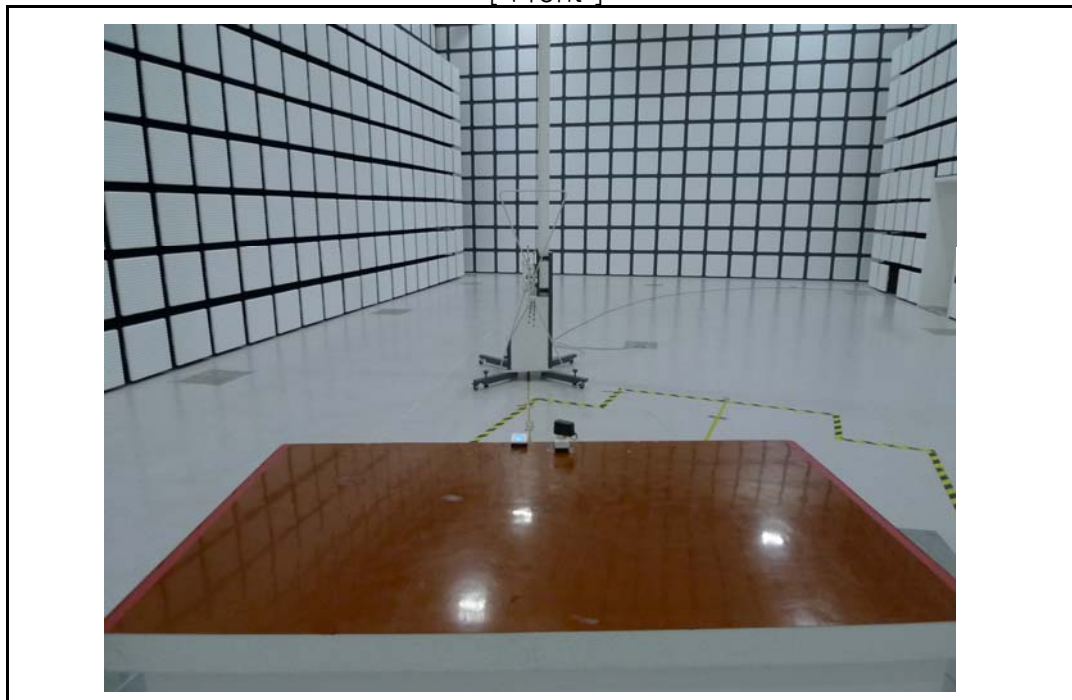

[Rear]

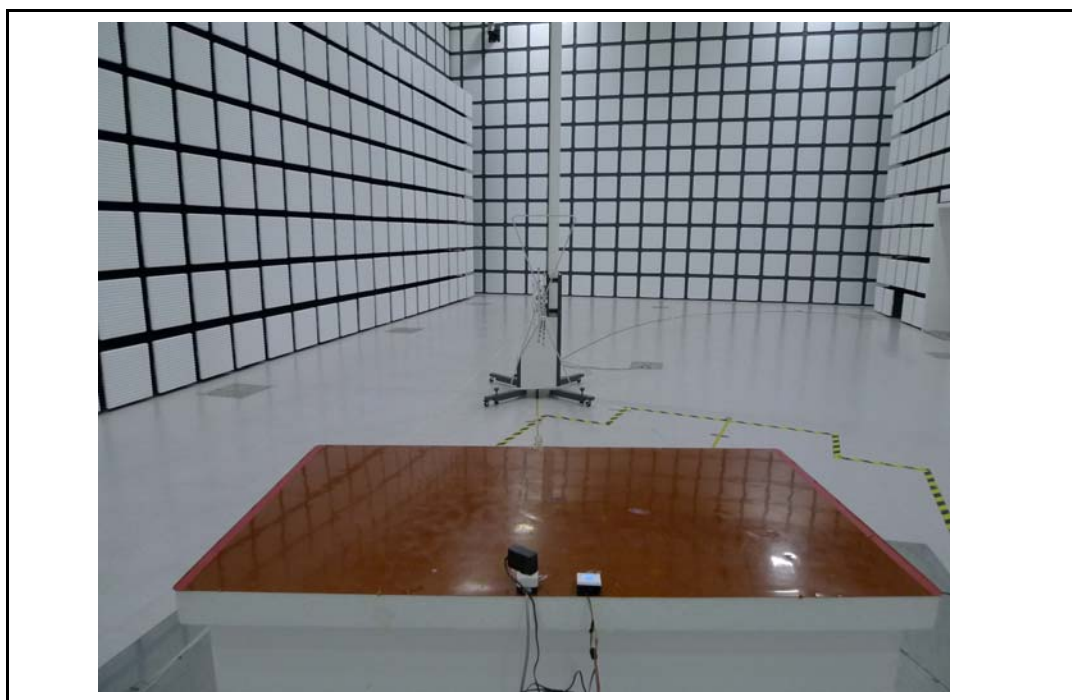



ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +82-31-631-8037 Fax : +82-31-631-8039

12.2.Setup for Radiated Test : Above 1 GHz

[Front]



[Rear]

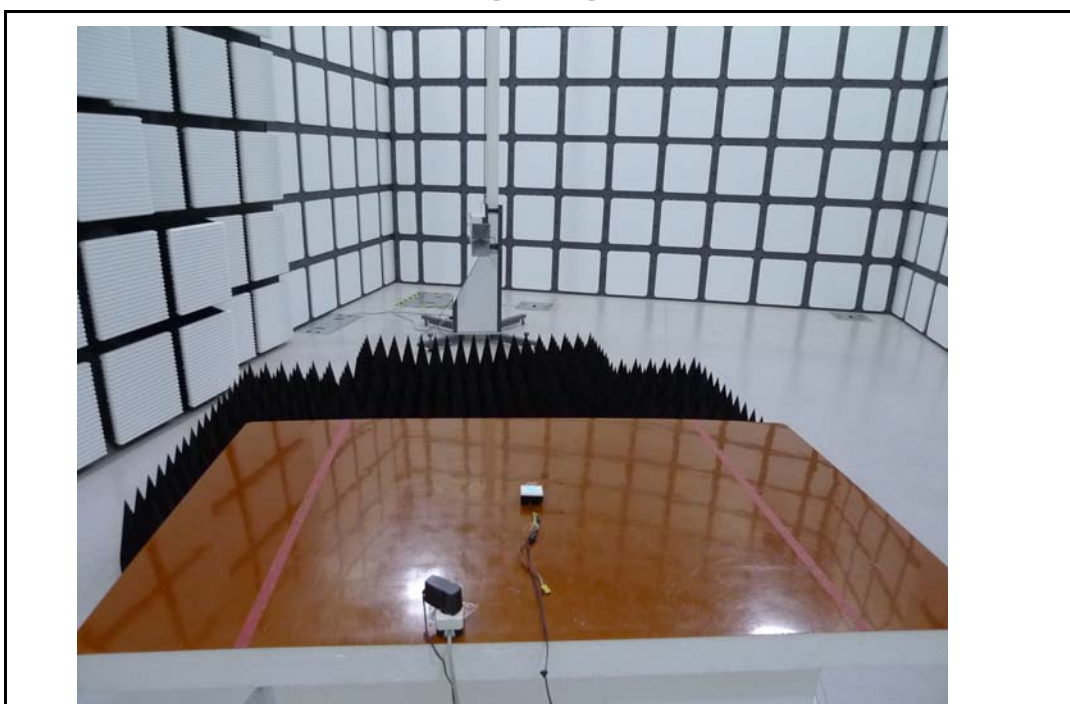



ESTECH CO., Ltd.

347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

12.3. Setup for Conducted Test : (0.15 ~ 30) MHz

[Front]



[Rear]





ESTECH CO., Ltd.


347-69, Jungbu-daero 147beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do 467-811, R. O. Korea
Tel : +02-31-631-0037 Fax : +02-31-631-0039

12.4. Photographs of EUT

[Front]




[Rear]

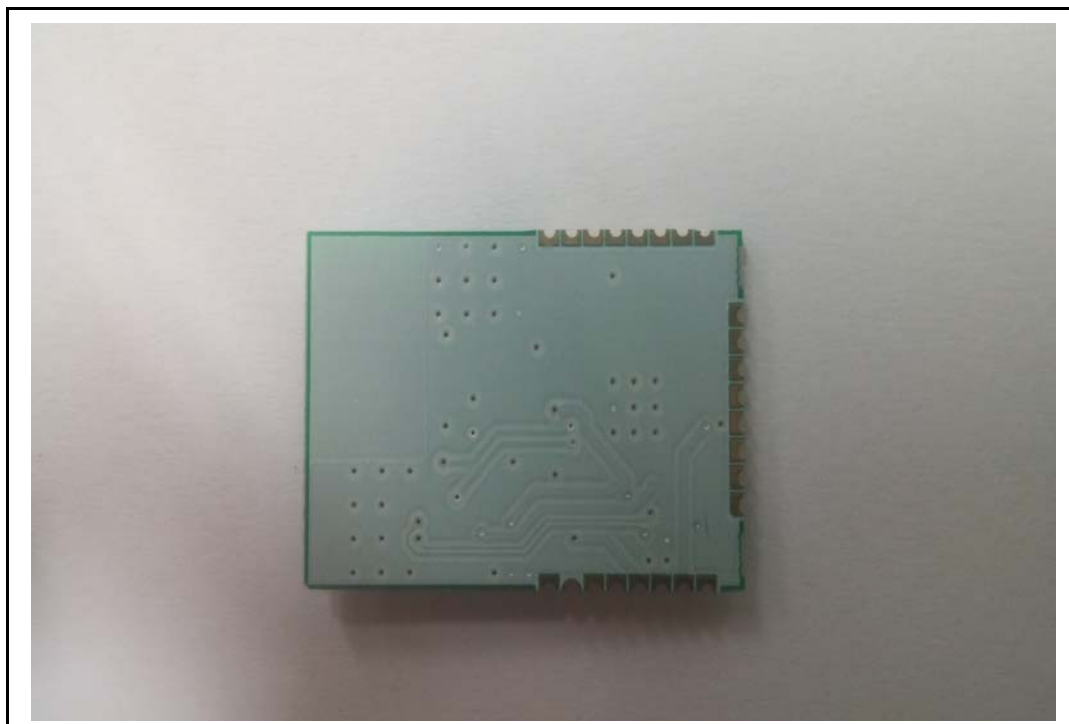


Appendix 1. Special diagram for Bluetooth (LE)

* HOT LINE

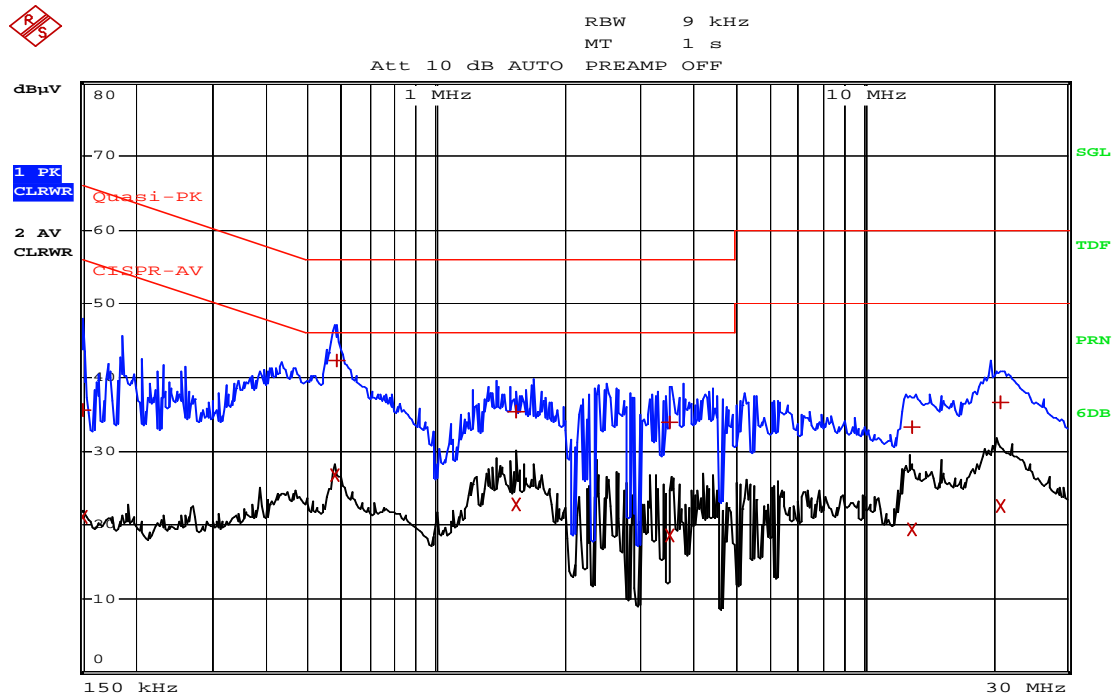

Comment: ESTC-15-01463 HOT
Date: 6.AUG.2015 16:44:52

* NEUTRAL LINE

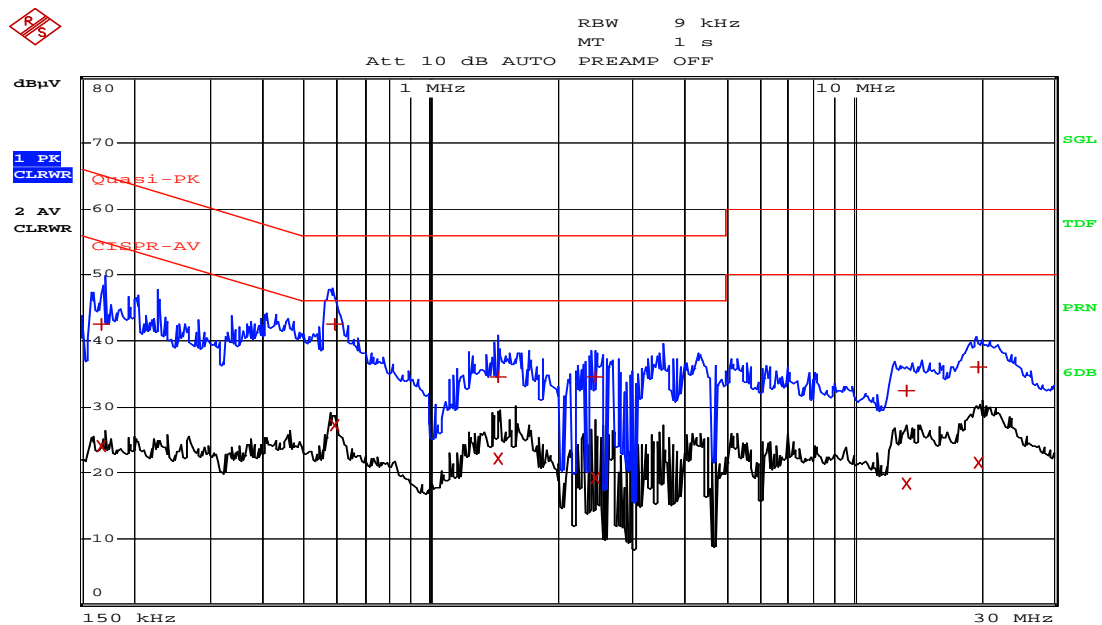

Comment: ESTC-15-01463 NEUTRAL
Date: 6.AUG.2015 16:50:02

Appendix 2. Antenna Requirement

1. Antenna Requirement

1.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.204

1.2 Antenna Connected Construction

The antenna types used in this product are Intergrated Chip Antenna . The maximum Gain of this antenna is 3.5 dBi.