

TEST REPORT



Applicant	Elemental Path Inc
Address	261 west 35th Street. Suite 1004, New York, NY, United States.

Manufacturer or Supplier	Six Star(Hong Kong) Limited
Address	Suite 508, inter-continental Plaza 94 Granville Rd, Tsimshatsui East Kowloon, Hong Kong
Product	Cognitoys Green Dino
Additional Name	Cognitoys Blue Dino, Cognitoys Pink Dino
Brand Name	Cognitoys
Model	88259
Additional Model & Model Difference	88260, 88261, See Items 3.1
Date of tests	Nov. 25, 2015 ~ Dec. 07, 2015

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Blue Zheng Project Engineer / EMC Department	Approved by Chris Chen Assistant Manager / EMC Department
	 Date: Dec. 07, 2015

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES.....	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4 DESCRIPTION OF SUPPORT UNITS.....	10
4 TEST TYPES AND RESULTS.....	11
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 6DB BANDWIDTH MEASUREMENT.....	26
4.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	26
4.2.2 TEST INSTRUMENTS.....	26
4.2.3 TEST PROCEDURE.....	26
4.2.4 DEVIATION FROM TEST STANDARD	27
4.2.5 TEST SETUP.....	27
4.2.6 EUT OPERATING CONDITIONS	27
4.2.7 TEST RESULTS	28
4.3 CONDUCTED OUTPUT POWER	31
4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	31
4.3.2 TEST SETUP.....	31
4.3.3 TEST INSTRUMENTS.....	31
4.3.4 TEST PROCEDURES	32
4.3.5 DEVIATION FROM TEST STANDARD	32
4.3.6 EUT OPERATING CONDITIONS	32
4.3.7 TEST RESULTS	33



4.3.7.1	MAXIMUM PEAK OUTPUT POWER	33
4.3.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	34
4.4	POWER SPECTRAL DENSITY MEASUREMENT	35
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	35
4.4.2	TEST SETUP	35
4.4.3	TEST INSTRUMENTS.....	35
4.4.4	TEST PROCEDURE	35
4.4.5	DEVIATION FROM TEST STANDARD	35
4.4.6	EUT OPERATING CONDITION	36
4.4.7	TEST RESULTS	36
4.5	OUT OF BAND EMISSION MEASUREMENT	39
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	39
4.5.2	TEST SETUP	39
4.5.3	TEST INSTRUMENTS.....	39
4.5.4	TEST PROCEDURE	39
4.5.5	DEVIATION FROM TEST STANDARD	40
4.5.6	EUT OPERATING CONDITION	40
4.5.7	TEST RESULTS	41
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	45
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	46



Test Report No.: RF151112N058

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF151112N058	Original release	Dec. 07, 2015

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered by Battery
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Unique antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	4.84dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Cognitoys Green Dino
ADDITIONAL NAME	Cognitoys Blue Dino, Cognitoys Pink Dino
MODEL NO.	88259
ADDITIONAL MODELS	88260, 88261
FCC ID	2AFTP-CGT10011
NOMINAL VOLTAGE	DC 6V(1.5V*AA*4) From Battery
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20)
PEAK POWER	WLAN: 3.71dBm (Maximum peak Power)
ANTENNA TYPE	Ceramic Antenna, 2.0dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (20MHz)	1TX/1RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Additional models 88260, 88261 are identical with the test model 88259 except the color of the appearance and model number for trading purpose.
5. Please refer to the EUT photo document (Reference No.: 151112N058) for detailed product photo.

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	Powered by battery with WIFI function

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1	OFDM	BPSK	6.0	X

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0	X
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X

BANDEDGE MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 55%RH	DC 6V From Battery	Sen He
RE≥1G	25deg. C, 55%RH	DC 6V From Battery	Sen He
PLC	N/A	N/A	N/A
APCM	20deg. C, 55%RH	DC 6V From Battery	Blue Zheng



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

558074 D01 DTS Meas Guidance v03r04

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(VoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 27,15	Apr. 26,16
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr. 23,15	Apr. 22,16
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Horn Antenna	ETS-Lindgren	3117	00062558	May 30,14	May 29,16
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,15	Mar. 03, 16
Pre-Amplifier (0.5~18GHz)	SCHWARZBECK	BBV 9718	9718-266	Mar 26,14	Mar 25,16
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 15	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 19,14	Apr. 18,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 21,14	Jan. 20,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 494399.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

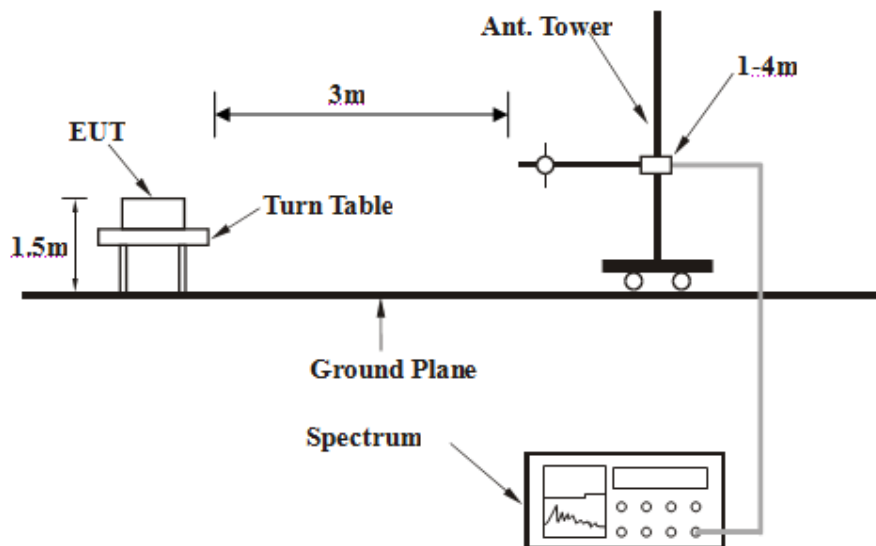

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	124.19	17.04	43.50	-26.46	100	0	35.37	-18.33
2	249.30	29.48	46.00	-16.52	100	0	46.22	-16.74
3	374.42	19.56	46.00	-26.44	100	0	32.23	-12.67
4	533.28	35.43	46.00	-10.57	100	0	42.79	-7.36
5	749.77	28.99	46.00	-17.01	100	0	31.43	-2.44
6	874.88	36.58	46.00	-9.42	100	0	37.56	-0.98

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

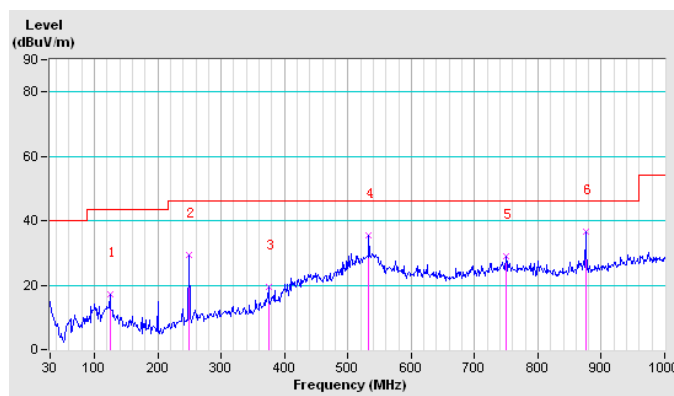


CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	33.05	40.00	-6.95	100	0	45.40	-12.35
2	124.19	21.28	43.50	-22.22	100	0	39.61	-18.33
3	249.30	25.06	46.00	-20.94	100	0	41.80	-16.74
4	374.42	26.41	46.00	-19.59	100	0	39.08	-12.67
5	624.65	30.73	46.00	-15.27	100	0	36.09	-5.36
6	874.88	33.73	46.00	-12.27	100	0	34.71	-0.98

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

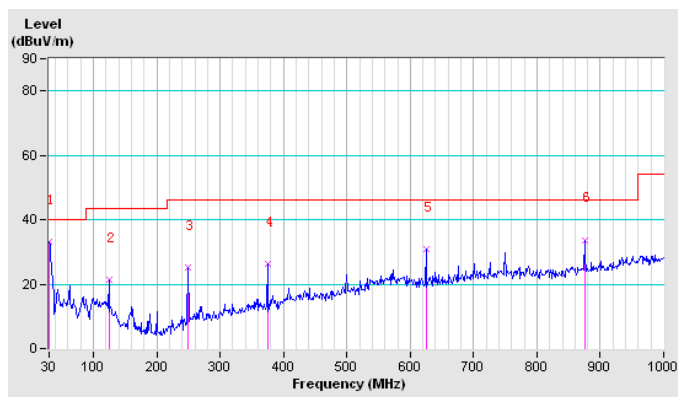

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.4 PK	74.0	-24.6	1.42 H	336	49.00	0.40
2	2390.00	36.5 AV	54.0	-17.5	1.42 H	336	36.10	0.40
3	*2412.00	93.3 PK			1.42 H	336	92.90	0.40
4	*2412.00	74.6 AV			1.42 H	336	74.20	0.40
5	4824.00	54.8 PK	74.0	-19.2	1.08 H	92	48.30	6.50
6	4824.00	44.1 AV	54.0	-9.9	1.08 H	92	37.60	6.50
7	#7236.00	55.1 PK	73.3	-18.2	1.00 H	217	44.30	10.80
8	#7236.00	40.2 AV	54.6	-14.4	1.00 H	217	29.40	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.2 PK	74.0	-22.8	1.02 V	286	50.80	0.40
2	2390.00	37.9 AV	54.0	-16.1	1.02 V	286	37.50	0.40
3	*2412.00	100.3 PK			1.02 V	286	99.90	0.40
4	*2412.00	79.6 AV			1.02 V	286	79.20	0.40
5	4824.00	54.3 PK	74.0	-19.7	1.04 V	152	47.80	6.50
6	4824.00	43.5 AV	54.0	-10.5	1.04 V	152	37.00	6.50
7	#7236.00	54.6 PK	80.3	-25.7	1.12 V	201	43.80	10.80
8	#7236.00	39.9 AV	59.6	-19.7	1.12 V	201	29.10	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	93.1 PK			1.82 H	54	92.60	0.50
2	*2437.00	74.2 AV			1.82 H	54	73.70	0.50
3	4874.00	55.2 PK	74.0	-18.8	1.06 H	64	48.50	6.70
4	4874.00	43.6 AV	54.0	-10.4	1.06 H	64	36.90	6.70
5	7311.00	55.4 PK	74.0	-18.6	1.04 H	213	44.60	10.80
6	7311.00	40.1 AV	54.0	-13.9	1.04 H	213	29.30	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.7 PK			1.12 V	274	97.20	0.50
2	*2437.00	76.6 AV			1.12 V	274	76.10	0.50
3	4874.00	54.8 PK	74.0	-19.2	1.02 V	220	48.10	6.70
4	4874.00	44.1 AV	54.0	-9.9	1.02 V	220	37.40	6.70
5	7311.00	54.1 PK	74.0	-19.9	1.00 V	76	43.30	10.80
6	7311.00	41.1 AV	54.0	-12.9	1.00 V	76	30.30	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	94.2 PK			1.83 H	246	93.60	0.60
2	*2462.00	74.7 AV			1.83 H	246	74.10	0.60
3	2483.50	46.8 PK	74.0	-27.2	1.83 H	246	46.20	0.60
4	2483.50	33.4 AV	54.0	-20.6	1.83 H	246	32.80	0.60
5	4924.00	54.7 PK	74.0	-19.3	1.04 H	23	47.80	6.90
6	4924.00	43.1 AV	54.0	-10.9	1.04 H	23	36.20	6.90
7	7386.00	54.6 PK	74.0	-19.4	1.12 H	218	43.80	10.80
8	7386.00	40.1 AV	54.0	-13.9	1.12 H	218	29.30	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.9 PK			1.15 V	195	96.30	0.60
2	*2462.00	76.6 AV			1.15 V	195	76.00	0.60
3	2483.50	47.8 PK	74.0	-26.2	1.15 V	195	47.20	0.60
4	2483.50	35.2 AV	54.0	-18.8	1.15 V	195	34.60	0.60
5	4924.00	54.3 PK	74.0	-19.7	1.01 V	71	47.40	6.90
6	4924.00	42.6 AV	54.0	-11.4	1.01 V	71	35.70	6.90
7	7386.00	55.2 PK	74.0	-18.8	1.00 V	138	44.40	10.80
8	7386.00	40.6 AV	54.0	-13.4	1.00 V	138	29.80	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF151112N058

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.8 PK	74.0	-29.2	1.62 H	5	44.40	0.40
2	2390.00	32.9 AV	54.0	-21.1	1.62 H	5	32.50	0.40
3	*2412.00	86.4 PK			1.62 H	5	86.00	0.40
4	*2412.00	63.2 AV			1.62 H	5	62.80	0.40
5	4824.00	51.9 PK	74.0	-22.1	1.05 H	52	45.40	6.50
6	4824.00	37.8 AV	54.0	-16.2	1.05 H	52	31.30	6.50
7	#7236.00	54.1 PK	66.4	-12.3	1.04 H	214	43.30	10.80
8	#7236.00	40.4 AV	43.2	-2.8	1.04 H	214	29.60	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.8 PK	74.0	-27.2	1.31 V	279	46.40	0.40
2	2390.00	34.3 AV	54.0	-19.7	1.31 V	279	33.90	0.40
3	*2412.00	95.4 PK			1.31 V	279	95.00	0.40
4	*2412.00	68.3 AV			1.31 V	279	67.90	0.40
5	4824.00	52.3 PK	74.0	-21.7	1.01 V	120	45.80	6.50
6	4824.00	38.7 AV	54.0	-15.3	1.01 V	120	32.20	6.50
7	#7236.00	54.6 PK	75.4	-20.8	1.08 V	76	43.80	10.80
8	#7236.00	40.8 AV	48.3	-7.5	1.08 V	76	30.00	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	86.4 PK			1.46 H	208	85.90	0.50
2	*2437.00	63.8 AV			1.46 H	208	63.30	0.50
3	4874.00	51.9 PK	74.0	-22.1	1.05 H	112	45.20	6.70
4	4874.00	37.6 AV	54.0	-16.4	1.05 H	112	30.90	6.70
5	7311.00	54.6 PK	74.0	-19.4	1.00 H	51	43.80	10.80
6	7311.00	40.7 AV	54.0	-13.3	1.00 H	51	29.90	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.1 PK			1.99 V	62	96.60	0.50
2	*2437.00	78.4 AV			1.99 V	62	77.90	0.50
3	4874.00	52.6 PK	74.0	-21.4	1.02 V	239	45.90	6.70
4	4874.00	38.9 AV	54.0	-15.1	1.02 V	239	32.20	6.70
5	7311.00	54.6 PK	74.0	-19.4	1.00 V	104	43.80	10.80
6	7311.00	40.3 AV	54.0	-13.7	1.00 V	104	29.50	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	86.7 PK			1.22 H	207	86.10	0.60
2	*2462.00	65.4 AV			1.22 H	207	64.80	0.60
3	2483.50	45.6 PK	74.0	-28.4	1.22 H	207	45.00	0.60
4	2483.50	32.8 AV	54.0	-21.2	1.22 H	207	32.20	0.60
5	4924.00	51.6 PK	74.0	-22.4	1.00 H	252	44.70	6.90
6	4924.00	37.6 AV	54.0	-16.4	1.00 H	252	30.70	6.90
7	7386.00	54.2 PK	74.0	-19.8	1.62 H	213	43.40	10.80
8	7386.00	40.9 AV	54.0	-13.1	1.62 H	213	30.10	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	91.6 PK			1.15 V	327	91.00	0.60
2	*2462.00	72.3 AV			1.15 V	327	71.70	0.60
3	2483.50	47.6 PK	74.0	-26.4	1.15 V	327	47.00	0.60
4	2483.50	33.6 AV	54.0	-20.4	1.15 V	327	33.00	0.60
5	4924.00	52.8 PK	74.0	-21.2	1.01 V	360	45.90	6.90
6	4924.00	39.2 AV	54.0	-14.8	1.01 V	360	32.30	6.90
7	7386.00	54.2 PK	74.0	-19.8	1.02 V	21	43.40	10.80
8	7386.00	40.4 AV	54.0	-13.6	1.02 V	21	29.60	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.2 PK	74.0	-28.8	2.01 H	182	44.80	0.40
2	2390.00	33.3 AV	54.0	-20.7	2.01 H	182	32.90	0.40
3	*2412.00	87.6 PK			2.01 H	182	87.20	0.40
4	*2412.00	65.9 AV			2.01 H	182	65.50	0.40
5	4824.00	53.1 PK	74.0	-20.9	1.08 H	46	46.60	6.50
6	4824.00	39.2 AV	54.0	-14.8	1.08 H	46	32.70	6.50
7	#7236.00	54.7 PK	67.6	-12.9	1.00 H	82	43.90	10.80
8	#7236.00	40.3 AV	45.9	-5.6	1.00 H	82	29.50	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.9 PK	74.0	-27.1	1.52 V	319	46.50	0.40
2	2390.00	34.6 AV	54.0	-19.4	1.52 V	319	34.20	0.40
3	*2412.00	93.6 PK			1.52 V	319	93.20	0.40
4	*2412.00	71.8 AV			1.52 V	319	71.40	0.40
5	4824.00	52.5 PK	74.0	-21.5	1.00 V	215	46.00	6.50
6	4824.00	38.6 AV	54.0	-15.4	1.00 V	215	32.10	6.50
7	#7236.00	54.1 PK	73.6	-19.5	1.02 V	322	43.30	10.80
8	#7236.00	40.9 AV	51.8	-10.9	1.02 V	322	30.10	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	88.6 PK			1.21 H	305	88.10	0.50
2	*2437.00	66.9 AV			1.21 H	305	66.40	0.50
3	4874.00	52.6 PK	74.0	-21.4	1.00 H	360	45.90	6.70
4	4874.00	39.3 AV	54.0	-14.7	1.00 H	360	32.60	6.70
5	7311.00	55.2 PK	74.0	-18.8	1.01 H	254	44.40	10.80
6	7311.00	41.6 AV	54.0	-12.4	1.01 H	254	30.80	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	92.3 PK			1.91 V	236	91.80	0.50
2	*2437.00	71.8 AV			1.91 V	236	71.30	0.50
3	4874.00	52.3 PK	74.0	-21.7	1.04 V	72	45.60	6.70
4	4874.00	39.6 AV	54.0	-14.4	1.04 V	72	32.90	6.70
5	7311.00	55.2 PK	74.0	-18.8	1.00 V	214	44.40	10.80
6	7311.00	41.4 AV	54.0	-12.6	1.00 V	214	30.60	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	87.6 PK			1.02 H	325	87.00	0.60
2	*2462.00	63.4 AV			1.02 H	325	62.80	0.60
3	2483.50	45.2 PK	74.0	-28.8	1.02 H	325	44.60	0.60
4	2483.50	32.9 AV	54.0	-21.1	1.02 H	325	32.30	0.60
5	4924.00	52.8 PK	74.0	-21.2	1.02 H	115	45.90	6.90
6	4924.00	39.4 AV	54.0	-14.6	1.02 H	115	32.50	6.90
7	7386.00	54.6 PK	74.0	-19.4	1.00 H	76	43.80	10.80
8	7386.00	41.1 AV	54.0	-12.9	1.00 H	76	30.30	10.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	92.6 PK			1.71 V	162	92.00	0.60
2	*2462.00	69.2 AV			1.71 V	162	68.60	0.60
3	2483.50	46.9 PK	74.0	-27.1	1.71 V	162	46.30	0.60
4	2483.50	34.2 AV	54.0	-19.8	1.71 V	162	33.60	0.60
5	4924.00	52.1 PK	74.0	-21.9	1.01 V	122	45.20	6.90
6	4924.00	38.6 AV	54.0	-15.4	1.01 V	122	31.70	6.90
7	7386.00	54.2 PK	74.0	-19.8	1.08 V	66	43.40	10.80
8	7386.00	40.7 AV	54.0	-13.3	1.08 V	66	29.90	10.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Feb. 18,15	Feb. 17,16
Power Sensor	Keysight	U2021XA	MY55060018	Feb. 18,15	Feb. 17,16
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 27,15	Oct. 26,16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Oct. 17, 15	Oct. 16, 16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,15	Nov. 04,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,15	Nov. 04,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 15	Apr. 21, 16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.

4.2.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

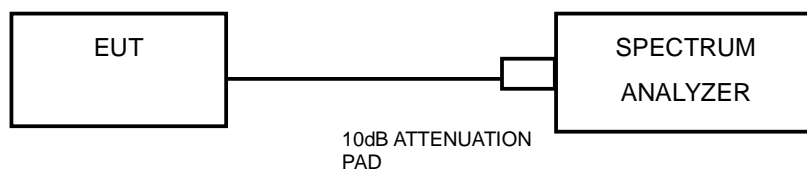

4.2.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.2.7 TEST RESULTS


802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.56	0.5	PASS
6	2437	9.14	0.5	PASS
11	2462	9.14	0.5	PASS

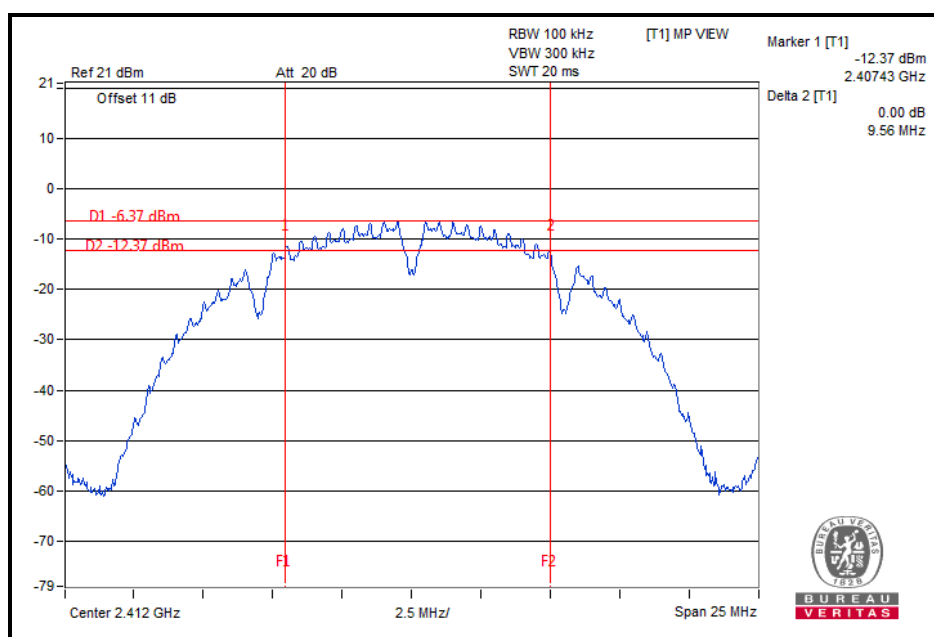

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	15.14	0.5	PASS
6	2437	15.15	0.5	PASS
11	2462	15.15	0.5	PASS

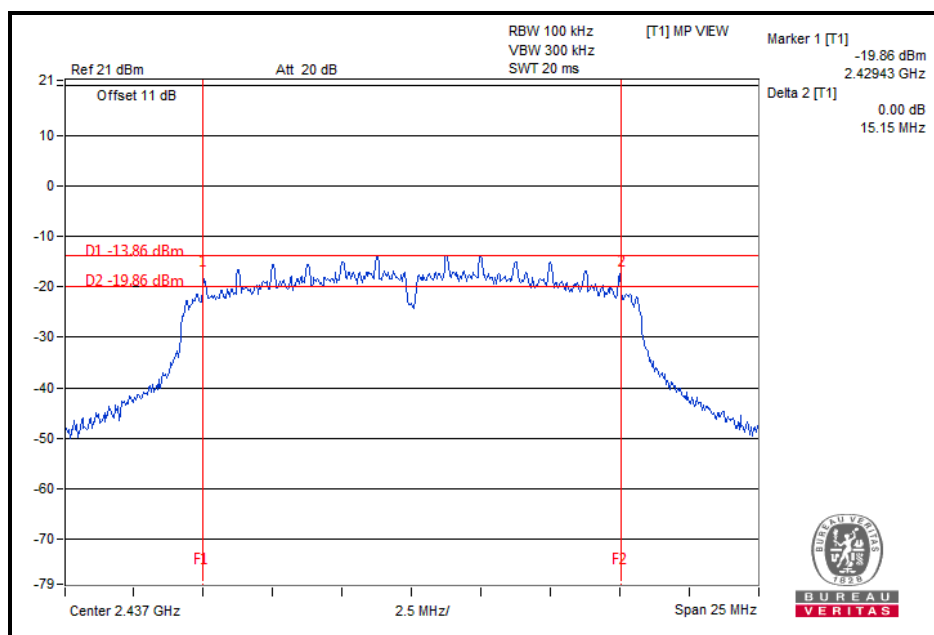




4.3 CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.3.2 TEST SETUP

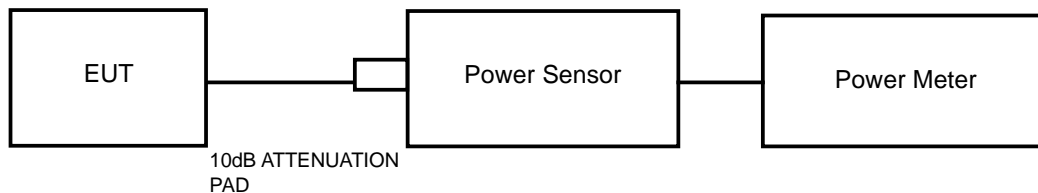

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Feb. 18,15	Feb. 17,16
Power Sensor	Keysight	U2021XA	MY55060018	Feb. 18,15	Feb. 17,16
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 27,15	Oct. 26,16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Oct. 17, 15	Oct. 16, 16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,15	Nov. 04,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,15	Nov. 04,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 15	Apr. 21, 16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.3.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

4.3.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	0.78	1.197	1	PASS
6	2437	3.42	2.198	1	PASS
11	2462	3.71	2.350	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	-4.21	0.3793	1	PASS
6	2437	0.06	1.0140	1	PASS
11	2462	-1.35	0.7328	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	-4.53	0.3524	1	PASS
6	2437	-0.14	0.9683	1	PASS
11	2462	-1.61	0.6902	1	PASS

4.3.7.2 Average Output Power (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2412	-2.26
6	2437	0.76
11	2462	0.58

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2412	-12.02
6	2437	-8.04
11	2462	-9.31

802.11n (20MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
1	2412	-12.55
6	2437	-8.34
11	2462	-9.88

4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.4.2 TEST SETUP

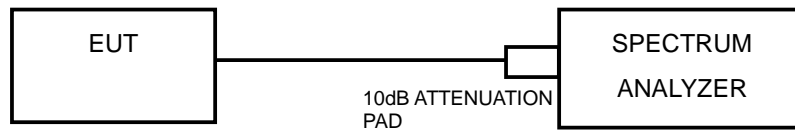

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.4.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: 3 kHz
- d) Set VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.


4.4.6 EUT OPERATING CONDITION

Same as item 4.3.6

4.4.7 TEST RESULTS


802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-20.59	8	PASS
6	2437	-19.21	8	PASS
11	2462	-18.17	8	PASS

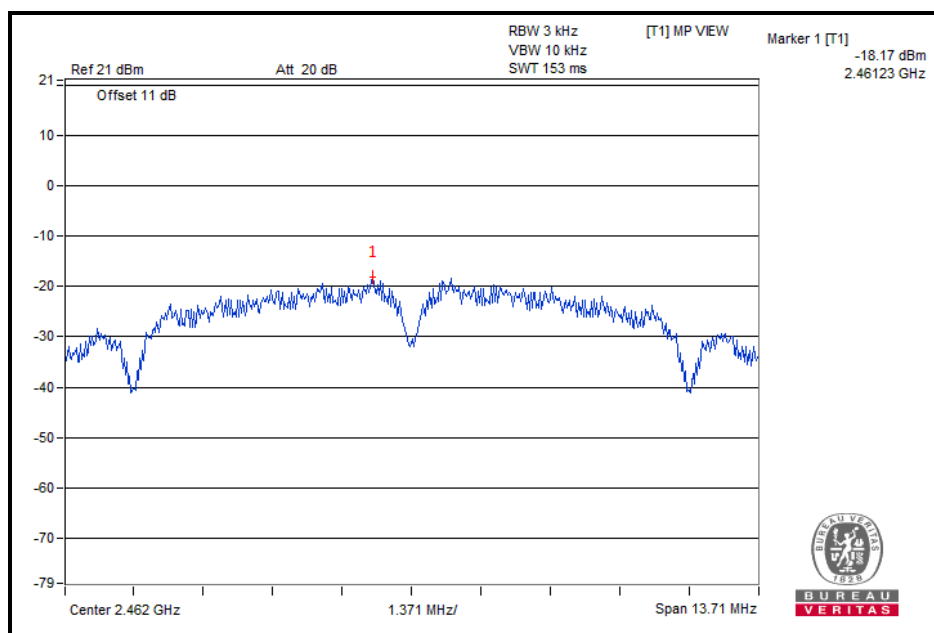


802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-33.75	8	PASS
6	2437	-29.99	8	PASS
11	2462	-31.65	8	PASS

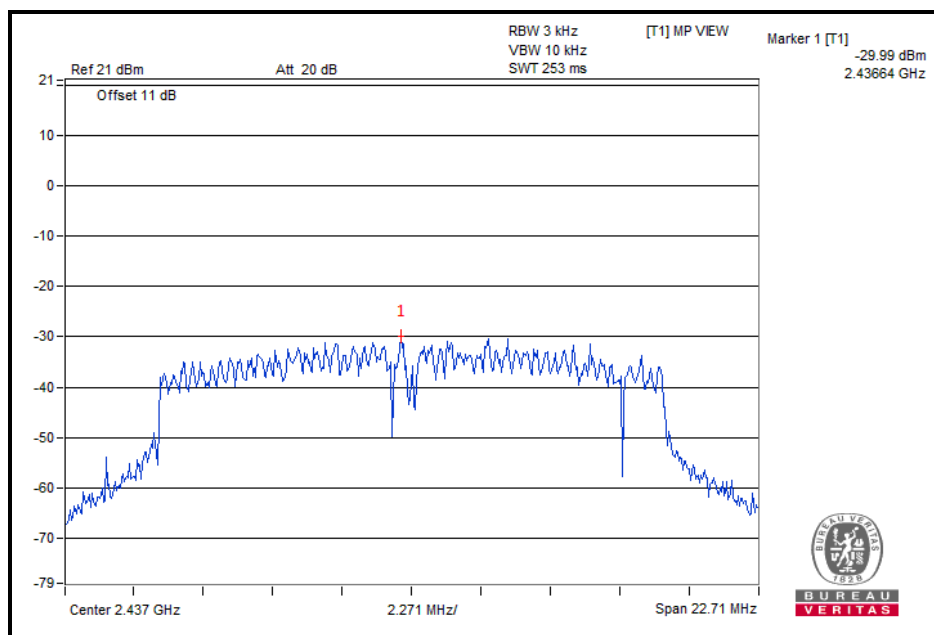

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-31.87	8	PASS
6	2437	-29.74	8	PASS
11	2462	-30.10	8	PASS

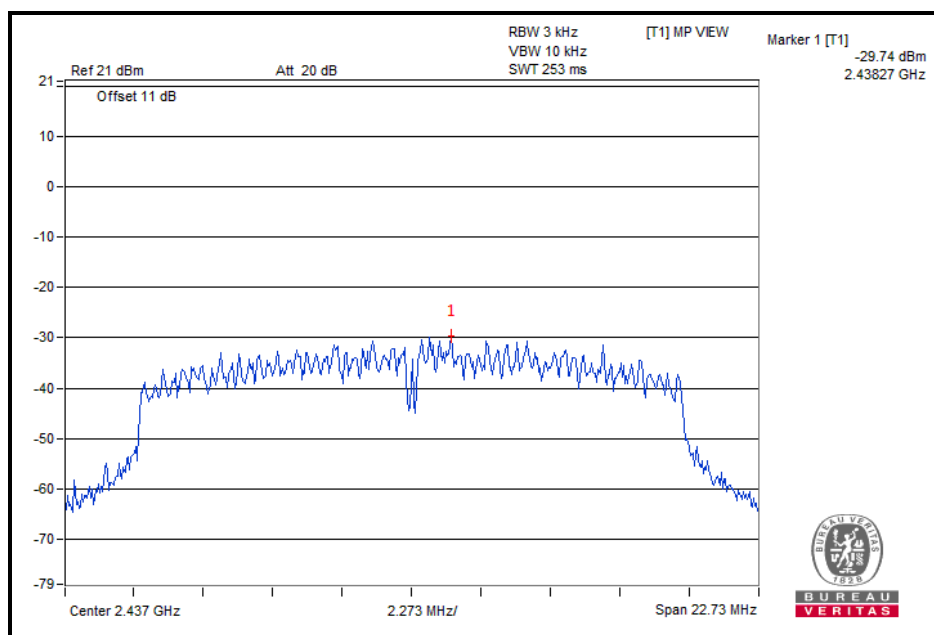




4.5 OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP

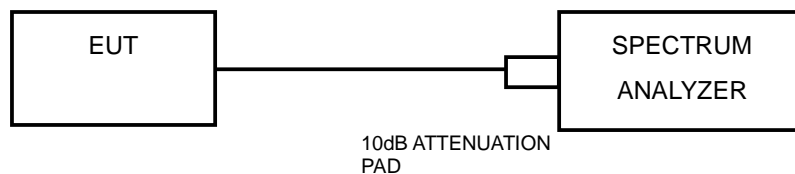

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.2.6




BUREAU
VERITAS

Test Report No.: RF151112N058

4.5.7 TEST RESULTS

802.11b

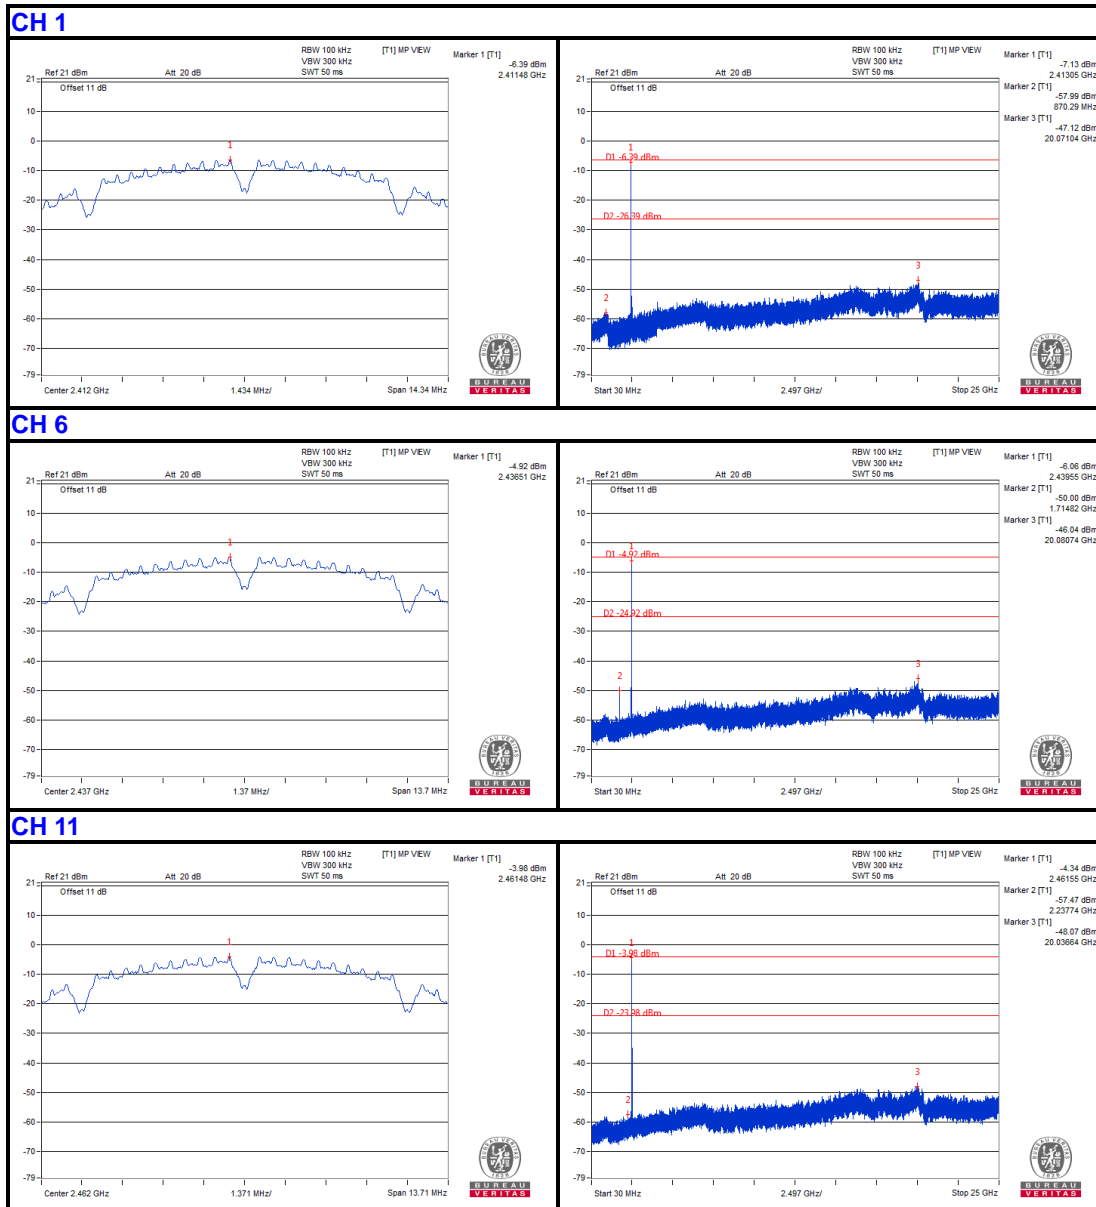

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS


Test Report No.: RF151112N058

802.11g


CH 1

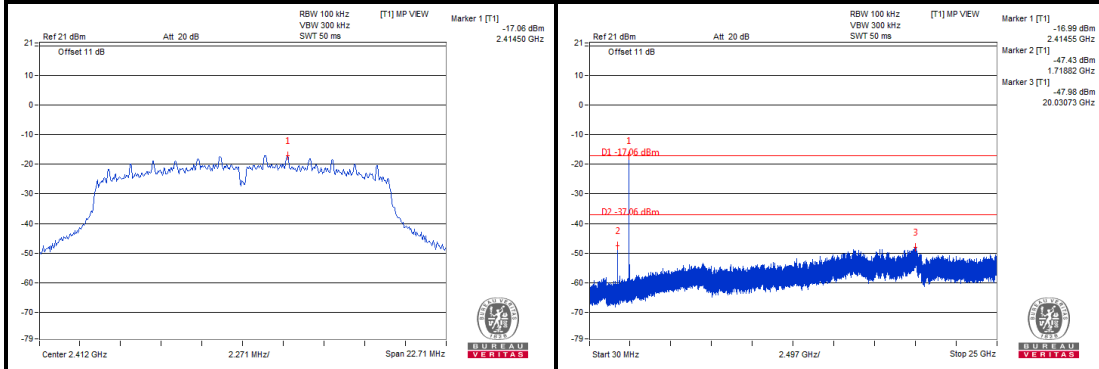

CH 6

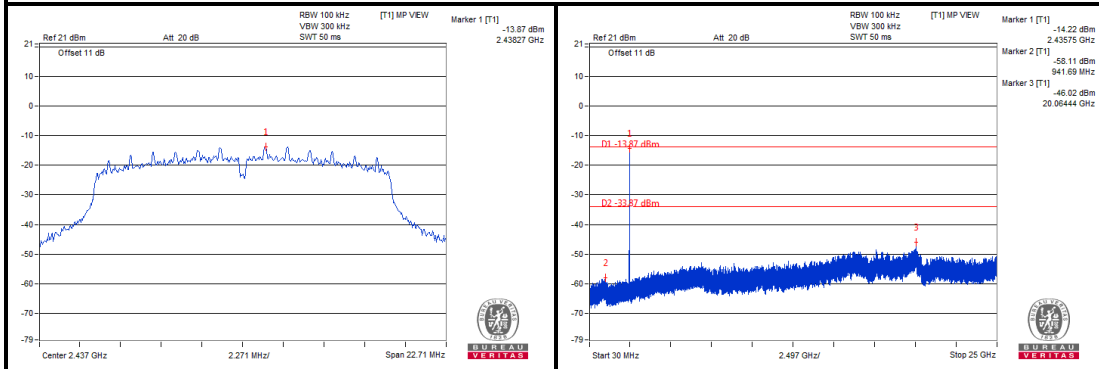

CH 11

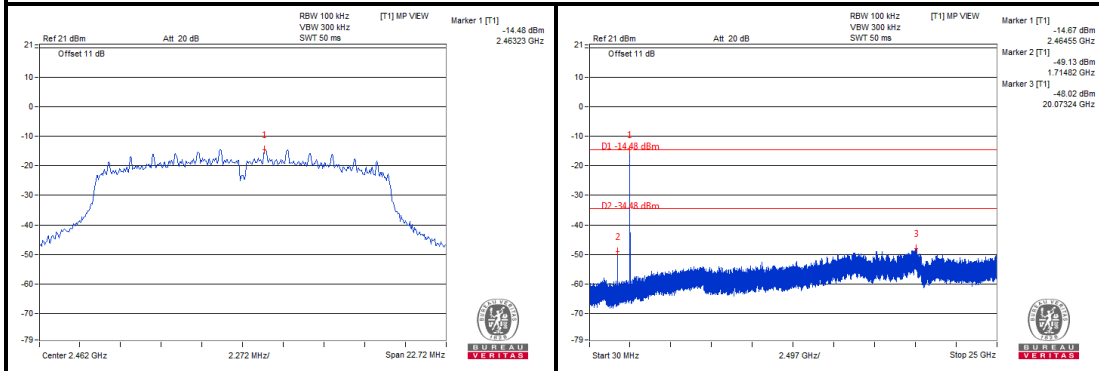

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF151112N058

802.11n (20MHz)

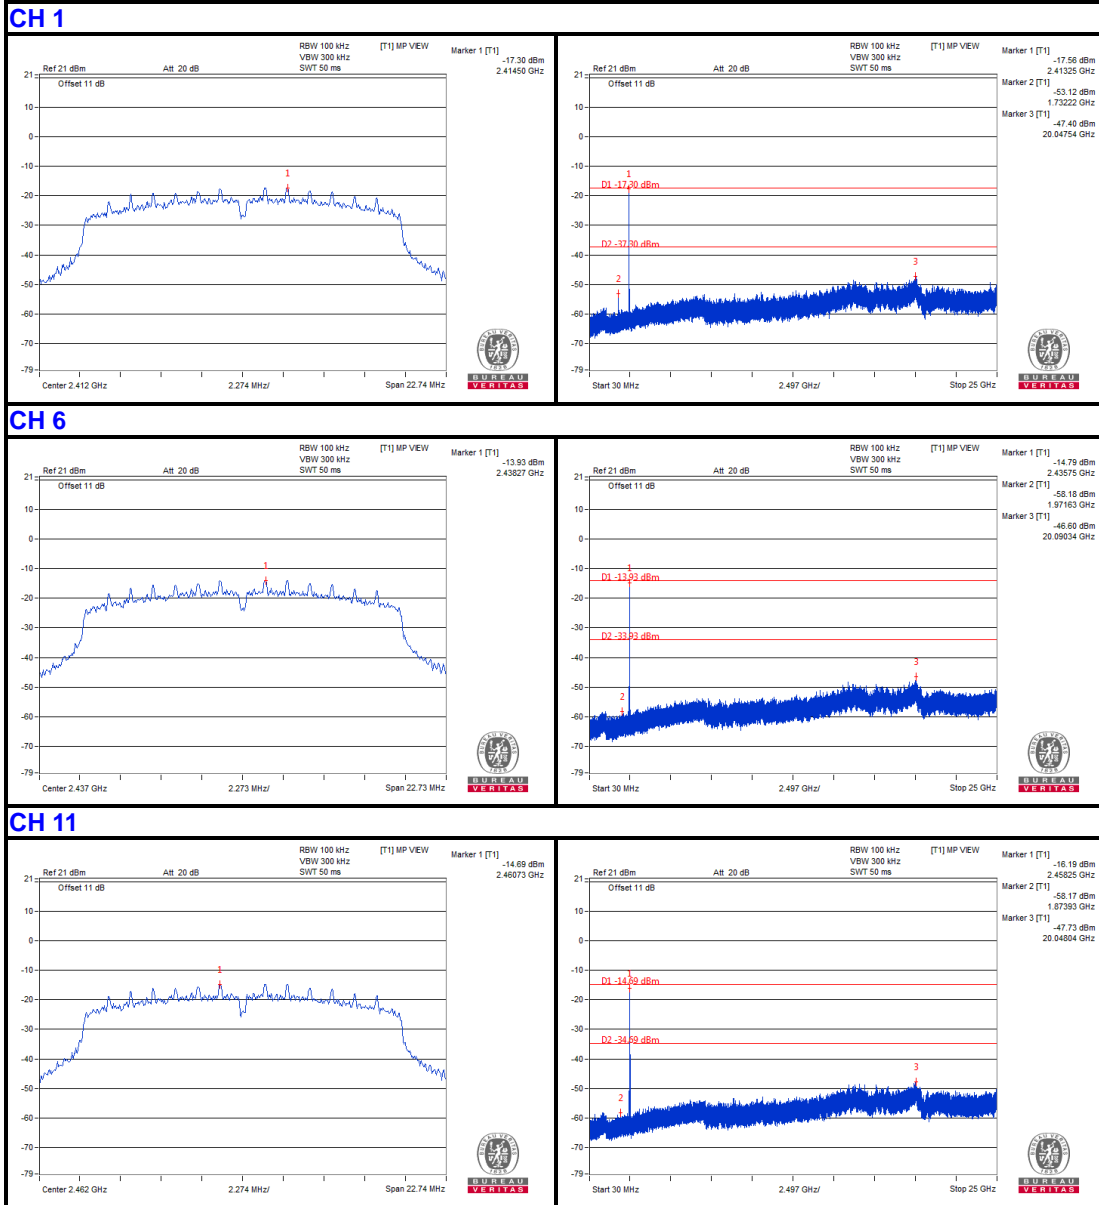

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU
VERITAS


Test Report No.: RF151112N058

802.11b

CH 1 Band edge

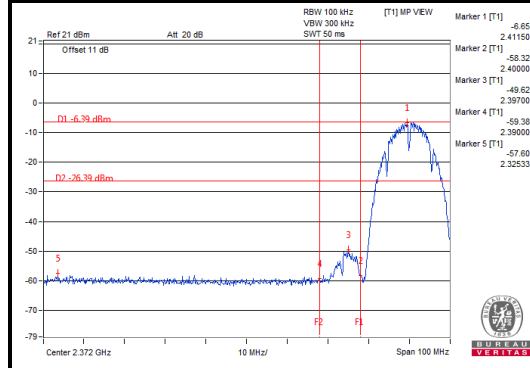


CH 11 Band edge

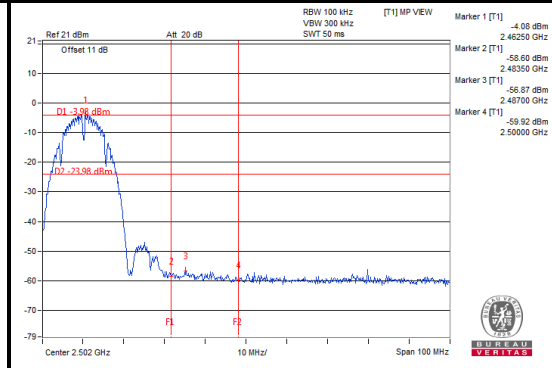


802.11g

CH 1 Band edge

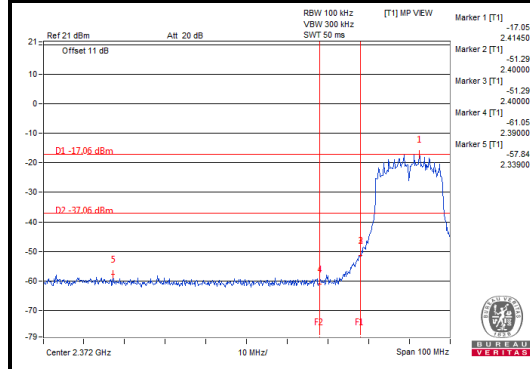


CH 11 Band edge

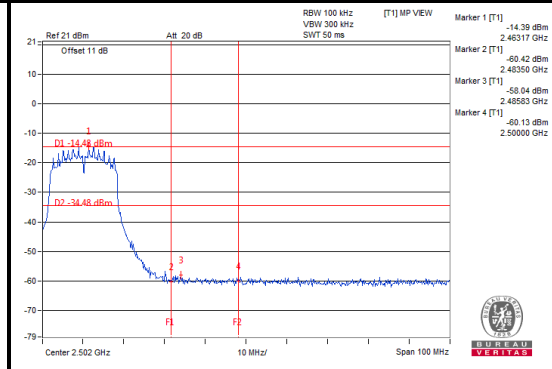


802.11n (20MHz)

CH 1 Band edge

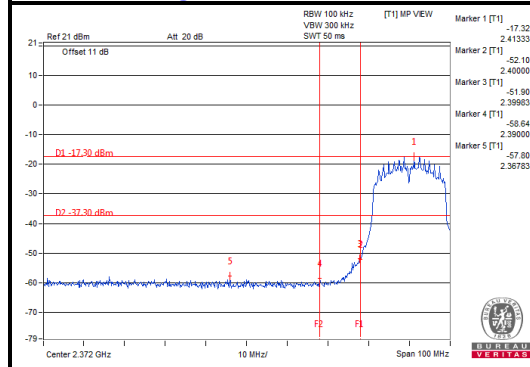

CH 11 Band edge

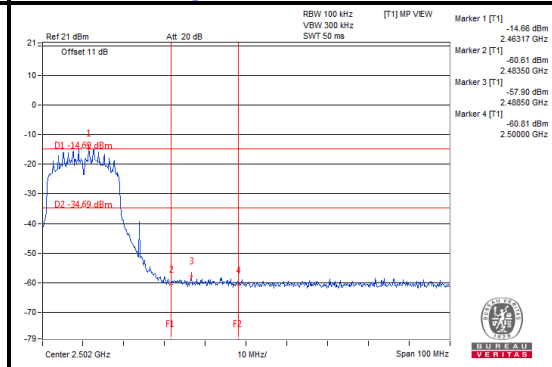



Test Report No.: RF151112N058

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF151112N058

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---