



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT

FOR FCC PART 15 SUBPART C 15.249

Report Reference No.: CTL1510233074-WF-01

Compiled by:
(position+printed name+signature)

Jacky Chen
(File administrators)

Jacky Chen

Tested by:
(position+printed name+signature)

Allen Wang
(Test Engineer)

Allen Wang

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name.....: 3-Axis Handheld Gimbal Stabilizer

Model/Type reference: S1

List Model(s).....: S2

Trade Mark.....: N/A

FCC ID.....: 2AGLS-RFI-S0001-CH

Applicant's name: **Shenzhen Redfox Intelligent Technology Co., Ltd.**

Address of applicant: NO.522, Block 5E, Software industry Base, Nanshan District,
Shenzhen, China

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road,
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: **FCC Part 15.249:**Operation within the bands 920-928 MHz,
2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of Receipt.....: Nov. 03, 2015

Date of Test Date.....: Nov. 04, 2015–Nov. 12, 2015

Data of Issue.....: Nov. 13, 2015

Result.....: Positive

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1510233074-WF-01	Nov. 13, 2015 Date of issue
--------------------------	----------------------------	--------------------------------

Equipment under Test : 3-Axis Handheld Gimbal Stabilizer

Model /Type : S1

Listed Models : S2

Applicant : **Shenzhen Redfox Intelligent Technology Co., Ltd.**

Address : NO.522, Block 5E, Software industry Base, Nanshan District, Shenzhen, China

Manufacturer : **Shenzhen Redfox Intelligent Technology Co., Ltd.**

Address : NO.522, Block 5E, Software industry Base, Nanshan District, Shenzhen, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****


Version	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2015-11-13	CTL1510233074-WF-01	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	8
2.4. EQUIPMENTS USED DURING THE TEST	9
2.5. RELATED SUBMITTAL(S) / GRANT(S).....	9
2.6. MODIFICATIONS.....	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	13
3.3. OCCUPIED BANDWIDTH MEASUREMENT.....	22
3.4. ANTENNA REQUIREMENT.....	27
4. TEST SETUP PHOTOS OF THE EUT	28
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	30

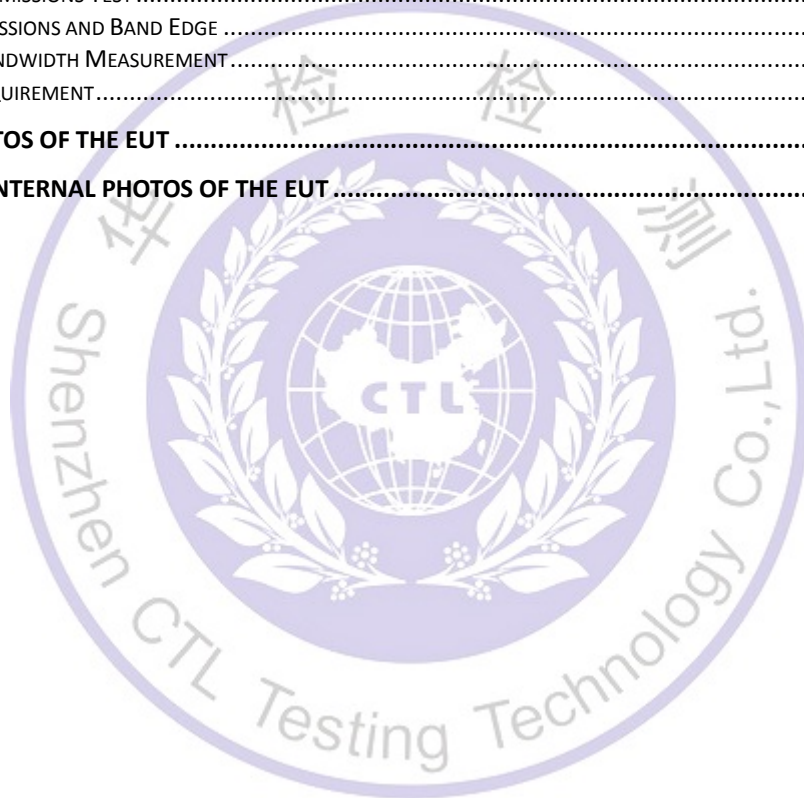

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

ANSI C63.10:2013 : American National Standard for Testing Unlicensed Wireless Devices

ANSI C63.4: 2014: –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

1.2. Test Description

FCC PART 15.249		
FCC Part 15.249(a)	Field Strength of Fundamental	PASS
FCC Part 15.209	Spurious Emission	PASS
FCC Part 15.209	Band edge	PASS
FCC Part 15.215(c)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	PASS
FCC Part 15.203	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	3-Axis Handheld Gimbal Stabilizer
Model/Type reference:	S1
Power supply:	DC 7.4V from battery
Bluetooth 3.0	
Version:	Supported BT3.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	0.85dBi
Bluetooth BLE	
Supported type:	Version 4.0 for low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	PCB Antenna
Antenna gain:	0.85dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. There are 79 channels provided to the EUT and Channel 00/39/78 were selected for BT3.0 testing, and 40 channels provided to the EUT and Channel 00/19/39 were selected for BT4.0 testing.

Operation Frequency BT3.0 :

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

Operation Frequency List BT4.0 :

Channel	Frequency (MHz)
00	2402
02	2404
03	2406
⋮	⋮
19	2440
⋮	⋮
37	2476
38	2478
39	2480

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2015/05/20	2016/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
RF Cable	Megalon	RF-A303	N/A	2015/06/02	2016/06/01

The calibration interval was one year

2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

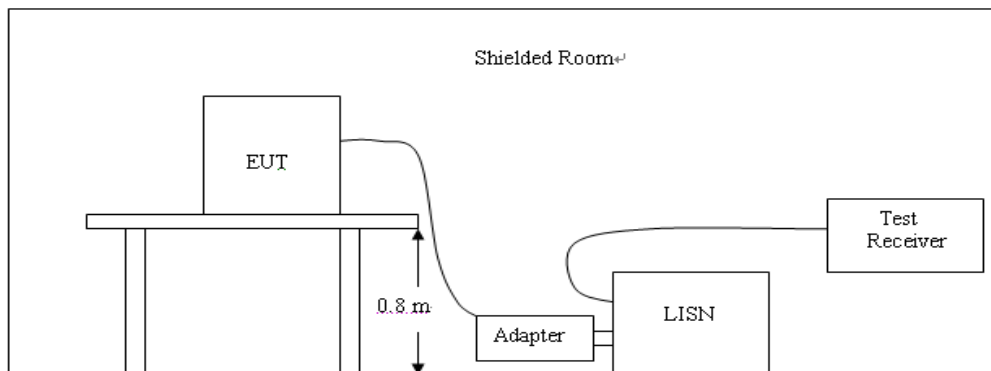

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter was received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: All modes of GFSK, Pi/4 DQPSK, 8DPSK and BLE were test at Low, Middle, and High channel; only the worst result of 8DPSK High Channel was reported as below:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

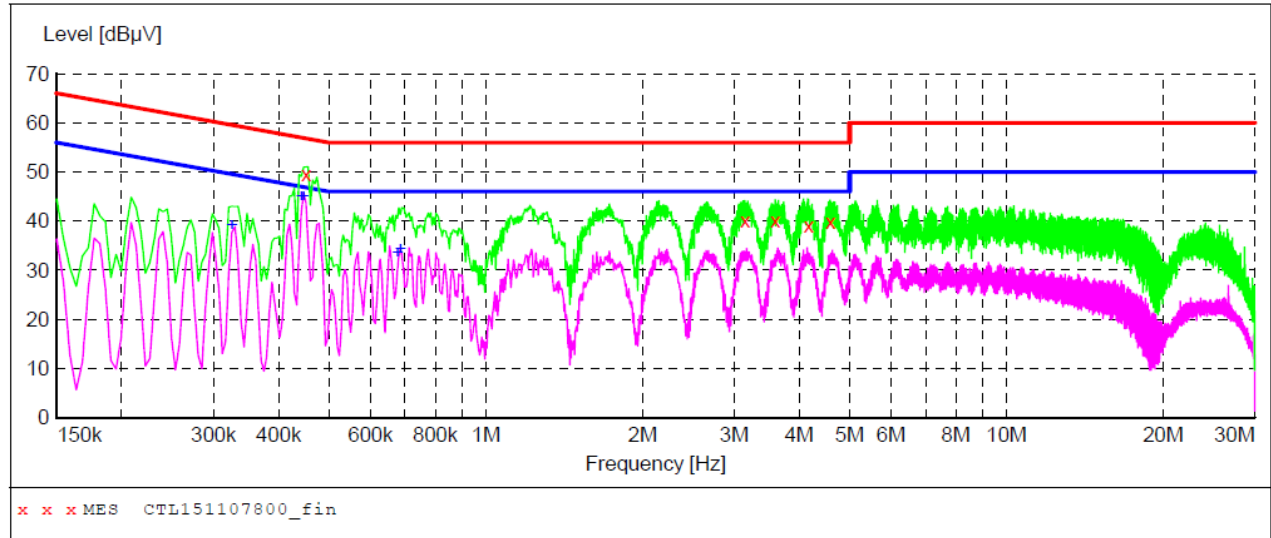**MEASUREMENT RESULT: "CTL151107800_fin"**

11/7/2015 2:08PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.451501	49.60	10.2	57	7.2	QP	L1	GND
3.147001	40.20	10.4	56	15.8	QP	L1	GND
3.592501	40.20	10.4	56	15.8	QP	L1	GND
4.168501	39.00	10.4	56	17.0	QP	L1	GND
4.587001	39.90	10.4	56	16.1	QP	L1	GND


MEASUREMENT RESULT: "CTL151107800_fin2"

11/7/2015 2:08PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.325501	39.10	10.2	50	10.5	AV	L1	GND
0.442501	44.90	10.2	47	2.1	AV	L1	GND
0.447001	44.90	10.2	47	2.0	AV	L1	GND
0.676501	33.60	10.2	46	12.4	AV	L1	GND
0.685501	34.20	10.2	46	11.8	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

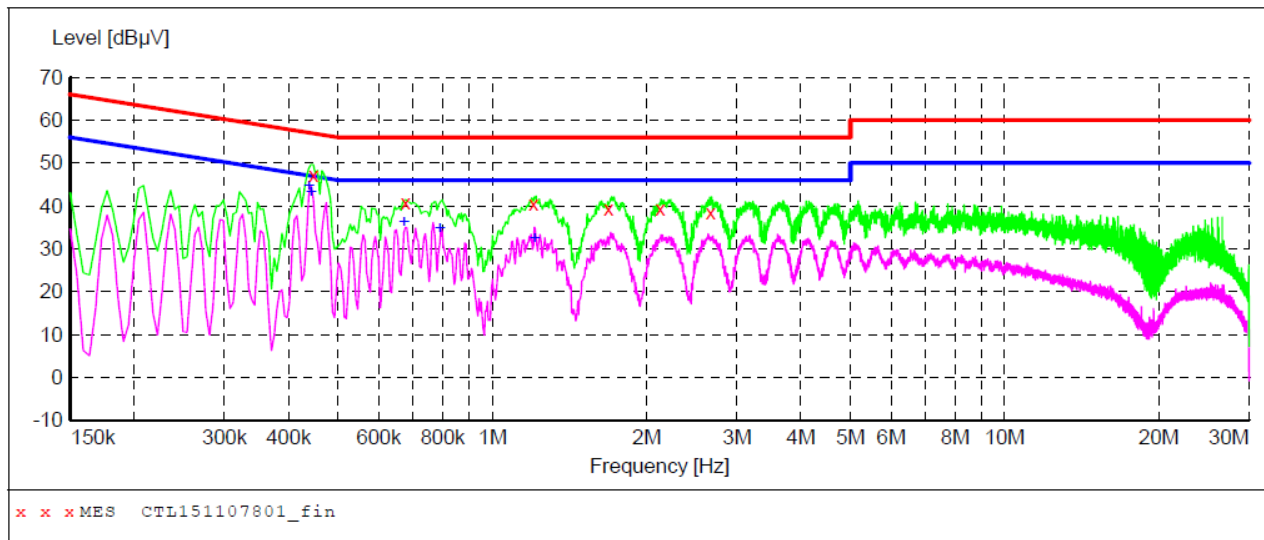**MEASUREMENT RESULT: "CTL151107801_fin"**

11/7/2015 2:12PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.447001	47.20	10.2	57	9.7	QP	N	GND
0.676501	40.90	10.2	56	15.1	QP	N	GND
1.203001	40.60	10.3	56	15.4	QP	N	GND
1.684501	39.20	10.3	56	16.8	QP	N	GND
2.125501	39.20	10.4	56	16.8	QP	N	GND
2.665501	38.40	10.4	56	17.6	QP	N	GND

MEASUREMENT RESULT: "CTL151107801_fin2"

11/7/2015 2:12PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.438001	44.50	10.2	47	2.6	AV	N	GND
0.442501	43.20	10.2	47	3.8	AV	N	GND
0.672001	36.10	10.2	46	9.9	AV	N	GND
0.789001	34.70	10.2	46	11.3	AV	N	GND
1.207501	32.40	10.3	46	13.6	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dB μ V/m (50mV/m):

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

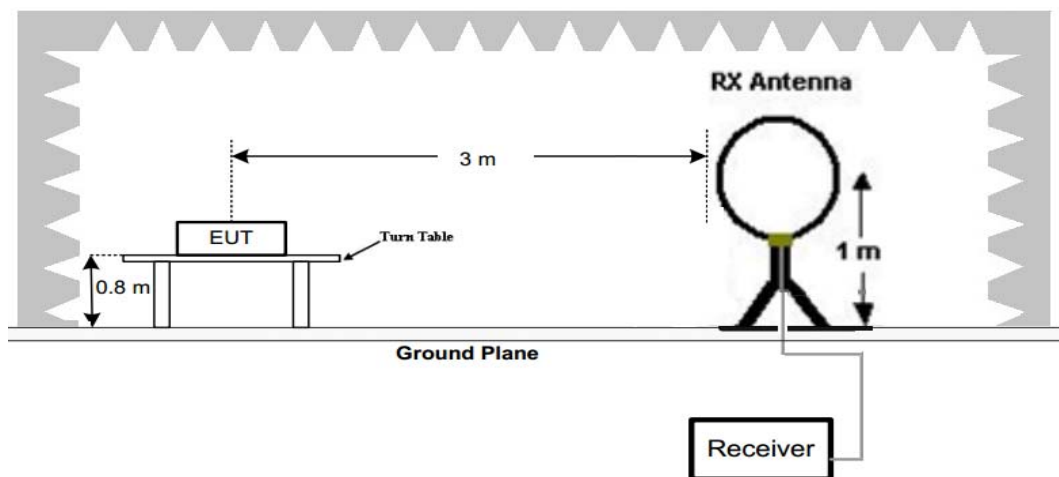

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

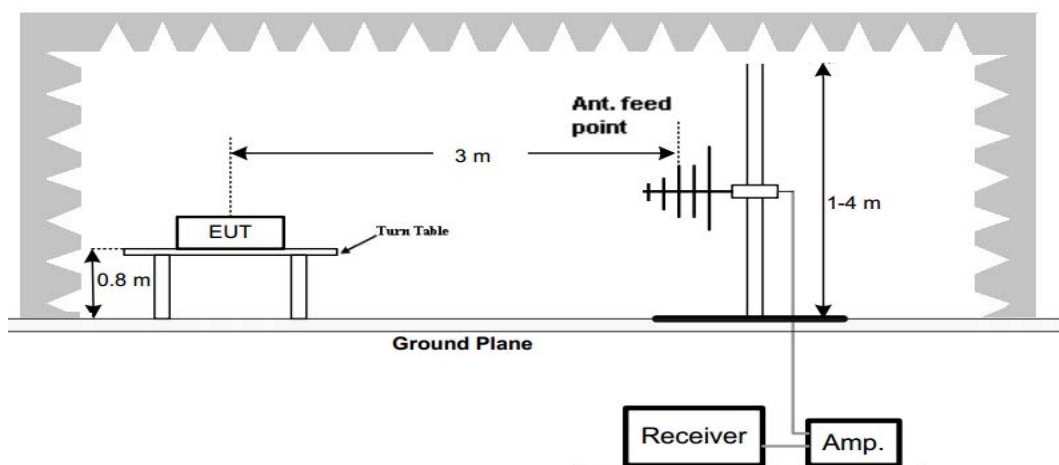

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

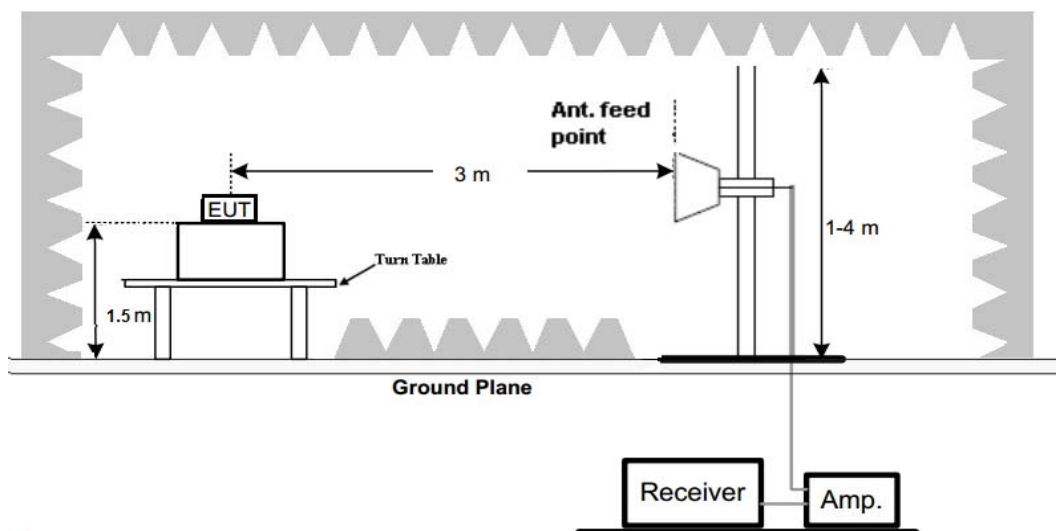**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:

1. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
3. For below 1GHz testing recorded worst at GFSK DH5 low channel.

For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.33	49.98	97.23	47.25	PK	PASS
1.65	56.35	63.25	6.90	QP	PASS
15.36	54.51	69.54	15.03	QP	PASS
25.69	53.20	69.54	16.34	QP	PASS


Remark: BLE and BT all modes all have been tested ,only worse case BT GFSK DH5 mode is reported for below 1GHz

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

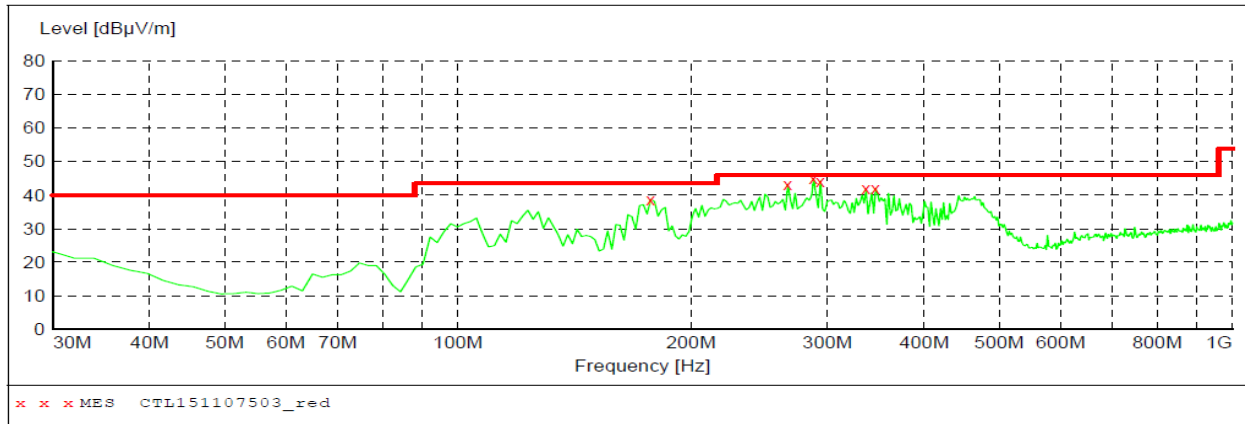**MEASUREMENT RESULT: "CTL151107503_red"**


11/7/2015 1:57PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
177.440000	38.70	13.0	43.5	4.8	---	0.0	0.00	HORIZONTAL
266.680000	43.20	14.9	46.0	2.8	---	0.0	0.00	HORIZONTAL
288.020000	44.90	15.2	46.0	1.1	---	0.0	0.00	HORIZONTAL
293.840000	44.20	15.2	46.0	1.8	---	0.0	0.00	HORIZONTAL
336.520000	41.80	16.3	46.0	4.2	---	0.0	0.00	HORIZONTAL
346.220000	42.00	16.6	46.0	4.0	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

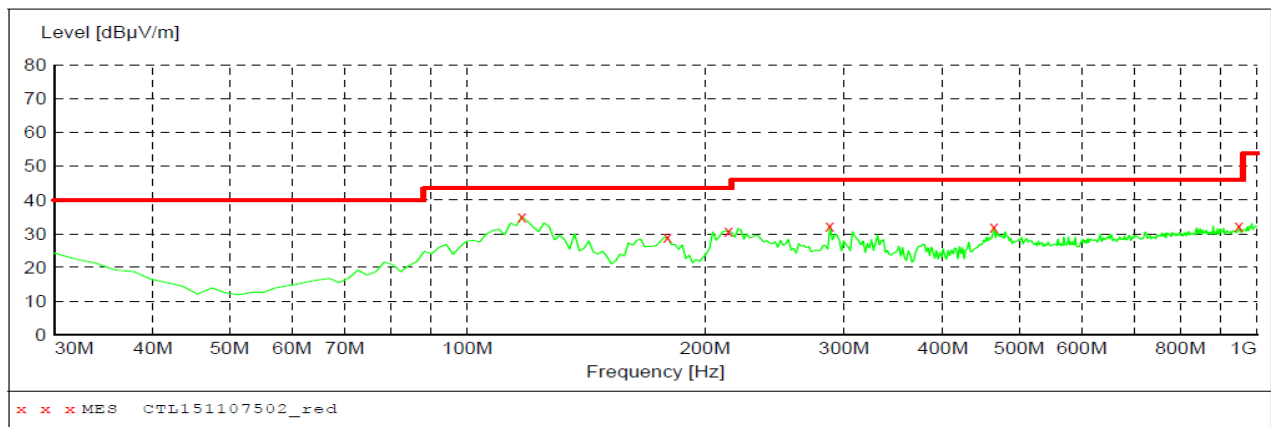**MEASUREMENT RESULT: "CTL151107502_red"**

11/7/2015 1:55PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
117.300000	35.10	14.7	43.5	8.4	---	0.0	0.00	VERTICAL
179.380000	28.90	13.0	43.5	14.6	---	0.0	0.00	VERTICAL
214.300000	30.80	14.0	43.5	12.7	---	0.0	0.00	VERTICAL
288.020000	32.40	15.2	46.0	13.6	---	0.0	0.00	VERTICAL
464.560000	31.90	19.6	46.0	14.1	---	0.0	0.00	VERTICAL
949.560000	32.30	26.5	46.0	13.7	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz**BT3.0 GFSK Mode (above 1GHz)**

Frequency(MHz):				2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	95.41	PK	114	18.59	62.01	28.78	4.61	0.00	33.40
1	2402.00	87.54	AV	94	6.46	54.14	28.78	4.61	0.00	33.40
2	2390.00	38.52	PK	74	35.48	5.20	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	45.66	PK	74	28.34	12.27	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	56.55	PK	74	17.45	52.04	33.49	6.91	35.89	4.51
4	4804.00	45.98	AV	54	8.02	41.47	33.49	6.91	35.89	4.51
5	5375.50	42.34	PK	74	31.66	34.74	34.72	7.25	34.37	7.60
5	5375.50	--	AV	54	--	--	--	--	--	--
6	7206.00	42.41	PK	74	31.59	31.30	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2402		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	95.66	PK	114	18.34	62.26	28.78	4.61	0.00	33.40
1	2402.00	87.87	AV	94	6.13	54.47	28.78	4.61	0.00	33.40
2	2390.00	38.47	PK	74	35.53	5.15	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	45.54	PK	74	28.46	12.15	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	55.69	PK	74	18.31	51.18	33.49	6.91	35.89	4.51
4	4804.00	46.54	AV	54	7.46	42.03	33.49	6.91	35.89	4.51
5	5230.25	43.54	PK	74	30.46	36.12	34.57	7.16	34.31	7.42
5	5230.25	--	AV	54	--	--	--	--	--	--
6	7206.00	42.74	PK	74	31.26	31.63	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2441		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	96.11	PK	114	17.89	62.60	28.85	4.66	0.00	33.51
1	2441.00	88.26	AV	94	5.74	54.75	28.85	4.66	0.00	33.51
2	4315.50	42.44	PK	74	31.56	37.63	32.83	6.60	34.62	4.81
2	4315.50	--	AV	54	--	--	--	--	--	--
3	4882.00	56.25	PK	74	17.75	49.99	33.60	6.95	34.30	6.26
3	4882.00	49.55	AV	54	4.45	43.29	33.60	6.95	34.30	6.26
4	5233.75	42.41	PK	74	31.59	34.77	34.57	7.16	34.10	7.64
4	5233.75	--	AV	54	--	--	--	--	--	--
5	7323.00	43.55	PK	74	30.45	31.85	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2441		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	96.65	PK	114	17.35	63.14	28.85	4.66	0.00	33.51
1	2441.00	88.41	AV	94	5.59	54.90	28.85	4.66	0.00	33.51
2	3375.80	43.22	PK	74	30.78	41.24	31.53	5.68	35.23	1.98
2	3375.80	--	AV	54	--	--	--	--	--	--
3	4882.00	55.99	PK	74	18.01	49.63	33.60	6.95	34.19	6.36
3	4882.00	48.96	AV	54	5.04	42.60	33.60	6.95	34.19	6.36
4	5350.75	42.22	PK	74	31.78	34.33	34.69	7.23	34.03	7.89
4	5350.75	--	AV	54	--	--	--	--	--	--
5	7323.00	42.74	PK	74	31.26	31.04	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2480		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	95.54	PK	114	18.46	61.92	28.92	4.70	0.00	33.62
1	2480.00	87.58	AV	94	6.42	53.96	28.92	4.70	0.00	33.62
2	2483.50	45.24	PK	74	28.76	11.61	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	39.54	PK	74	34.46	5.86	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	55.74	PK	74	18.26	50.82	33.84	7.00	35.92	4.92
4	4960.00	46.10	AV	54	7.9	41.18	33.84	7.00	35.92	4.92
5	5525.50	43.22	PK	74	30.78	35.56	34.76	7.33	34.42	7.66
5	5525.50	--	AV	54	--	--	--	--	--	--
6	7440.00	41.48	PK	74	32.52	29.53	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2480		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	95.66	PK	114	18.34	62.04	28.92	4.70	0.00	33.62
1	2480.00	87.58	AV	94	6.42	53.96	28.92	4.70	0.00	33.62
2	2483.50	45.32	PK	74	28.68	11.69	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	39.64	PK	74	34.36	5.96	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	55.85	PK	74	18.15	50.93	33.84	7.00	35.92	4.92
4	4960.00	46.22	AV	54	7.78	41.30	33.84	7.00	35.92	4.92
5	5150.75	43.31	PK	74	30.69	36.04	34.44	7.12	34.28	7.27
5	5150.75	--	AV	54	--	--	--	--	--	--
6	7440.00	42.52	PK	74	31.48	30.57	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

BT4.0 GFSK Mode (above 1GHz)

Frequency(MHz):				2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	88.11	PK	114	25.89	54.71	28.78	4.61	0.00	33.40
1	2402.00	78.26	AV	94	15.74	44.86	28.78	4.61	0.00	33.40
2	2390.00	36.32	PK	74	37.68	3.00	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	38.41	PK	74	35.59	5.02	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	46.33	PK	74	27.67	41.82	33.49	6.91	35.89	4.51
4	4804.00	--	AV	54	--	--	--	--	--	--
5	5350.50	39.74	PK	74	34.26	32.18	34.69	7.23	34.36	7.56
5	5350.50	--	AV	54	--	--	--	--	--	--
6	7206.00	41.26	PK	74	32.74	30.15	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2402		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	88.34	PK	114	25.66	54.94	28.78	4.61	0.00	33.40
1	2402.00	78.30	AV	94	15.7	44.90	28.78	4.61	0.00	33.40
2	2390.00	36.41	PK	74	37.59	3.09	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	38.25	PK	74	35.75	4.86	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	46.40	PK	74	27.6	41.89	33.49	6.91	35.89	4.51
4	4804.00	--	AV	54	--	--	--	--	--	--
5	5115.75	38.66	PK	74	35.34	31.47	34.36	7.10	34.27	7.19
5	5115.75	--	AV	54	--	--	--	--	--	--
6	7206.00	41.69	PK	74	32.31	30.58	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2440		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2440.00	88.55	PK	114	25.45	55.04	28.85	4.65	0.00	33.51
1	2440.00	79.21	AV	94	14.79	45.70	28.85	4.65	0.00	33.51
2	3950.75	39.78	PK	74	34.22	35.07	33.20	6.34	34.83	4.71
2	3950.75	--	AV	54	--	--	--	--	--	--
3	4880.00	45.98	PK	74	28.02	39.62	33.60	6.95	34.19	6.36
3	4880.00	--	AV	54	--	--	--	--	--	--
4	5078.50	39.65	PK	74	34.35	32.50	34.25	7.08	34.19	7.15
4	5078.50	--	AV	54	--	--	--	--	--	--
5	7320.00	42.10	PK	74	31.9	30.41	37.46	9.23	35.00	11.69
5	7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2440		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2440.00	88.63	PK	114	25.37	55.12	28.85	4.65	0.00	33.51
1	2440.00	79.30	AV	94	14.7	45.79	28.85	4.65	0.00	33.51
2	4105.75	39.44	PK	74	34.56	34.91	32.81	6.46	34.74	4.53
2	4105.75	--	AV	54	--	--	--	--	--	--
3	4880.00	46.25	PK	74	27.75	40.00	33.60	6.95	34.30	6.25
3	4880.00	--	AV	54	--	--	--	--	--	--
4	5315.75	38.42	PK	74	35.58	30.60	34.66	7.21	34.05	7.82
4	5315.75	--	AV	54	--	--	--	--	--	--
5	7320.00	43.69	PK	74	30.31	32.00	37.46	9.23	35.00	11.69
5	7320.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2480		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	88.14	PK	114	25.86	54.52	28.92	4.70	0.00	33.62
1	2480.00	78.96	AV	94	15.04	45.34	28.92	4.70	0.00	33.62
2	2483.50	38.55	PK	74	35.45	4.92	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	37.36	PK	74	36.64	3.68	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	48.85	PK	74	25.15	43.93	33.84	7.00	35.92	4.92
4	4960.00	--	AV	54	--	--	--	--	--	--
5	5520.50	40.12	PK	74	33.88	32.46	34.75	7.32	34.42	7.66
5	5520.50	--	AV	54	--	--	--	--	--	--
6	7440.00	42.63	PK	74	31.37	30.68	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2480		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	88.24	PK	114	25.76	54.62	28.92	4.70	0.00	33.62
1	2480.00	78.87	AV	94	15.13	45.25	28.92	4.70	0.00	33.62
2	2483.50	38.66	PK	74	35.34	5.03	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	37.41	PK	74	36.59	3.73	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	48.98	PK	74	25.02	44.06	33.84	7.00	35.92	4.92
4	4960.00	--	AV	54	--	--	--	--	--	--
5	5315.75	39.32	PK	74	34.68	31.80	34.66	7.21	34.34	7.52
5	5315.75	--	AV	54	--	--	--	--	--	--
6	7440.00	41.42	PK	74	32.58	29.47	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:


1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

3.3. Occupied Bandwidth Measurement

Limit

N/A

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Results

BT3.0

Modulation	Channel	99% OBW (MHz)	20dB bandwidth (MHz)	Result
GFSK	CH00	0.873	0.796	Pass
	CH39	0.872	0.879	
	CH78	0.873	0.797	
$\pi/4$ DQPSK	CH00	1.202	1.267	
	CH39	1.199	1.260	
	CH78	1.194	1.254	
8DPSK	CH00	1.197	1.278	
	CH39	1.199	1.263	
	CH78	1.198	1.266	


BT4.0

Modulation	Channel	99% OBW (MHz)	20dB bandwidth (MHz)	Result
GFSK	CH00	1.057	1.213	Pass
	CH19	1.052	1.189	
	CH39	1.051	1.222	


Test plot as follows:

BT3.0


GFSK Modulation

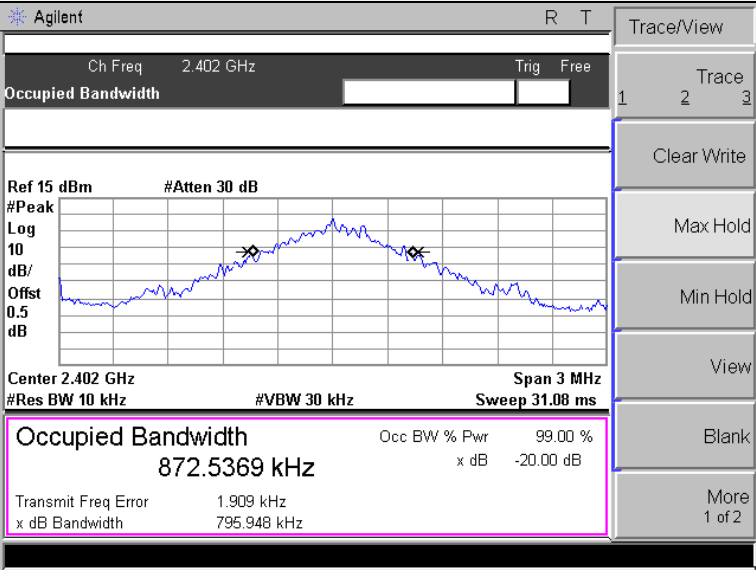

CH00

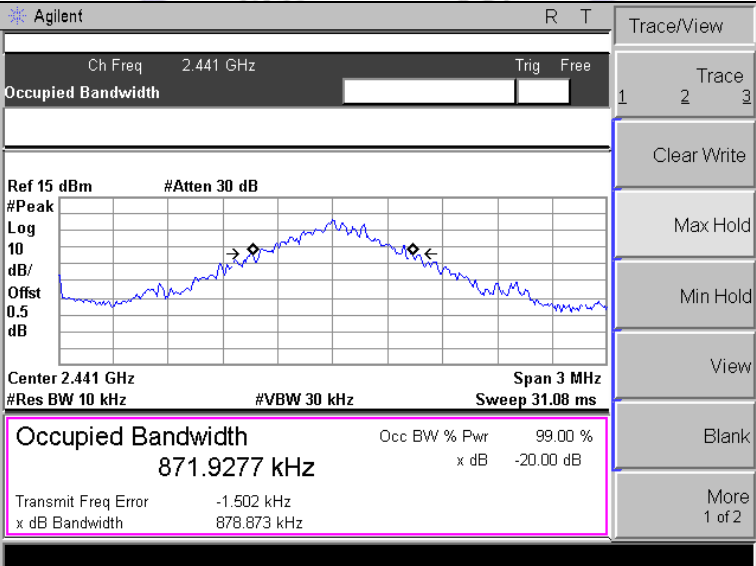

CH39

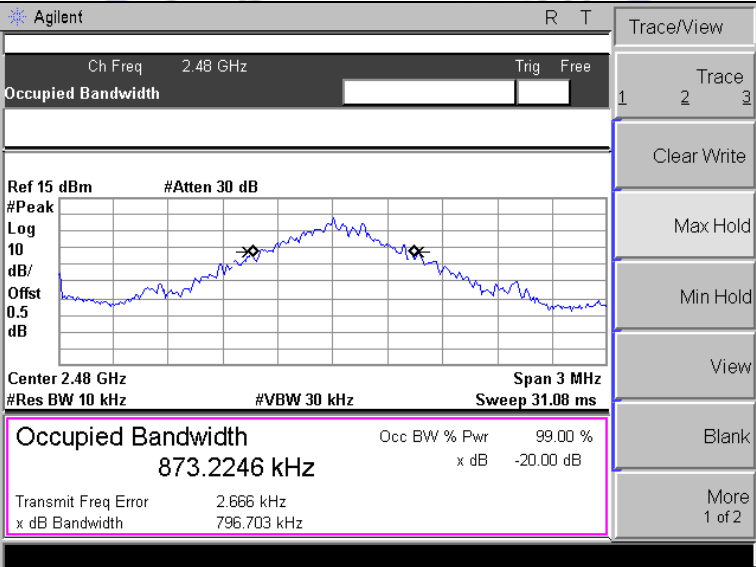

CH78

The image shows a screenshot of an Agilent spectrum analyzer. The top bar displays the center frequency as 2.402 GHz. Below this, the 'Occupied Bandwidth' is shown as 1.2022 MHz. The main display area shows a spectrum plot with a blue trace. A peak is identified with a diamond marker and labeled 'Ref 15 dBm'. The plot also shows a 'Log' scale and a 'dB/Offset' of 0.5 dB. The bottom status bar indicates the center frequency is 2.402 GHz, the resolution bandwidth (Res BW) is 30 kHz, the video bandwidth (VBW) is 100 kHz, the span is 3 MHz, and the sweep time is 5 ms. On the right side, there are buttons for 'Trace/View', 'Clear Write', 'Max Hold', 'Min Hold', 'View', 'Blank', and 'More'.

Agilent

Ch Freq 2.441 GHz

Trig Free

Occupied Bandwidth

Ref 15 dBm #Atten 30 dB

#Peak

Log

10

dB/

Offset

0.5

dB

Center 2.441 GHz

#Res BW 30 kHz

#VBW 100 kHz

Span 3 MHz

Sweep 5 ms

Occupied Bandwidth

1.1986 MHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error 4.689 kHz

x dB Bandwidth 1.260 MHz

Trace/View

Trace

1 2

Clear Write

Max Hold

Min Hold

View

Blank


More

1 of 2


[illegible]

CH78


8DPSK Modulation

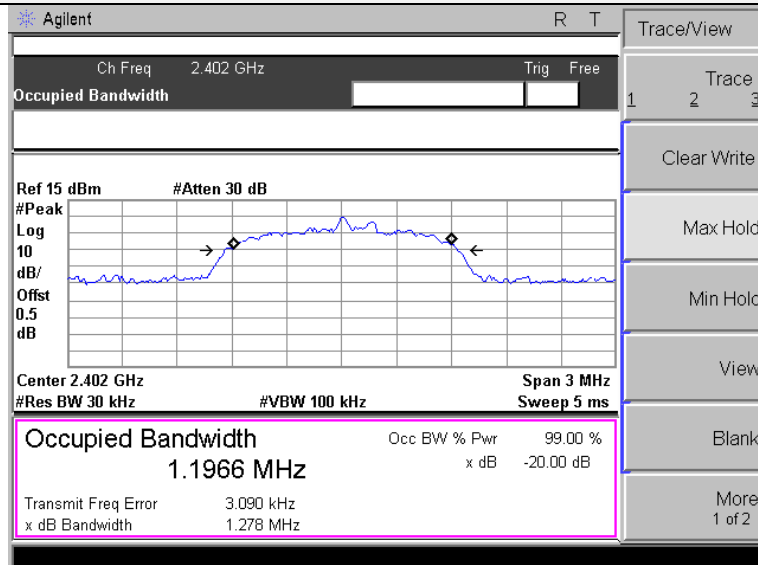




CH00

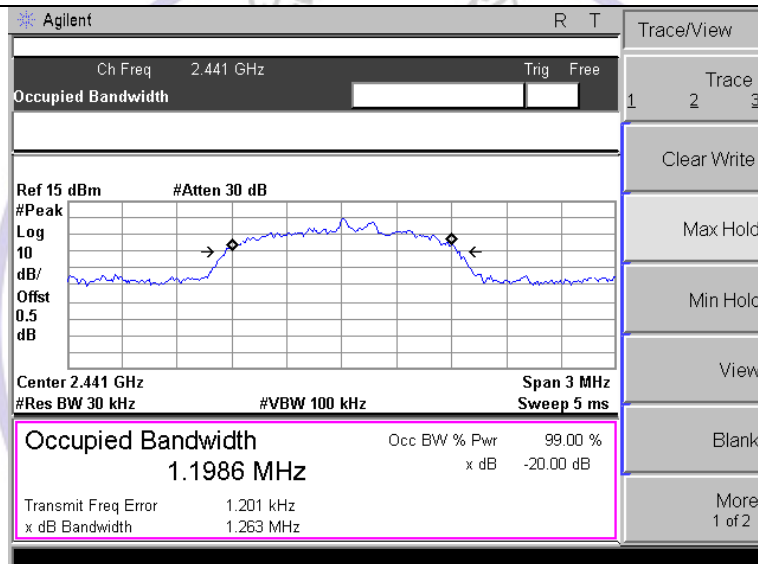

CH39

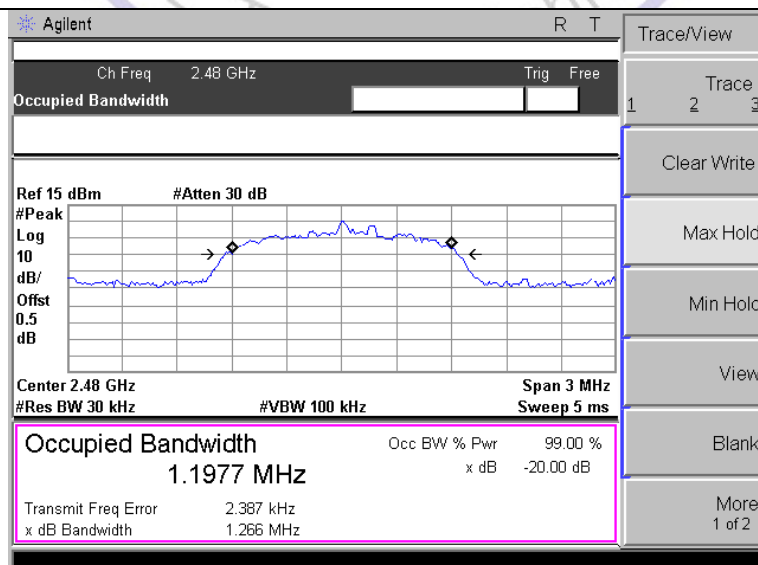

CH78

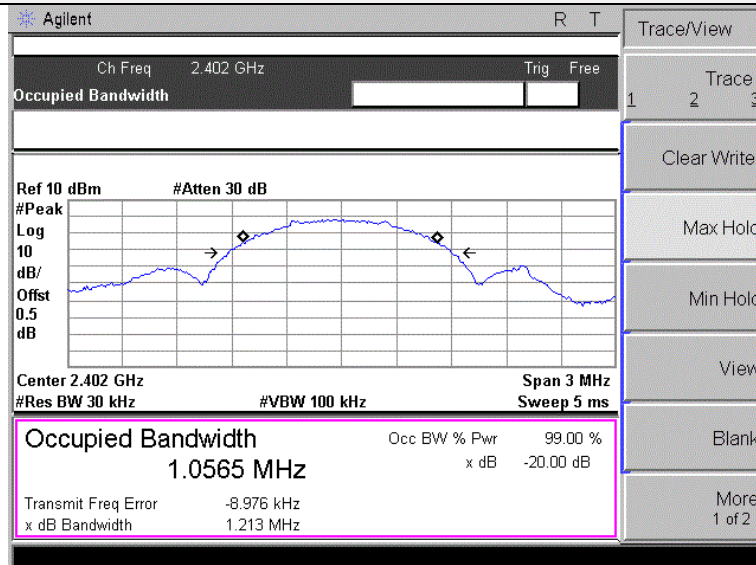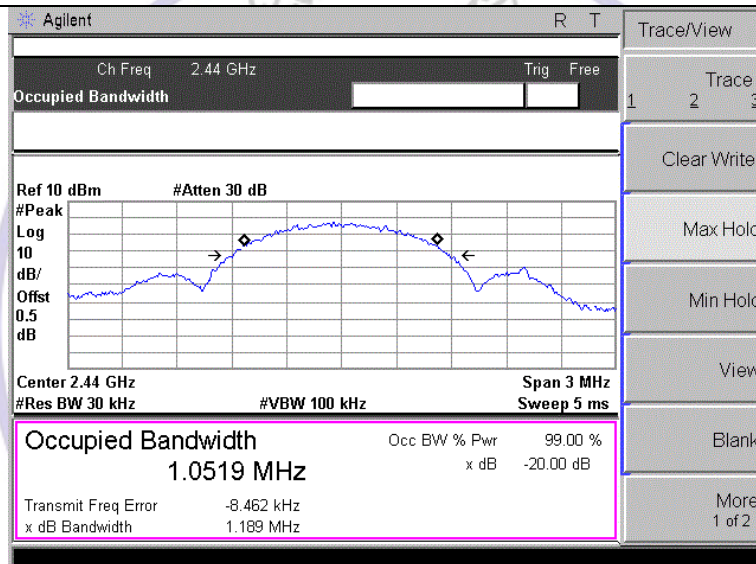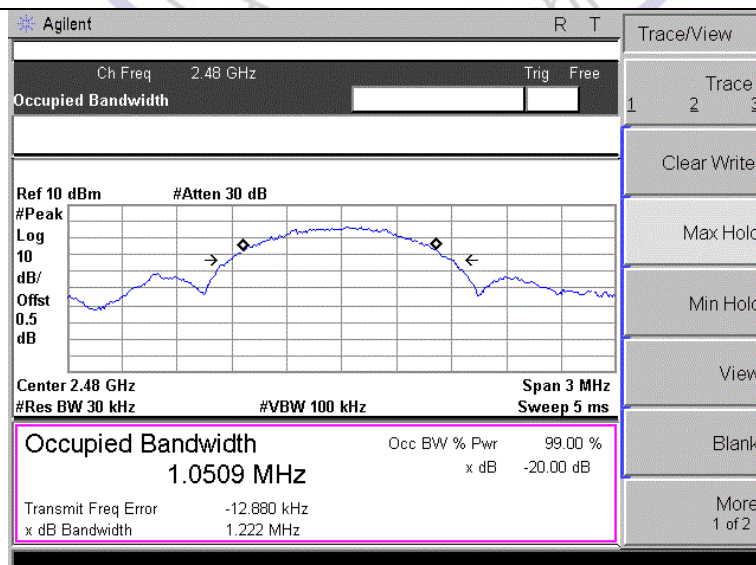BT4.0**GFSK Modulation****CH00****CH19****CH39**

3.4. Antenna Requirement

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction



The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 0.85dBi.

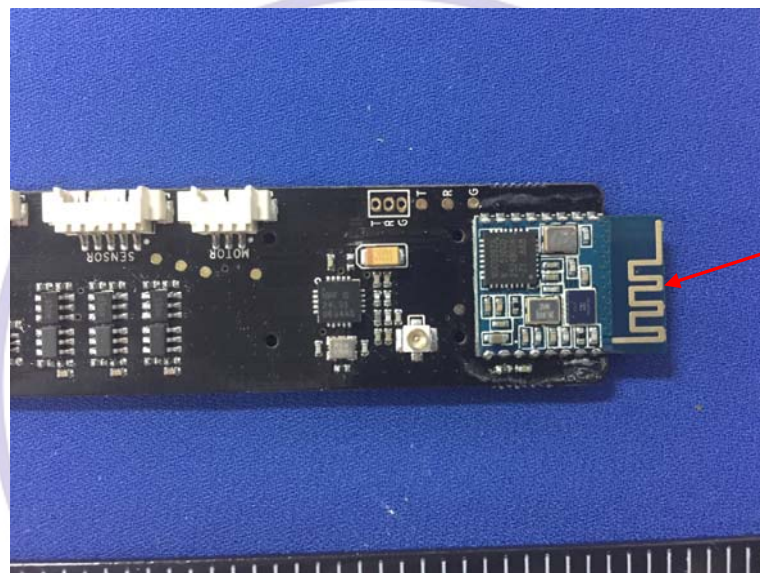


BT
antenna

CTL Testing Technology

4. Test Setup Photos of the EUT

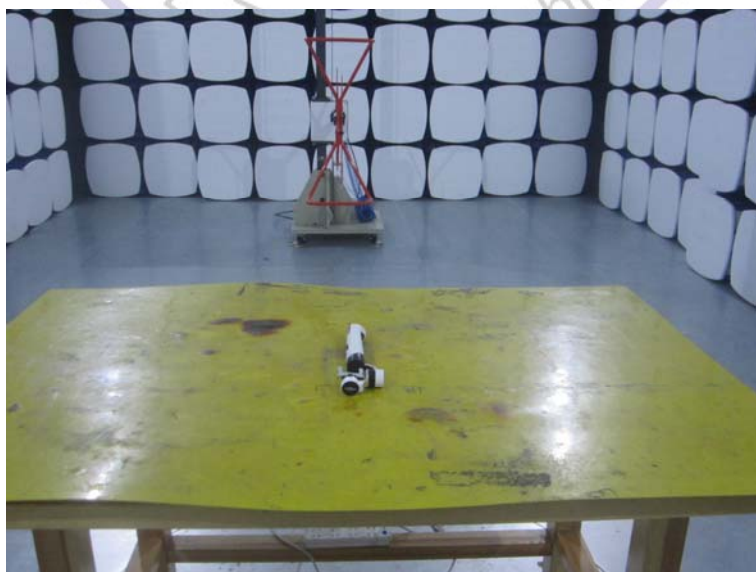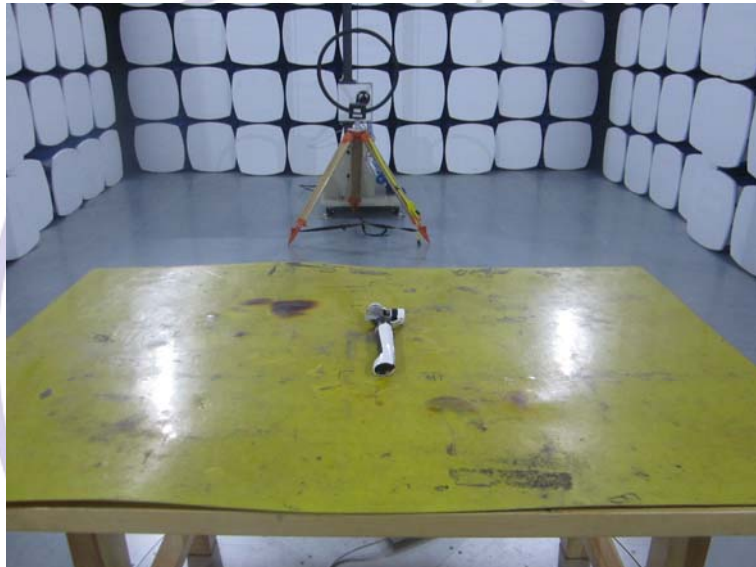

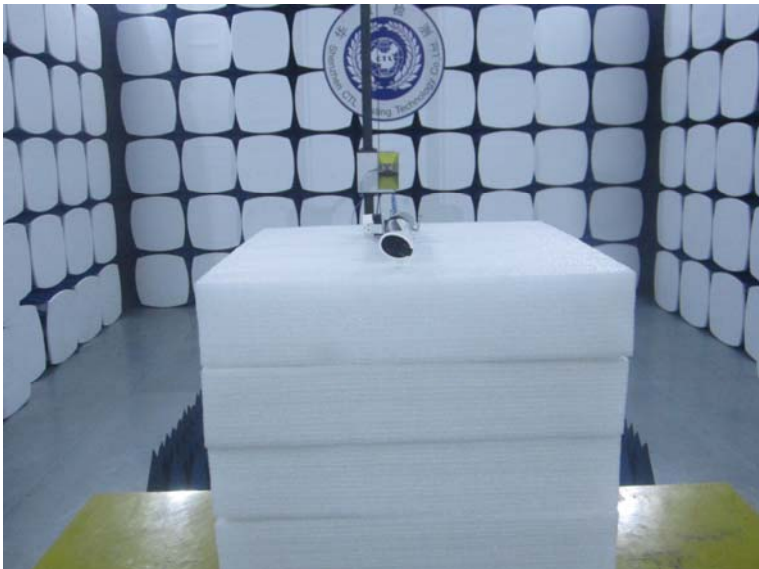

5. External and Internal Photos of the EUT




External Photos of EUT














Internal Photos of EUT

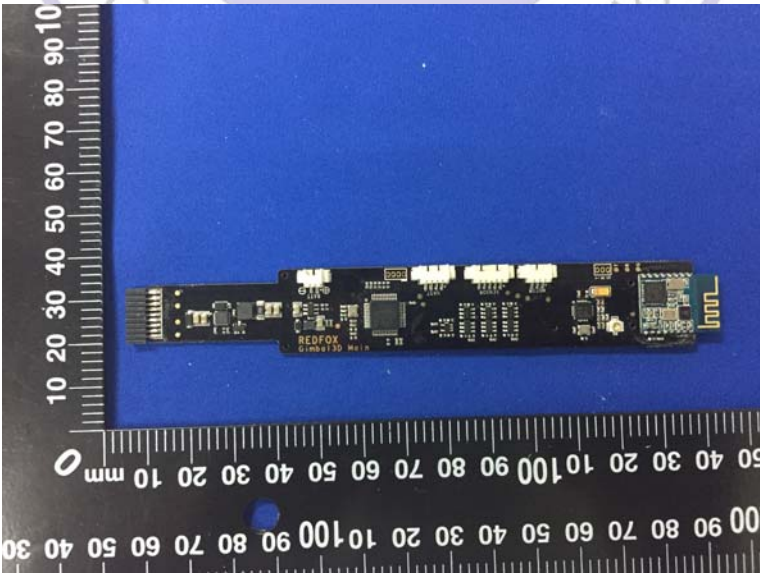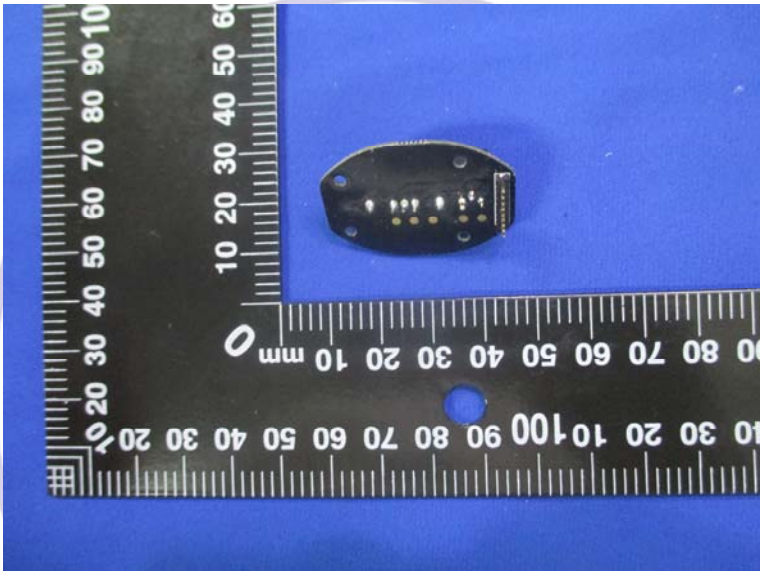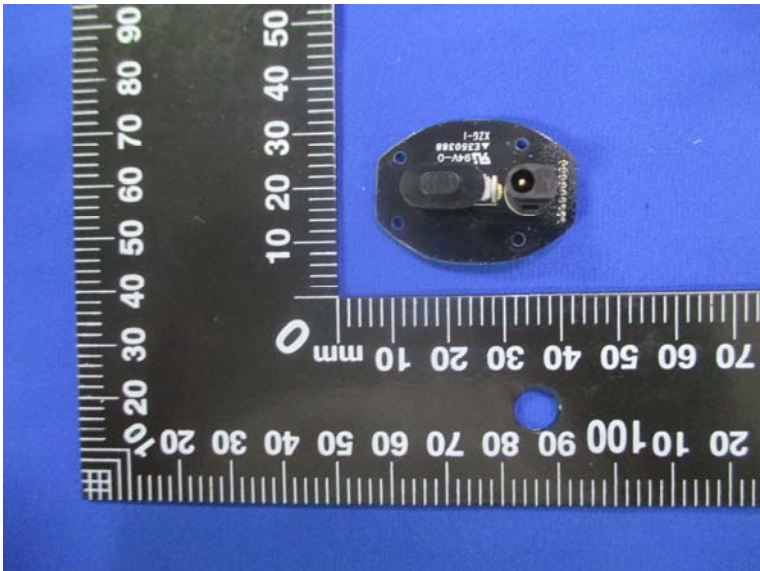

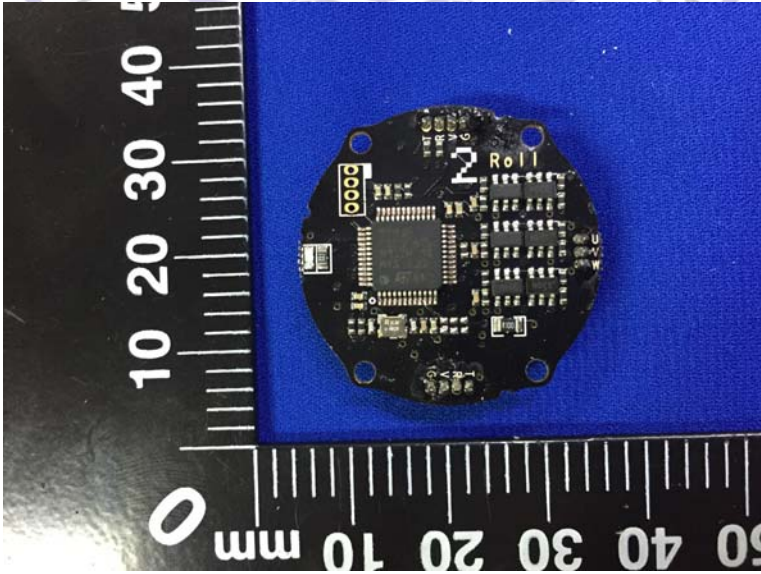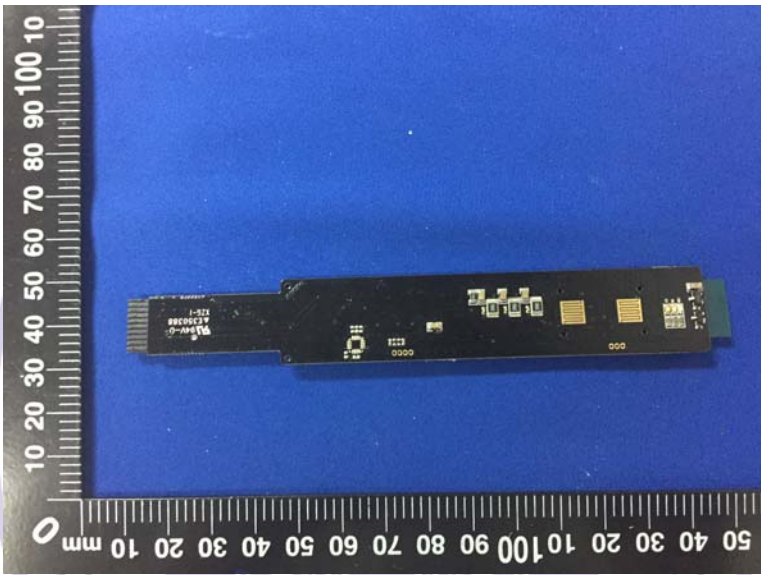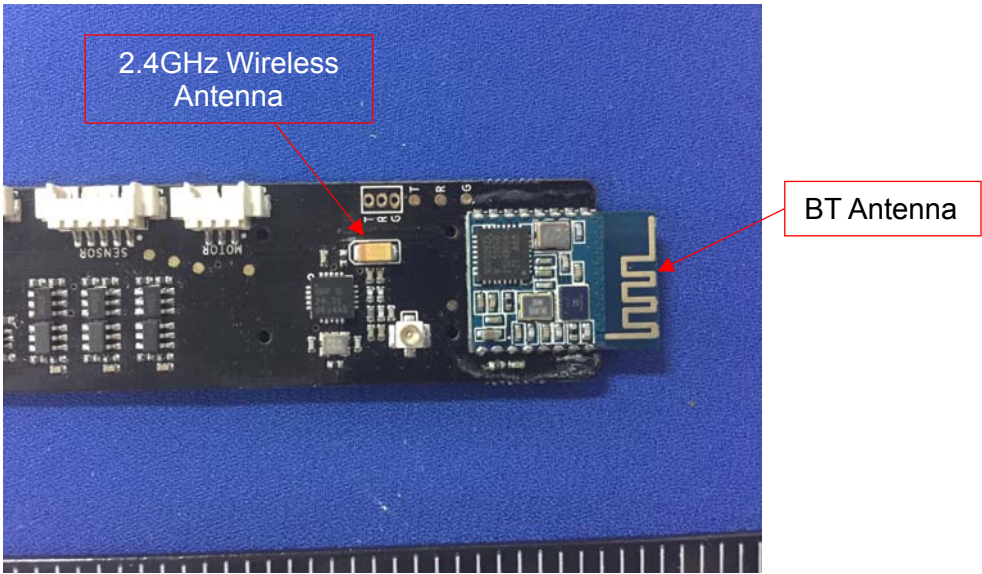

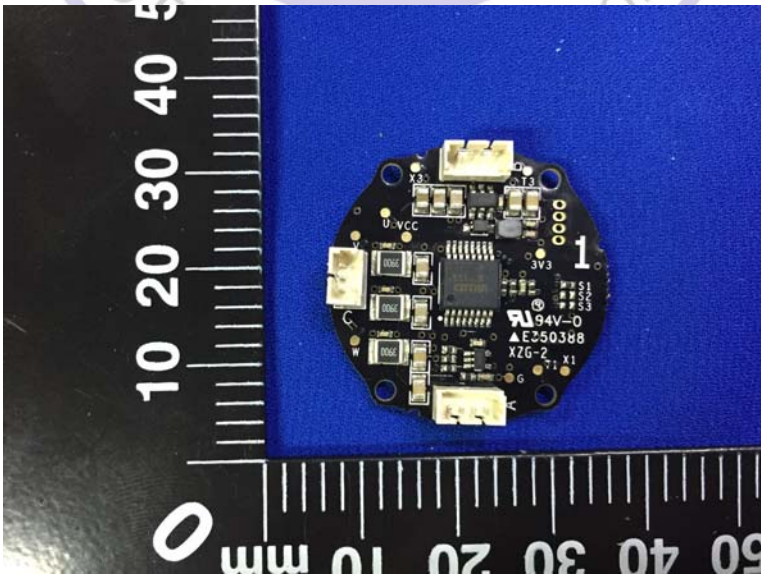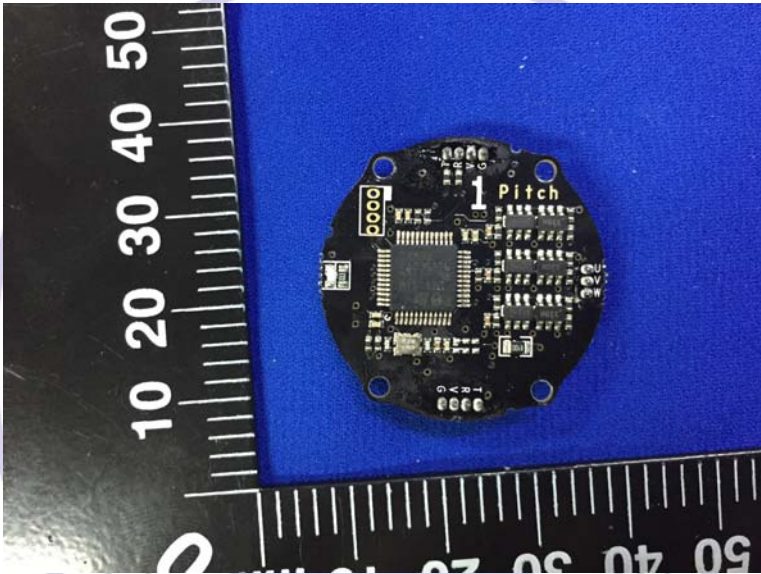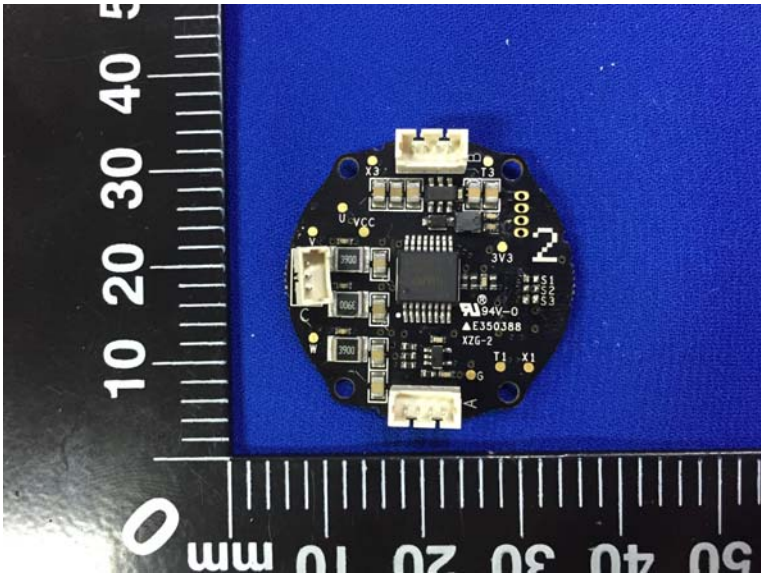

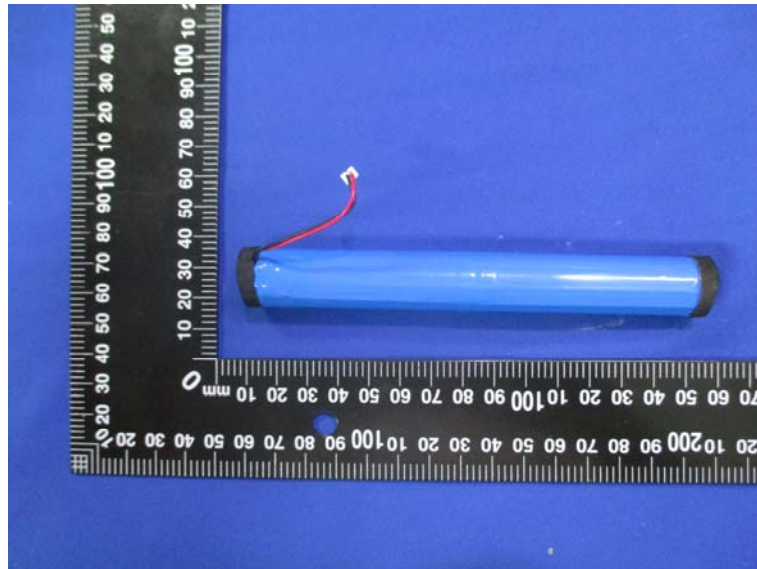

***** End of Report *****

