

FCC Test Report

FCC ID : 2AGMSTDAIRLE2015001

Equipment : AIRHub

Model No. : AIR01

Brand Name : Air Training system

Applicant: Terrain Dynamics

Address : 13 Harold St, Dianella 6059, Western Australia,

Australia

Standard : 47 CFR FCC Part 15.247

Received Date : Oct. 21, 2015

Tested Date : Oct. 29 ~ Nov. 04, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

ilac-MRA



Report No.: FR5O2102 Report Version: Rev. 01 Page: 1 of 32



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	Test Equipment List and Calibration Data	
1.5	Test Standards	8
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION	9
2.1	Testing Condition	9
2.2	The Worst Test Modes and Channel Details	9
3	TRANSMITTER TEST RESULTS	10
3.1	Conducted Emissions	10
3.2	6dB and Occupied Bandwidth	13
3.3	RF Output Power	
3.4	Power Spectral Density	17
3.5	Emissions in Restricted Frequency Bands	
3.6	Emissions in non-restricted Frequency Bands	29
4	TEST LABORATORY INFORMATION	32



Release Record

Report No.	Version	Description	Issued Date
FR5O2102	Rev. 01	Initial issue	Jan. 25, 2016

Report No.: FR5O2102 Page: 3 of 32



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 19.635MHz 16.93 (Margin -33.07dB) - AV	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 4804.00MHz	Pass
15.209	Radiated Emissions	52.46 (Margin -1.54dB) - AV	F 455
15.247(b)(3)	Maximum Output Power	Power [dBm]: -3.28	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR5O2102 Page: 4 of 32



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz) Bluetooth Ch. Freq. (MHz) Channel Number Data Rate						
2400-2483.5 V4.0 LE 2402-2480 0-39 [40] 1 Mbps						
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.						

1.1.2 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)	Remarks
1	Chip	No	1.3	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
-------------------	------------------

1.1.4 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

Report No.: FR5O2102 Page: 5 of 32



1.1.5 Test Tool and Duty Cycle

Test software	Garmin USB Monitor
Version	Rev 3.0
Duty cycle of test signal (%)	66.20%
Duty Factor (dB)	1.79


1.1.6 Power Setting

Modulation Mode	Test Frequency (MHz)			
Wiodulation Wiode	2402	2440	2480	
GFSK/1Mbps	14	14	14	

1.2 Local Support Equipment List

N/A

1.3 Test Setup Chart

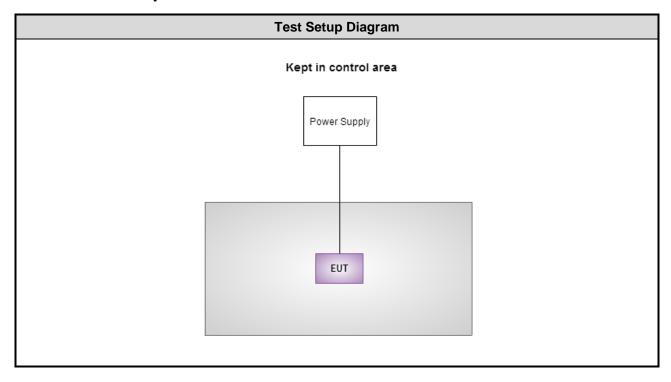

Report No.: FR5O2102 Page: 6 of 32



1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission	Conducted Emission						
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)						
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until						
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015			
Measurement Software	AUDIX	e3	6.120210k	NA	NA			
Note: Calibration Inte	erval of instruments liste	d above is one year.						

Test Item	Radiated Emission	Radiated Emission						
Test Site	966 chamber 3 / (030	CH03-WS)						
Instrument	Manufacturer	Model No.	Calibration Date	Calibration Until				
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 14, 2015	Sep. 13, 2016			
Receiver	Agilent	N9038A	MY53290044	Oct. 14, 2015	Oct. 13, 2016			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-562	Jan. 19, 2015	Jan. 18, 2016			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 03, 2015	Feb. 02, 2016			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015			
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015			
Preamplifier	EMC	EMC02325	980187	Sep. 21, 2015	Sep. 20, 2016			
Preamplifier	Agilent	83017A	MY53270014	Sep. 07, 2015	Sep. 06, 2016			
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016			
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 09, 2015	Feb. 08, 2016			
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22601/4	Feb. 09, 2015	Feb. 08, 2016			
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 09, 2015	Feb. 08, 2016			
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 09, 2015	Feb. 08, 2016			
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 09, 2015	Feb. 08, 2016			
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 09, 2015	Feb. 08, 2016			
Measurement Software	AUDIX	e3	6.120210g	NA	NA			
Note: Calibration Int	erval of instruments lis	sted above is one year.						

Report No.: FR5O2102 Page: 7 of 32



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
DC POWER SOURCE	GW INSTEK	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Inter	rval of instruments liste	d above is one year.			

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013 FCC KDB 558074 D01 DTS Meas Guidance v03r03

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.99 dB
Radiated emission > 1GHz	±5.52 dB

Report No.: FR5O2102 Page: 8 of 32



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 55%	Peter Lin
Radiated Emissions	03CH03-WS	20-24°C / 60-63%	Morgan Chen Warren Lee
RF Conducted	TH01-WS	22°C / 63%	Alex Huang

FCC site registration No.: 390588IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2402	1Mbps	
Radiated Emissions ≤ 1GHz	BT LE	2402	1Mbps	
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	
Maximum Output Power				
6dB bandwidth	BT LE	2402, 2440, 2480	1Mbps	
Power spectral density				

Report No.: FR5O2102 Page: 9 of 32



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

	Conducted Emissions Limit	
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarith	m of the frequency.	

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

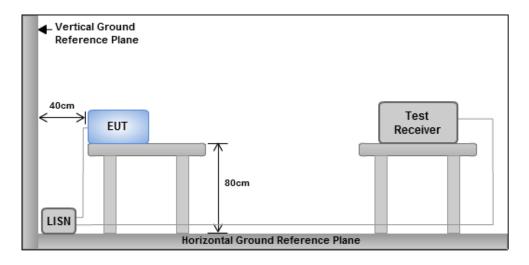


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR5O2102 Page: 10 of 32




3.1.4 Test Result of Conducted Emissions

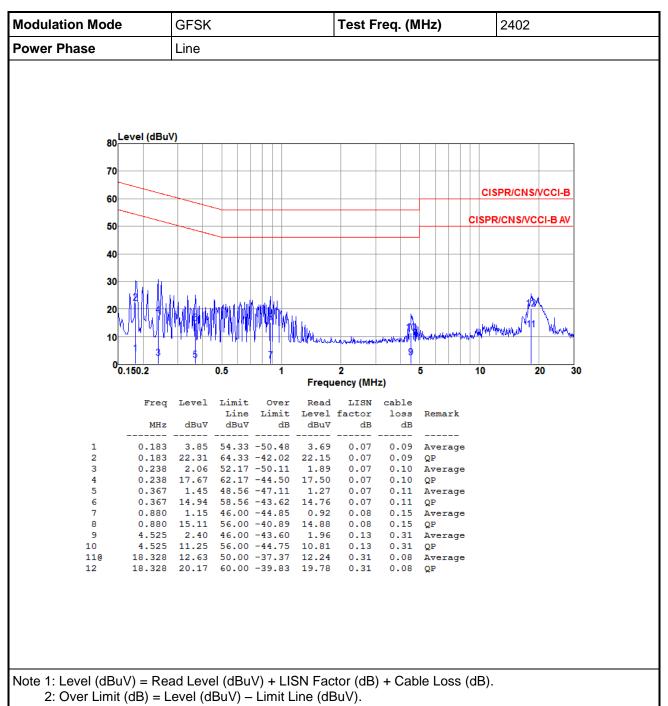

Report No.: FR5O2102 Page: 11 of 32



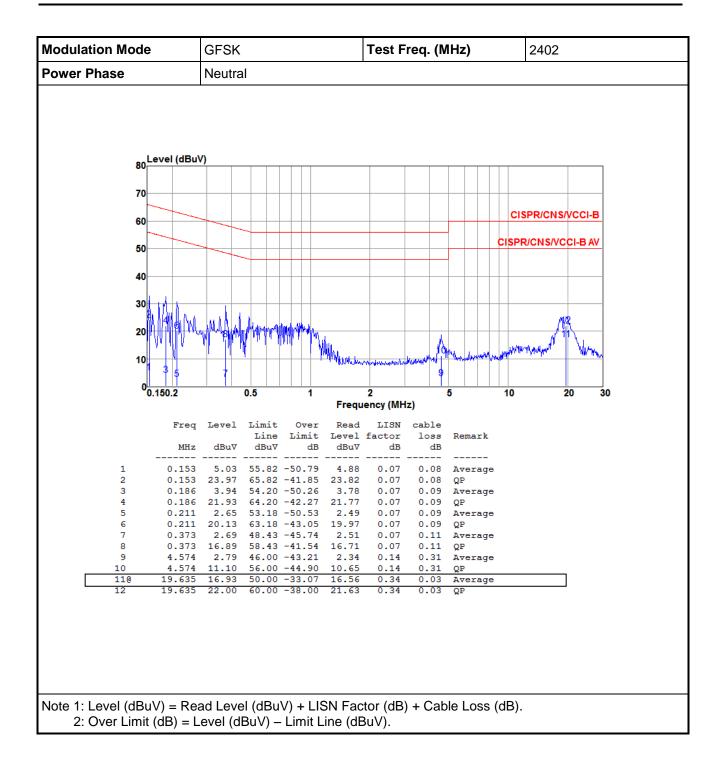

Report No.: FR5O2102 Page: 12 of 32



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = 30 kHz, Video bandwidth = 100 kHz.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup




Report No.: FR5O2102 Page: 13 of 32



3.2.4 Test Result of 6dB and Occupied Bandwidth

Mode	Freq. (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit of 6dB Bandwidth (kHz)
BT LE	2402	0.661	1.02	500
BT LE	2440	0.665	1.01	500
BT LE	2480	0.665	1.01	500

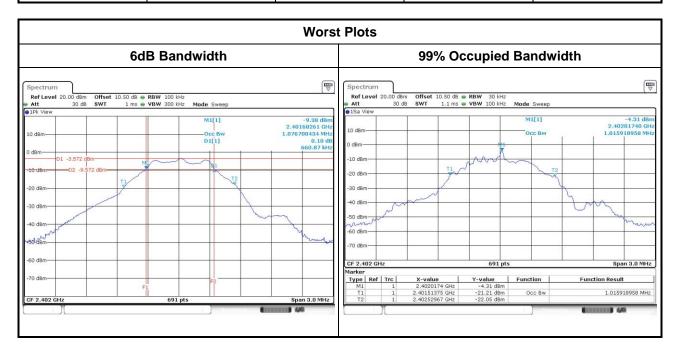

Report No.: FR5O2102 Page: 14 of 32



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Cor	duct	ed power shall not exceed 1Watt.
\boxtimes	Ante	enna gain <= 6dBi, no any corresponding reduction is in output power limit.
	Ante	enna gain > 6dBi
		Non Fixed, point to point operations. The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
		Fixed, point to point operations Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
		Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations .no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.


Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Average Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR5O2102 Page: 15 of 32



3.3.4 Test Result of Maximum Output Power

			Peak Power		Antenna	EIRP	EIRP
Mode	Freq. (MHz)	Power (mW)	Power (dBm)	Limit (dBm)	gain (dBi)	(dBm)	Limit (dBm)
BT LE	2402	0.470	-3.28	30	1.3	-1.98	36
BT LE	2440	0.356	-4.48	30	1.3	-3.18	36
BT LE	2480	0.299	-5.25	30	1.3	-3.95	36

Mode	Freq. (MHz)	AV Power (mW)	AV Power (dBm)	Limit (dBm)
BT LE	2402	0.433	-3.64	
BT LE	2440	0.310	-5.09	
BT LE	2480	0.258	-5.88	

Note: Average power is for reference only

Report No.: FR5O2102 Page: 16 of 32



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - 1. Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.\

3.4.3 Test Setup




Report No.: FR5O2102 Page: 17 of 32



3.4.4 Test Result of Power Spectral Density

Mode	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BT LE	2402	-18.57	8
BT LE	2440	-19.55	8
BT LE	2480	-20.40	8

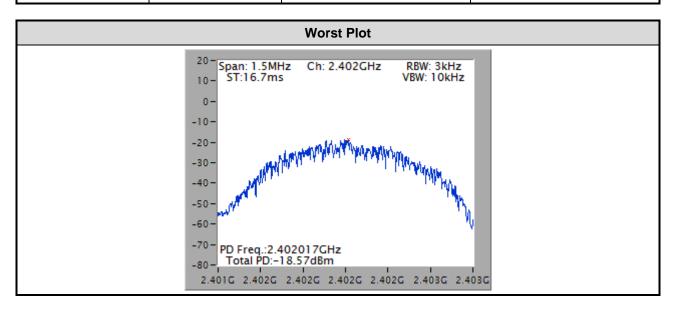

Report No.: FR5O2102 Page: 18 of 32



3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR5O2102 Page: 19 of 32




3.5.3 Test Setup

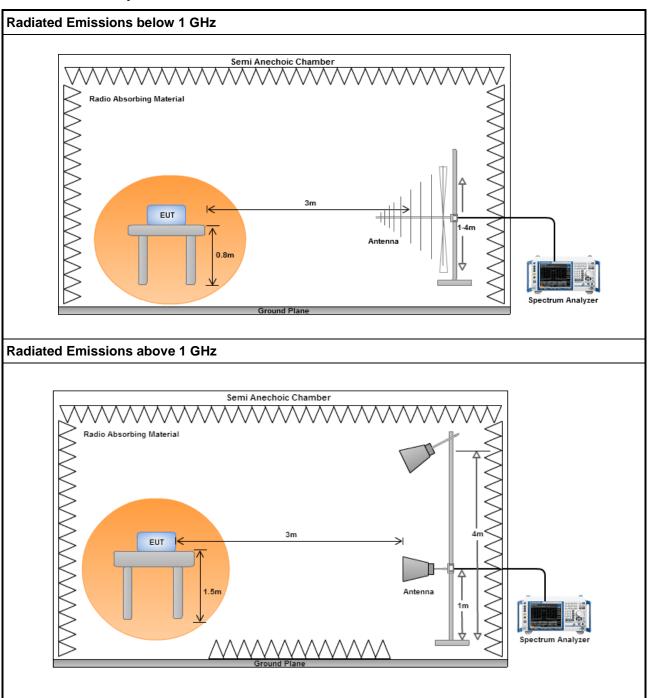

Report No.: FR5O2102 Page: 20 of 32



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

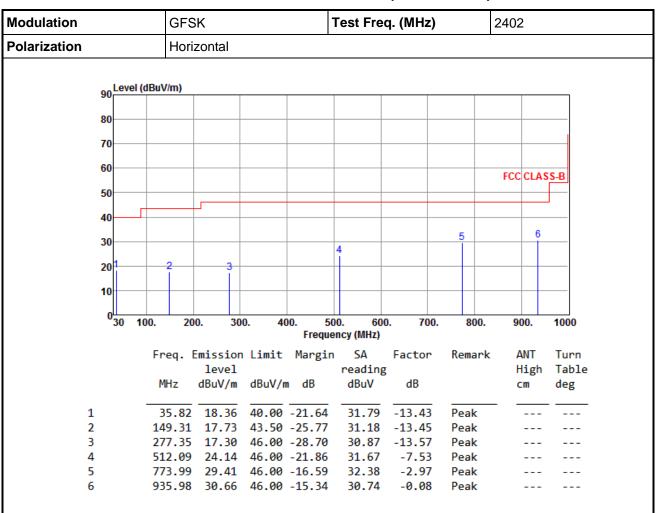

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5O2102 Page: 21 of 32



Modulation Polarization			GFS	K		-	Test Freq. (MHz)				2402		
			Vertical										
	90 <mark>L</mark>	evel (dE	BuV/m)										
	80												
	70												
	60												
											FCC CL	ASS-B	
	50												
	40			_									
	20								4	5		6	
	30	1				3							
	20												
	10												
	0 <mark>_</mark> 3	0 100). 20	0. 30	0. 40		00. 600 ency (MHz)	0. 700). 8	00.	900.	1000	
			Enoa	mission	limi+	Margin		Factor	Rem	ank	ANT	Turn	
			rreq.	level	LIMIT	liai.8111	reading		Kelli	ai K	Hig		
			MHz	dBuV/m	dBuV/r	n dB	dBuV	dB			cm	deg	
1	ı	_	47.46	22.00	40.00	-18.00	34.88	-12.88	Pea	k			
	2		156.10			-25.22	31.83	-13.55	Pea				
3	3		455.83		46.00	-23.24	31.42	-8.66	Pea	k			
	1		746.83			-15.98	33.38	-3.36	Pea				
5			838.98	29.16		-16.84	31.14	-1.98					
6)		938.89	30.86	46.00	-15.14	30.89	-0.03	Pea	K			


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5O2102 Page: 22 of 32



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

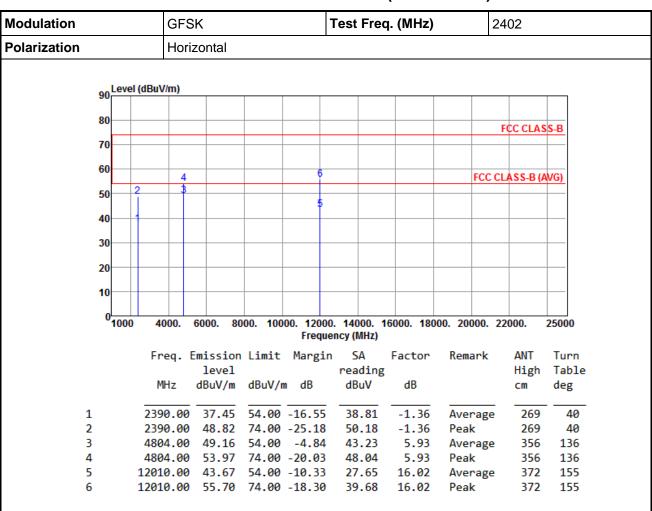


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR5O2102 Page: 23 of 32



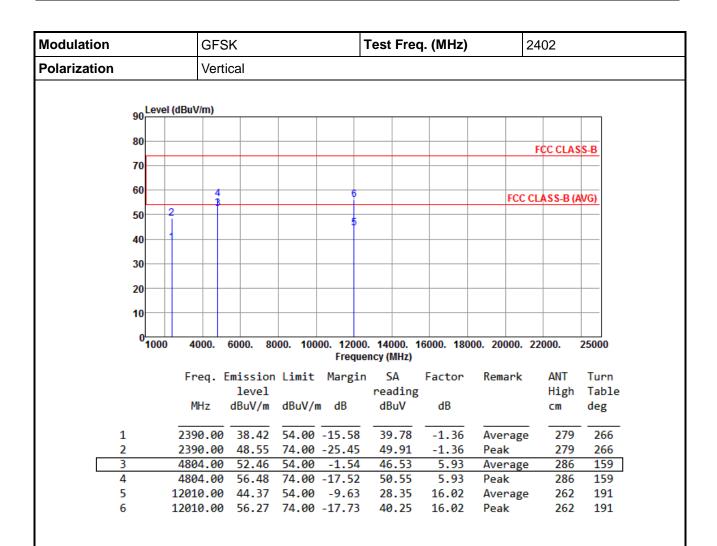

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5O2102 Page: 24 of 32



Modulation		GFSK	GFSK				Test Freq. (MHz)				2440		
Polarization	larization Horizontal												
	0 Level (dE	BuV/m)											
8	0									F	CC CLAS	S-B	
7	0												

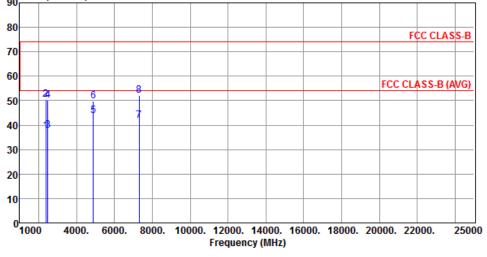

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.57	54.00	-16.43	38.93	-1.36	Average	272	11
2	2390.00	50.59	74.00	-23.41	51.95	-1.36	Peak	272	11
3	2483.50	37.72	54.00	-16.28	38.74	-1.02	Average	272	11
4	2483.50	50.17	74.00	-23.83	51.19	-1.02	Peak	272	11
5	4880.00	43.85	54.00	-10.15	37.87	5.98	Average	223	193
6	4880.00	49.85	74.00	-24.15	43.87	5.98	Peak	223	193
7	7320.00	41.79	54.00	-12.21	31.03	10.76	Average	261	146
8	7320.00	52.26	74.00	-21.74	41.50	10.76	Peak	261	146

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5O2102 Page: 25 of 32



4

5

6

7

8

Modulation	GFSK				Test Fred	2440			
Polarization	Vertical								
90 Level (dE	BuV/m)								
80									
00								FCC CLAS	S-B
70									
60									
50 24	- 6	8					FCC C	LASS-B (A	(VG)
50	5								
40		1							
30									
20									
10									
0	4000	2000 00	00 400		44000 4	2000 400		2000	05000
1000	4000.	6000. 80	00. 100		. 14000. 1 ency (MHz)	6000. 1800	00. 20000. 2	2000.	25000
	Freq. E	mission	Limit	Margin	SA	Factor	Remark	ANT	Turn
		level		_	reading			High	Table
	MHz	dBuV/m	dBuV/r	n dB	dBuV	dB		cm	deg
1 2	390.00	37.43	54.00	-16.57	38.79	-1.36	Average	327	320
	390.00			-23.88	51.48	-1.36	Peak	327	320
3 2	483.50	37.99	54.00	-16.01	39.01	-1.02	Average	327	320

51.38

38.43

44.98

29.54

-1.02

5.98

5.98

10.76

10.76

Peak

Peak

Peak

Average

Average

327

226

226

226

226

320

14

14

16

16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

2483.50 50.36 74.00 -23.64

4880.00 44.41 54.00 -9.59

7320.00 40.30 54.00 -13.70

7320.00 52.72 74.00 -21.28 41.96

4880.00 50.96

74.00 -23.04

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5O2102 Page: 26 of 32



Modulation Polarization		GFSK			-	Test Fred	2480				
		Horizontal									
	90 Level (dBuV/m)										
	90	Level	(ubuv/III)								
	80										
	-									FCC CLAS	S-B
	70										
	60										
		Щ,	2 .	6					FCC	CLASS-B (A	WG)
	50		1 1	5							
	40		3								
	30										
	20	-									
	10										
	10										
	0	1000	4000.	6000. 80	000. 100	00. 12000). 14000. 1	6000. 180	00. 20000.	22000.	25000
							ency (MHz)				
			Freq. E	mission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			•	level			reading			High	Table
			MHz	dBuV/m	dBuV/ı	n dB	dBuV	dB		cm	deg
1			2483.50	37 99	54 00	-16.01	39.01	-1.02	Average	261	15
2			2483.50			-23.83	51.19	-1.02	Peak	261	15
3			4960.00				33.42	6.03	Average		198

41.75

6.03

11.02

11.02

Peak

Peak

Average

281

127

127

198

223

223

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

4960.00 47.78 74.00 -26.22

7440.00 44.03 54.00 -9.97 33.01 7440.00 53.75 74.00 -20.25 42.73

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5O2102 Page: 27 of 32

Report Version: Rev. 01

5



3

4

5

6

Modulation			GFS	GFSK				Test Freq. (MHz)					2480		
Polarization		Vert	ical												
	90 Level ((dBuV/m)												
	80														
											F	CC CLAS	S-B		
	70														
	60									F	CC CL	ASS-B (A	MG)		
	50		2 4	6							00 017	1) 0-001	-		
	40			5											
	40														
	30														
	20														
	10														
	0	1000	4000.	6000. 80	00. 100		00. 140 Jency (N		5000. 180	00. 2000	00. 22	000.	25000		
			Freq. 1	Emission	Limit	Margi	n S	Д	Factor	Remar	rk	ANT	Turn		
				level			rea	ding				High	Tabl		
			MHz	dBuV/m	dBuV/r	n dB	dB	u V	dB			CM	deg		
1	l		2483.50	38.19	54.00	-15.81	39	.21	-1.02	Avera	age	232	352		
	2			50.81				.83	-1.02	Peak	_	232	352		

31.79

29.31

40.37

6.03

6.03

11.02

11.02

Average

Average

Peak

Peak

232

232

130

130

352

352

337

337

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

4960.00 37.82 54.00 -16.18

7440.00 40.33 54.00 -13.67

7440.00 51.39 74.00 -22.61

4960.00 49.38 74.00 -24.62 43.35

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5O2102 Page: 28 of 32



3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.6.3 Test Setup




Report No.: FR5O2102 Page: 29 of 32



3.6.4 Test Result of Emissions in non-restricted Frequency Bands

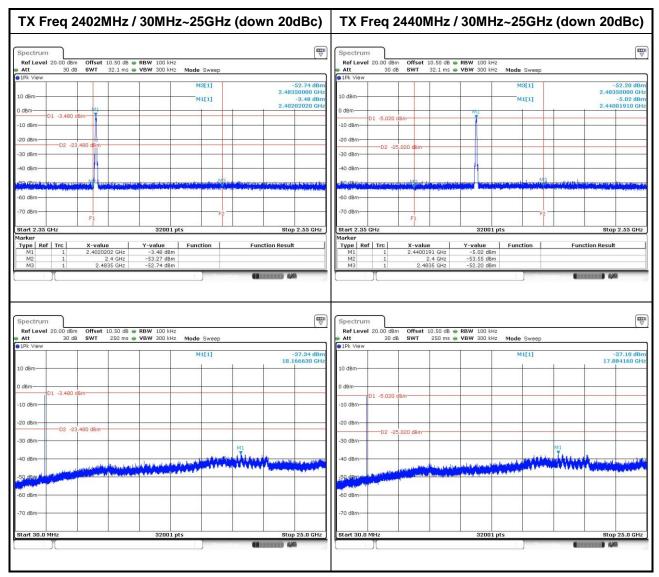

Report No.: FR5O2102 Page: 30 of 32

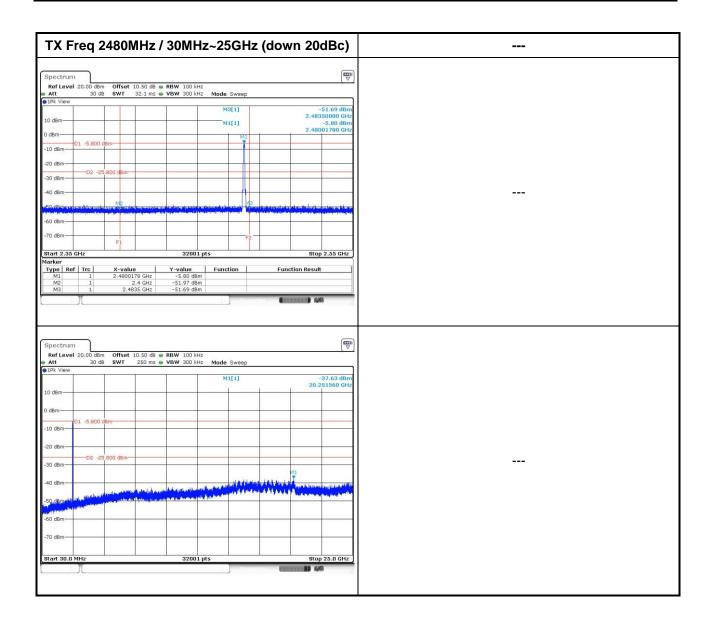

Report No.: FR5O2102 Page : 31 of 32



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan,

R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan

Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR5O2102 Page: 32 of 32