
FCC Test Report

Report No.: AGC05606151105FE03

FCC ID : 2AGQOCX03
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : BLUETOOTH HEADPHONES
BRAND NAME : COULAX
MODEL NAME : COULAX CX03
CLIENT : ShenZhen SanDe Technology Co., Ltd.
DATE OF ISSUE : Dec.10,2015
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec.10,2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY 4

2. GENERAL INFORMATION 5

 2.1. PRODUCT DESCRIPTION.....5

 2.2. TABLE OF CARRIER FREQUENCYS.....5

3. MEASUREMENT UNCERTAINTY..... 7

4. DESCRIPTION OF TEST MODES..... 7

5. SYSTEM TEST CONFIGURATION 9

 5.1. CONFIGURATION OF EUT SYSTEM9

 5.2. EQUIPMENT USED IN EUT SYSTEM9

 5.3. SUMMARY OF TEST RESULTS9

6. TEST FACILITY 10

7 ALL TEST EQUIPMENT LIST 10

8. RADIATED EMISSION 12

 8.1TEST LIMIT..... 12

 8.2. MEASUREMENT PROCEDURE 13

 8.3. TEST SETUP 15

 8.4. TEST RESULT 17

9. BAND EDGE EMISSION 43

 9.1. MEASUREMENT PROCEDURE43

 9.2 TEST SETUP43

 9.3 RADIATED TEST RESULT44

10. 20DB BANDWIDTH..... 52

 10.1. MEASUREMENT PROCEDURE52

 10.2. TEST SET-UP52

 10.3. LIMITS AND MEASUREMENT RESULTS.....52

11. FCC LINE CONDUCTED EMISSION TEST 61

 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST61

 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....61

 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST62

 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....62

 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST63

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 67

APPENDIX B: PHOTOGRAPHS OF EUT 69

1. VERIFICATION OF CONFORMITY

Applicant	ShenZhen SanDe Technology Co., Ltd.
Address	502 #,79 Building,Liyu Pool, Hualian Community, Longhua Road,Longhua New District, Shenzhen City, Guangdong Province, China
Manufacturer	ShenZhen SanDe Technology Co., Ltd.
Address	502 #,79 Building,Liyu Pool, Hualian Community, Longhua Road,Longhua New District, Shenzhen City, Guangdong Province, China
Product Designation	BLUETOOTH HEADPHONES
Brand Name	COULAX
Test Model	COULAX CX03
Note	COULAX CX03 has two color sample.
Date of test	Dec.07,2015 to Dec.08,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By



Time Huang(Huang Nanhui) Dec.10,2015

Reviewed By



Forrest Lei(Lei Yonggang) Dec.10,2015

Approved By



Solger Zhang(Zhang Hongyi)
Authorized Officer Dec.10,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	2.72dBm(Max)
Bluetooth Version	V4.1
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	X26S-V2.0-20150411
Software Version	X26S-20151109-V1.0
Antenna Designation	Ceramic Antenna (Met 15.203 Antenna requirement)
Antenna Gain	1.6dBi
Power Supply	DC 3.7V by battery
Note: The USB port only used for charging and can't be used to transfer data with PC. The EUT supports Bluetooth Low Energy Mode.	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

Software Setting

BlueTest3

Test Mode

PAUSE
RADIO STATUS
RADIO STATUS FULL

TXSTART
TXDATA1
TXDATA2
TXDATA3
TXDATA4

RXSTART1
RXSTART2
RXDATA1

Test Arguments

LO Freq. (MHz)2402

Power (Ext,Int)6050

Close

Execute

Cold Reset

Warm Reset

Test Results


☐ Save to file
Browse for file
Display : ☒ Standard ☐ Bit Error
.\logfile.txt

Opening USB SPI (602250).
Transport active.
dal (Hardware ID 0x332) firmware version 8648.
Sent Command Varid 5004, parameters: 0017 0004 001B 0000 0000 0000
Radio Test CFG PKT successful
Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000
Radio Test CFG PKT successful
Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0962 FF3C 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0962 FF3F 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0962 3C32 0000 0000 0000
Radio Test TXDATA1 successful

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

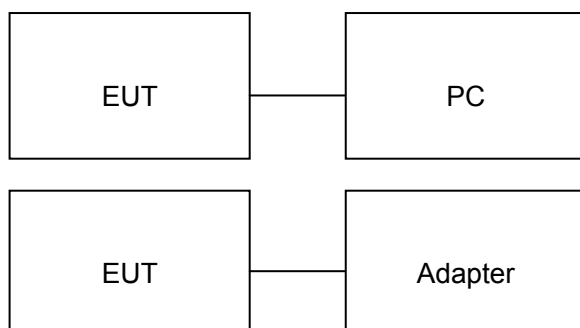

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

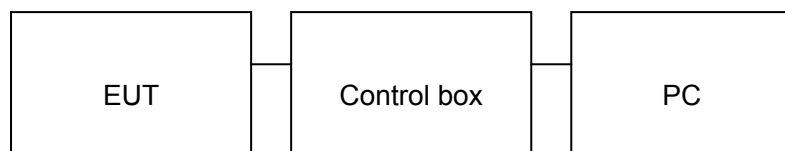

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	BLUETOOTH HEADPHONES	COULAX	COULAX CX03	EUT
2	PC	Lenovo	SL410K	A.E
3	Control box	N/A	N/A	A.E
4	USB Cable	N/A	0.5m, unshielded	A.E
5	AC adapter	GPE0538	1.1m,unshielded	A.E
6	Temporary Antenna Connector	T10	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Compliance Certification Service(Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	02/29/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2015	07/09/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	02/29/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	02/29/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2015	09/26/2016
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Radiation Cable 1	VEM	SE1	S004	07/10/2015	07/09/2016
Radiation Cable 2	VEM	SE1	S005	07/10/2015	07/09/2016
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Conduction Cable	VEM	ME1	M001	07/10/2015	07/09/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB } \mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

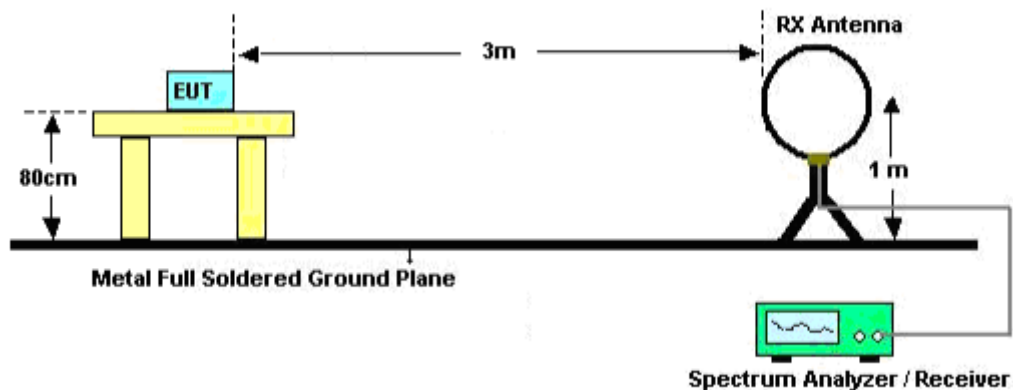

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

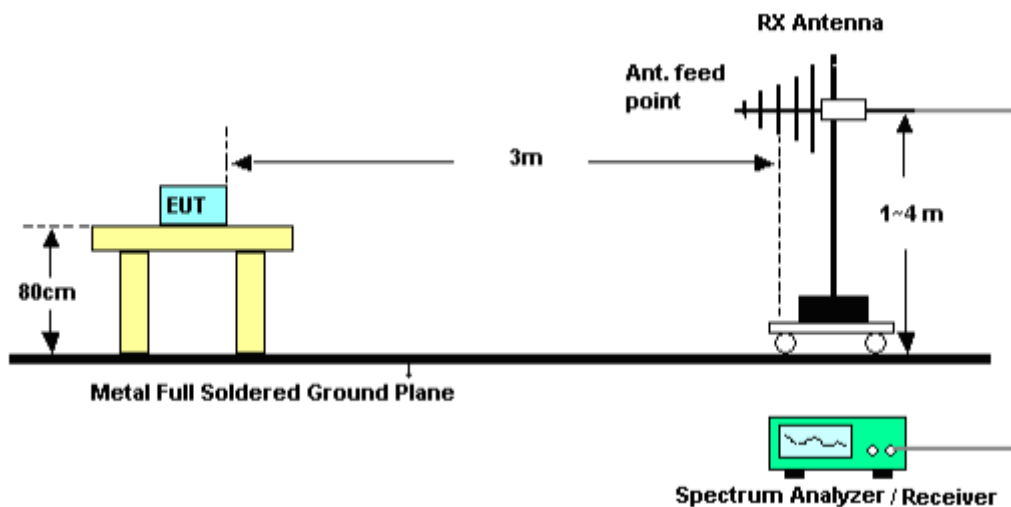

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

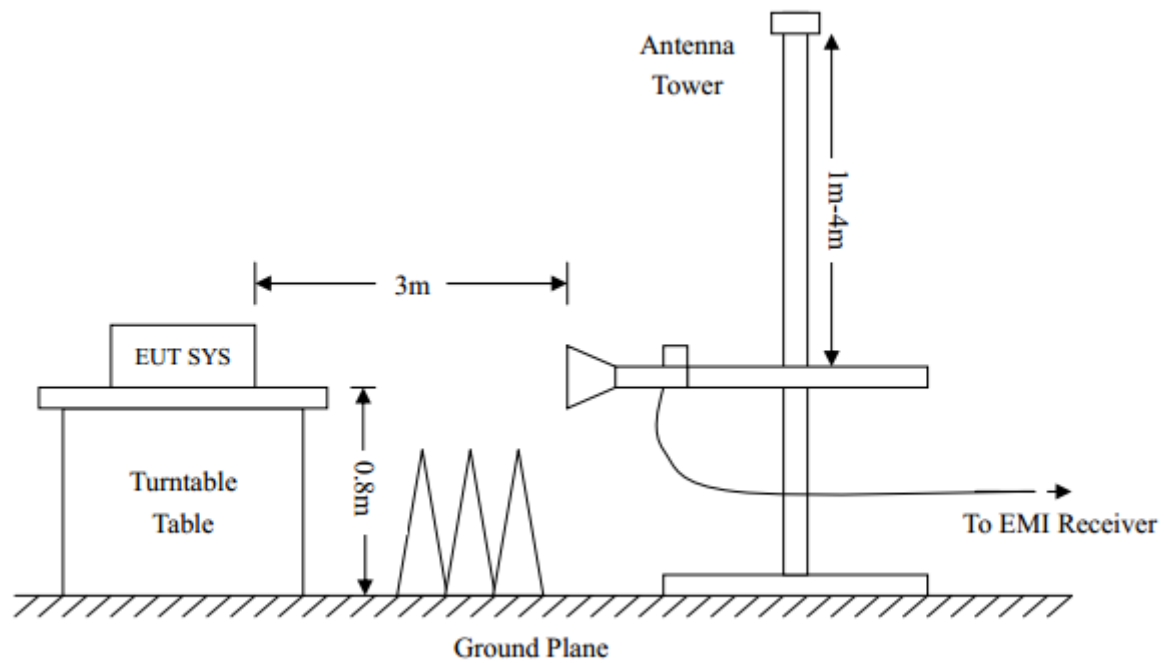

8.4. TEST RESULT

(Worst modulation:GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

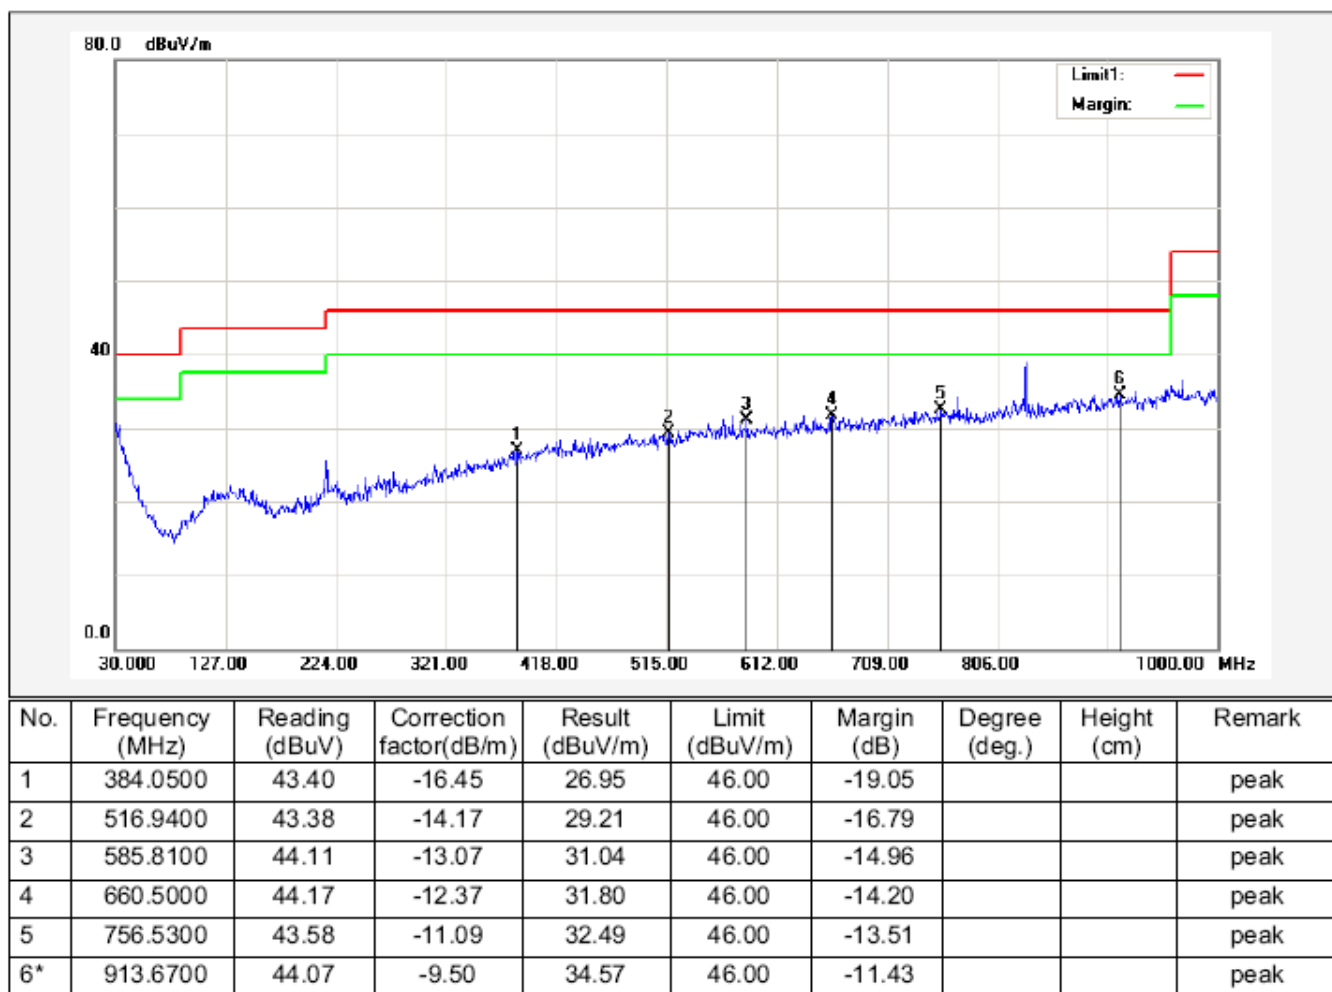

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

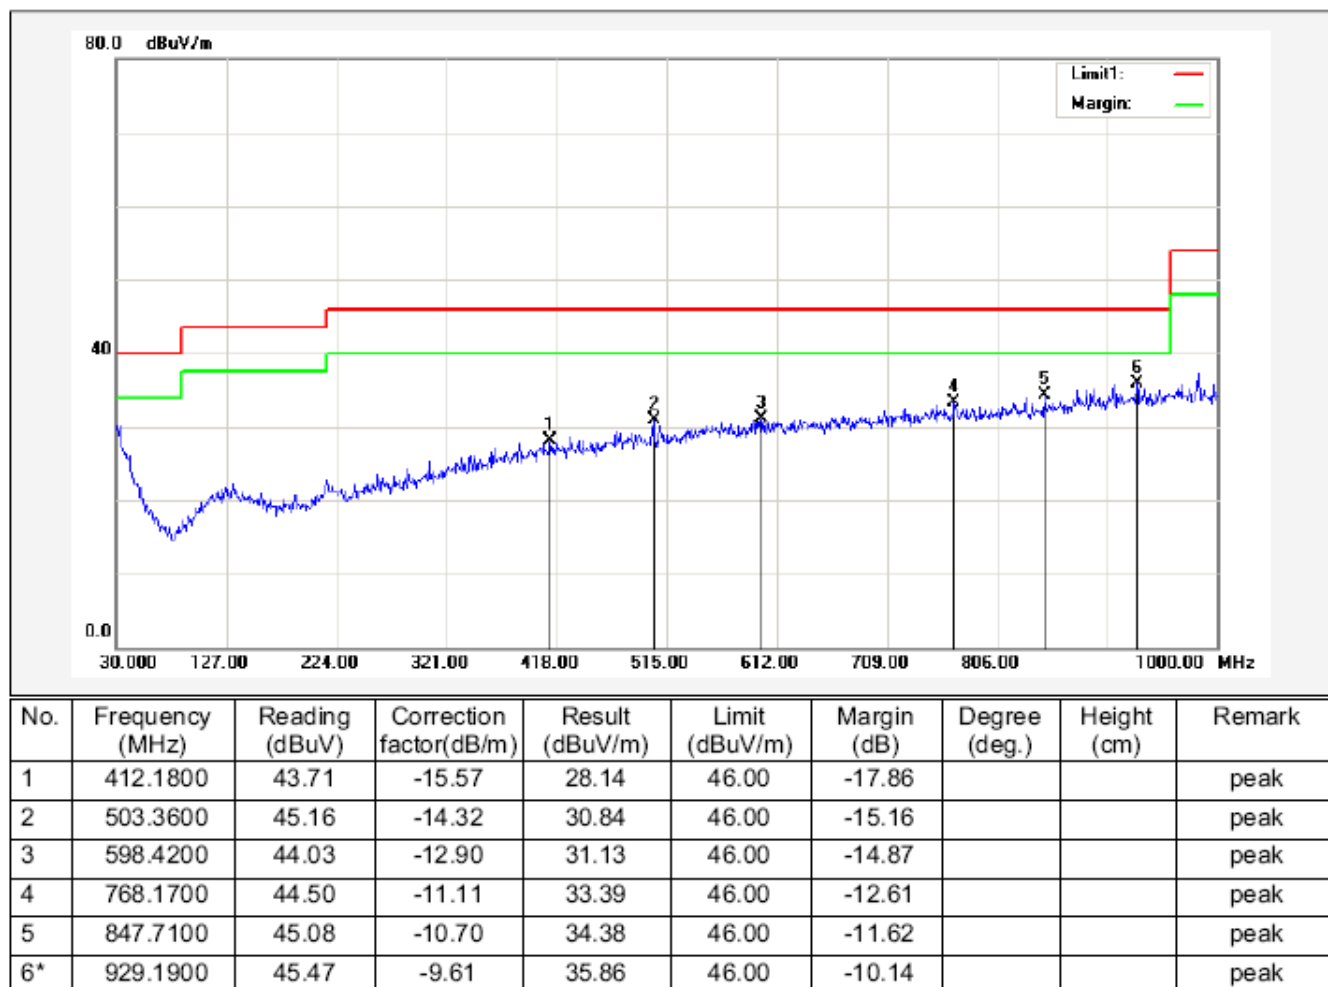


RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

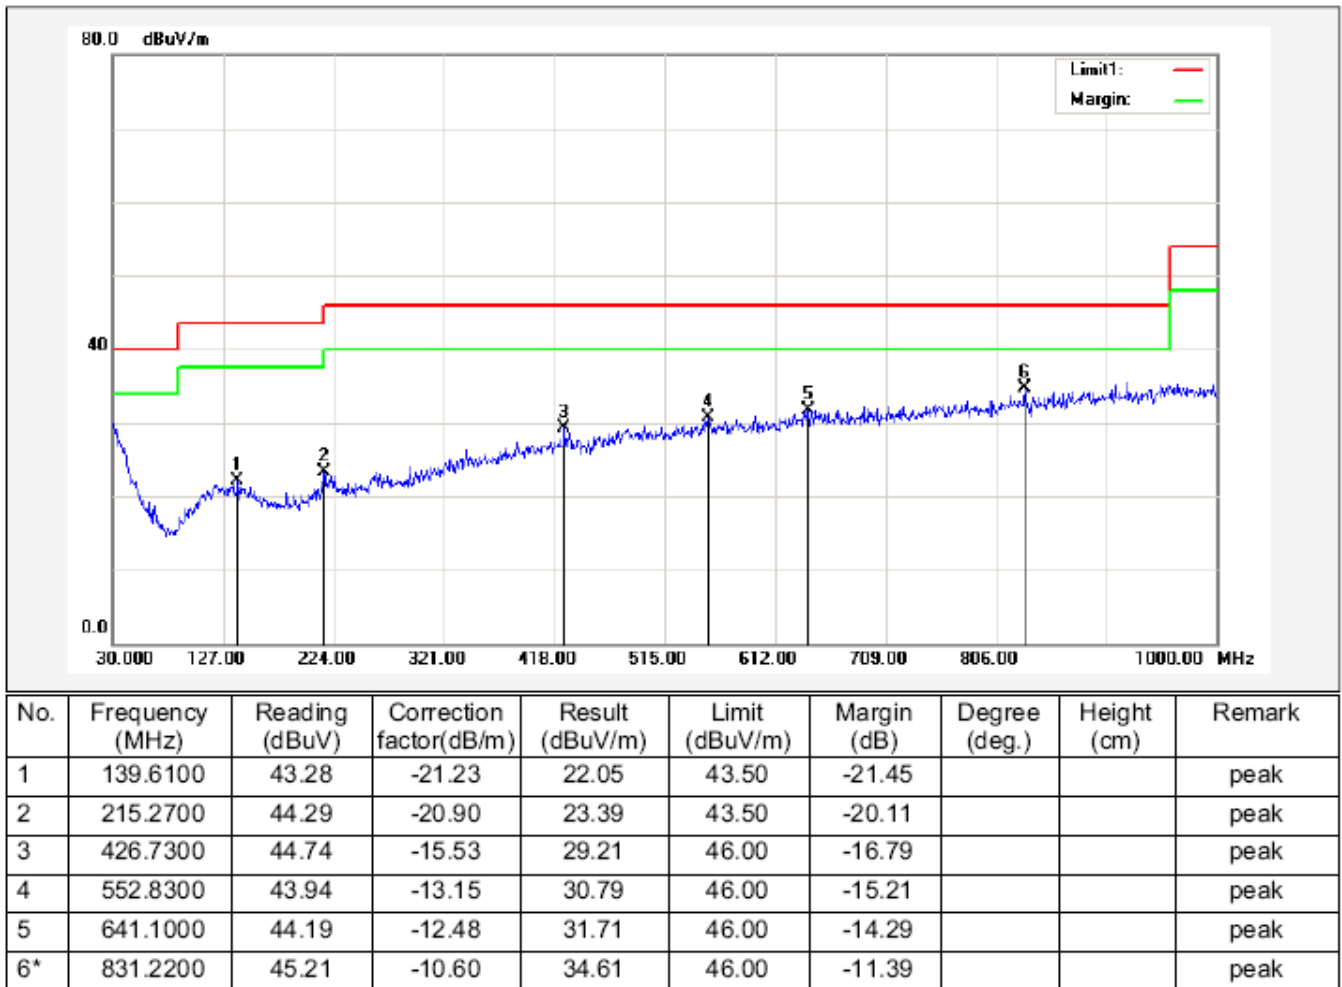**RESULT: PASS**


RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

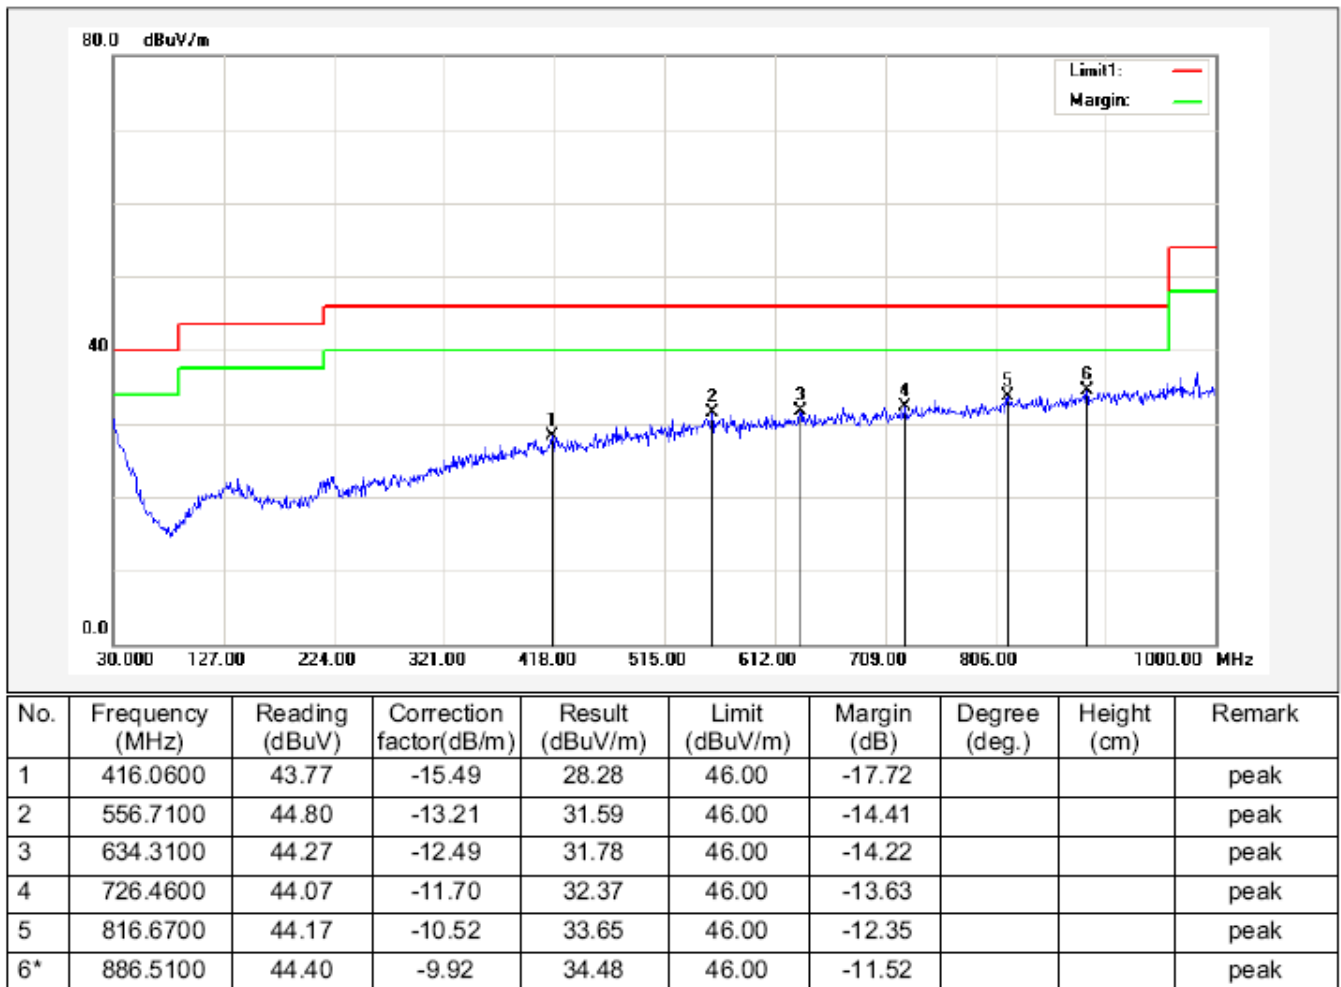**RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

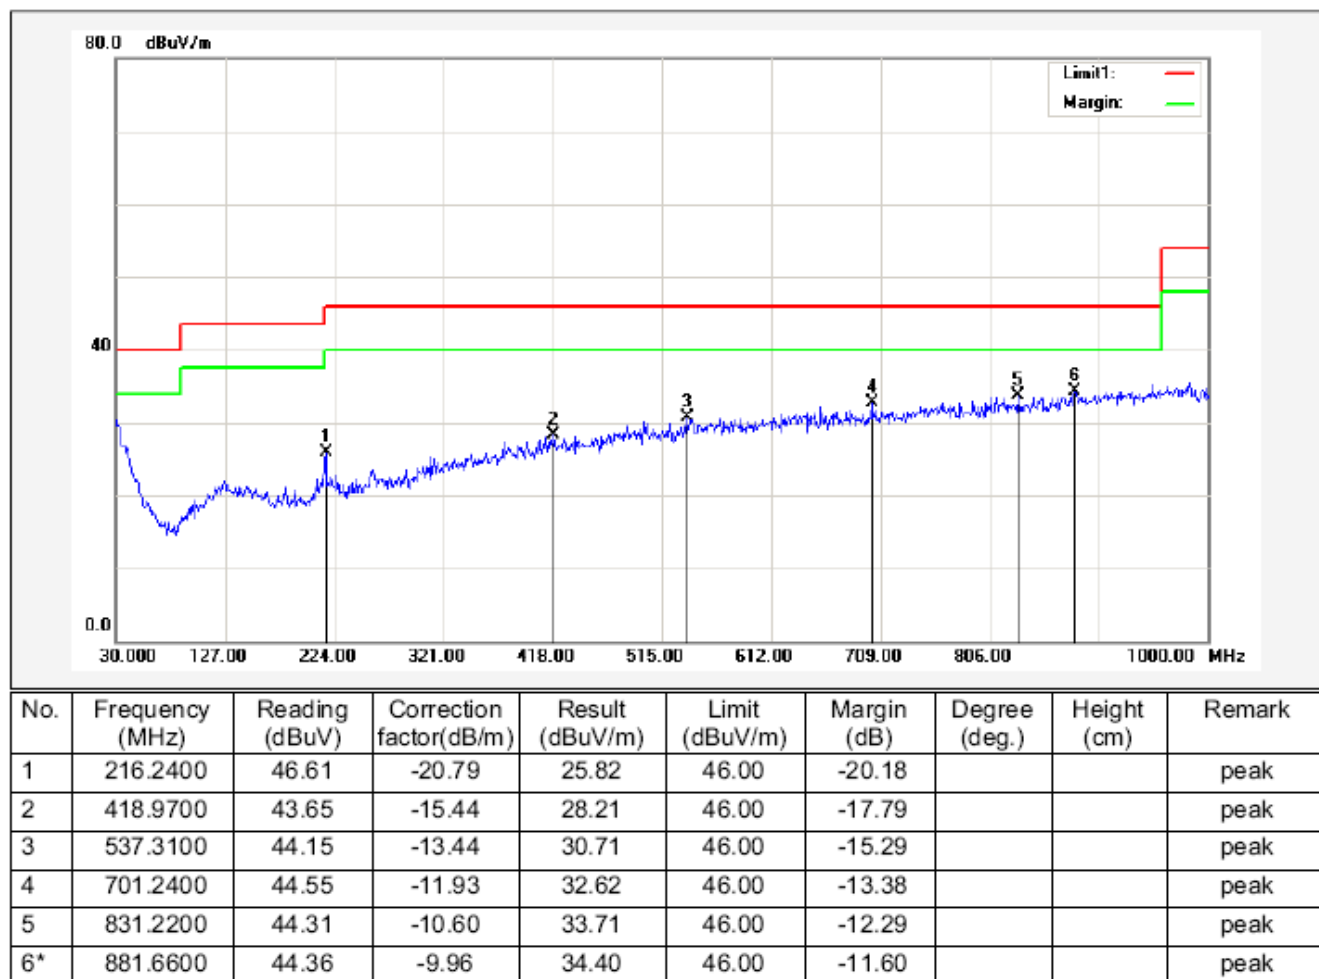

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

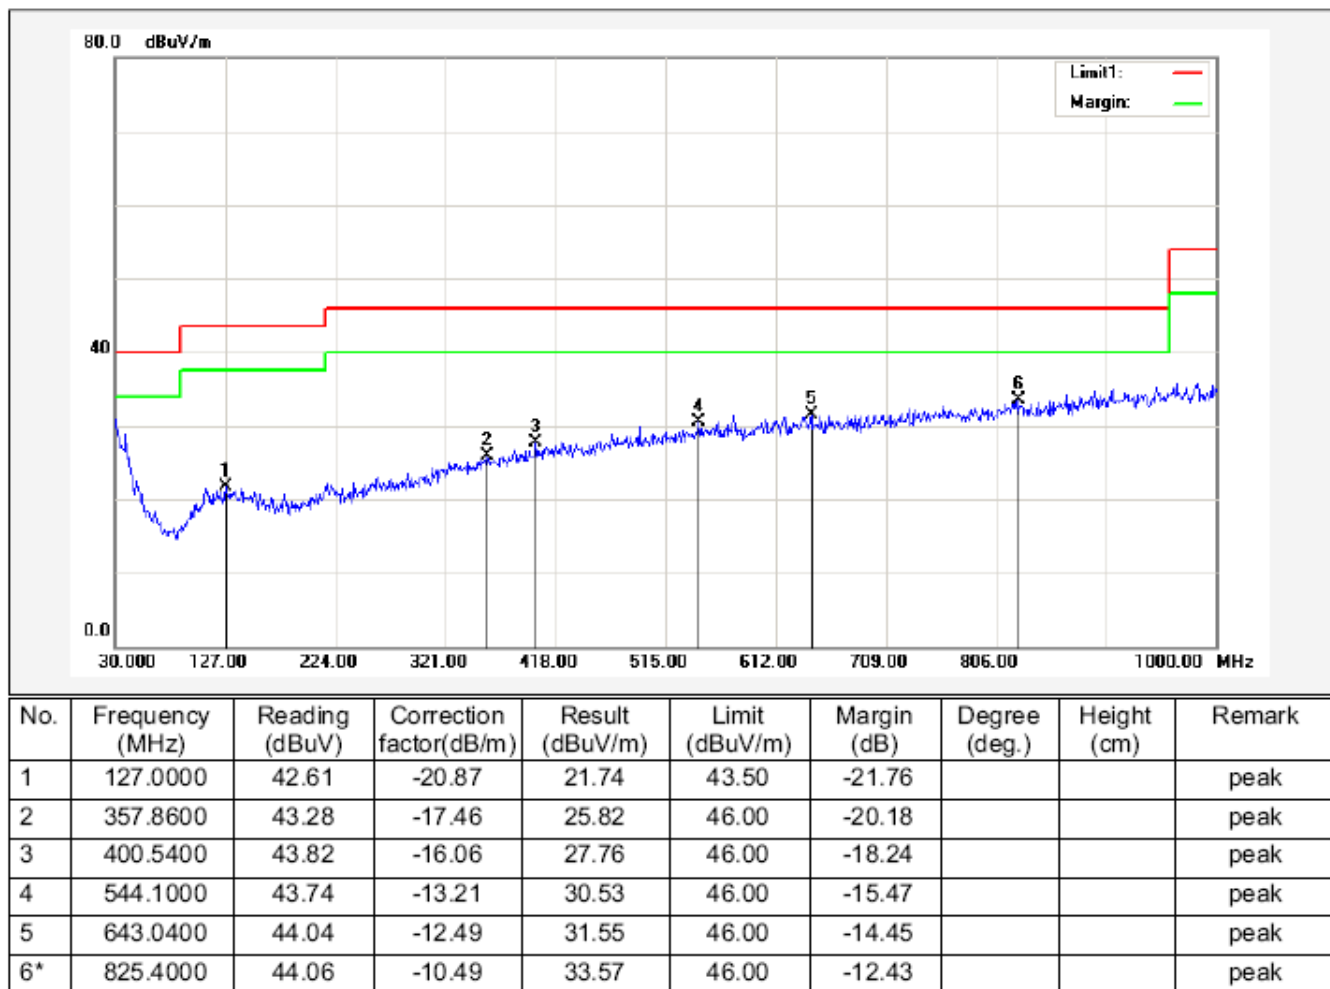

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHZ

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

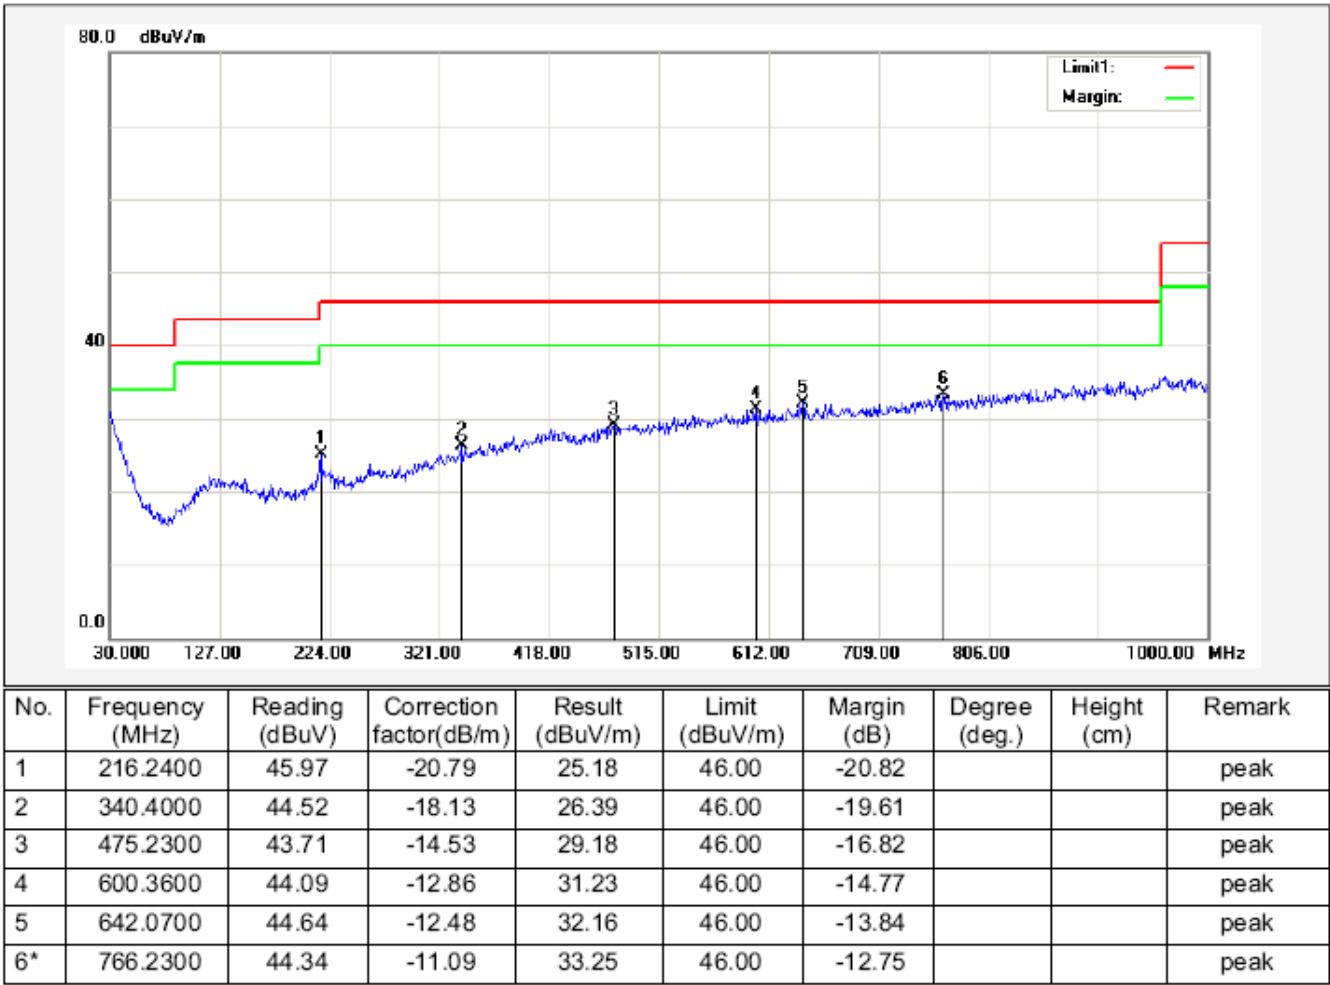

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

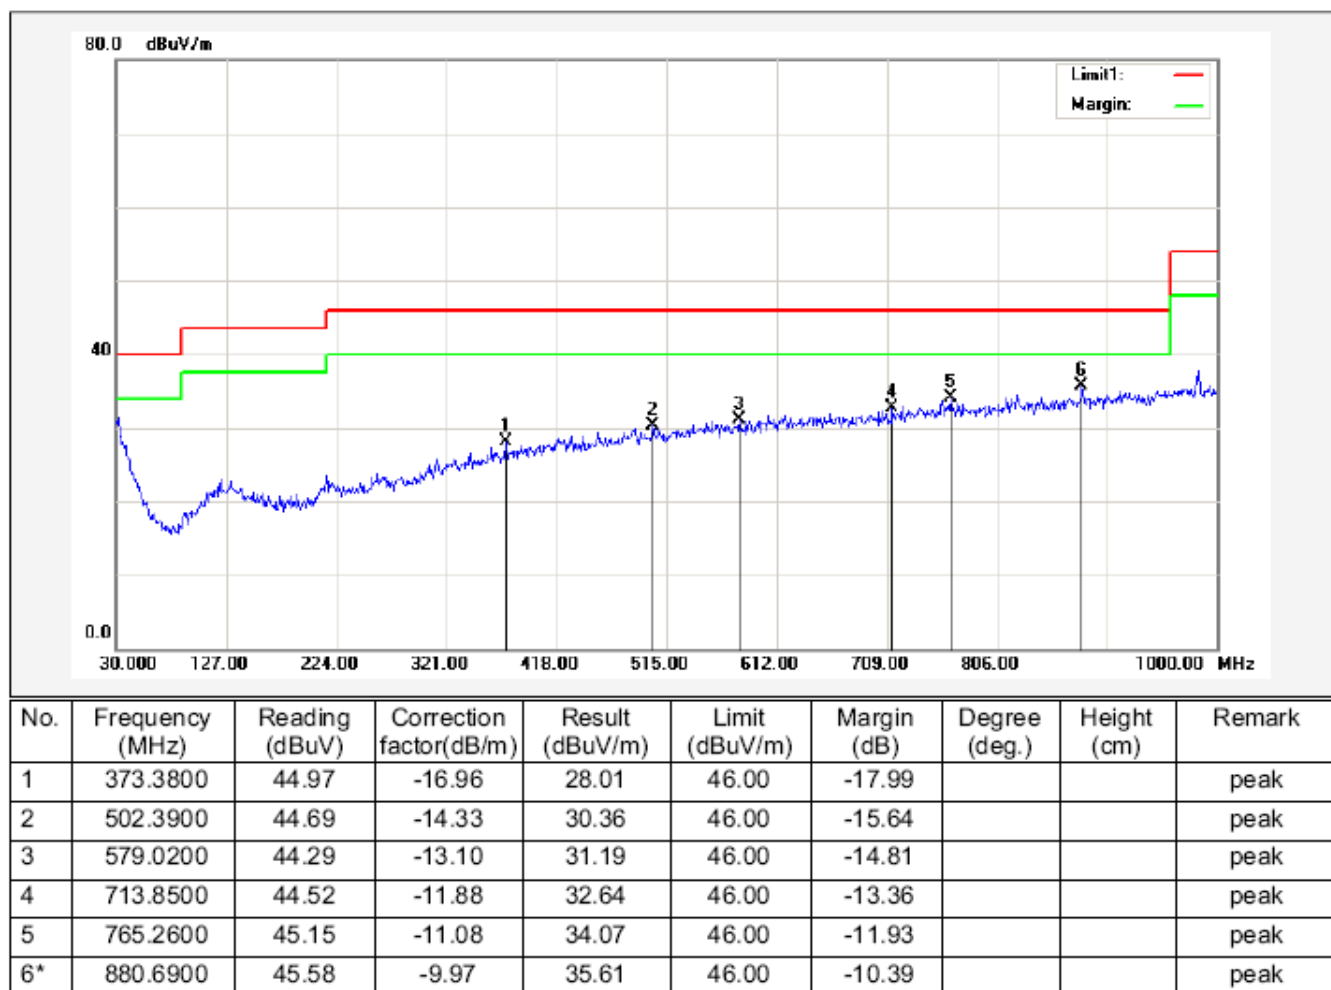


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

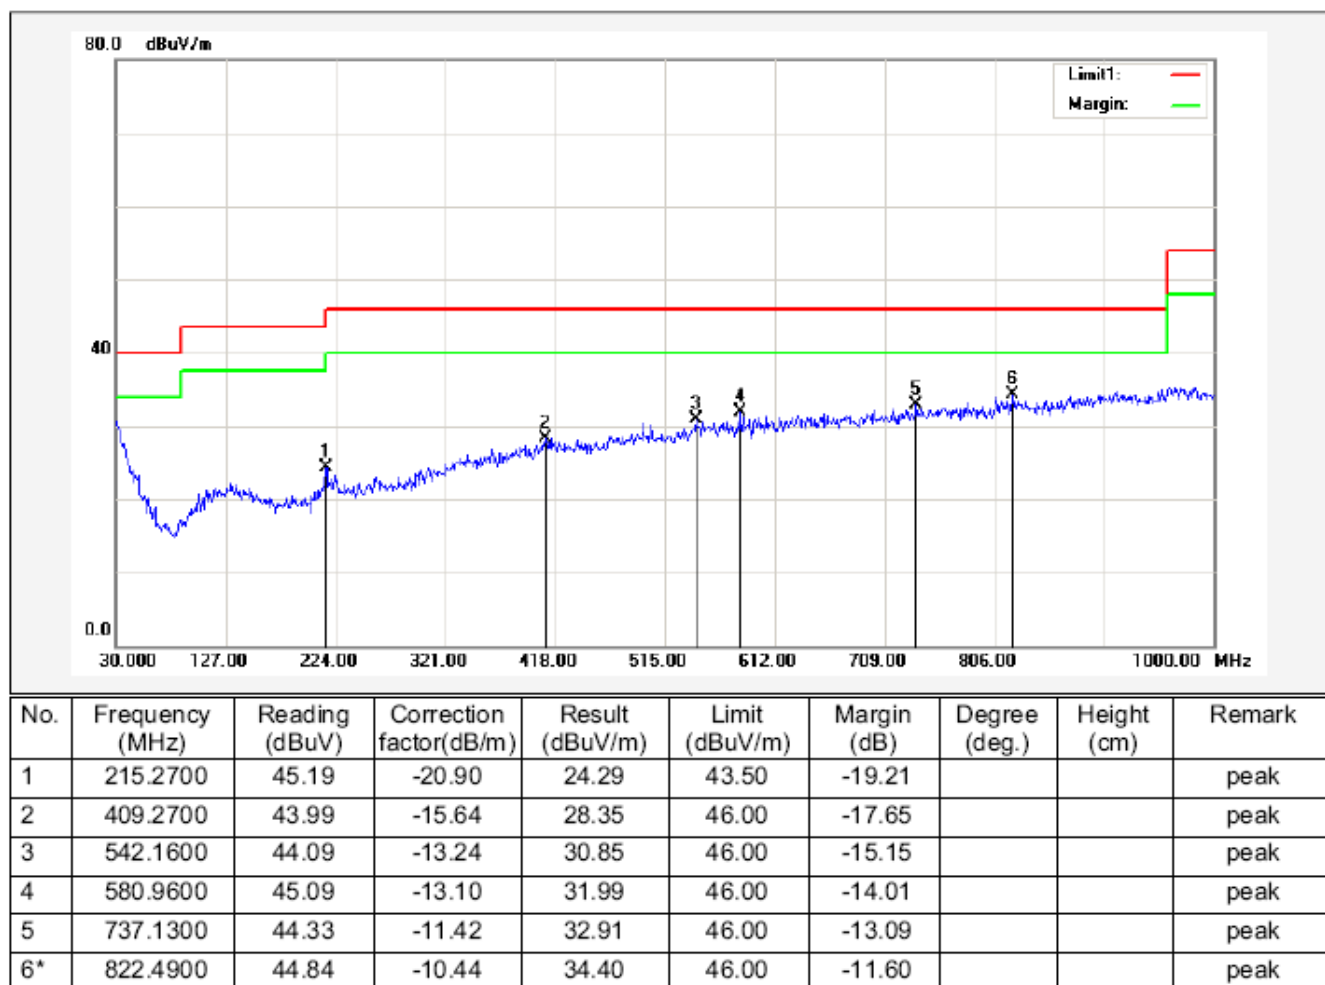

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

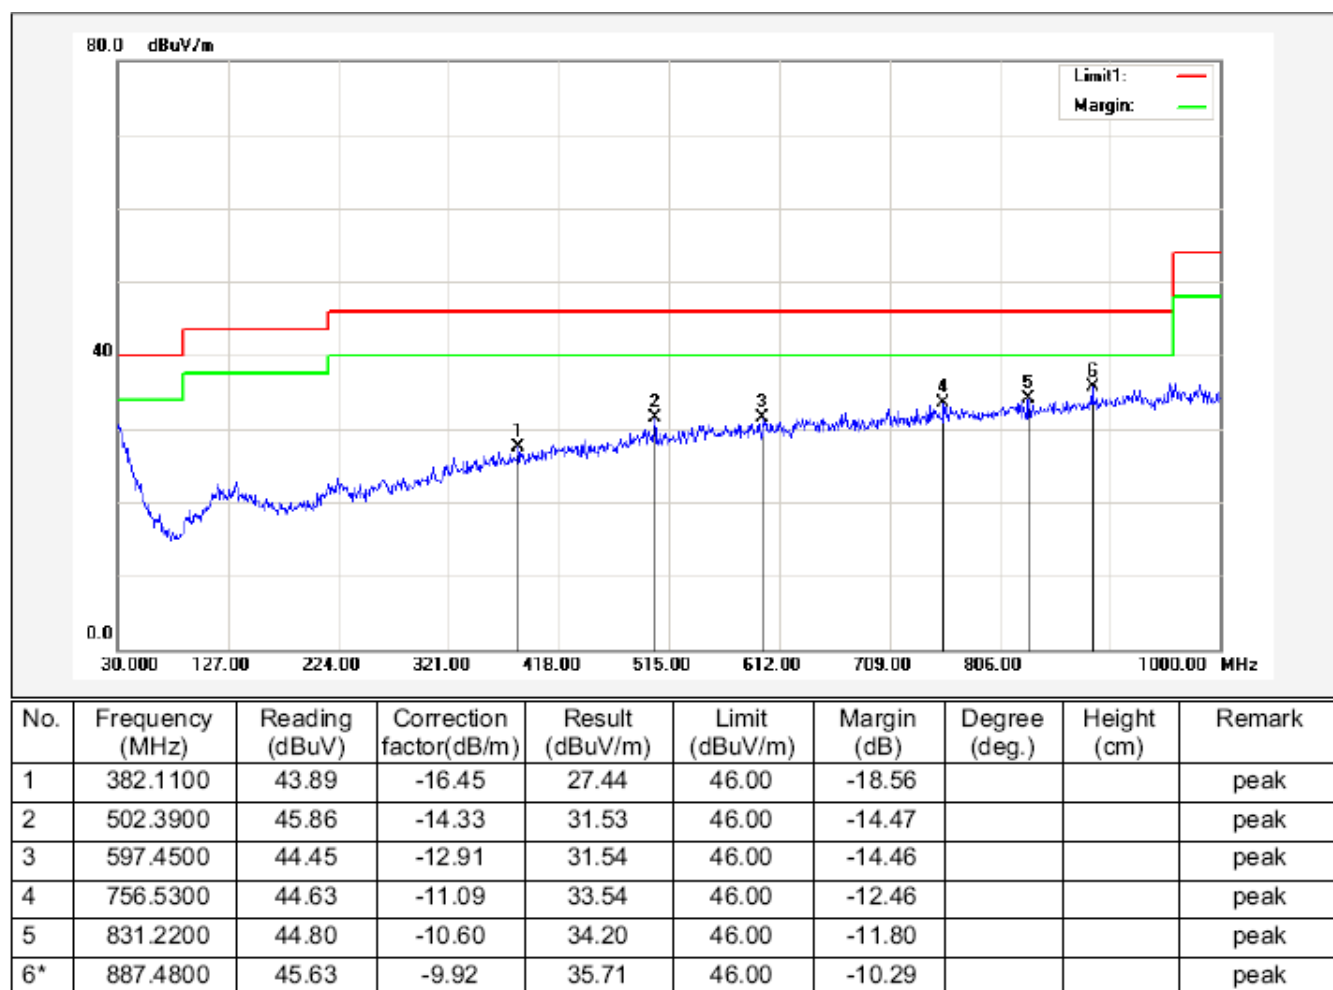


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

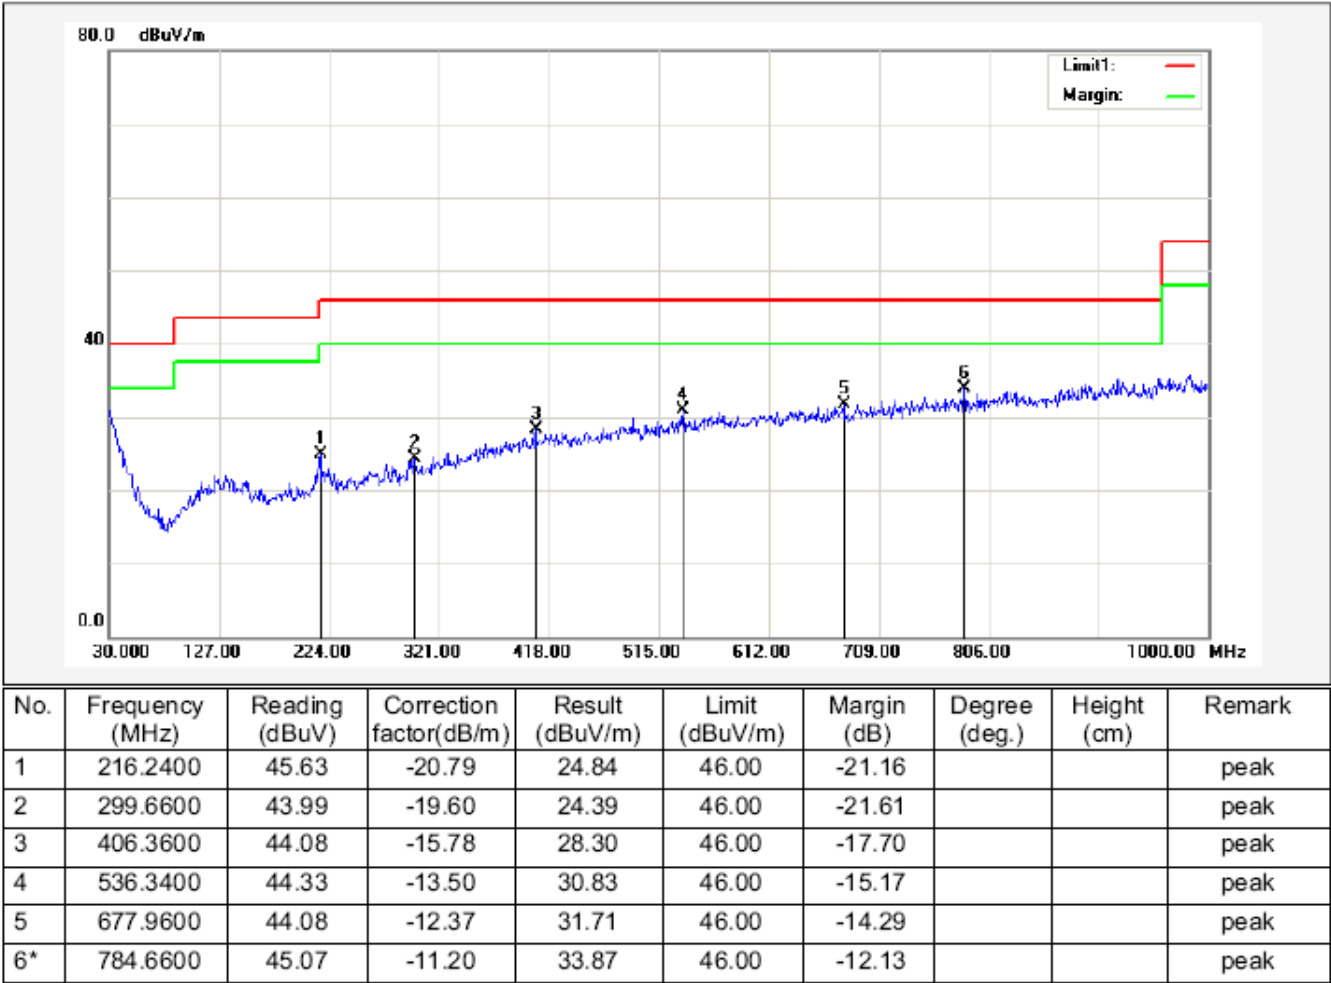

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

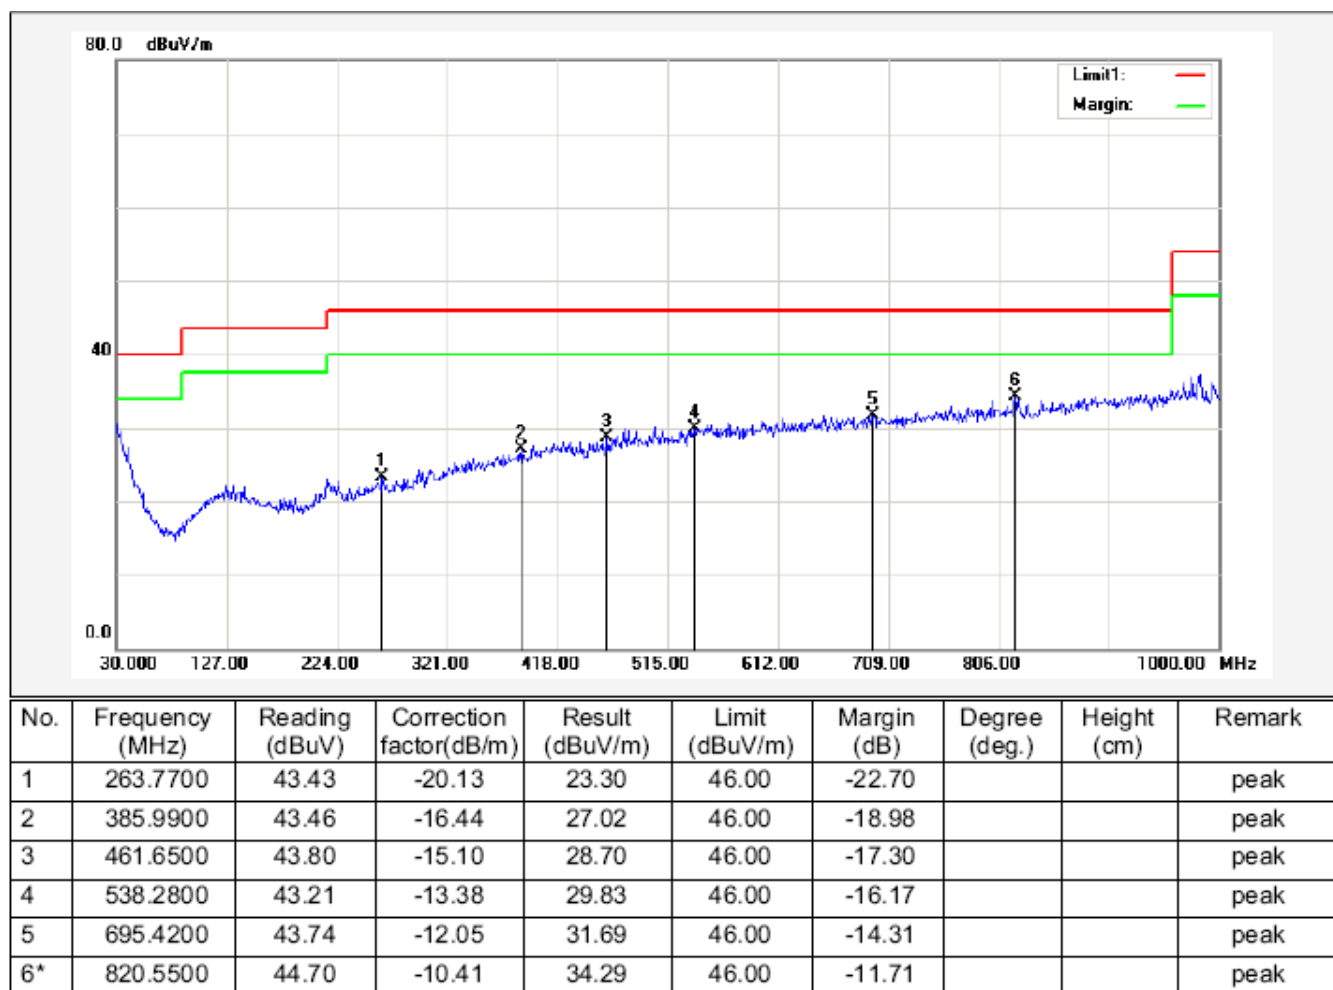

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

FOR BR/EDR


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

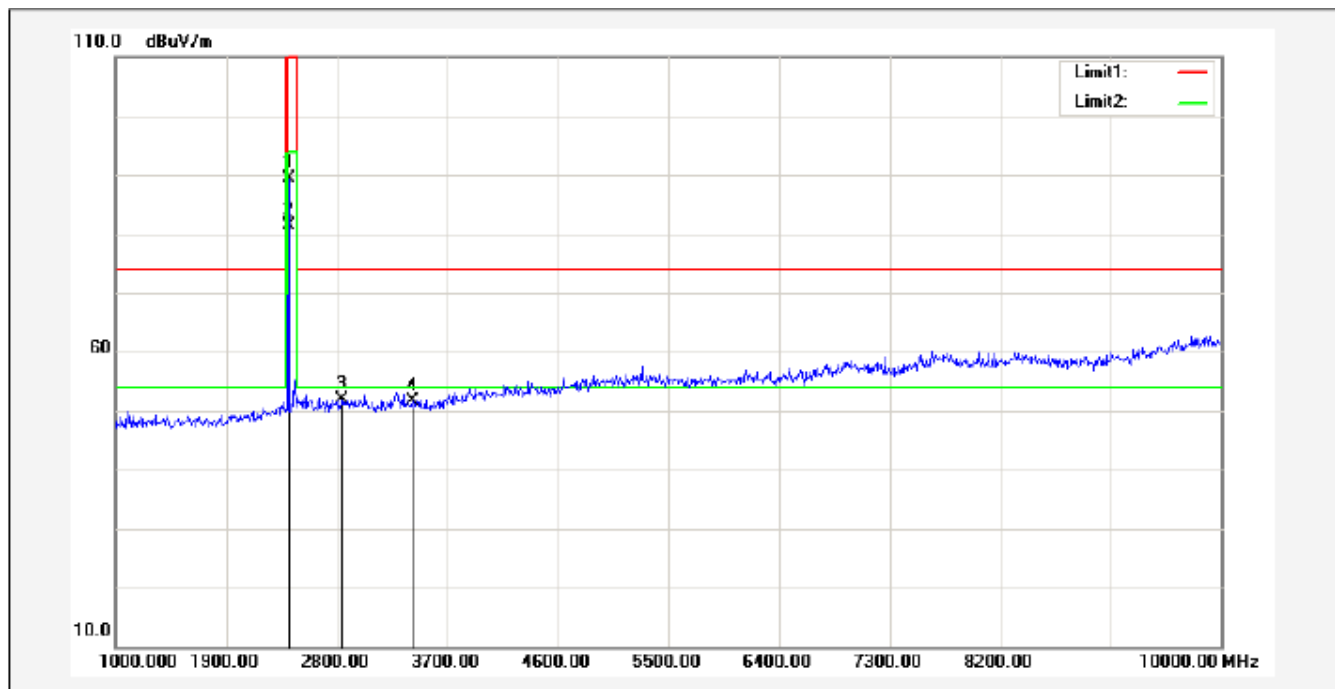

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2402.000	92.06	-2.79	89.27	114.00	-24.73			peak
2*	2402.000	84.12	-2.79	81.33	94.00	-12.67			AVG
3	2845.000	53.57	-1.64	51.93	74.00	-22.07			peak
4	3421.000	52.32	-0.65	51.67	74.00	-22.33			peak


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

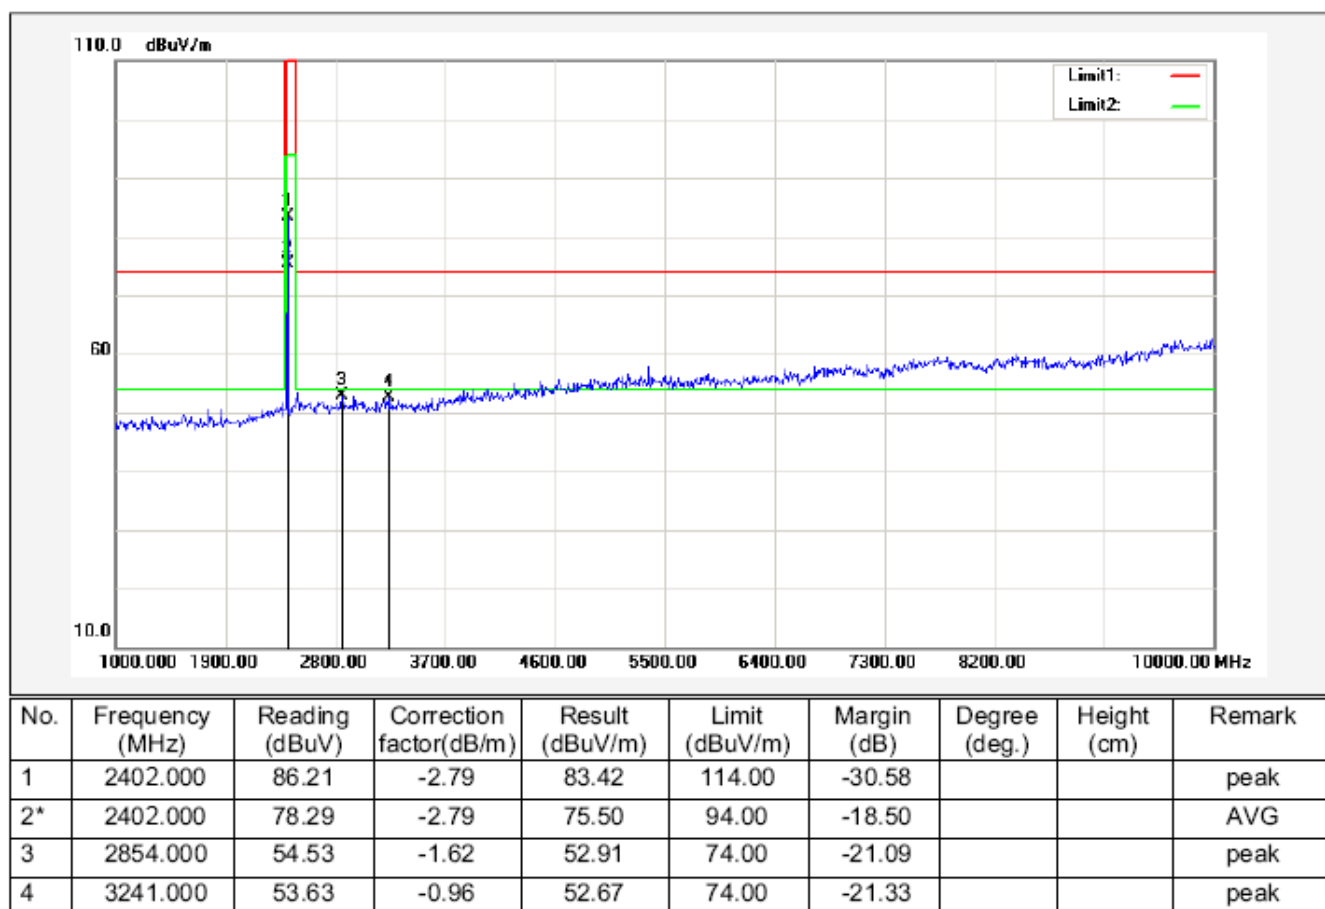


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

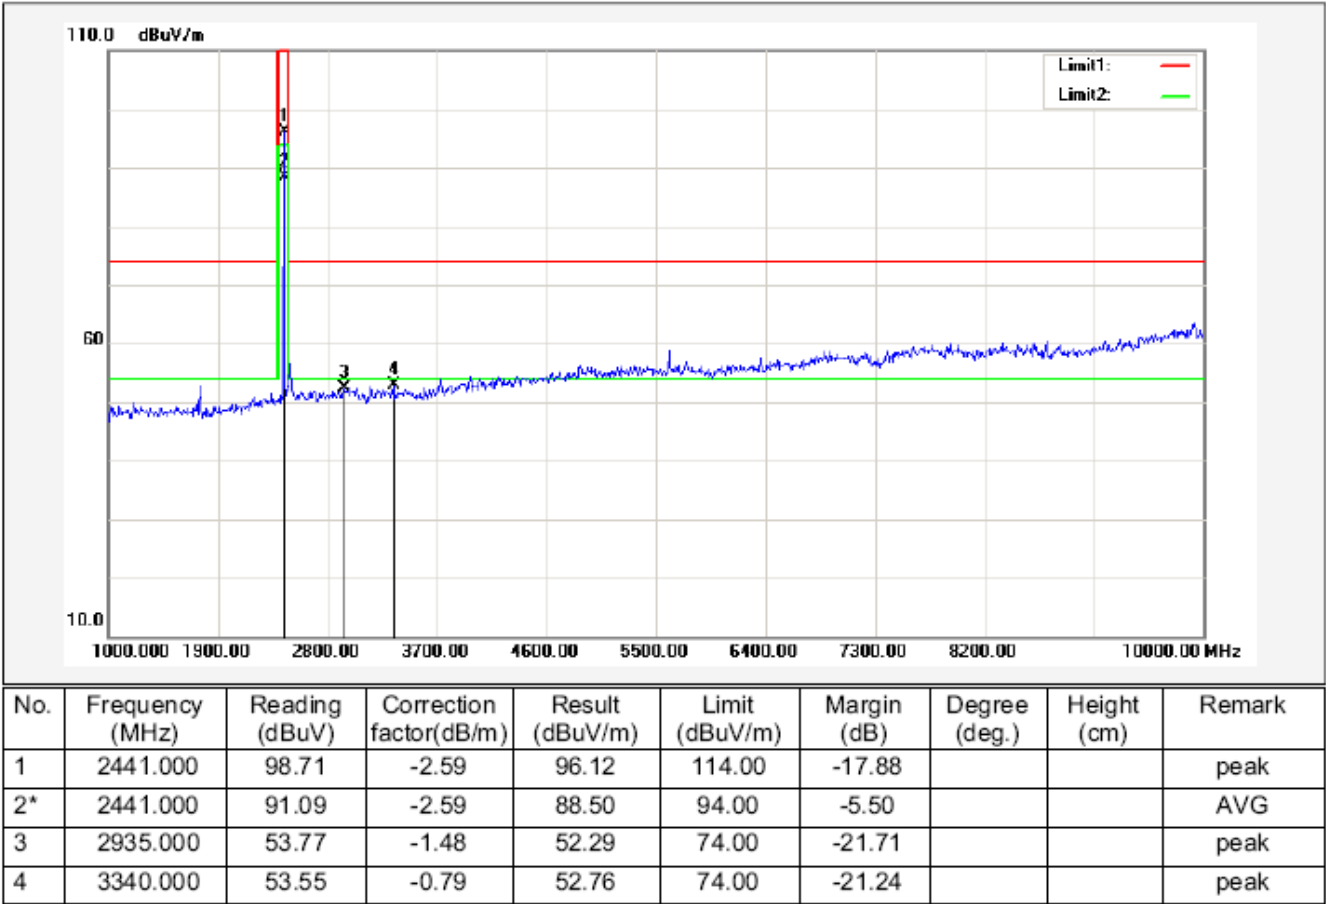

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

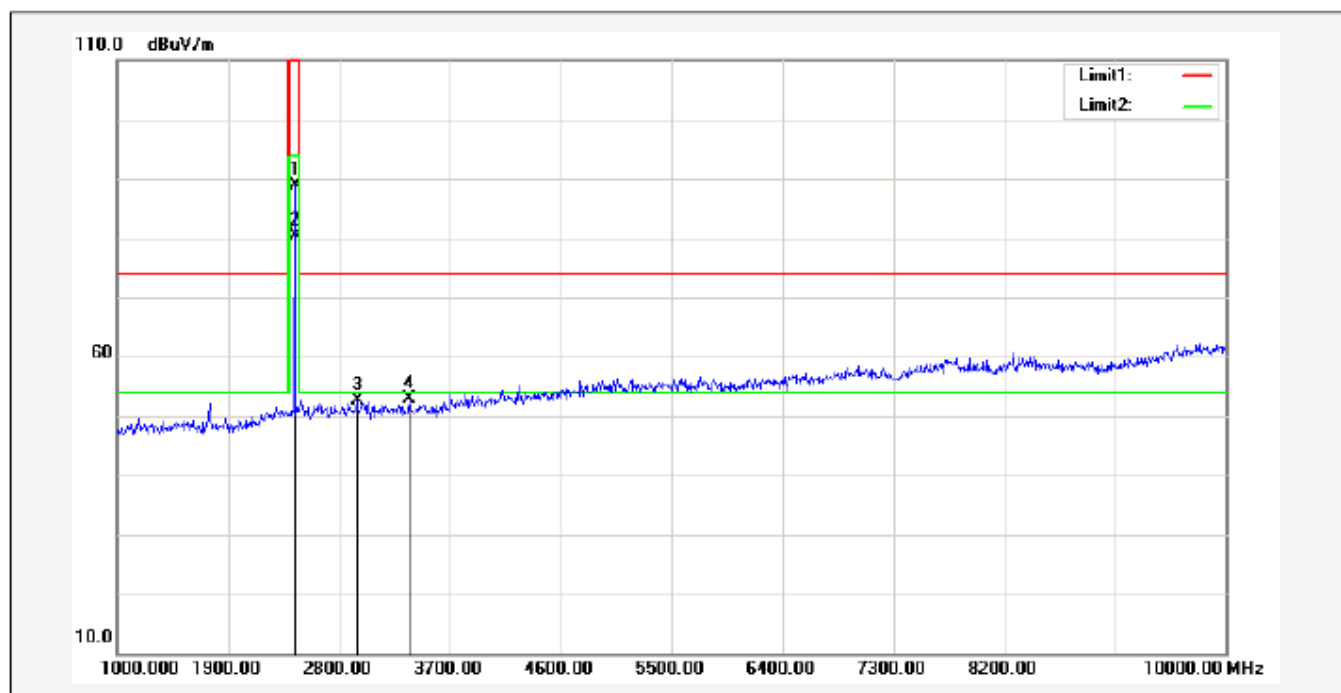

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2441.000	91.38	-2.59	88.79	114.00	-25.21			peak
2*	2441.000	82.99	-2.59	80.40	94.00	-13.60			AVG
3	2944.000	54.08	-1.46	52.62	74.00	-21.38			peak
4	3367.000	53.56	-0.74	52.82	74.00	-21.18			peak


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

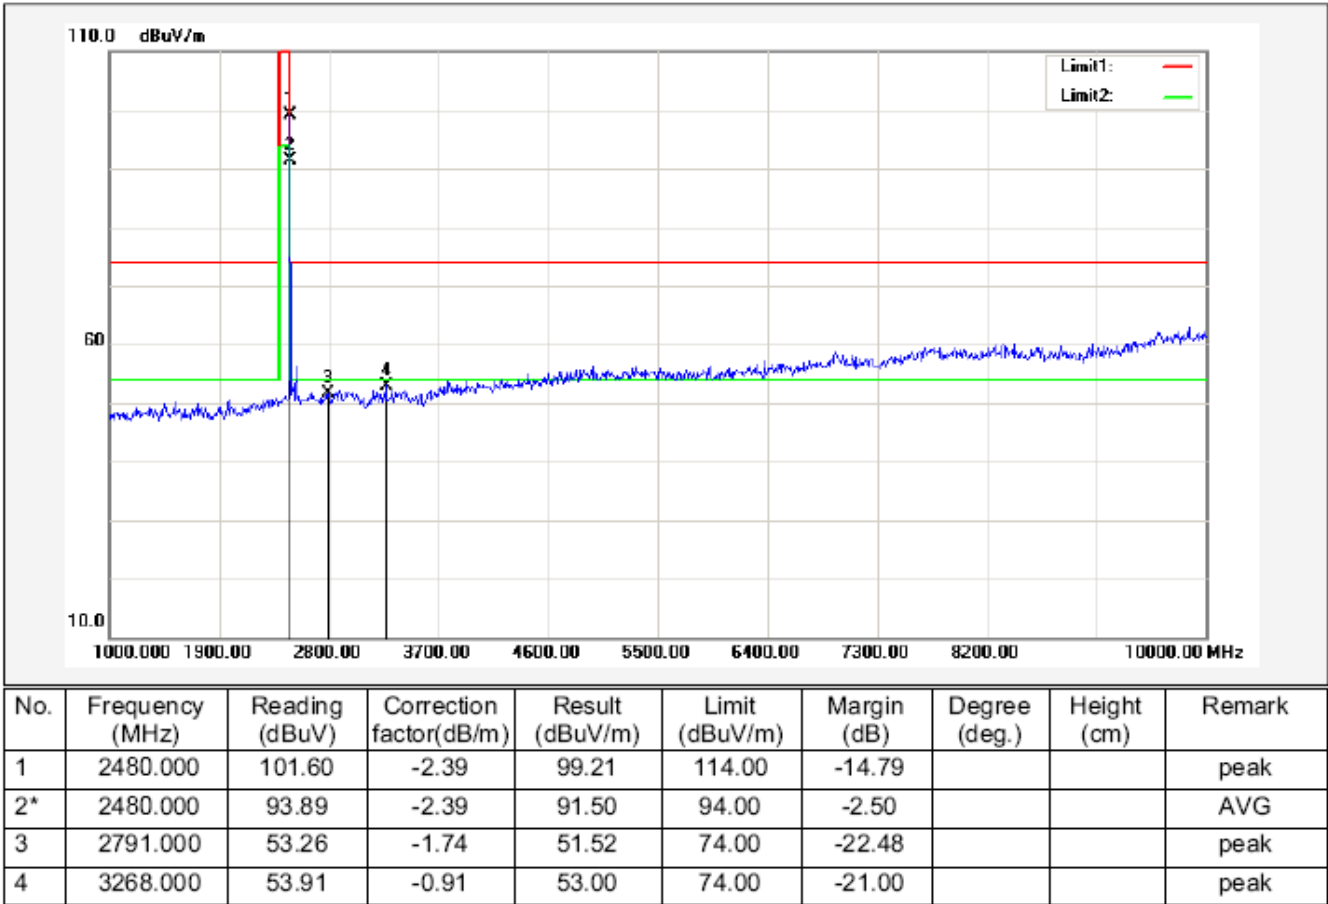

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

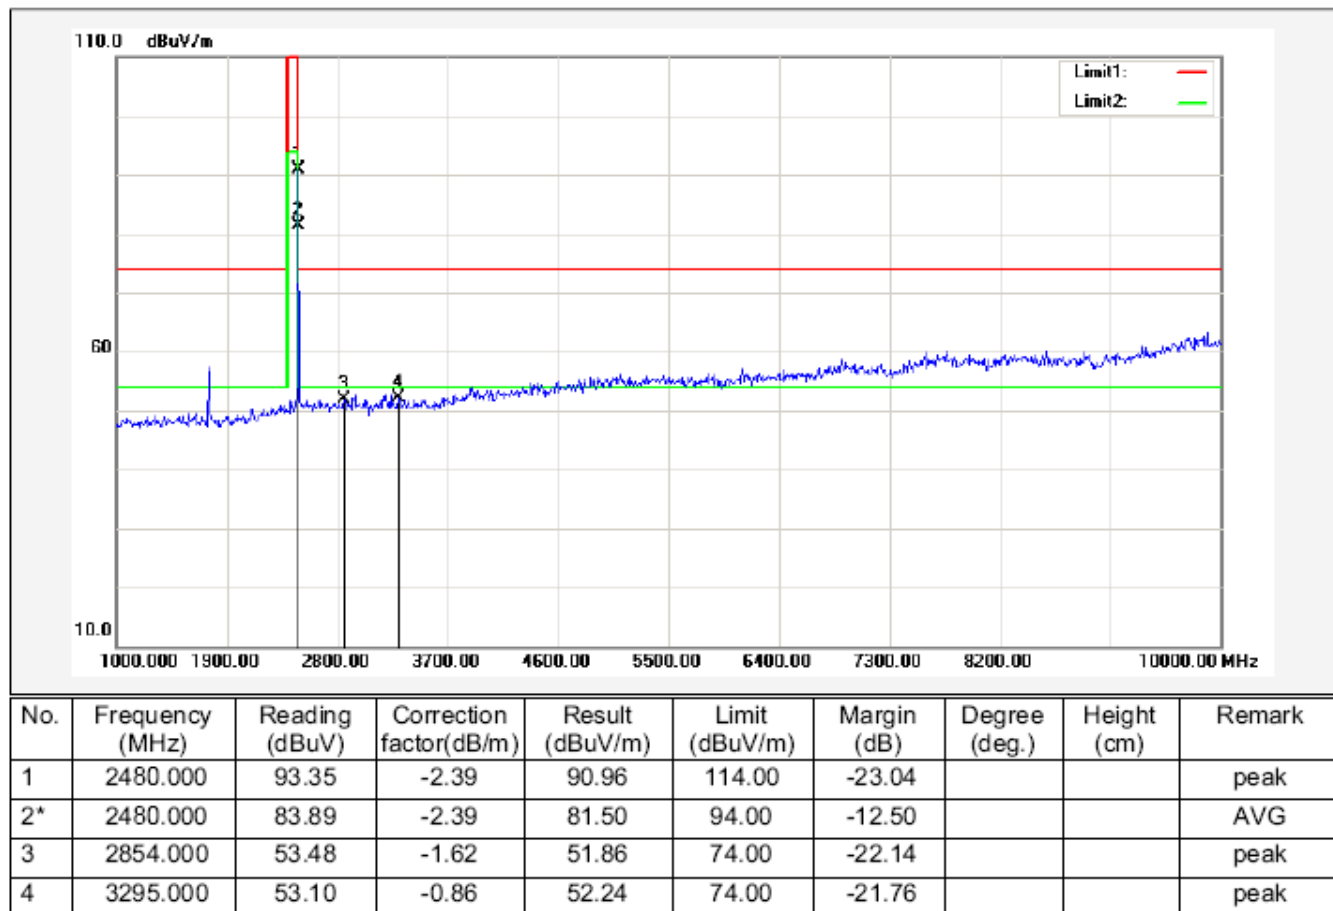

RESULT: PASS

Note: 10~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.06	-2.79	89.27	114	-24.73	Horizontal
2402	86.21	-2.79	83.42	114	-30.58	Vertical
2441	98.71	-2.59	96.12	114	-17.88	Horizontal
2441	91.38	-2.59	88.79	114	-25.21	Vertical
2480	101.60	-2.39	99.21	114	-14.79	Horizontal
2480	93.35	-2.39	90.96	114	-23.04	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	84.12	-2.79	81.33	94	-12.67	Horizontal
2402	78.29	-2.79	75.50	94	-18.50	Vertical
2441	91.09	-2.59	88.50	94	-5.50	Horizontal
2441	82.99	-2.59	80.40	94	-13.60	Vertical
2480	93.89	-2.39	91.50	94	-2.50	Horizontal
2480	83.89	-2.39	81.50	94	-12.50	Vertical


FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

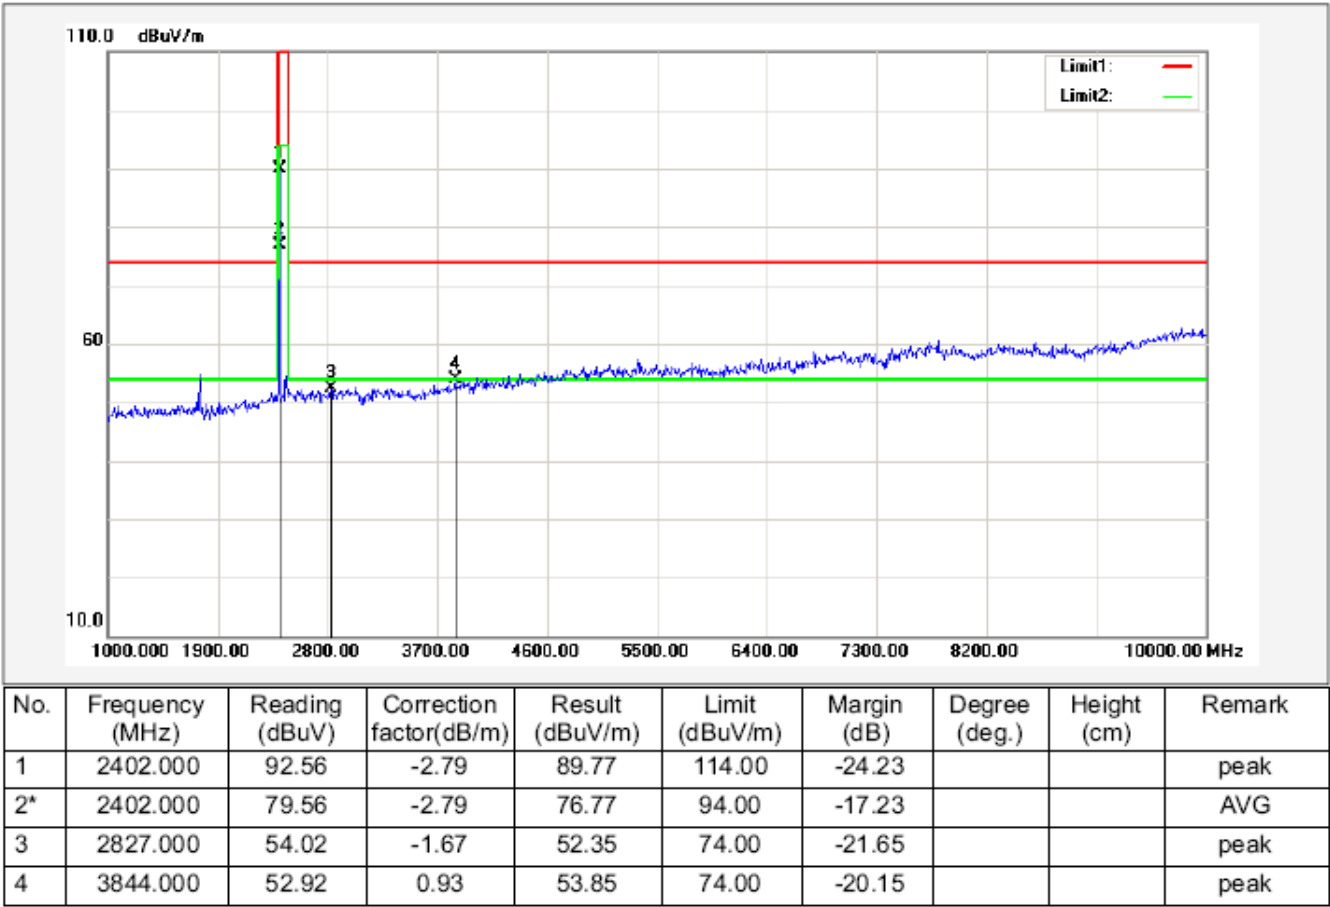


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

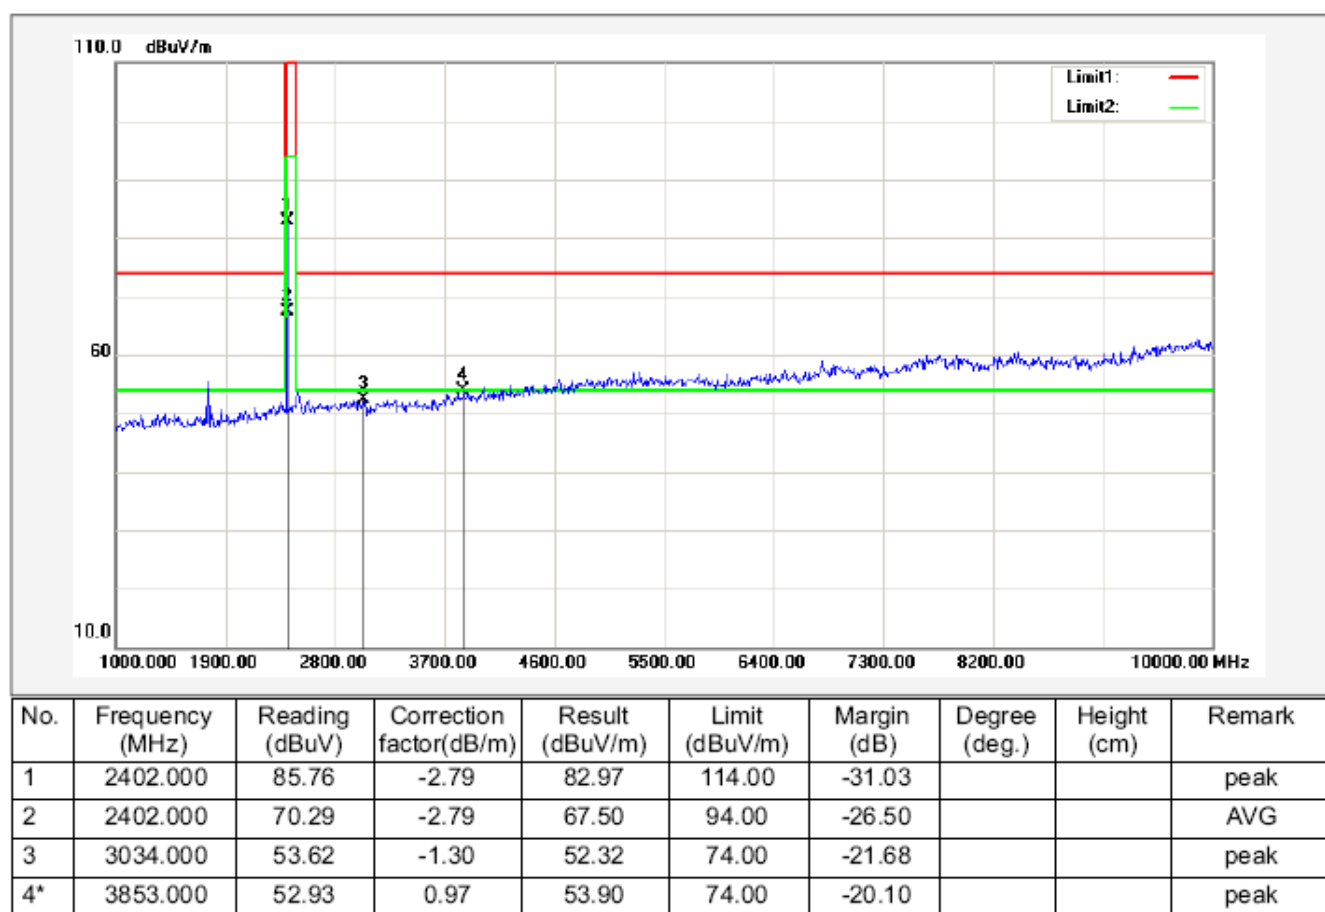


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

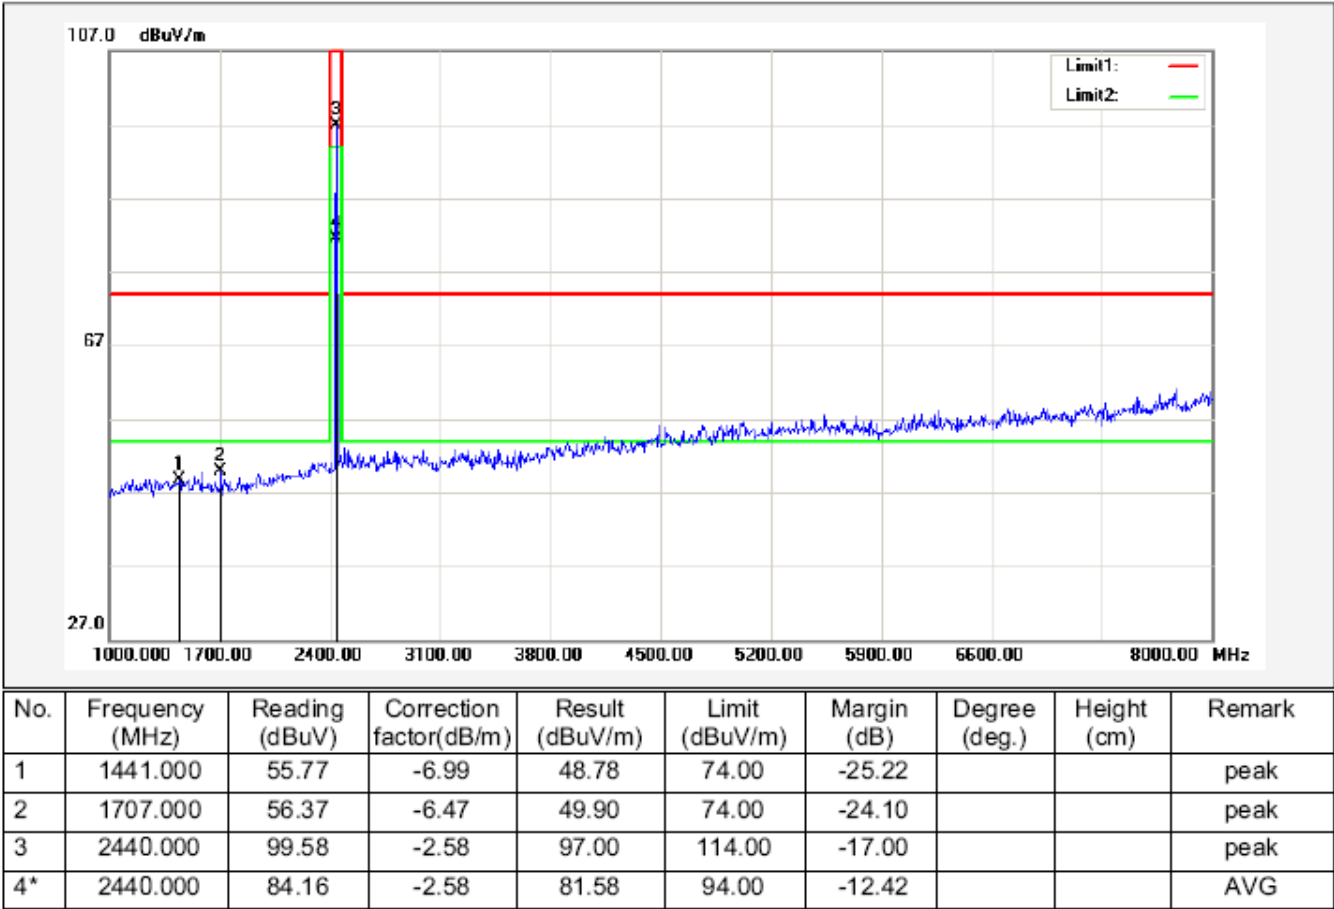


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

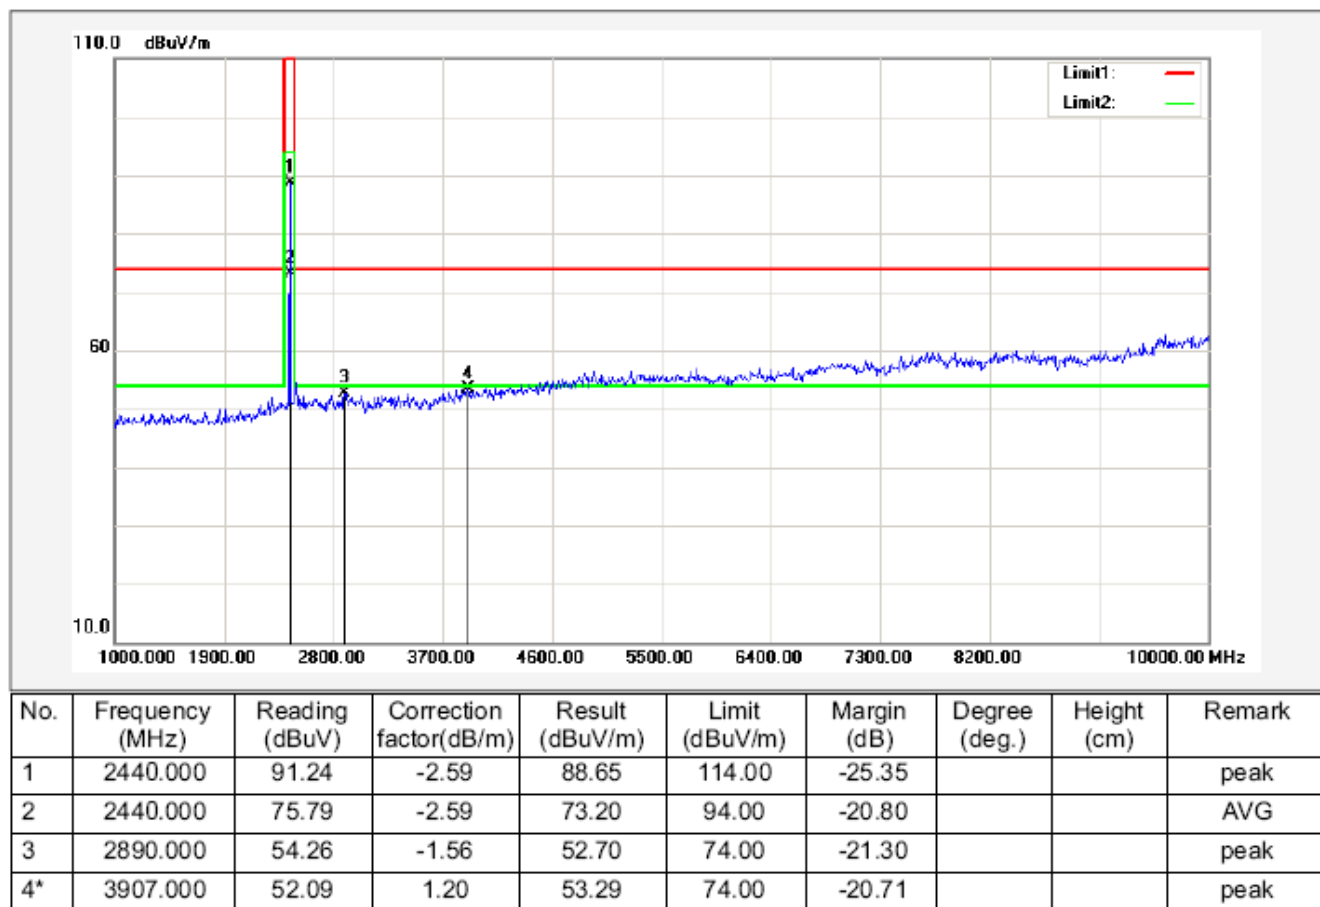

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

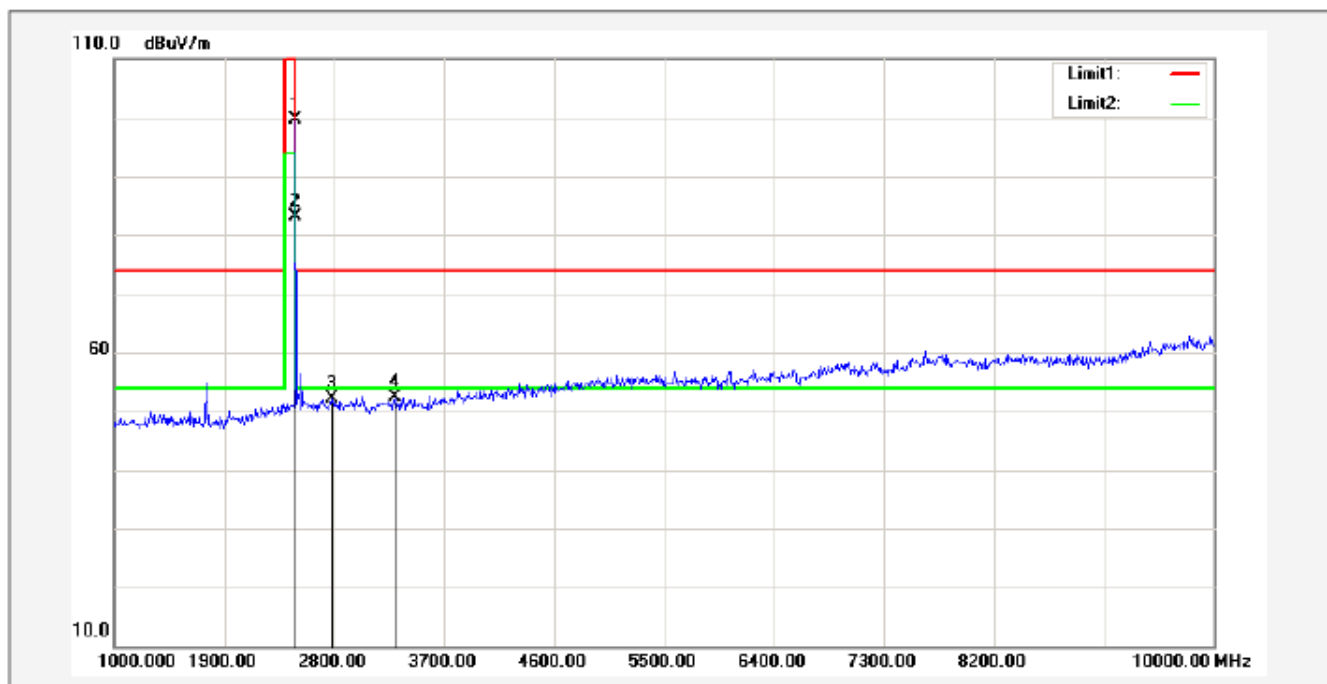

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2480.000	101.98	-2.39	99.59	114.00	-14.41			peak
2*	2480.000	85.59	-2.39	83.20	94.00	-10.80			AVG
3	2782.000	53.83	-1.75	52.08	74.00	-21.92			peak
4	3295.000	53.15	-0.86	52.29	74.00	-21.71			peak

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

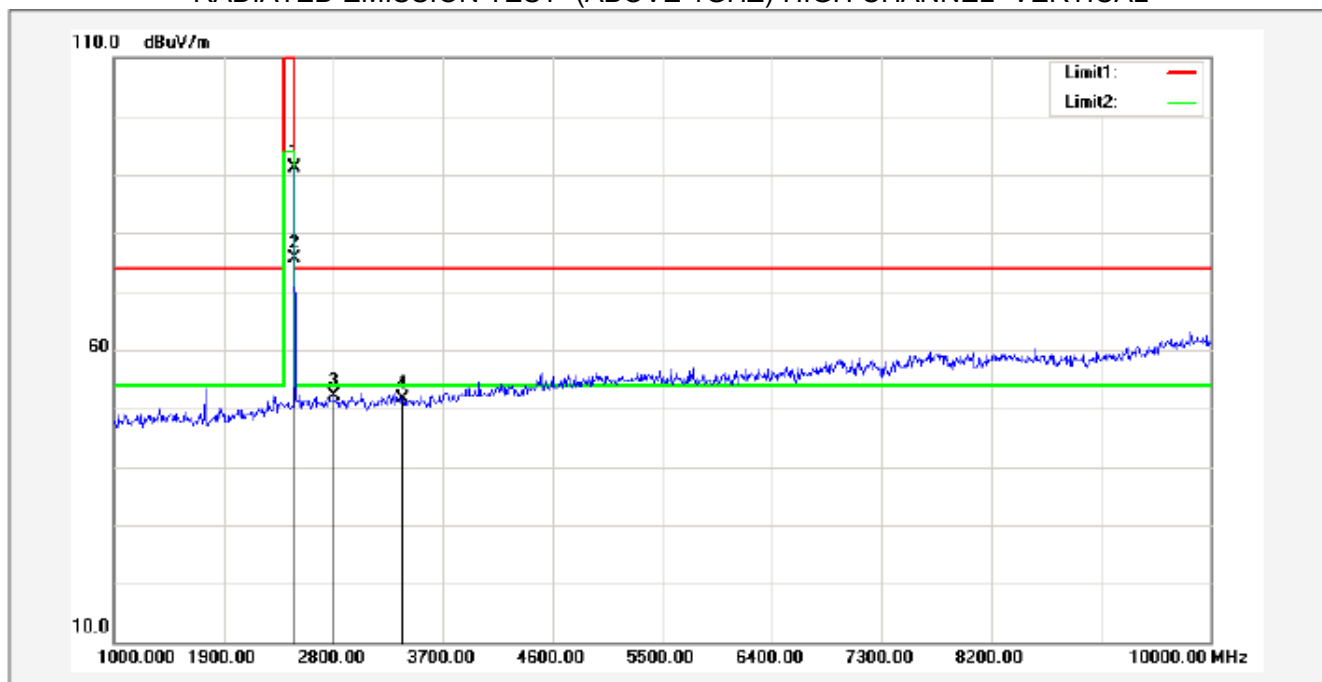

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2480.000	93.60	-2.39	91.21	114.00	-22.79			peak
2*	2480.000	77.99	-2.39	75.60	94.00	-18.40			AVG
3	2809.000	53.82	-1.70	52.12	74.00	-21.88			peak
4	3367.000	52.34	-0.74	51.60	74.00	-22.40			peak

RESULT: PASS

Note: 10~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	92.56	-2.79	89.77	114	-24.23	Horizontal
2402	85.76	-2.79	82.97	114	-31.03	Vertical
2440	99.58	-2.58	97.00	114	-17.00	Horizontal
2440	91.24	-2.59	88.65	114	-25.35	Vertical
2480	101.98	-2.39	99.59	114	-14.41	Horizontal
2480	93.60	-2.39	91.21	114	-22.79	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	79.56	-2.79	76.77	94	-17.23	Horizontal
2402	70.29	-2.79	67.50	94	-26.50	Vertical
2440	84.16	-2.58	81.58	94	-12.42	Horizontal
2440	75.79	-2.59	73.20	94	-21.30	Vertical
2480	85.59	-2.39	83.20	94	-10.80	Horizontal
2480	77.99	-2.39	75.60	94	-18.40	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

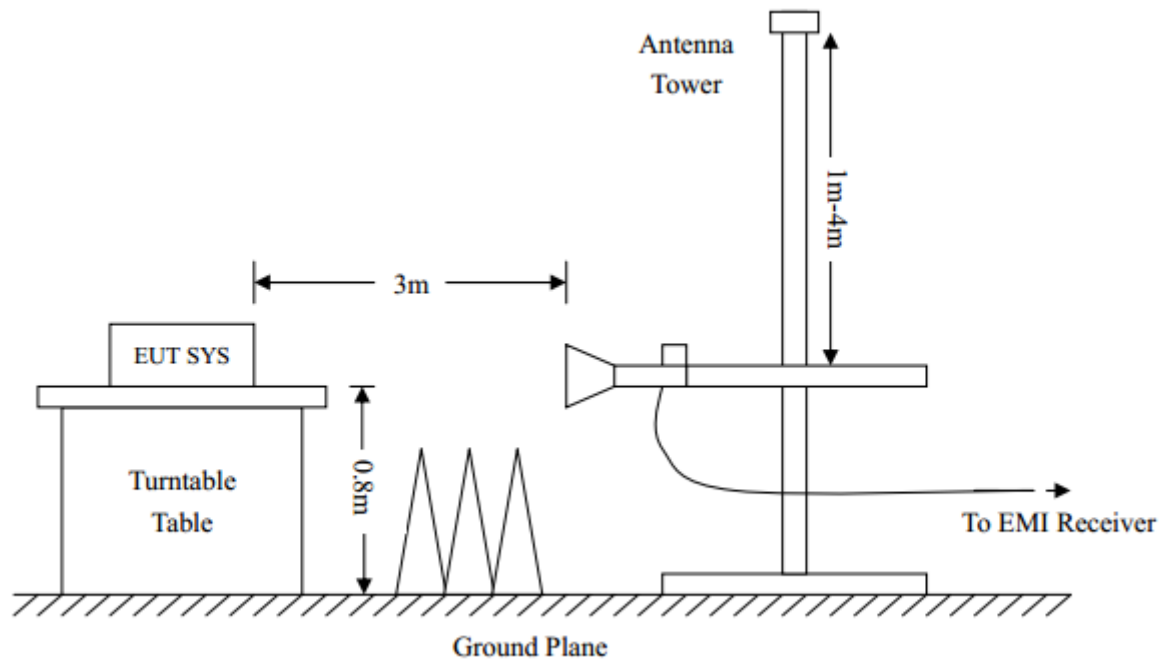


9.3 RADIATED TEST RESULT


(Worst modulation:GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

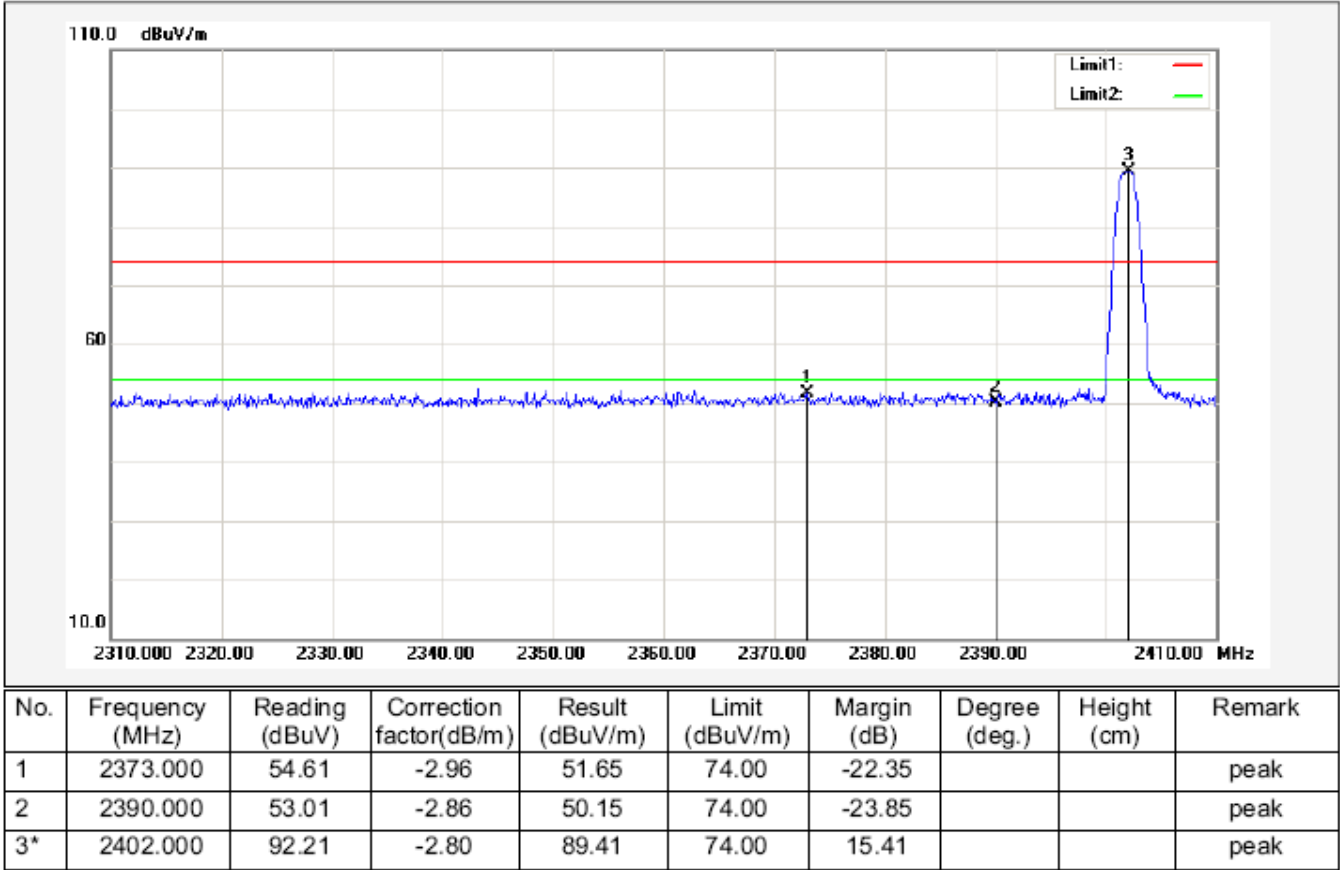


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

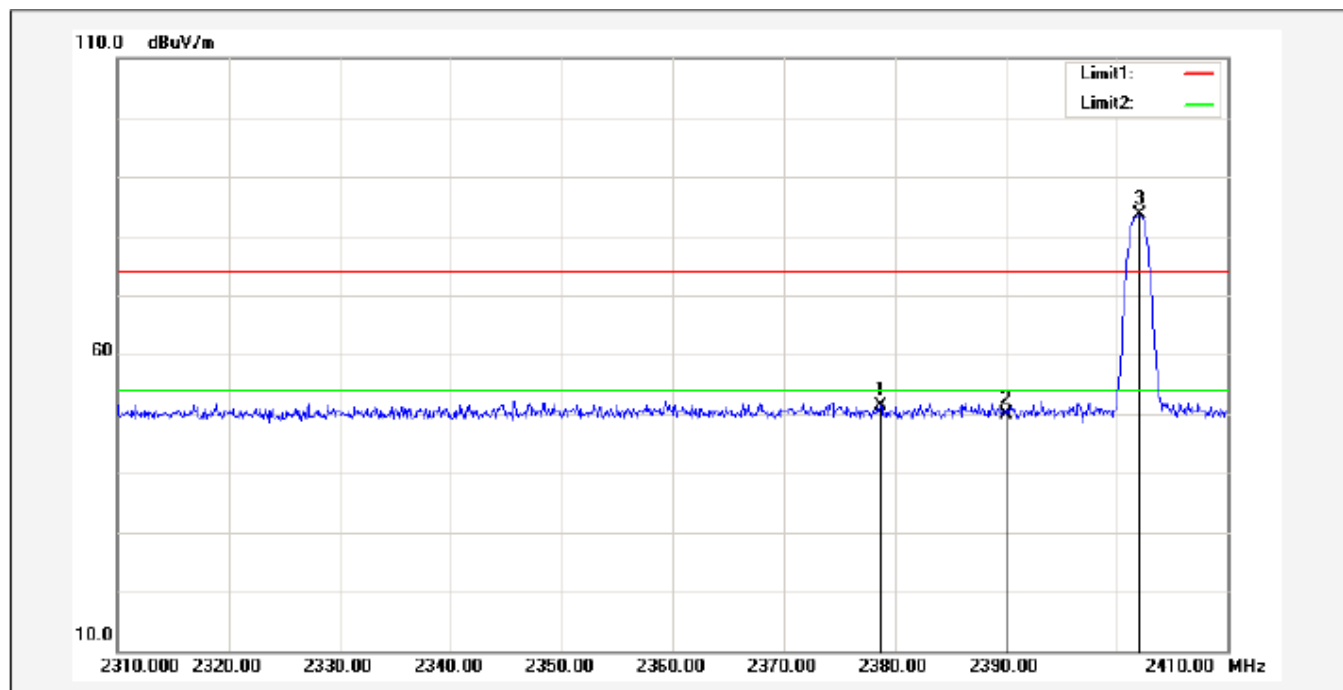


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2378.700	54.40	-2.92	51.48	74.00	-22.52			peak
2	2390.000	52.68	-2.86	49.82	74.00	-24.18			peak
3*	2402.000	86.39	-2.80	83.59	74.00	9.59			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

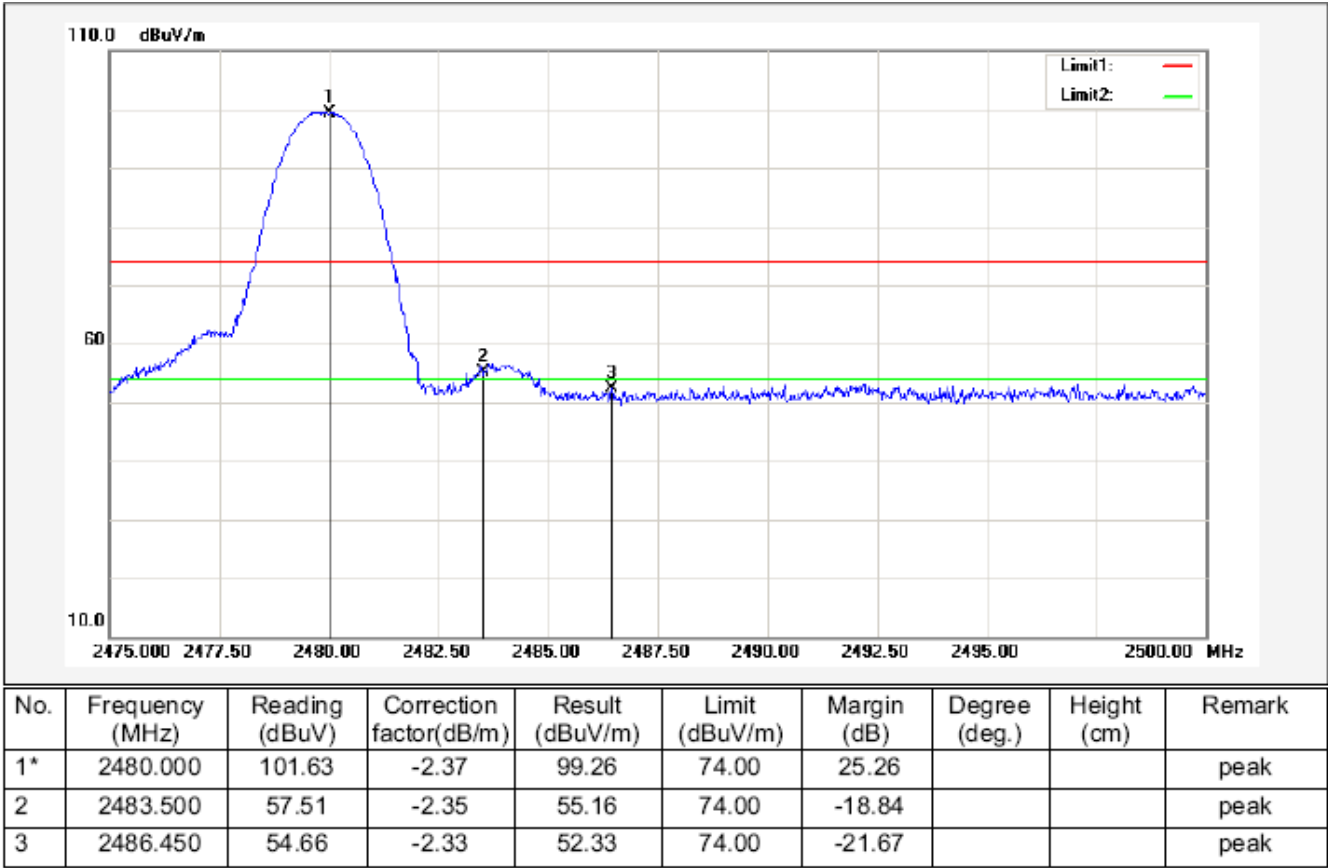

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

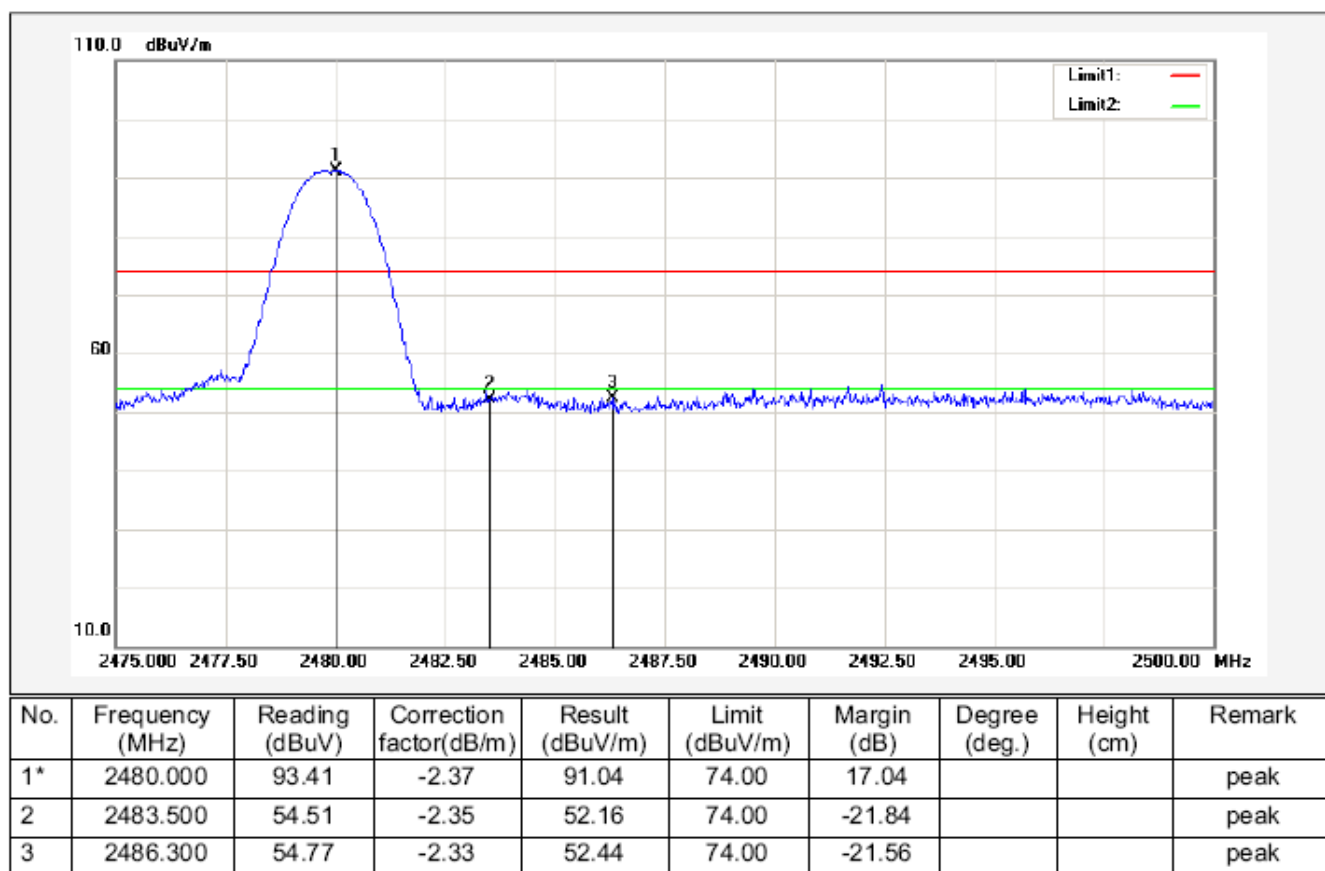

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.


Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested,but only worst case reported.

FOR BLE


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

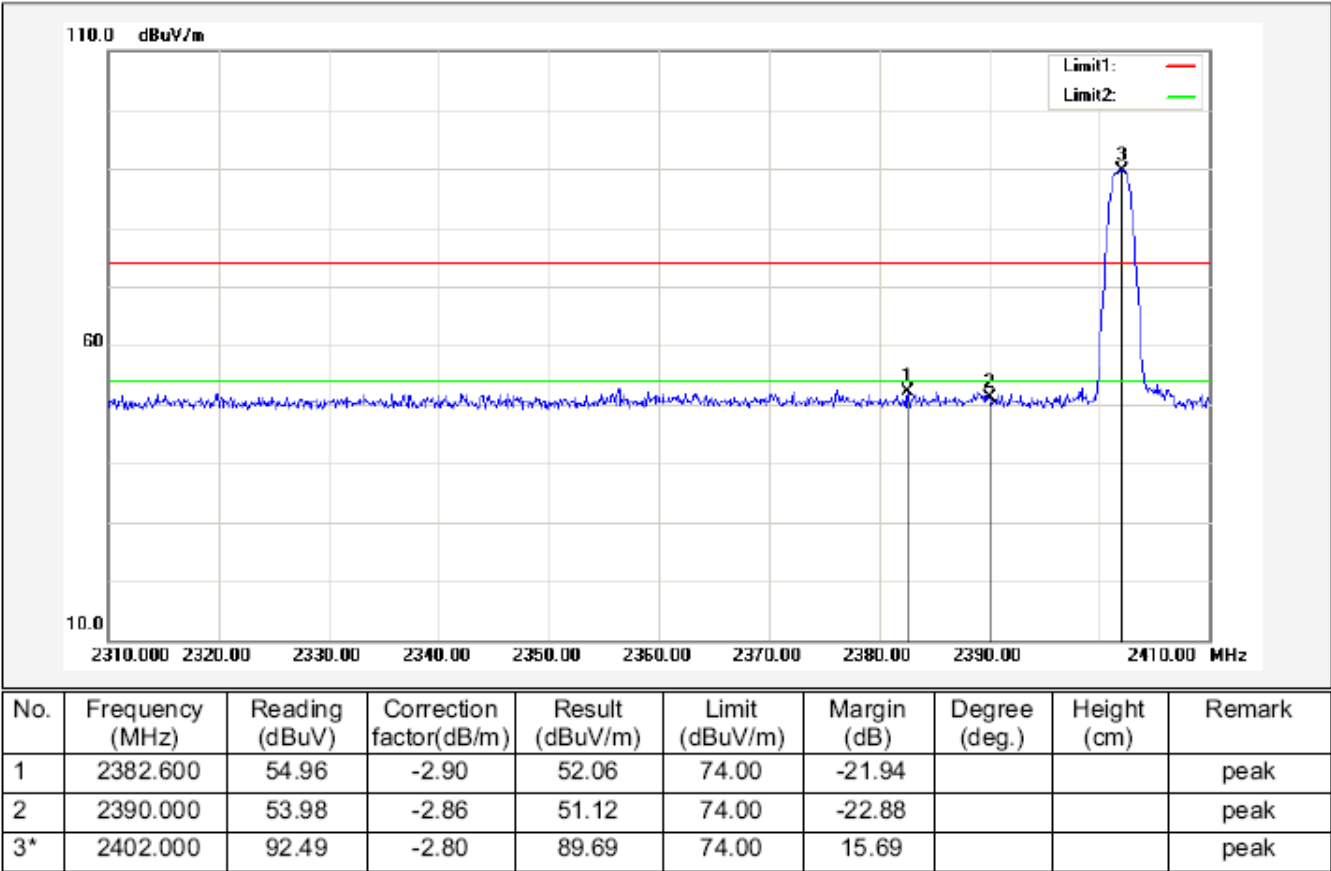


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

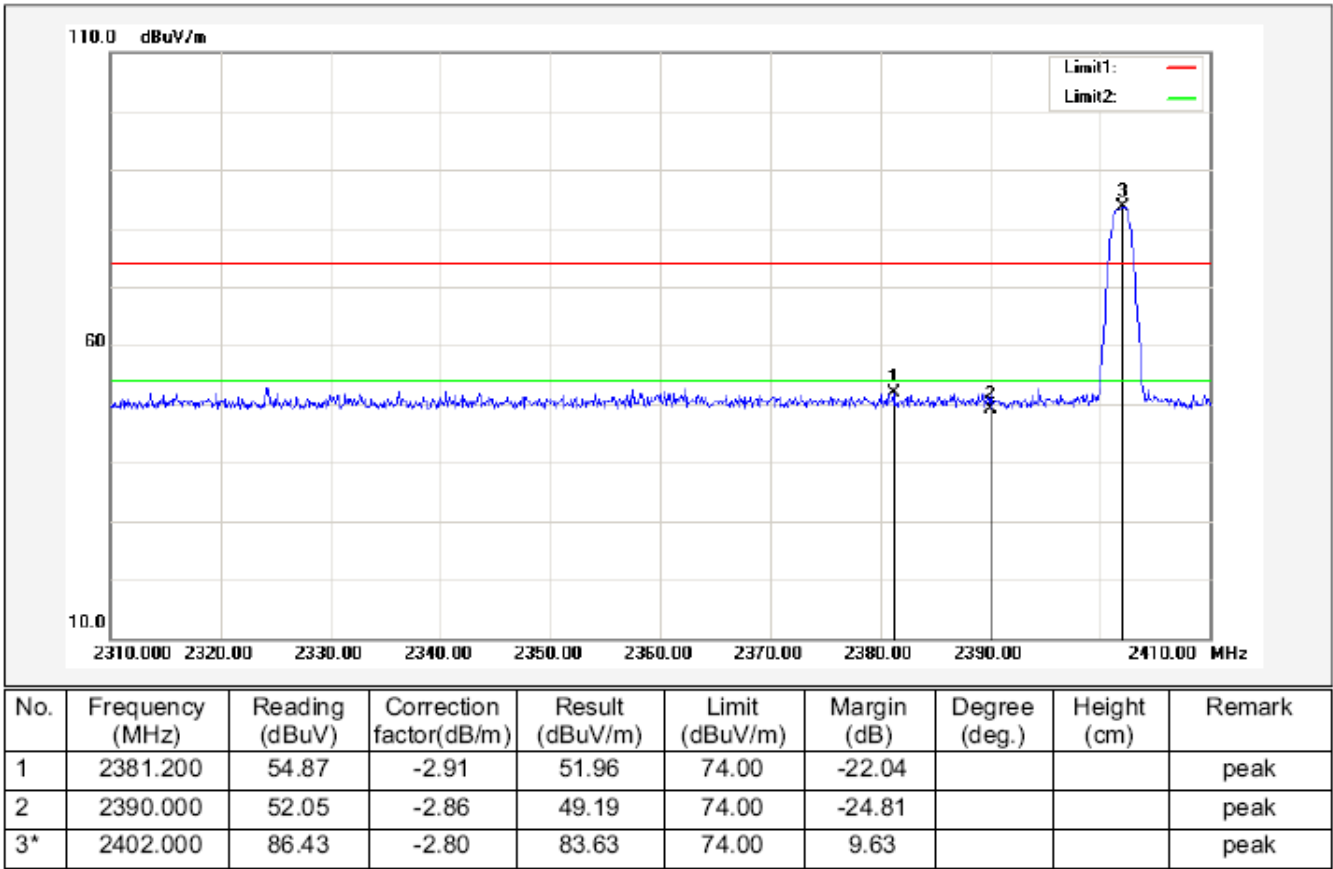

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

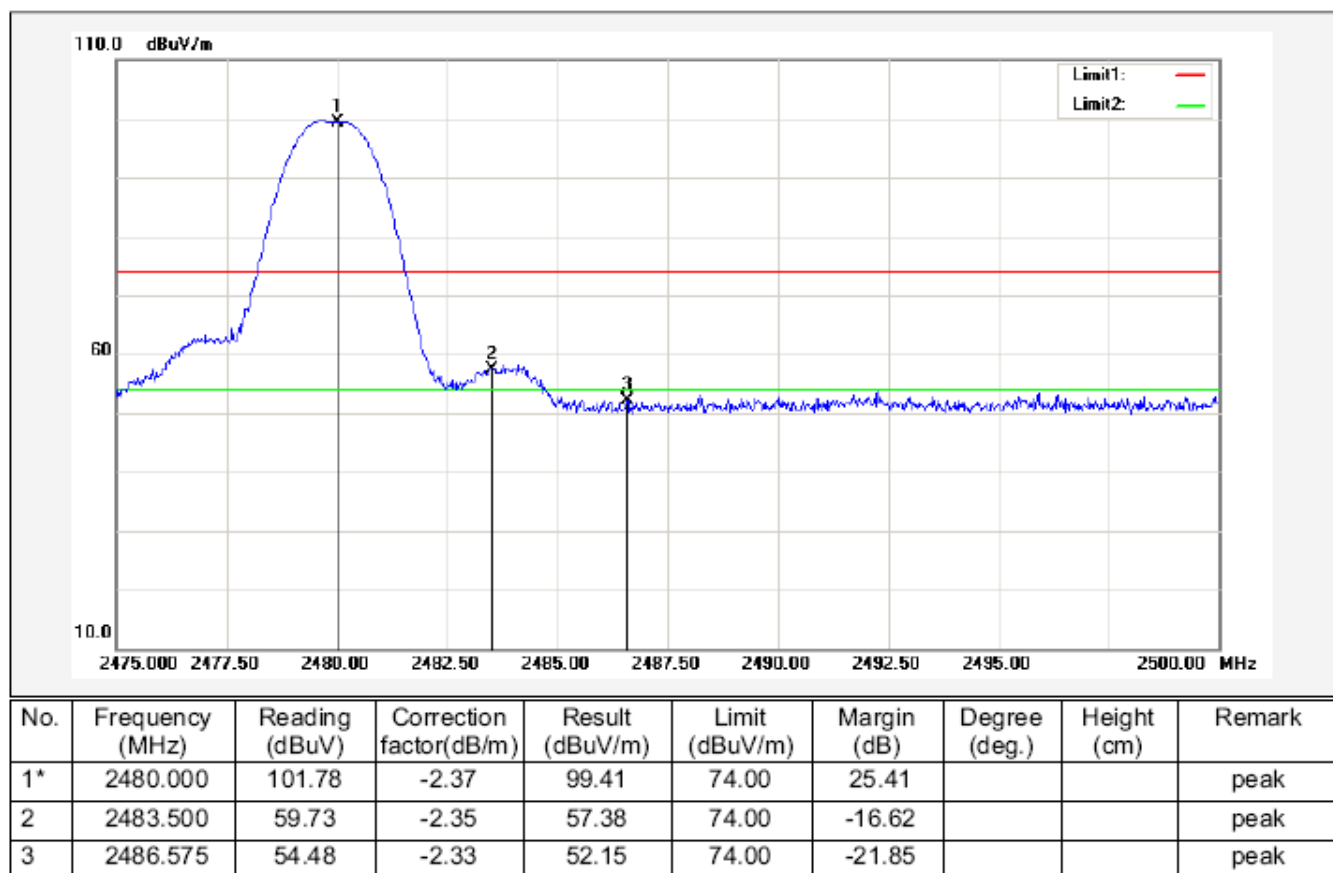

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

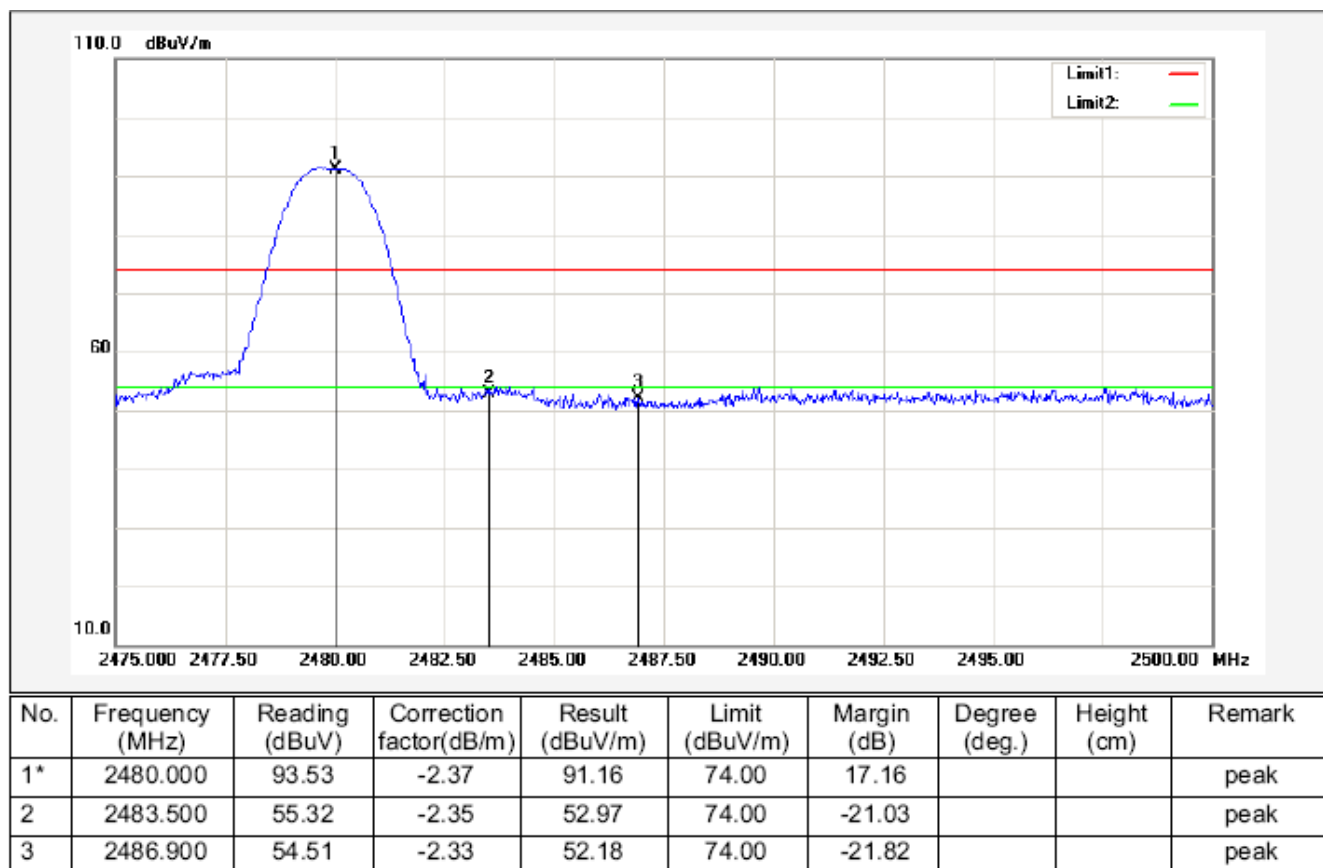

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

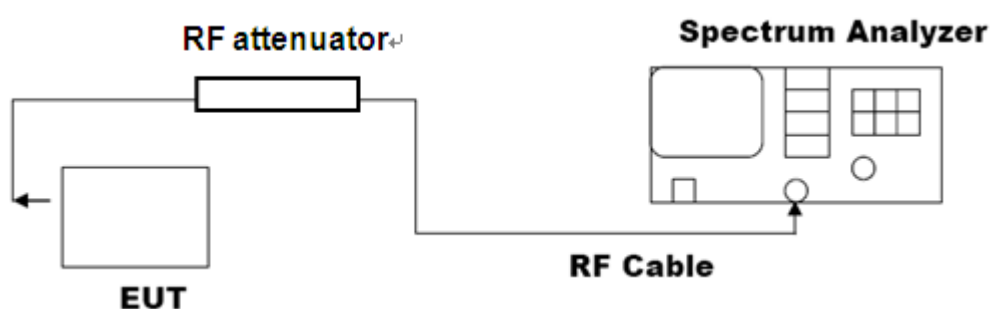


Note: The EUT has been used temporary antenna connector for testing.

10.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.086	PASS
	Middle Channel	1.083	PASS
	High Channel	1.096	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

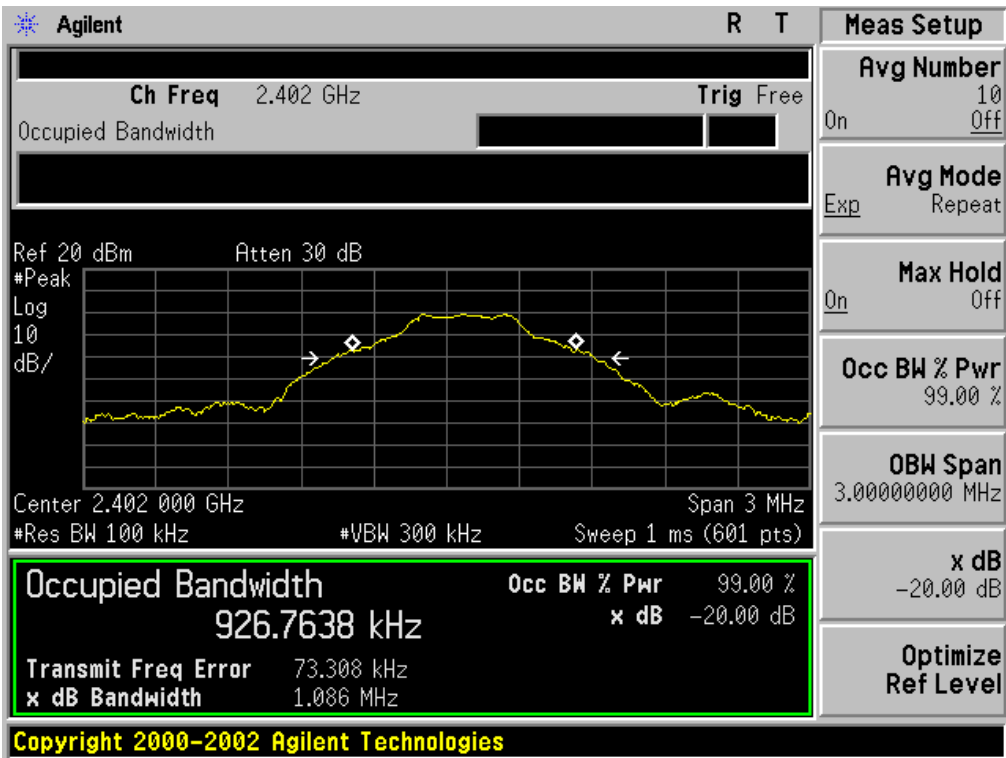

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

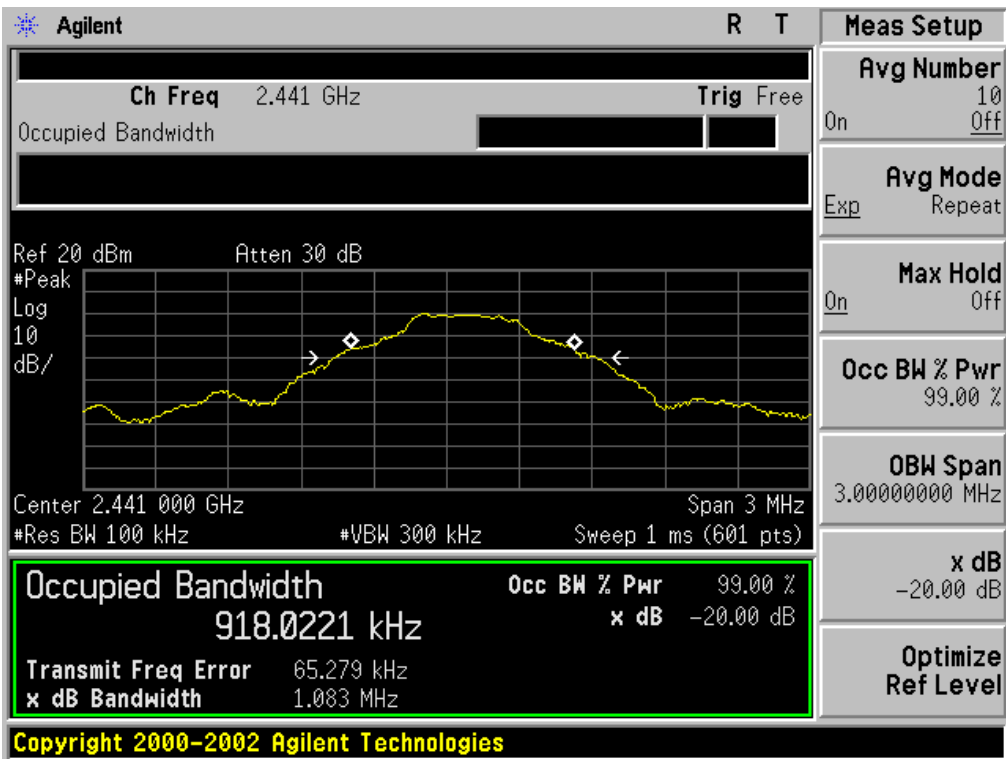


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

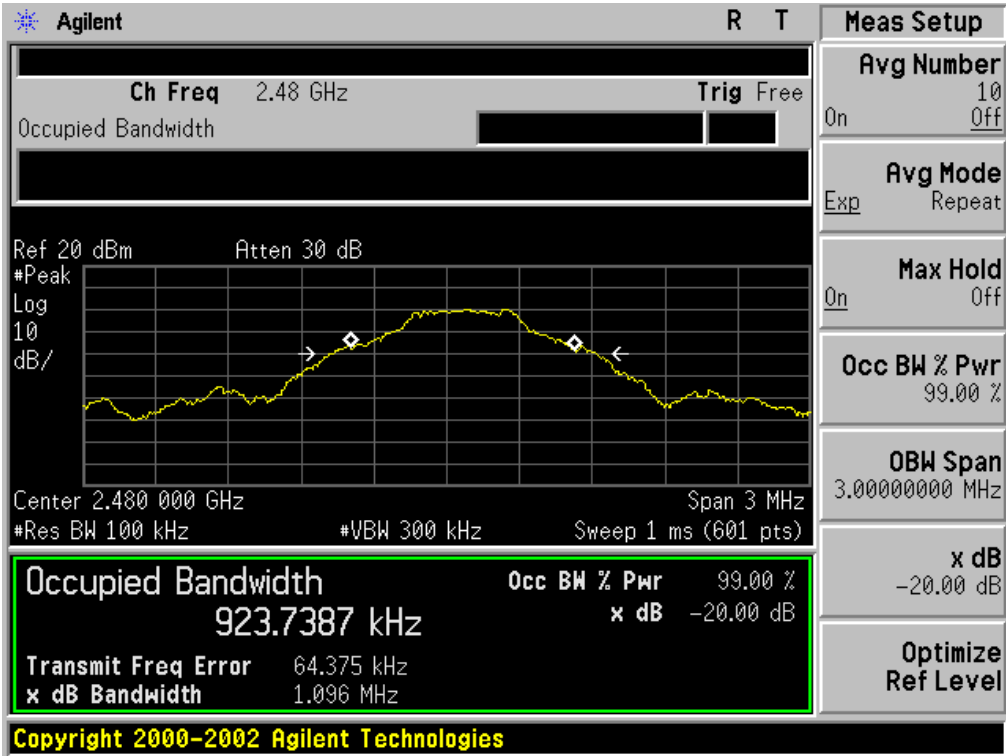


BLUETOOTH 2Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.378	PASS
	Middle Channel	1.419	PASS
	High Channel	1.404	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

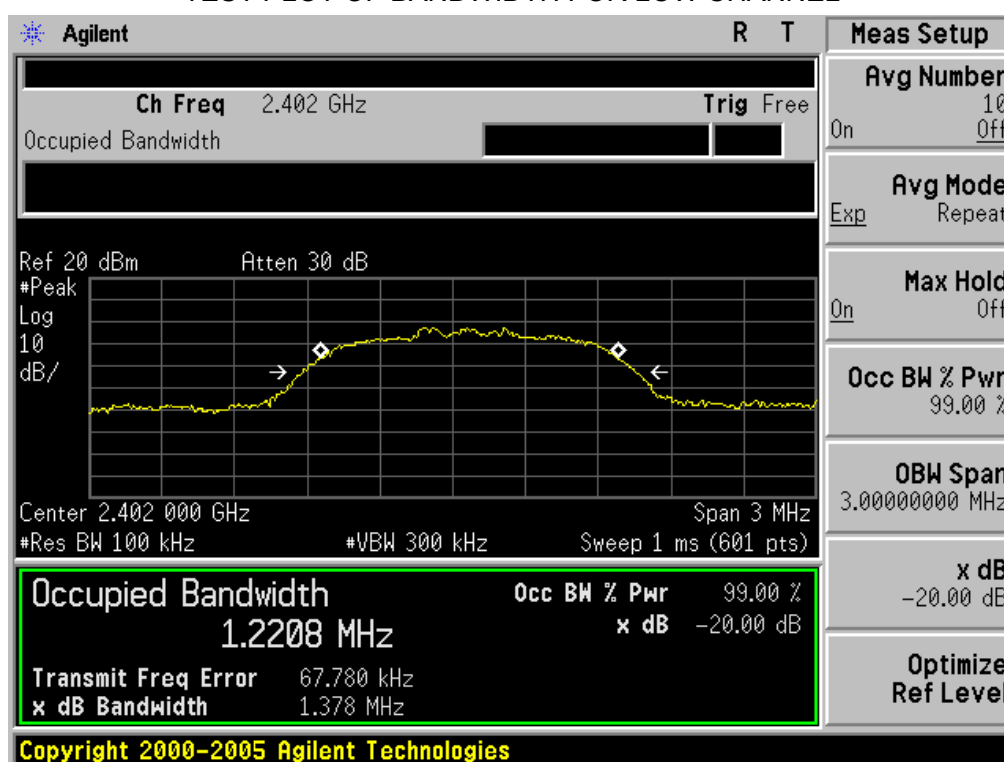

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

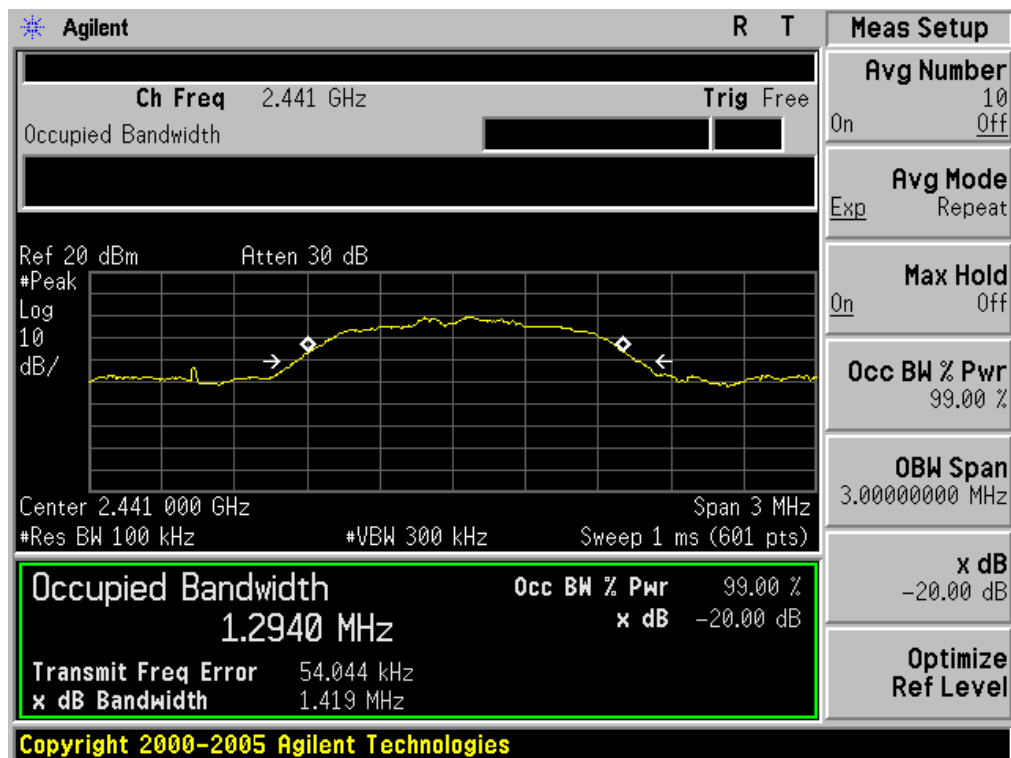


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

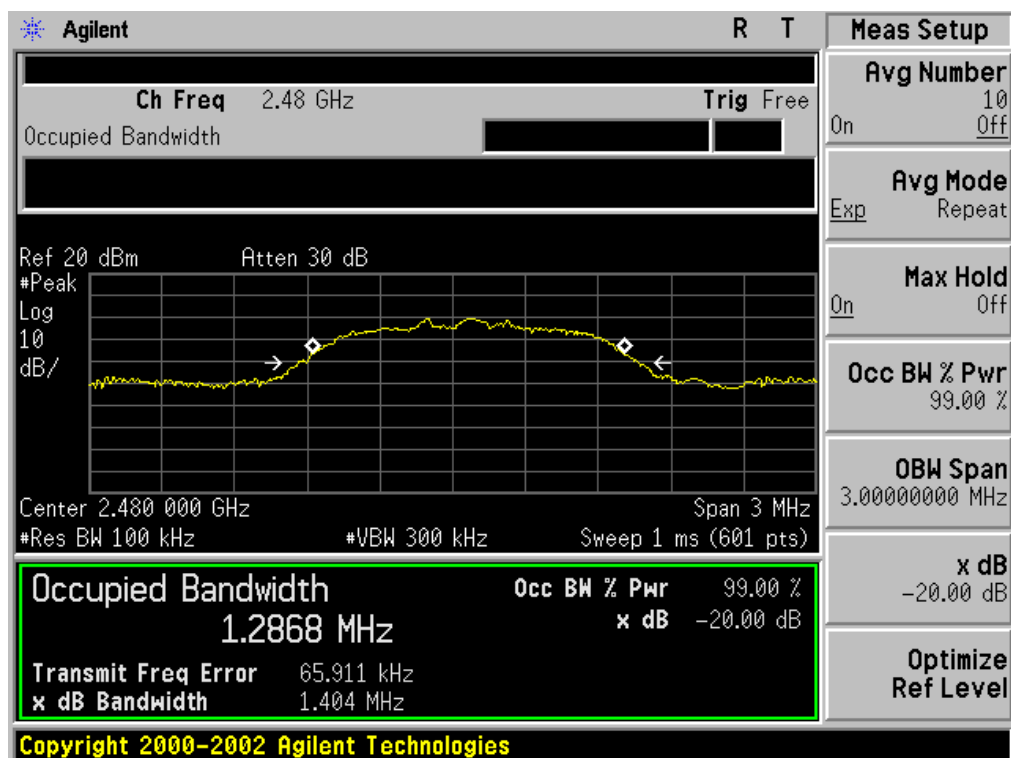


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.374	PASS
	Middle Channel	1.424	PASS
	High Channel	1.426	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

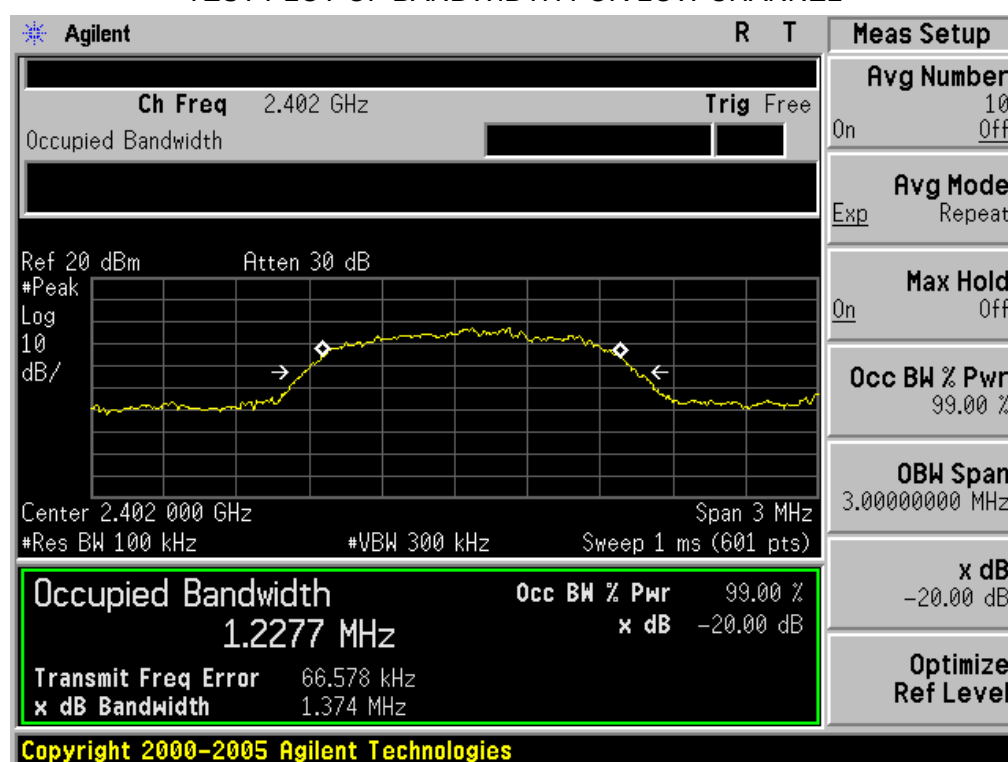

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

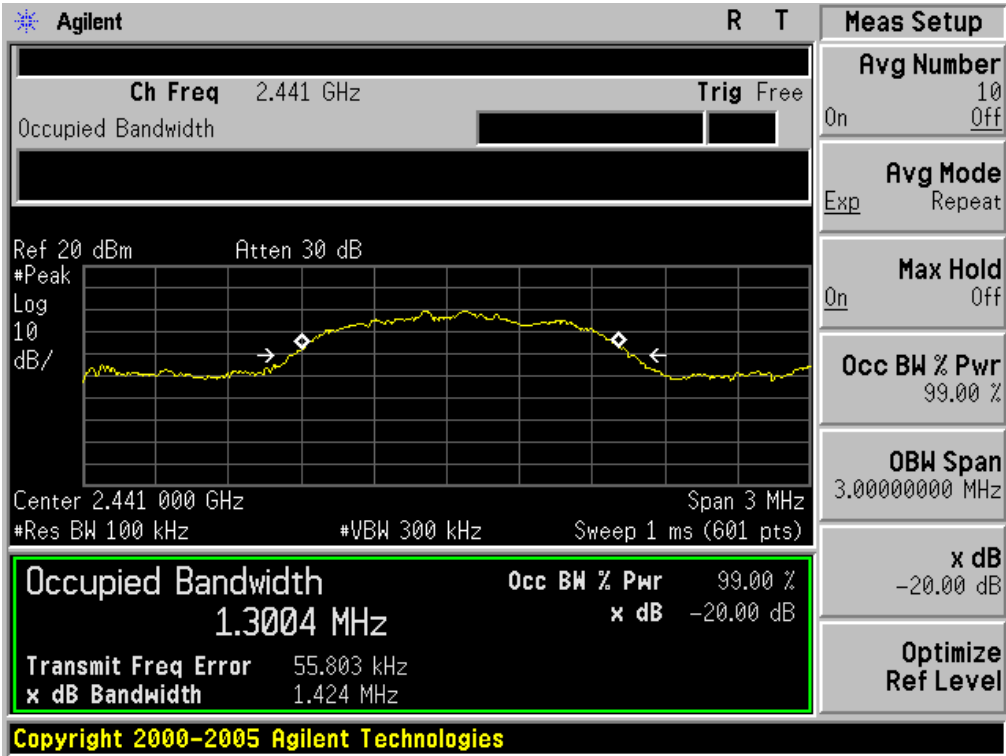


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

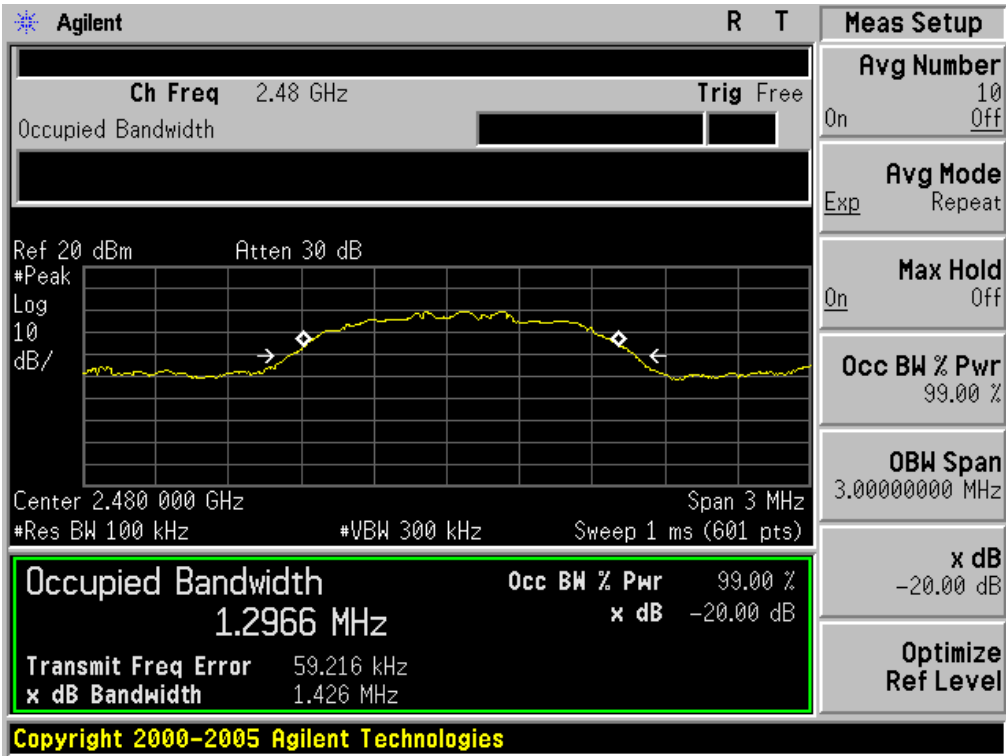


FOR BLE

BLUETOOTH 1Mbps LIMITS AND MEASUREMENT RESUL			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.200	PASS
	Middle Channel	1.192	PASS
	High Channel	1.206	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

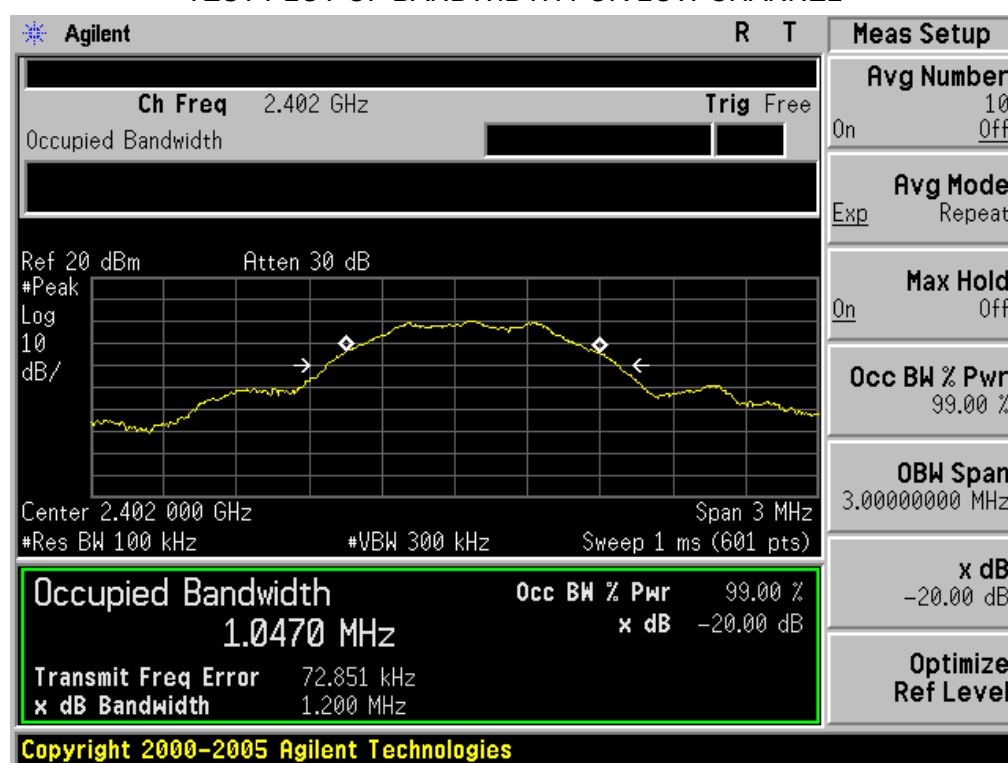

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

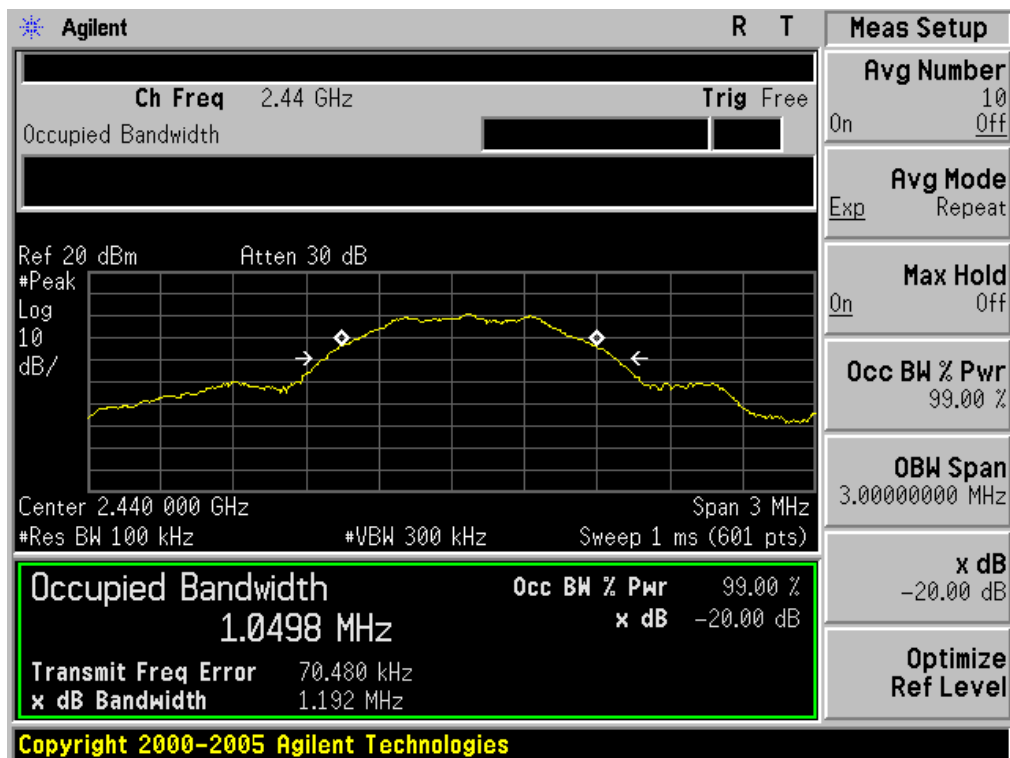

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

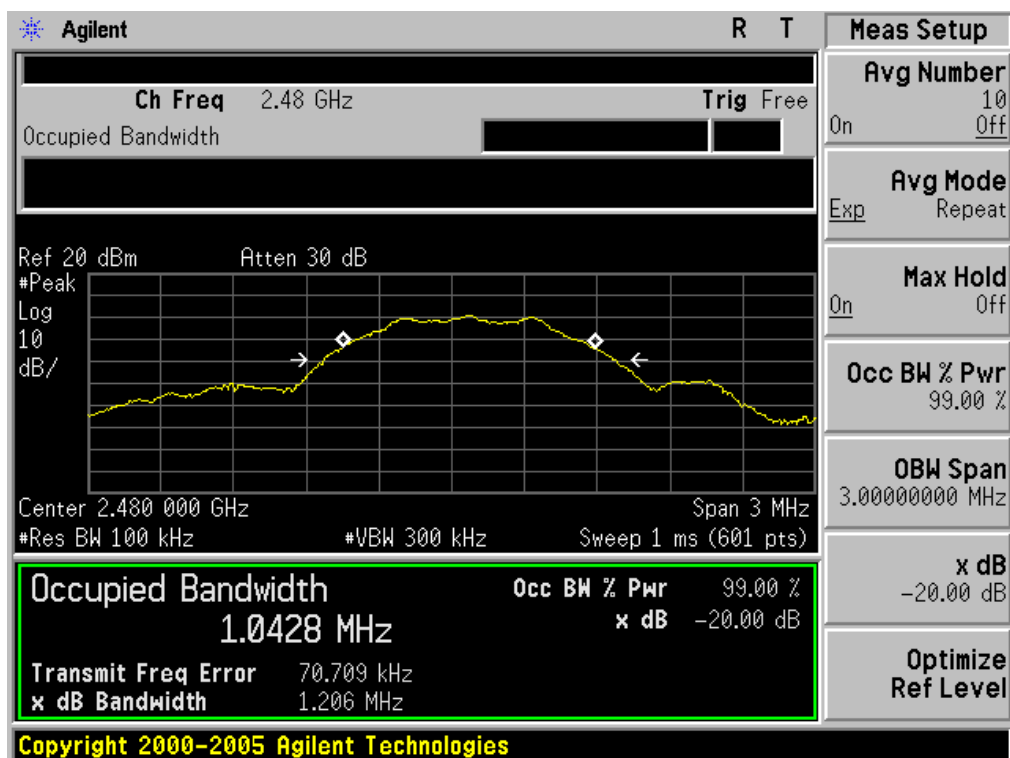

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

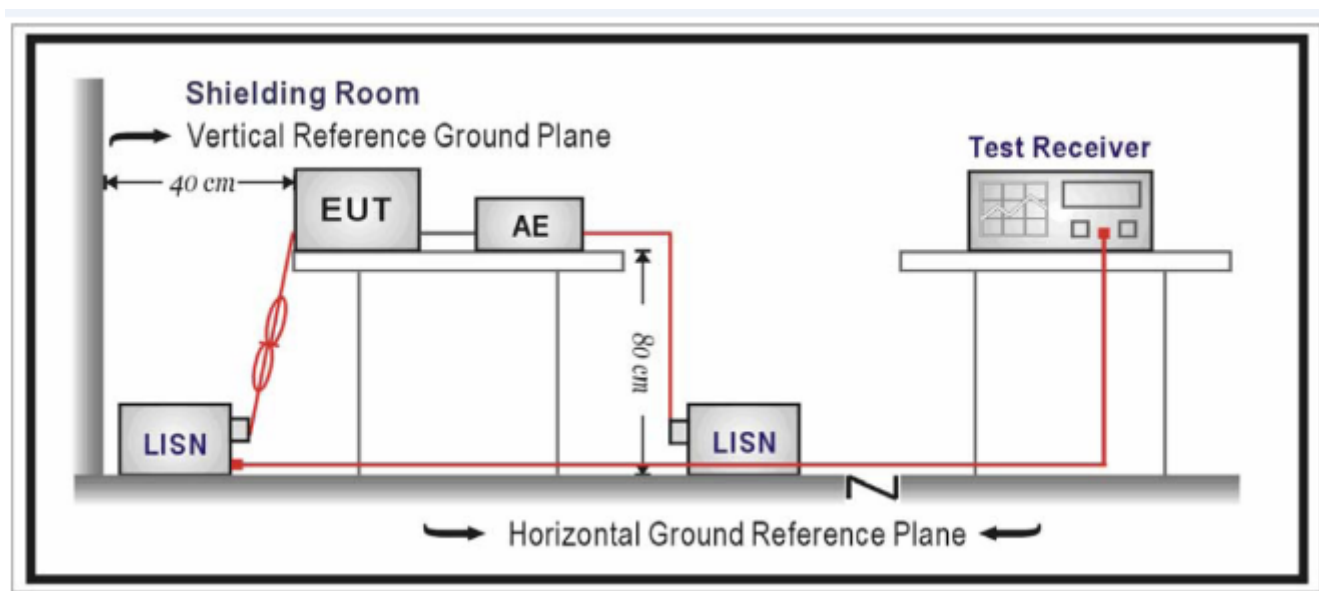

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.


11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST FOR BR/EDR

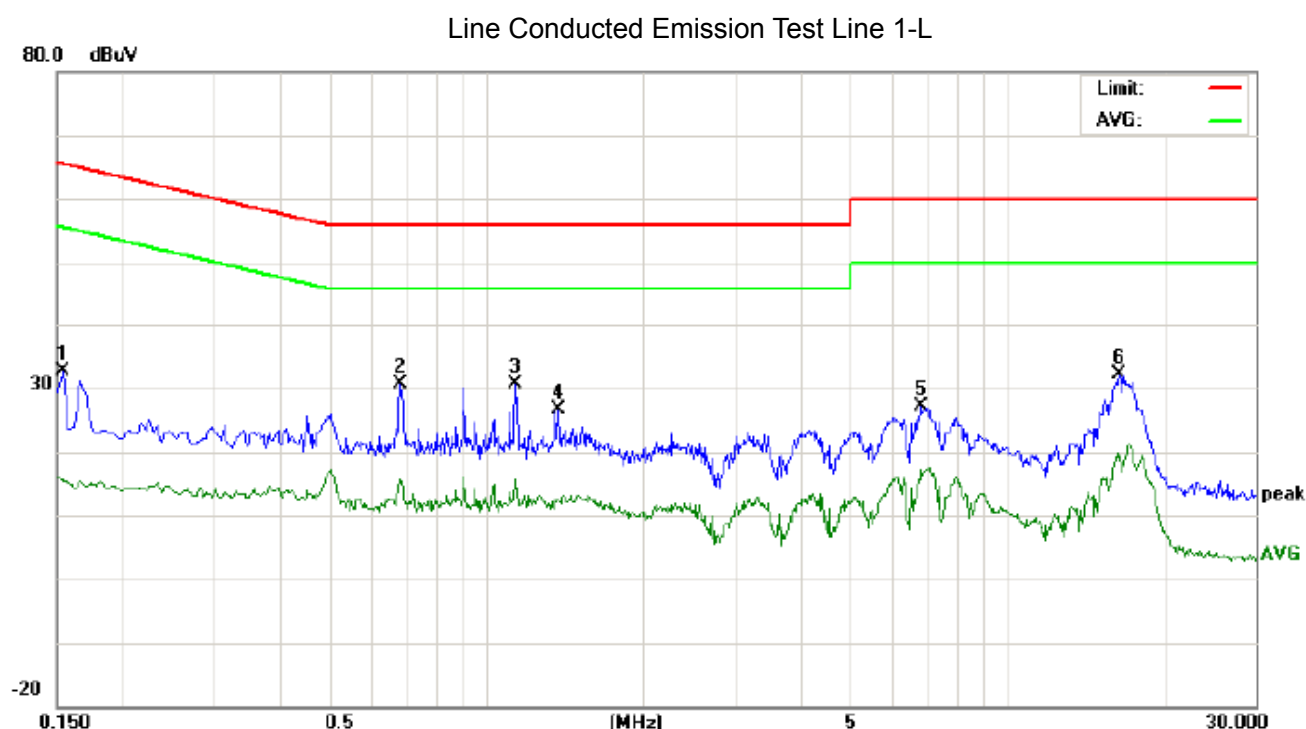

Site: Conduction Phase: **L1** Temperature: 22.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.3 %
EUT: Bluetooth Headphones
M/N: COULAX CX03
Mode: BT Link with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	22.50		5.31	10.16	32.66		15.47	65.78	55.78	-33.12	-40.31	P	
2	0.6860	20.39		5.22	10.34	30.73		15.56	56.00	46.00	-25.27	-30.44	P	
3	1.1380	20.29		5.33	10.37	30.66		15.70	56.00	46.00	-25.34	-30.30	P	
4	1.3740	16.30		2.12	10.38	26.68		12.50	56.00	46.00	-29.32	-33.50	P	
5	6.8700	16.71		6.74	10.34	27.05		17.08	60.00	50.00	-32.95	-32.92	P	
6	16.4420	21.91		9.18	10.12	32.03		19.30	60.00	50.00	-27.97	-30.70	P	

Line Conducted Emission Test Line 2-N

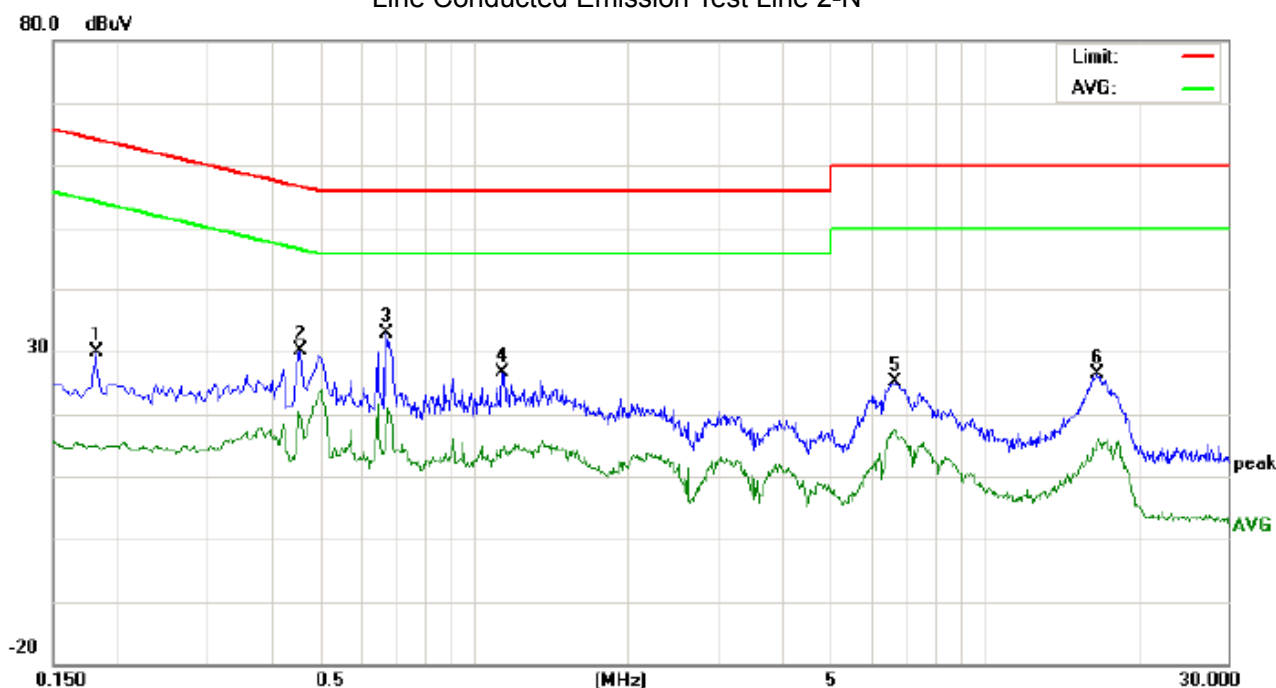


Site: Conduction Phase: **N** Temperature: 22.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.3 %
EUT: Bluetooth Headphones
M/N: COULAX CX03
Mode: BT Link with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1819	19.57		4.86	10.20	29.77		15.06	64.39	54.39	-34.62	-39.33	P	
2	0.4580	19.86		9.18	10.37	30.23		19.55	56.73	46.73	-26.50	-27.18	P	
3	0.6740	22.47		6.68	10.34	32.81		17.02	56.00	46.00	-23.19	-28.98	P	
4	1.1380	16.22		3.86	10.37	26.59		14.23	56.00	46.00	-29.41	-31.77	P	
5	6.7060	14.82		7.09	10.32	25.14		17.41	60.00	50.00	-34.86	-32.59	P	
6	16.5940	16.19		4.10	10.12	26.31		14.22	60.00	50.00	-33.69	-35.78	P	

FOR BLE

Line Conducted Emission Test Line 1-L

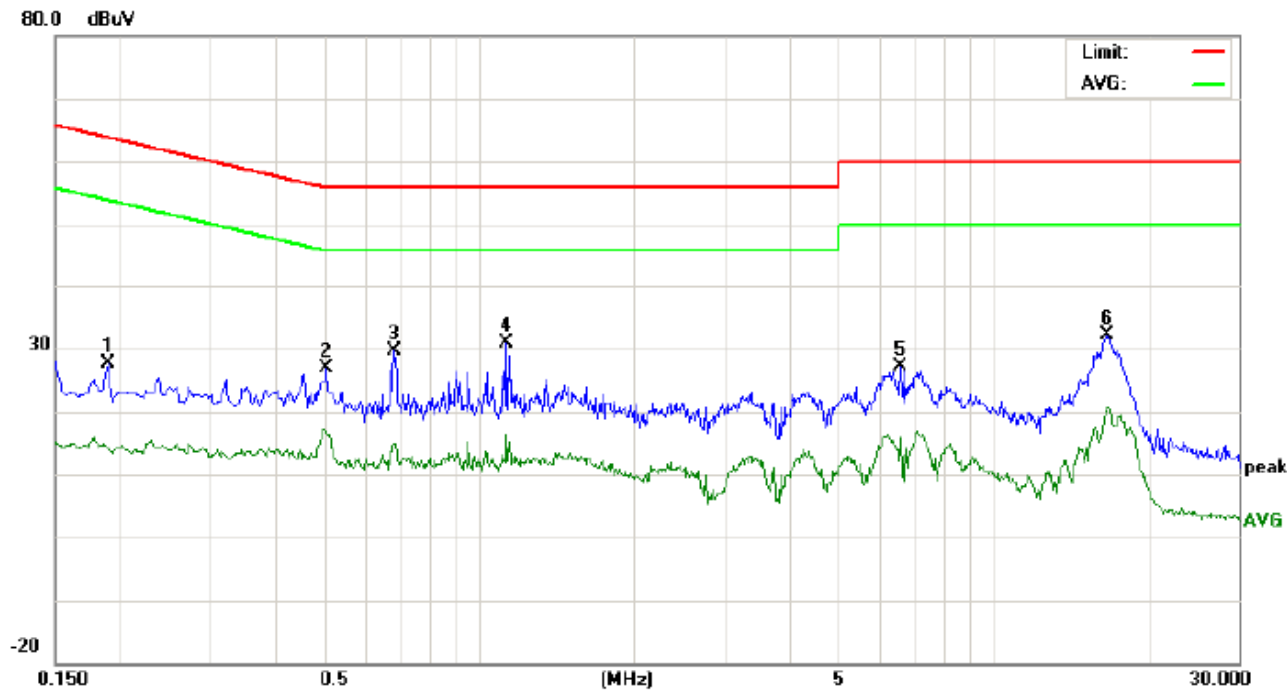


Site: Conduction
Limit: FCC Class B Conduction(QP)
EUT: Bluetooth Headphones
M/N: COULAX CX03
Mode: BT Link with charging
Note:

Phase: **L1**
Power:
Temperature: 22.9
Humidity: 56.3 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1900	17.33		3.82	10.20	27.53		14.02	64.03	54.03	-36.50	-40.01	P	
2	0.5060	16.38		6.59	10.39	26.77		16.98	56.00	46.00	-29.23	-29.02	P	
3	0.6860	19.27		4.54	10.34	29.61		14.88	56.00	46.00	-26.39	-31.12	P	
4	1.1340	20.60		5.92	10.37	30.97		16.29	56.00	46.00	-25.03	-29.71	P	
5	6.6180	16.83		5.56	10.31	27.14		15.87	60.00	50.00	-32.86	-34.13	P	
6	16.6340	21.98		10.55	10.12	32.10		20.67	60.00	50.00	-27.90	-29.33	P	

Line Conducted Emission Test Line 2-N

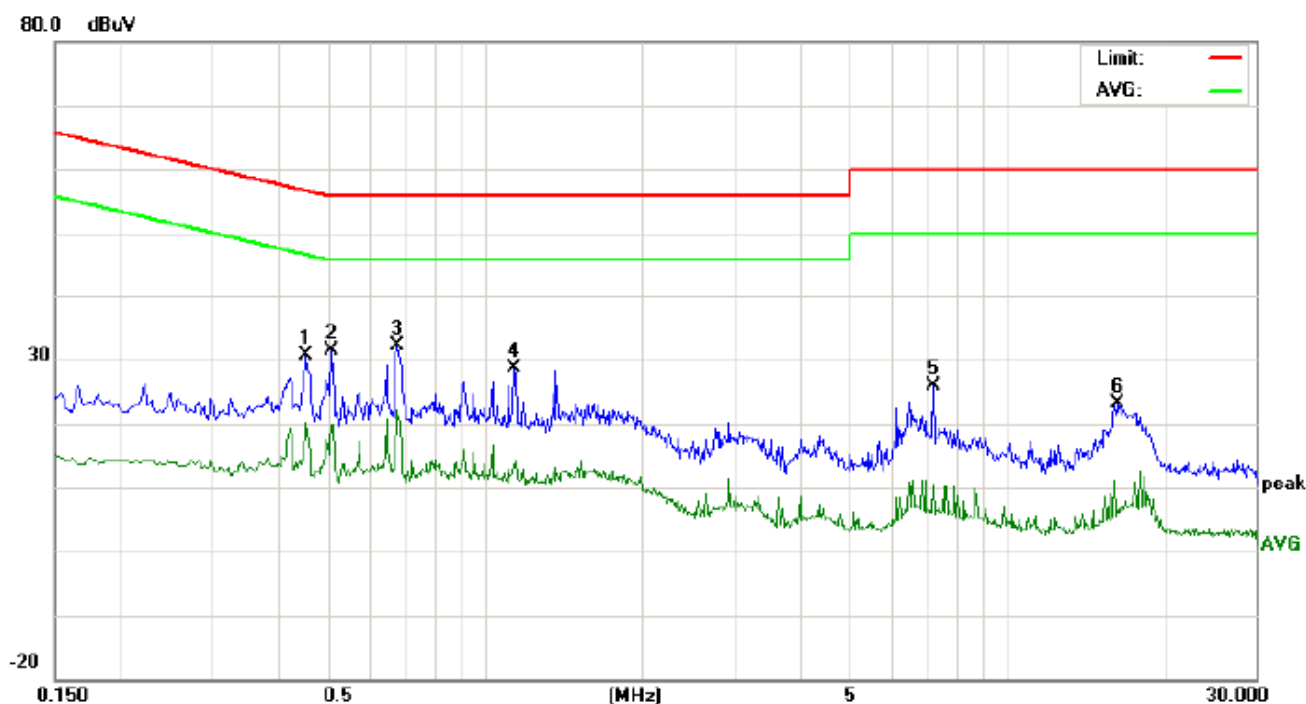

Site: Conduction Phase: *N* Temperature: 22.9
Limit: FCC Class B Conduction(QP) Power: Humidity: 56.3 %
EUT: Bluetooth Headphones
M/N: COULAX CX03
Mode: BT Link with charging
Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4540	20.14		9.68	10.37	30.51		20.05	56.80	46.80	-26.29	-26.75	P	
2	0.5100	21.05		9.57	10.39	31.44		19.96	56.00	46.00	-24.56	-26.04	P	
3	0.6780	21.78		10.24	10.34	32.12		20.58	56.00	46.00	-23.88	-25.42	P	
4	1.1380	18.32		2.99	10.37	28.69		13.36	56.00	46.00	-27.31	-32.64	P	
5	7.2380	15.59		-0.09	10.35	25.94		10.26	60.00	50.00	-34.06	-39.74	P	
6	16.2900	12.91		-3.65	10.12	23.03		6.47	60.00	50.00	-36.97	-43.53	P	

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP





APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




VIEW OF EUT (Port)




OPEN VIEW OF EUT

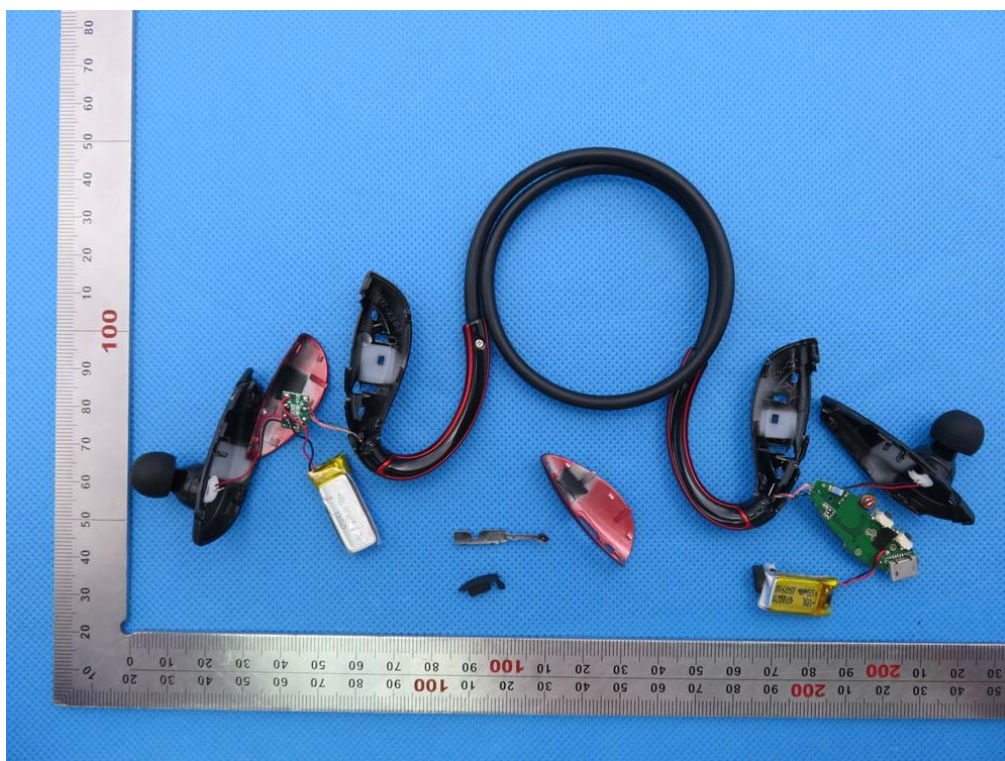


INTERNAL VIEW OF EUT-1

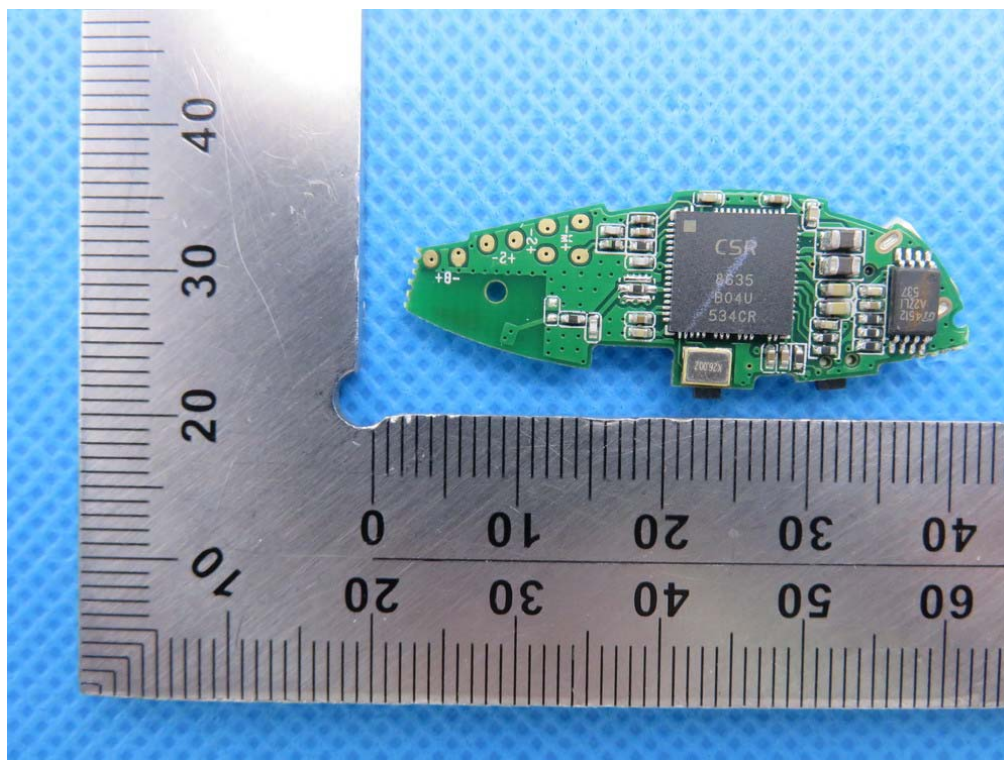


INTERNAL VIEW OF EUT-2

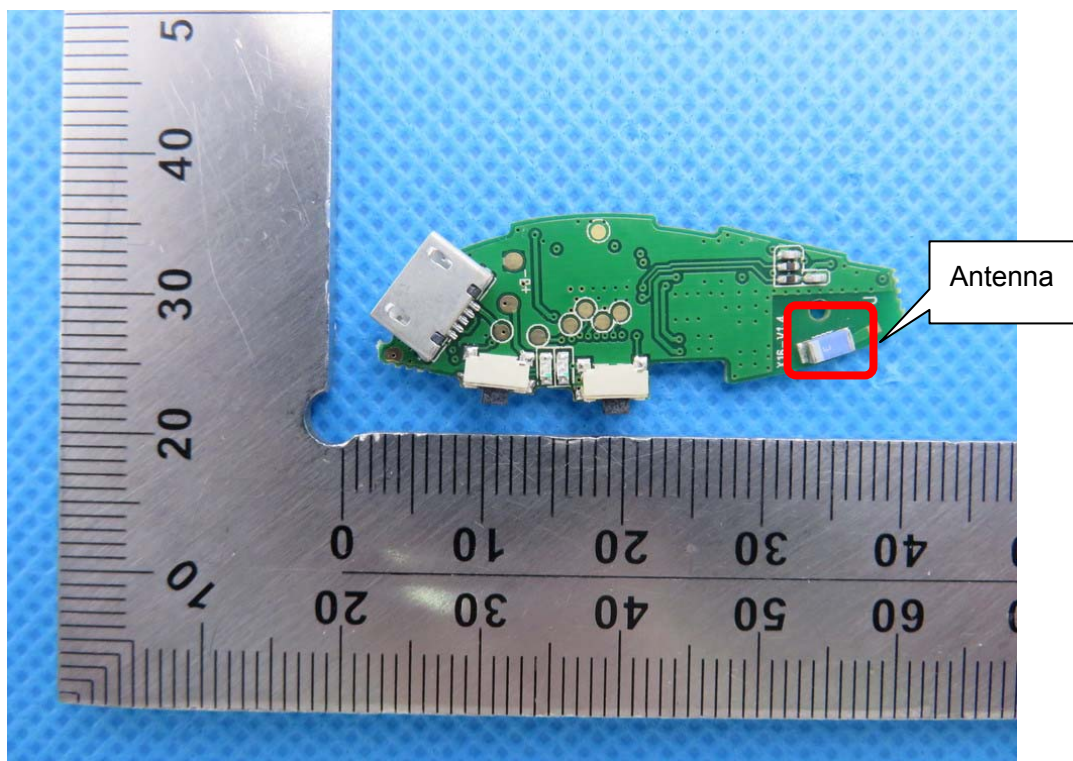


INTERNAL VIEW OF EUT-3

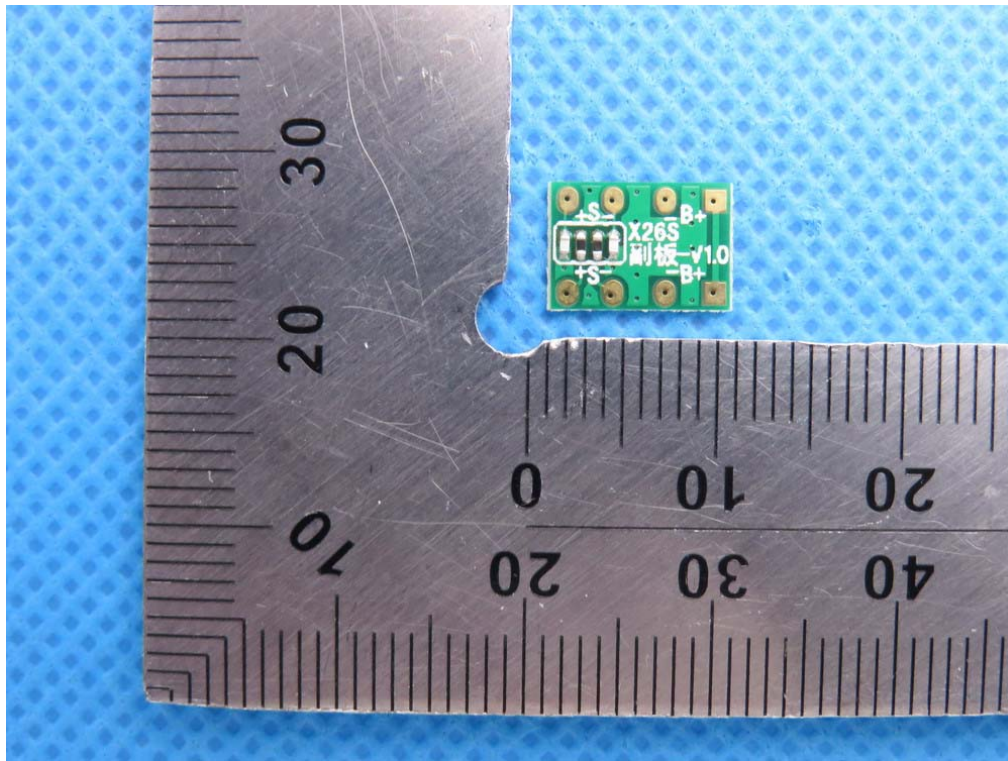

INTERNAL VIEW OF EUT-4

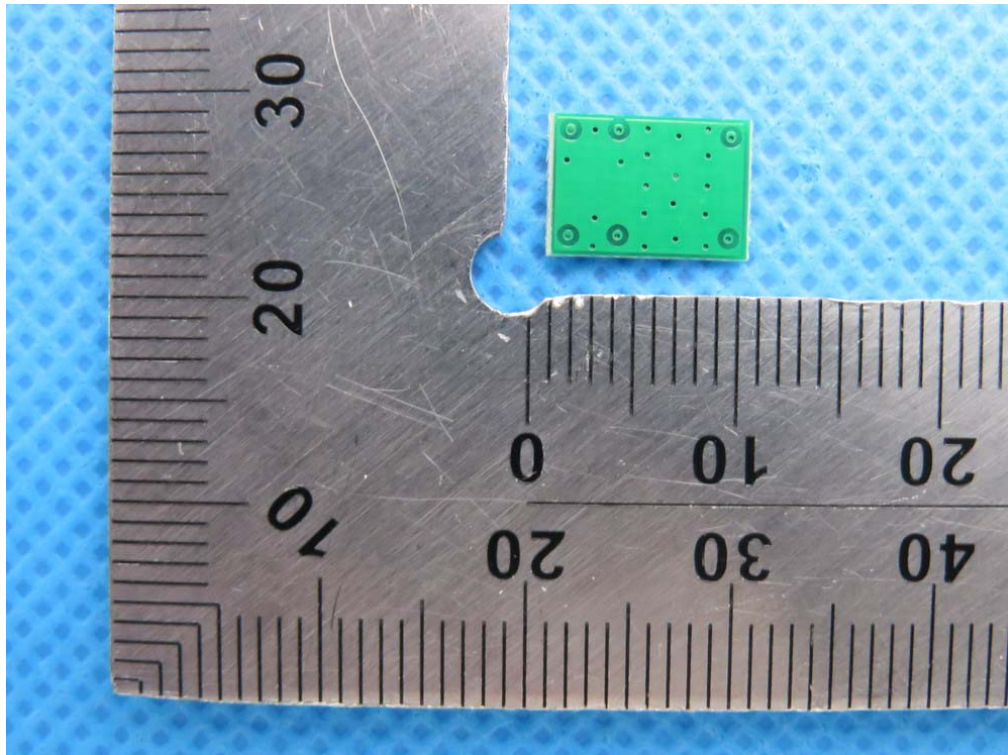

INTERNAL VIEW OF EUT-5

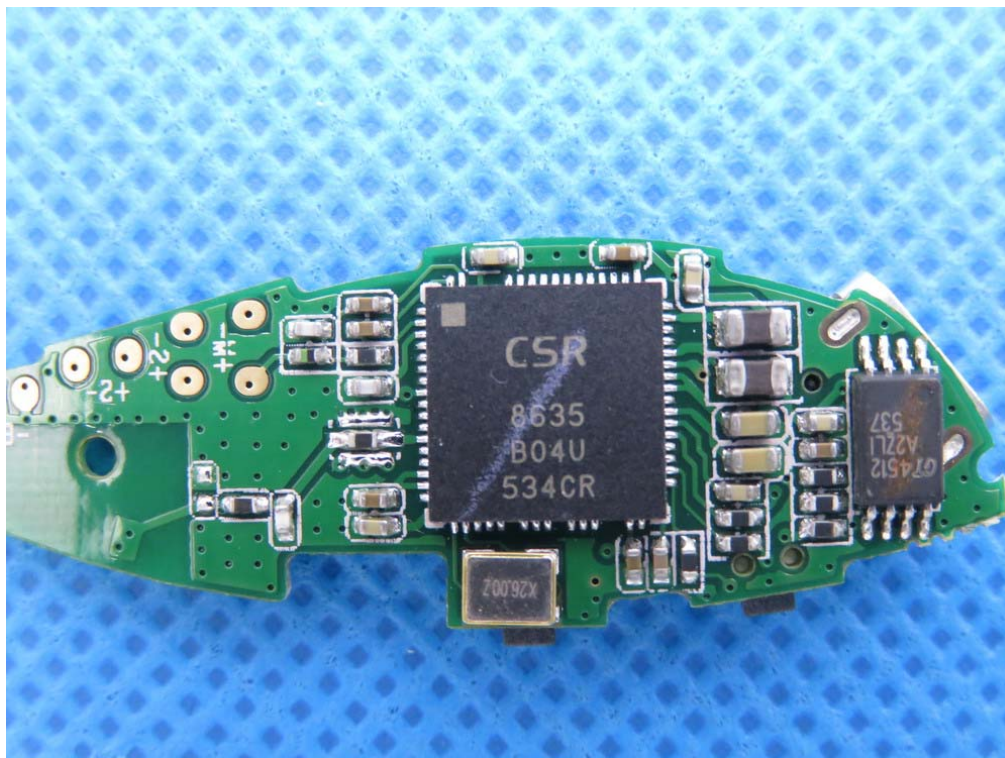

The gray one



----END OF REPORT----