

# FCC Part 15C Measurement and Test Report

For

**ZhuHai Bcom Electronic Technology Co., Ltd.**

**401 Room, 5 Building, No 19 YongTian Road, XiangZhou District, ZhuHai**

**City, GuangDong Province, China**

**FCC ID: 2AGRA-86211-PC**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>IP VIDEO DOOR PHONE</u>
<b>Tested Model:</b>	<u>86211-PC</u>
<b>Report No.:</b>	<u>STR15108257I-1</u>
<b>Tested Date:</b>	<u>2015-10-30 to 2015-12-16</u>
<b>Issued Date:</b>	<u>2015-12-16</u>
<b>Tested By:</b>	<u>Jason Su / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u>
<b>Prepared By:</b>	

*Jason Su*  
*Silin Chen*  
*Jandyso*

**Shenzhen SEM.Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: [www.semtest.com.cn](http://www.semtest.com.cn)

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 TEST EQUIPMENT LIST AND DETAILS.....	5
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
<b>3. RF EXPOSURE.....</b>	<b>7</b>
3.1 STANDARD APPLICABLE.....	7
3.2 TEST RESULT.....	7
<b>4. ANTENNA REQUIREMENT.....</b>	<b>8</b>
4.1 STANDARD APPLICABLE.....	8
4.2 EVALUATION INFORMATION.....	8
<b>5. POWER SPECTRAL DENSITY.....</b>	<b>9</b>
5.1 STANDARD APPLICABLE.....	9
5.2 TEST PROCEDURE.....	9
5.3 ENVIRONMENTAL CONDITIONS.....	9
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	10
<b>6. 6DB BANDWIDTH.....</b>	<b>17</b>
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 ENVIRONMENTAL CONDITIONS.....	17
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	17
<b>7. RF OUTPUT POWER.....</b>	<b>24</b>
7.1 STANDARD APPLICABLE.....	24
7.2 TEST PROCEDURE.....	24
7.3 ENVIRONMENTAL CONDITIONS.....	24
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	25
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS.....</b>	<b>32</b>
8.1 MEASUREMENT UNCERTAINTY.....	32
8.2 STANDARD APPLICABLE.....	32
8.3 TEST PROCEDURE.....	32
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	34
8.5 ENVIRONMENTAL CONDITIONS.....	34
8.6 SUMMARY OF TEST RESULTS/PLOTS.....	34
<b>9. OUT OF BAND EMISSIONS.....</b>	<b>63</b>
9.1 STANDARD APPLICABLE.....	63
9.2 TEST PROCEDURE.....	63
9.3 ENVIRONMENTAL CONDITIONS.....	64
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	64
<b>10. CONDUCTED EMISSIONS.....</b>	<b>72</b>
10.1 MEASUREMENT UNCERTAINTY.....	72
10.2 TEST PROCEDURE.....	72
10.3 BASIC TEST SETUP BLOCK DIAGRAM.....	72
10.4 ENVIRONMENTAL CONDITIONS.....	72
10.5 TEST RECEIVER SETUP.....	73
10.6 SUMMARY OF TEST RESULTS/PLOTS.....	73
10.7 CONDUCTED EMISSIONS TEST DATA.....	73

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: ZhuHai Bcom Electronic Technology Co., Ltd.  
Address of applicant: 401 Room, 5 Building, No 19 YongTian Road,  
XiangZhou District, ZhuHai City, GuangDong  
Province, China  
Manufacturer: ZhuHai Bcom Electronic Technology Co., Ltd.  
Address of manufacturer: 401 Room, 5 Building, No 19 YongTian Road,  
XiangZhou District, ZhuHai City, GuangDong  
Province, China

General Description of EUT	
Product Name:	IP VIDEO DOOR PHONE
Trade Name:	BcomTech
Model No.:	86211-PC
Adding Model(s):	86211-P, 86211-F, 86206
Rated Voltage:	DC 12V Adapter
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model 86211-PC, but the circuit and the electronic construction does not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412MHz-2462MHz for 802.11b/g/n(HT20) 2422MHz-2452MHz for 802.11n(HT40)
RF Output Power:	15.72 dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	External uniqueness Antenna
Antenna Gain:	6dBi
Lowest Internal Frequency	24MHz

## 1.2 Test Standards

The following report is prepared on behalf of the ZhuHai Bcom Electronic Technology Co., Ltd in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V03r03 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
RJ45 Cable	2.8	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R
AC to DC Adapter	/	XED-CE120100C	/

## 1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Horn Antenna	ETS	3116B	00088203	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an external uniqueness antenna, fulfill the requirement of this section.



## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 V03r03, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-6.393	8
	2437	-6.832	8
	2462	-7.530	8
802.11g	2412	-13.45	8
	2437	-13.93	8
	2462	-14.57	8
802.11n HT20	2412	-13.54	8
	2437	-13.80	8
	2462	-14.56	8
802.11n HT40	2422	-17.08	8
	2437	-17.62	8
	2452	-18.43	8

Please refer to the following test plots:


## 802.11b-Low Channel

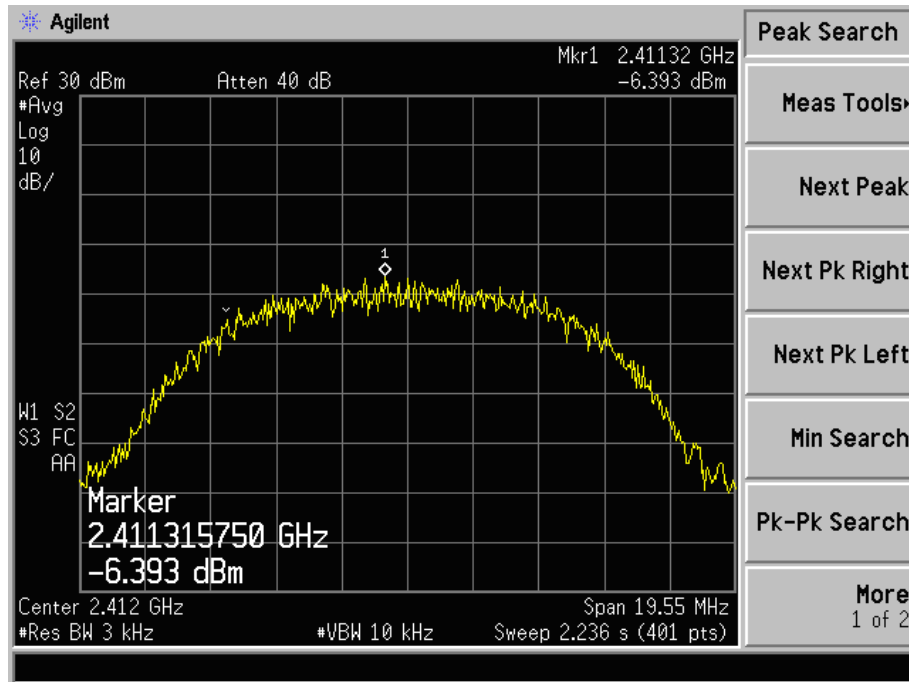


## 802.11b-Middle Channel

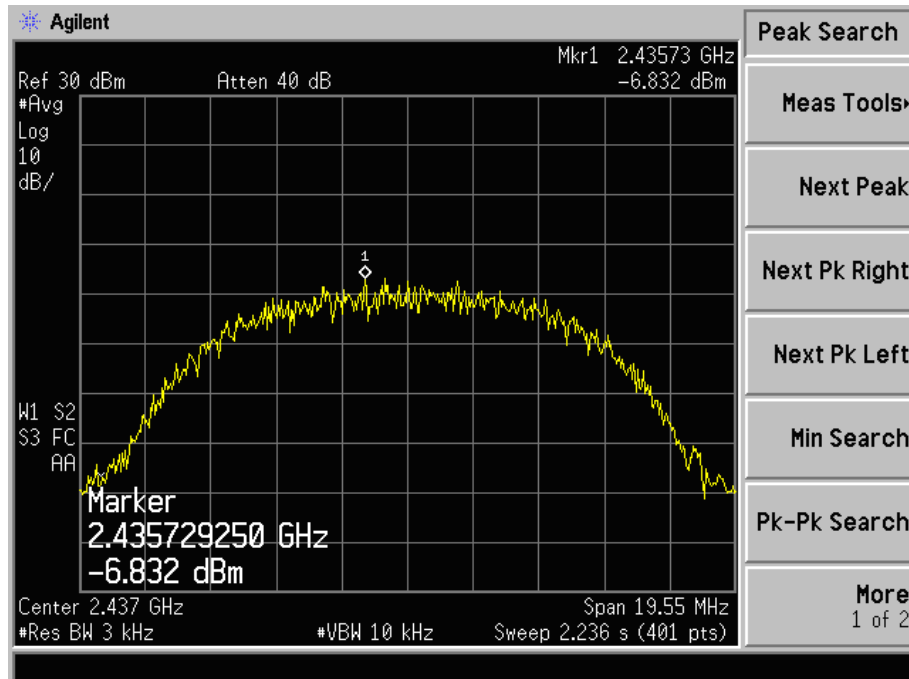


## 802.11b-High Channel

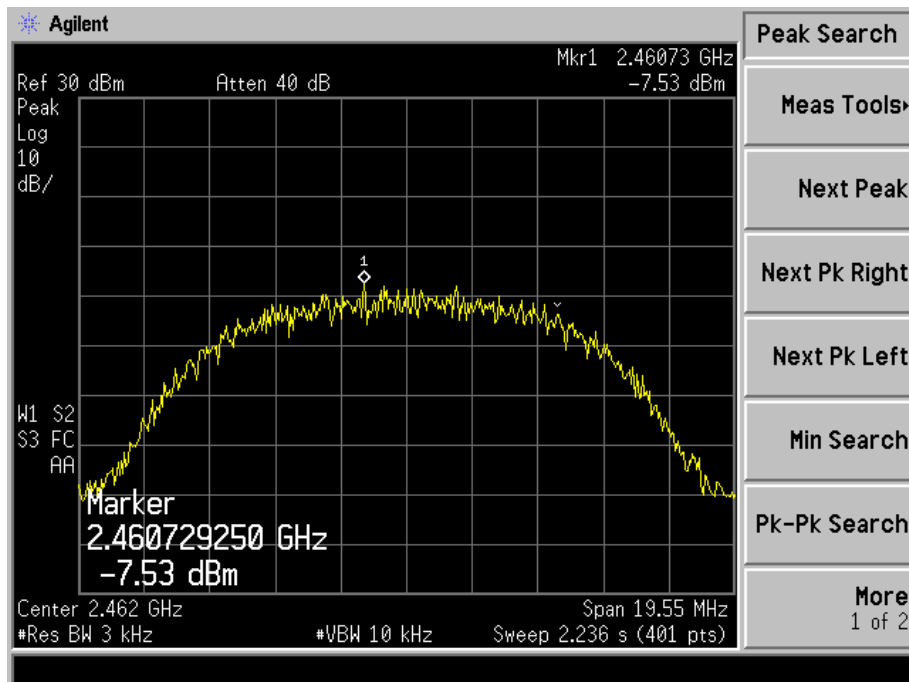


## 802.11g-Low Channel

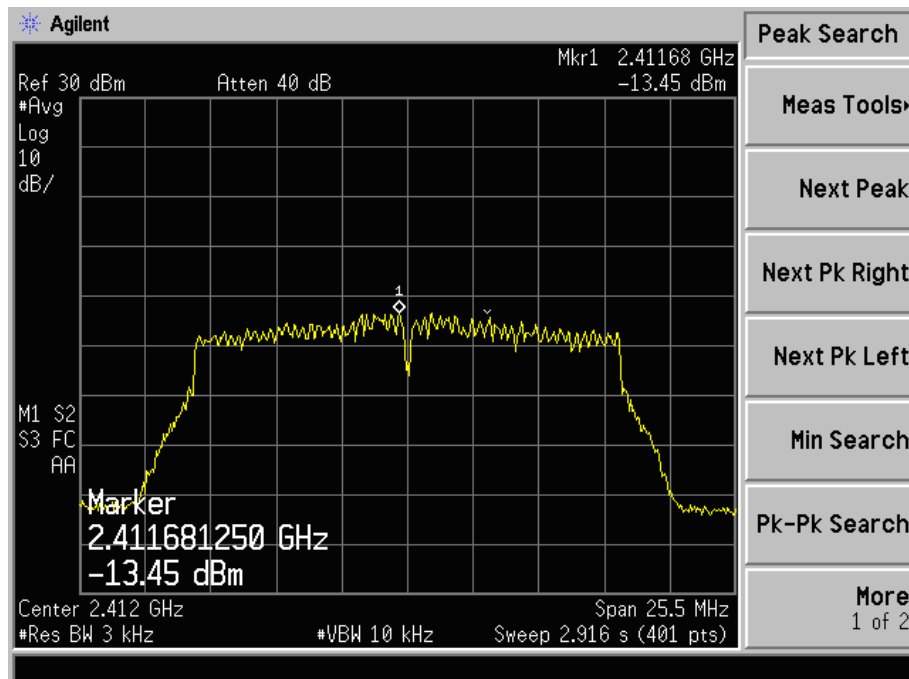


## 802.11g-Middle Channel

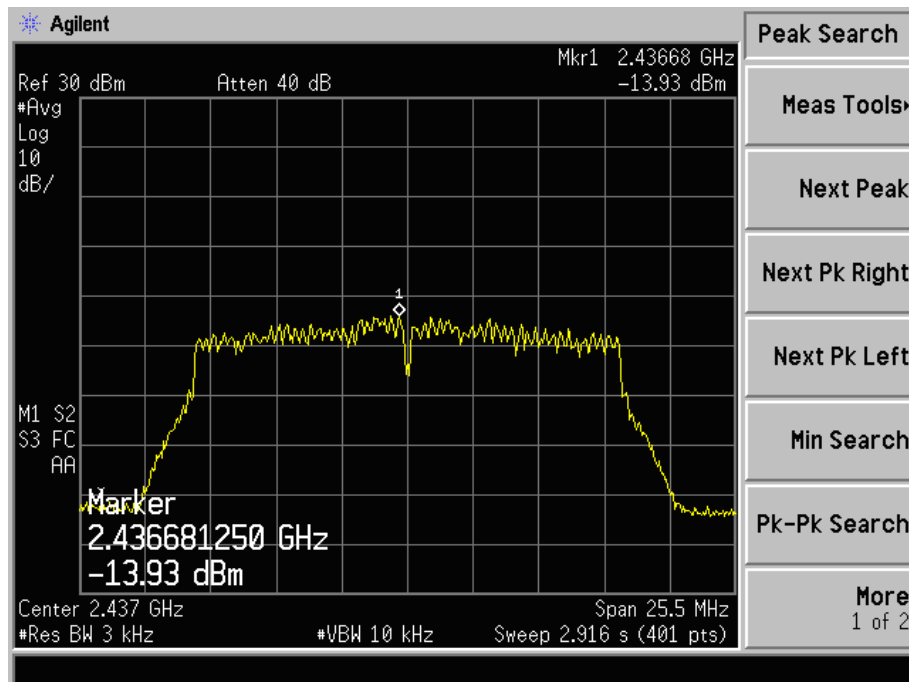


## 802.11g-High Channel

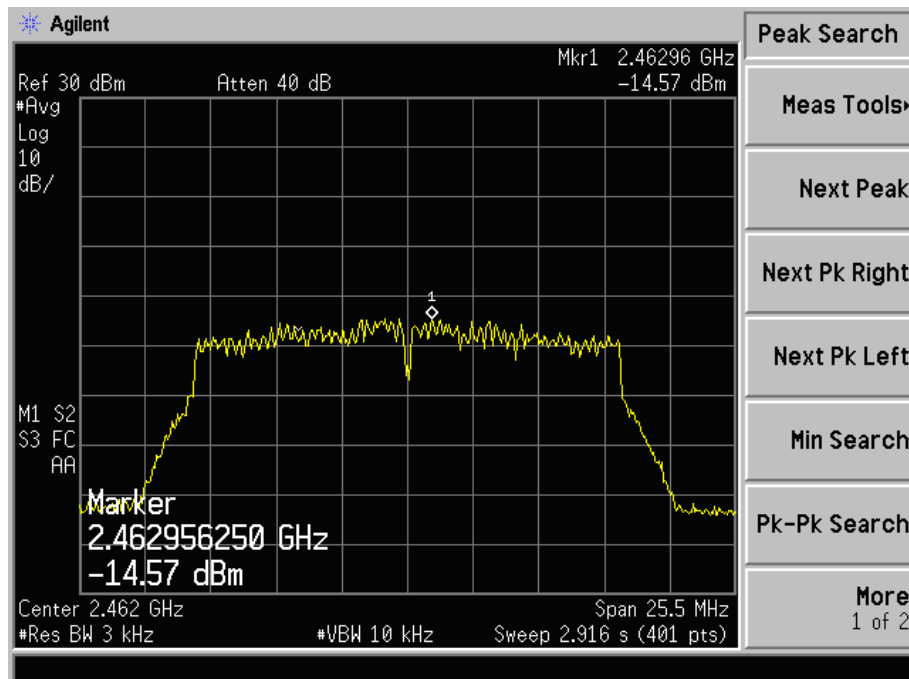


## 802.11n-HT20-Low Channel

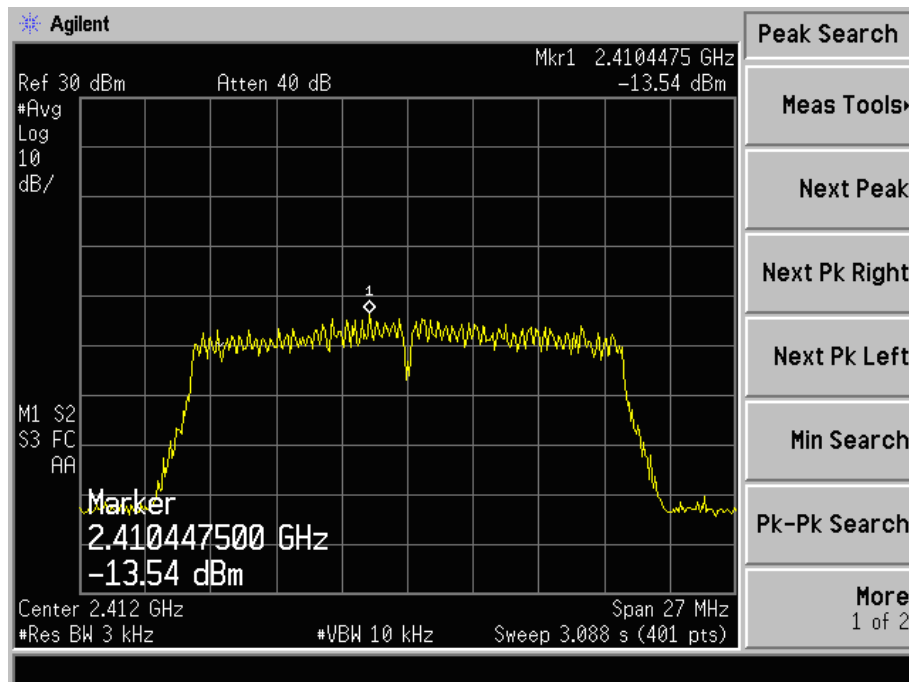


## 802.11n-HT20-Middle Channel

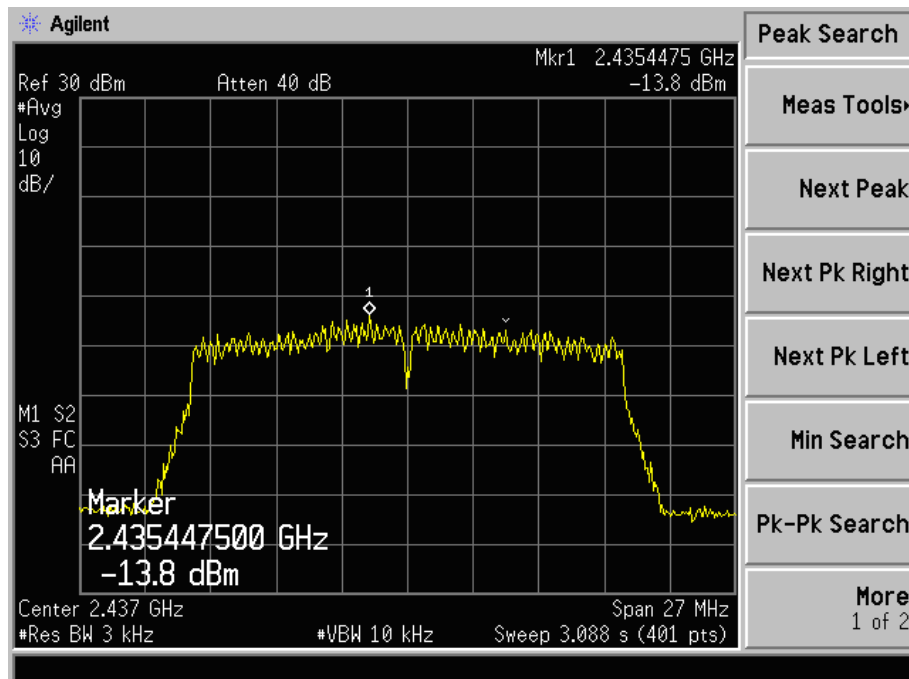


## 802.11n-HT20-High Channel

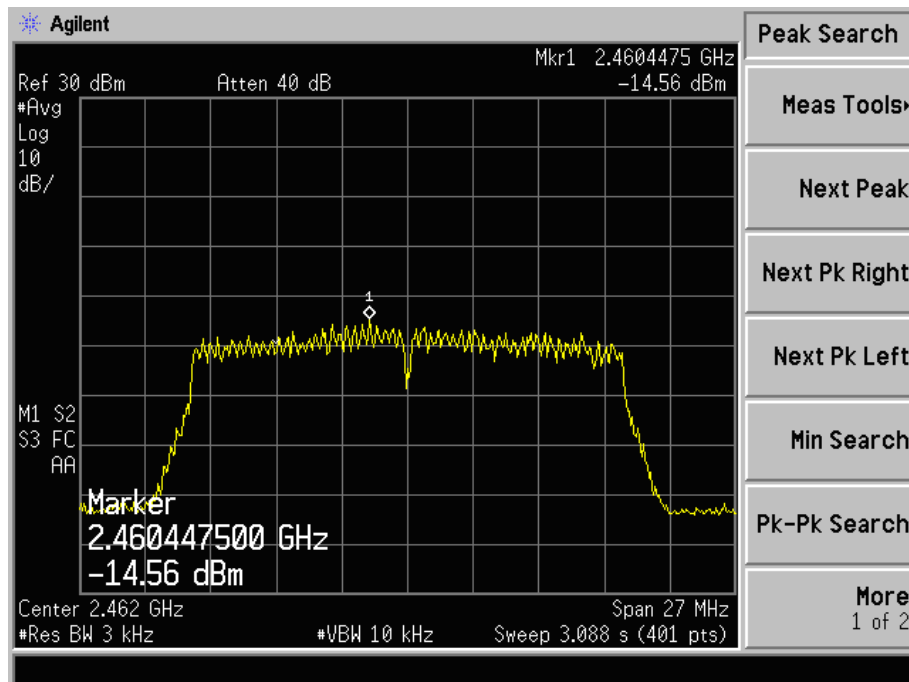


## 802.11n-HT40-Low Channel

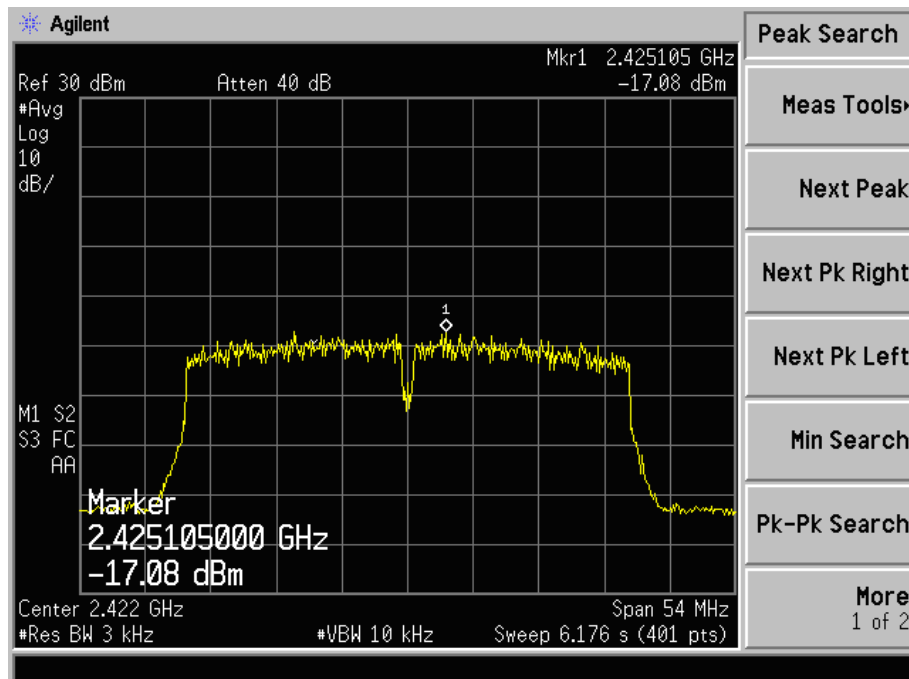

## 802.11n-HT40-Middle Channel

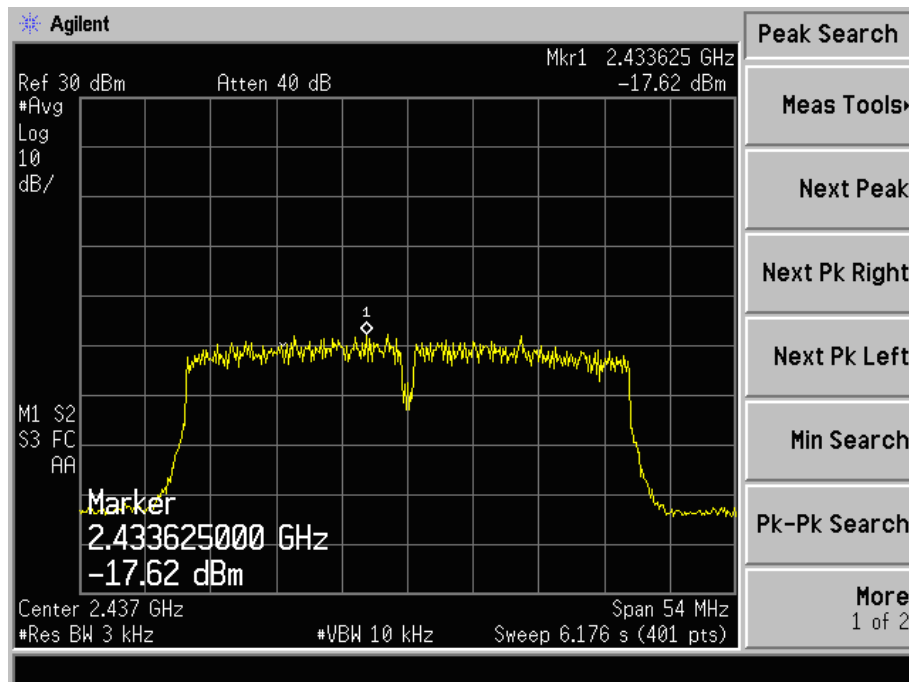

## 802.11n-HT40-High Channel

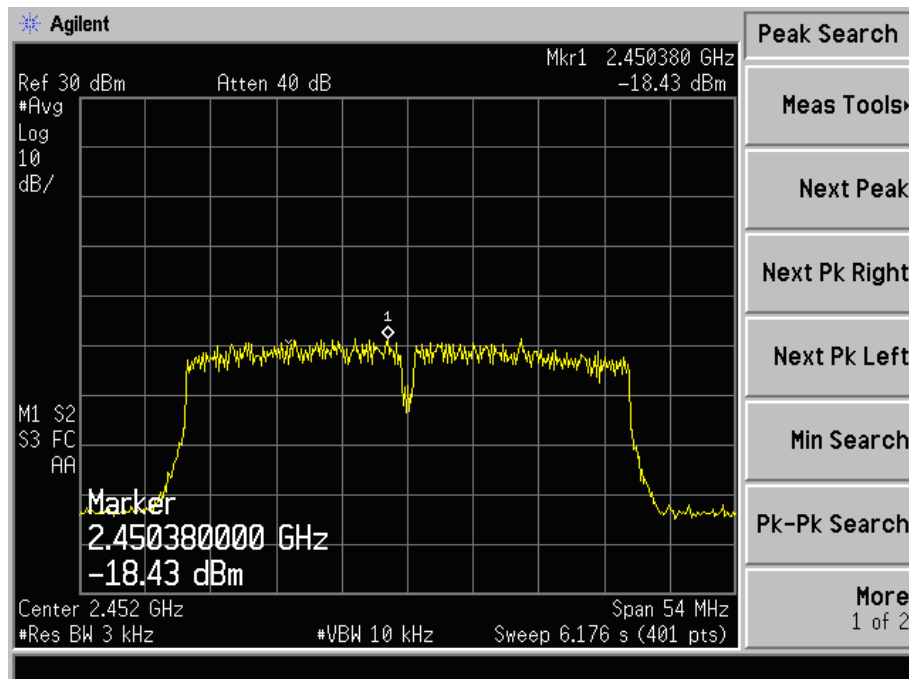



## 6. 6dB Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	9528	12616.3	$\geq 500$
	2437	9527	12573.2	$\geq 500$
	2462	9507	12502.3	$\geq 500$
802.11g	2412	16428	16346.0	$\geq 500$
	2437	16507	16379.6	$\geq 500$
	2462	16450	16339.2	$\geq 500$
802.11n-HT20	2412	17518	17514.2	$\geq 500$
	2437	17659	17540.0	$\geq 500$
	2462	17426	17497.4	$\geq 500$
802.11n-HT40	2422	36083	35848.3	$\geq 500$
	2437	36310	35843.5	$\geq 500$
	2452	36115	35812.6	$\geq 500$

Please refer to the following test plots:


## 802.11b-Low Channel

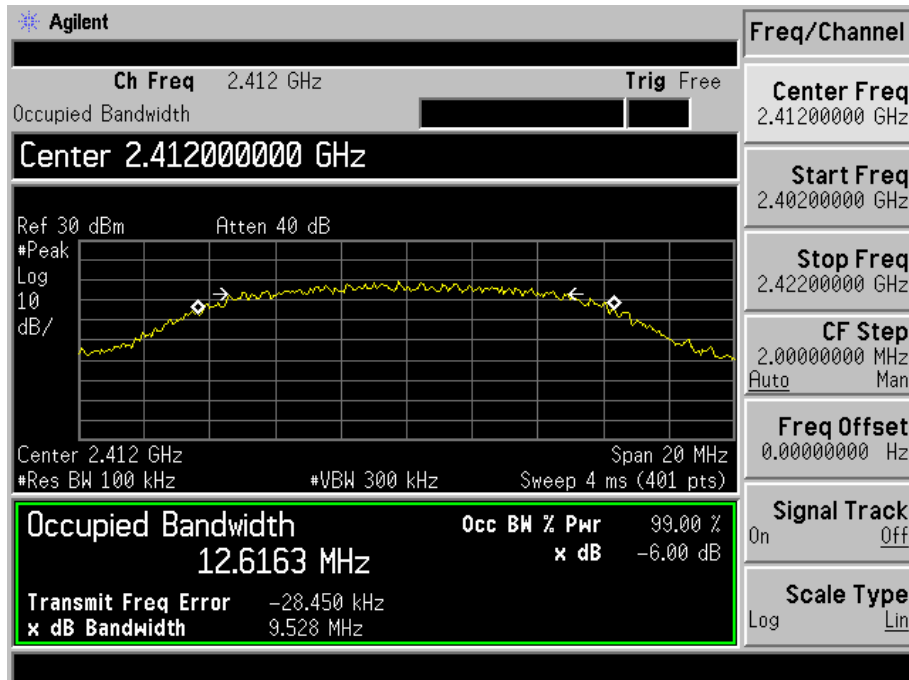


## 802.11b-Middle Channel

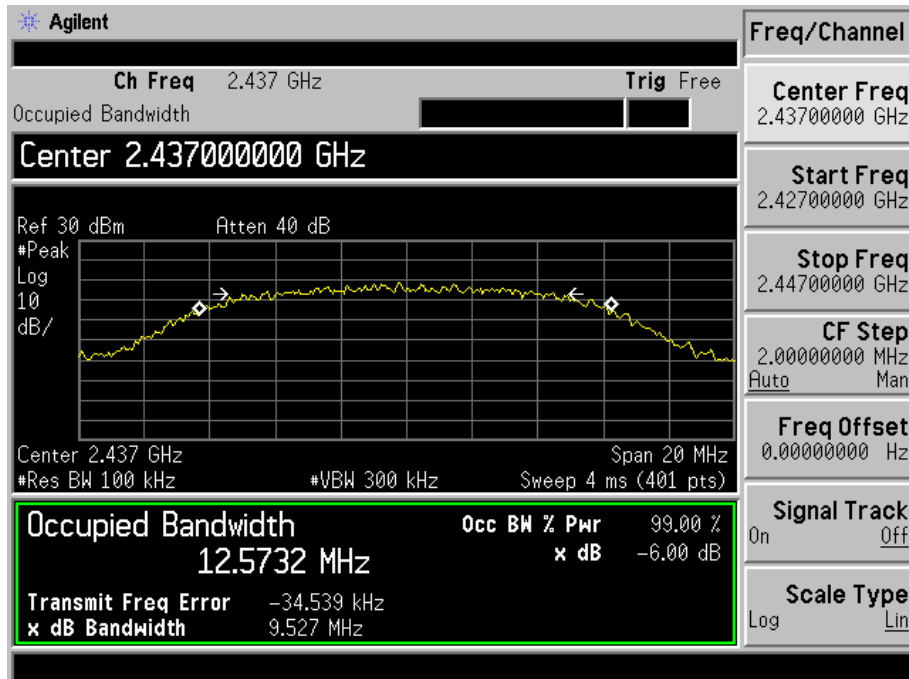


## 802.11b-High Channel

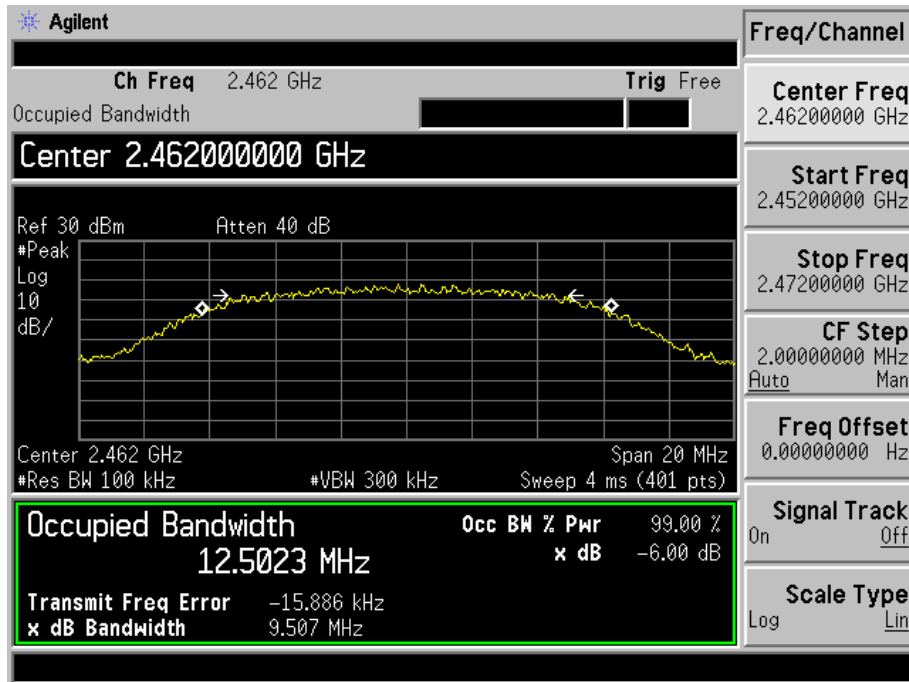


## 802.11g-Low Channel

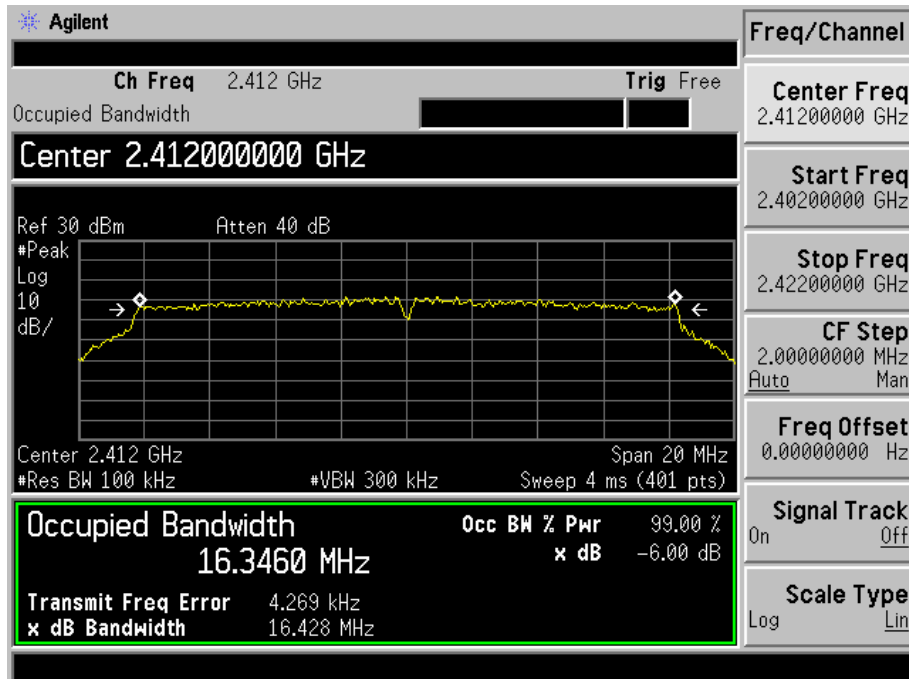


## 802.11g-Middle Channel

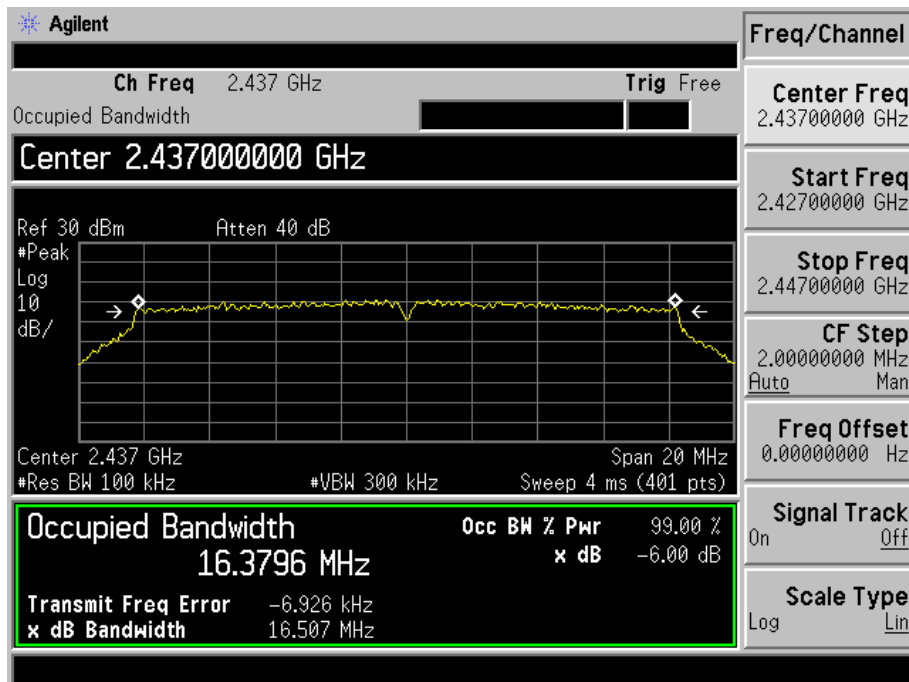


## 802.11g-High Channel

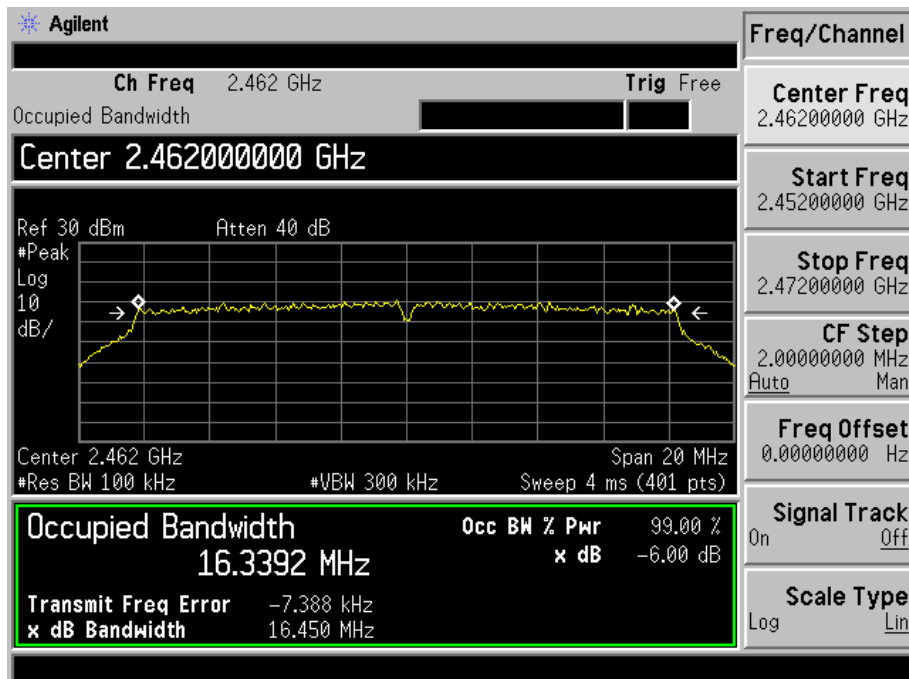


## 802.11n-HT20-Low Channel

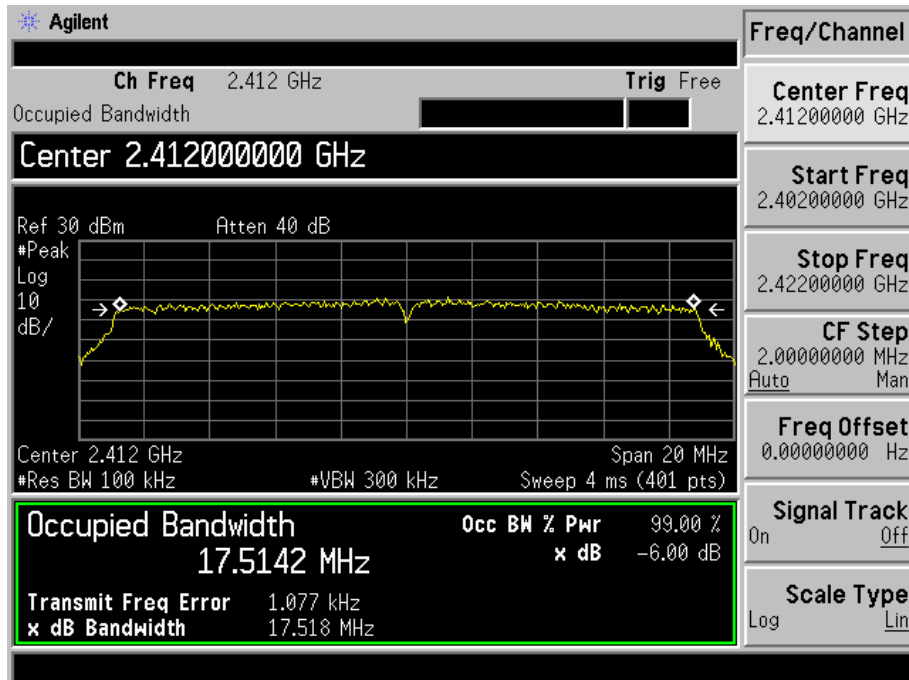


## 802.11n-HT20-Middle Channel

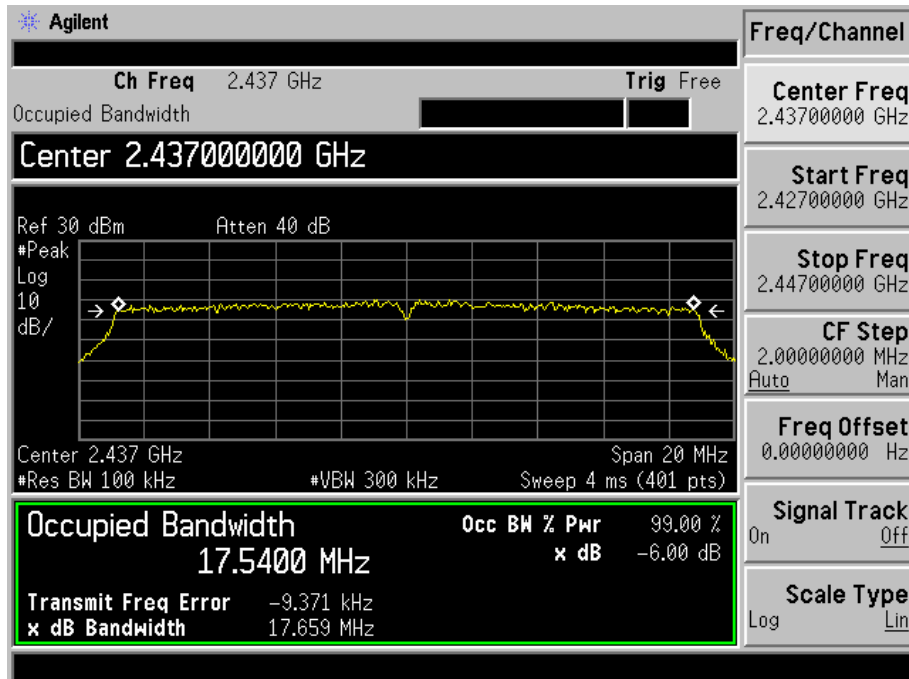


## 802.11n-HT20-High Channel

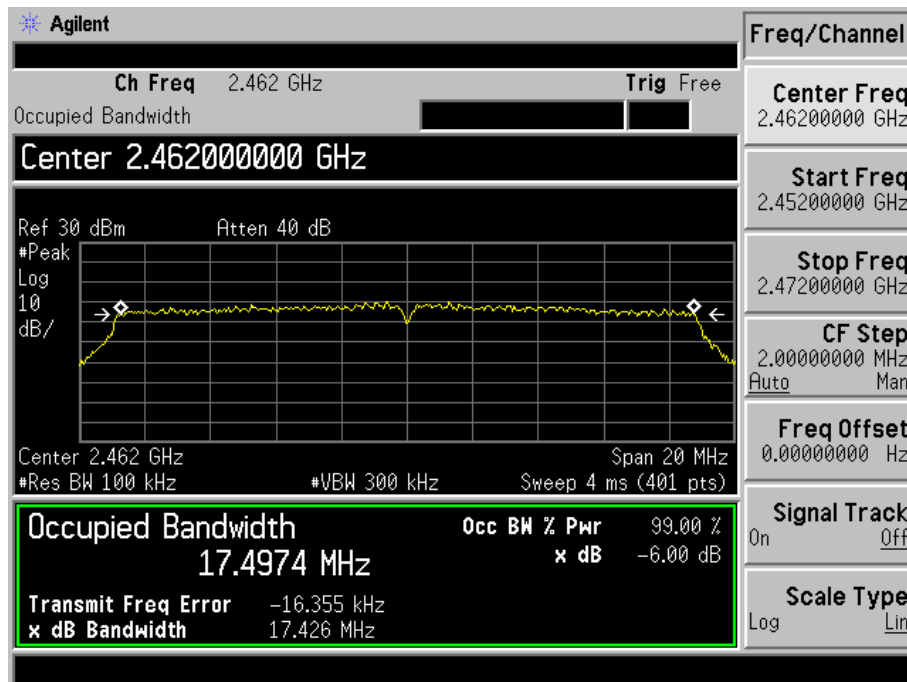


## 802.11n-HT40-Low Channel

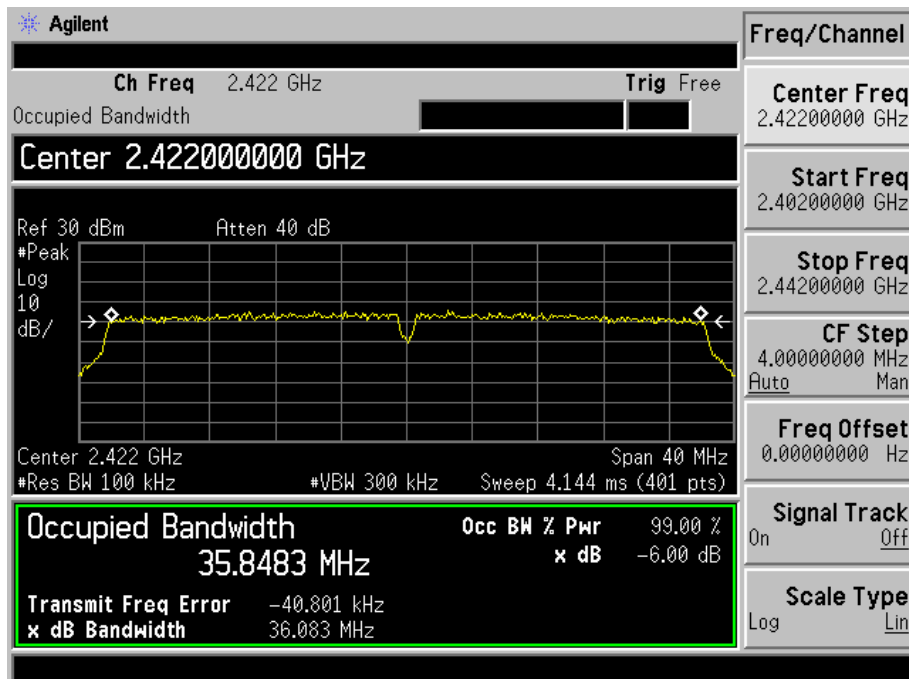

## 802.11n-HT40-Middle Channel

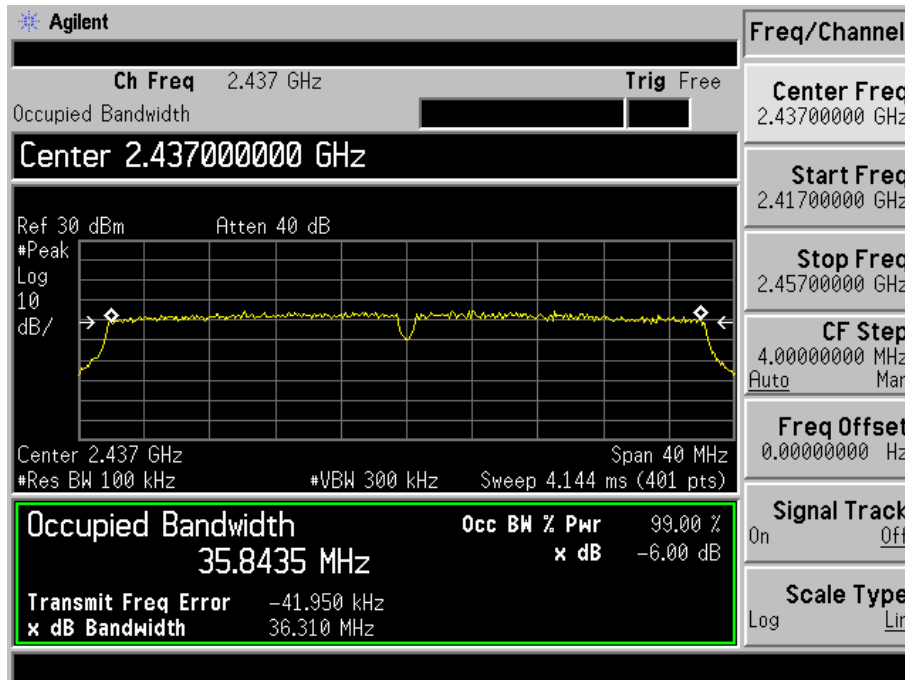

## 802.11n-HT40-High Channel

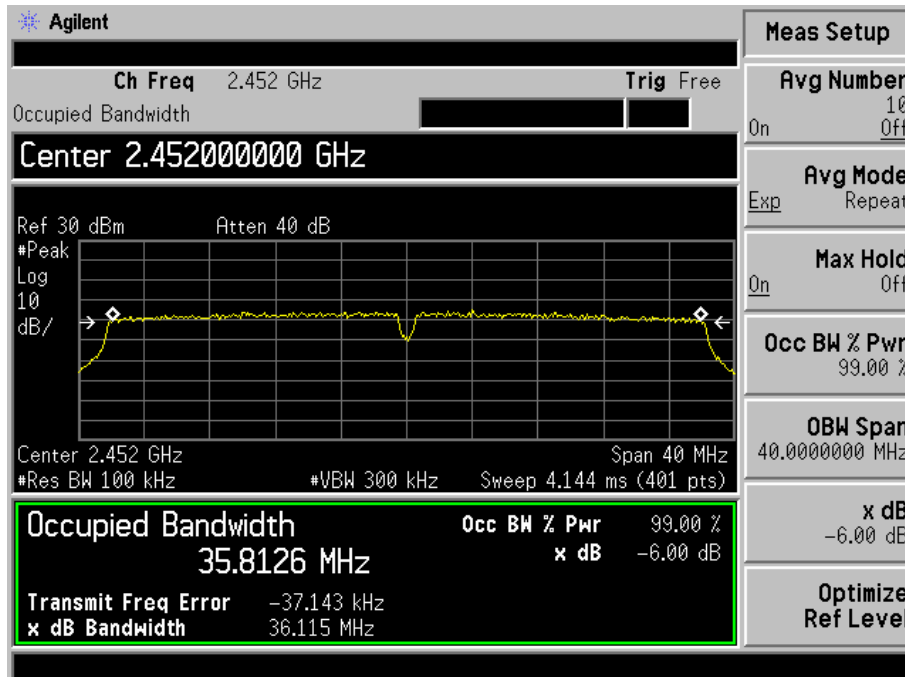

## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 D01 V03r03, 9.2.2.2 (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This gives bin-to-bin spacing  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar




#### 7.4 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	15.32	34.04	1000
	2437	15.72	37.33	1000
	2462	15.09	32.28	1000
802.11g_54Mbps	2412	11.38	13.74	1000
	2437	11.31	13.52	1000
	2462	10.69	11.72	1000
802.11n HT20_MCS7	2412	11.11	12.91	1000
	2437	10.65	11.61	1000
	2462	10.00	10.00	1000
802.11n HT40_MCS7	2422	10.12	10.28	1000
	2437	9.84	9.64	1000
	2452	9.49	8.89	1000

Please refer to the following test plots:


## 802.11b1Mbps-Low Channel

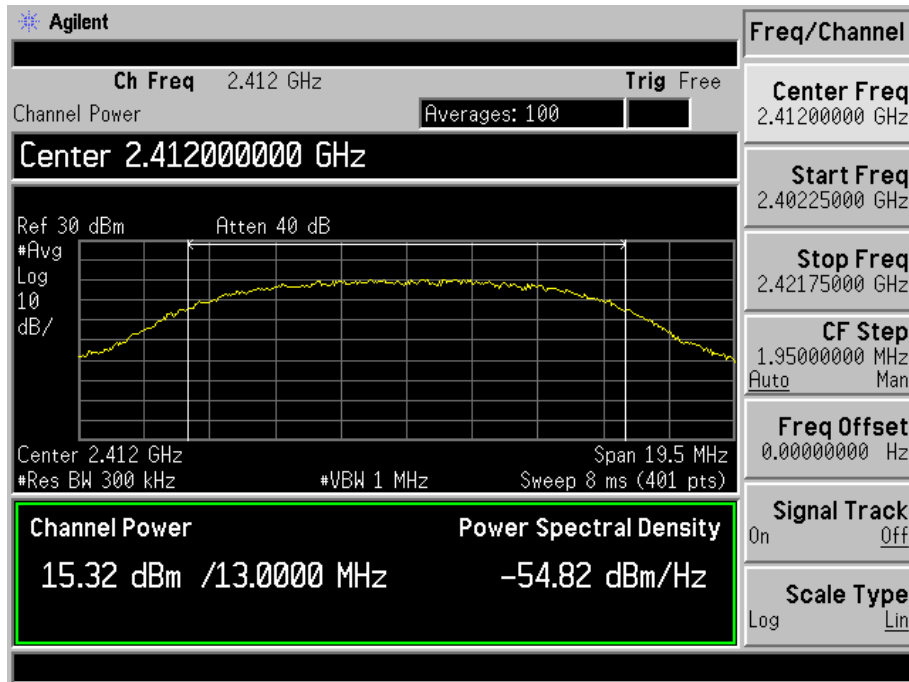


## 802.11b -11Mbps-Middle Channel

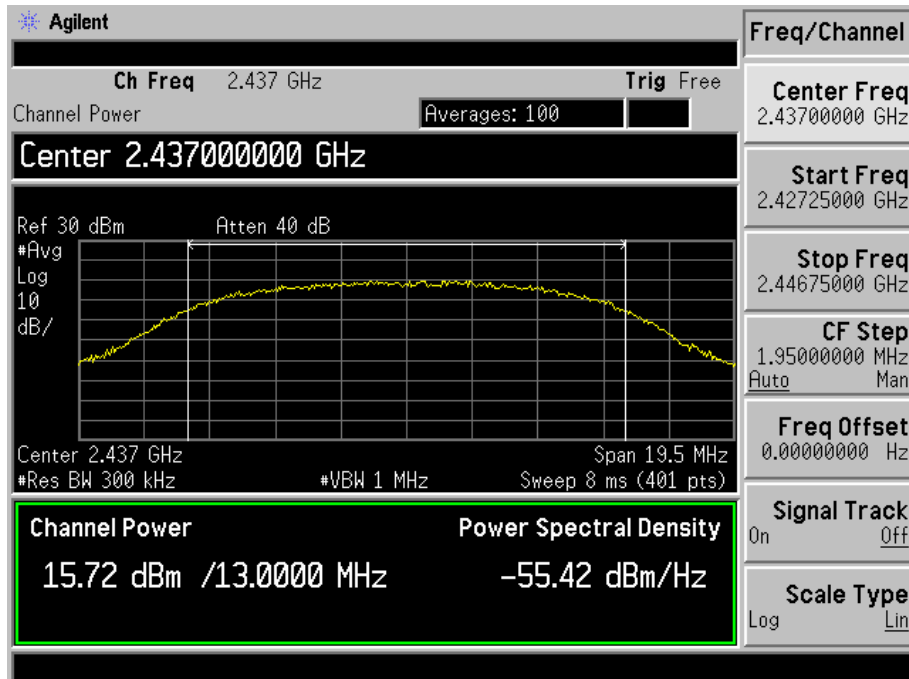


## 802.11b -11Mbps-High Channel

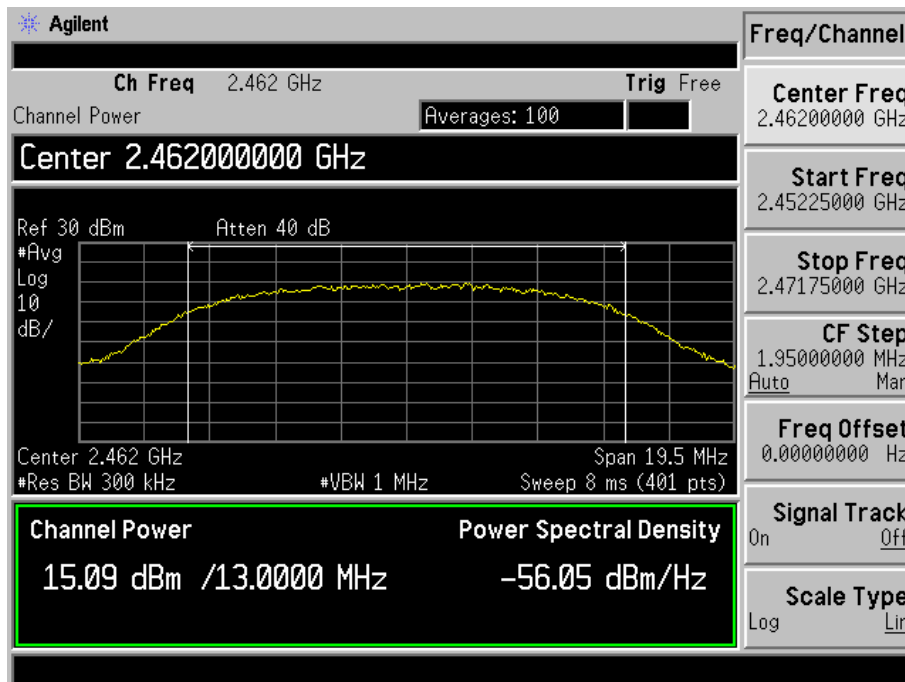


## 802.11g-54Mbps-Low Channel

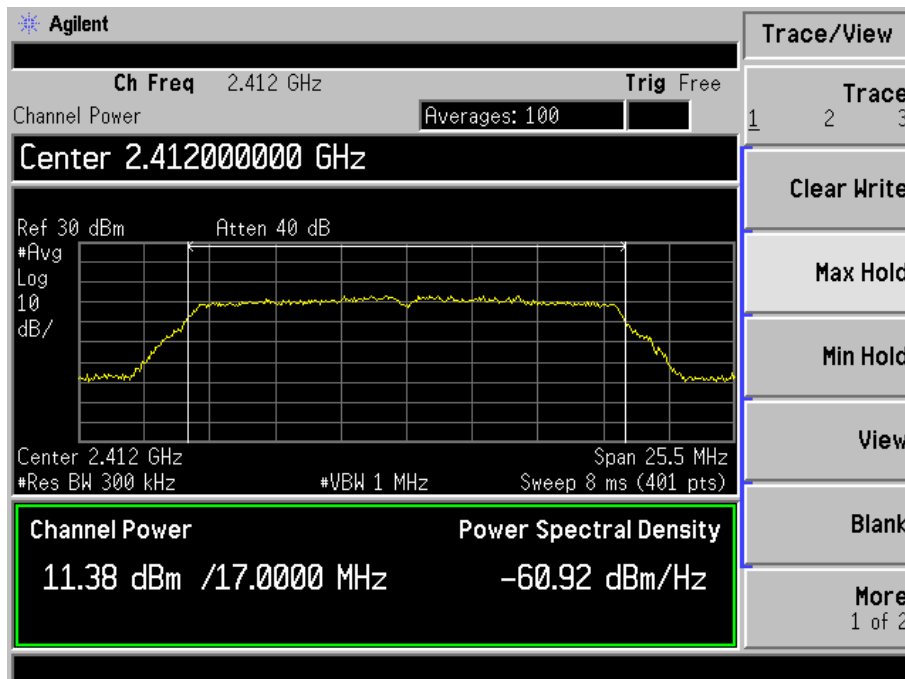


## 802.11g-54Mbps-Middle Channel

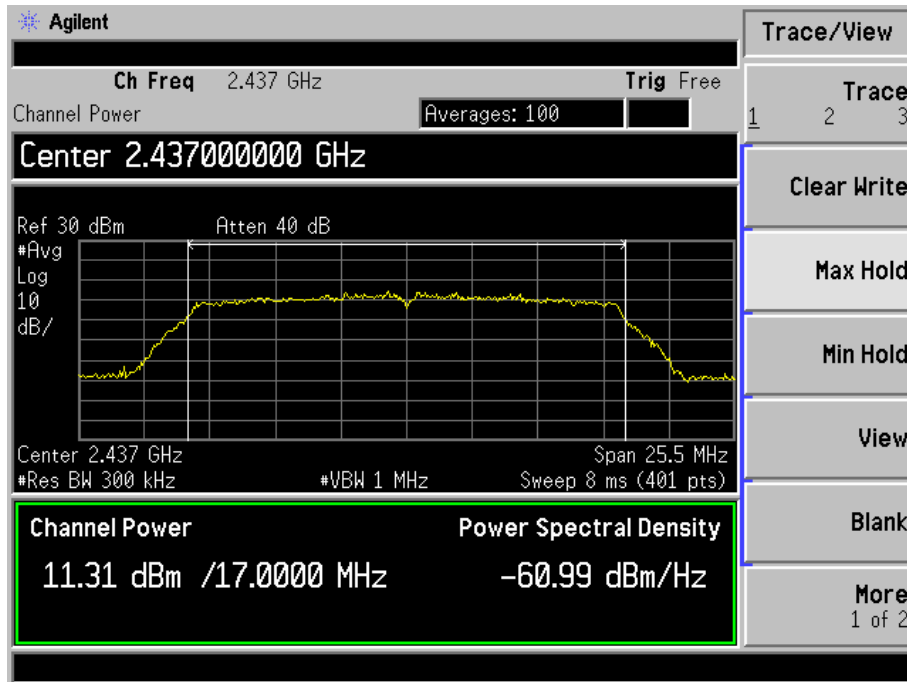


## 802.11g-54Mbps-High Channel

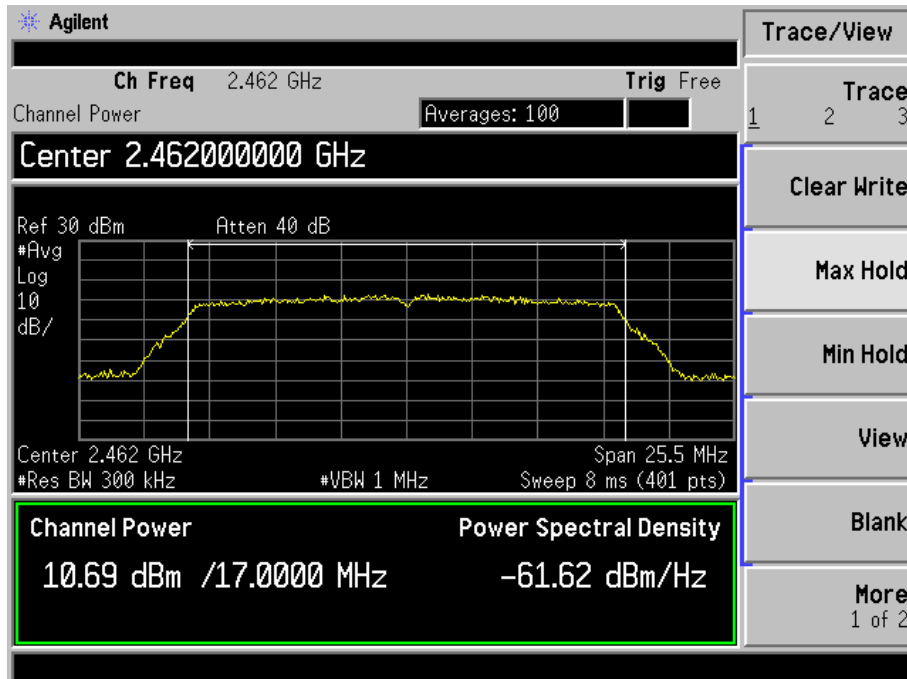


## 802.11n-HT20-MCS7-Low Channel

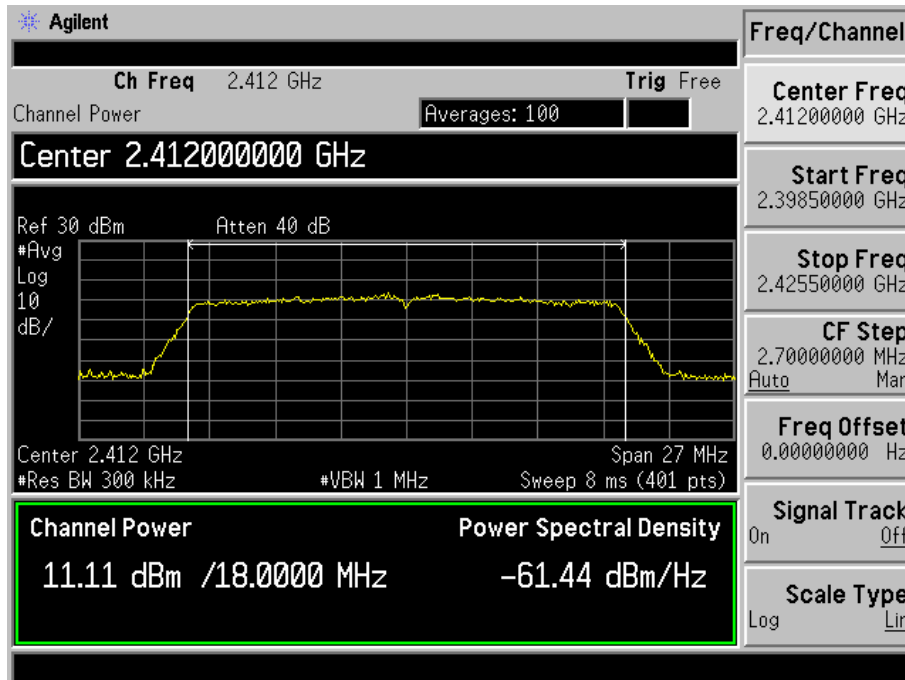


## 802.11n-HT20-MCS7-Middle Channel

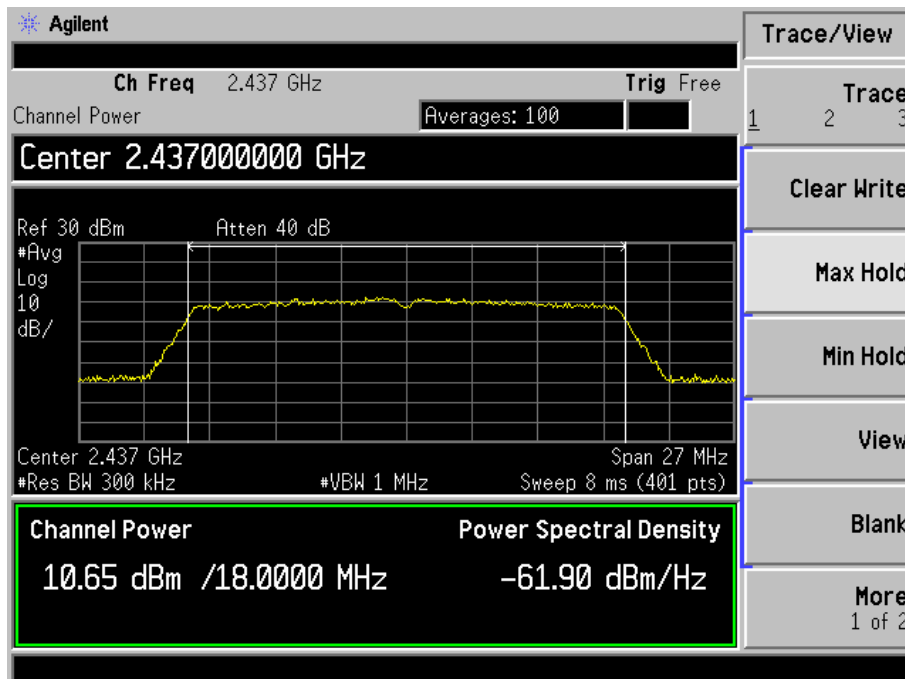


## 802.11n-HT20-MCS7-High Channel

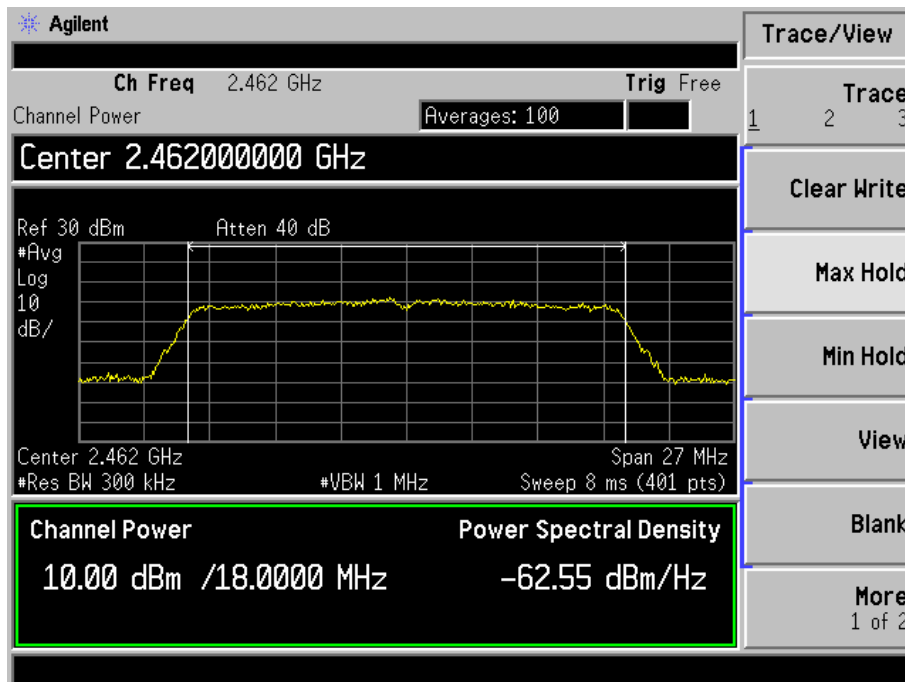


## 802.11n-HT40-MCS7-Low Channel

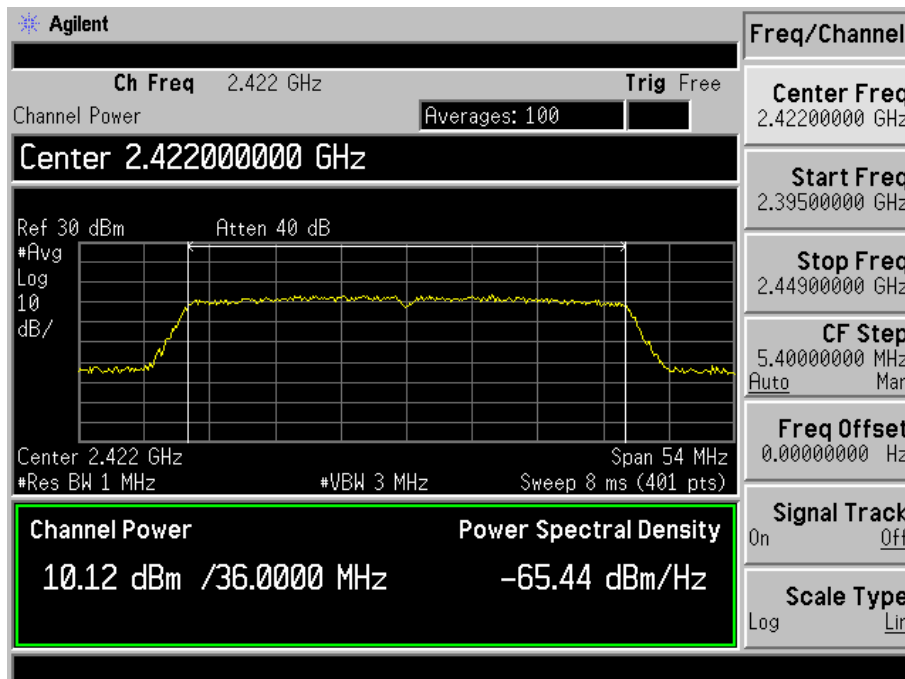

## 802.11n-HT40-MCS7-Middle Channel

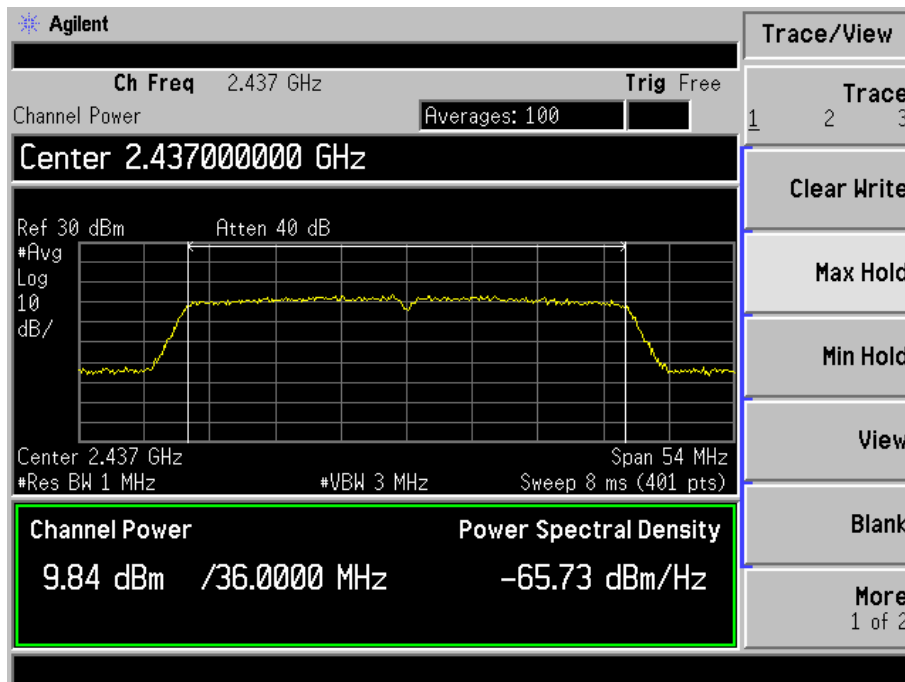

## 802.11n-HT40-MCS7-High Channel

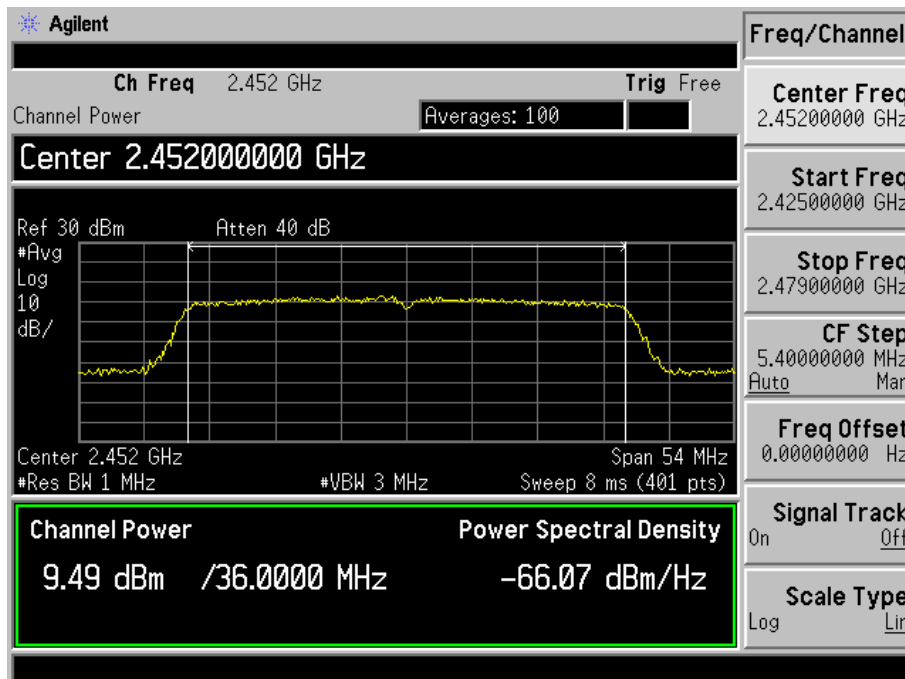

## 8. Field Strength of Spurious Emissions

---

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 8.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



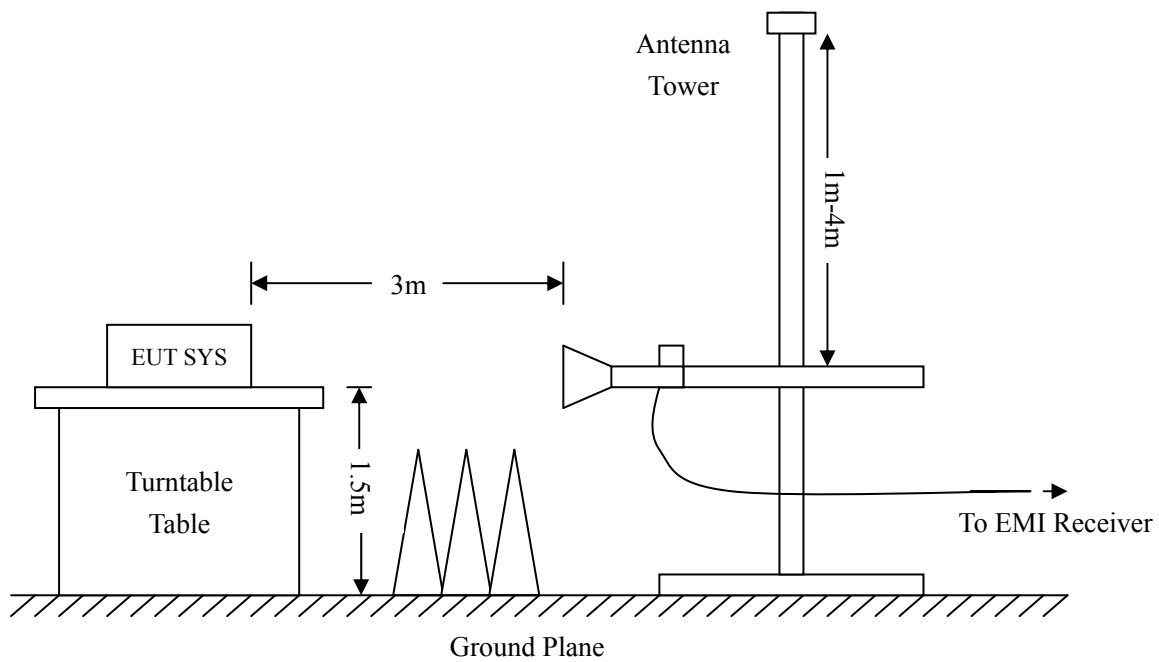

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

## 8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

## 8.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 8.6 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

### Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: IP VIDEO DOOR PHONE  
 Tested Model: 86211-PC  
 Operating Condition: 802.11b Transmitting Low Channel-2412MHz  
 Comment: Adapter DC12V

Test Specification: Horizontal

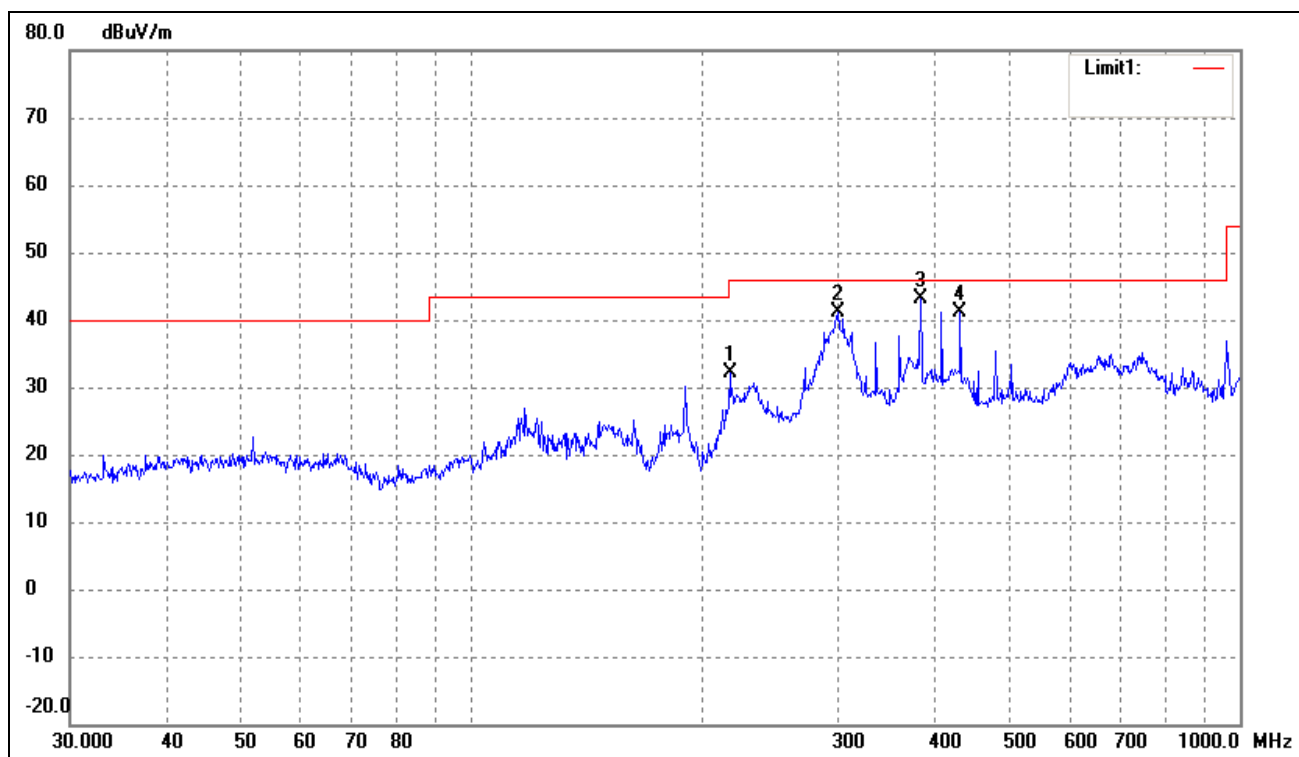

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	216.7828	24.71	7.40	32.11	46.00	-13.89	165	100	peak
2	300.3673	28.91	12.18	41.09	46.00	-4.91	214	100	peak
3	383.9318	30.81	12.38	43.19	46.00	-2.81	45	100	peak
4	432.5457	28.37	12.78	41.15	46.00	-4.85	310	100	peak

Test Specification: Vertical

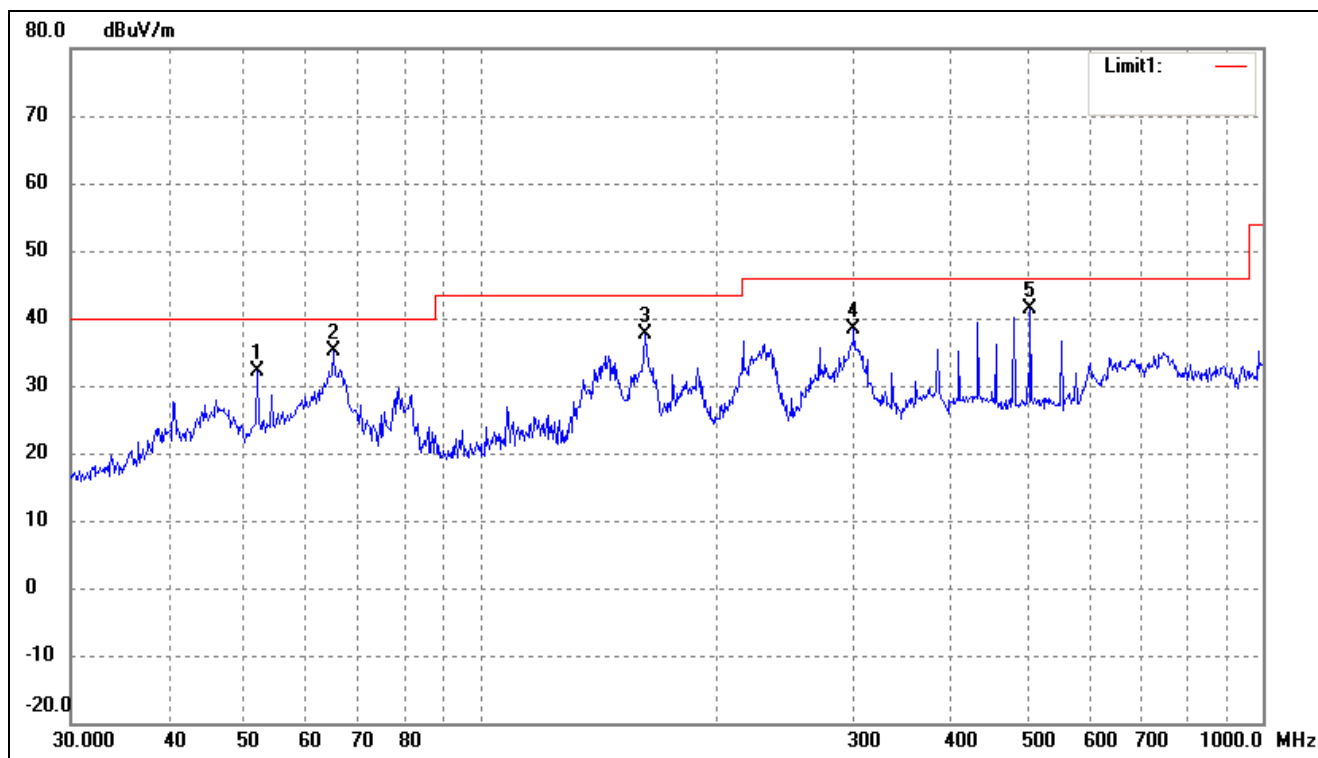


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	51.8430	26.86	5.29	32.15	40.00	-7.85	178	100	peak
2	64.8865	30.86	4.30	35.16	40.00	-4.84	201	100	peak
3	162.6106	35.00	2.63	37.63	43.50	-5.87	54	100	peak
4	300.3673	26.28	12.18	38.46	46.00	-7.54	126	100	peak
5	504.7062	27.36	13.98	41.34	46.00	-4.66	26	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: Adapter DC12V

Test Specification: Horizontal

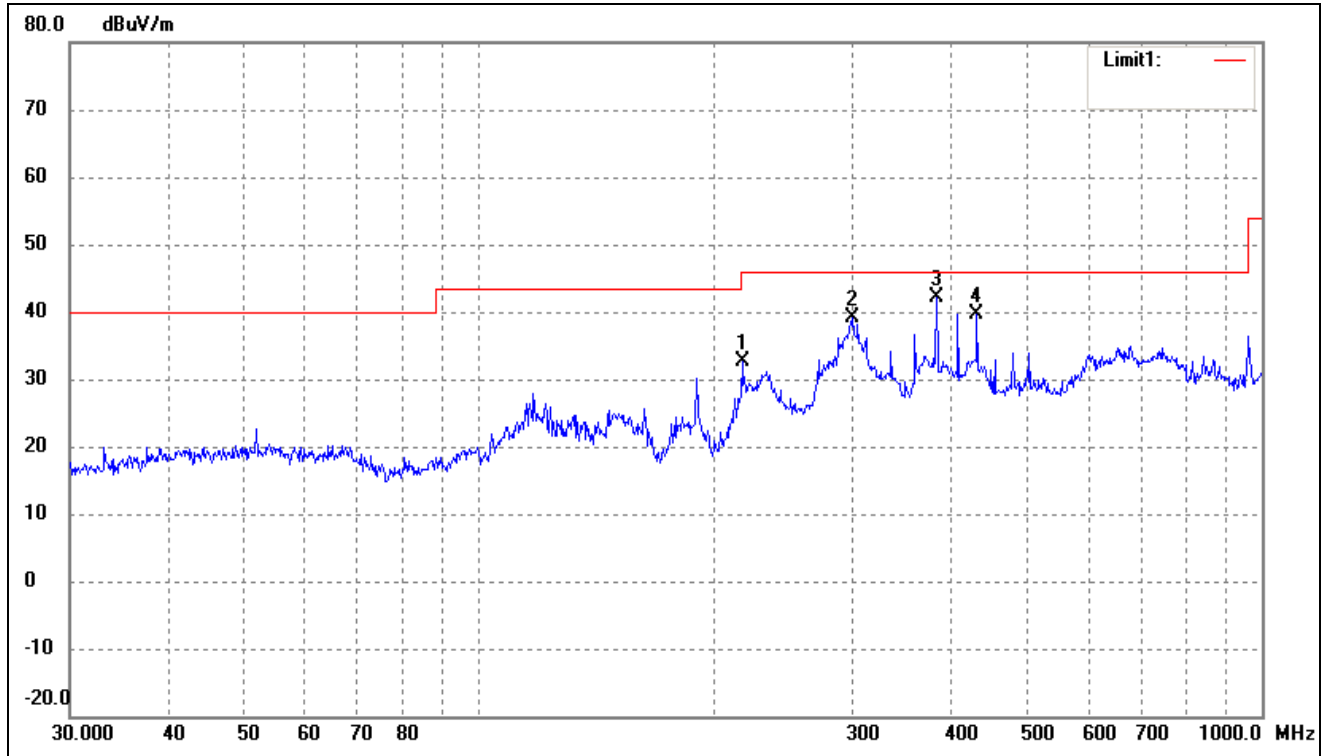

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	216.7828	25.21	7.40	32.61	46.00	-13.39	154	100	peak
2	300.3673	26.91	12.18	39.09	46.00	-6.91	21	100	peak
3	383.9318	29.81	12.38	42.19	46.00	-3.81	11	100	peak
4	432.5457	26.87	12.78	39.65	46.00	-6.35	251	100	peak

Test Specification: Vertical

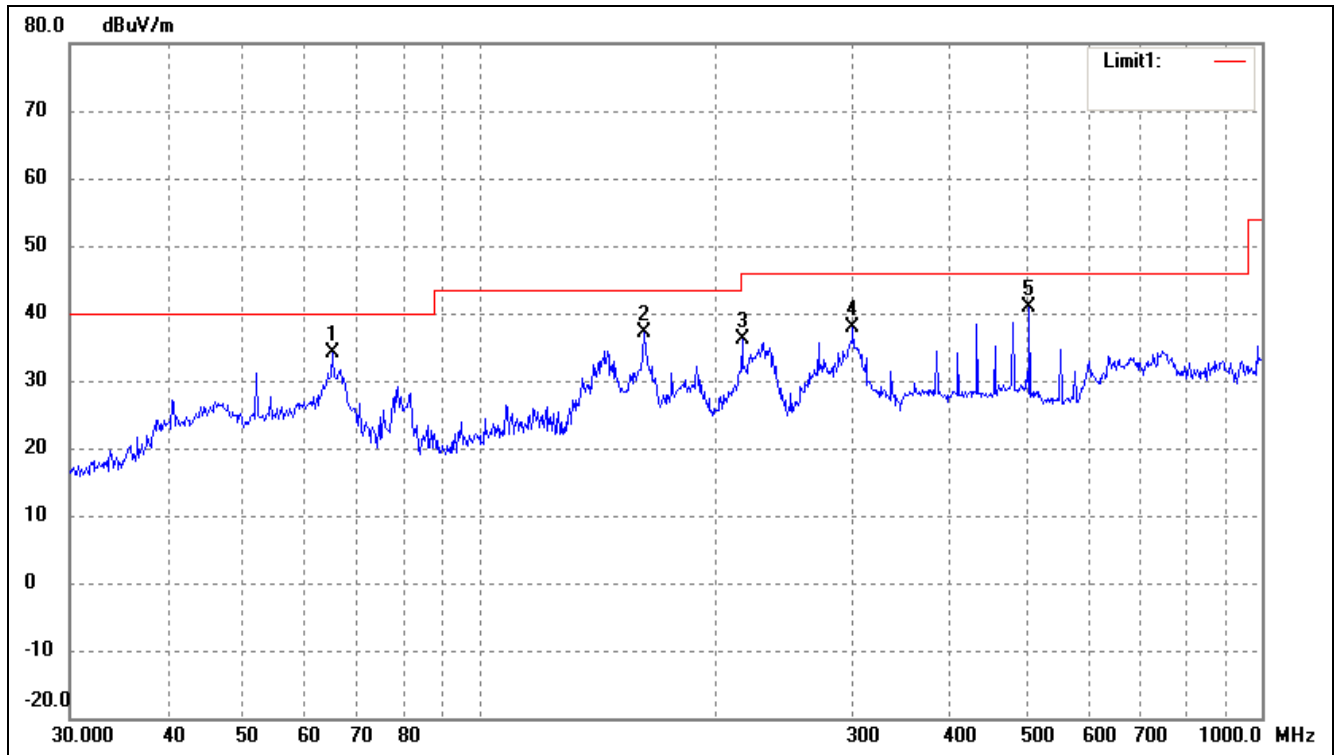


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	64.8865	29.86	4.30	34.16	40.00	178	256	100	peak
2	162.6106	34.50	2.63	37.13	43.50	52	121	100	peak
3	216.7828	28.77	7.40	36.17	46.00	165	211	100	peak
4	300.3673	25.78	12.18	37.96	46.00	201	321	100	peak
5	504.7062	26.86	13.98	40.84	46.00	12	21	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: Adapter DC12V

Test Specification: Horizontal

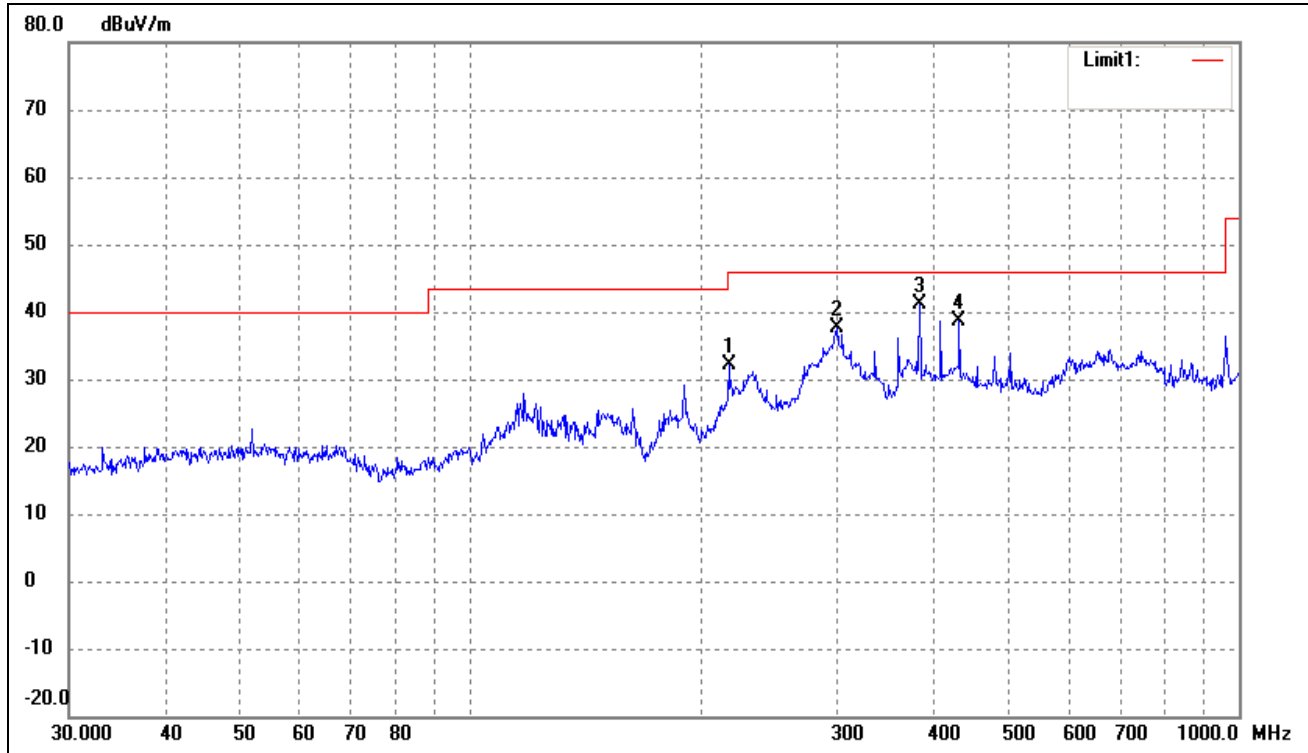

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	216.7828	24.71	7.40	32.11	46.00	-13.89	165	100	peak
2	300.3673	25.41	12.18	37.59	46.00	-8.41	252	100	peak
3	383.9318	28.81	12.38	41.19	46.00	-4.81	315	100	peak
4	432.5457	25.87	12.78	38.65	46.00	-7.35	154	100	peak

Test Specification: Vertical

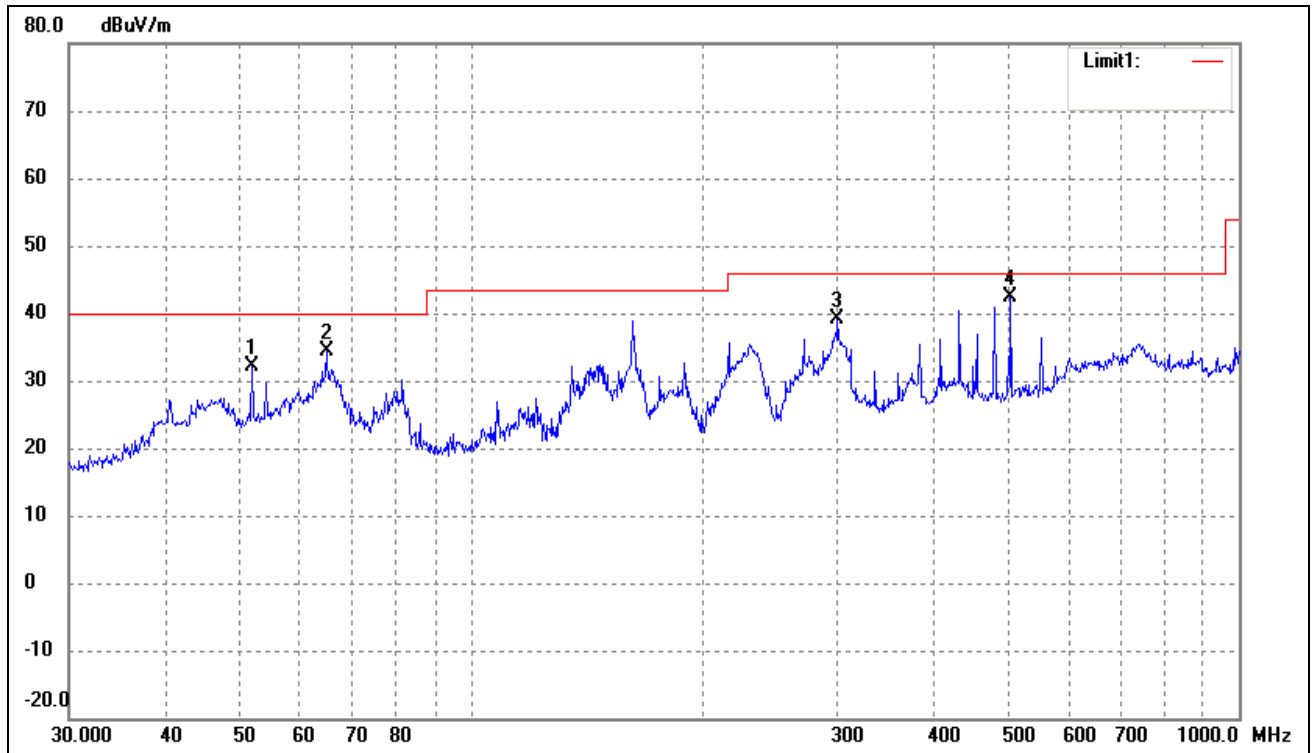


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	51.8430	26.74	5.29	32.03	40.00	-7.97	325	100	peak
2	64.8865	30.10	4.30	34.40	40.00	-5.60	265	100	peak
3	300.3673	26.90	12.18	39.08	46.00	-6.92	112	100	peak
4	504.7062	28.38	13.98	42.36	46.00	-3.64	312	100	peak



### Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: IP VIDEO DOOR PHONE  
 Tested Model: 86211-PC  
 Operating Condition: 802.11g Transmitting Low Channel-2412MHz  
 Comment: Adapter DC12V

Test Specification: Horizontal

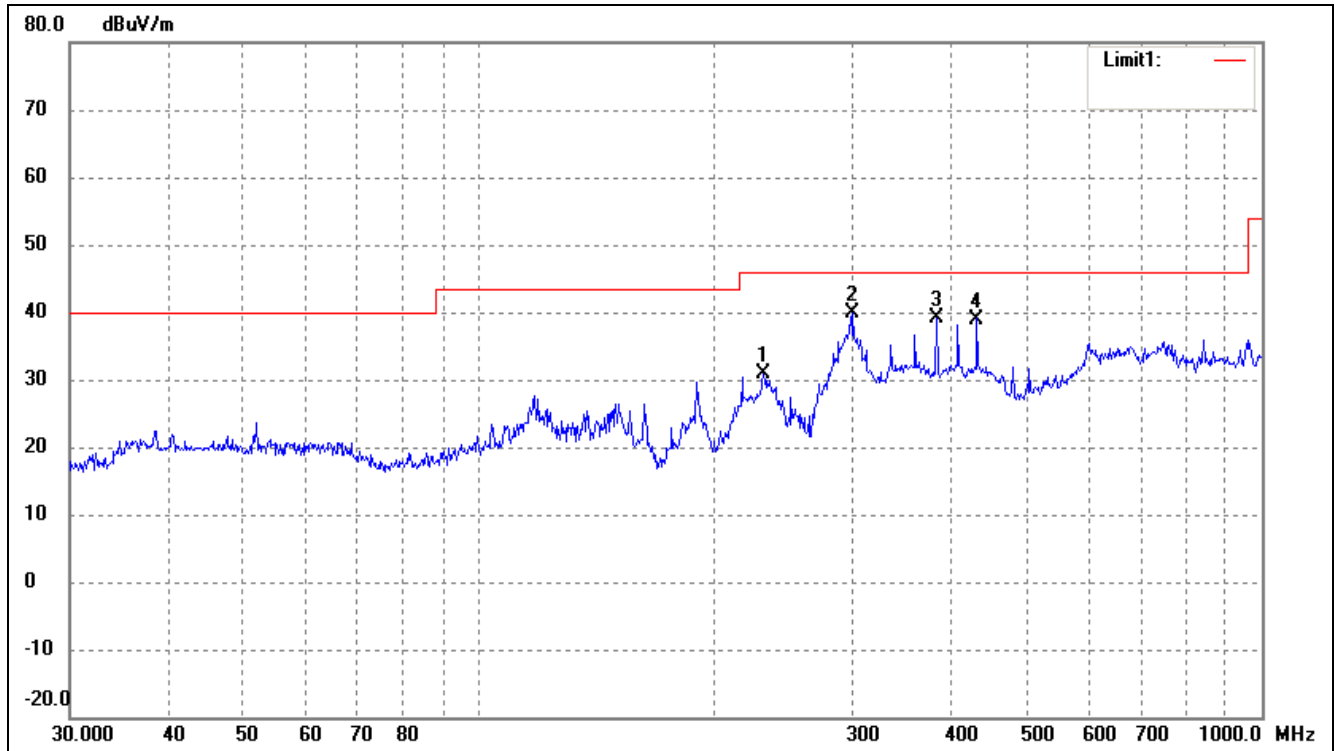

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	230.9068	22.00	8.77	30.77	46.00	-15.23	165	100	peak
2	300.3673	27.71	12.18	39.89	46.00	-6.11	121	100	peak
3	383.9318	26.75	12.38	39.13	46.00	-6.87	39	100	peak
4	432.5457	26.22	12.78	39.00	46.00	-7.00	110	100	peak

Test Specification: Vertical

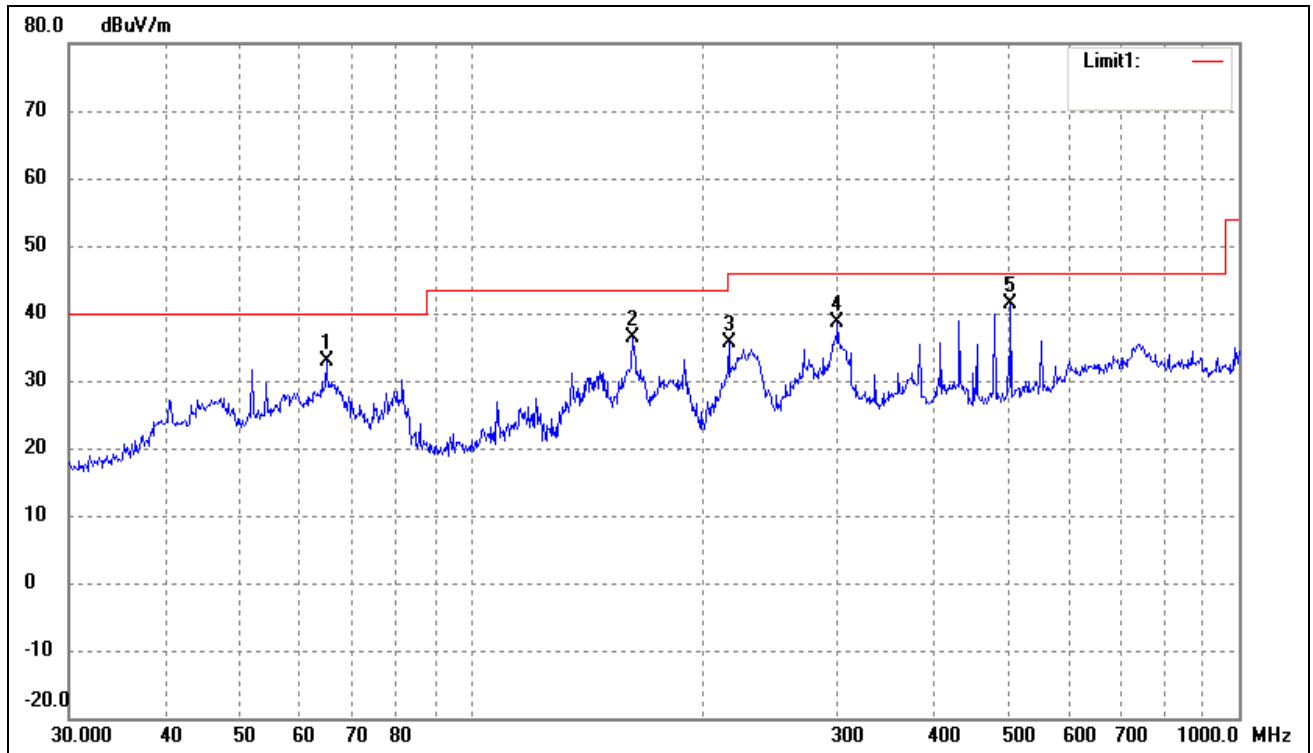


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	64.8865	28.60	4.30	32.90	40.00	-7.10	174	100	peak
2	162.6106	33.85	2.63	36.48	43.50	-7.02	111	100	peak
3	216.7828	28.26	7.40	35.66	46.00	-10.34	21	100	peak
4	300.3673	26.40	12.18	38.58	46.00	-7.42	65	100	peak
5	504.7062	27.38	13.98	41.36	46.00	-4.64	121	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz


Comment: Adapter DC12V

Test Specification: Horizontal

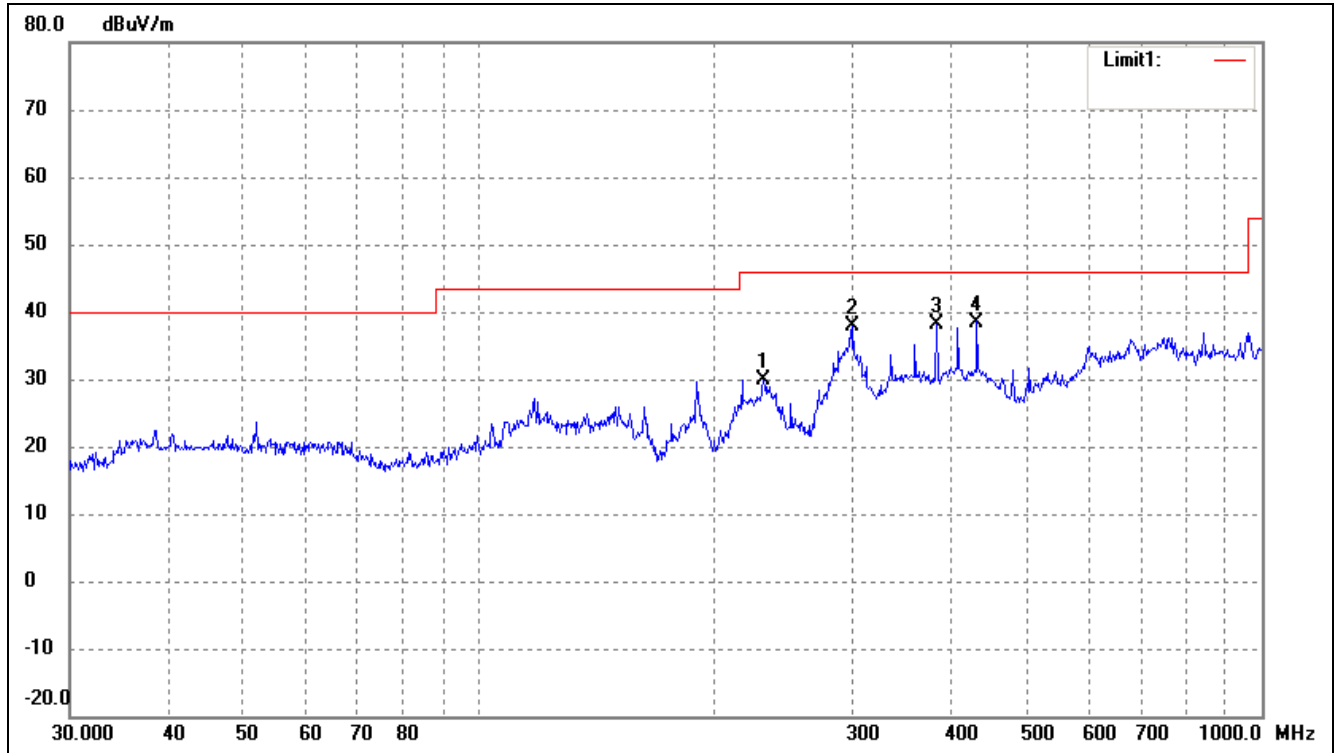

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	230.9068	21.00	8.77	29.77	46.00	-16.23	270	100	peak
2	300.3673	25.71	12.18	37.89	46.00	-8.11	164	100	peak
3	383.9318	25.75	12.38	38.13	46.00	-7.87	228	200	peak
4	432.5457	25.72	12.78	38.50	46.00	-7.50	130	200	peak

Test Specification: Vertical

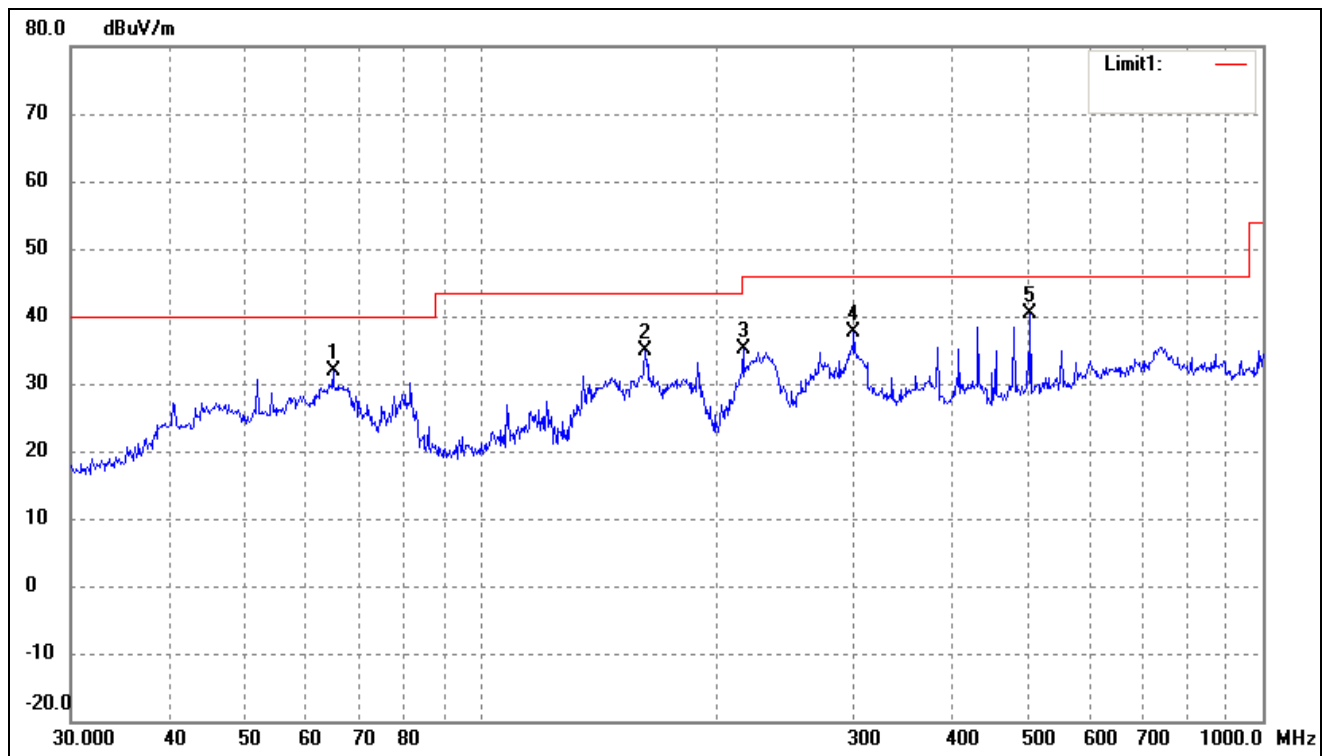


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	64.8865	27.60	4.30	31.90	40.00	-8.10	18	100	peak
2	162.6106	32.35	2.63	34.98	43.50	-8.52	214	100	peak
3	216.7828	27.76	7.40	35.16	46.00	-10.84	65	100	peak
4	300.3673	25.40	12.18	37.58	46.00	-8.42	120	100	peak
4	504.7062	26.38	13.98	40.36	46.00	-5.64	11	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: Adapter DC12V

Test Specification: Horizontal

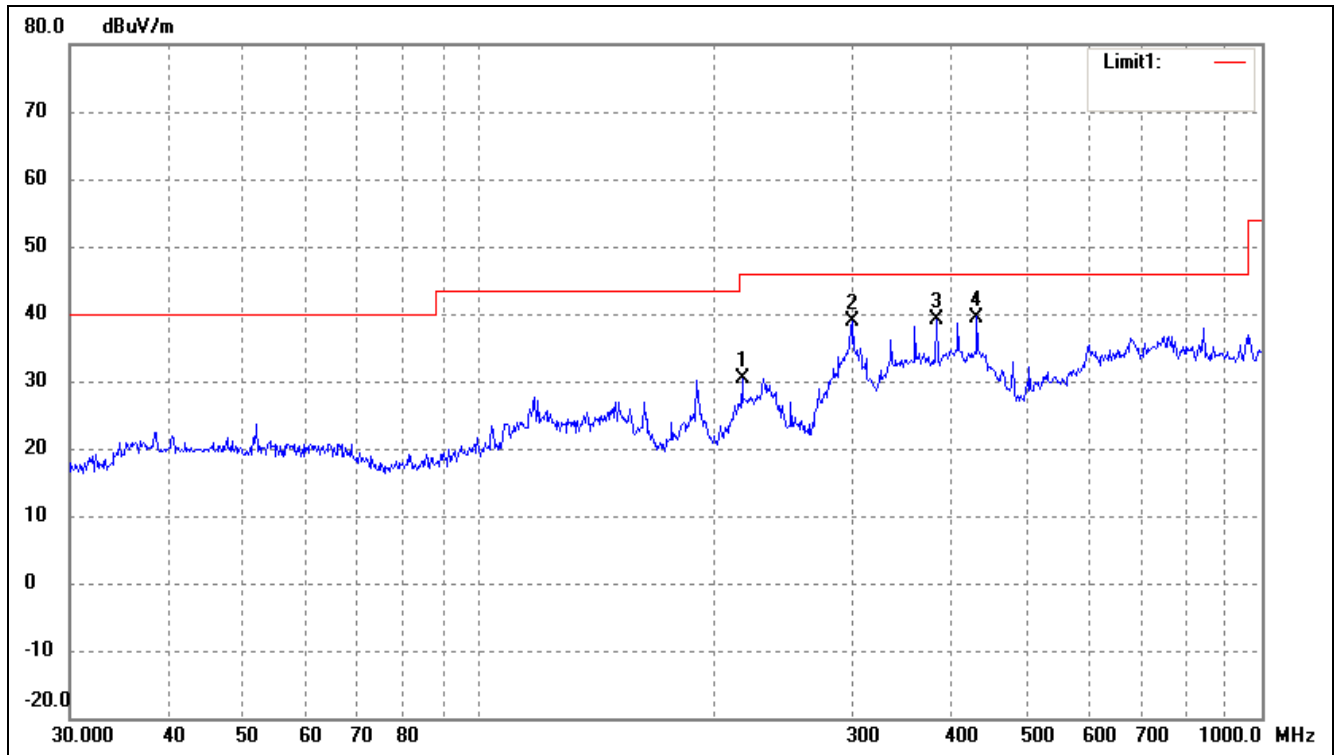

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	216.7828	23.02	7.40	30.42	46.00	-15.58	154	100	peak
2	300.3673	26.71	12.18	38.89	46.00	-7.11	51	100	peak
3	383.9318	26.75	12.38	39.13	46.00	-6.87	320	100	peak
4	432.5457	26.72	12.78	39.50	46.00	-6.50	315	100	peak

Test Specification: Vertical

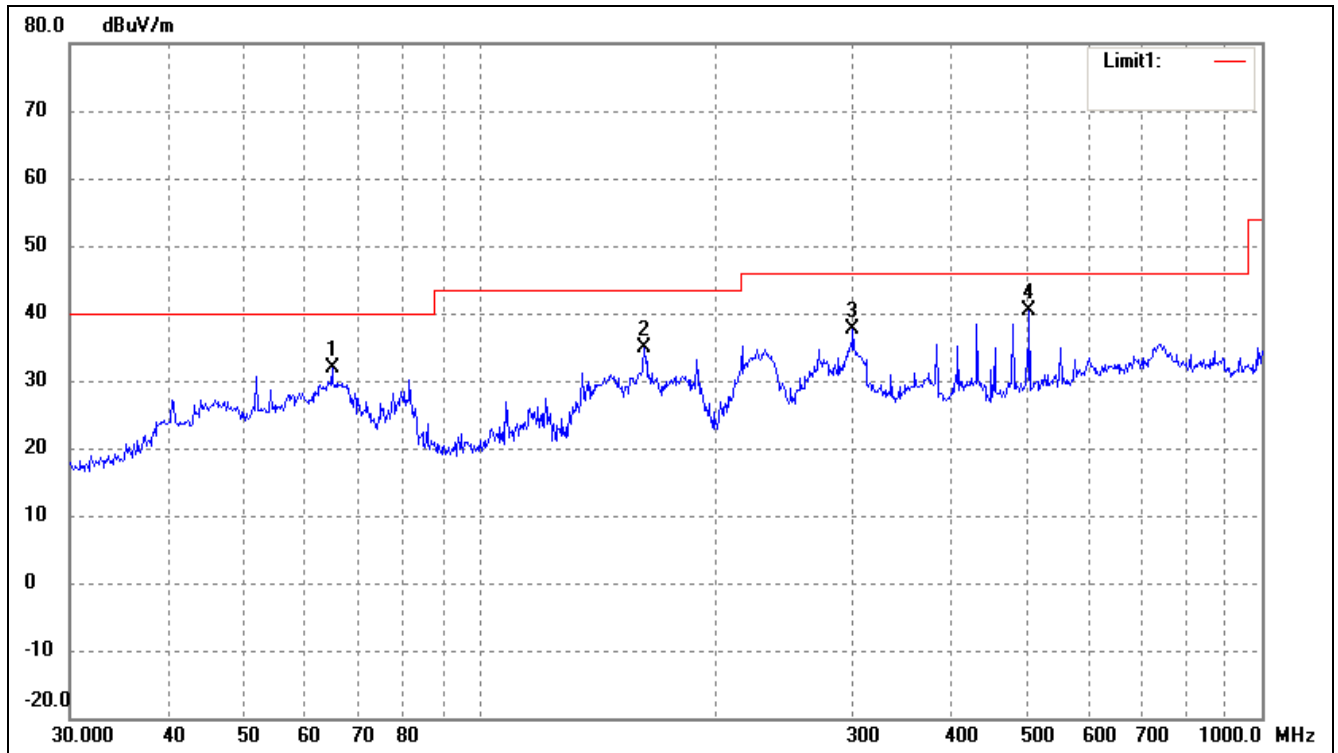


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	64.8865	27.60	4.30	31.90	40.00	-8.10	315	100	peak
2	162.6106	32.35	2.63	34.98	43.50	-8.52	181	100	peak
3	300.3673	25.40	12.18	37.58	46.00	-8.42	254	100	peak
4	504.7062	26.38	13.98	40.36	46.00	-5.64	164	100	peak

### Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: IP VIDEO DOOR PHONE  
Tested Model: 86211-PC  
Operating Condition: 802.11n-HT20 Transmitting Low Channel-2412MHz  
Comment: Adapter DC12V

Test Specification: Horizontal

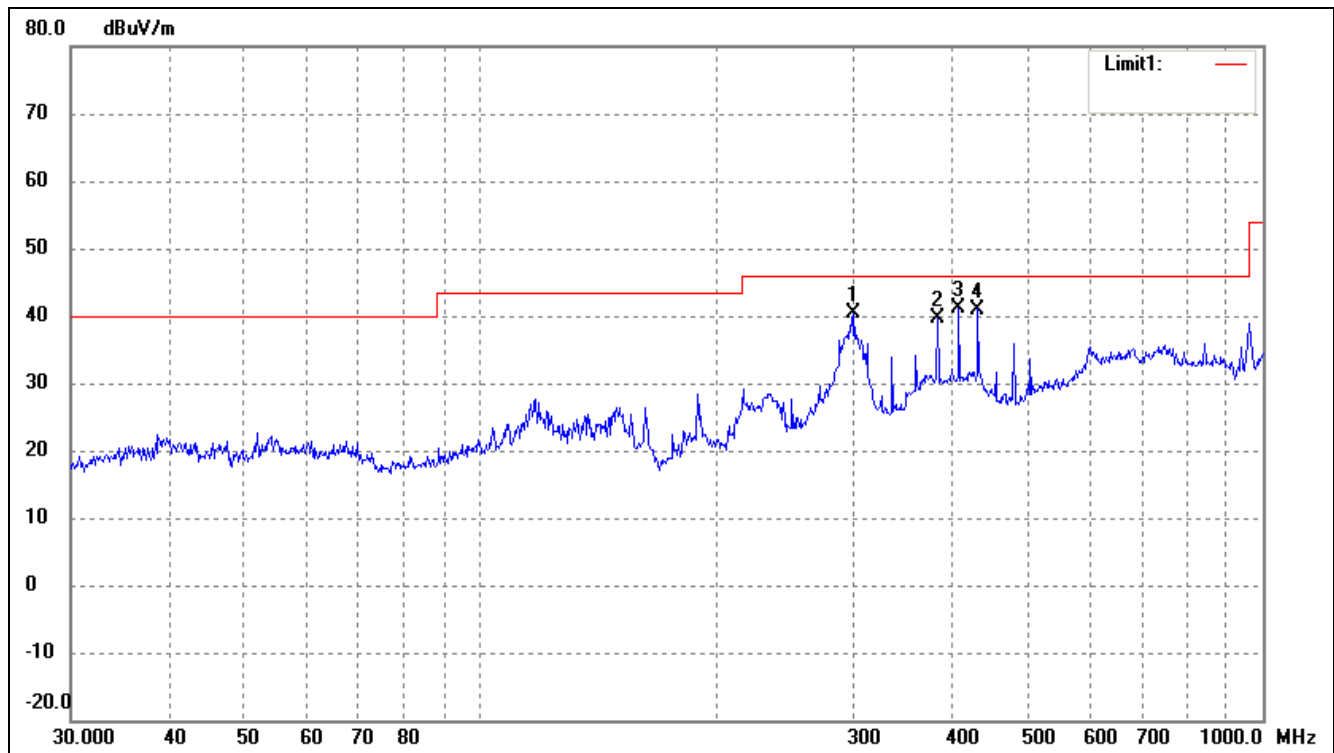

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	300.3673	28.21	12.18	40.39	46.00	-5.61	256	100	peak
2	383.9318	27.25	12.38	39.63	46.00	-6.37	256	100	peak
3	408.9460	28.25	12.80	41.05	46.00	-4.95	21	100	peak
4	432.5457	28.22	12.78	41.00	46.00	-5.00	226	100	peak

Test Specification: Vertical

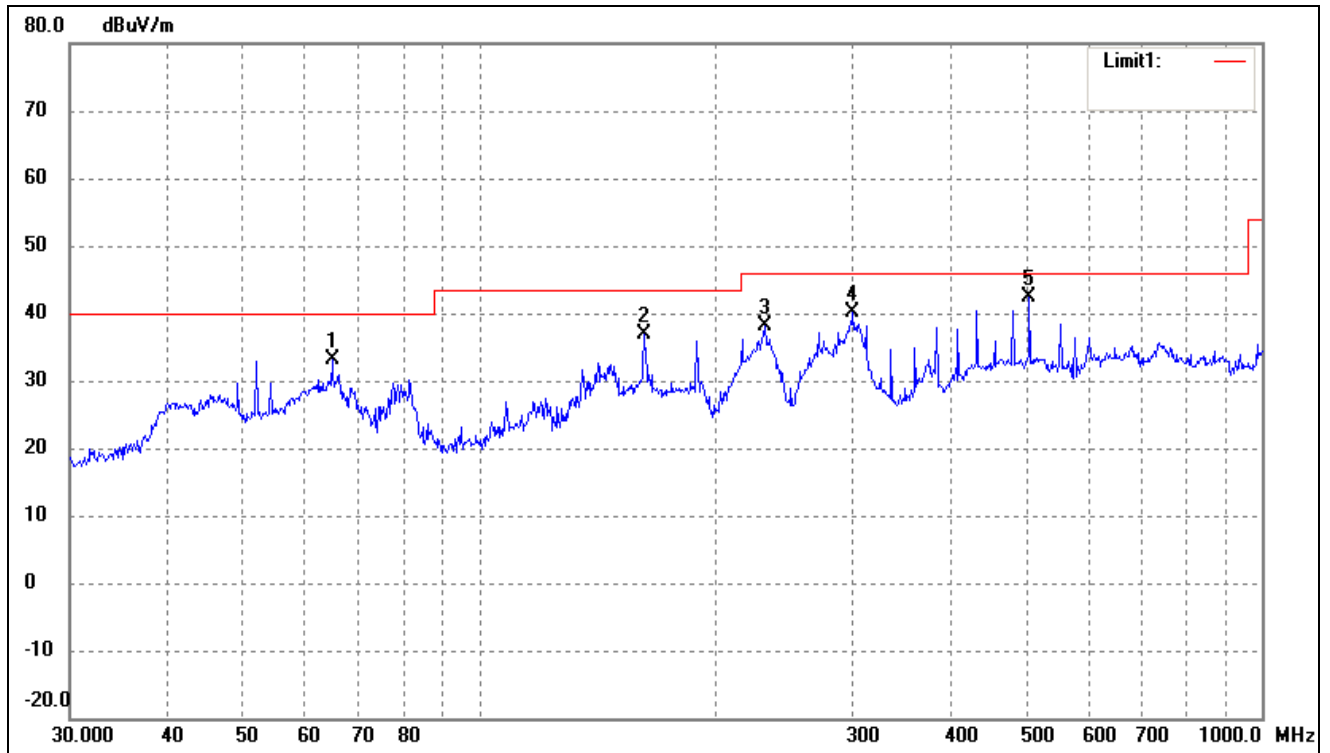


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	64.8865	28.77	4.30	33.07	40.00	-6.93	16	100	peak
2	162.6106	34.35	2.63	36.98	43.50	-6.52	117	100	peak
3	231.7179	29.35	8.82	38.17	46.00	-7.83	350	100	peak
4	300.3673	27.93	12.18	40.11	46.00	-5.89	299	100	peak
5	504.7062	28.38	13.98	42.36	46.00	-3.64	112	100	peak



Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment: Adapter DC12V

Test Specification: Horizontal

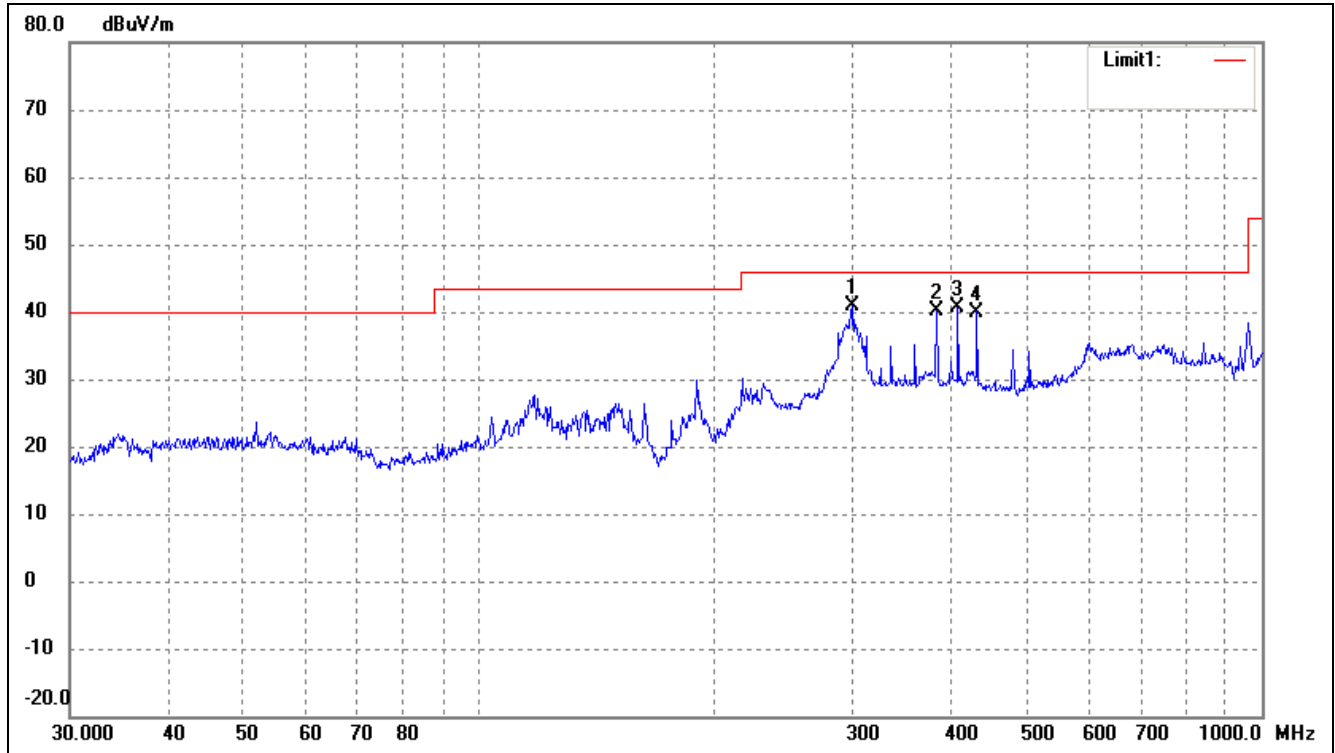

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	300.3673	28.71	12.18	40.89	46.00	-5.11	154	100	peak
2	383.9318	27.75	12.38	40.13	46.00	-5.87	111	100	peak
3	408.9460	27.76	12.80	40.56	46.00	-5.44	88	100	peak
4	432.5457	27.22	12.78	40.00	46.00	-6.00	126	100	peak

Test Specification: Vertical

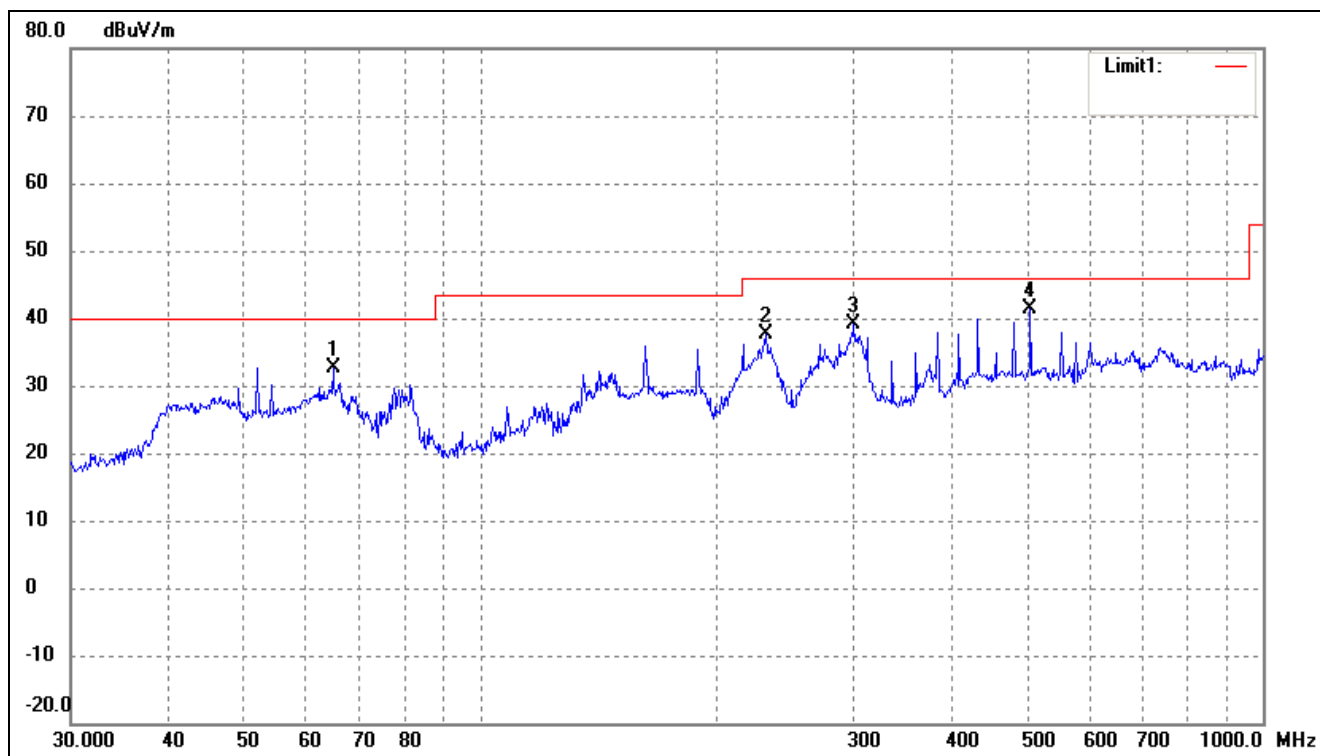


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	64.8865	28.27	4.30	32.57	40.00	-7.43	164	100	peak
2	231.7179	28.85	8.82	37.67	46.00	-8.33	112	100	peak
3	300.3673	26.93	12.18	39.11	46.00	-6.89	136	100	peak
4	504.7062	27.38	13.98	41.36	46.00	-4.64	98	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz


Comment: Adapter DC12V

Test Specification: Horizontal

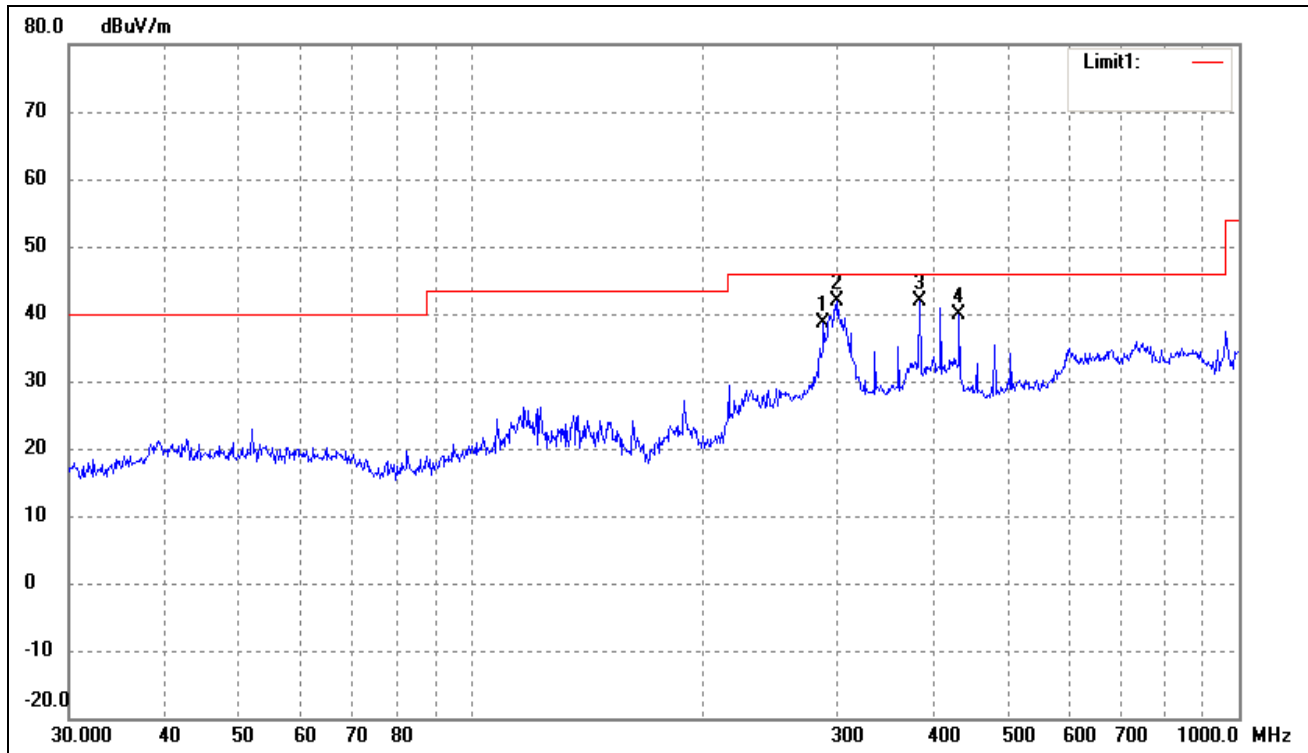

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	287.9904	26.98	11.71	38.69	46.00	-7.31	125	100	peak
2	300.3673	29.75	12.18	41.93	46.00	-4.07	19	100	peak
3	383.9318	29.48	12.38	41.86	46.00	-4.14	110	100	peak
4	432.5457	27.22	12.78	40.00	46.00	-6.00	250	100	peak


Test Specification: Vertical

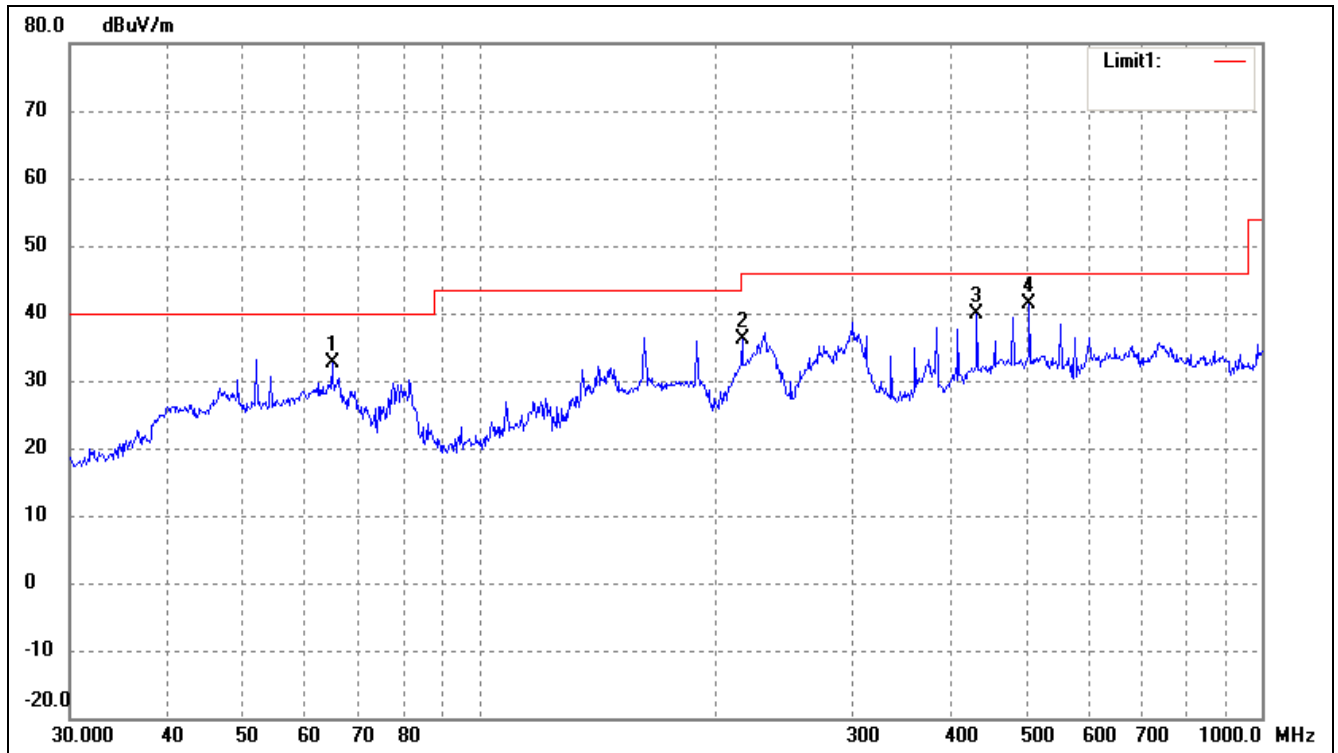

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	64.8865	28.27	4.30	32.57	40.00	-7.43	145	100	peak
2	216.7828	28.76	7.40	36.16	46.00	-9.84	15	100	peak
3	432.5457	27.11	12.78	39.89	46.00	-6.11	230	100	peak
4	504.7062	27.38	13.98	41.36	46.00	-4.64	258	100	peak


EUT: IP VIDEO DOOR PHONE  
 Tested Model: 86211-PC  
 Operating Condition: 802.11n-HT40 Transmitting Low Channel-2422MHz  
 Comment: Adapter DC12V

Test Specification: Horizontal

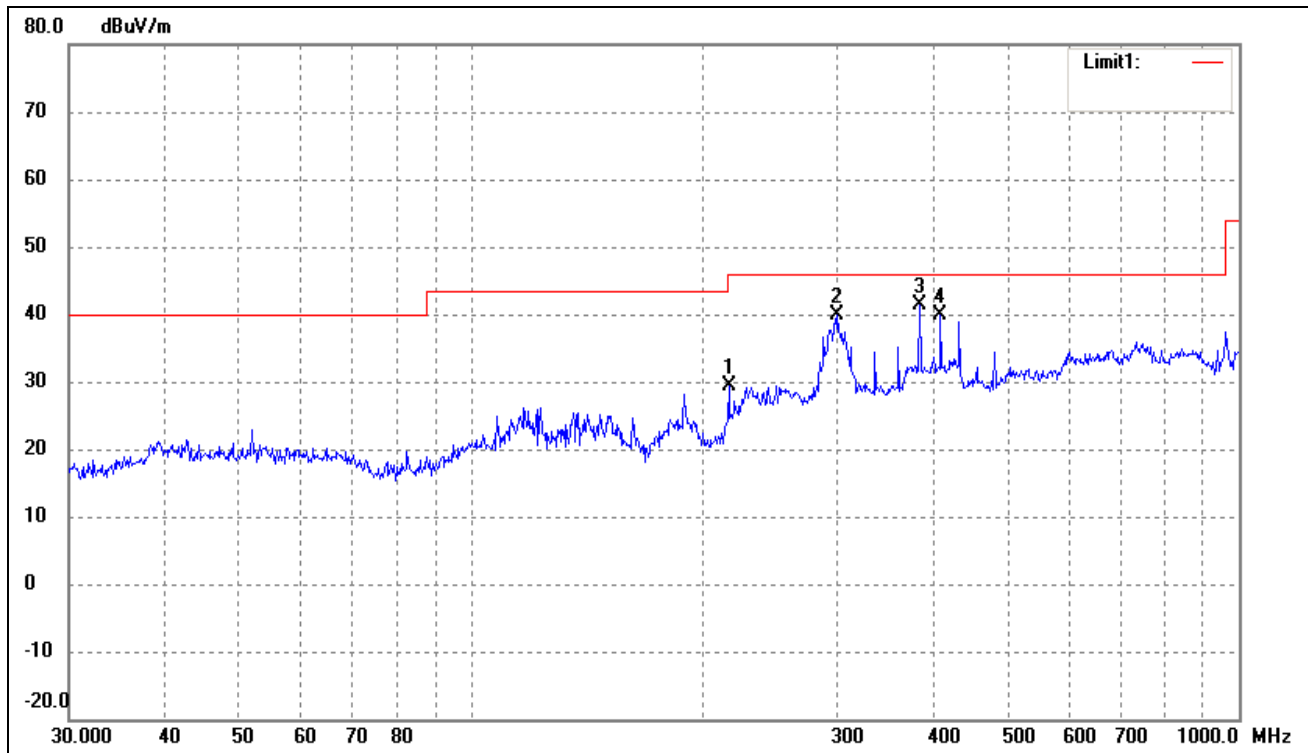

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	216.7828	21.92	7.40	29.32	46.00	-16.68	154	100	peak
2	300.3673	27.75	12.18	39.93	46.00	-6.07	1165	100	peak
3	383.9318	28.98	12.38	41.36	46.00	-4.64	135	100	peak
4	408.9460	27.00	12.80	39.80	46.00	-6.20	281	100	peak

Test Specification: Vertical

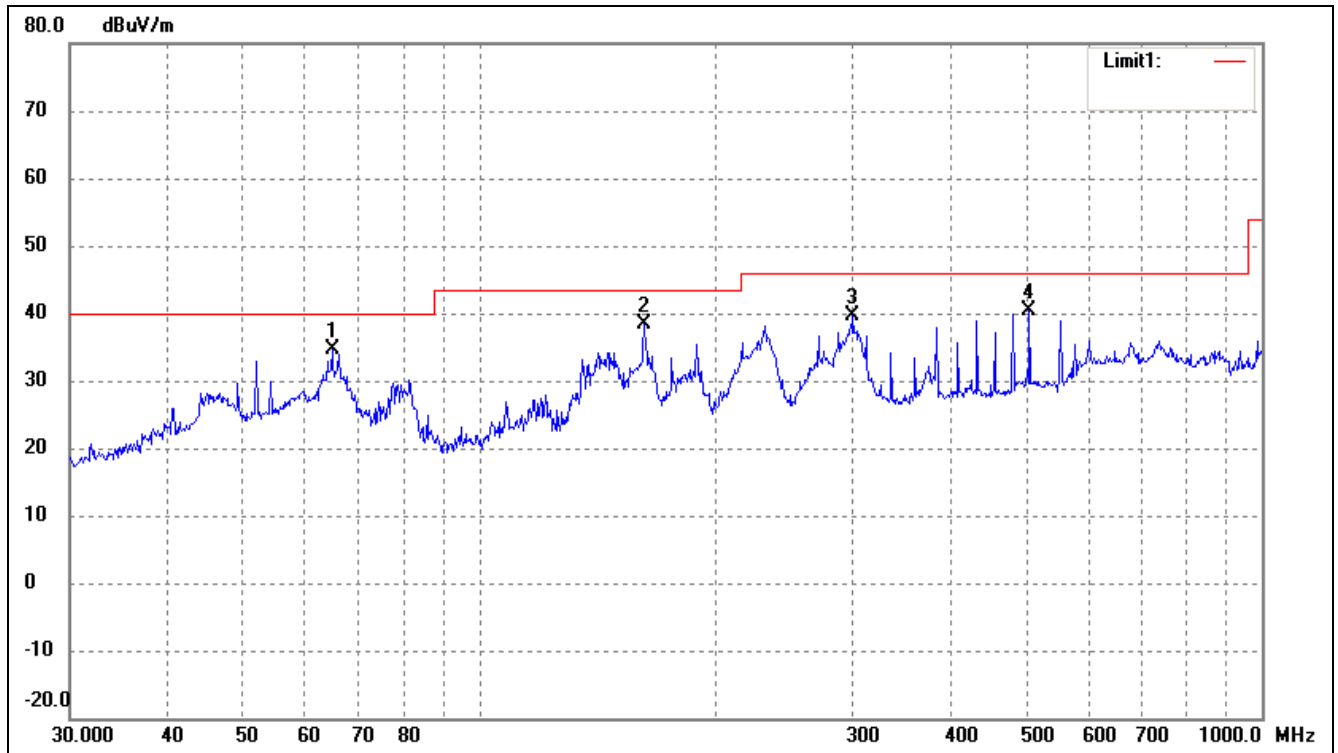


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	64.8865	30.27	4.30	34.57	40.00	-5.43	156	100	peak
2	162.6106	35.85	2.63	38.48	43.50	-5.02	158	100	peak
3	300.3673	27.51	12.18	39.69	46.00	-6.31	244	100	peak
4	504.7062	26.38	13.98	40.36	46.00	-5.64	176	100	peak

Operating Condition: 802.11n-HT40 Transmitting Middle Channel-2437MHz


Comment: Adapter DC12V

Test Specification: Horizontal

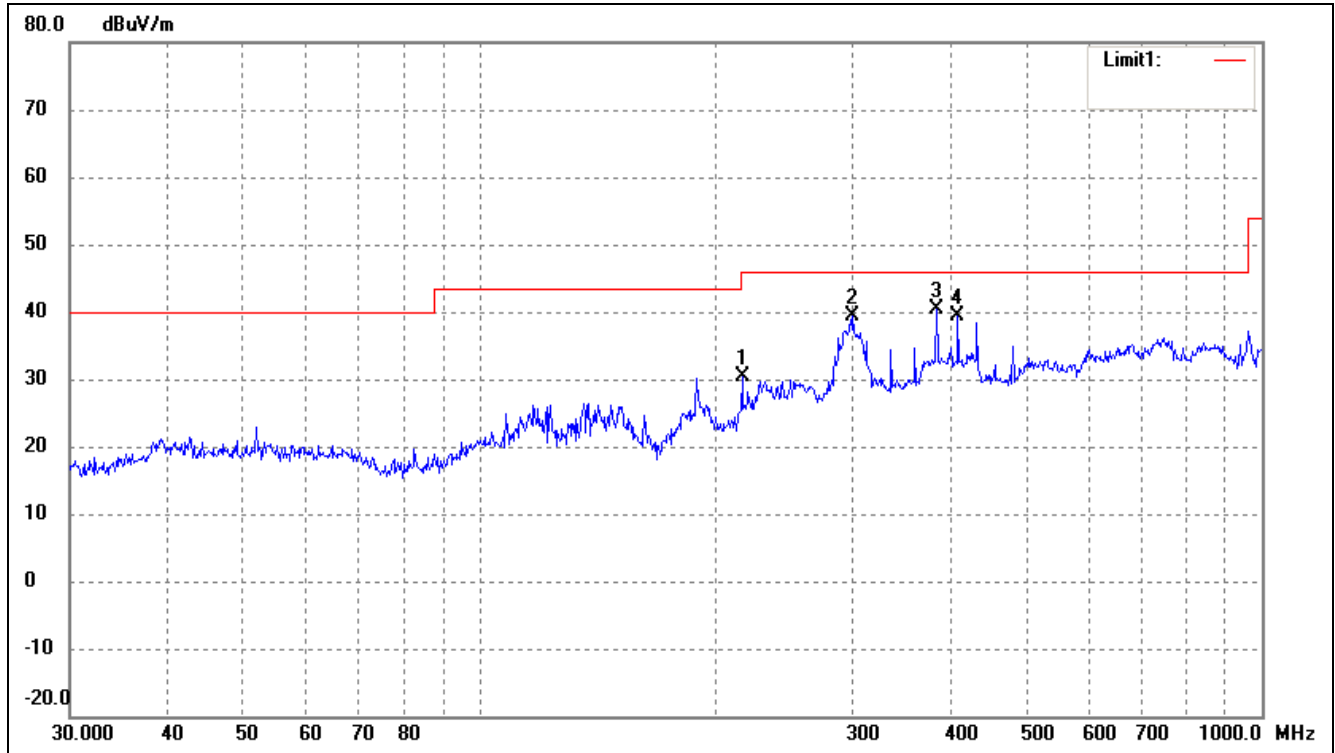

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	216.7828	22.92	7.40	30.32	46.00	-15.68	215	100	peak
2	300.3673	27.25	12.18	39.43	46.00	-6.57	65	100	peak
3	383.9318	27.98	12.38	40.36	46.00	-5.64	141	100	peak
4	408.9460	26.50	12.80	39.30	46.00	-6.70	126	100	peak

Test Specification: Vertical

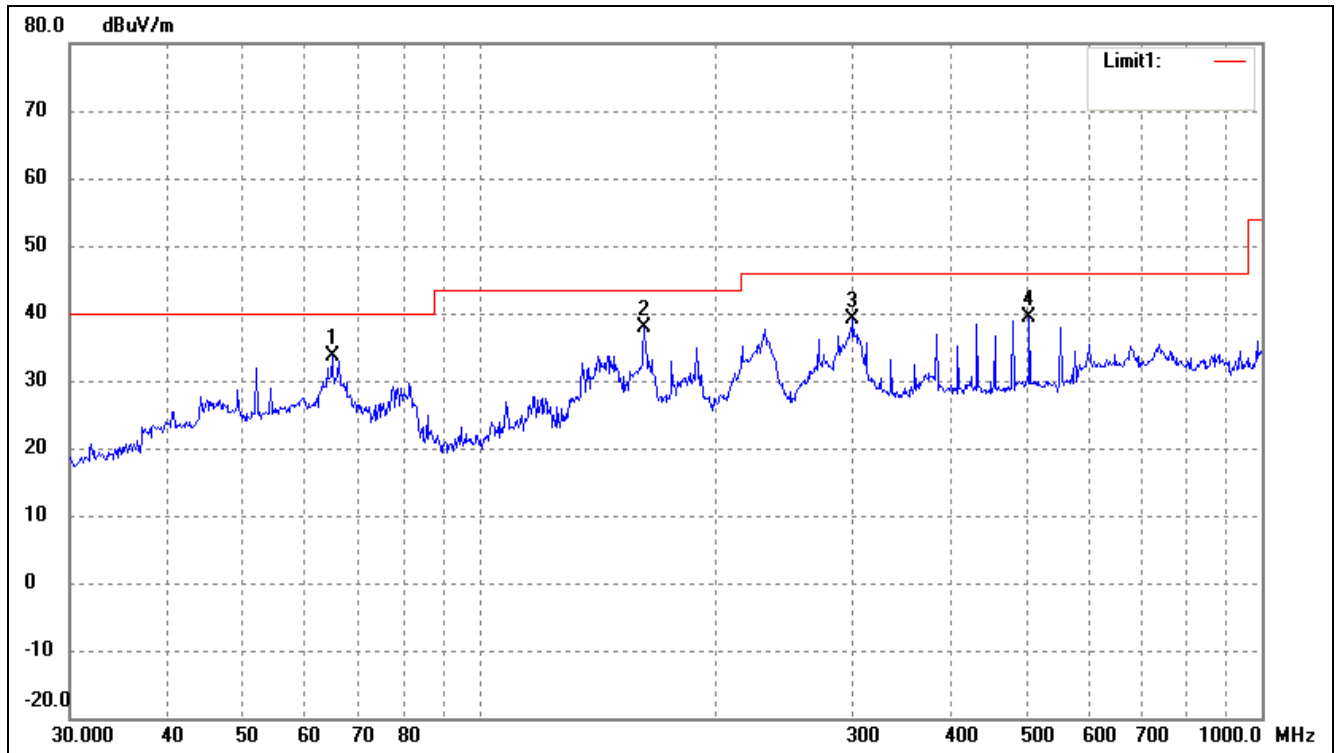


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	64.8865	29.27	4.30	33.57	40.00	-6.43	144	100	peak
2	162.6106	35.35	2.63	37.98	43.50	-5.52	201	100	peak
3	300.3673	27.01	12.18	39.19	46.00	-6.81	254	100	peak
4	504.7062	25.38	13.98	39.36	46.00	-6.64	16	100	peak



Operating Condition: 802.11n-HT40 Transmitting High Channel-2452MHz


Comment: Adapter DC12V

Test Specification: Horizontal

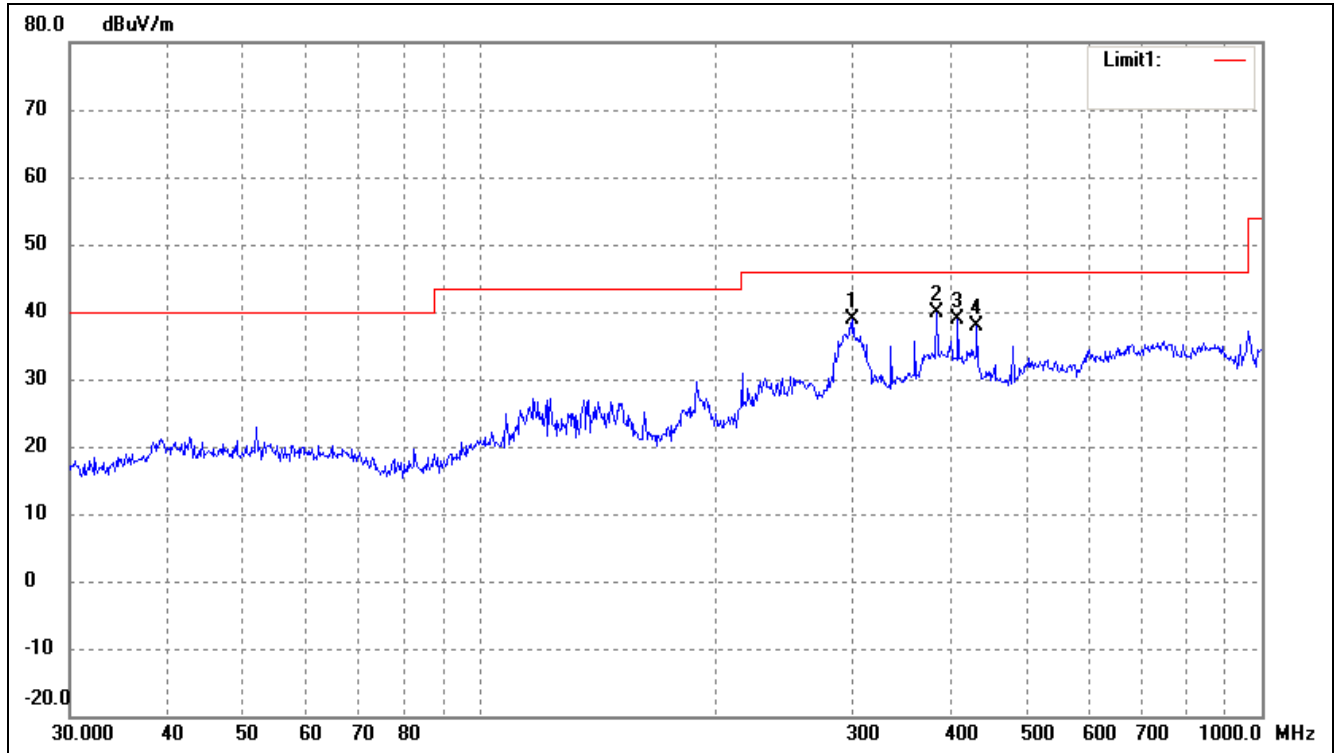

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	300.3673	26.75	12.18	38.93	46.00	-7.07	12	100	peak
2	383.9318	27.48	12.38	39.86	46.00	-6.14	217	100	peak
3	408.9460	26.00	12.80	38.80	46.00	-7.20	148	100	peak
4	432.5457	25.22	12.78	38.00	46.00	-8.00	172	100	peak

Test Specification: Vertical

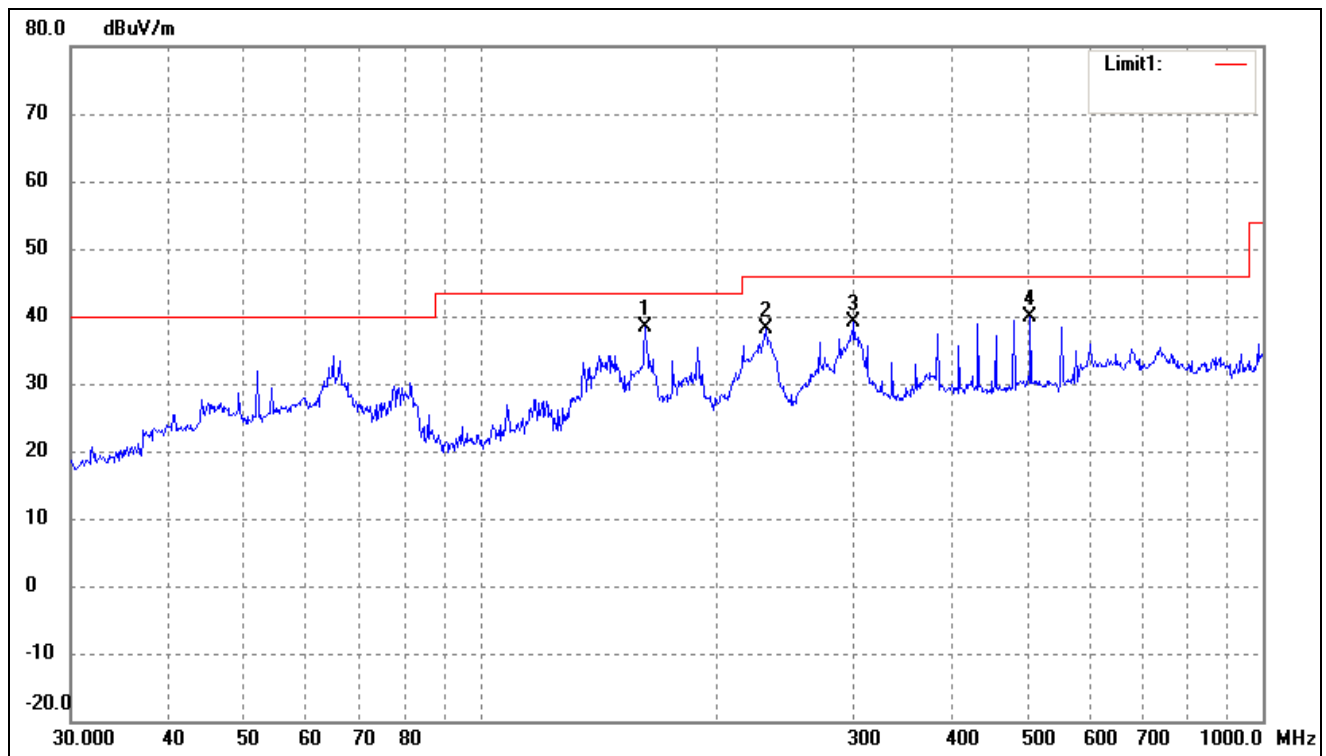

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	162.6106	35.85	2.63	38.48	43.50	-5.02	144	100	peak
2	231.7179	29.35	8.82	38.17	46.00	-7.83	78	100	peak
3	300.3673	27.01	12.18	39.19	46.00	-6.81	214	100	peak
4	504.7062	25.88	13.98	39.86	46.00	-6.14	56	100	peak

*Spurious Emissions Above 1GHz*

*Test Mode: 802.11b*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	54.15	-3.87	50.28	74.00	-23.72	H	PK
4824.000	38.61	-3.87	34.74	54.00	-19.26	H	AV
7236.000	46.12	1.14	47.26	74.00	-26.74	H	PK
7236.000	34.92	1.19	36.11	54.00	-17.89	H	AV
4824.000	57.36	-3.86	53.50	74.00	-20.5	V	PK
4824.000	40.51	-3.86	36.65	54.00	-17.35	V	AV
7236.000	49.15	1.10	50.25	74.00	-23.75	V	PK
7236.000	37.46	1.10	38.56	54.00	-15.44	V	AV
Middle Channel-2437MHz							
4874.000	54.71	-3.74	50.97	74.00	-23.03	H	PK
4874.000	39.96	-3.74	36.22	54.00	-17.78	H	AV
7311.000	47.71	1.47	49.18	74.00	-24.82	H	PK
7311.000	33.15	1.47	34.62	54.00	-19.38	H	AV
4874.000	53.96	-3.74	50.22	74.00	-23.78	V	PK
4874.000	40.81	-3.74	37.07	54.00	-16.93	V	AV
7311.000	47.95	1.47	49.42	74.00	-24.58	V	PK
7311.000	34.09	1.47	35.56	54.00	-18.44	V	AV
High Channel-2462MHz							
4924.000	55.81	-3.59	52.22	74.00	-21.78	H	PK
4924.000	41.75	-3.59	38.16	54.00	-15.84	H	AV
7386.000	46.34	1.79	48.13	74.00	-25.87	H	PK
7386.000	34.86	1.79	36.65	54.00	-17.35	H	AV
4924.000	54.91	-3.59	51.32	74.00	-22.68	V	PK
4924.000	42.08	-3.59	38.49	54.00	-15.51	V	AV
7386.000	47.91	1.79	49.70	74.00	-24.30	V	PK
7386.000	35.11	1.79	36.90	54.00	-17.10	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.58	-3.86	51.72	74.00	-22.28	H	PK
4824.000	42.21	-3.86	38.35	54.00	-15.65	H	AV
7236.000	48.46	1.10	49.56	74.00	-24.44	H	PK
7236.000	34.41	1.10	35.51	54.00	-18.49	H	AV
4824.000	55.95	-3.86	52.09	74.00	-21.91	V	PK
4824.000	42.66	-3.86	38.80	54.00	-15.20	V	AV
7236.000	49.21	1.10	50.31	74.00	-23.69	V	PK
7236.000	35.56	1.10	36.66	54.00	-17.34	V	AV
Middle Channel-2437MHz							
4874.000	55.11	-3.74	51.37	74.00	-22.63	H	PK
4874.000	43.25	-3.74	39.51	54.00	-14.49	H	AV
7311.000	47.36	1.47	48.83	74.00	-25.17	H	PK
7311.000	35.28	1.47	36.75	54.00	-17.25	H	AV
4874.000	57.04	-3.74	53.3	74.00	-20.7	V	PK
4874.000	43.85	-3.74	40.11	54.00	-13.89	V	AV
7311.000	48.46	1.47	49.93	74.00	-24.07	V	PK
7311.000	35.31	1.47	36.78	54.00	-17.22	V	AV
High Channel-2462MHz							
4924.000	54.01	-3.59	50.42	74.00	-23.58	H	PK
4924.000	40.75	-3.59	37.16	54.00	-16.84	H	AV
7386.000	47.14	1.79	48.93	74.00	-25.07	H	PK
7386.000	34.77	1.79	36.56	54.00	-17.44	H	AV
4924.000	56.15	-3.59	52.56	74.00	-21.44	V	PK
4924.000	42.66	-3.59	39.07	54.00	-14.93	V	AV
7386.000	48.51	1.79	50.3	74.00	-23.7	V	PK
7386.000	35.92	1.79	37.71	54.00	-16.29	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.61	-3.86	51.75	74.00	-22.25	H	PK
4824.000	40.55	-3.86	36.69	54.00	-17.31	H	AV
7236.000	47.26	1.10	48.36	74.00	-25.64	H	PK
7236.000	34.44	1.10	35.54	54.00	-18.46	H	AV
4824.000	56.76	-3.86	52.9	74.00	-21.1	V	PK
4824.000	43.14	-3.86	39.28	54.00	-14.72	V	AV
7236.000	49.26	1.10	50.36	74.00	-23.64	V	PK
7236.000	35.71	1.10	36.81	54.00	-17.19	V	AV
Middle Channel-2437MHz							
4874.000	54.17	-3.74	50.43	74.00	-23.57	H	PK
4874.000	42.47	-3.74	38.73	54.00	-15.27	H	AV
7311.000	48.79	1.47	50.26	74.00	-23.74	H	PK
7311.000	33.14	1.47	34.61	54.00	-19.39	H	AV
4874.000	54.91	-3.74	51.17	74.00	-22.83	V	PK
4874.000	42.63	-3.74	38.89	54.00	-15.11	V	AV
7311.000	48.41	1.47	49.88	74.00	-24.12	V	PK
7311.000	35.26	1.47	36.73	54.00	-17.27	V	AV
High Channel-2462MHz							
4924.000	53.91	-3.59	50.32	74.00	-23.68	H	PK
4924.000	43.26	-3.59	39.67	54.00	-14.33	H	AV
7386.000	48.31	1.79	50.10	74.00	-23.90	H	PK
7386.000	36.17	1.79	37.96	54.00	-16.04	H	AV
4924.000	55.77	-3.59	52.18	74.00	-21.82	V	PK
4924.000	41.44	-3.59	37.85	54.00	-16.15	V	AV
7386.000	48.51	1.79	50.30	74.00	-23.70	V	PK
7386.000	35.32	1.79	37.11	54.00	-16.89	V	AV

Test Mode: 802.11n-HT40

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2422MHz							
4844.000	53.22	-3.90	49.32	74.00	-24.68	H	PK
4824.000	38.26	-3.90	34.36	54.00	-19.64	H	AV
7266.000	46.41	1.06	47.47	74.00	-26.53	H	PK
7266.000	32.54	1.06	33.60	54.00	-20.40	H	AV
4844.000	54.28	-3.90	50.38	74.00	-23.62	V	PK
4824.000	39.44	-3.90	35.54	54.00	-18.46	V	AV
7266.000	48.87	1.06	49.93	74.00	-24.07	V	PK
7266.000	34.71	1.06	35.77	54.00	-18.23	V	AV
Middle Channel-2437MHz							
4874.000	52.51	-3.74	48.77	74.00	-25.23	H	PK
4874.000	37.85	-3.74	34.11	54.00	-19.89	H	AV
7311.000	44.86	1.47	46.33	74.00	-27.67	H	PK
7311.000	32.07	1.47	33.54	54.00	-20.46	H	AV
4874.000	53.78	-3.74	50.04	74.00	-23.96	V	PK
4874.000	39.97	-3.74	36.23	54.00	-17.77	V	AV
7311.000	45.74	1.47	47.21	74.00	-26.79	V	PK
7311.000	34.05	1.47	35.52	54.00	-18.48	V	AV
High Channel-2452MHz							
4904.000	52.45	-3.63	48.82	74.00	-25.18	H	PK
4904.000	39.98	-3.63	36.35	54.00	-17.65	H	AV
7356.000	45.61	1.62	47.23	74.00	-26.77	H	PK
7356.000	30.15	1.62	31.77	54.00	-22.23	H	AV
4904.000	54.65	-3.63	51.02	74.00	-22.98	V	PK
4904.000	40.54	-3.63	36.91	54.00	-17.09	V	AV
7356.000	48.26	1.62	49.88	74.00	-24.12	V	PK
7356.000	35.09	1.62	36.71	54.00	-17.29	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v03r03, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V03r03, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


### 9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 9.4 Summary of Test Results/Plots

802.11b-Lowest Bandedge

Vertical (Worst case)

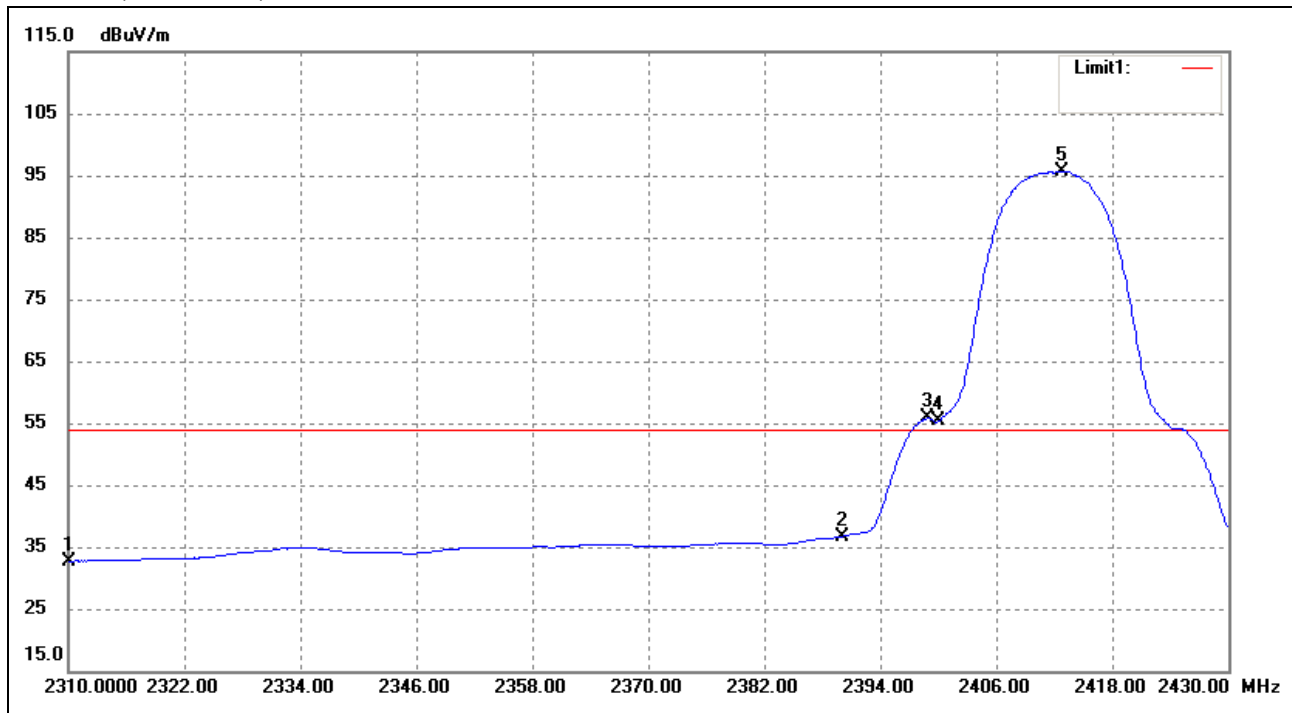


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.11	-4.42	32.69	54.00	-21.31	Average Detector
	2310.000	48.35	-4.42	43.93	74.00	-30.07	Peak Detector
2	2390.000	40.46	-3.72	36.74	54.00	-17.26	Average Detector
	2390.000	51.22	-3.72	47.50	74.00	-26.50	Peak Detector
3	2398.920	59.45	-3.65	55.80	Delta =40.33dBc		Average Detector
4	2400.000	58.94	-3.64	55.30			Average Detector
5	2412.720	99.17	-3.54	95.63			Average Detector



802.11b-Highest Bandedge


Vertical (Worst case)

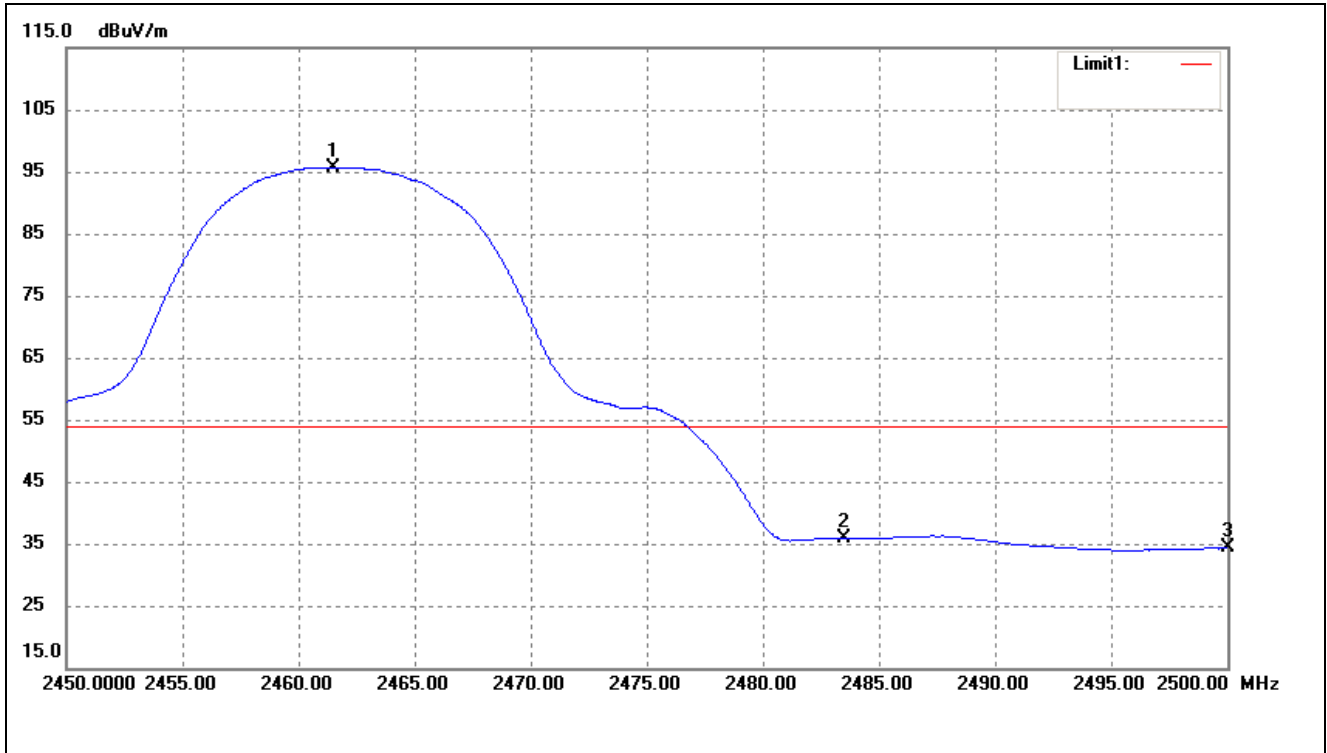

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.500	98.88	-3.17	95.71	/	/	Average Detector
	2463.300	106.95	-3.16	103.79	/	/	Peak Detector
2	2483.500	38.93	-3.01	35.92	54.00	-18.08	Average Detector
	2483.500	49.92	-3.01	46.91	74.00	-27.09	Peak Detector
3	2500.000	37.14	-2.88	34.26	54.00	-19.74	Average Detector
	2500.000	48.76	-2.88	45.88	74.00	-28.12	Peak Detector


802.11g-Lowest Bandedge

Vertical (Worst case)

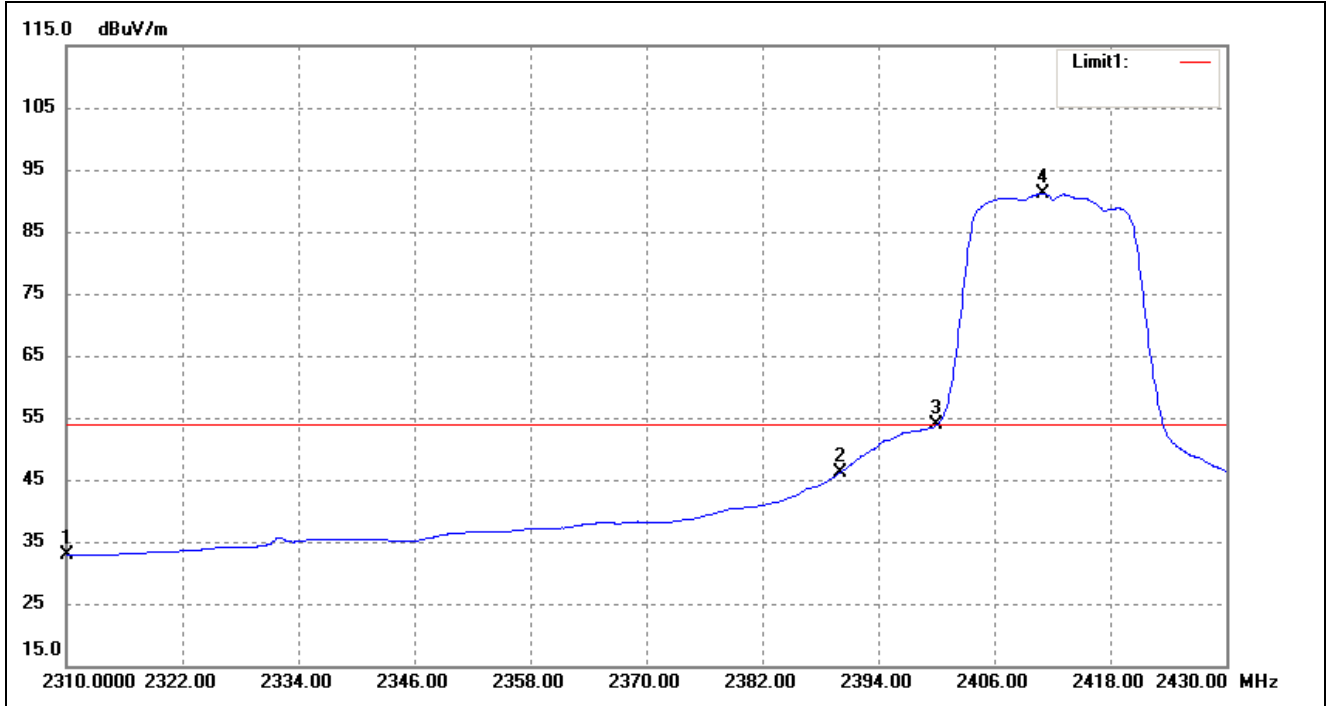


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.18	-4.42	32.76	54.00	-21.24	Average Detector
	2310.000	48.48	-4.42	44.06	74.00	-29.94	Peak Detector
2	2390.000	49.89	-3.72	46.17	54.00	-7.83	Average Detector
	2390.000	67.68	-3.72	63.96	74.00	-10.04	Peak Detector
3	2400.000	57.41	-3.64	53.77	Delta =37.34dBc		Average Detector
4	2411.040	94.67	-3.56	91.11			Average Detector

802.11g-Highest Bandedge  
Vertical (Worst case)

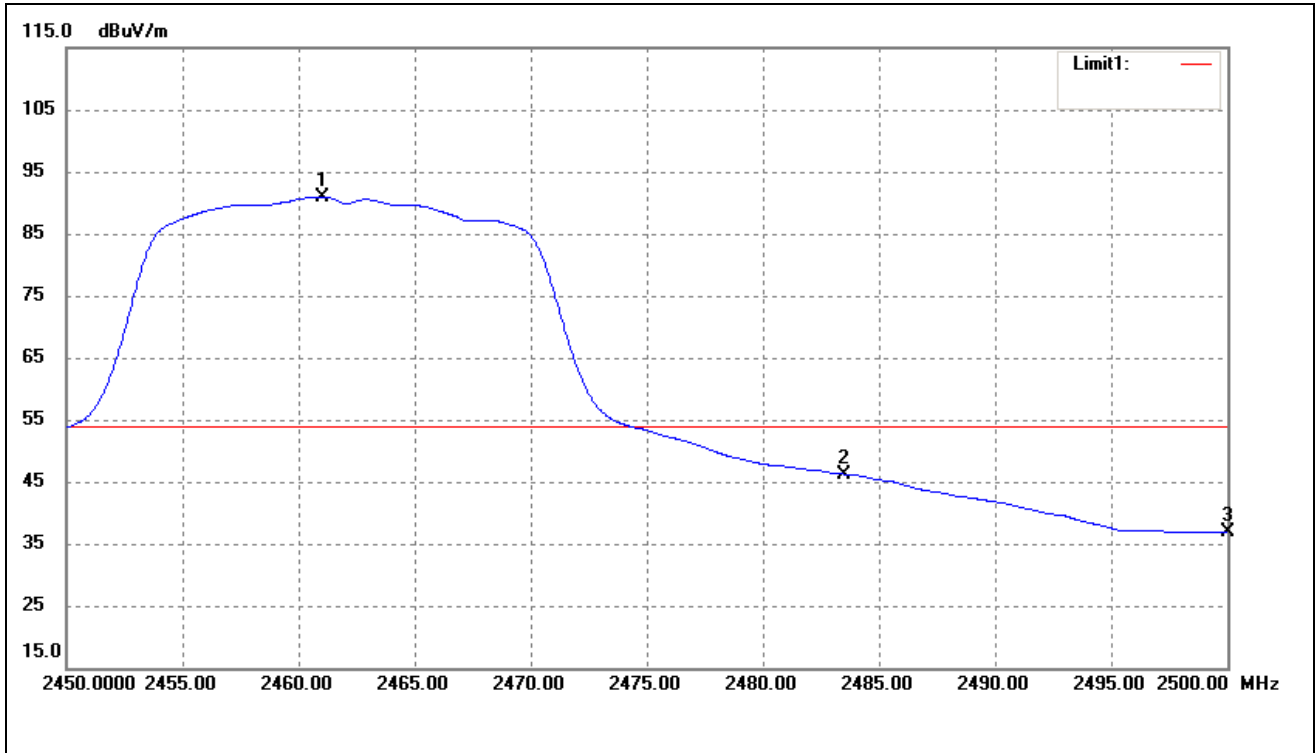


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.000	94.15	-3.18	90.97	/	/	Average Detector
	2463.650	105.46	-3.16	102.30	/	/	Peak Detector
2	2483.500	49.25	-3.01	46.24	54.00	-7.76	Average Detector
	2483.500	66.18	-3.01	63.17	74.00	-10.83	Peak Detector
3	2500.000	39.68	-2.88	36.80	54.00	-17.20	Average Detector
	2500.000	53.89	-2.88	51.01	74.00	-22.99	Peak Detector

802.11n-HT20-Lowest Bandedge  
Vertical (Worst case)

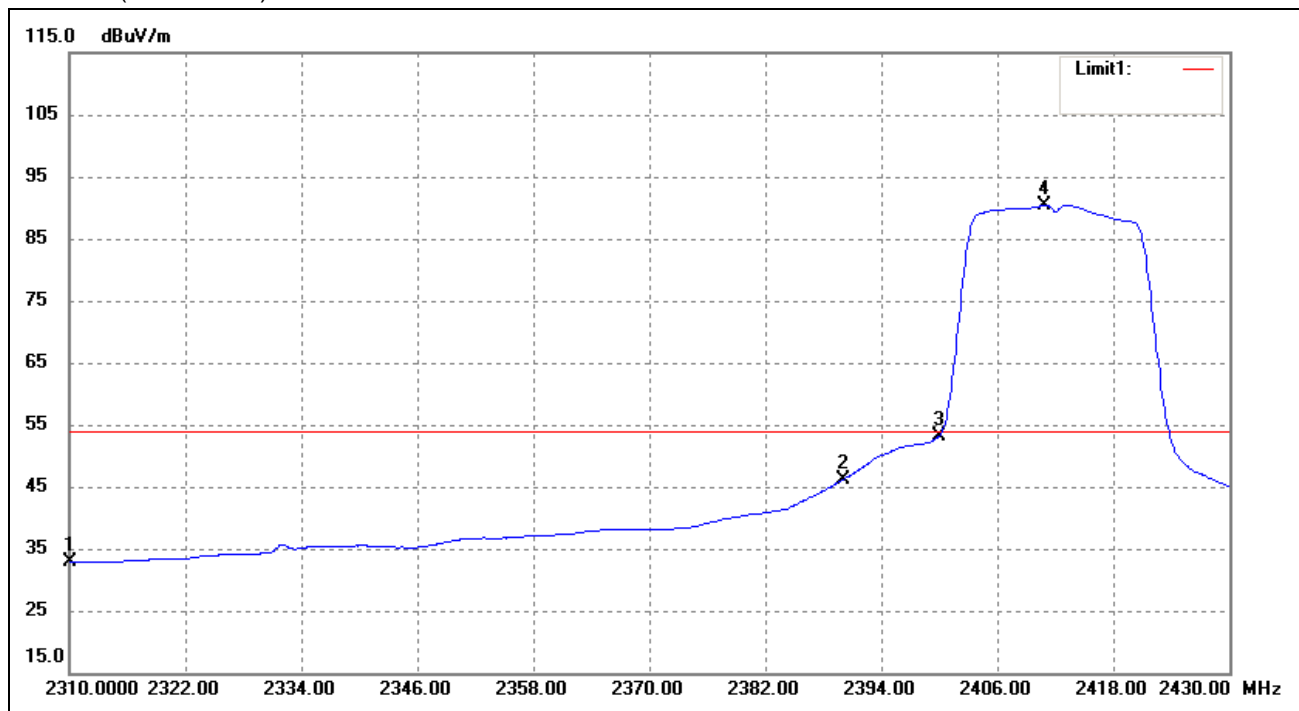

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.22	-4.42	32.80	54.00	-21.20	Average Detector
	2310.000	49.92	-4.42	45.50	74.00	-28.50	Peak Detector
2	2390.000	49.92	-3.72	46.20	54.00	-7.80	Average Detector
	2390.000	69.13	-3.72	65.41	74.00	-8.59	Peak Detector
3	2400.000	56.85	-3.64	53.21	Delta = 37.26dBc		Average Detector
4	2410.920	94.03	-3.56	90.47			Average Detector


802.11n-HT20-Highest Bandedge  
Vertical (Worst case)

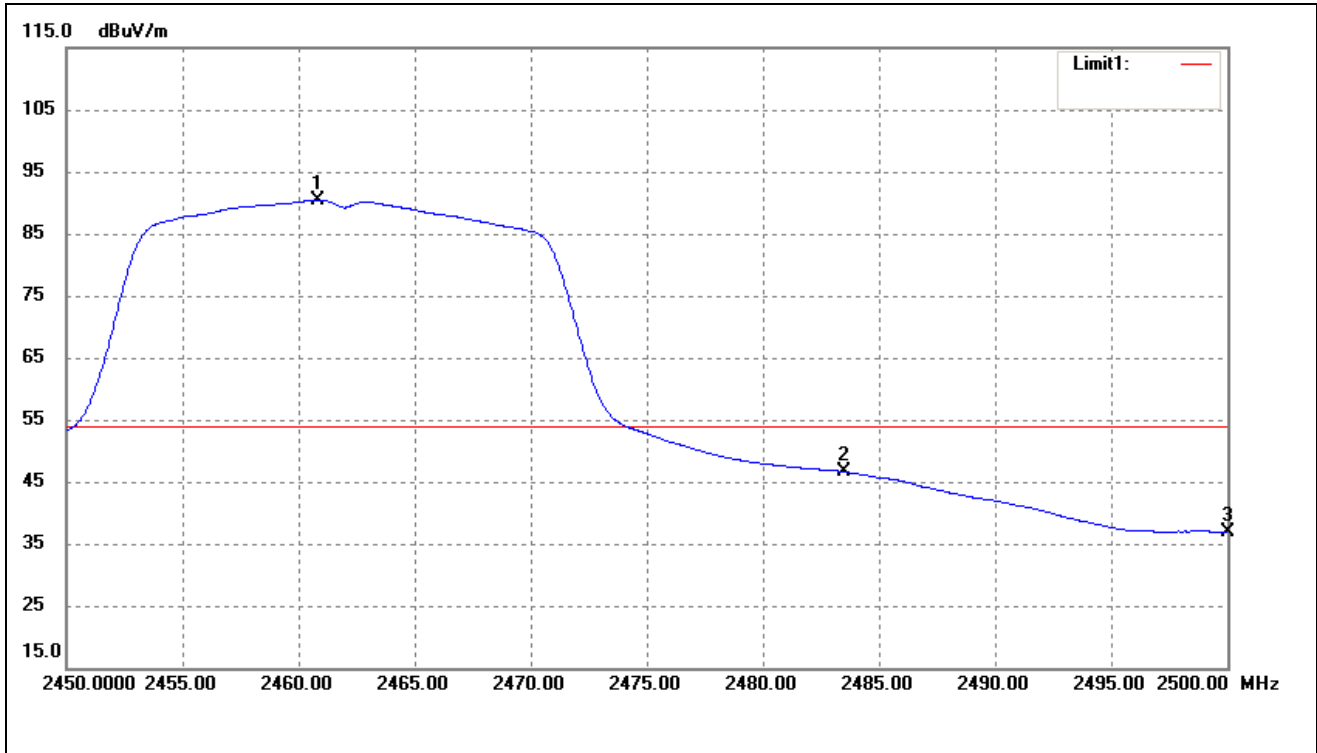

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.850	93.66	-3.18	90.48	/	/	Average Detector
	2461.450	105.03	-3.17	101.86	/	/	Peak Detector
2	2483.500	49.65	-3.01	46.64	54.00	-7.36	Average Detector
	2483.500	67.88	-3.01	64.87	74.00	-9.13	Peak Detector
3	2500.000	39.78	-2.88	36.90	54.00	-17.10	Average Detector
	2500.000	55.48	-2.88	52.60	74.00	-21.40	Peak Detector

802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

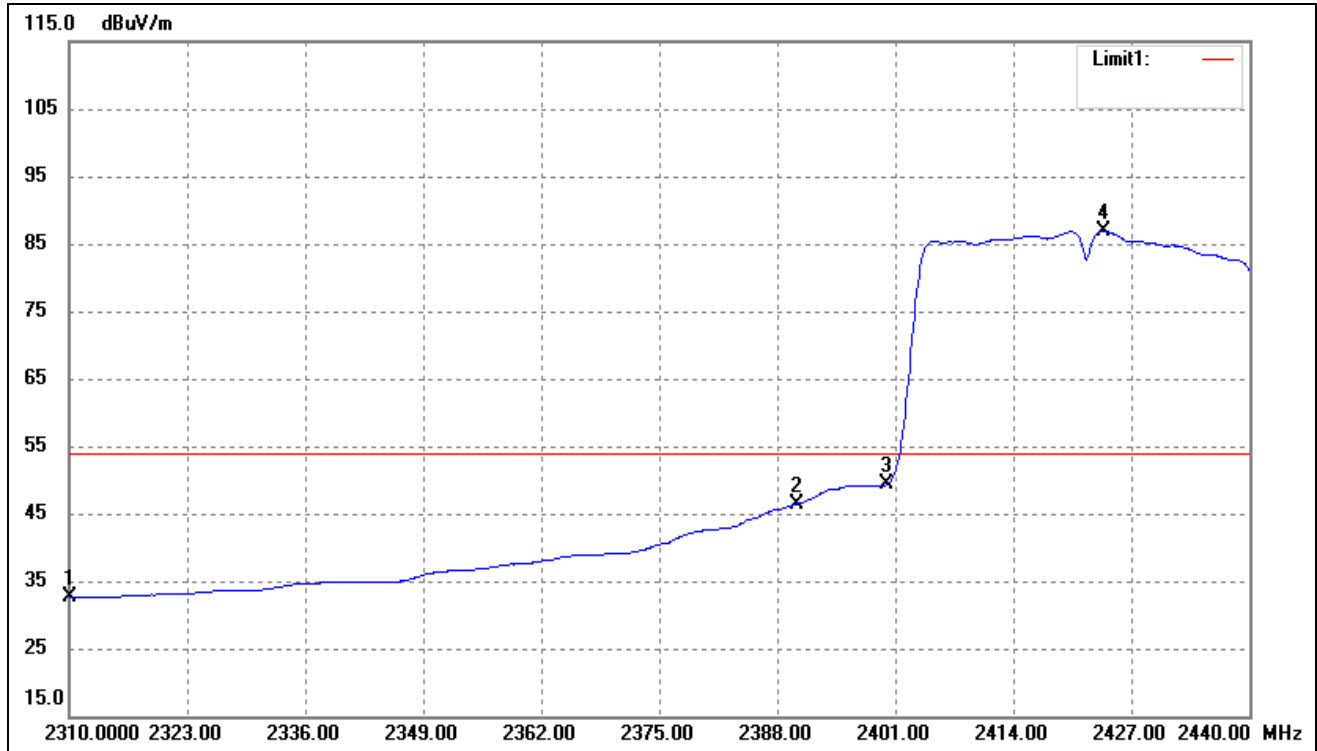

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.06	-4.42	32.64	54.00	-21.36	Average Detector
	2310.000	47.96	-4.42	43.54	74.00	-30.46	Peak Detector
2	2390.000	50.17	-3.72	46.45	54.00	-7.55	Average Detector
	2390.000	68.25	-3.72	64.53	74.00	-9.47	Peak Detector
3	2400.000	53.06	-3.64	49.42	Delta =37.44dBc		Average Detector
4	2423.880	90.32	-3.46	86.86			Average Detector

802.11n-HT40-Highest Bandedge

Vertical (Worst case)

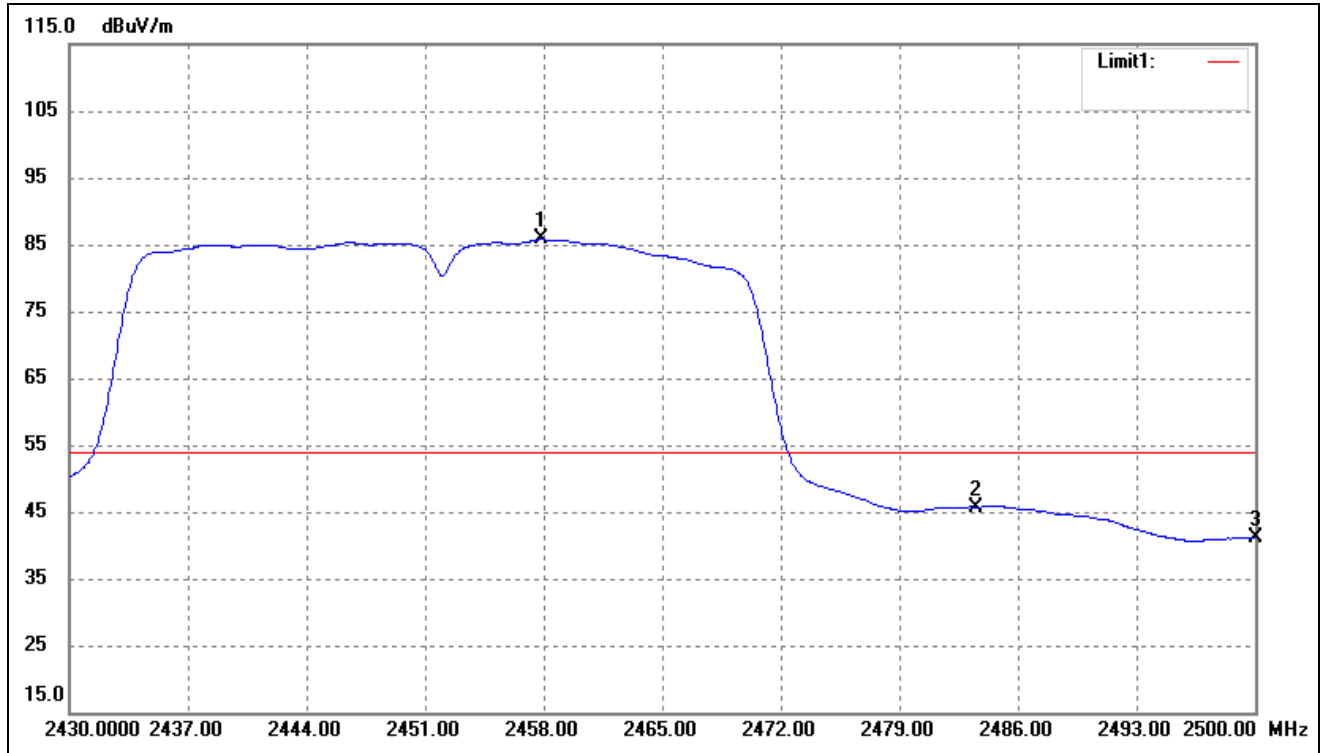

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2457.860	88.98	-3.20	85.78	/	/	Average Detector
	2459.190	100.06	-3.19	96.87	/	/	Peak Detector
2	2483.500	48.75	-3.01	45.74	54.00	-8.26	Average Detector
	2483.500	63.22	-3.01	60.21	74.00	-13.79	Peak Detector
3	2500.000	43.97	-2.88	41.09	54.00	-12.91	Average Detector
	2500.000	59.04	-2.88	56.16	74.00	-17.84	Peak Detector

## 10. Conducted Emissions

### 10.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.


### 10.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 10.3 Basic Test Setup Block Diagram

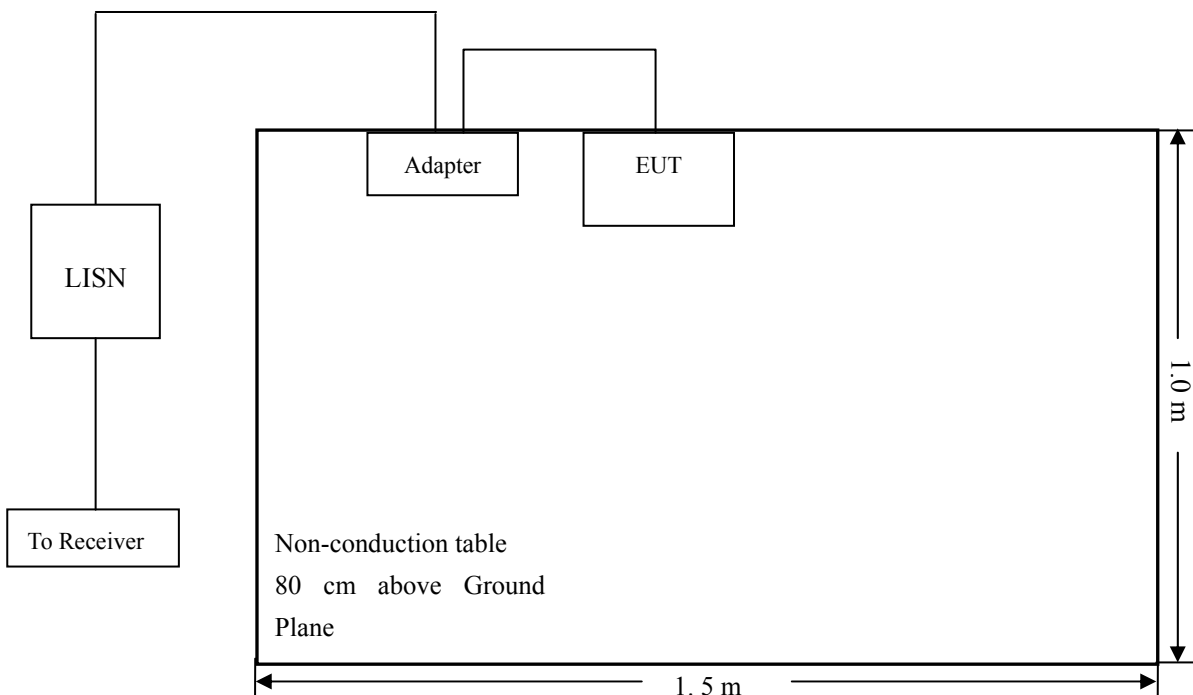

### 10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar



## 10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal

## 10.6 Summary of Test Results/Plots

According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

**-4.41 dB at 0.3380 MHz in the Line mode, Peak detector, 0.15-30MHz**

## 10.7 Conducted Emissions Test Data

*Note: All test modes (different operate mode and different channel) are performed, but only the worst case is recorded in this report.*

### Plot of Conducted Emissions Test Data


EUT: IP VIDEO DOOR PHONE

Tested Model: 86211-PC

Operating Condition: Transmitting(Wi-Fi)


Comment: Adapter DC12V

Test Specification: Neutral

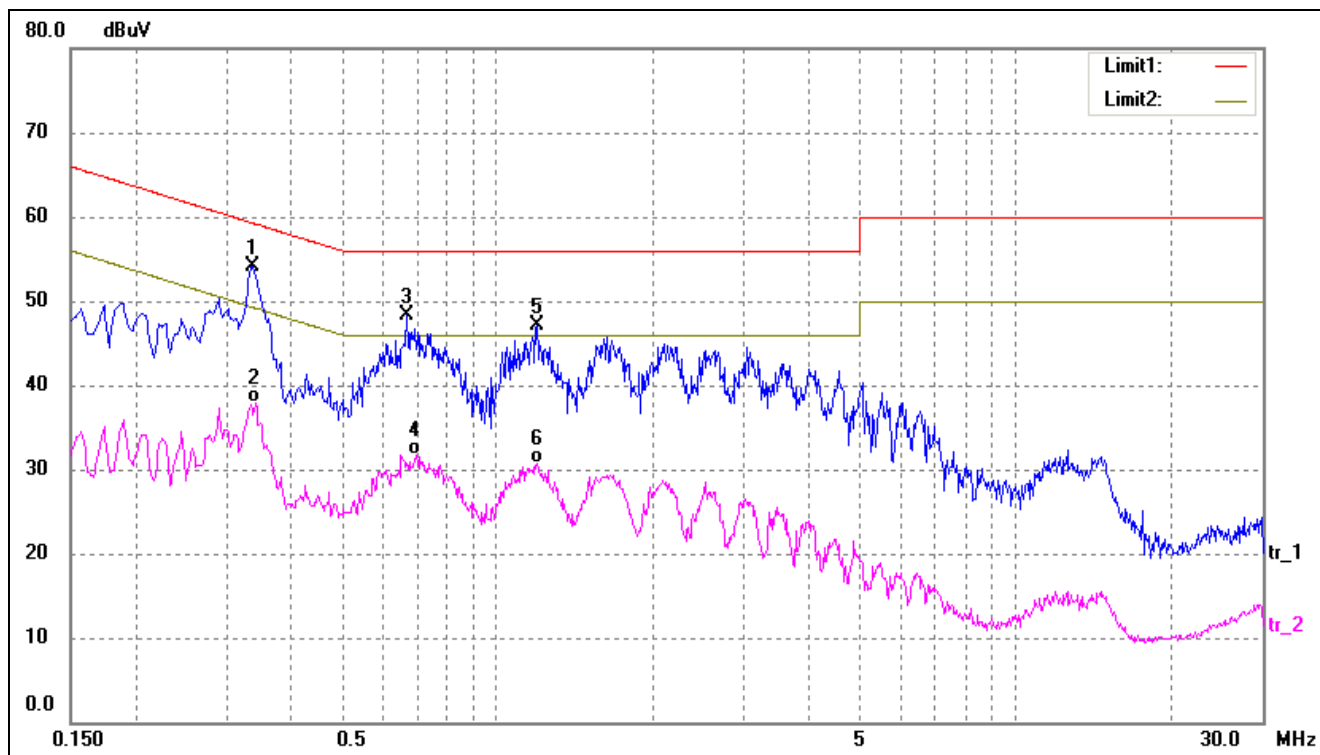

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.3380	41.56	12.50	54.06	59.25	-5.19	peak
2	0.3420	25.35	12.50	37.85	49.15	-11.30	AVG
3	0.6700	35.72	12.67	48.39	56.00	-7.61	peak
4	0.6980	18.92	12.70	31.62	46.00	-14.38	AVG
5	1.1940	34.01	13.00	47.01	56.00	-8.99	peak
6	1.1940	17.66	13.00	30.66	46.00	-15.34	AVG

Test Specification: Line

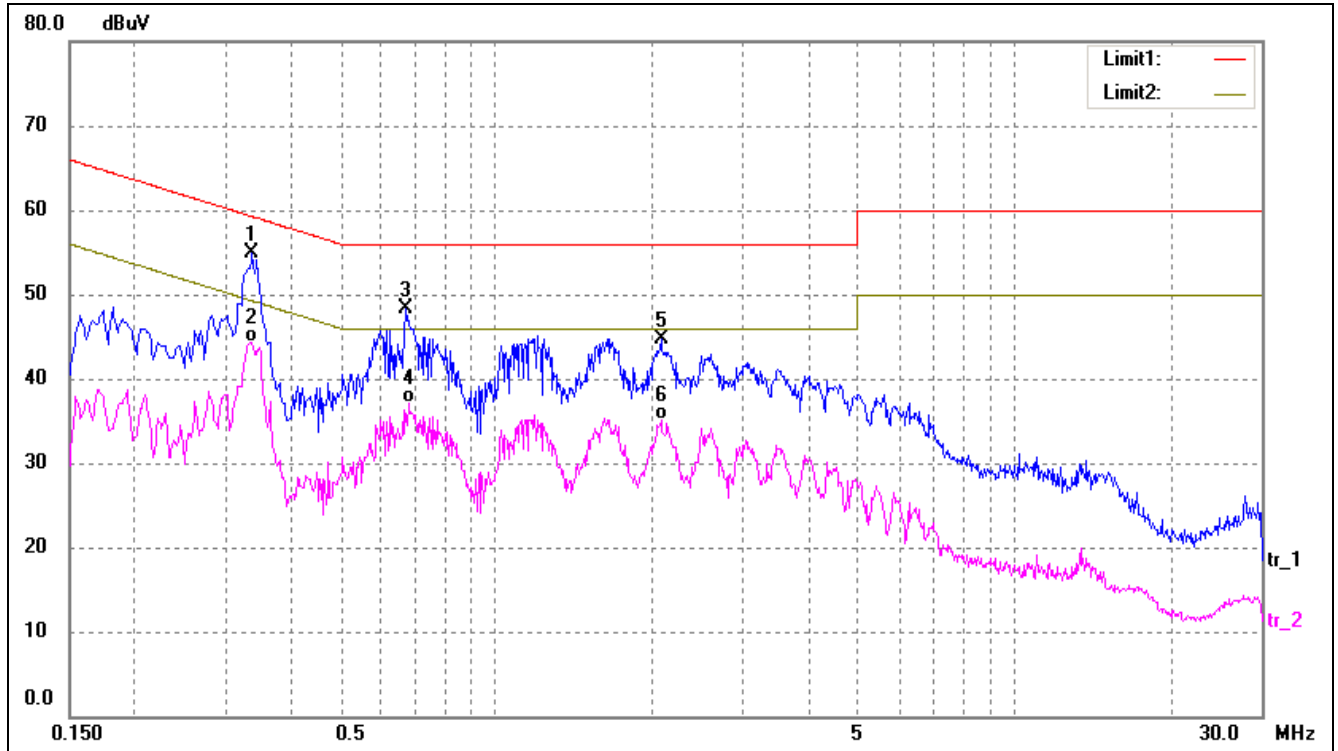

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.3380	42.34	12.50	54.84	59.25	-4.41	peak
2	0.3380	31.76	12.50	44.26	49.25	-4.99	AVG
3	0.6700	35.57	12.67	48.24	56.00	-7.76	peak
4	0.6780	24.40	12.68	37.08	46.00	-8.92	AVG
5	2.0780	31.76	13.00	44.76	56.00	-11.24	peak
6	2.0780	22.20	13.00	35.20	46.00	-10.80	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*