

FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Handheld Computer with Printer

Model No.: Tracksol 002

FCC ID: 2AGUK002

Trademark: **TrackSol**

REPORT NO.: ES151113019E1

ISSUE DATE: November 30, 2015

Prepared for

Mobile Money International Sdn Bhd

Lot 23-24, 2nd floor IOI Business Park, Puchong, Selangor 47100, Malaysia

Prepared by

EMTEK (SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	6
4	TEST METHODOLOGY.....	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	9
5.1	FACILITIES.....	9
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	9
6	TEST SYSTEM UNCERTAINTY	10
7	SETUP OF EQUIPMENT UNDER TEST	11
7.1	RADIO FREQUENCY TEST SETUP 1.....	11
7.2	RADIO FREQUENCY TEST SETUP 2.....	11
7.3	CONDUCTED EMISSION TEST SETUP	12
7.4	SUPPORT EQUIPMENT.....	12
8	TEST REQUIREMENTS.....	13
8.1	DTS (6DB) BANDWIDTH.....	13
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	19
8.3	MAXIMUM POWER SPECTRAL DENSITY	22
8.4	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS	28
8.5	RADIATED SPURIOUS EMISSION	33
8.6	CONDUCTED EMISSION TEST	54
8.7	ANTENNA APPLICATION	59

1 TEST RESULT CERTIFICATION

Applicant:	Mobile Money International Sdn Bhd Lot 23-24, 2nd floor IOI Business Park, Puchong, Selangor 47100, Malaysia
Manufacturer:	P-Plus Sdn Bhd No 1807, Jalan Industri 2, Bukit Panchor Industrial Park, 14300 Nibong Tebal, Pulau Pinang, Malaysia.
Product Description:	Handheld Computer with Printer
Model Number:	Tracksol 002
File Number:	ES151113019E1
Date of Test:	November 11, 2015 to November 30, 2015


Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J:2015 FCC 47 CFR Part 15, Subpart C:2015	PASS


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : November 11, 2015 to November 30, 2015

Prepared by : 
Jack Li/Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Device Type:	Wifi device
IEEE 802.11 WLAN Mode Supported:	<input checked="" type="checkbox"/> 802.11b(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11g(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth)
Data Rate:	802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; 106kbps for NFC
Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n; ASK for NFC
Operating Frequency Range:	2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 13.56MHz for NFC
Number of Channels:	11 channels for 802.11b/g; 11 channels for 802.11n(HT20); 1 channel for NFC
Transmit Power Max:	10.31dBm for 802.11b; 13.29dBm for 802.11g; 13.19dBm for 802.11n(HT20);
Antenna Type:	PCB Antenna for WIFI Integral Antenna for NFC
Antenna Gain:	5.3dBi for WIFI 1dBi for NFC
Power supply:	<input checked="" type="checkbox"/> DC supply: DC 7.4V internal rechargeable lithium battery or DC 12V from external power
	<input type="checkbox"/> Adapter supply:
Temperature Range:	5°C ~ +40°C
RF power setting in TEST SW:	Software's default

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v03r03

FCC KDB 662911 D01 Multiple Transmitter Output v01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2015
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2015
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2015

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2015

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2015
EMI Test Receiver	Rohde & Schwarz	FSV30	103040	05/16/2015
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2015
Power meter	Anritsu	ML2495A	0824006	05/16/2015
Power sensor	Anritsu	MA2411B	0738172	05/16/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20)) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

All the modulation modes and channels were tested, the data of the worst mode are described in the following pages

Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- EMC Lab.
- : Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291
 - : Accredited by TUV Rheinland Shenzhen, 2015.08.04
The Laboratory has been assessed according to the requirements ISO/IEC 17025.
 - : Accredited by FCC, July 24, 2013
The Certificate Registration Number is 406365.
 - : Accredited by FCC, April 17, 2013
The Certificate Registration Number is 709623.
 - : Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A-2

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.




7.2 RADIO FREQUENCY TEST SETUP 2


The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

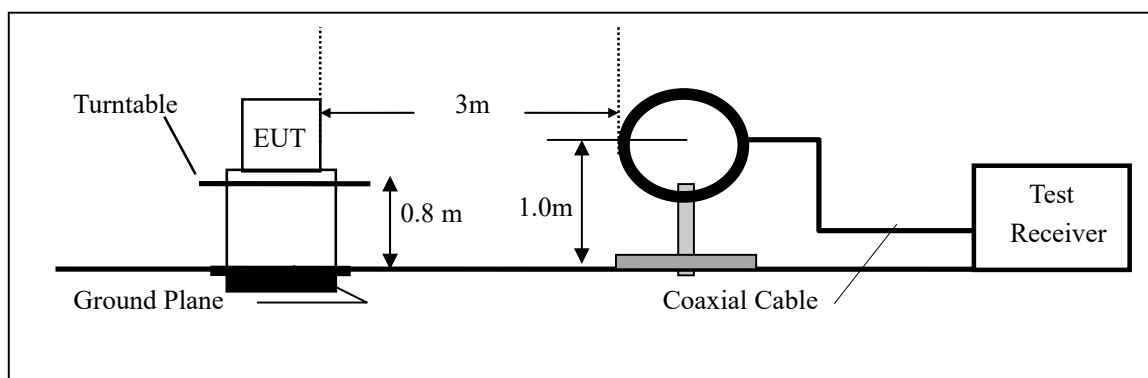

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

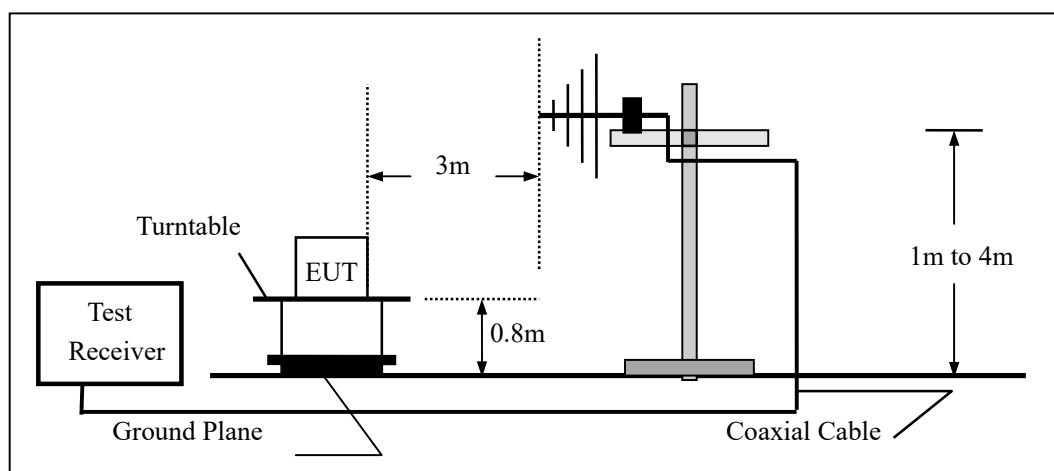

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

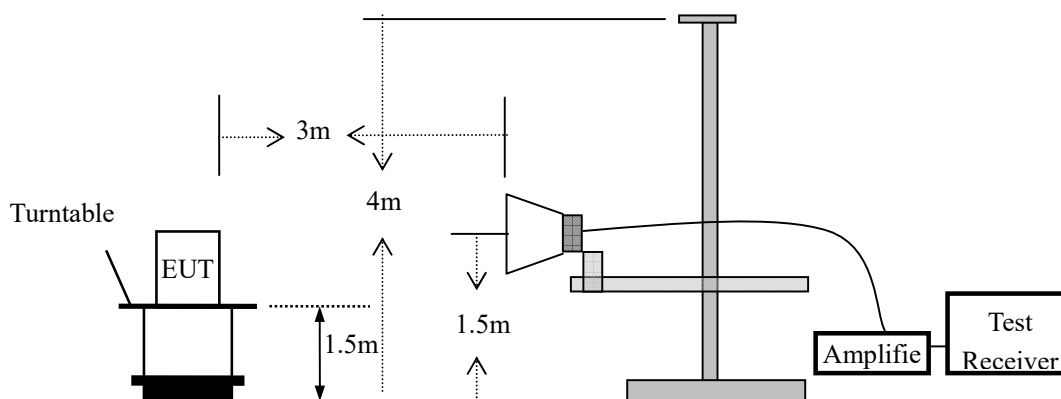


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Handheld Computer with Printer) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

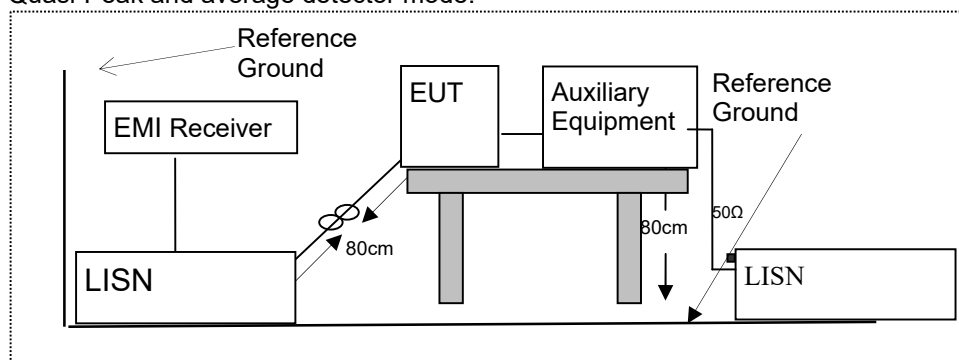

7.4 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
1.	Handheld Computer with Printer	TrackSol	Tracksol 002	2AGUK002	EUT
2.	Adapter	N/A	T91-92-1001-1	N/A	Auxiliary Equipment

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

8.1.5 Test Results


Temperature:	24	Test Date:	November 24, 2015
Humidity:	53 %	Test By:	YXL

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	12.10	>500	PASS
	6	2437	12.09	>500	PASS
	11	2462	12.08	>500	PASS
802.11g	1	2412	16.41	>500	PASS
	6	2437	16.47	>500	PASS
	11	2462	16.42	>500	PASS
802.11n (HT20)	1	2412	17.64	>500	PASS
	6	2437	17.62	>500	PASS
	11	2462	17.63	>500	PASS


Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 1: 2412MHz



Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 6: 2437MHz

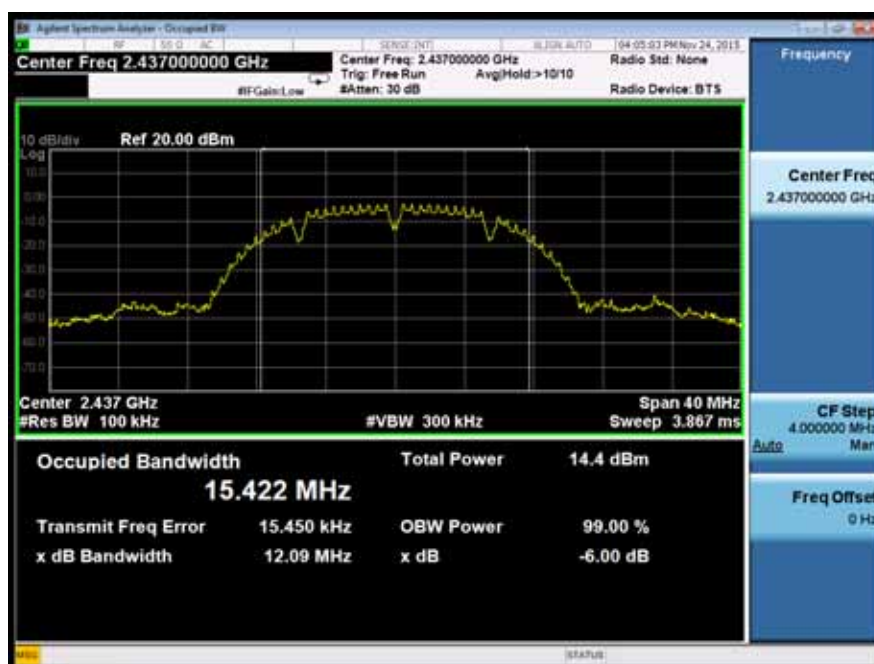

Test Model	DTS (6dB) Bandwidth
	802.11b
	Channel 11: 2462MHz

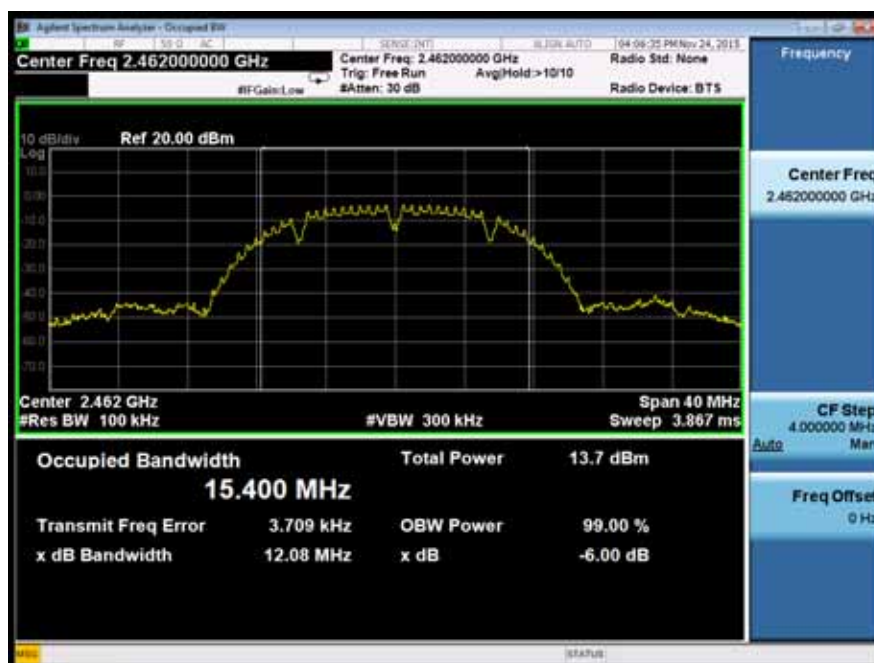

Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 1: 2412MHz



Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 6: 2437MHz




Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 11: 2462MHz



Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 1: 2412MHz



Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 6: 2437MHz

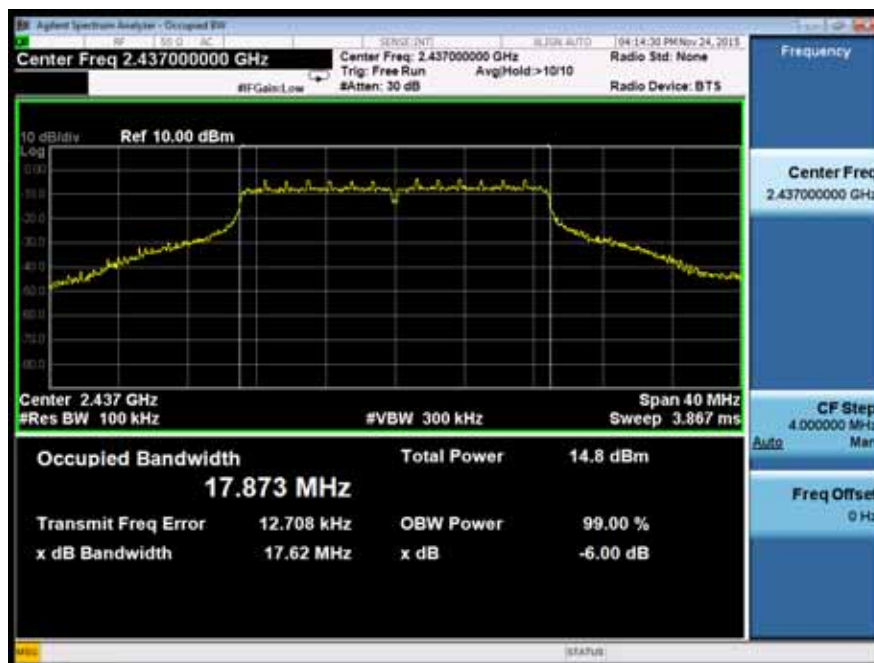

Test Model	DTS (6dB) Bandwidth
	802.11n (HT20)
	Channel 11: 2462MHz

The screenshot displays an Agilent Spectrum Analyzer interface. The main plot shows a signal centered at 2.462 GHz with a span of 40 MHz. The signal has a flat top and sloped sides, characteristic of a channel signal. The y-axis is in dBm, ranging from -60.0 to 10.0. The x-axis is in MHz, ranging from 2.450 to 2.475. The signal level is approximately -14.1 dBm. The occupied bandwidth is 17.841 MHz. The total power is 14.1 dBm. The transmit frequency error is -8.625 kHz. The x dB bandwidth is 17.63 MHz. The x dB is -6.00 dB. The radio device is BT5. The center frequency is 2.462000000 GHz. The resolution bandwidth is 100 kHz. The video bandwidth is 300 kHz. The sweep is 3.867 ms. The CF step is 4.000000 MHz. The frequency offset is 0 Hz. The status bar at the bottom indicates 'STATUS'.

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part 15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.5 Test Results



Temperature:	24	Test Date:	November 24, 2015
Humidity:	53 %	Test By:	YXL


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11b	1	2412	10.31	30	PASS
	6	2437	10.21	30	PASS
	11	2462	9.31	30	PASS
802.11g	1	2412	13.29	30	PASS
	6	2437	12.98	30	PASS
	11	2462	12.06	30	PASS
802.11n (HT20)	1	2412	13.19	30	PASS
	6	2437	12.94	30	PASS
	11	2462	12.08	30	PASS

Note: N/A

Duty Cycle:

All the modulation modes were tested, the data of the worst mode(802.11n(HT20)) are described in the following table.

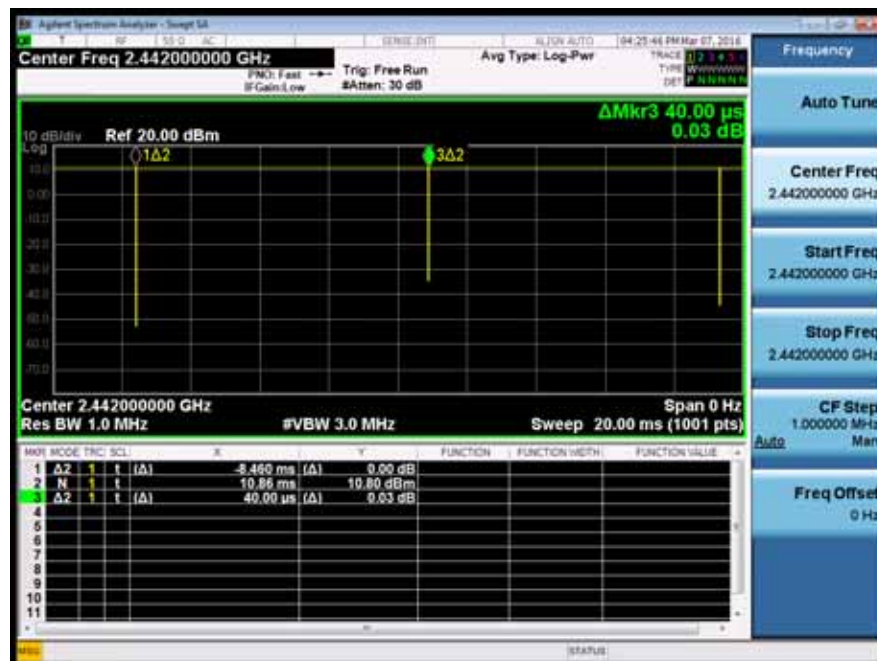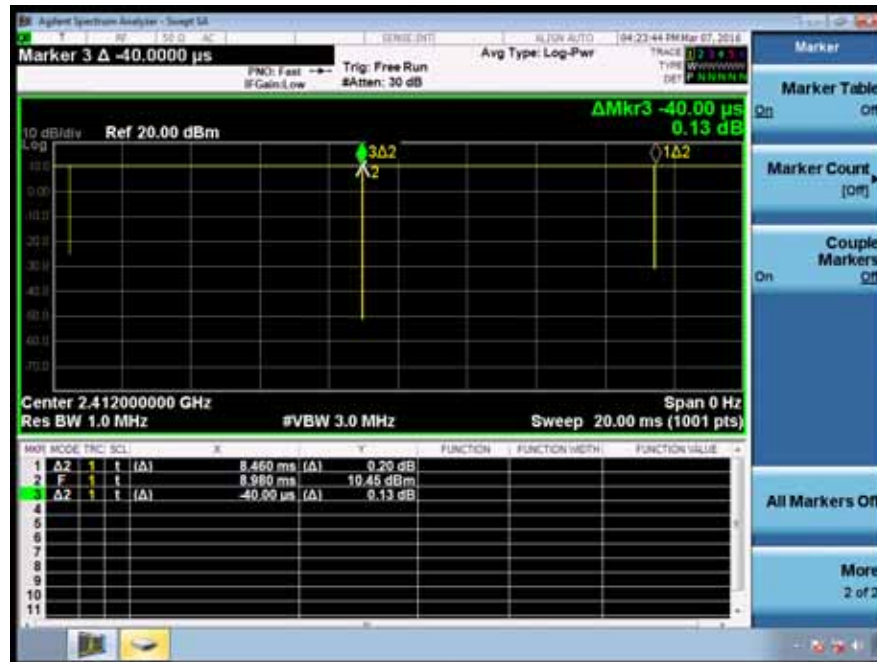

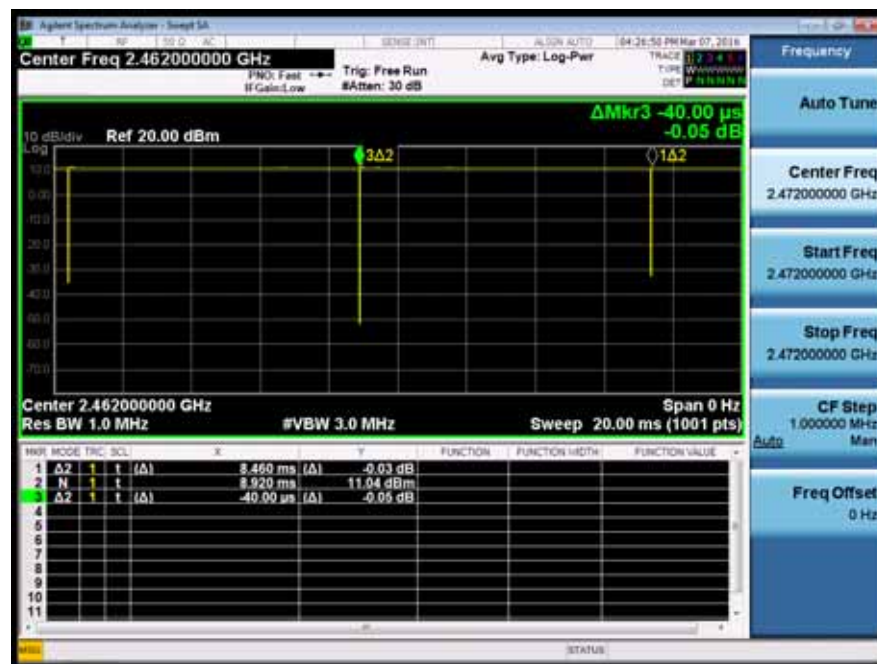

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

8.3.5 Test Results

Temperature: 24

Test Date:

November 24, 2015

Humidity: 53 %

Test By:

YXL

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-17.292	8	PASS
	6	2437	-17.689	8	PASS
	11	2462	-18.062	8	PASS
802.11g	1	2412	-17.810	8	PASS
	6	2437	-18.445	8	PASS
	11	2462	-19.277	8	PASS
802.11n (HT20)	1	2412	-18.665	8	PASS
	6	2437	-16.348	8	PASS
	11	2462	-20.098	8	PASS

Note: N/A

Test Model	Power Spectral Density
	802.11b
	Channel 1: 2412MHz




Test Model	Power Spectral Density
	802.11b
	Channel 6: 2437MHz




Test Model	Power Spectral Density
	802.11b
	Channel 11: 2462MHz




Test Model	Power Spectral Density
	802.11g
	Channel 1: 2412MHz

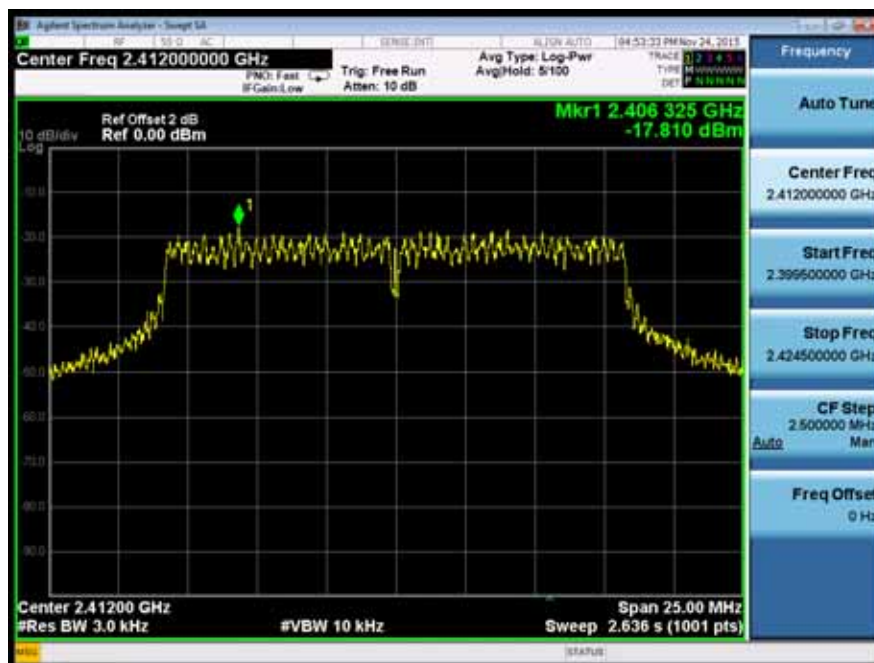

Test Model	Power Spectral Density
	802.11g
	Channel 6: 2437MHz

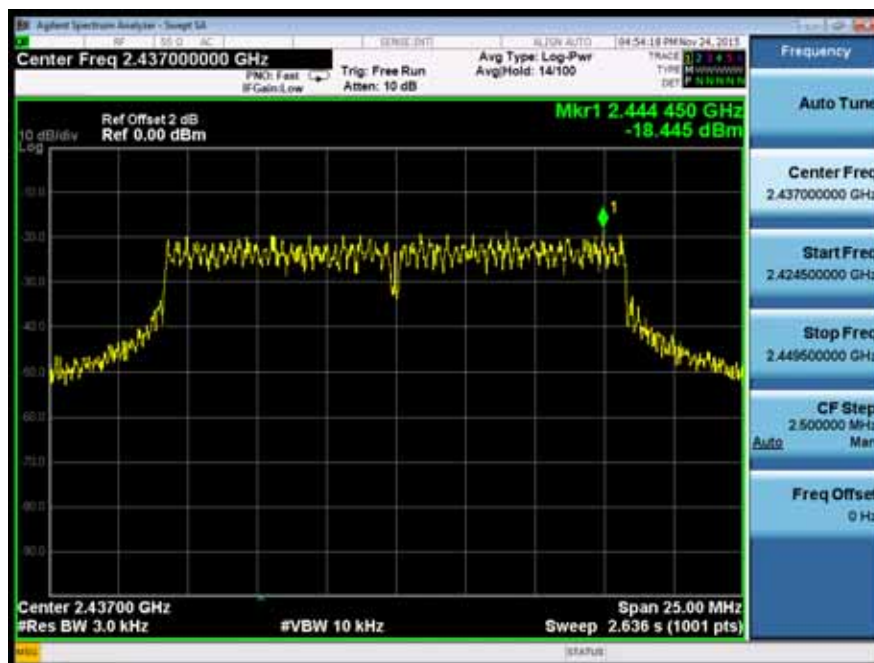


Test Model	Power Spectral Density
	802.11g
	Channel 11: 2462MHz

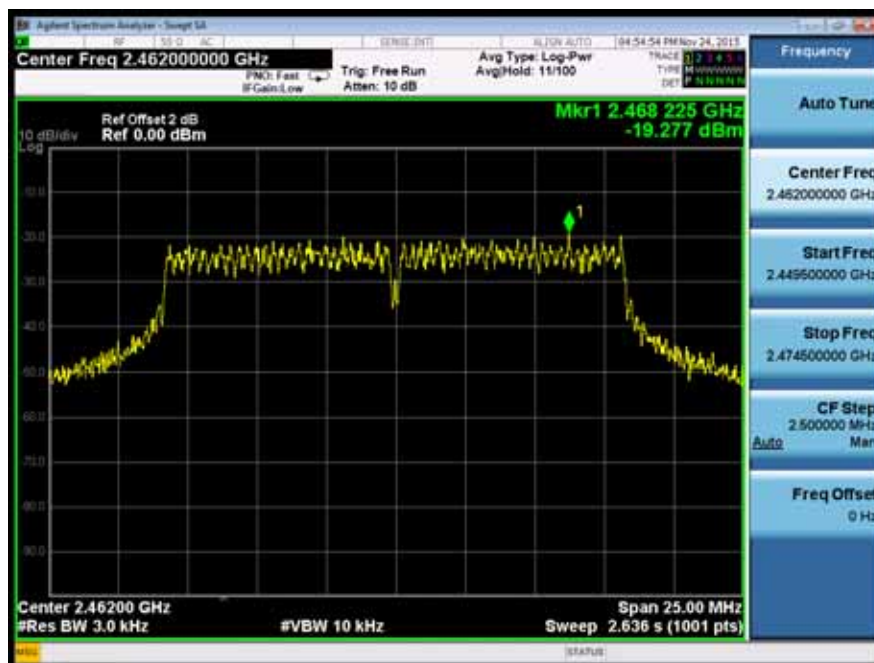

Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 1: 2412MHz



Test Model	Power Spectral Density
	802.11n (HT20)
	Channel 6: 2437MHz

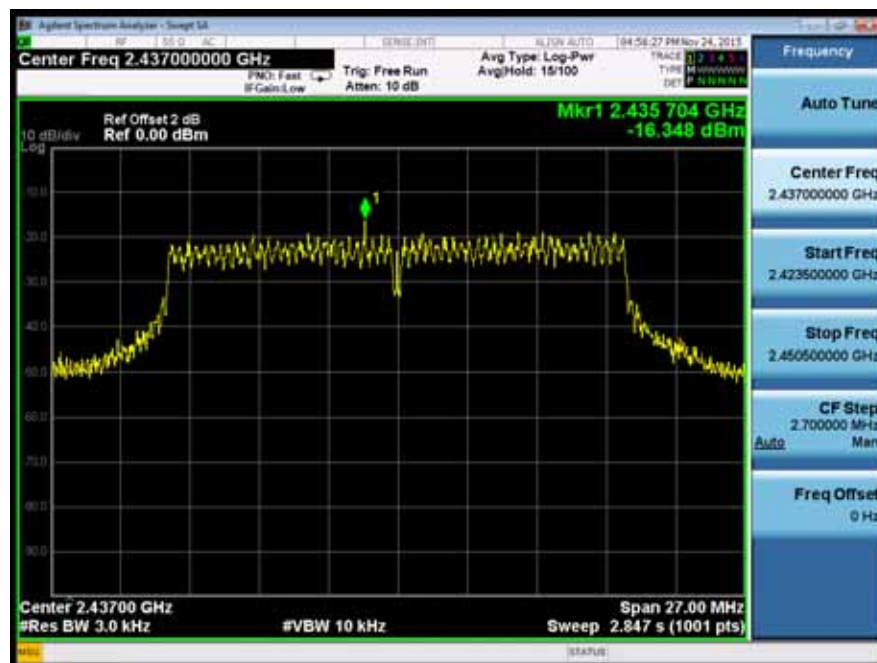



8.4 UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.



Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.



8.4.5 Test Results

All the modulation modes were tested, the data of the worst mode(802.11b) are described in the following table



Test Model	Unwanted Emissions in non-restricted frequency bands
	802.11b
	Channel 1: 2412MHz

Test Model	Unwanted Emissions in non-restricted frequency bands
	802.11b
	Channel 6: 2437MHz

Test Model	Unwanted Emissions in non-restricted frequency bands
	802.11b
	Channel 11: 2462MHz

Test Model	Band edge
	802.11b
	Channel 1: 2412MHz



Test Model	Band edge
	802.11b
	Channel 11: 2462MHz



8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v03r03

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark: 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW \geq RBW for peak measurement

VBW = 10Hz for Average measurement

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

All the modulation modes were tested the data of the worst mode are recorded as below.


■ Spurious Emission below 30MHz (9KHz to 30MHz)

Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

■ Spurious Emission Below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

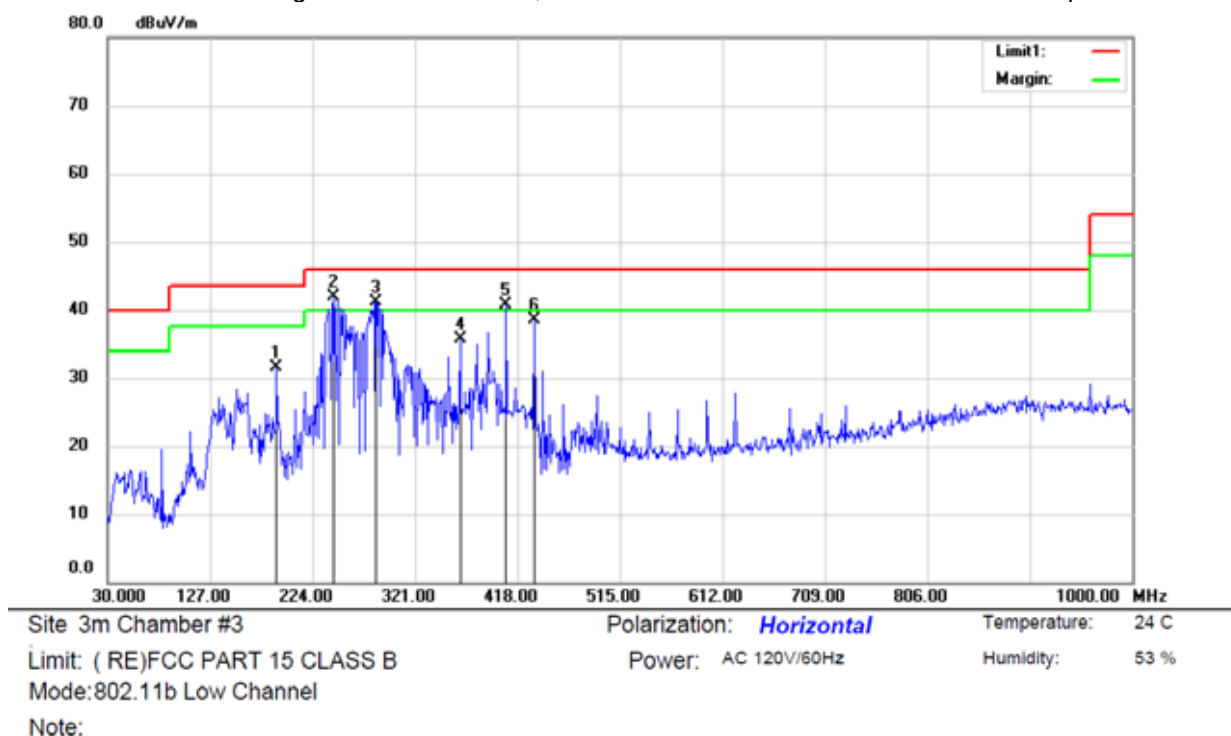

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		190.0500	48.69	-17.28	31.41	43.50	-12.09	QP		
2	*	243.4000	55.60	-13.66	41.94	46.00	-4.06	QP		
3	!	284.1400	53.96	-12.83	41.13	46.00	-4.87	QP		
4		363.6800	46.36	-10.59	35.77	46.00	-10.23	QP		
5	!	407.3300	49.74	-9.07	40.67	46.00	-5.33	QP		
6		433.5200	49.17	-10.63	38.54	46.00	-7.46	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK




Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11b Low Channel
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		52.3100	47.72	-15.75	31.97	40.00	-8.03	QP		
2		131.8500	50.63	-17.36	33.27	43.50	-10.23	QP		
3		154.1600	52.21	-18.36	33.85	43.50	-9.65	QP		
4	*	245.3400	54.76	-13.56	41.20	46.00	-4.80	QP		
5		285.1100	50.05	-12.88	37.17	46.00	-8.83	QP		
6		407.3300	45.11	-9.07	36.04	46.00	-9.96	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

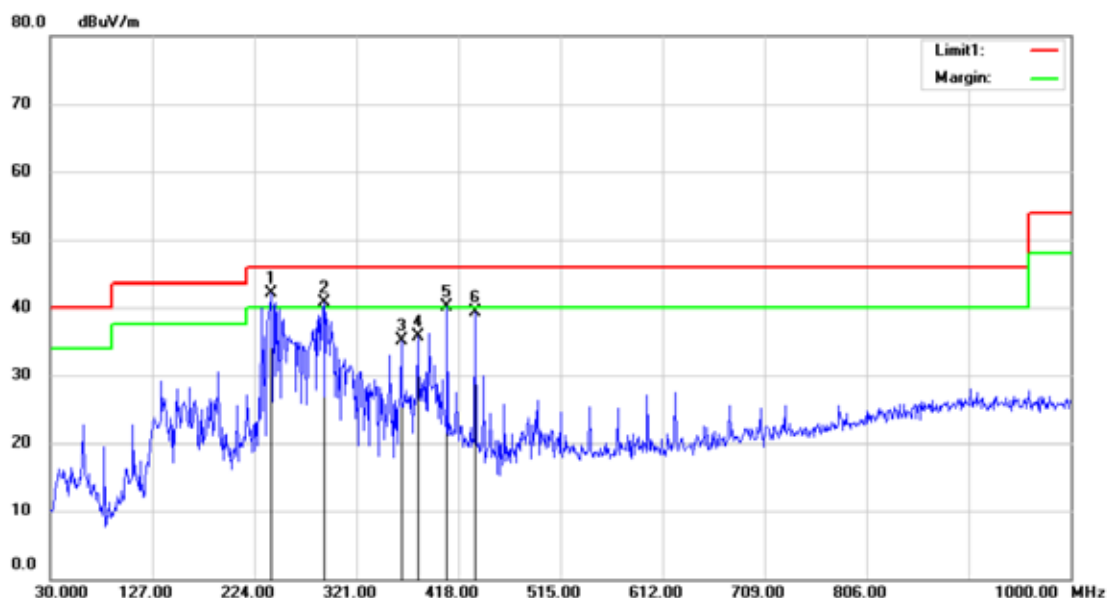

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

Mode:802.11b Mid Channel

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	240.4900	55.89	-13.81	42.08	46.00	-3.92	QP			
2	!	289.9600	53.94	-13.20	40.74	46.00	-5.26	QP			
3		363.6800	45.65	-10.59	35.06	46.00	-10.94	QP			
4		379.2000	45.64	-10.03	35.61	46.00	-10.39	QP			
5	!	407.3300	49.22	-9.07	40.15	46.00	-5.85	QP			
6		433.5200	49.87	-10.63	39.24	46.00	-6.76	QP			

*:Maximum data x:Over limit !:over margin

Operator: KK



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		81.4100	50.45	-19.15	31.30	40.00	-8.70	QP		
2		135.7300	50.31	-17.56	32.75	43.50	-10.75	QP		
3	*	247.2800	55.35	-13.46	41.89	46.00	-4.11	QP		
4		282.2000	49.54	-12.71	36.83	46.00	-9.17	QP		
5		407.3300	46.25	-9.07	37.18	46.00	-8.82	QP		
6		543.1300	40.37	-7.45	32.92	46.00	-13.08	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK



Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11b High Channel

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		135.7300	45.32	-17.56	27.76	43.50	-15.74	QP		
2		190.0500	47.50	-17.28	30.22	43.50	-13.28	QP		
3	*	245.3400	56.81	-13.56	43.25	46.00	-2.75	QP		
4		264.7400	52.27	-12.74	39.53	46.00	-6.47	QP		
5	!	407.3300	49.20	-9.07	40.13	46.00	-5.87	QP		
6		433.5200	46.82	-10.63	36.19	46.00	-9.81	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

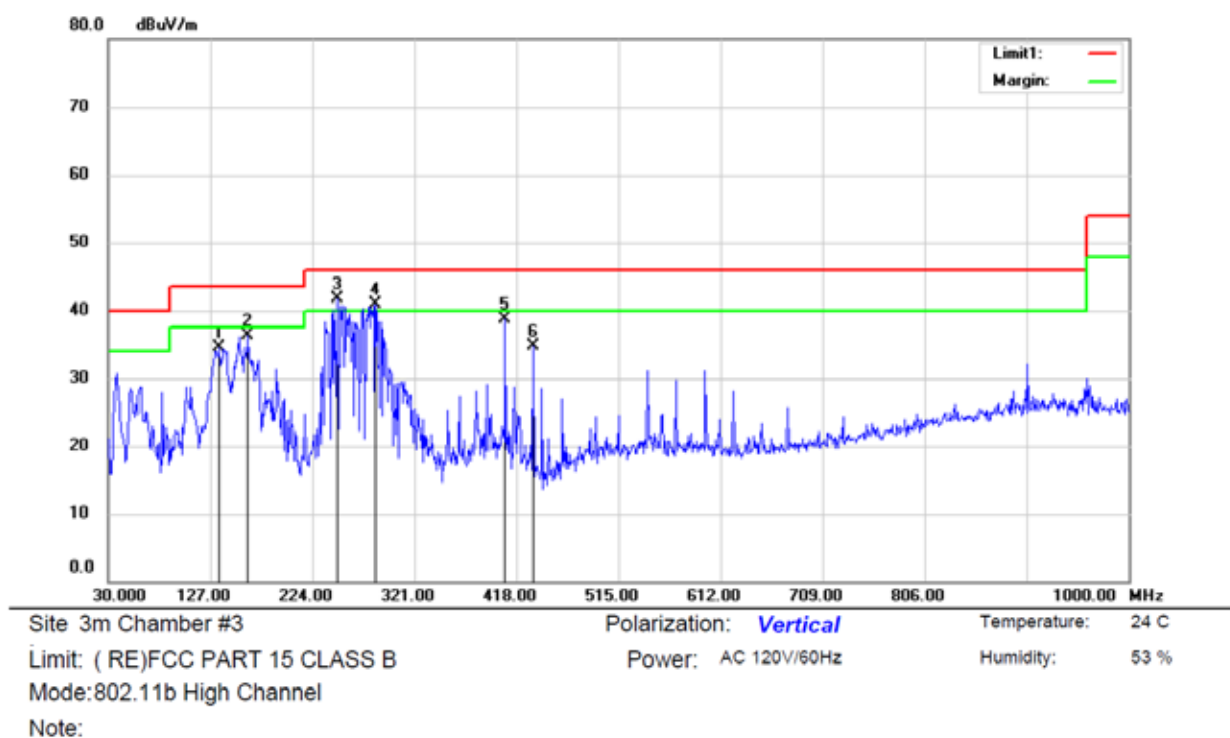

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		135.7300	52.14	-17.56	34.58	43.50	-8.92	QP		
2		162.8900	55.22	-18.92	36.30	43.50	-7.20	QP		
3	*	248.2500	55.14	-13.41	41.73	46.00	-4.27	QP		
4	!	284.1400	53.72	-12.83	40.89	46.00	-5.11	QP		
5		407.3300	47.69	-9.07	38.62	46.00	-7.38	QP		
6		433.5200	45.43	-10.63	34.80	46.00	-11.20	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature:	24	Test Date:	November 24, 2015
Humidity:	53 %	Test By:	YXL
Test mode:	802.11b	Frequency:	Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
15365.00	V	48.39	27.80	74.00	54.00	-25.61	-26.20
16521.00	V	50.03	35.60	74.00	54.00	-23.97	-18.40
17660.00	V	52.19	34.90	74.00	54.00	-21.81	-19.10
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
16793.00	H	50.38	31.20	74.00	54.00	-23.62	-22.80
17422.00	H	51.16	35.60	74.00	54.00	-22.84	-18.40
17779.00	H	51.99	34.90	74.00	54.00	-22.01	-19.10

Test mode:	802.11b	Frequency:	Channel 6: 2437MHz
------------	---------	------------	--------------------

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
15416.00	V	49.29	35.60	74.00	54.00	-24.71	-18.40
17082.00	V	50.07	34.90	74.00	54.00	-23.93	-19.10
17660.00	V	50.96	35.40	74.00	54.00	-23.04	-18.60
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
16113.00	H	49.29	32.50	74.00	54.00	-24.71	-21.50
16708.00	H	50.91	35.60	74.00	54.00	-23.09	-18.40
17439.00	H	51.85	35.80	74.00	54.00	-22.15	-18.20

Test mode:	802.11b	Frequency:	Channel 11: 2462MHz
------------	---------	------------	---------------------


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
16402.00	V	49.23	28.90	74.00	54.00	-24.77	-25.10
16963.00	V	50.09	35.40	74.00	54.00	-23.91	-18.60
17490.00	V	50.49	32.80	74.00	54.00	-23.51	-21.20
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
15875.00	H	49.80	31.80	74.00	54.00	-24.20	-22.20
16385.00	H	50.93	35.90	74.00	54.00	-23.07	-18.10
16929.00	H	51.33	35.60	74.00	54.00	-22.67	-18.40

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.


(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

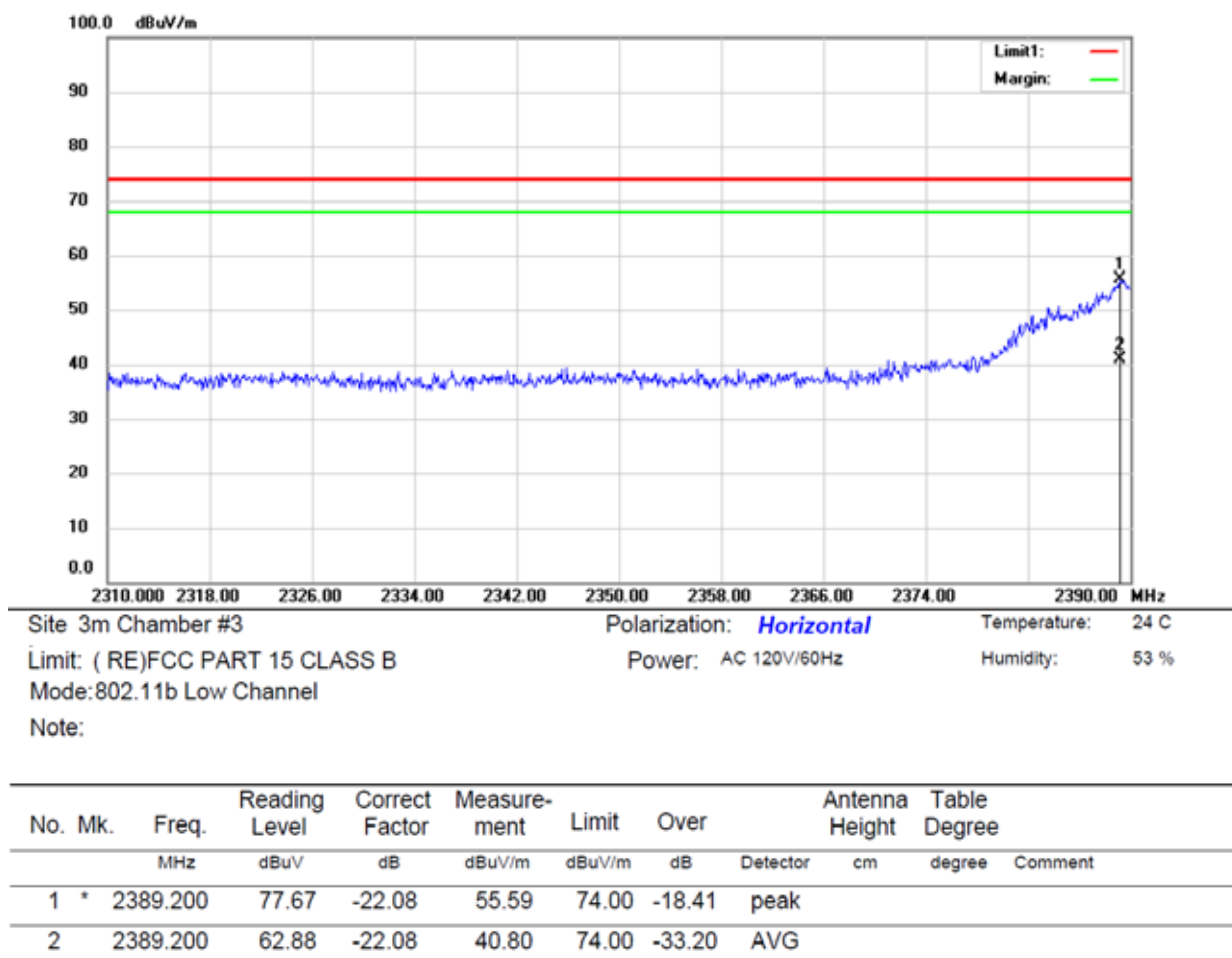

*:Maximum data x:Over limit !:over margin

Operator: KK

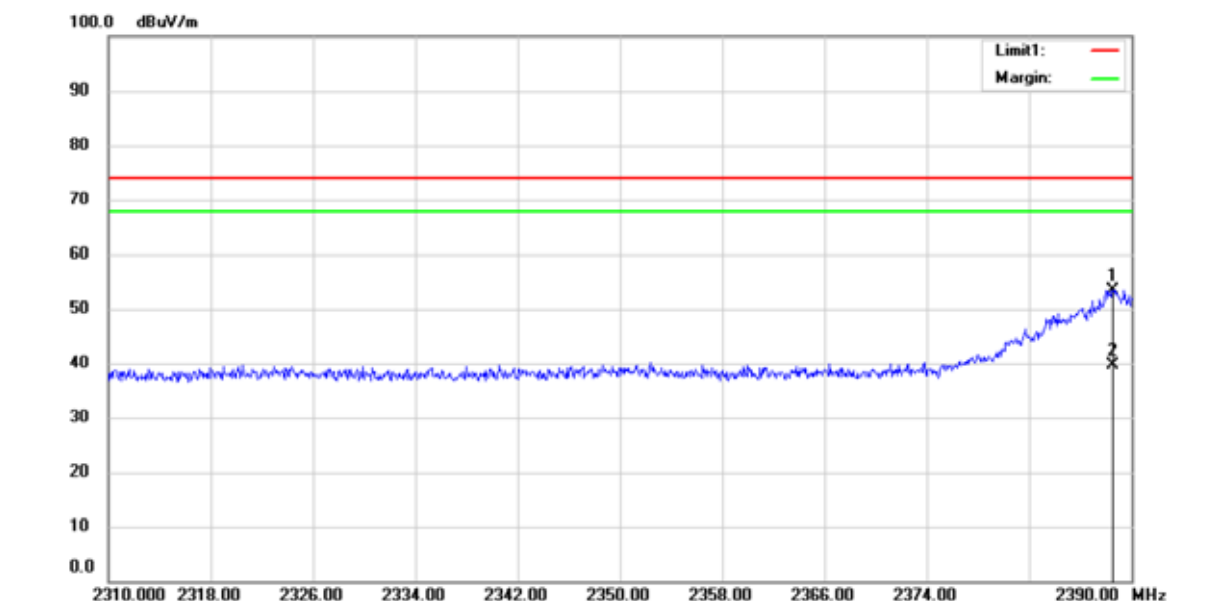


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11b Low Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2388.560	75.53	-22.08	53.45	74.00	-20.55	peak		
2		2388.560	61.68	-22.08	39.60	74.00	-34.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

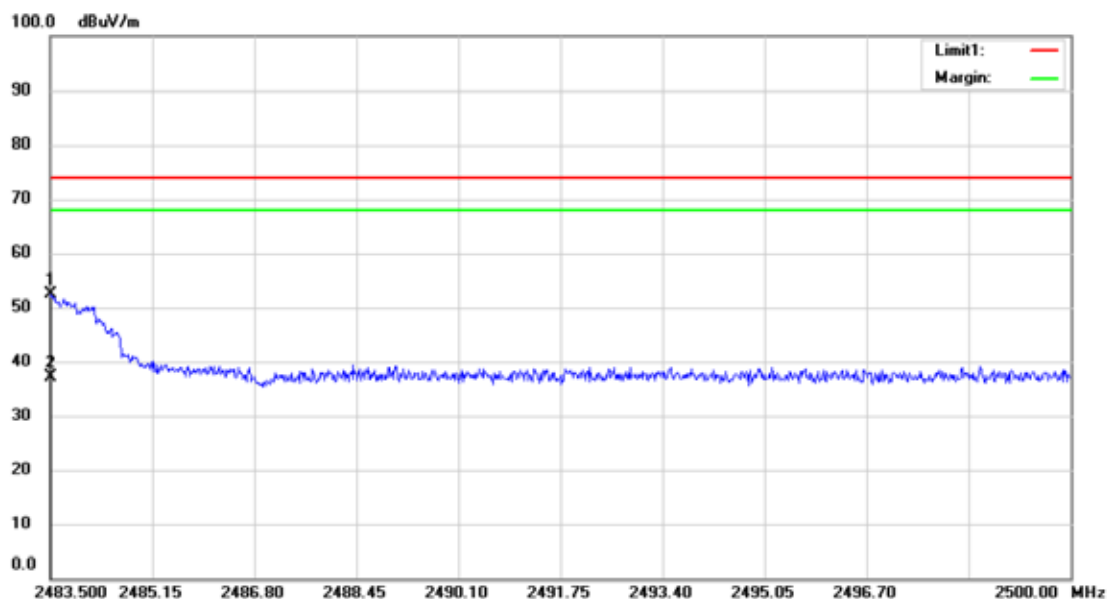


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11b High Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.517	74.19	-21.84	52.35	74.00	-21.65	peak		
2		2483.517	59.04	-21.84	37.20	74.00	-36.80	AVG		

*:Maximum data x:Over limit !:over margin


Operator: KK

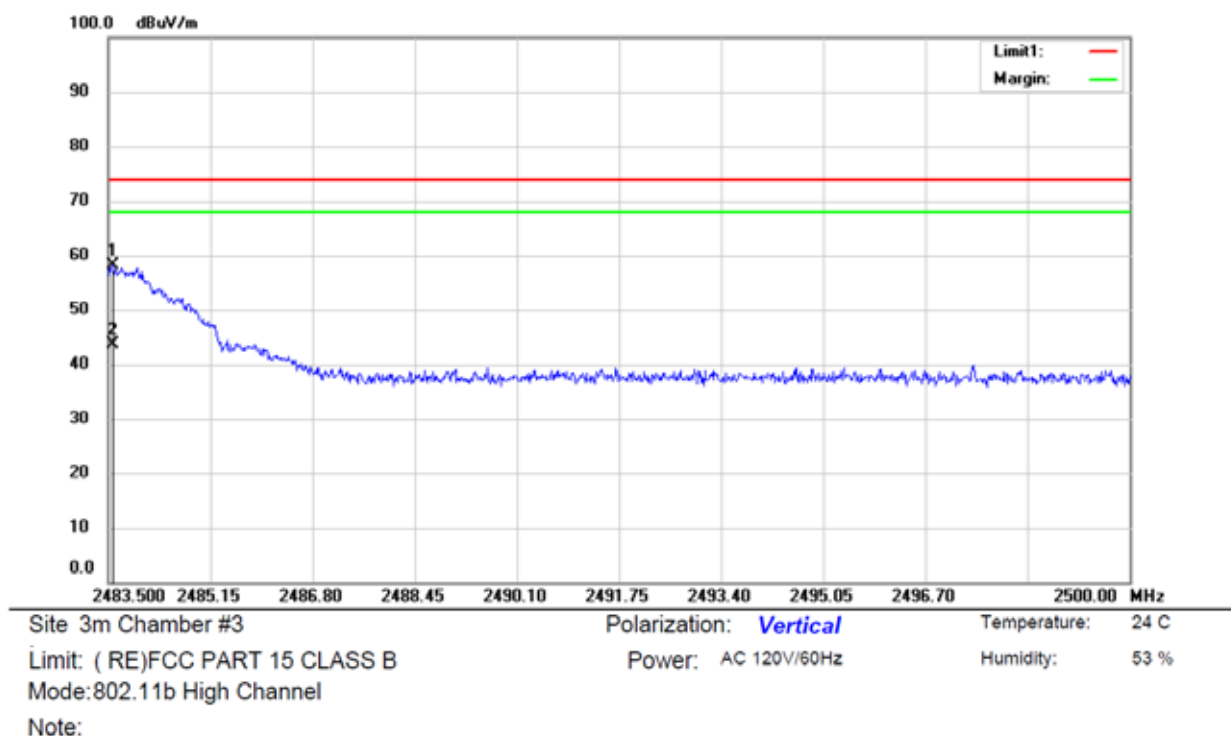

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	2483.582	80.08	-21.84	58.24	74.00	-15.76	peak			
2		2483.582	65.44	-21.84	43.60	74.00	-30.40	AVG			

*:Maximum data x:Over limit !:over margin


Operator: KK

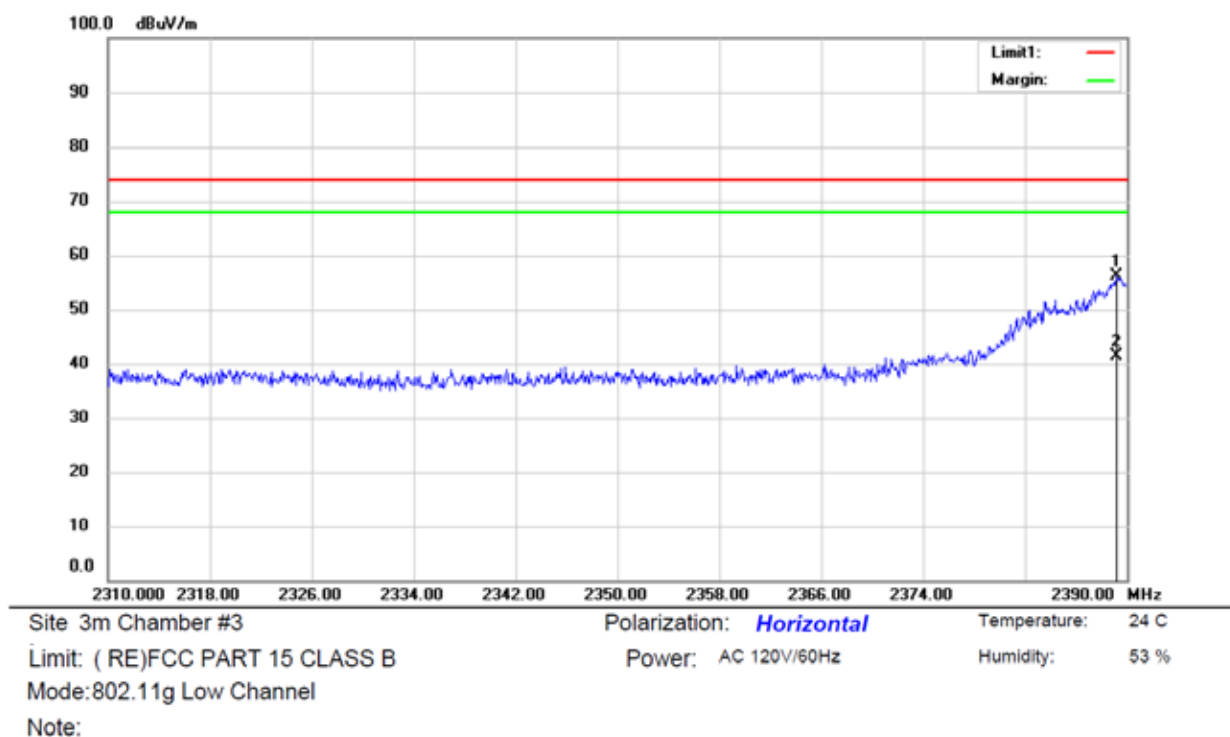

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2389.200	78.17	-22.08	56.09	74.00	-17.91	peak		
2		2389.200	63.58	-22.08	41.50	74.00	-32.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

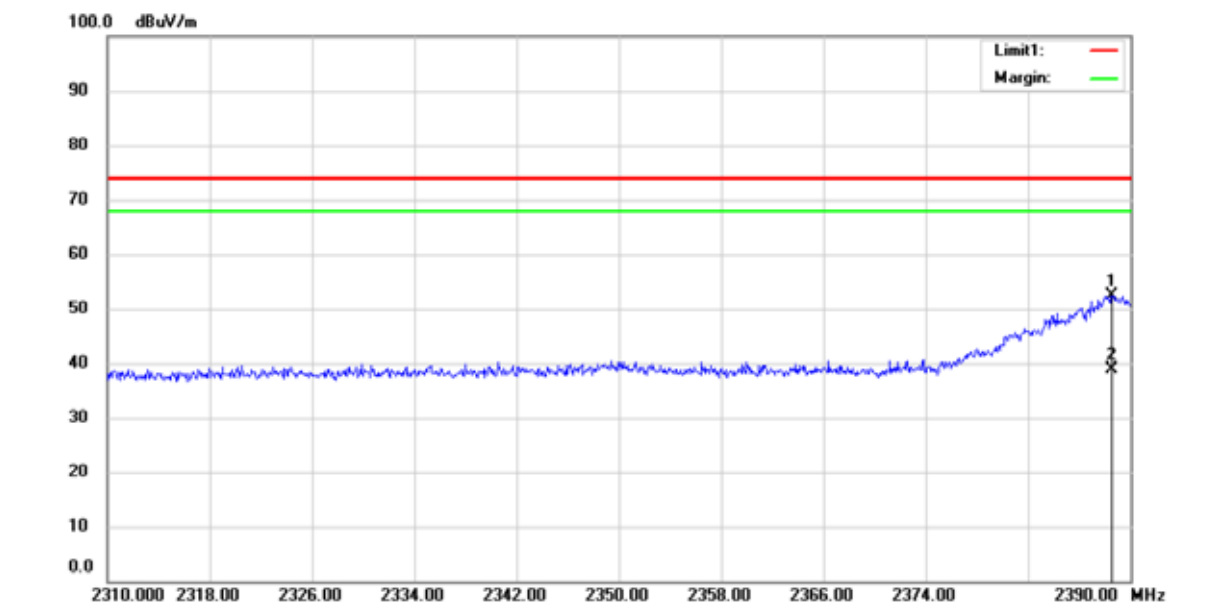


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11g Low Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2388.560	74.53	-22.08	52.45	74.00	-21.55	peak		
2		2388.560	60.98	-22.08	38.90	74.00	-35.10	AVG		

*:Maximum data x:Over limit !:over margin


Operator: KK

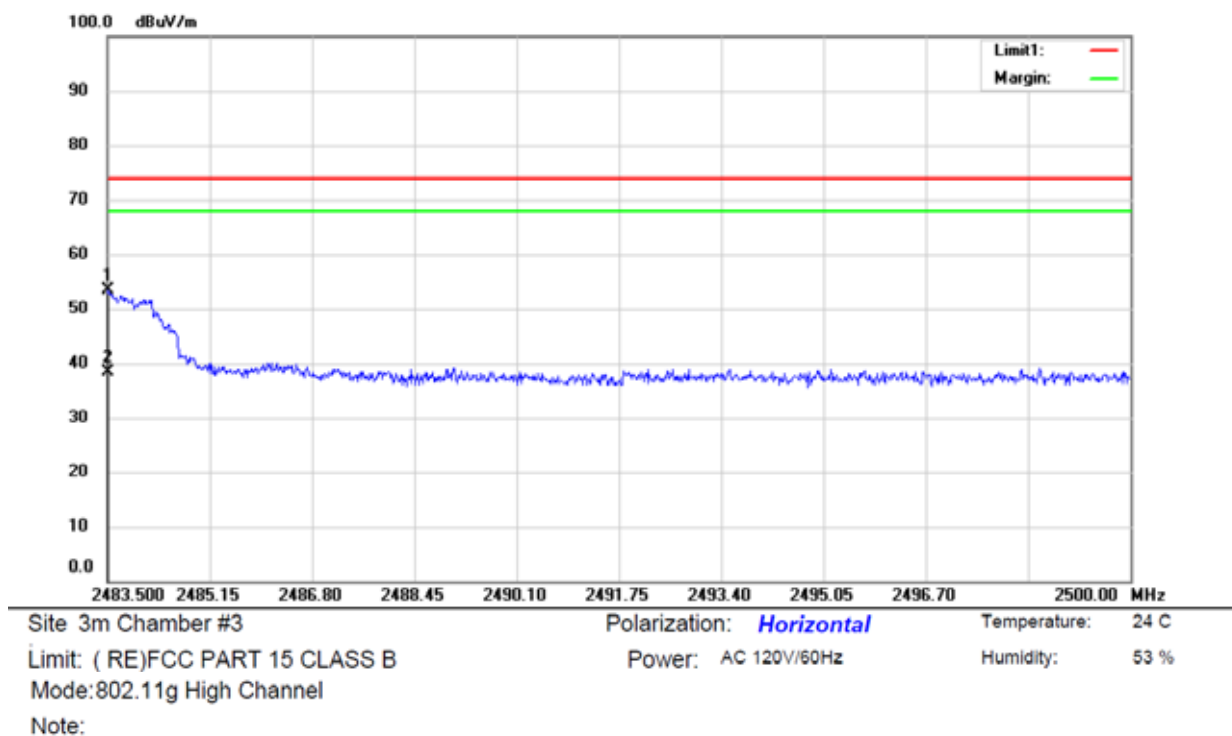

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.517	75.19	-21.84	53.35	74.00	-20.65			peak
2		2483.517	60.24	-21.84	38.40	74.00	-35.60			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK

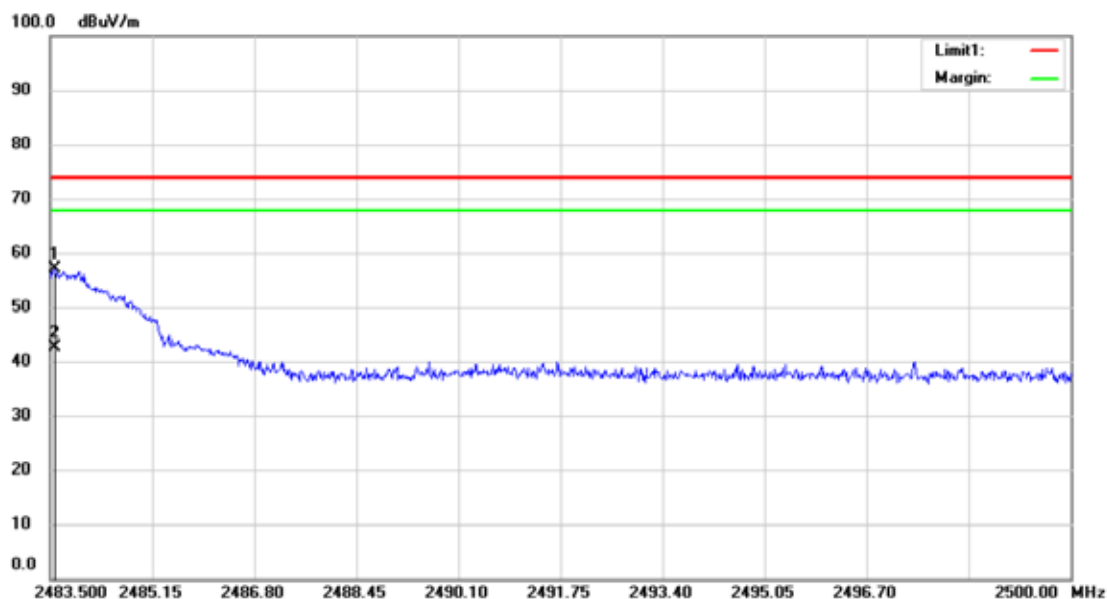


Site 3m Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 Mode:802.11g High Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.582	79.08	-21.84	57.24	74.00	-16.76			peak
2		2483.582	64.54	-21.84	42.70	74.00	-31.30			AVG

*:Maximum data x:Over limit l:over margin


Operator: KK

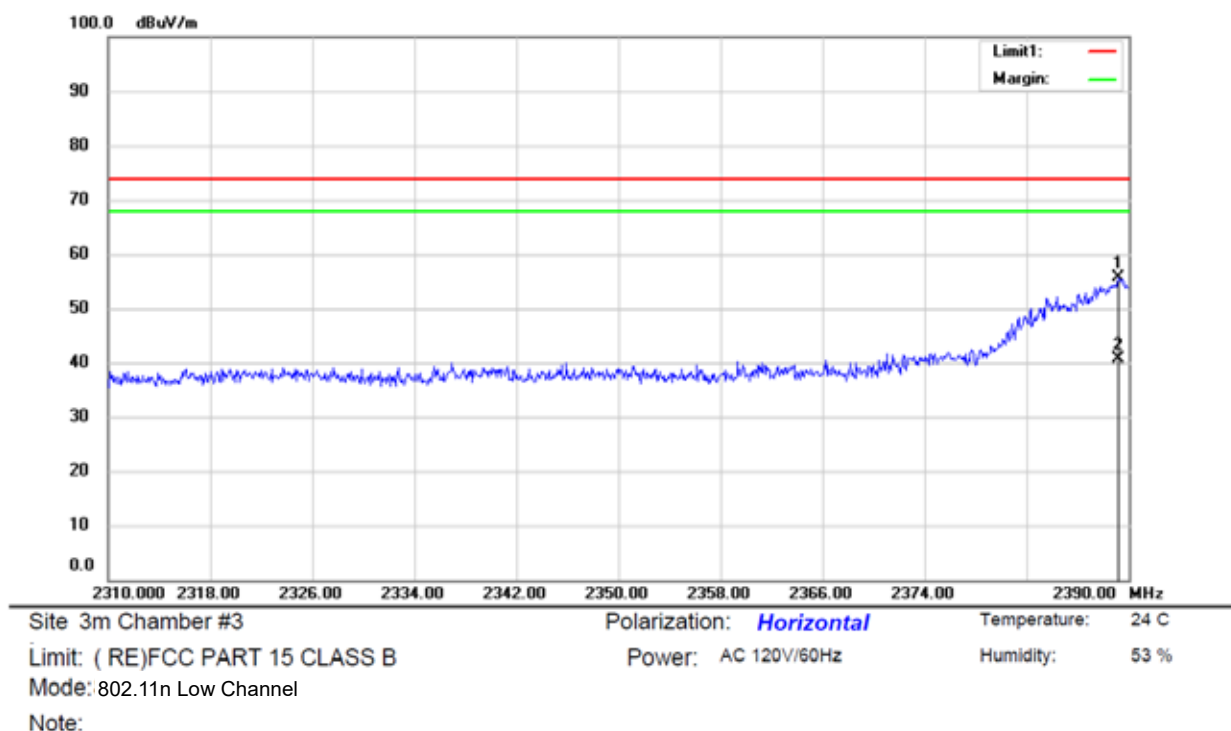

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2389.200	77.67	-22.08	55.59	74.00	-18.41			peak
2		2389.200	62.78	-22.08	40.70	74.00	-33.30			AVG

*:Maximum data x:Over limit !:over margin


Operator: KK

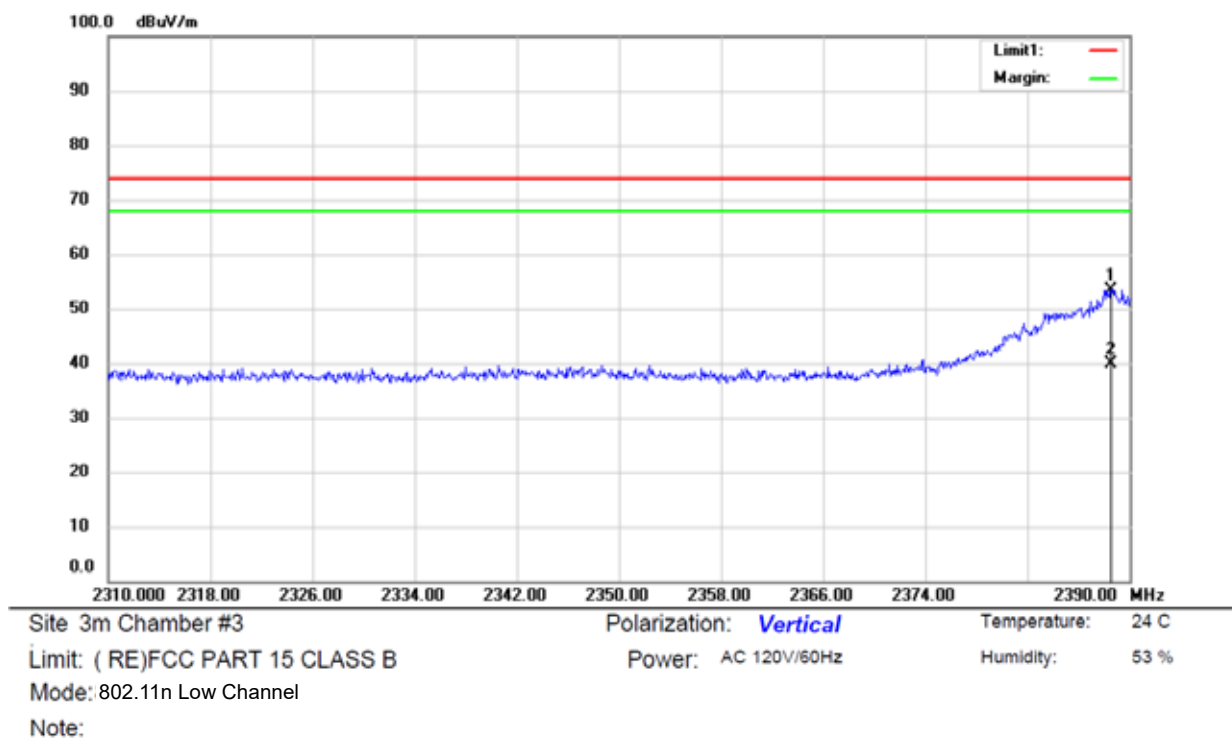

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	
1	*	2388.560	75.53	-22.08	53.45	74.00	-20.55	peak		
2		2388.560	61.88	-22.08	39.80	74.00	-34.20	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

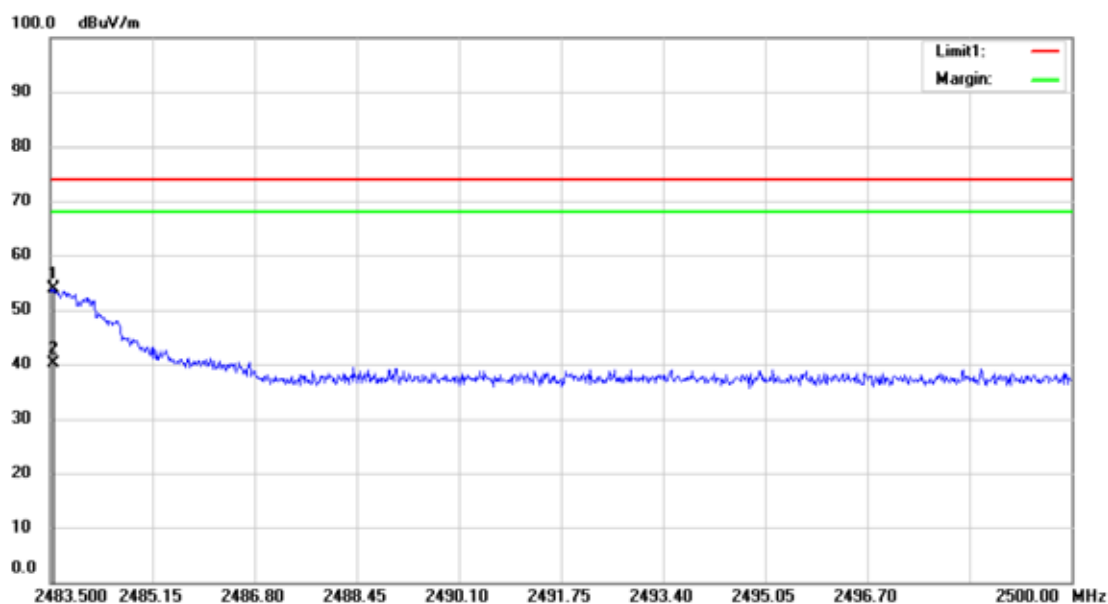


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 Mode: 802.11n High Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2483.550	75.79	-21.84	53.95	74.00	-20.05	peak		
2		2483.550	62.04	-21.84	40.20	74.00	-33.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

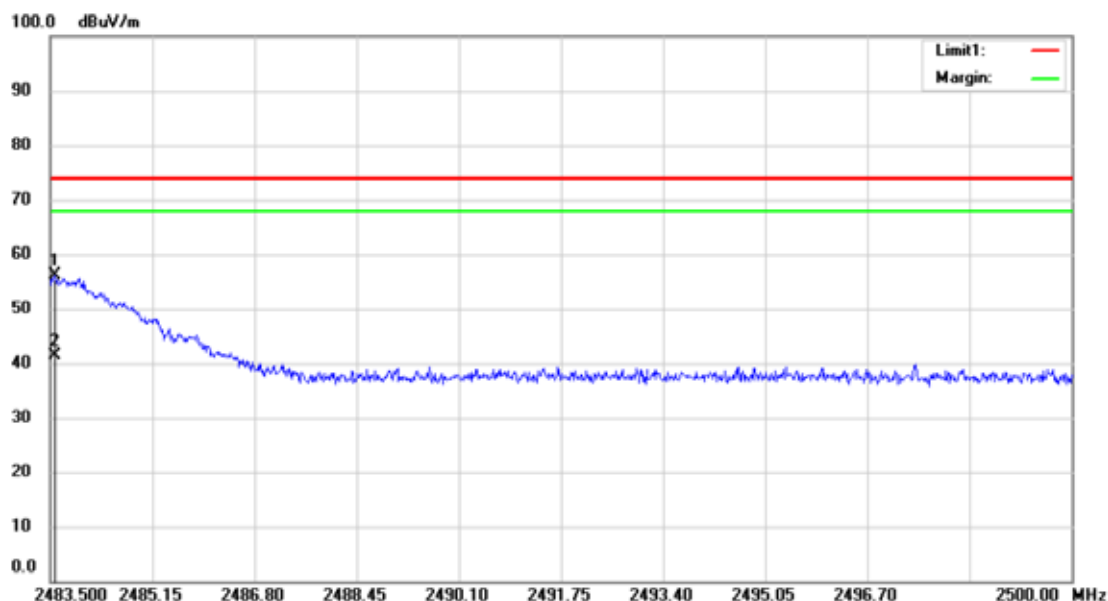

Site: 3m Chamber #3
 Limit: (RE)FCC PART 15 CLASS B
 Mode: 802.11n High Channel
 Note:

Polarization: *Vertical*
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2483.582	78.08	-21.84	56.24	74.00	-17.76	peak		
2		2483.582	63.14	-21.84	41.30	74.00	-32.70	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

8.6 CONDUCTED EMISSION TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

8.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

PASS.

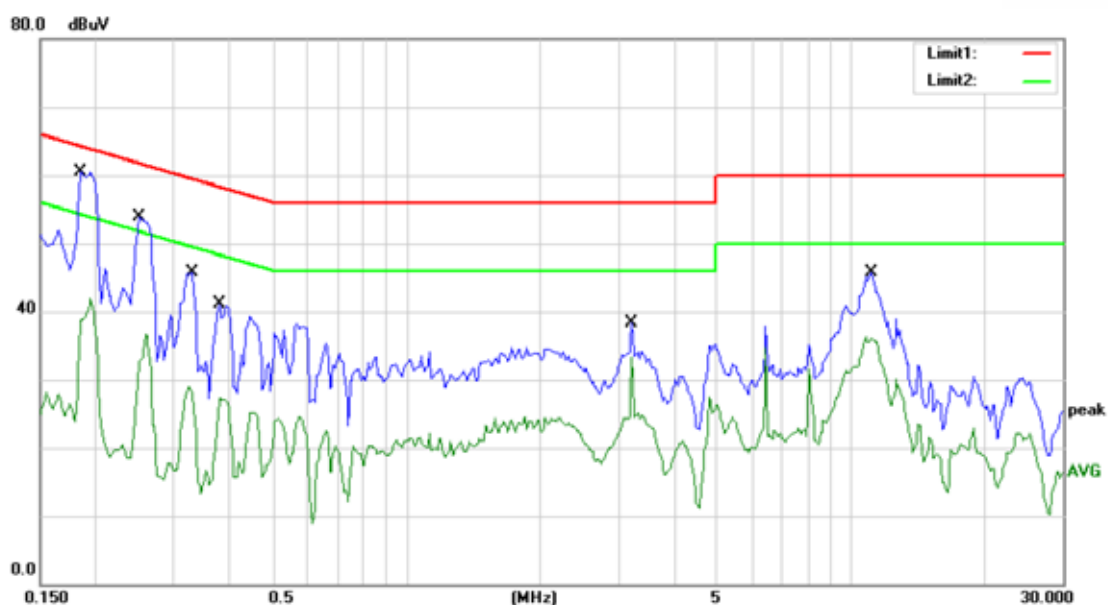

Site Conduction #1

Phase: **L1**

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 60 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1850	60.56	0.00	60.56	64.26	-3.70	QP	
2		0.1850	41.97	0.00	41.97	54.26	-12.29	AVG	
3		0.2500	53.96	0.00	53.96	61.76	-7.80	QP	
4		0.2500	36.71	0.00	36.71	51.76	-15.05	AVG	
5		0.3300	45.61	0.00	45.61	59.45	-13.84	QP	
6		0.3300	28.87	0.00	28.87	49.45	-20.58	AVG	
7		0.3800	41.10	0.00	41.10	58.28	-17.18	QP	
8		0.3800	27.31	0.00	27.31	48.28	-20.97	AVG	
9		3.2100	38.23	0.00	38.23	56.00	-17.77	QP	
10		3.2100	33.26	0.00	33.26	46.00	-12.74	AVG	
11		11.1250	45.62	0.00	45.62	60.00	-14.38	QP	
12		11.1250	36.32	0.00	36.32	50.00	-13.68	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

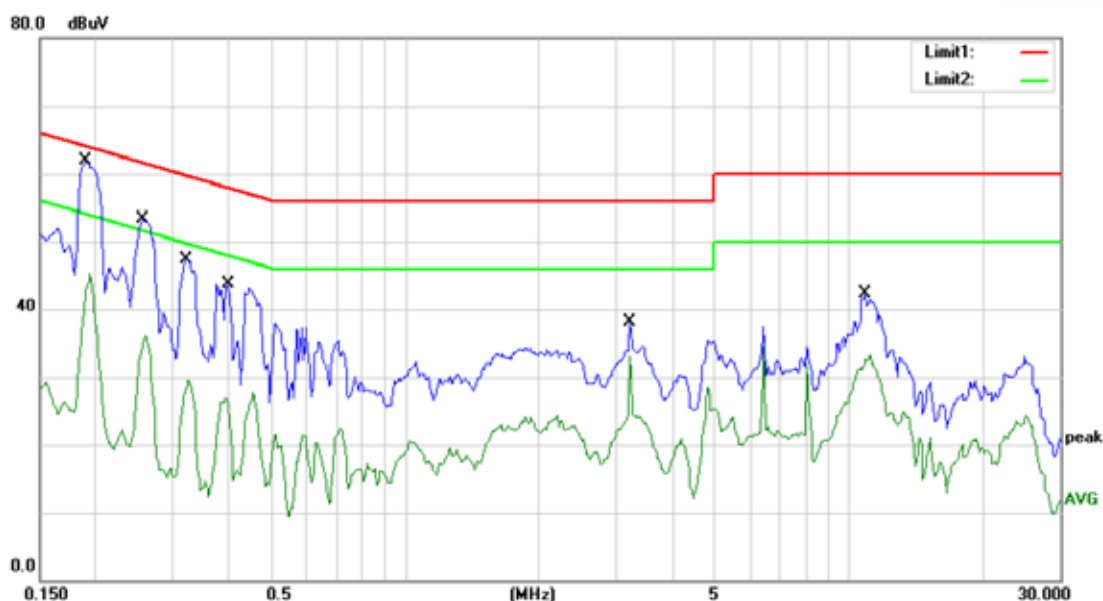


Site Conduction #1
 Limit: (CE)FCC PART 15 class B_QP
 Mode: ON
 Note:

Phase: **N**
 Power: AC 120V/60Hz
 Temperature: 26
 Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1900	59.21	0.00	59.21	64.04	-4.83	QP	
2		0.1900	45.29	0.00	45.29	54.04	-8.75	AVG	
3		0.2550	53.30	0.00	53.30	61.59	-8.29	QP	
4		0.2550	36.03	0.00	36.03	51.59	-15.56	AVG	
5		0.3200	47.36	0.00	47.36	59.71	-12.35	QP	
6		0.3200	29.49	0.00	29.49	49.71	-20.22	AVG	
7		0.4000	43.76	0.00	43.76	57.85	-14.09	QP	
8		0.4000	27.63	0.00	27.63	47.85	-20.22	AVG	
9		3.2100	38.06	0.00	38.06	56.00	-17.94	QP	
10		3.2100	33.18	0.00	33.18	46.00	-12.82	AVG	
11		10.9250	42.34	0.00	42.34	60.00	-17.66	QP	
12		10.9250	33.29	0.00	33.29	50.00	-16.71	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

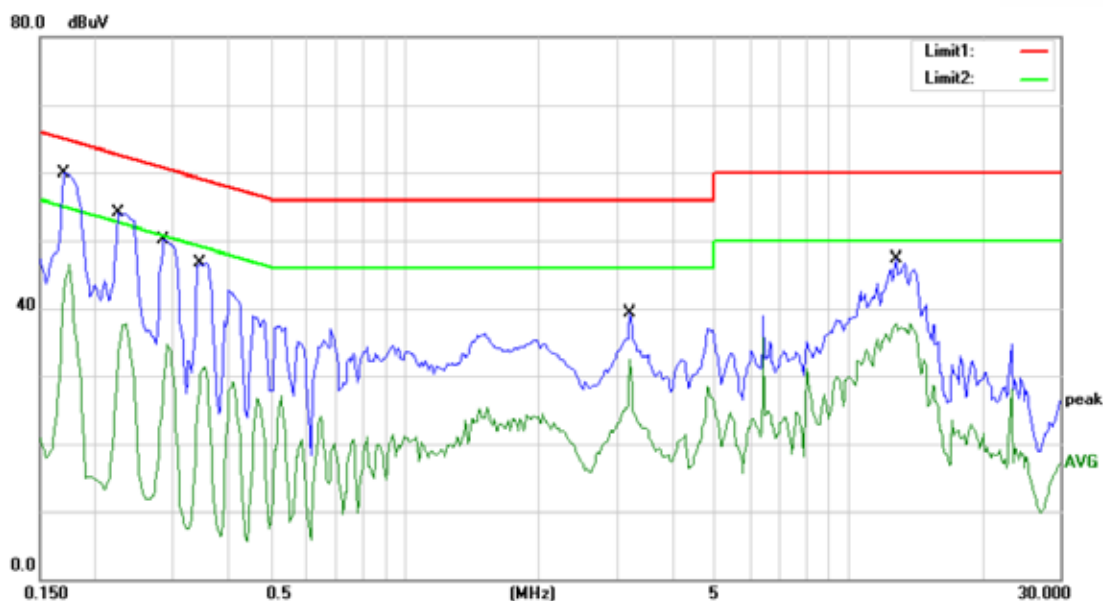

Site Conduction #1

Phase: **L1**

Temperature: 26

Limit: (CE)FCC PART 15 class B_QP

Power: AC 240V/50Hz


Humidity: 60 %

Mode: ON

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1700	59.92	0.00	59.92	64.96	-5.04	QP	
2		0.1700	46.57	0.00	46.57	54.96	-8.39	AVG	
3		0.2250	54.11	0.00	54.11	62.63	-8.52	QP	
4		0.2250	37.62	0.00	37.62	52.63	-15.01	AVG	
5		0.2850	50.15	0.00	50.15	60.67	-10.52	QP	
6		0.2850	34.74	0.00	34.74	50.67	-15.93	AVG	
7		0.3450	46.69	0.00	46.69	59.08	-12.39	QP	
8		0.3450	31.36	0.00	31.36	49.08	-17.72	AVG	
9		3.2100	39.22	0.00	39.22	56.00	-16.78	QP	
10		3.2100	32.56	0.00	32.56	46.00	-13.44	AVG	
11		12.8000	47.25	0.00	47.25	60.00	-12.75	QP	
12		12.8000	37.77	0.00	37.77	50.00	-12.23	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

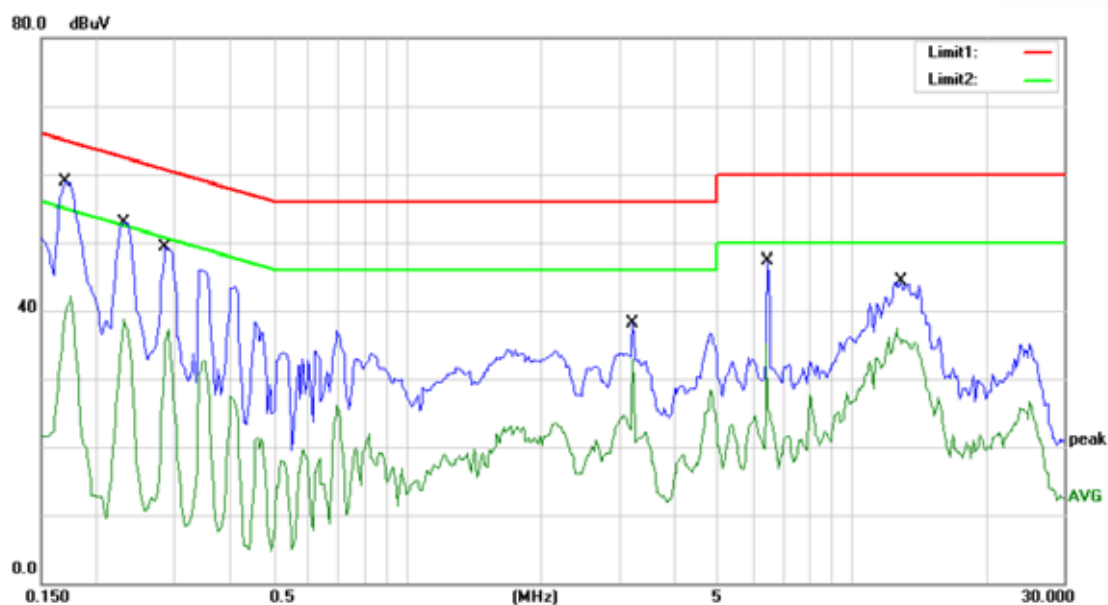

Site Conduction #1

Limit: (CE)FCC PART 15 class B_QP

Mode: ON

Note:

Phase: **N**

Power: AC 240V/50Hz

Temperature: 26

Humidity: 60 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1700	58.89	0.00	58.89	64.96	-6.07	QP	
2		0.1700	42.03	0.00	42.03	54.96	-12.93	AVG	
3		0.2300	52.90	0.00	52.90	62.45	-9.55	QP	
4		0.2300	38.70	0.00	38.70	52.45	-13.75	AVG	
5		0.2850	49.24	0.00	49.24	60.67	-11.43	QP	
6		0.2850	37.37	0.00	37.37	50.67	-13.30	AVG	
7		3.2100	38.14	0.00	38.14	56.00	-17.86	QP	
8		3.2100	32.97	0.00	32.97	46.00	-13.03	AVG	
9		6.4700	47.34	0.00	47.34	60.00	-12.66	QP	
10		6.4700	35.11	0.00	35.11	50.00	-14.89	AVG	
11		12.9500	44.38	0.00	44.38	60.00	-15.62	QP	
12		12.9500	37.43	0.00	37.43	50.00	-12.57	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

The EUT'S antenna is PCB antenna, and the antenna can't be replaced by the user, which in accordance to section 15.203, please refer to the internal photos. The antenna's gain is 5.3dBi and meets the requirement.

END OF REPORT