

FCC PART 15.247



TEST REPORT

For

Hangzhou Jiangwu Network Technology Co., Ltd

Room 201, No2, Building Zhongtian MCC, Tongpu Road, Xihu District, Hangzhou

FCC ID:2AHB4AWWCP1601

Report Type: Original Report	Product Type: WeCoach
Test Engineer: Matt Yao	
Report Number: RKS160121001-00B	
Report Date: 2016-02-04	
Jesse Huang	
Reviewed By: EMC Manager	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC§15.247 (i), §1.1310 &§2.1093 –RF EXPOSURE	9
APPLICABLE STANDARD	9
MEASUREMENT RESULT	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLIED STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLIED STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	23
APPLIED STANDARD	23
TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	23

TEST DATA	23
FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	26
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	29
APPLIED STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	30
FCC §15.247(e) - POWER SPECTRAL DENSITY	32
APPLIED STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Hangzhou Jiangwu Network Technology Co., Ltd's product, model number: WeCoach Pro S (FCC ID: 2AHB4AWWCP1601) or ("EUT") in this report is a WeCoach, which was measured approximately: 39mm(L) x 40mm(W)x22mm(H). Rated input voltage: DC 5 V from micro-USB port.

The EUT use a built-in Lithium polymer battery:DC 3.3V.

All measurement and test data in this report was gathered from production sample serial number: 160115010 (Assigned by BACL, Kunshan). The EUT was received on on 2016-01-15.

Objective

This report is prepared on behalf of Hangzhou Jiangwu Network Technology Co., Ltd. in accordance with Part 2-Subpart J, Part 15- Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v03r04.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.87 dB for 30MHz-1GHz, and 4.84 dB for above 1GHz, 1.85dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineer mode.

EUT Exercise Software

N/A

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	T400	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	0.9	EUT	PC

Block Diagram of Test Setup

Radiation emission

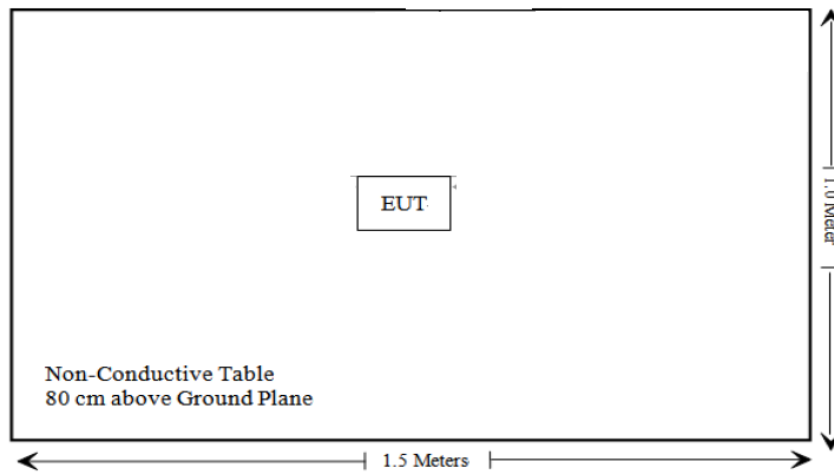

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1310& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a),	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC§15.247 (i), §1.1310 &§2.1093 –RF EXPOSURE**Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum tune-up average power = 2 dBm (1.58mW) at 2402~2480MHz
$$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$$
$$= 1.58/5 \cdot (\sqrt{2.480}) = 0.50 < 3.0$$

Note: Tune-up average power = 1dBm ± 1 , which declared by the Manufacturer.

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applied Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has a PCB antenna arrangement for Bluetooth, which the antenna gain is 3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Kunshan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

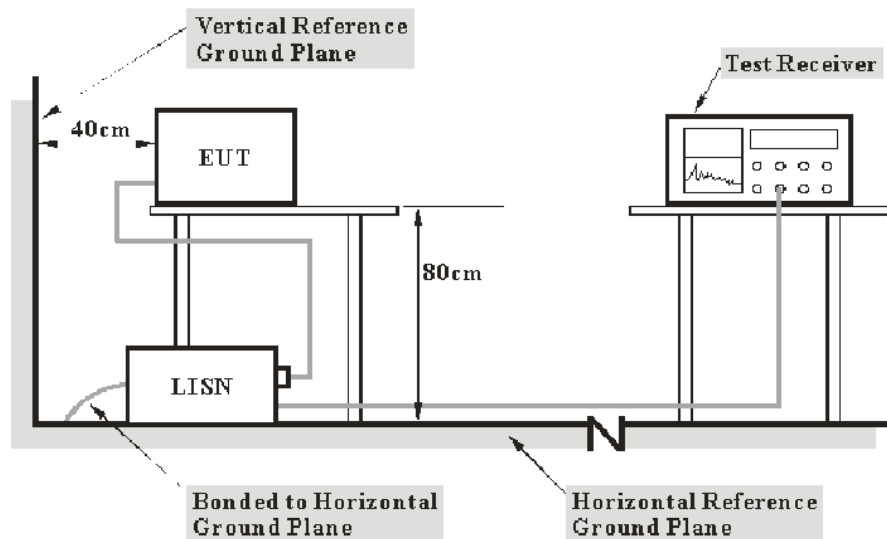

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	892239/018	2015-6-23	2016-6-22
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2015-6-19	2016-6-18
HP	Current probe	8710-1744	636	2015-6-19	2016-6-18
FCC	ISN	FCC-TLISN-T8-02	20376	2015-6-23	2016-6-22
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2015-10-01	2016-10-01
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

23.10 dB at 1.310000 MHz in the Neutral conducted mode

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-01-26

EUT operation mode: Transmitting

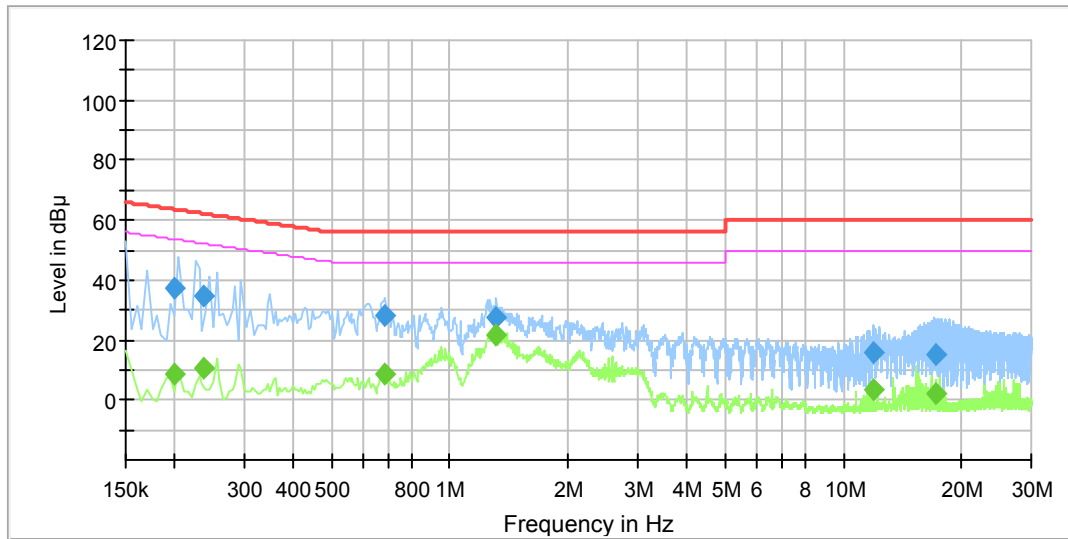AC 120V/60 Hz, Line

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.198500	---	8.34	9.000	L1	11.0	45.33	53.67	Compliance
0.198500	37.44	---	9.000	L1	11.0	26.23	63.67	Compliance
0.236500	---	10.51	9.000	L1	11.0	41.71	52.22	Compliance
0.236500	34.56	---	9.000	L1	11.0	27.66	62.22	Compliance
0.682500	---	8.86	9.000	L1	11.1	37.14	46.00	Compliance
0.682500	28.22	---	9.000	L1	11.1	27.78	56.00	Compliance
1.311500	---	21.63	9.000	L1	11.1	24.37	46.00	Compliance
1.311500	27.83	---	9.000	L1	11.1	28.17	56.00	Compliance
11.929500	---	3.32	9.000	L1	11.3	46.68	50.00	Compliance
11.929500	15.71	---	9.000	L1	11.3	44.29	60.00	Compliance
17.087500	---	2.46	9.000	L1	11.4	47.54	50.00	Compliance
17.087500	14.92	---	9.000	L1	11.4	45.08	60.00	Compliance

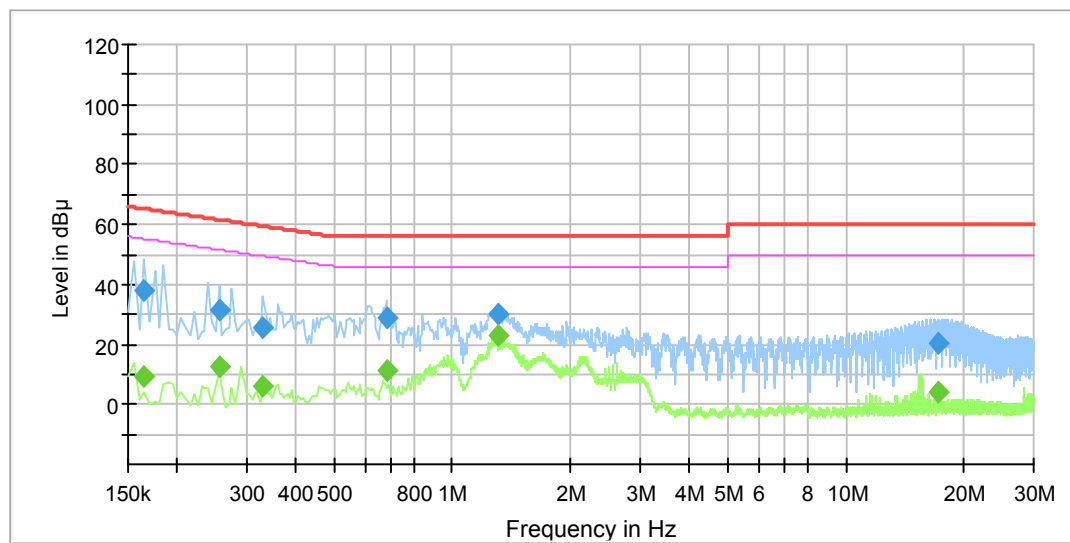AC 120V/60 Hz, Neutral

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.165000	---	9.42	9.000	N	11.0	45.79	55.21	Compliance
0.165000	38.26	---	9.000	N	11.0	26.95	65.21	Compliance
0.255000	---	12.55	9.000	N	11.0	39.04	51.59	Compliance
0.255000	31.37	---	9.000	N	11.0	30.22	61.59	Compliance
0.330000	---	6.06	9.000	N	11.0	43.39	49.45	Compliance
0.330000	25.28	---	9.000	N	11.0	34.17	59.45	Compliance
0.680000	---	11.06	9.000	N	11.1	34.94	46.00	Compliance
0.680000	29.13	---	9.000	N	11.1	26.87	56.00	Compliance
1.310000	---	22.90	9.000	N	11.1	23.10	46.00	Compliance
1.310000	29.91	---	9.000	N	11.1	26.09	56.00	Compliance
17.140000	---	3.85	9.000	N	11.4	46.15	50.00	Compliance
17.140000	20.29	---	9.000	N	11.4	39.71	60.00	Compliance

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applied Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Kunshan) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

Below 1GHz

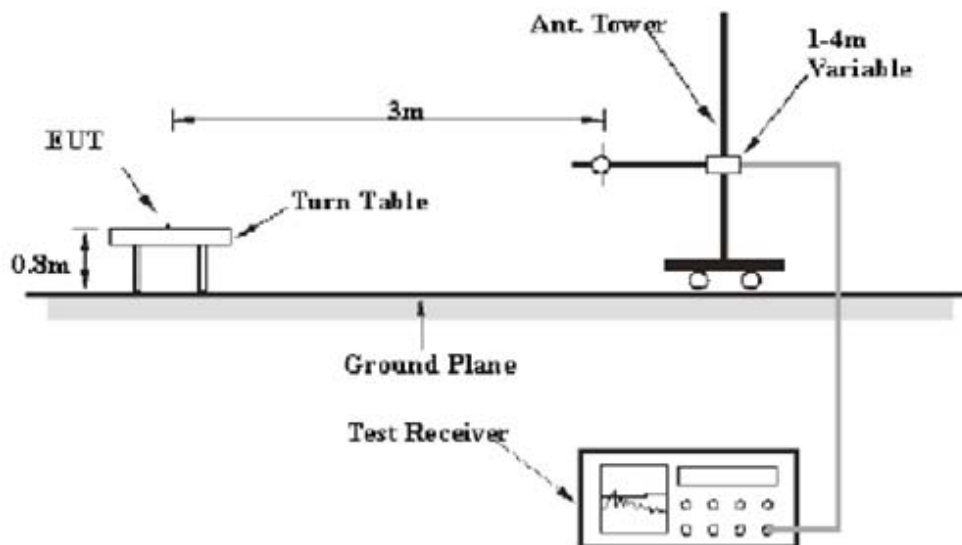

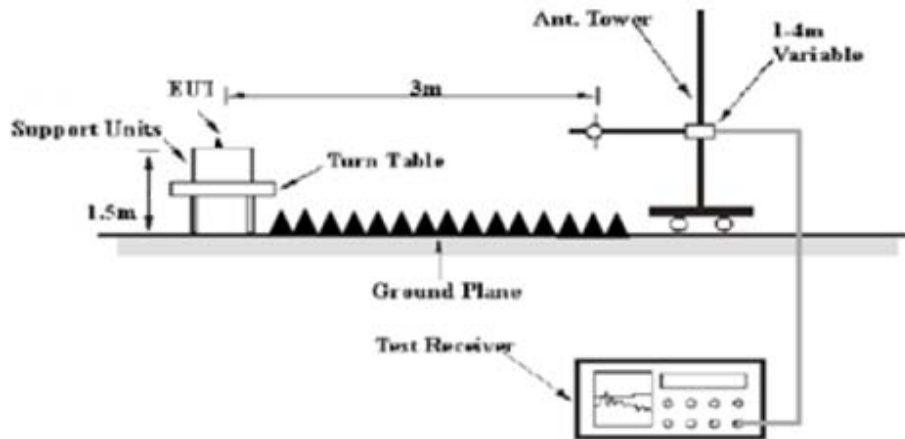Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	330	171377	2015-09-16	2016-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Mini	Pre-amplifier	ZVA-183-S+	857001418	2015-09-16	2016-09-16
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2015-09-16	2016-09-16
champrotek	Chamber	Chamber A	1#	2015-09-17	2016-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, the worst margin reading as below:

11.97dB at 7440 MHz in the Vertical polarization

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-02-01

30MHz-1GHz:

EUT operation mode: Normal operation

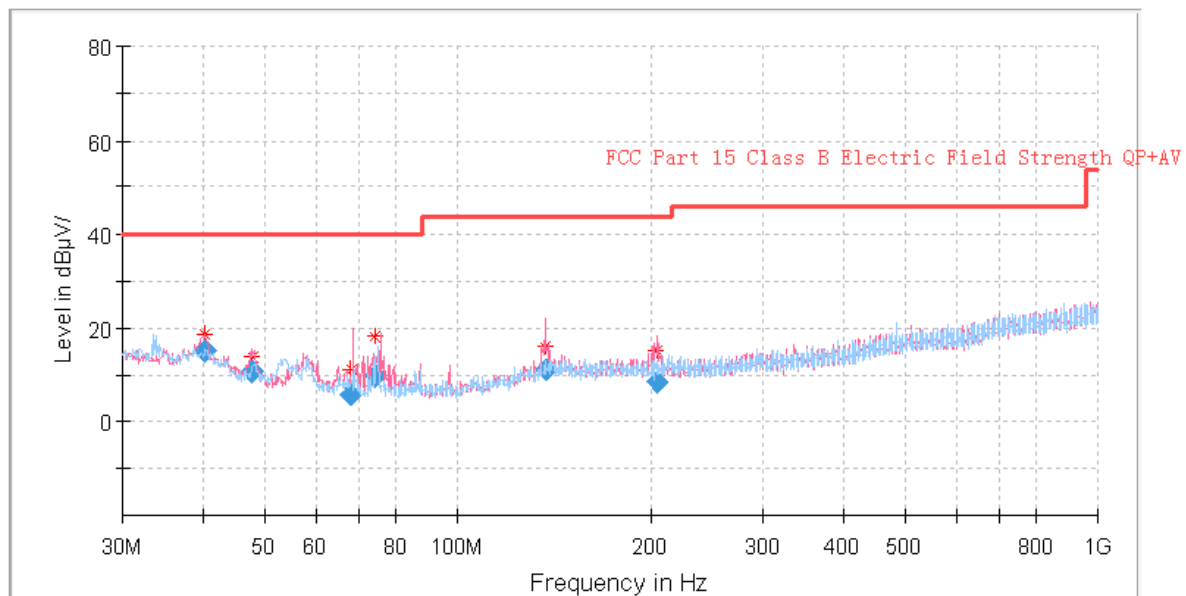

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
40.376300	25.59	QP	272.0	100.0	V	-10.5	15.09	40.00	24.91
47.702300	25.67	QP	201.0	100.0	V	-15.0	10.67	40.00	29.33
68.153600	22.82	QP	220.0	100.0	V	-17.0	5.82	40.00	34.18
74.429650	27.12	QP	346.0	100.0	V	-17.1	10.02	40.00	29.98
137.628100	23.45	QP	244.0	100.0	V	-12.2	11.25	43.50	32.25
204.102400	20.69	QP	296.0	100.0	V	-12.3	8.39	43.50	35.11

1GHz-25 GHz*EUT operation mode: Transmitting*


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
2402	92.45	PK	170	150	V	3.0	95.45	/	/
2402	81.89	Ave	170	150	V	3.0	84.89	/	/
2402	91.77	PK	220	200	H	3.0	94.77	/	/
2402	80.97	Ave	220	200	H	3.0	83.97	/	/
2355	31.12	Ave	39	150	H	4.1	35.22	54	18.78
2355	39.79	PK	39	150	H	4.1	43.89	74	30.11
2397	24.03	Ave	48	150	V	4.1	28.13	54	25.87
2397	36.72	PK	48	150	V	4.1	40.82	74	33.18
4804	30.39	PK	344	200	V	13.4	43.79	74	30.21
4804	16.72	Ave	344	200	V	13.4	30.12	54	23.88
6990	20.41	Ave	256	150	V	19.8	40.21	54	13.79
6990	33.78	PK	256	150	V	19.8	53.58	74	20.42
7206	29.81	PK	31	150	V	20.3	50.11	74	23.89
7206	15.98	Ave	31	150	V	20.3	36.28	54	17.72

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Middle Channel (2440MHz)									
2440	93.29	PK	168	150	V	2.6	95.89	/	/
2440	82.94	Ave	168	150	V	2.6	85.54	/	/
2440	93.03	PK	168	150	H	2.6	95.63	/	/
2440	82.27	Ave	168	150	H	2.6	84.87	/	/
1494	23.02	Ave	155	200	V	0.1	23.12	54	30.88
1494	36.08	PK	155	200	V	0.1	36.18	74	37.82
3457	27.43	Ave	320	150	V	9.8	37.23	54	16.77
3457	36.98	PK	320	150	V	9.8	46.78	74	27.22
4880	29.93	PK	354	200	V	13.9	43.83	74	30.17
4880	16.49	Ave	354	200	V	13.9	30.39	54	23.61
6625	34.33	PK	112	150	H	18.2	52.53	74	21.47
6625	20.88	Ave	112	150	H	18.2	39.08	54	14.92
7320	29.81	PK	31	150	V	20.8	50.61	74	23.39
7320	15.54	Ave.	31	150	V	20.8	36.34	54	17.66


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
High Channel (2480 MHz)									
2480	91.72	PK	42	150	V	3.2	94.92	/	/
2480	81.12	Ave	42	150	V	3.2	84.32	/	/
2480	90.56	PK	42	200	H	3.2	93.76	/	/
2480	80.45	Ave	42	200	H	3.2	83.65	/	/
2362	33.25	PK	227	150	V	4.9	38.15	74	35.85
2362	20.04	Ave	227	150	V	4.9	24.94	54	29.06
2390	33.82	PK	224	150	H	4.9	38.72	74	35.28
2390	20.04	Ave	224	150	H	4.9	24.94	54	29.06
2500	32.86	PK	13	200	V	4.9	37.76	74	36.24
2500	19.55	Ave	13	200	V	4.9	24.45	54	29.55
4960	26.54	PK	0	150	V	18.6	45.14	74	28.86
4960	12.07	Ave	0	150	V	18.6	30.67	54	23.33
7440	32.87	PK	62	150	V	21.2	54.07	74	19.93
7440	20.83	Ave	62	150	V	21.2	42.03	54	11.97

Conducted Spurious Emissions at Antenna Port


Low Channel

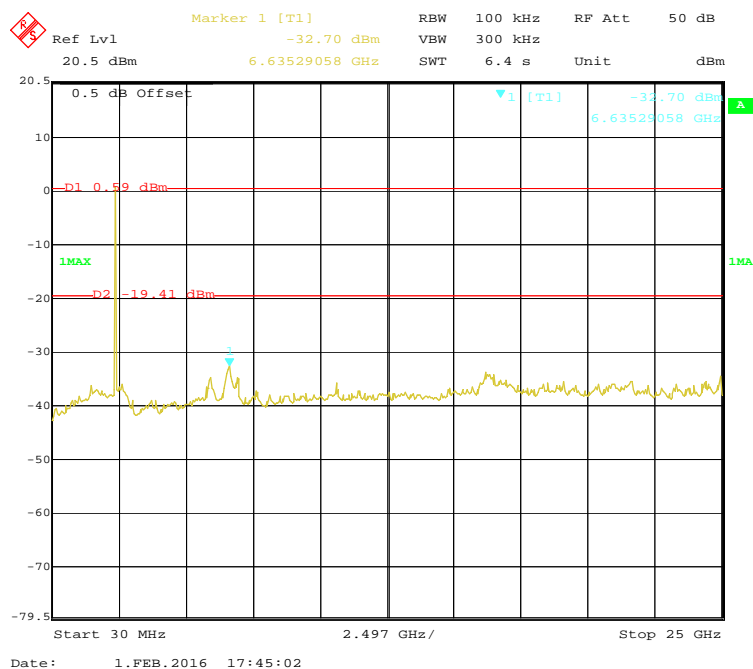

Middle Channel

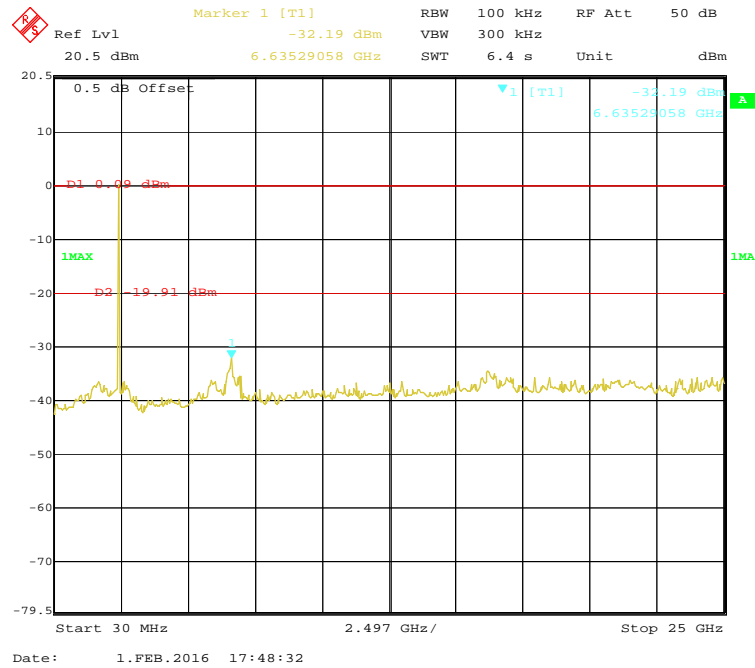

High Channel

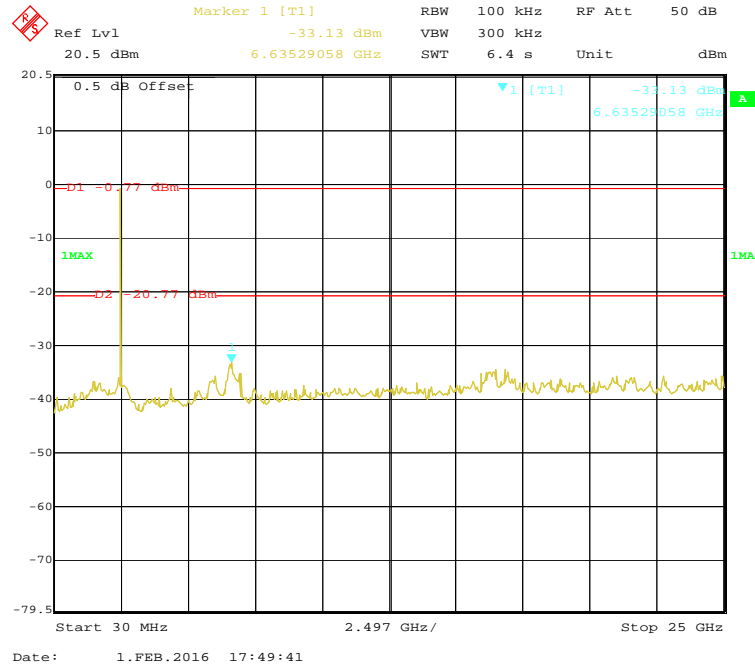

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applied Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-02-01


EUT operation mode: Transmitting

Test Result: Compliance


Please refer to the following tables and plots.

Channel	Channel Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
Low	2402	0.733	≥500
Middle	2440	0.727	≥500
High	2480	0.745	≥500


Low Channel

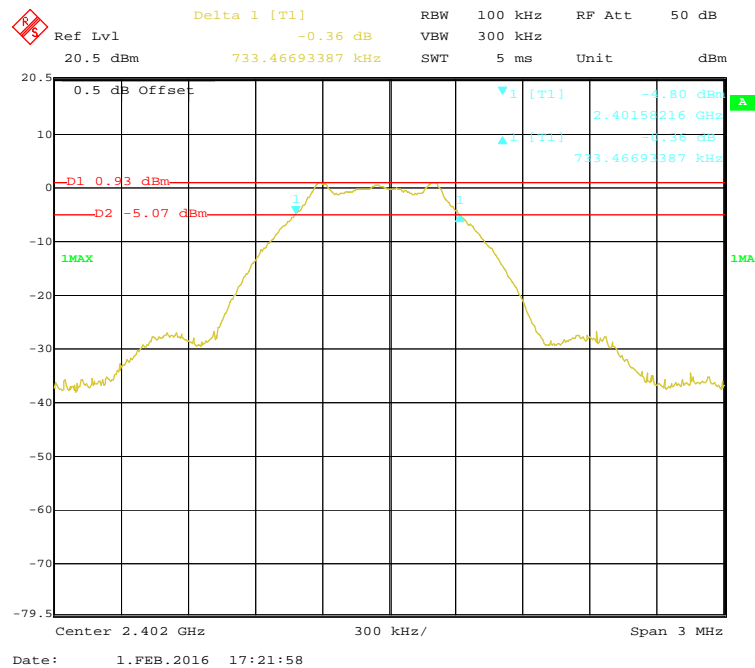

Middle Channel

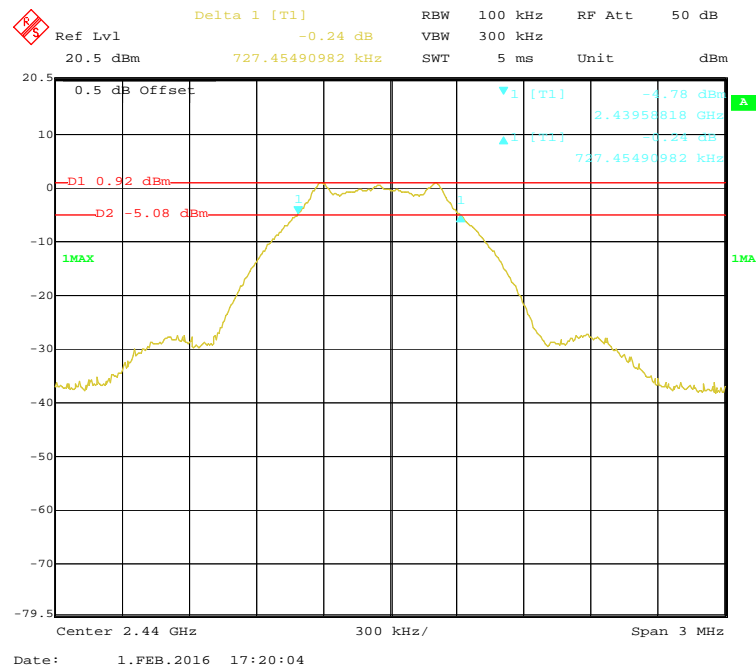

High Channel

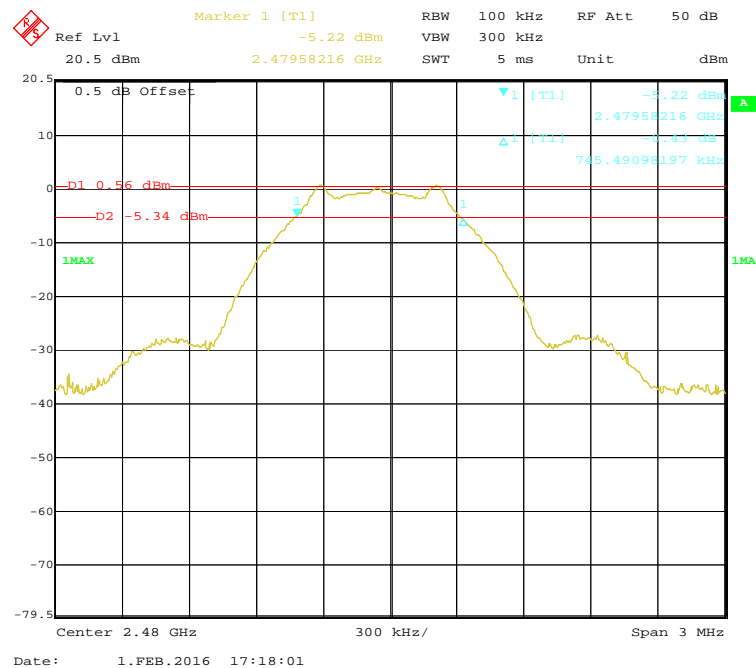

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER


Applicable Standard

According to §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-02-01


EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	1.46	30	Pass
Middle	2440	1.33	30	Pass
High	2480	1.20	30	Pass


RF Output Power, Low Channel

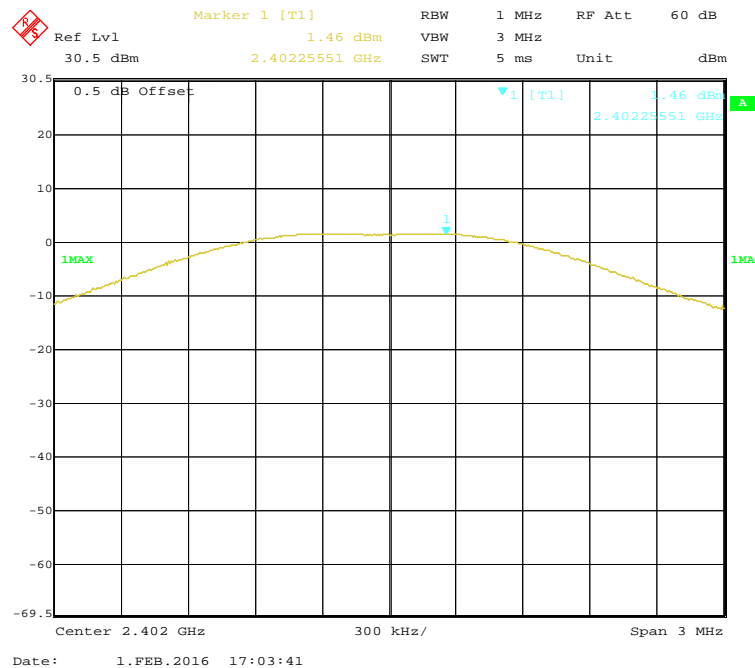

RF Output Power, Middle Channel

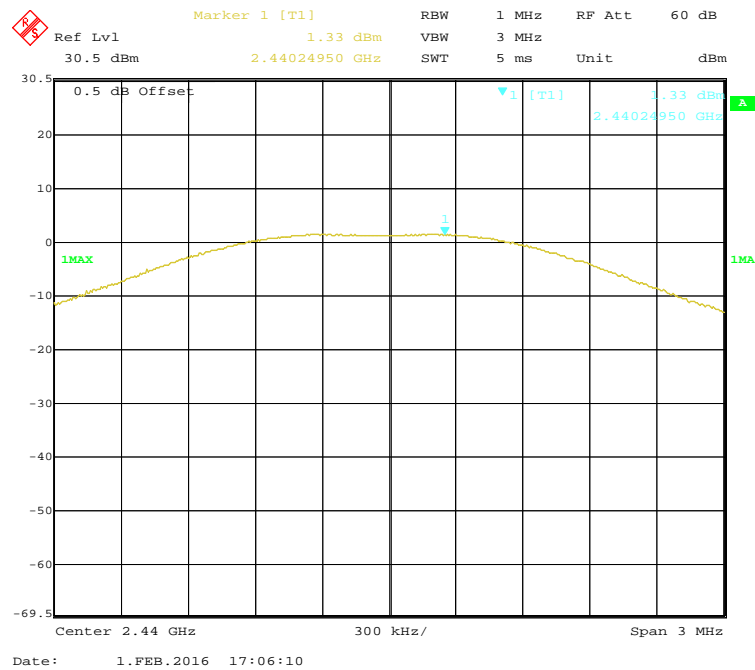

RF Output Power, High Channel

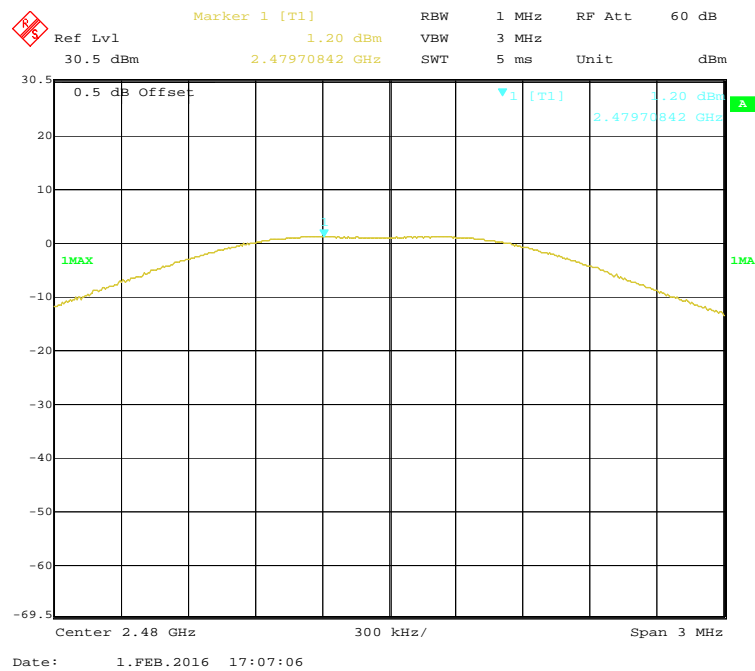

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applied Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-02-01

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.

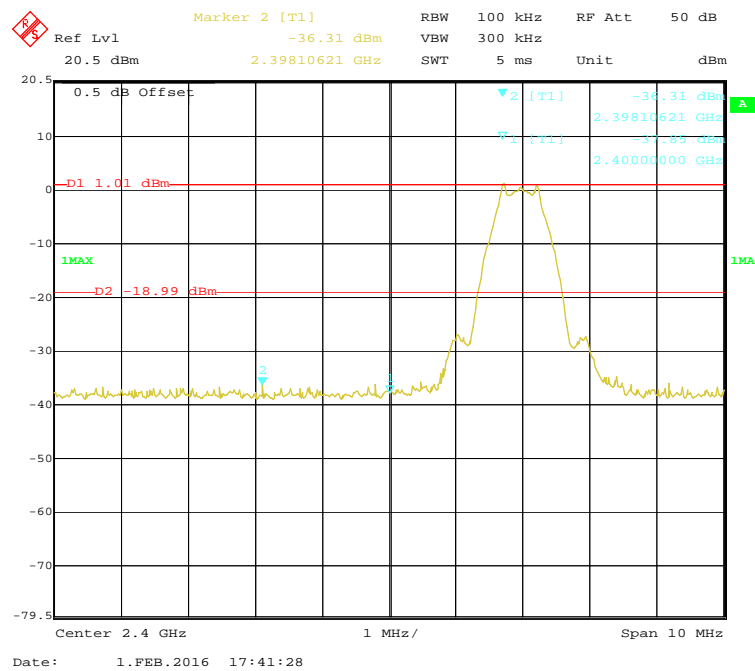Band Edge, Left Side

Band Edge, Right Side

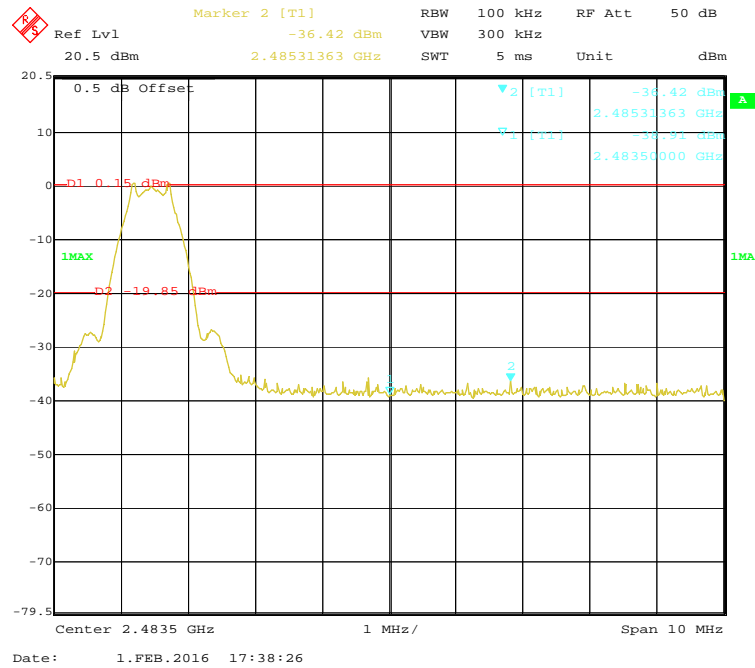

FCC §15.247(e) - POWER SPECTRAL DENSITY


Applied Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measurement value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-02-01


EUT operation mode: Transmitting

Test Result: Pass.


Please refer to following table and plots.

Channel	Frequency (MHz)	Power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-7.61	≤8
Middle	2440	-7.73	≤8
High	2480	-8.01	≤8


Low Channel

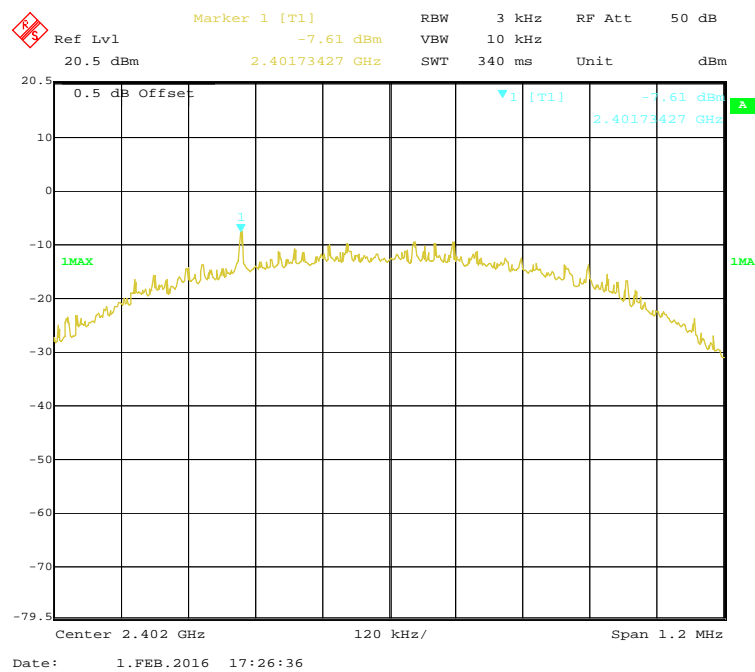

Middle Channel

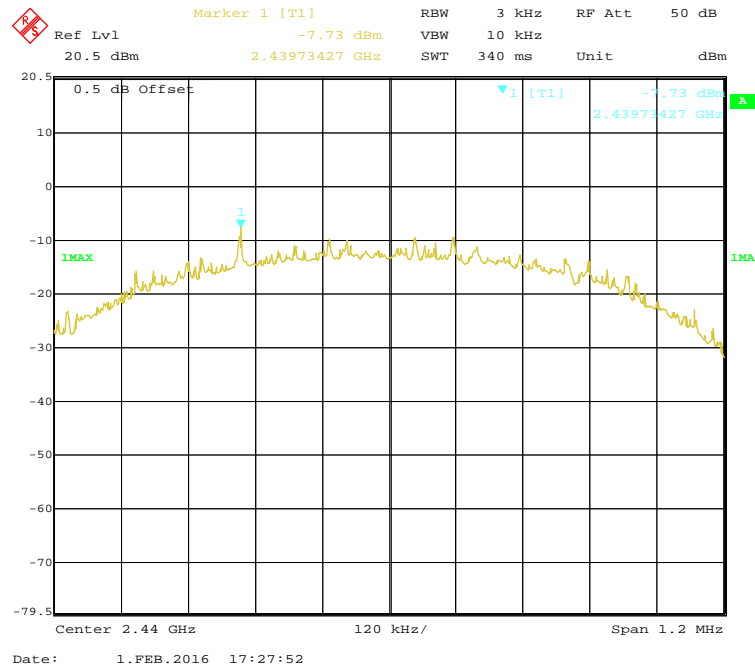

High Channel

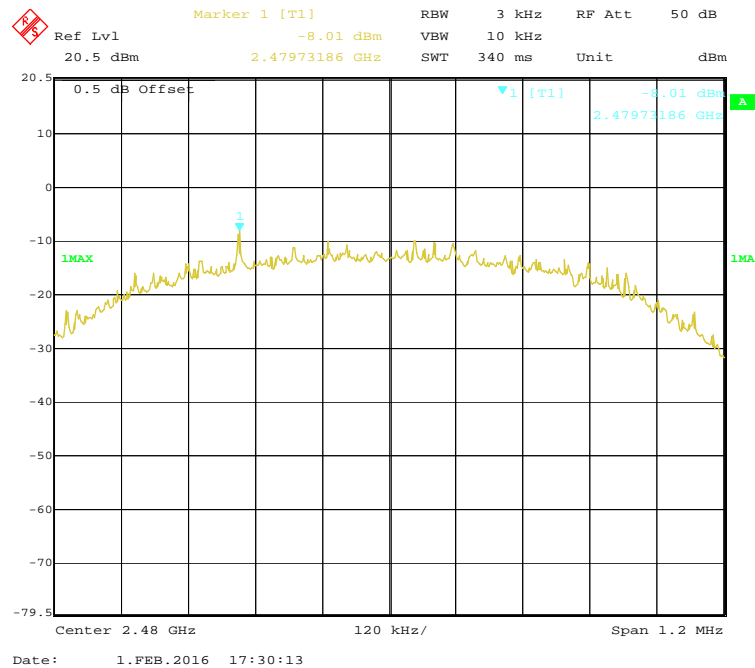

*****END OF REPORT*****