

---

**FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT**

**For**

**BLUECOOLS DIGITAL (HK) CO., LIMITED**

**5th Floor, No. 14, Jiangshi Road, Jiangshi Village, Gongming Town,  
Guangming New District, Shen Zhen, China**

**E.U.T.: Bluetooth headphone**

**Model Name: IAHP86B, NCH800, BT500, BT528, BT595, BT586, BT589,  
BT600, BT688, BT900, BT950**

**Brand Name: N/A**

**FCC ID: 2AHIH-IAHP86B**

**Report Number: NTC1602223F-1**

**Test Date(s): February 16, 2016 to March 18, 2016**

**Report Date(s): March 18, 2016**

**Prepared by**

**Dongguan Nore Testing Center Co., Ltd.**

**Building D, Gaosheng Science and Technology Park, Hongtu Road,  
Nancheng District, Dongguan City, Guangdong, China**

**Tel: +86-769-22022444**

**Fax: +86-769-22022799**

**Prepared By**

**Approved & Authorized Signer**

  
**Rose Hu / Engineer**

  
**Sunm LY / Q.A. Director**

**Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.**

## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST .....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.3 TEST METHODOLOGY .....	7
1.4 EQUIPMENT MODIFICATIONS .....	7
1.5 SUPPORT DEVICE .....	7
1.6 TEST FACILITY AND LOCATION.....	8
1.7 SUMMARY OF TEST RESULTS .....	8
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>10</b>
2.1 EUT CONFIGURATION .....	10
2.2 SPECIAL ACCESSORIES.....	10
2.3 DESCRIPTION OF TEST MODES .....	10
2.4 EUT EXERCISE .....	10
<b>3. CONDUCTED EMISSIONS TEST .....</b>	<b>11</b>
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
3.2 TEST CONDITION .....	11
3.3 MEASUREMENT RESULTS.....	11
<b>4. RADIATED EMISSION TEST .....</b>	<b>14</b>
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
4.2 MEASUREMENT PROCEDURE .....	15
4.3 LIMIT .....	15
4.4 MEASUREMENT RESULTS .....	16
<b>5. CHANNEL SEPARATION TEST.....</b>	<b>20</b>
5.1 MEASUREMENT PROCEDURE .....	20
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	20
5.3 MEASUREMENT RESULTS.....	20
<b>6. 20DB BANDWIDTH.....</b>	<b>26</b>
6.1 MEASUREMENT PROCEDURE .....	26
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	26
6.3 MEASUREMENT RESULTS.....	26
<b>7. HOPPING CHANNEL NUMBER .....</b>	<b>32</b>
7.1 MEASUREMENT PROCEDURE .....	32
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	32
7.3 MEASUREMENT RESULTS.....	32

<b>8. TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>34</b>
8.1 MEASUREMENT PROCEDURE .....	34
8.2 MEASUREMENT RESULTS.....	34
<b>9. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>34</b>
9.1 MEASUREMENT PROCEDURE .....	40
9.2 MEASUREMENT RESULTS.....	40
<b>10. BAND EDGE .....</b>	<b>40</b>
10.1 MEASUREMENT PROCEDURE .....	46
10.2 LIMIT.....	46
10.3 MEASUREMENT RESULTS.....	46
<b>11. ANTENNA APPLICATION .....</b>	<b>46</b>
11.1 ANTENNA REQUIREMENT .....	53
11.2 MEASUREMENT RESULTS.....	53
<b>12. CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>54</b>
12.1 MEASUREMENT PROCEDURE .....	54
12.2. MEASUREMENT RESULTS.....	54
<b>13. TEST EQUIPMENT LIST.....</b>	<b>57</b>

## Revision History of This Test Report

Report Number	Description	Issued Date
NTC1602223F-1	Initial Issue	2016-03-18

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

This device is a BT headphone, it's powered by DC 3.7V li-ion battery or DC 5V come from USB port. For more details features, please refer to User's Manual.

Manufacturer/ Factory	: Shenzhen Aoyinmei Electrics Co., Ltd.
Address	: 5th Floor, No.14, Jiangshi Road, Jiangshi Village, Gongming Town, Guangming New District, Shenzhen, China
Power Supply	: DC 5V Come from USB port, DC 3.7V li-ion battery
Adapter	: None
Test voltage	: AC 120V 60Hz(Adapter input), DC 3.7V li-ion battery (Only the worst case was recorded in the report.)
Model name	: IAHP86B, NCH800, BT500, BT528, BT595, BT586, BT589, BT600, BT688, BT900, BT950 (All tests were carried on model IAHP86B.)
Model difference	: These models have the same circuitry, PCB layout, electrical mechanical and physical construction. Their differences in model number for trading purpose.
Hardware version	: KSBH800_BT_V1.1
Software version	: 001
Serial number	: N/A

#### For BT function

Item	BT2.1+EDR
Frequency	2402-2480MHz
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channel	79
Channel space	1MHz
Antenna Type	PCB antenna
Antenna Gain	0 dBi

### BT 2.1+EDR Channel List

Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

**Note:** According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency and test software see below:

Channel	Frequency MHz
1	2402
40	2441
79	2480

Test SW version	BlueSuite 2.4.8
-----------------	-----------------



## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AIIH-IAHP86B** filing to comply with Section 15.247 of the FCC Part 15 (2016), Subpart C Rule.

## 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Support Device

Notebook PC	: Manufacturer: IBM Corporation M/N: R50e S/N: L3-HZNGO P/N: 1834KDC
Adapter	: Manufacturer: IBM Corporation M/N: 08K8210 Input: AC100-240V 50/60Hz 0.5-1.0A Output: DC 16V 4.5A

## 1.6 Test Facility and Location

Listed by FCC, July 03, 2014  
The Certificate Registration Number is 665078.  
Listed by Industry Canada, June 18, 2014  
The Certificate Registration Number is 9743A.

Dongguan NTC Co., Ltd.  
(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,  
Nancheng District, Dongguan City, Guangdong, China  
(Full Name: Building D, Gaosheng Science & Technology Park,  
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.




## 1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d), §15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

- Note: 1. The EUT has been tested as an independent unit. And Continual transmitting in maximum power (the fully-charged battery be used during test)
2. The EUT powered by battery and operating multiple positions, so the EUT shall be performed three orthogonal planes. The worst plane is Z.

Example:

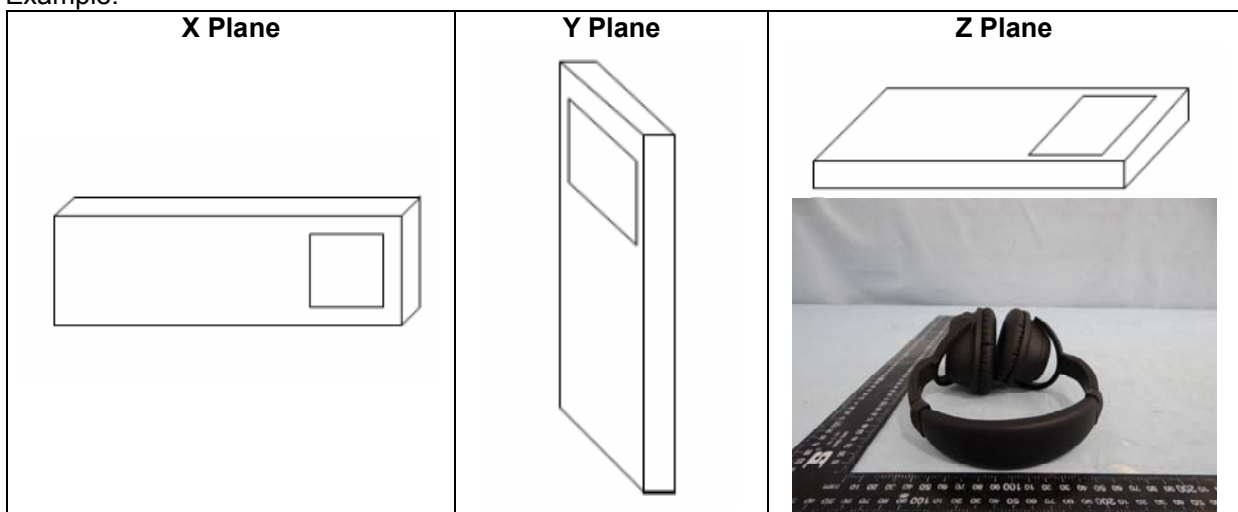

## **2. System Test Configuration**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 Special Accessories**

Not available for this EUT intended for grant.

### **2.3 Description of test modes**


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK,  $\pi/4$ -DQPSK, 8DPSK were tested.

### **2.4 EUT Exercise**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 3. Conducted Emissions Test

#### 3.1 Test SET-UP (Block Diagram of Configuration)

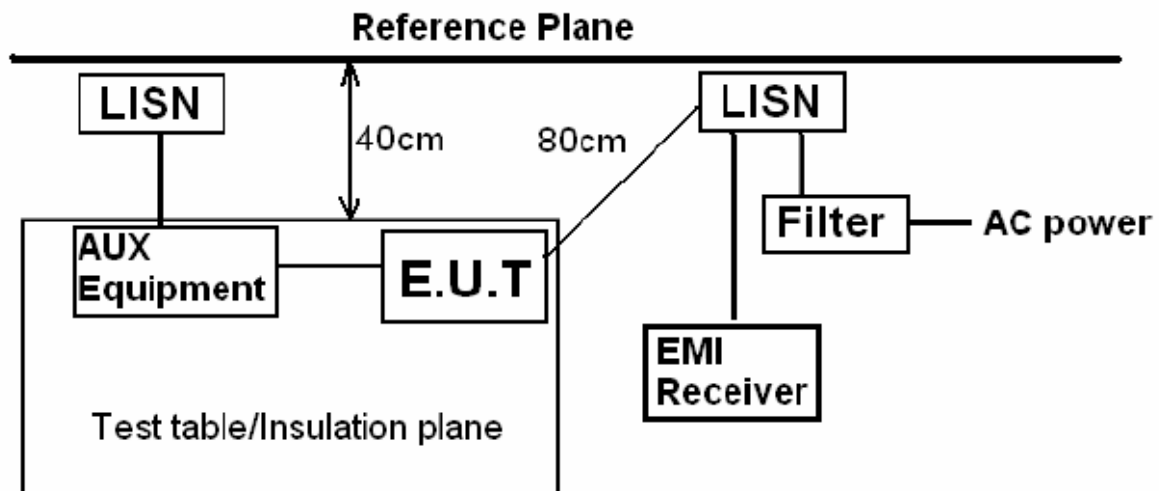

#### 3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: Charging+BT Mode(Adapter input),  
Charging+BT Mode(PC input)

#### 3.3 Measurement Results


Please refer to following plots of the worst case:  
Charging+BT Mode(PC Input).



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2016-2-17 14:47:19

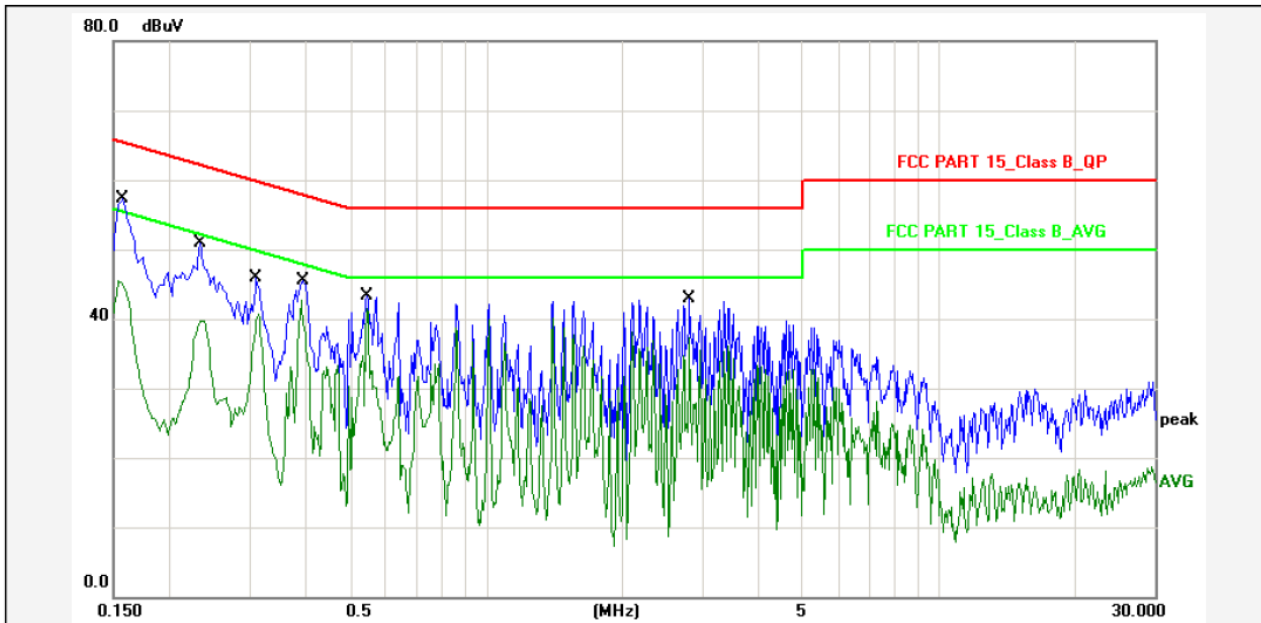

Report No.: IAHP86B

Test Standard: FCC PART 15\_Class B\_QP

Test item: Conducted Emission

Phase: L1

Applicant: BIUECOOLS DIGITAL

Temp.( )/Hum.(%): 17(C) / 45 %

Product: Bluetooth headphone

Power Rating: DC 5V(From PC)

Model No.: IAHP86B

Test Engineer: Ryan

Test Mode: Charging+BT Mode

Remark:


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1580	10.80	44.50	55.30	65.56	-10.26	QP	P	
2	0.1580	10.80	32.70	43.50	55.56	-12.06	AVG	P	
3	0.2340	10.80	38.10	48.90	62.30	-13.40	QP	P	
4	0.2340	10.80	27.00	37.80	52.30	-14.50	AVG	P	
5	0.3140	10.80	33.20	44.00	59.86	-15.86	QP	P	
6	0.3140	10.80	27.80	38.60	49.86	-11.26	AVG	P	
7	0.3940	10.80	32.60	43.40	57.98	-14.58	QP	P	
8	0.3940	10.80	29.40	40.20	47.98	-7.78	AVG	P	
9	0.5460	10.80	30.40	41.20	56.00	-14.80	QP	P	
10	0.5460	10.80	28.60	39.40	46.00	-6.60	AVG	P	
11	2.8100	10.80	30.00	40.80	56.00	-15.20	QP	P	
12	2.8100	10.80	24.50	35.30	46.00	-10.70	AVG	P	



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2016-2-17 14:53:31

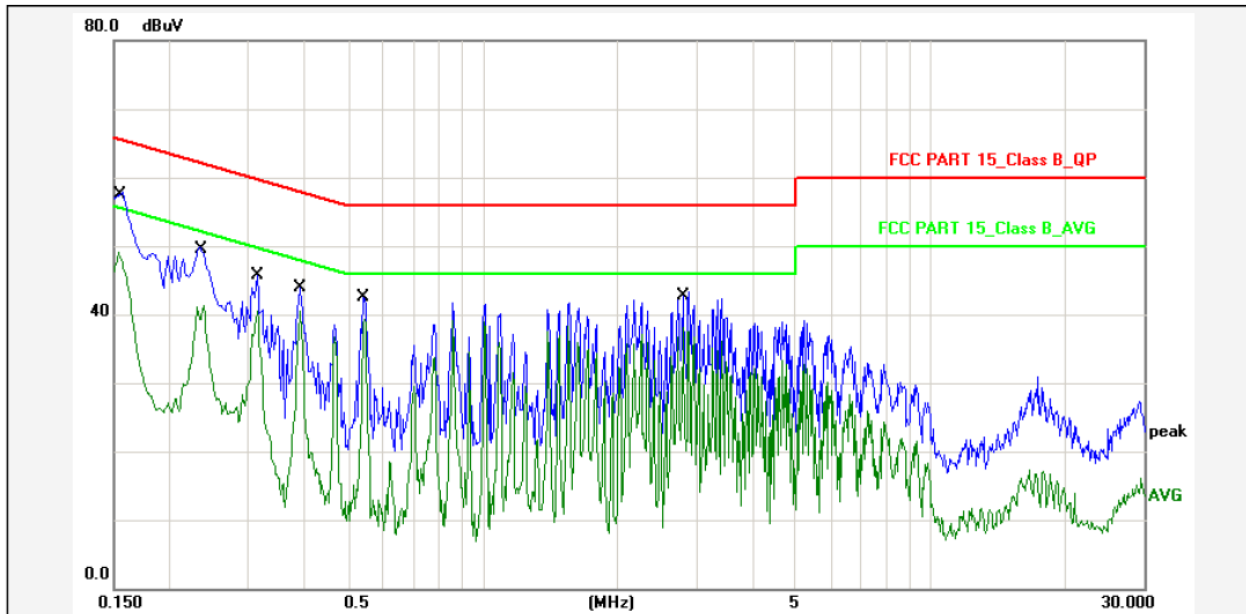

Report No.: IAHP86B

Test Standard: FCC PART 15\_Class B\_QP

Test item: Conducted Emission

Phase: N

Applicant: BIUECOOLS DIGITAL

Temp.( )/Hum.(%): 17(C) / 45 %

Product: Bluetooth headphone

Power Rating: DC 5V(From PC)

Model No.: IAHP86B

Test Engineer: Ryan

Test Mode: Charging+BT Mode


Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	45.00	55.80	65.78	-9.98	QP	P	
2	0.1539	10.80	36.20	47.00	55.78	-8.78	AVG	P	
3	0.2380	10.80	37.10	47.90	62.16	-14.26	QP	P	
4	0.2380	10.80	28.40	39.20	52.16	-12.96	AVG	P	
5	0.3140	10.80	32.80	43.60	59.86	-16.26	QP	P	
6	0.3140	10.80	27.70	38.50	49.86	-11.36	AVG	P	
7	0.3899	10.80	30.20	41.00	58.06	-17.06	QP	P	
8	0.3899	10.80	27.60	38.40	48.06	-9.66	AVG	P	
9	0.5460	10.80	28.80	39.60	56.00	-16.40	QP	P	
10	0.5460	10.80	26.50	37.30	46.00	-8.70	AVG	P	
11	2.8060	10.80	30.40	41.20	56.00	-14.80	QP	P	
12	2.8060	10.80	25.40	36.20	46.00	-9.80	AVG	P	


## 4. Radiated Emission Test

### 4.1 Test SET-UP (Block Diagram of Configuration)

#### 4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

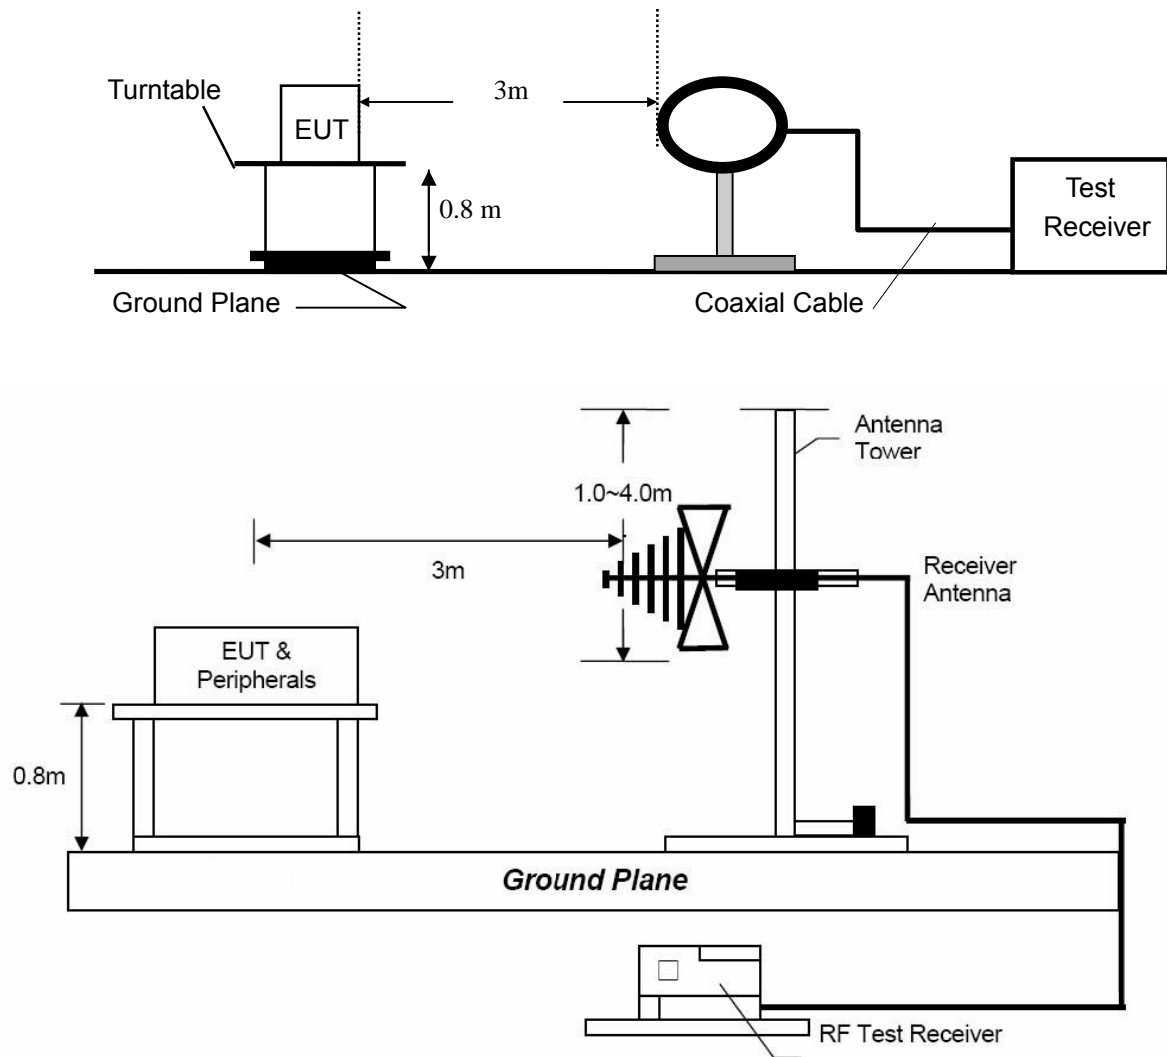

#### 4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

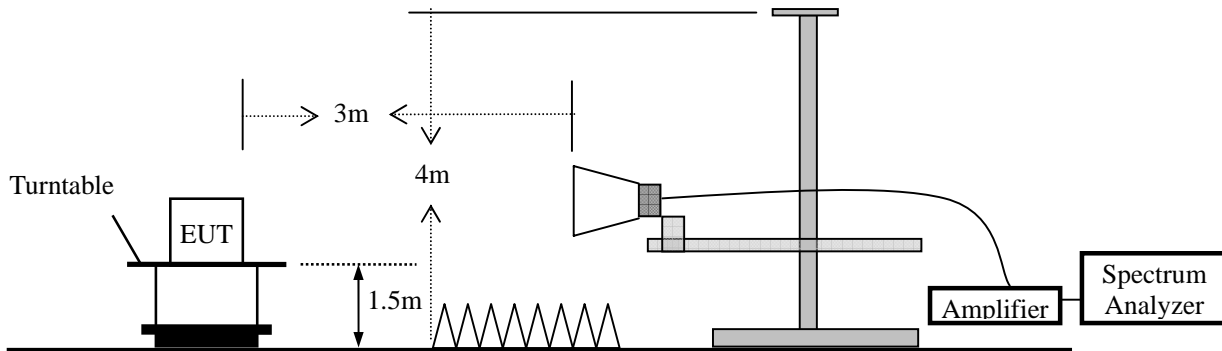

#### 4.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:  
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.



During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

#### 4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level (dB) $\mu\text{V}$  = 20 log Emission level  $\mu\text{V/m}$   
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.  
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

#### 4.4 Measurement Results


Please refer to following plots of the worst case: GFSK(Middle channel).



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2016-3-10 15:51:15

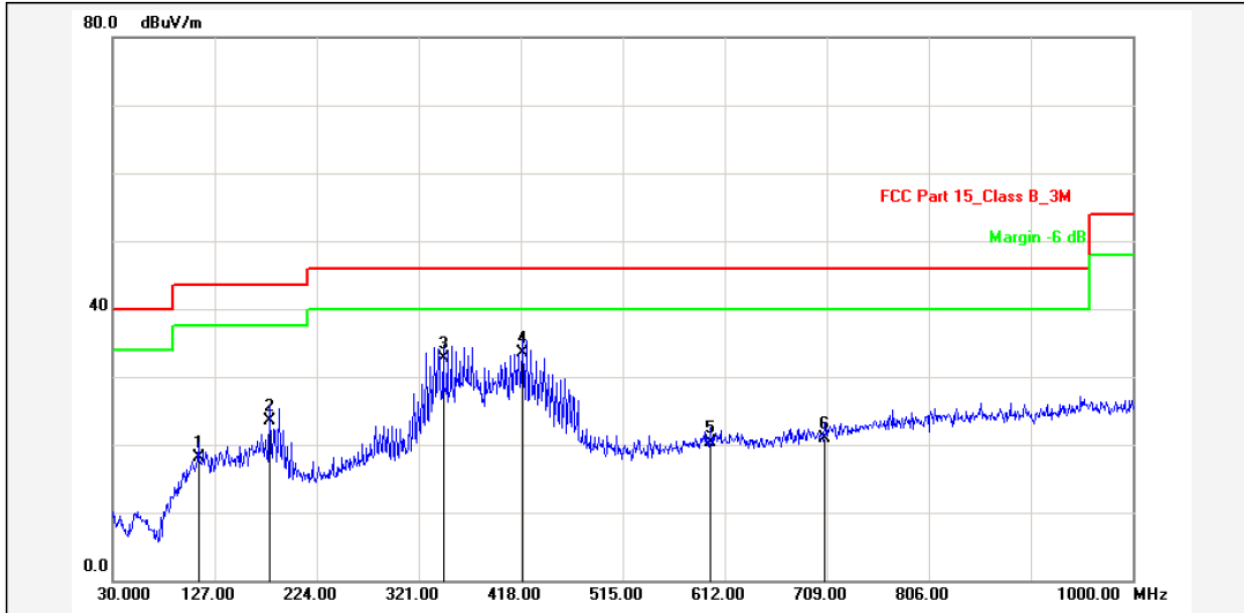

Report No.: IAHP86B

Test Standard: FCC Part 15\_Class B\_3M

Test item: Radiation Emission

Applicant: BLUECOOLS DIGITAL

Product: Bluetooth headphone

Model No.: IAHP86B

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: DC 3.7V

Test Engineer: Ryan

Test Mode: TX

Remark: GFSK(Middle channel)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	111.4800	-12.42	30.62	18.20	43.50	-25.30	QP			P	
2	179.3800	-14.18	37.78	23.60	43.50	-19.90	QP			P	
3	344.2800	-9.21	41.91	32.70	46.00	-13.30	QP			P	
4	419.9399	-8.64	42.14	33.50	46.00	-12.50	QP			P	
5	598.4200	-5.03	25.43	20.40	46.00	-25.60	QP			P	
6	707.0600	-3.64	24.64	21.00	46.00	-25.00	QP			P	


**Note:** Below 30MHz, the emissions are lower than 20dB below the allowable limit.



**Dongguan NTC Co., Ltd.**  
Tel: +86-769-22022444 Fax: +86-769-22022799  
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2016-3-10 15:57:20

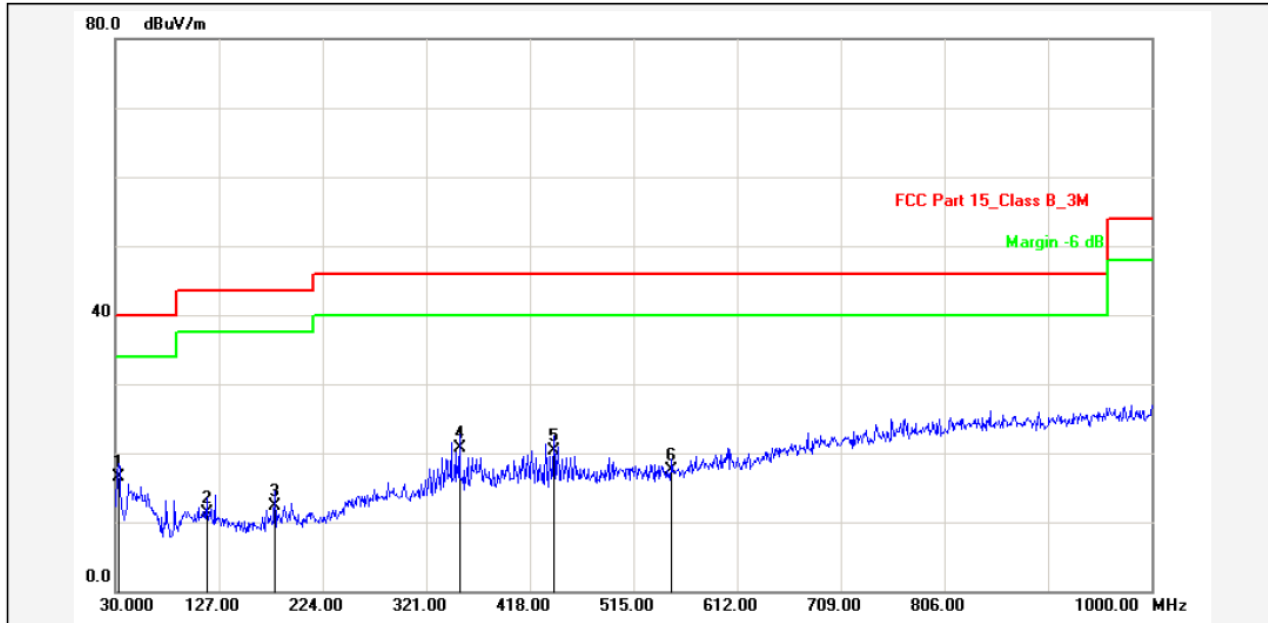

Report No.: IAHP86B

Test Standard: FCC Part 15\_Class B\_3M

Test item: Radiation Emission

Applicant: BLUECOOLS DIGITAL

Product: Bluetooth headphone

Model No.: IAHP86B

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: DC 3.7V

Test Engineer: Ryan

Test Mode: TX

Remark: GFSK(Middle channel)

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	32.9100	-15.67	32.17	16.50	40.00	-23.50	QP			P	
2	115.3600	-16.04	27.44	11.40	43.50	-32.10	QP			P	
3	179.3800	-17.18	29.58	12.40	43.50	-31.10	QP			P	
4	352.0400	-11.13	31.83	20.70	46.00	-25.30	QP			P	
5	440.3100	-11.19	31.59	20.40	46.00	-25.60	QP			P	
6	550.8900	-8.53	26.03	17.50	46.00	-28.50	QP			P	

**Note:** Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Modulation: 8DPSK (the worst case)  
Frequency Range: 1-25GHz Test Date : February 23, 2016  
Test Result: PASS Temperature : 20 °C  
Measured Distance: 3m Humidity : 50 %  
Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	V	38.40	28.96	14.63	53.03	43.59	74.00	54.00	-20.97	-10.41
7206	V	37.46	26.47	20.68	58.14	47.15	74.00	54.00	-15.86	-6.85
---										
4804	H	38.29	26.95	14.63	52.92	41.58	74.00	54.00	-21.08	-12.42
7206	H	37.06	25.45	20.68	57.74	46.13	74.00	54.00	-16.26	-7.87
---										
Operation Mode: TX Mode (Mid)										
4882	V	38.81	26.15	14.97	53.78	41.12	74.00	54.00	-20.22	-12.88
7323	V	37.11	26.81	20.91	58.02	47.72	74.00	54.00	-15.98	-6.28
---										
4882	H	39.31	28.55	14.97	54.28	43.52	74.00	54.00	-19.72	-10.48
7323	H	37.96	26.71	20.91	58.87	47.62	74.00	54.00	-15.13	-6.38
---										
Operation Mode: TX Mode (High)										
4960	V	37.45	27.49	15.30	52.75	42.79	74.00	54.00	-21.25	-11.21
7440	V	36.42	27.70	21.16	57.58	48.86	74.00	54.00	-16.42	-5.14
---										
4960	H	38.80	28.02	15.30	54.10	43.32	74.00	54.00	-19.90	-10.68
7440	H	38.85	29.73	21.16	60.01	50.89	74.00	54.00	-13.99	-3.11
---										

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty :  $\pm 3.7$ dB.
  - (6) Horn antenna used for the emission over 1000MHz.


## 5. Channel Separation test

### 5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

### 5.2 Test SET-UP (Block Diagram of Configuration)




### 5.3 Measurement Results

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	February 22, 2016
Temperature :	24 °C	Humidity :	50 %
Test Result:	PASS		


Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
GFSK			
Lowest	2402	1000	>596.0
Middle	2441	1005	>596.0
Highest	2480	1005	>599.3
$\pi/4$ -DQPSK			
Lowest	2402	1000	>852.7
Middle	2441	1000	>849.3
Highest	2480	1000	>842.7
8DPSK			
Lowest	2402	1000	>833.3
Middle	2441	1000	>865.3
Highest	2480	1000	>862.0

GFSK Lowest Channel

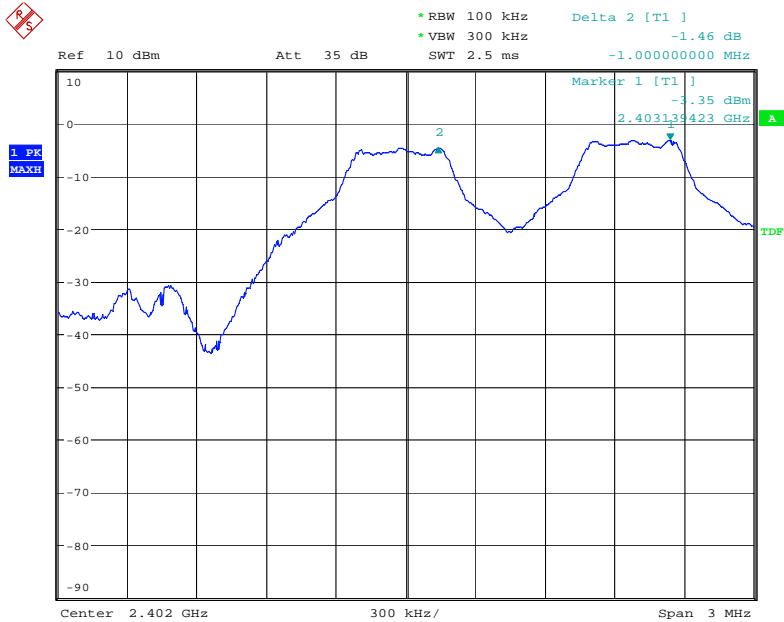


Date: 22.FEB.2016 10:16:46

GFSK Middle Channel

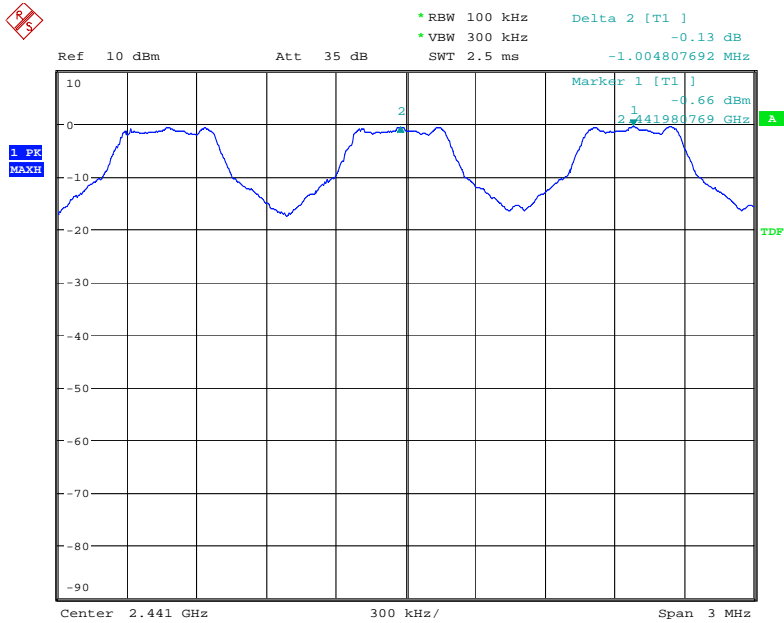


Date: 22.FEB.2016 10:18:06

GFSK Highest Channel

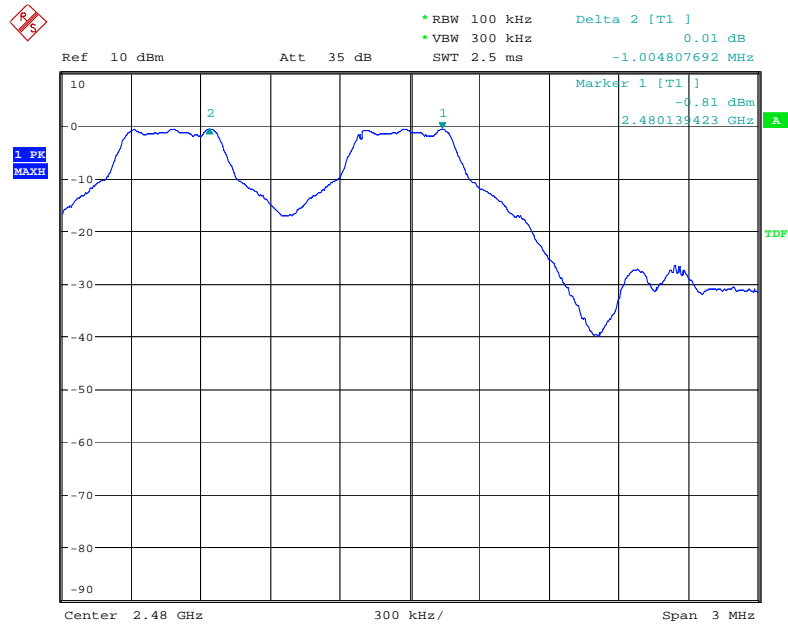

Date: 22.FEB.2016 10:19:21


$\pi/4$ -DQPSK Lowest Channel

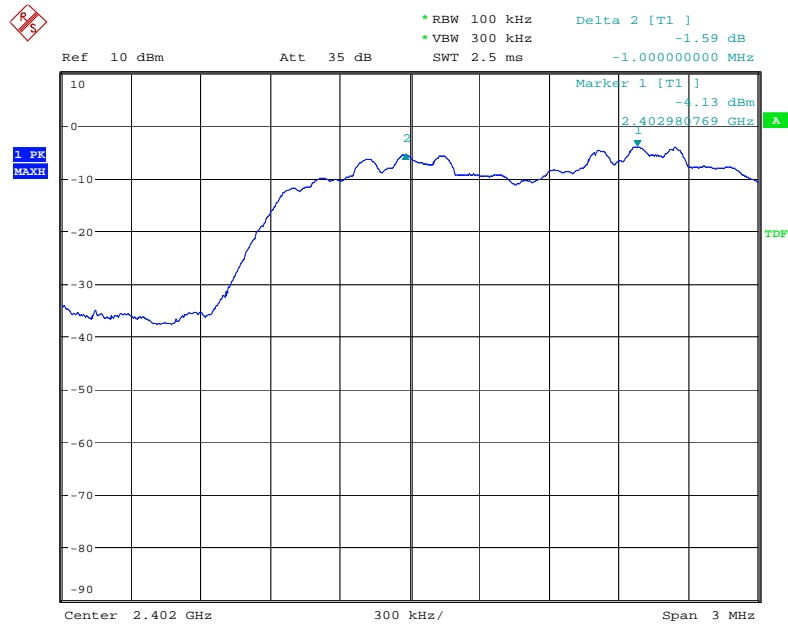

Date: 22.FEB.2016 10:21:26




$\pi/4$ -DQPSK Middle Channel

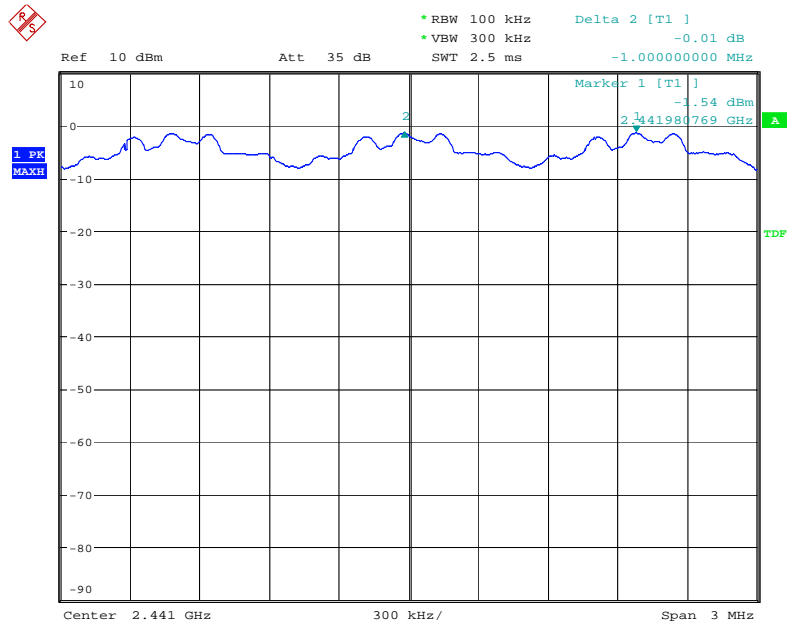

Date: 22.FEB.2016 10:25:32


$\pi/4$ -DQPSK Highest Channel

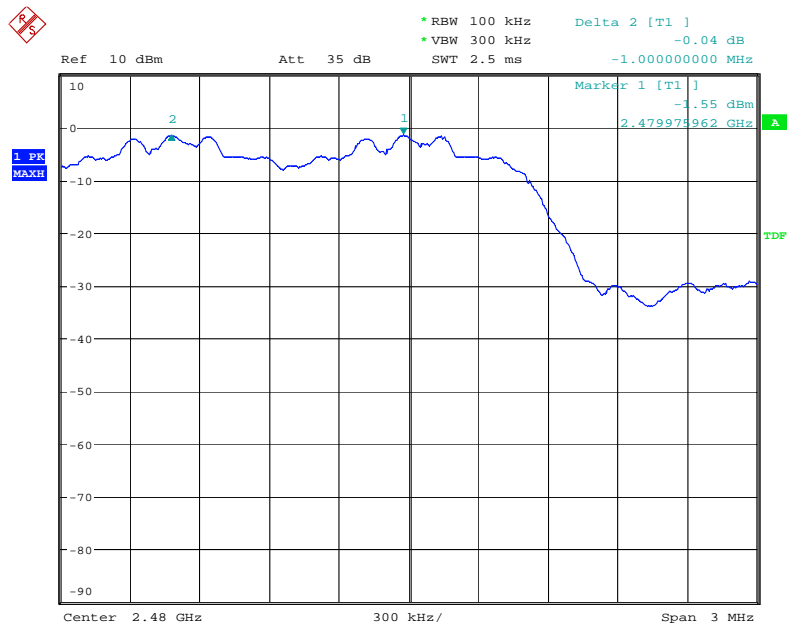

Date: 22.FEB.2016 10:27:32




8DPSK Lowest Channel

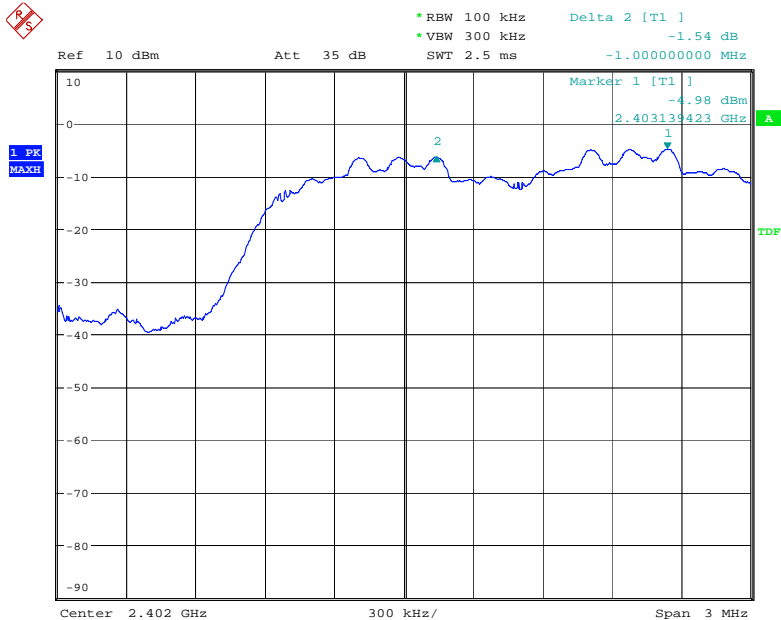

Date: 22.FEB.2016 10:44:19


8DPSK Middle Channel

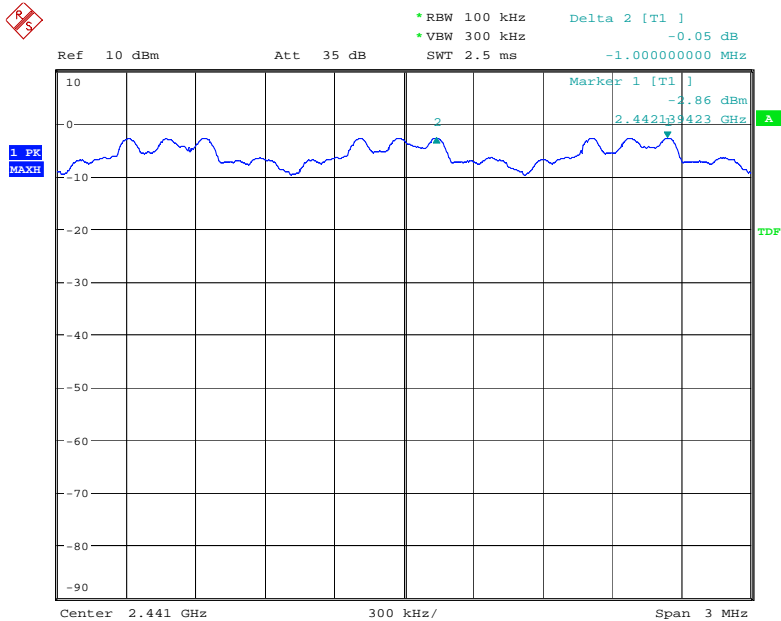

Date: 22.FEB.2016 10:46:39



8DPSK Highest Channel

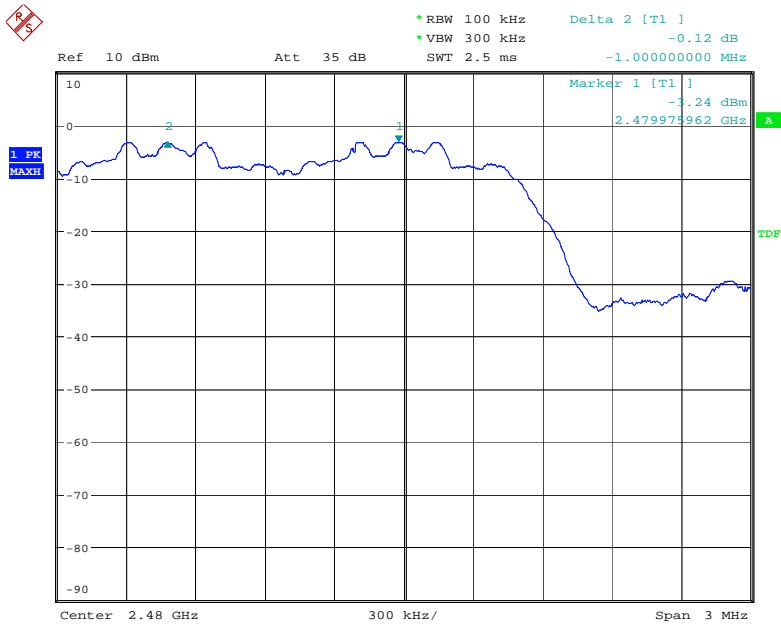

Date: 22.FEB.2016 10:47:55


## 6. 20dB Bandwidth

### 6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

### 6.2 Test SET-UP (Block Diagram of Configuration)




### 6.3 Measurement Results

Refer to attached data chart.

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	30KHz	VBW:	100KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	February 22, 2016
Temperature :	24 °C	Humidity :	50 %
Test Result:	PASS		


Channel frequency (MHz)	20dB Down BW(kHz)
GFSK	
2402	894
2441	894
2480	899
$\pi/4$ -DQPSK	
2402	1279
2441	1274
2480	1264
8DPSK	
2402	1250
2441	1298
2480	1293

GFSK Lowest Channel

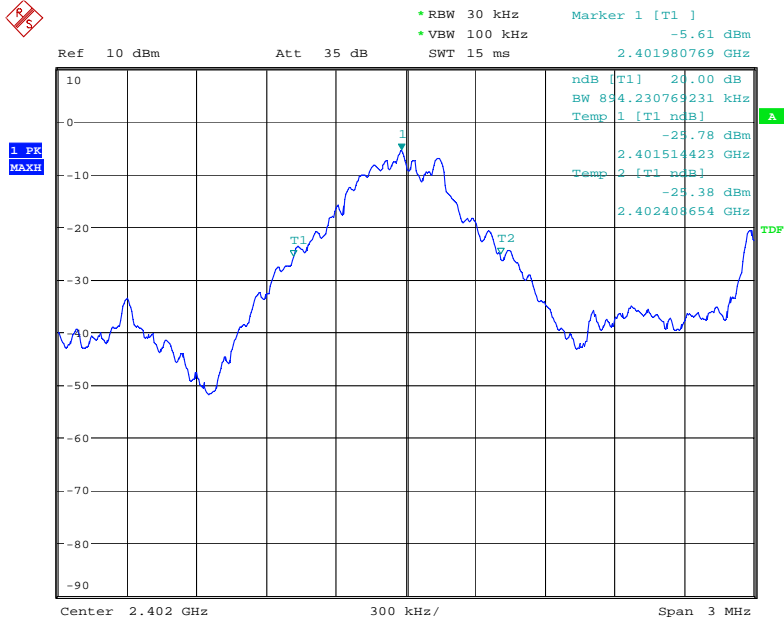


Date: 22.FEB.2016 10:06:45

GFSK Middle Channel

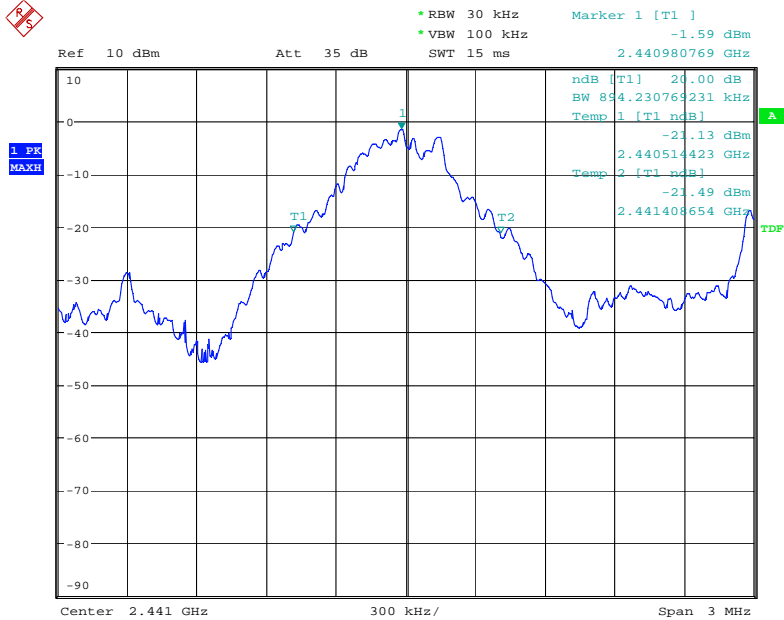


Date: 22.FEB.2016 10:07:49

GFSK Highest Channel

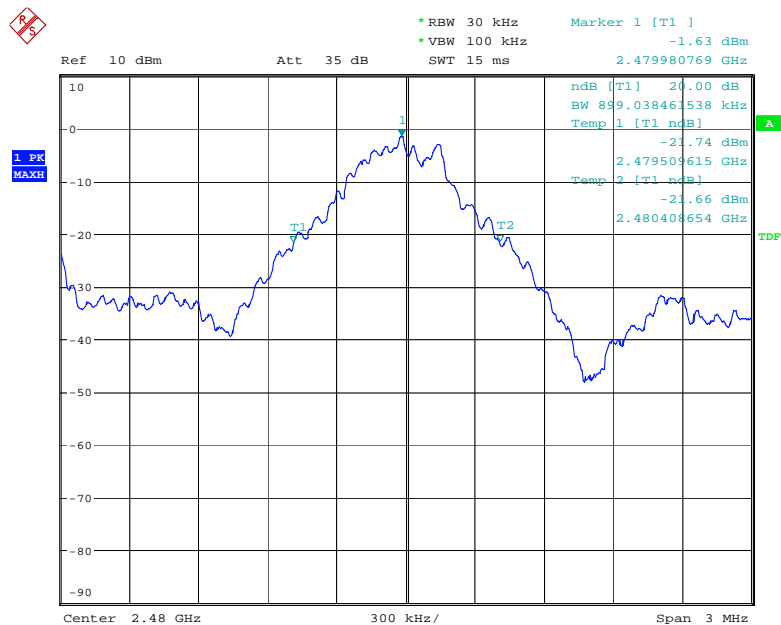


Date: 22.FEB.2016 10:08:32

$\pi/4$ -DQPSK Lowest Channel

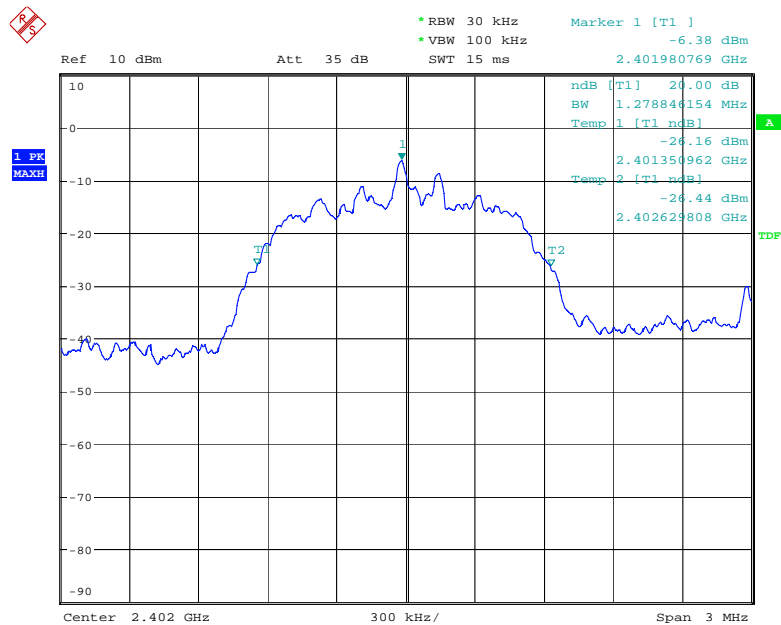


Date: 22.FEB.2016 10:10:15

$\pi/4$ -DQPSK Middle Channel

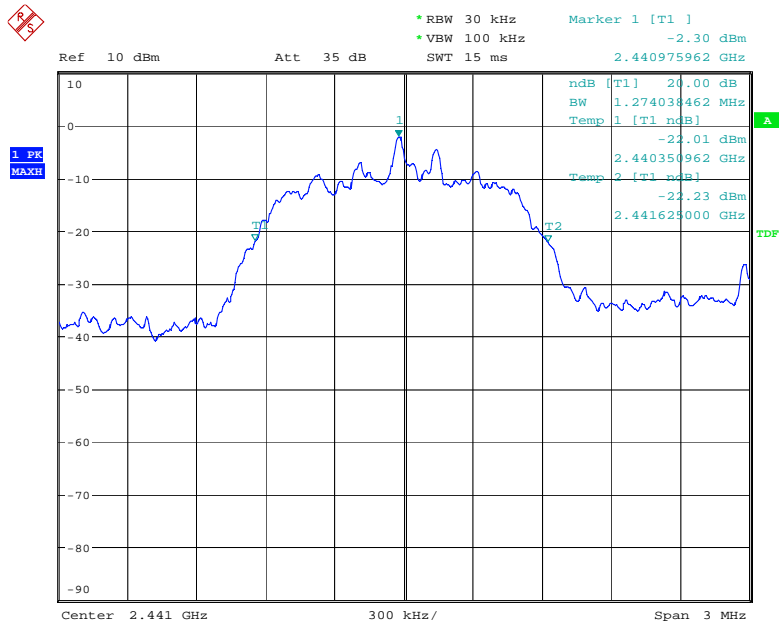

Date: 22.FEB.2016 10:11:09


$\pi/4$ -DQPSK Highest Channel

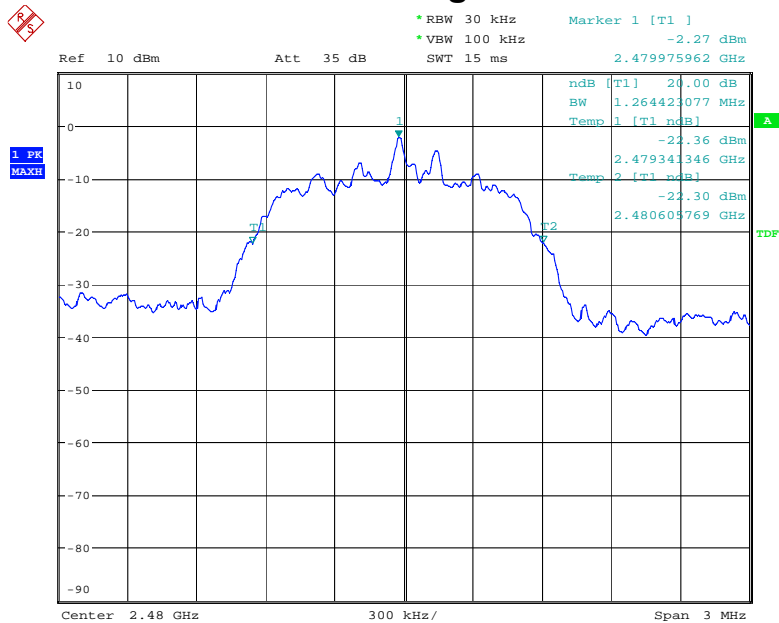

Date: 22.FEB.2016 10:11:54




8DPSK Lowest Channel

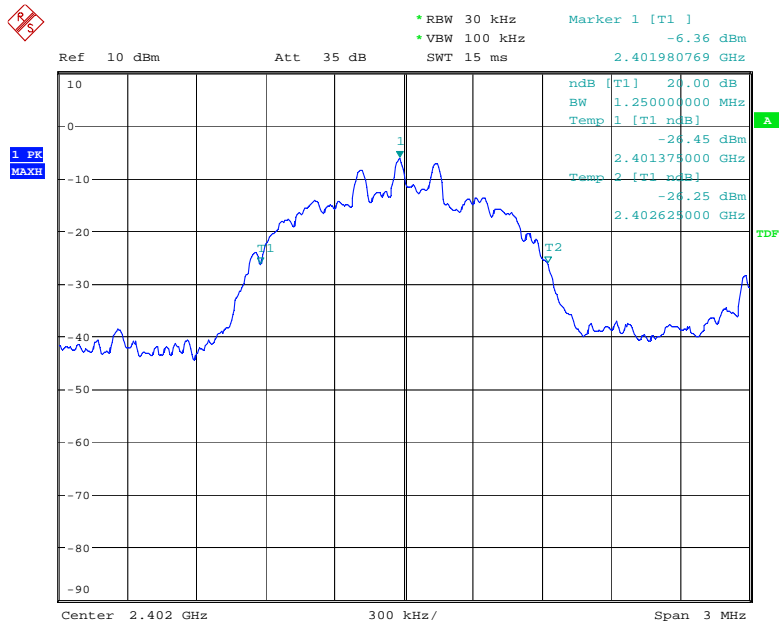


Date: 22.FEB.2016 10:13:07

8DPSK Middle Channel

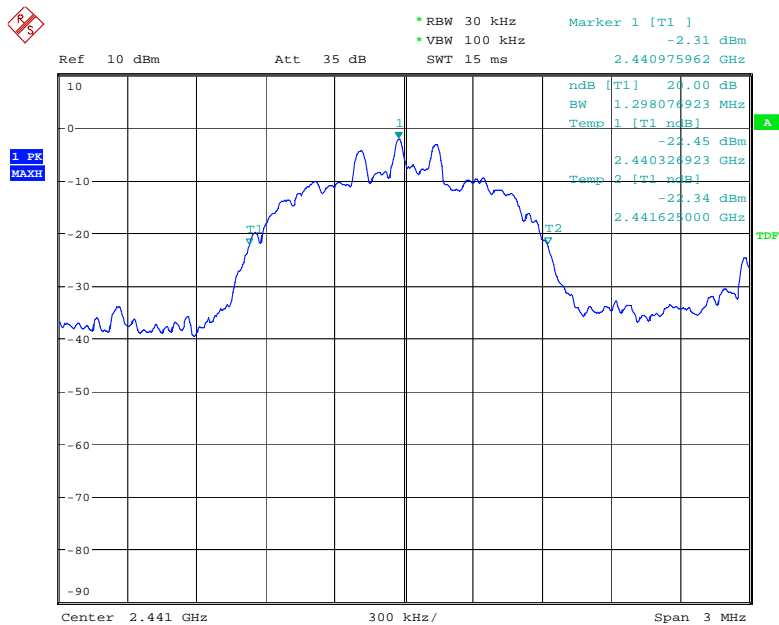

Date: 22.FEB.2016 10:14:22

8DPSK Highest Channel

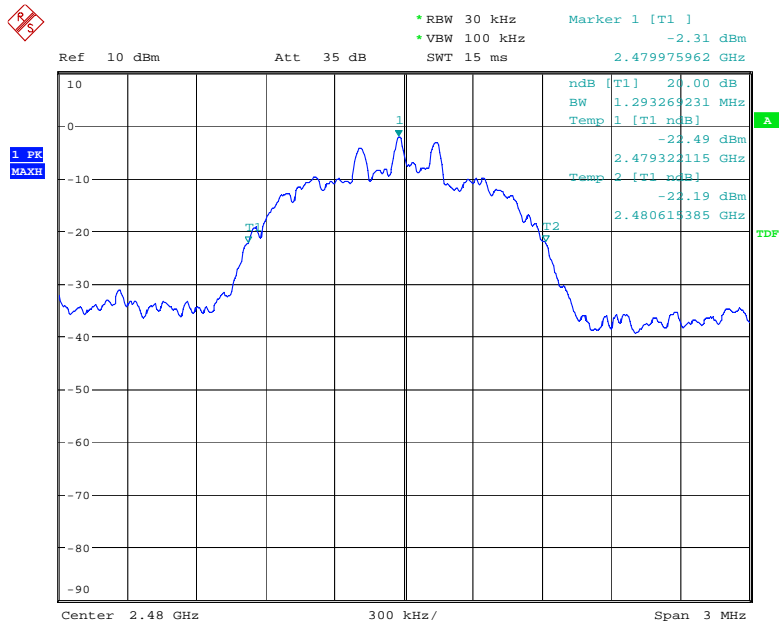

Date: 22.FEB.2016 10:15:24


## 7. Hopping Channel Number

### 7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

### 7.2 Test SET-UP (Block Diagram of Configuration)




### 7.3 Measurement Results

Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	February 22, 2016
Temperature :	24 °C	Humidity :	50 %
Test Result:	PASS		

Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	$\geq 15$

The worst case: GFSK

GFSK

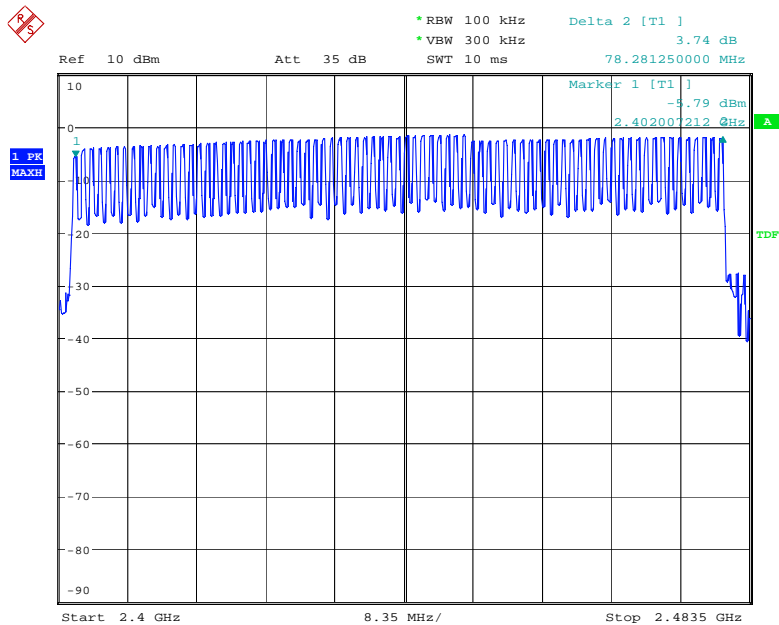

Date: 22.FEB.2016 12:14:30

## 8. Time of Occupancy (Dwell Time)

### 8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.

The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

### 8.2 Measurement Results

The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)


Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	1MHz	VBW :	3MHz
Spectrum Detector:	PK	Test By:	Sance
Test Date :	February 22, 2016	Temperature :	24°C
Test Result:	PASS	Humidity :	50 %

Packet	Frequency (MHz)	Result (msec)	Limit (msec)
GFSK			
DH1	2402	0.421 (ms)*(1600/(2*79))*31.6= 134.7	400
DH3	2402	1.683 (ms)*(1600/(4*79))*31.6= 269.3	400
DH5	2402	2.933 (ms)*(1600/(6*79))*31.6= 312.9	400
$\pi/4$ -DQPSK			
2-DH1	2402	0.421 (ms)*(1600/(2*79))*31.6= 134.7	400
2-DH3	2402	1.691 (ms)*(1600/(4*79))*31.6= 270.6	400
2-DH5	2402	2.945 (ms)*(1600/(6*79))*31.6= 314.1	400
8DPSK			
3-DH1	2402	0.421 (ms)*(1600/(2*79))*31.6= 134.7	400
3-DH3	2402	1.691 (ms)*(1600/(4*79))*31.6= 270.6	400
3-DH5	2402	2.945 (ms)*(1600/(6*79))*31.6= 314.1	400




GFSK DH1

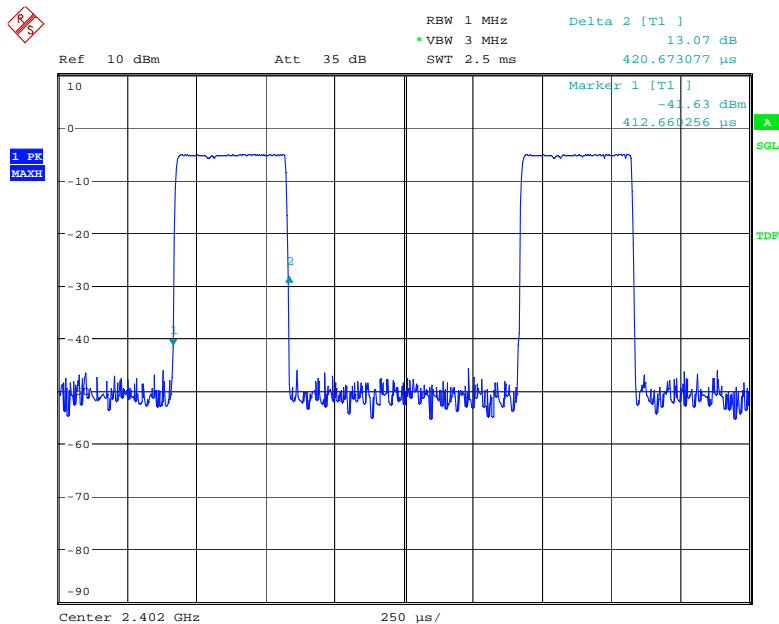


Date: 22.FEB.2016 10:51:55

GFSK DH3

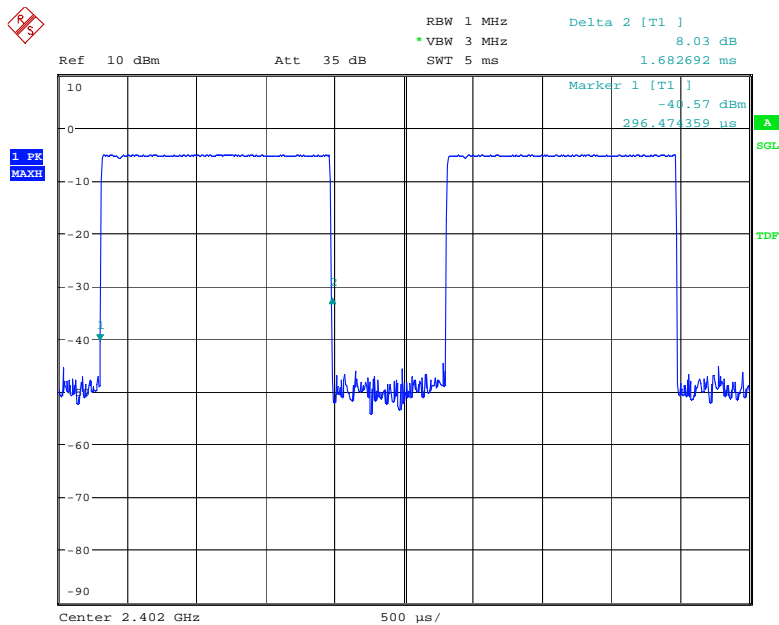


Date: 22.FEB.2016 10:52:34

## GFSK DH5

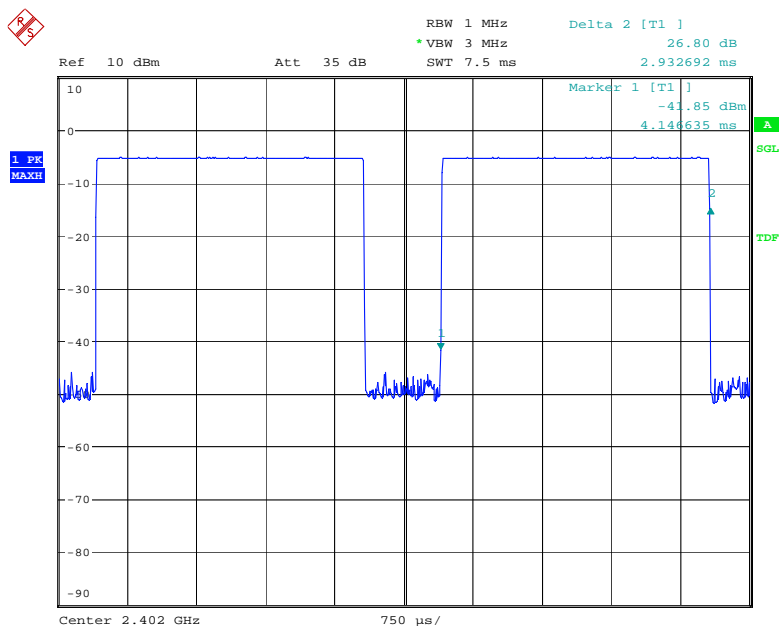

Date: 22.FEB.2016 10:53:16

## $\pi/4$ -DQPSK 2-DH1

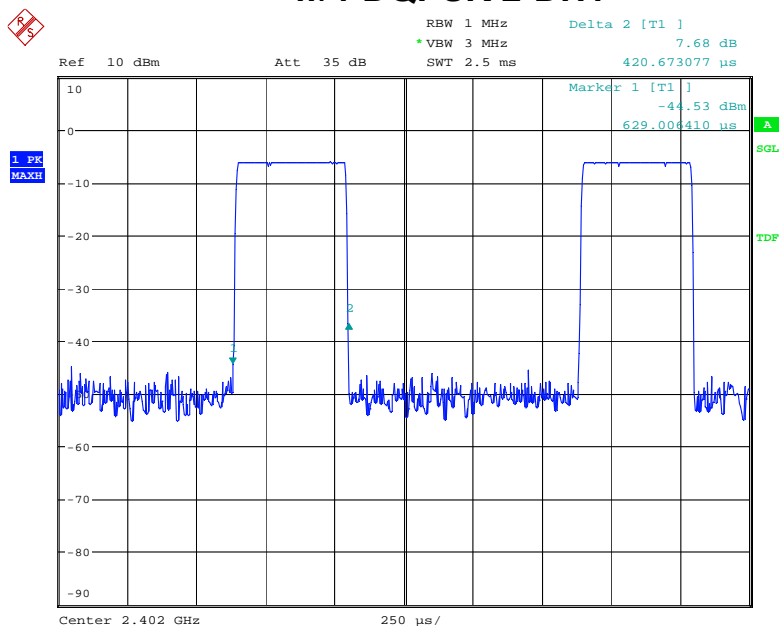


Date: 22.FEB.2016 10:54:38






$\pi/4$ -DQPSK 2-DH3

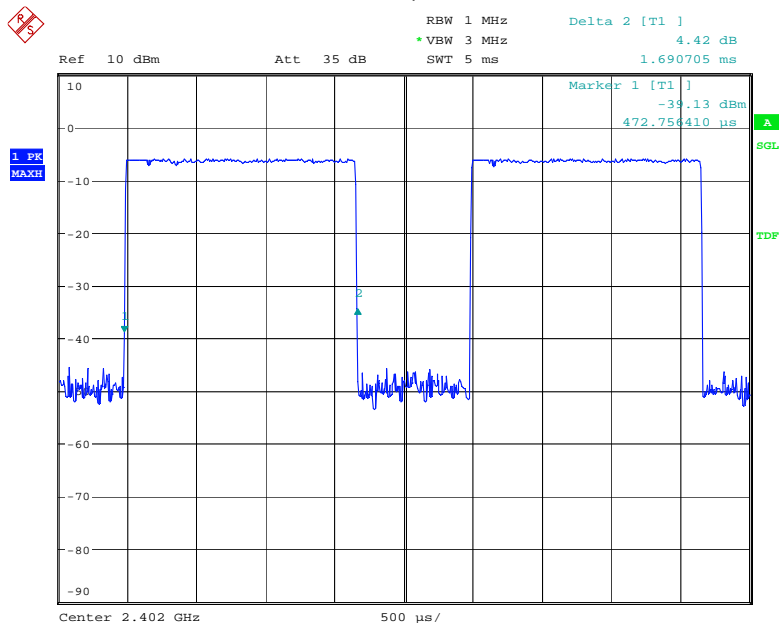

Date: 22.FEB.2016 10:56:12


$\pi/4$ -DQPSK 2-DH5

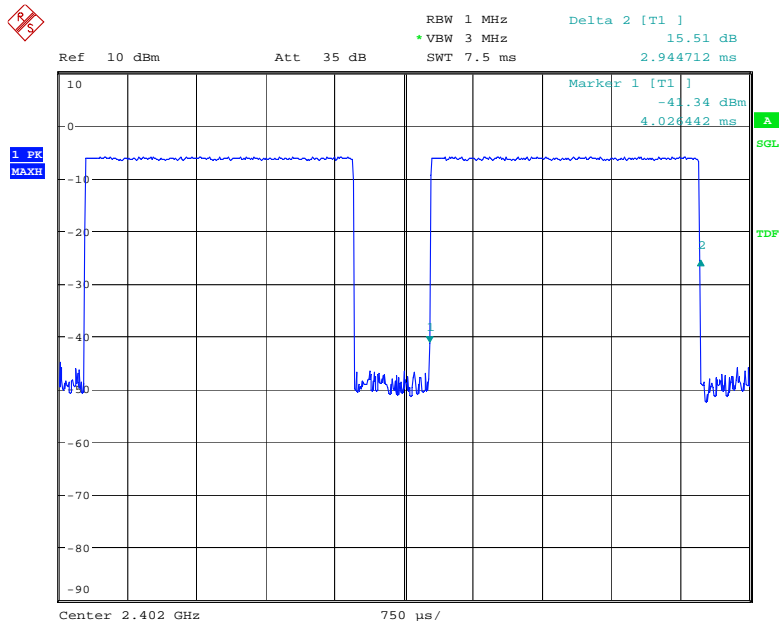

Date: 22.FEB.2016 10:56:53




8DPSK 3-DH1

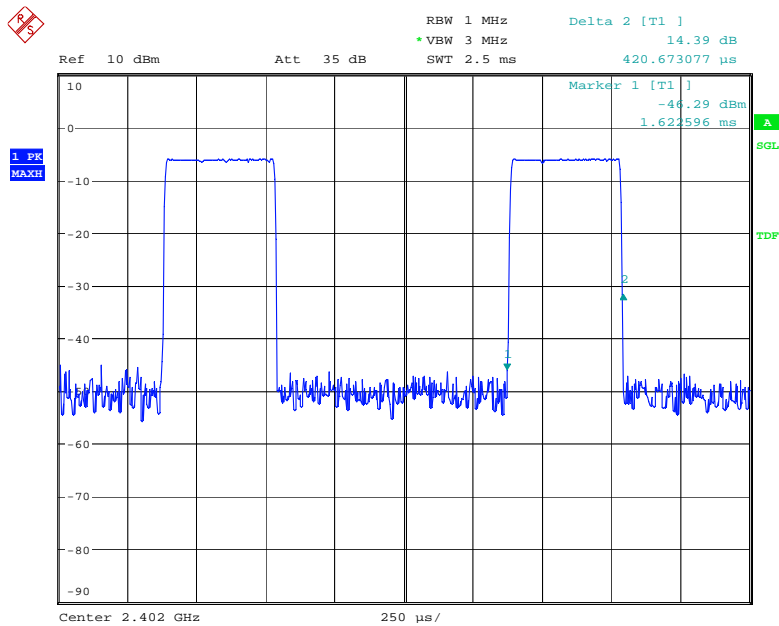


Date: 22.FEB.2016 10:57:22

8DPSK 3-DH3

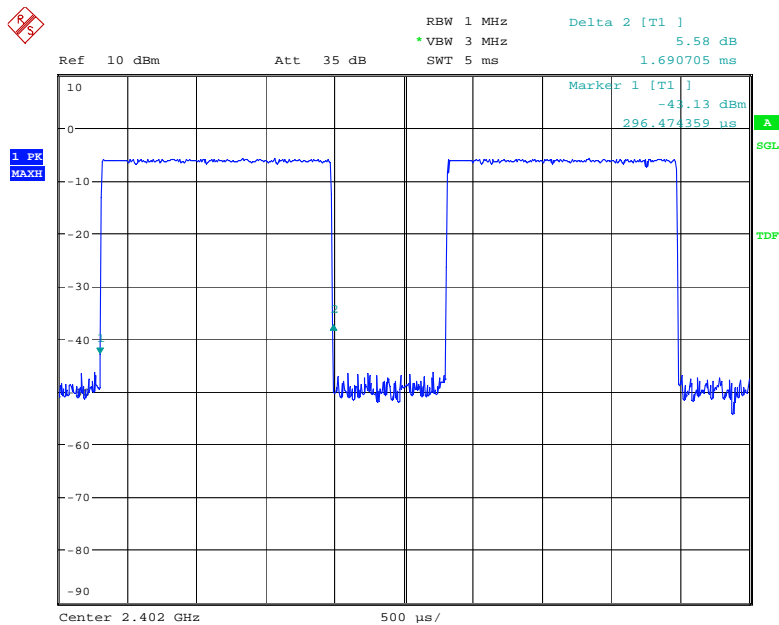

Date: 22.FEB.2016 10:58:04

8DPSK 3-DH5

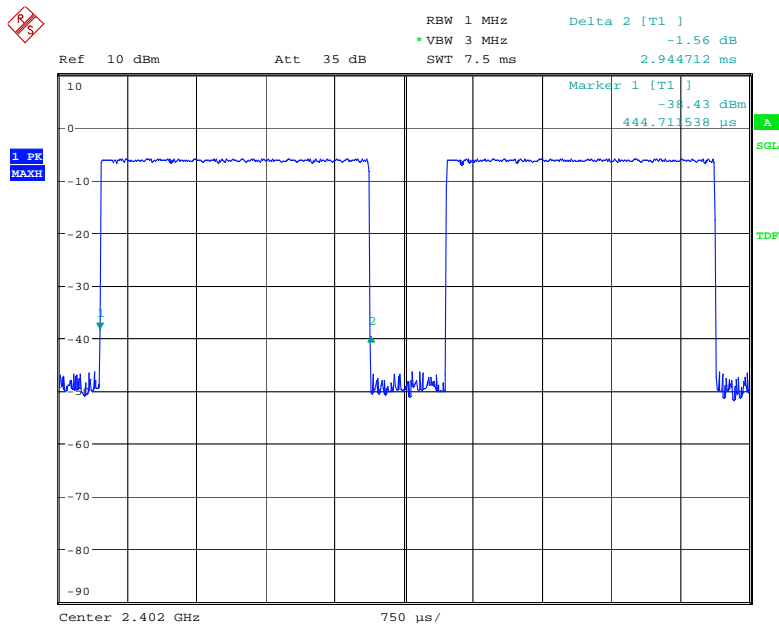

Date: 22.FEB.2016 10:58:52

## 9. MAXIMUM PEAK OUTPUT POWER

### 9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.


### 9.2 Measurement Results

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK				
RBW :	3MHz	VBW :	3MHz		
Spectrum Detector:	PK	Test Date :	February 22, 2016		
Test By:	Sance	Temperature :	24 °C		
Test Result:	PASS	Humidity :	50 %		


Channel Frequency (MHz)	Cable Loss dB	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(dBm)	Pass/Fail
GFSK					
2402.00	1.5	-3.53	0.44	21	PASS
2441.00	1.5	0.43	1.10	21	PASS
2480.00	1.5	0.42	1.10	21	PASS
$\pi/4$ -DQPSK					
2402.00	1.5	-4.20	0.38	21	PASS
2441.00	1.5	-0.13	0.97	21	PASS
2480.00	1.5	-0.21	0.95	21	PASS
8DPSK					
2402.00	1.5	-4.14	0.39	21	PASS
2441.00	1.5	-0.18	0.96	21	PASS
2480.00	1.5	-0.17	0.96	21	PASS

GFSK Lowest Channel

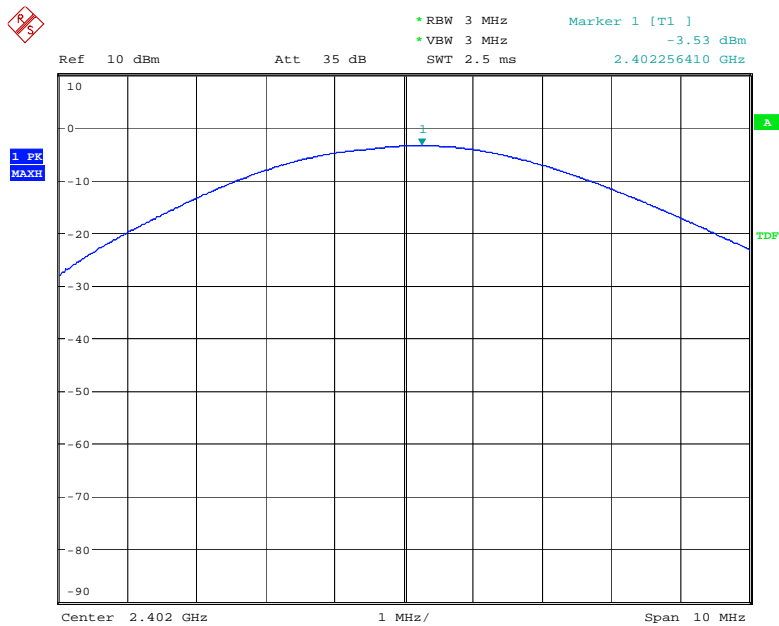


Date: 22.FEB.2016 10:00:41

GFSK Middle Channel

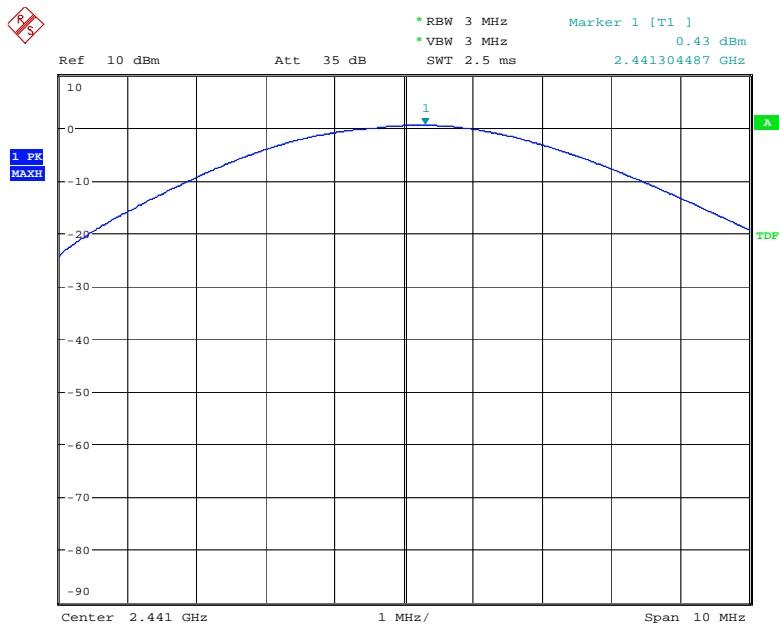


Date: 22.FEB.2016 10:01:02

GFSK Highest Channel

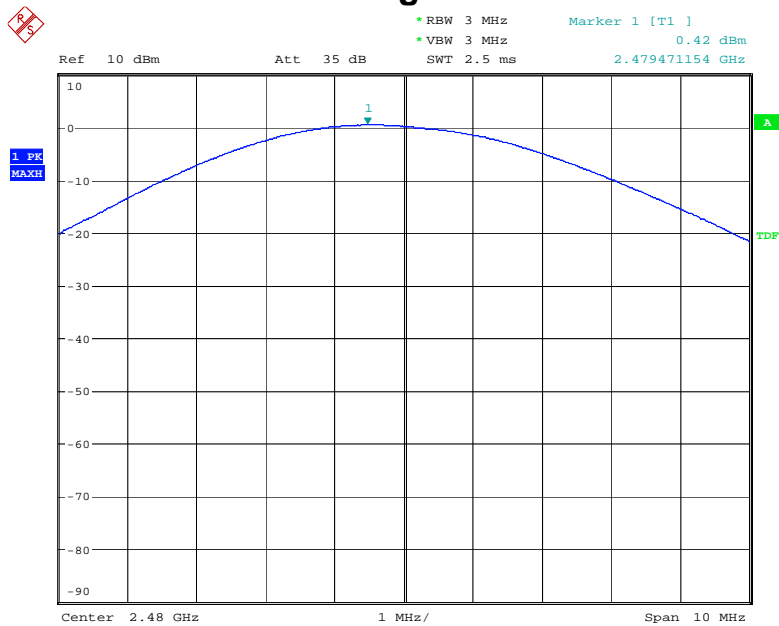


Date: 22.FEB.2016 10:01:31

$\pi/4$ -DQPSK Lowest Channel

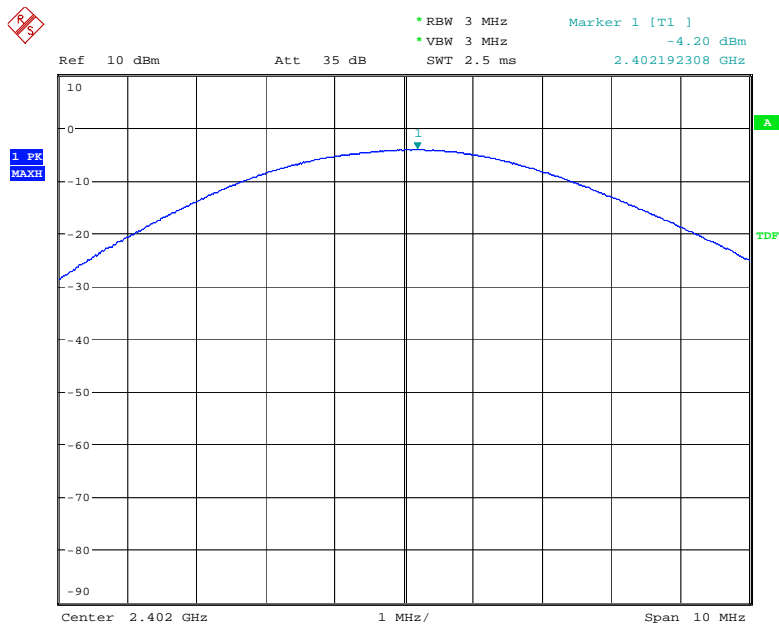


Date: 22.FEB.2016 10:02:00

$\pi/4$ -DQPSK Middle Channel

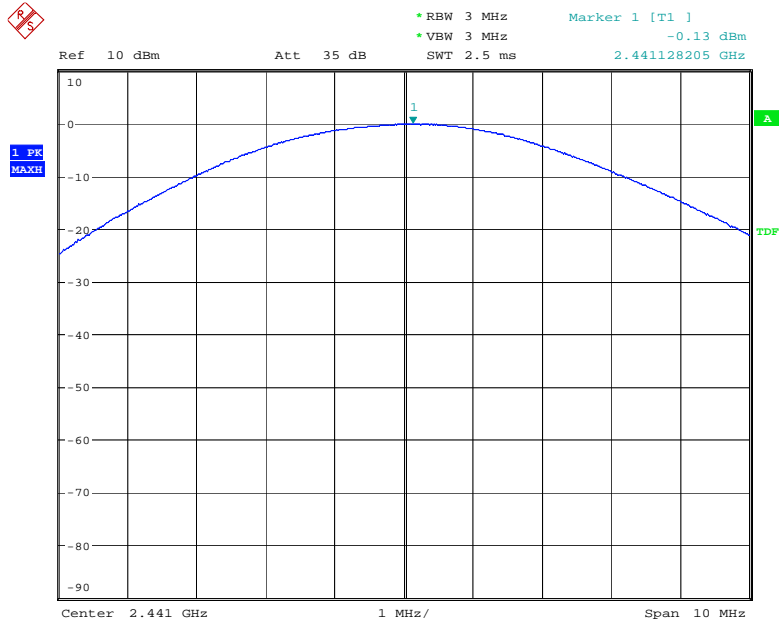


Date: 22.FEB.2016 10:02:26

$\pi/4$ -DQPSK Highest Channel

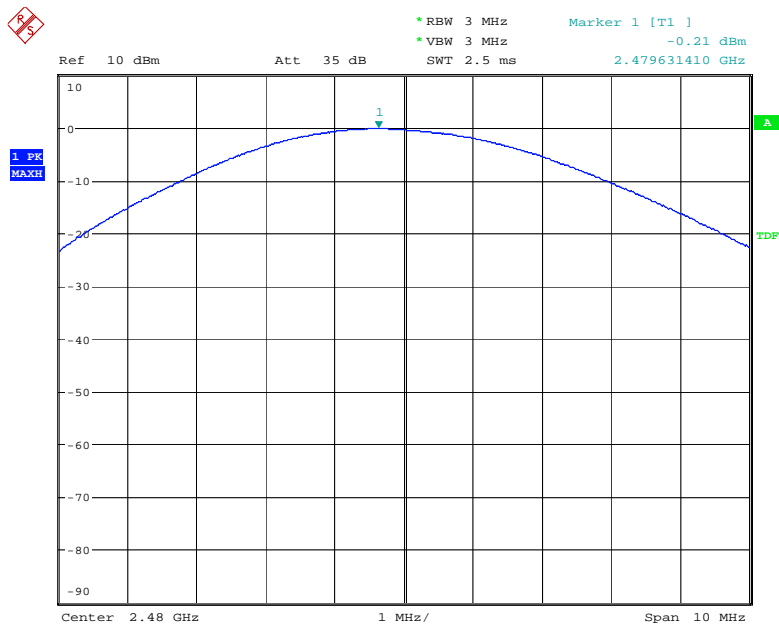


Date: 22.FEB.2016 10:02:55

8DPSK Lowest Channel

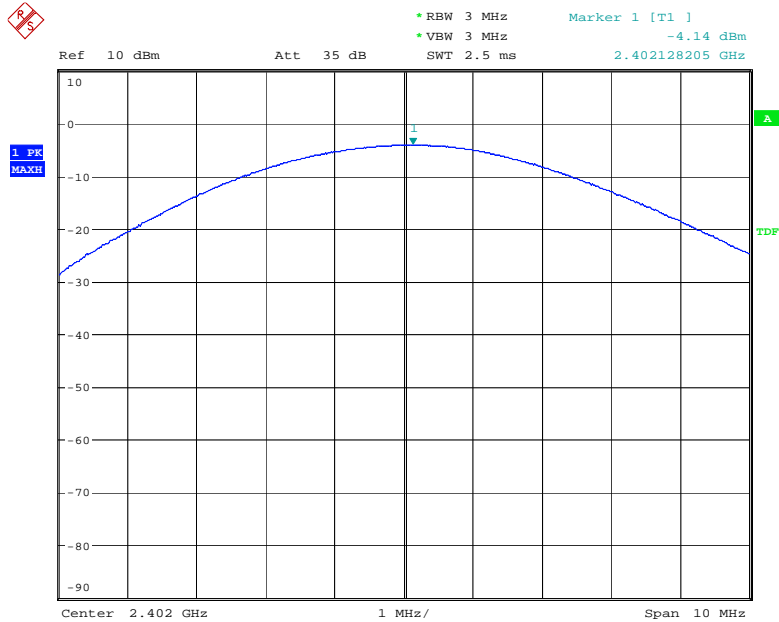

Date: 22.FEB.2016 10:03:47


8DPSK Middle Channel

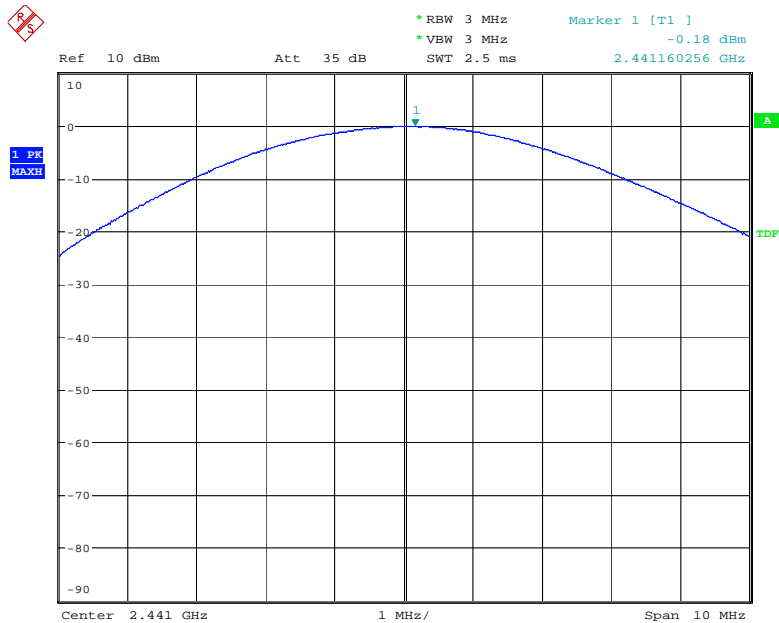

Date: 22.FEB.2016 10:04:21



8DPSK Highest Channel

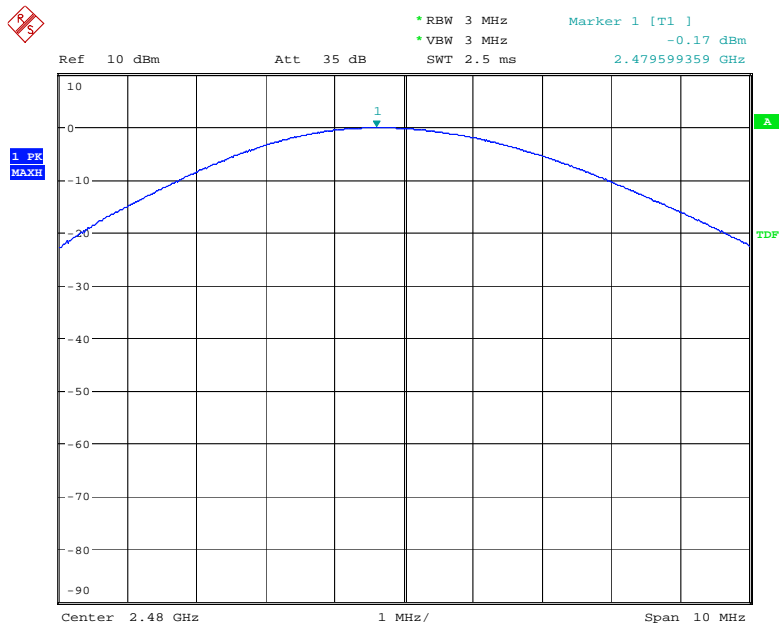

Date: 22.FEB.2016 10:04:51

## 10. Band Edge

### 10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

### 10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 10.3 Measurement Results

Please see below test table and plots.  
For Radiated Emission  
The worst case: GFSK


Hopping-on mode

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	49.43	38.30	8.06	57.49	46.36	74.00	54.00	-16.51	-7.64
2390.000	V	46.08	35.23	8.06	54.14	43.29	74.00	54.00	-19.86	-10.71
2483.500	H	51.26	40.34	8.36	59.62	48.70	74.00	54.00	-14.38	-5.30
2483.500	V	50.85	39.74	8.36	59.21	48.10	74.00	54.00	-14.79	-5.90


**Note:** (1) Emission Level= Reading Level + Factor  
(2) Factor= Antenna Gain + Cable Loss – Amplifier Gain  
(3) Horn antenna used for the emission over 1000MHz.

For RF Conducted

## GFSK Lowest Channel

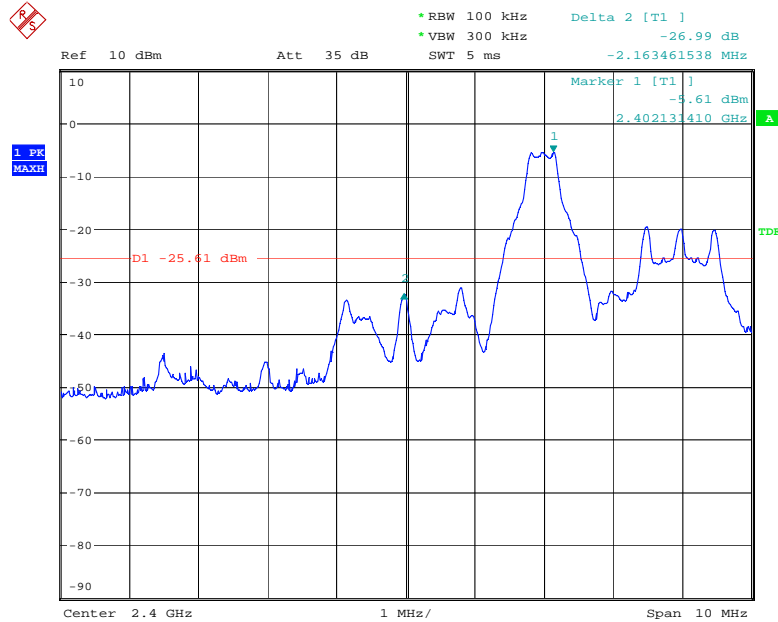


Date: 22.FEB.2016 11:02:30

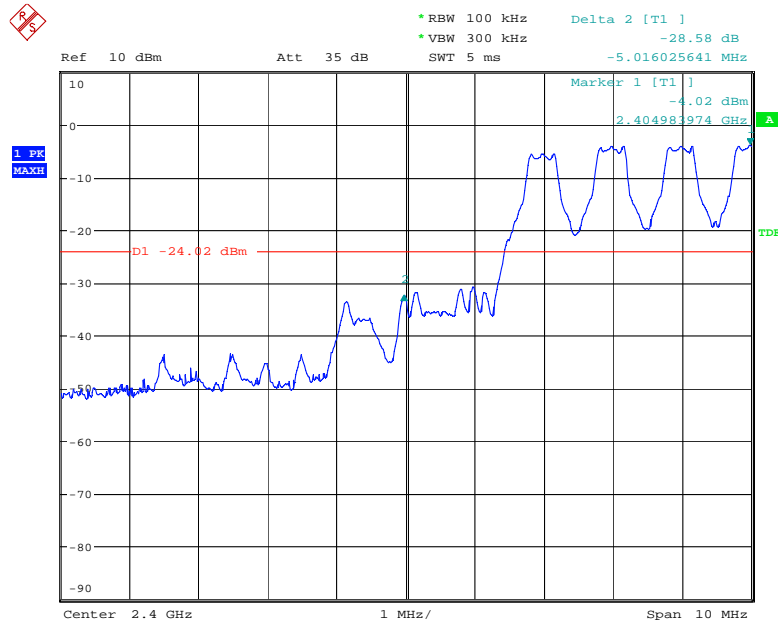


Date: 22.FEB.2016 11:04:48

GFSK Highest Channel

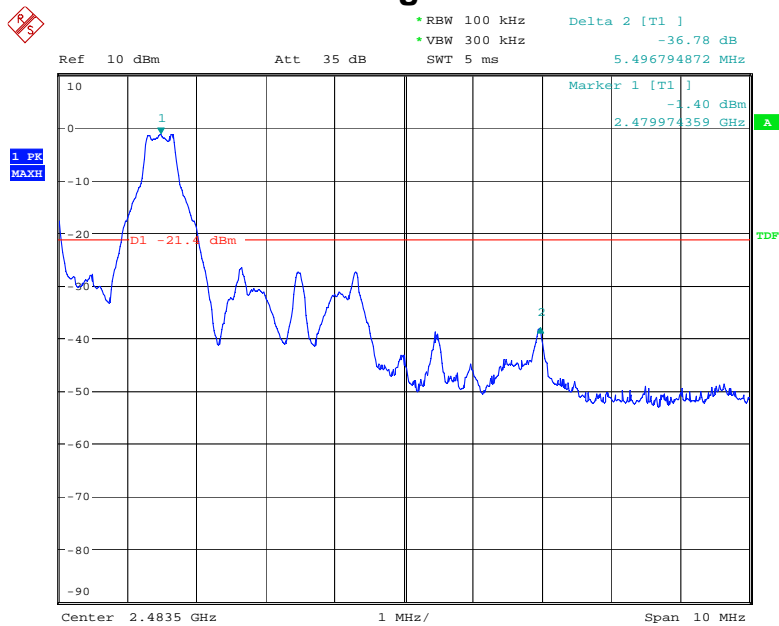


Date: 22.FEB.2016 15:24:25

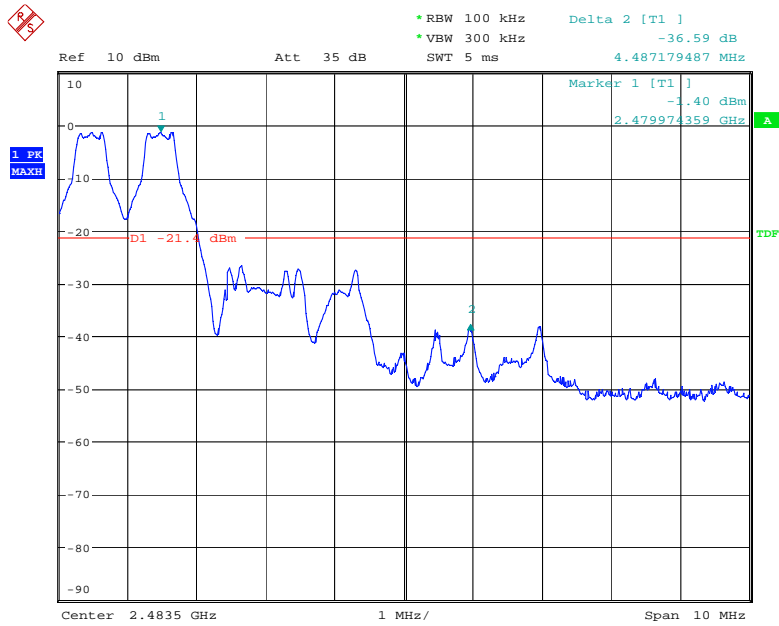


Date: 22.FEB.2016 15:24:56



$\pi/4$ -DQPSK Lowest Channel

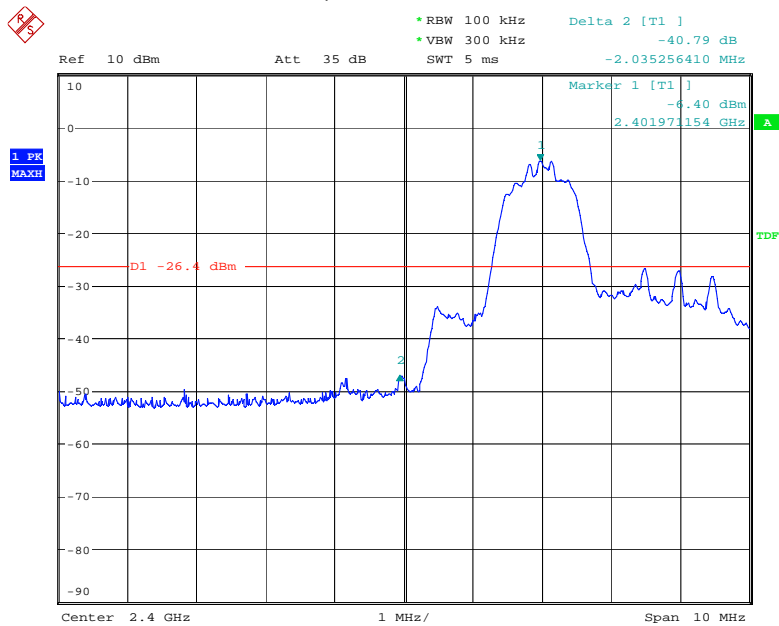


Date: 22.FEB.2016 11:09:23

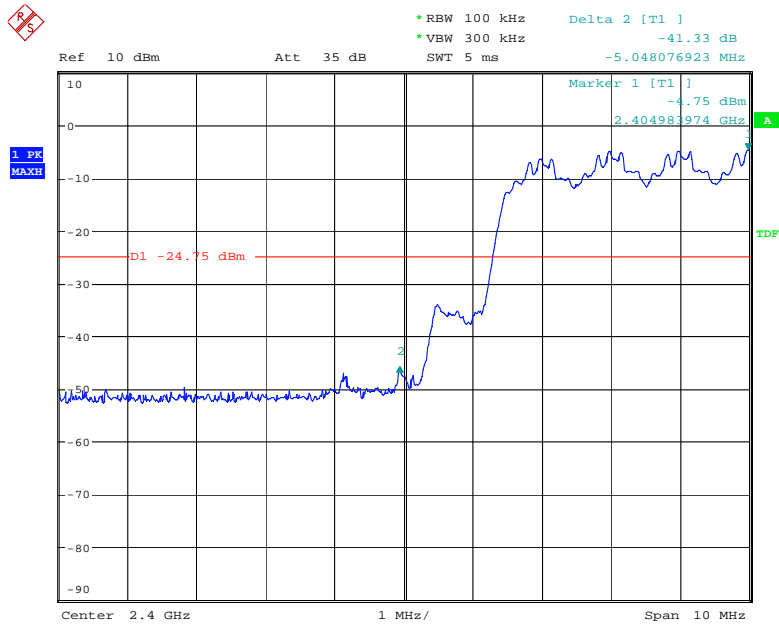


Date: 22.FEB.2016 11:11:35

$\pi/4$ -DQPSK Highest Channel

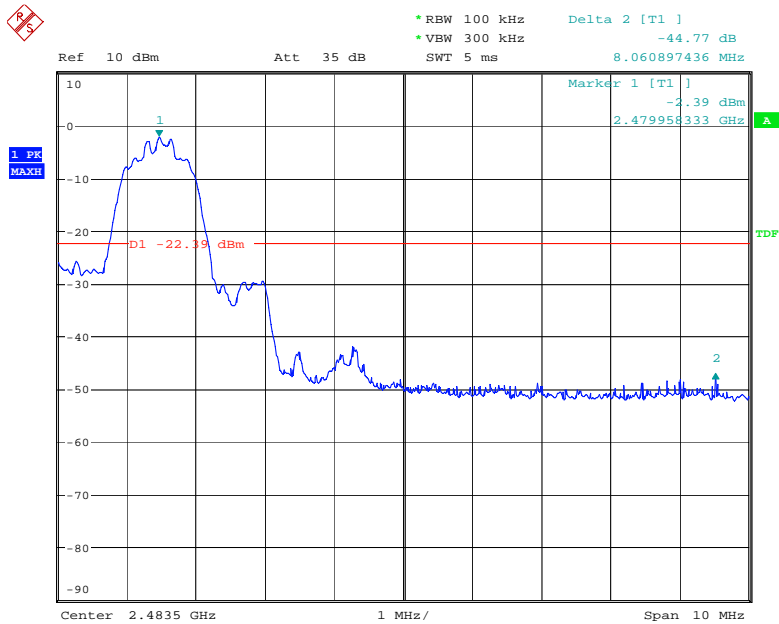

Date: 22.FEB.2016 11:14:35

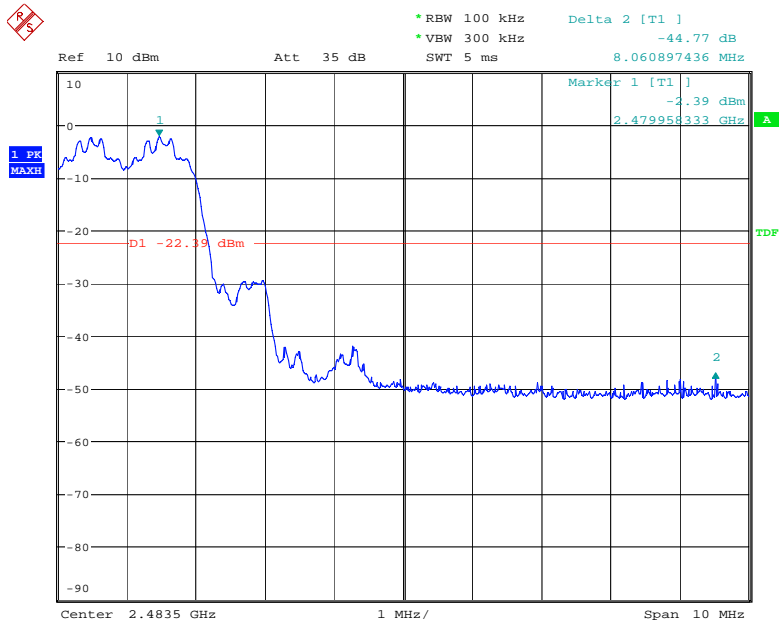

Date: 22.FEB.2016 11:15:44

1. PK  
MAXH

Ref 10 dBm Att 35 dB

\* RBW 100 kHz Delta 2 [T1] -39.83 dB  
\* VBW 300 kHz -2.996794872 MHz  
SWT 5 ms

Marker 1 [T1]  
-6.42 dBm  
2.40213410 GHz

D1 -26.42 dBm

Center 2.4 GHz 1 MHz/ Span 10 MHz

1 PK  
MAXII

Ref 10 dBm Att 35 dB

\*RBW 100 kHz  
\*VBW 300 kHz  
SWT 5 ms

Delta 2 [T1]  
-41.44 dB  
-5.849358974 MHz

Marker 1 [T1]  
-4.81 dBm  
2.404981974 GHz

D1 -24.81 dBm


2

Center 2.4 GHz 1 MHz/ Span 10 MHz


Page 51 of 57



8DPSK Highest Channel

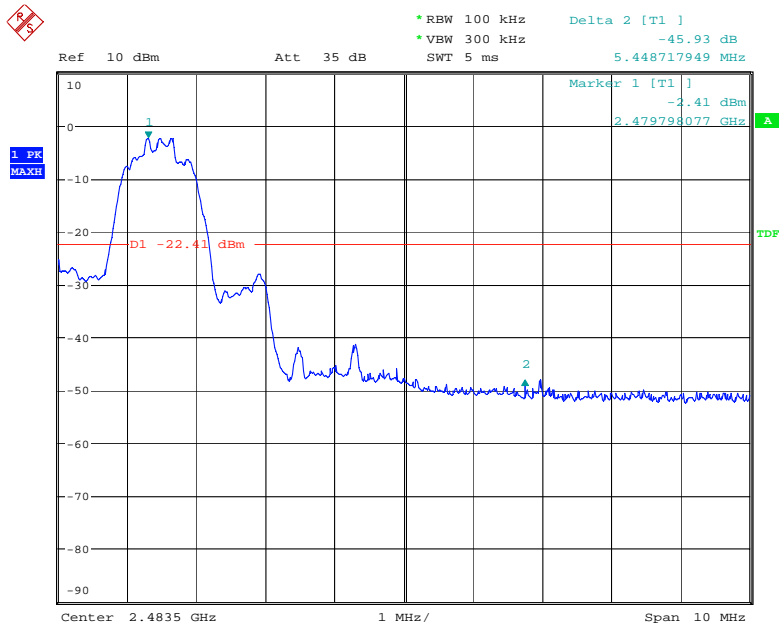

Date: 22.FEB.2016 11:23:55

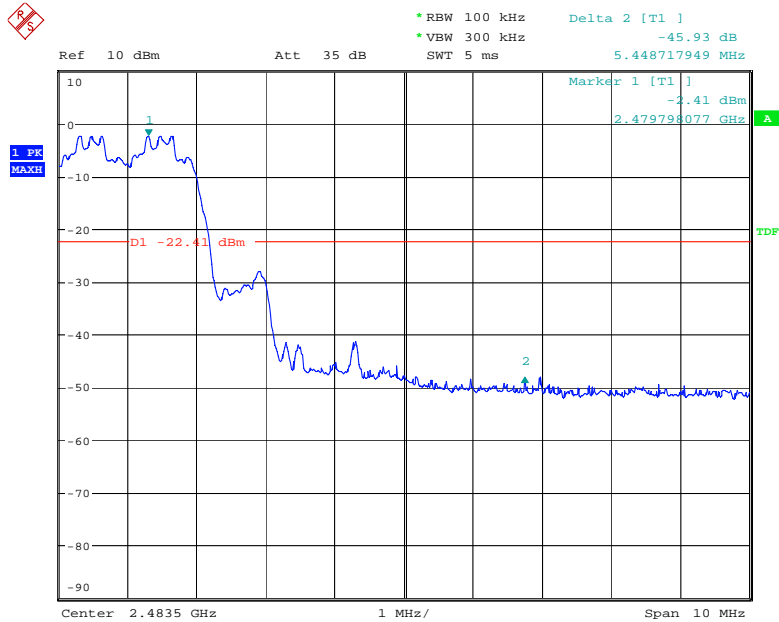

Date: 22.FEB.2016 11:25:33



## **11. Antenna Application**

### **11.1 Antenna requirement**

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **11.2 Measurement Results**

The antenna is PCB antenna and no consideration of replacement, and the best case gain of the antenna is 0dBi. So, the antenna is consider meet the requirement.

## **12. Conducted Spurious Emissions**

### **12.1 Measurement Procedure**


Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.

### **12.2. Measurement Results**


Please refer to following plots, the worst case (GFSK) was shown.

Lowest Channel

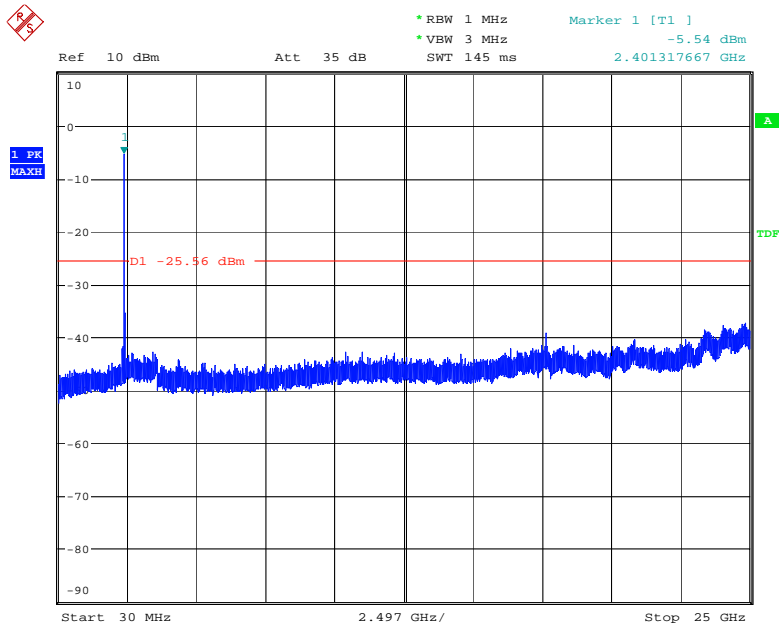


Date: 22.FEB.2016 11:32:40

Middle Channel

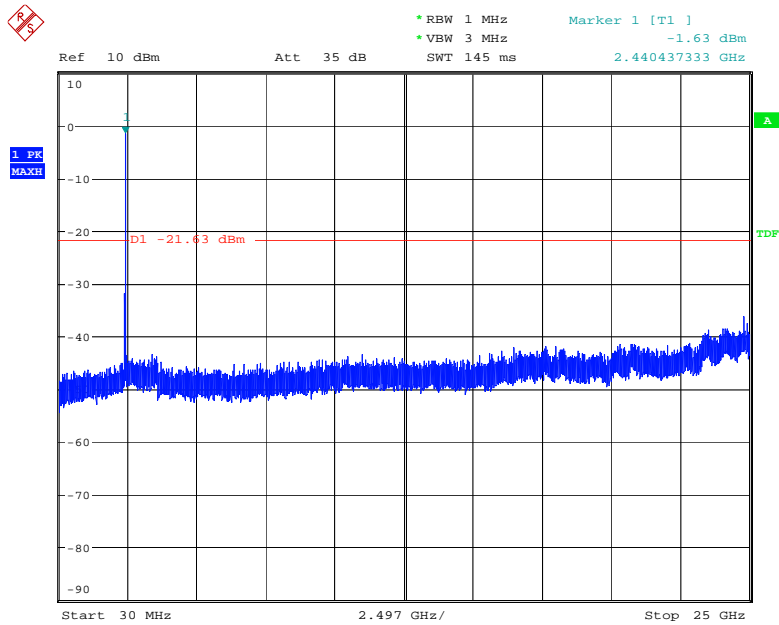

Date: 22.FEB.2016 11:33:44

Highest Channel

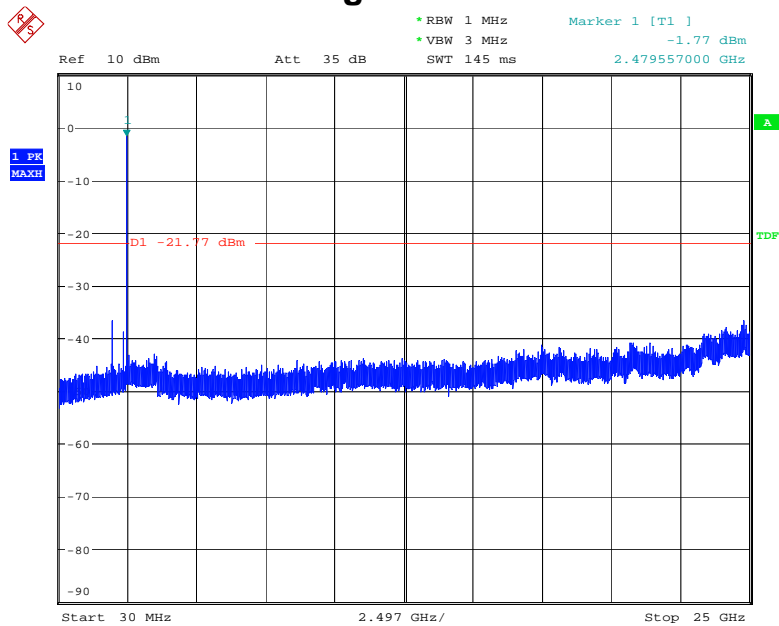

Date: 22.FEB.2016 11:35:06

Note: Sweep points=30001pts

### 13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 23, 2015	Nov. 22, 2016
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 26, 2015	Nov. 25, 2016
Positioning Controller	UC	UC 3000	N/A	0~360° , 1-4m	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 07, 2015	Nov. 06, 2016
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 07, 2015	Nov. 06, 2016
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 07, 2015	Mar. 06, 2016
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 07, 2015	Nov. 06, 2016
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.23, 2015	Oct.22, 2016
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 05, 2015	Nov. 04, 2016
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.10, 2015	Oct.09, 2016
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Sep. 01, 2015	Aug. 31, 2016
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 03, 2015	Nov. 02, 2016
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 07, 2015	Nov. 06, 2016
Temporary antenna connector	TESCOM	SS402	N/A	1G-18GHz	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---