



REPORT No.: SZ16030031W01

FCC RF TEST REPORT

APPLICANT : Lynxus Technology Corp
PRODUCT NAME : ZigBee RF Module
MODEL NAME : ZBM01
TRADE NAME : N.A
BRAND NAME : Lynxus
FCC ID : 2AHUTLYNXUSZBM01
STANDARD(S) : 47 CFR Part 15 Subpart C
ISSUE DATE : 2016-06-22



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	5
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 PEAK OUTPUT POWER	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST RESULT	8
2.3 6DB BANDWIDTH	11
2.3.1 REQUIREMENT	11
2.3.2 TEST DESCRIPTION	11
2.3.3 TEST RESULT	11
2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	14
2.4.1 REQUIREMENT	14
2.4.2 TEST DESCRIPTION	14
2.4.3 TEST RESULT	14
2.5 POWER SPECTRAL DENSITY (PSD)	18
2.5.1 REQUIREMENT	18
2.5.2 TEST DESCRIPTION	18
2.5.3 TEST RESULT	18
2.6 RESTRICTED FREQUENCY BANDS	21
2.6.1 REQUIREMENT	21
2.6.2 TEST DESCRIPTION	21
2.6.3 TEST RESULT	22



2.7	CONDUCTED EMISSION	25
2.7.1	REQUIREMENT	25
2.7.2	TEST DESCRIPTION	25
2.7.3	TEST RESULT	26
2.8	RADIATED EMISSION	28
2.8.1	REQUIREMENT	28
2.8.2	TEST DESCRIPTION	29
2.8.3	TEST RESULT	31
ANNEX A GENERAL INFORMATION		35

Change History		
Issue	Date	Reason for change
1.0	2016-06-22	First edition



REPORT No.: SZ16030031W01

TEST REPORT DECLARATION

Applicant	Lynxus Technology Corp
Applicant Address	Nanshan District Tian Xia International Center B (Room1119-1120)
Manufacturer	Lynxus Technology Corp
Manufacturer Address	Nanshan District Tian Xia International Center B (Room1119-1120)
Product Name	ZigBee RF Module
Model Name	ZBM01
Brand Name	Lynxus
HW Version	ZBM-02
SW Version	ZBM-7.8
Test Standards	47 CFR Part 15 Subpart C
Test Date	2016-06-02 to 2016-06-07
Test Result	PASS

Tested by : Yuan Ling
Yuan Ling

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Peng Huarui
Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	Lynxus Technology Corp
Address:	Nanshan District Tian Xia International Center B (Room1119-1120)

1.2 Equipment under Test (EUT) Description

Brand Name:	Lynxus
Trade Name:	N.A
Model Name:	ZBM01
Frequency Range:	The frequency range used is 2405MHz - 2480MHz.
Modulation Type:	GFSK
Equipment type:	Zigbee
Antenna Type:	Ceramic Antenna
Antenna Gain:	1 dBi

1.2.1 The channel number and frequency of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

NOTE:

The EUT is a Smart Watch, it works at 2.4GHz ISM band; the frequencies allocated for the Zigbee is $F(\text{MHz})=2405+5*(n-11)$ ($11 \leq n \leq 26$). The lowest, middle, highest channel numbers of the Zigbee EUT used and tested in this report are separately 11 (2405MHz), 20 (2450MHz) and 26 (2480MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2.2 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
01	ZBM-02	ZBM-7.8

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(b)	Peak Output Power	Jun 02, 2016	<u>PASS</u>
3	15.247(a)	Bandwidth	Jun 02, 2016	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	Jun 02, 2016	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	Jun 07, 2016	<u>PASS</u>
6	15.207	Conducted Emission	Jun 07, 2016	<u>PASS</u>
7	15.209 ,15.247(d)	Radiated Emission	Jun 07, 2016	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	Jun 02, 2016	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Peak Output Power

2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.


2.2.2 Test Description

A. Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the RBW to 1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.

B. Test Setup:

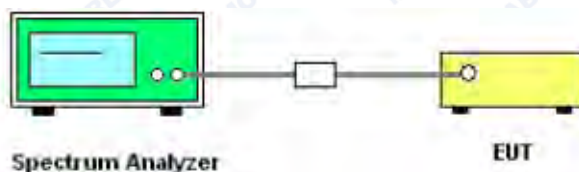

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

C. Equipments List:

Please reference ANNEX A (1.5).

2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the EUT.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Refer to Plot	Limit		Verdict
		dBm	W		dBm	W	
11	2405	-1.64	0.0007	Plot A	30	1	PASS
20	2450	-1.99	0.0006	Plot B			PASS
26	2480	-2.00	0.0006	Plot C			PASS


B. Test Plots:



REPORT No.: SZ16030031W01

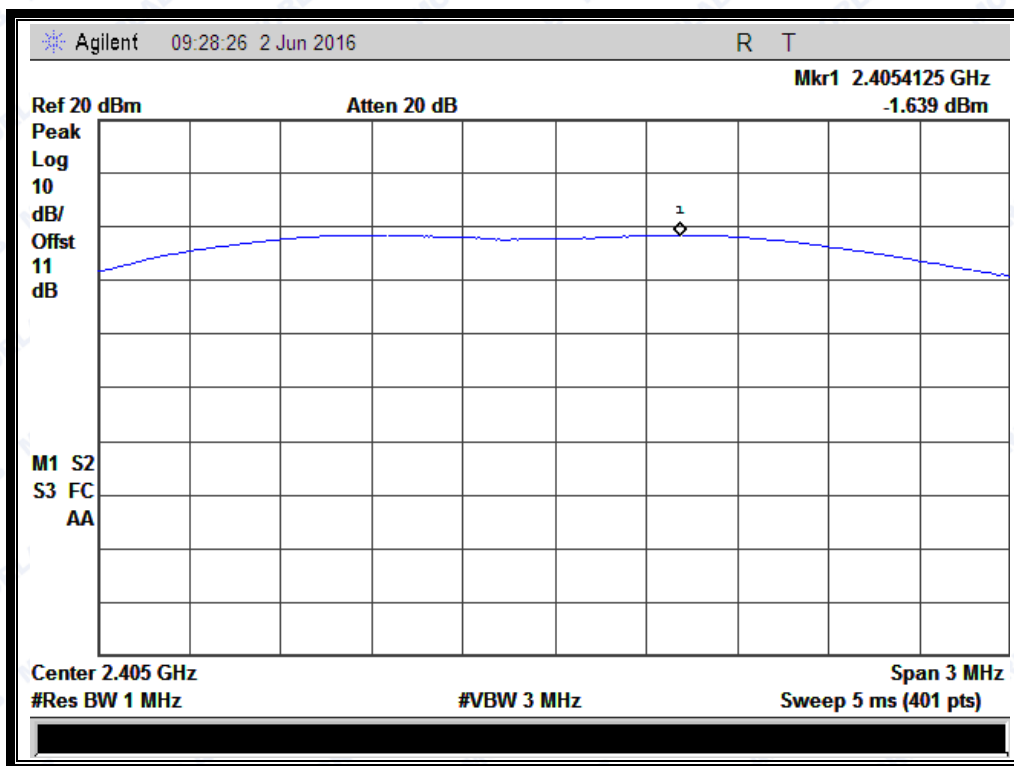


(Plot A: Channel 11:2405Hz)

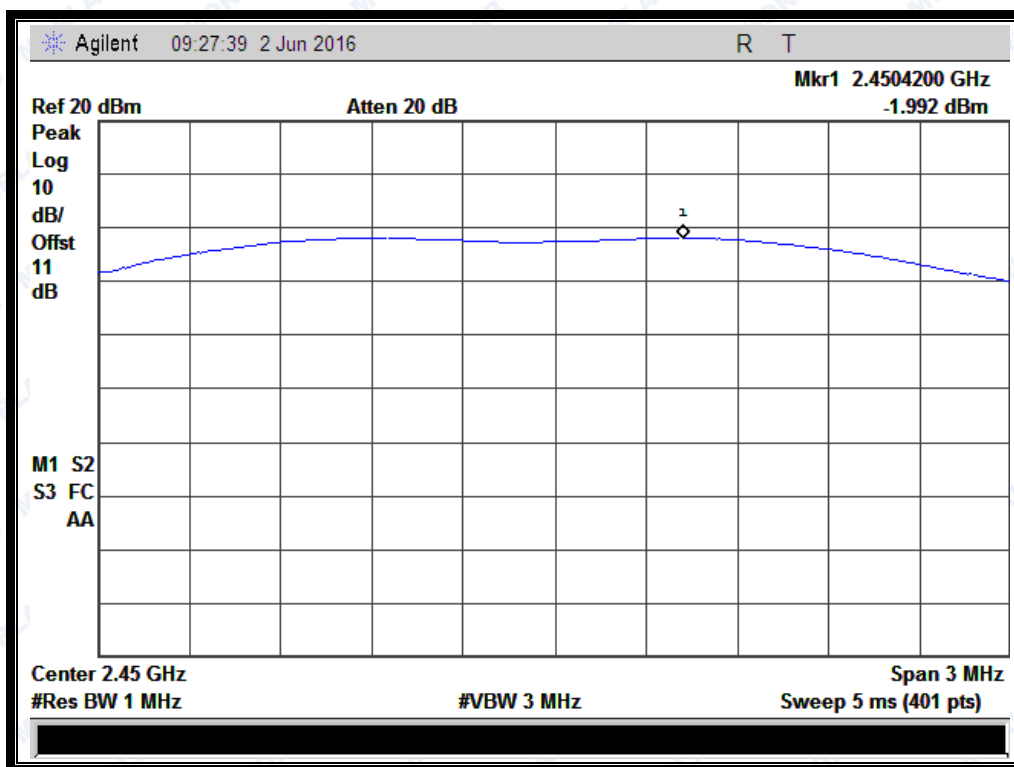

(Plot B: Channel 20: 2450MHz)



REPORT No.: SZ16030031W01

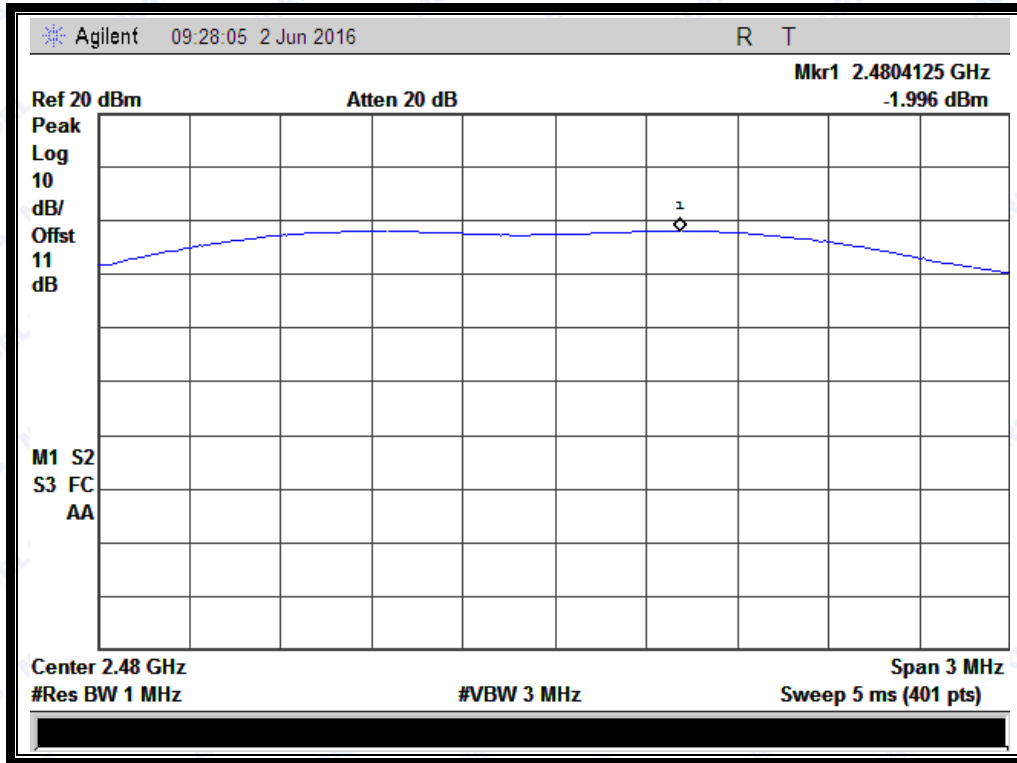

(Plot C: Channel 26: 2480MHz)


2.3 6dB Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:

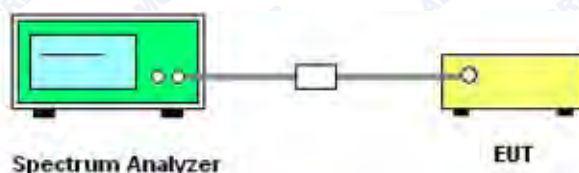

The EUT which is powered by the battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the EUT.


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
11	2405	1.628	Plot A	≥500	PASS
20	2450	1.619	Plot B	≥500	PASS
26	2480	1.595	Plot C	≥500	PASS


B. Test Plots:



REPORT No.: SZ16030031W01

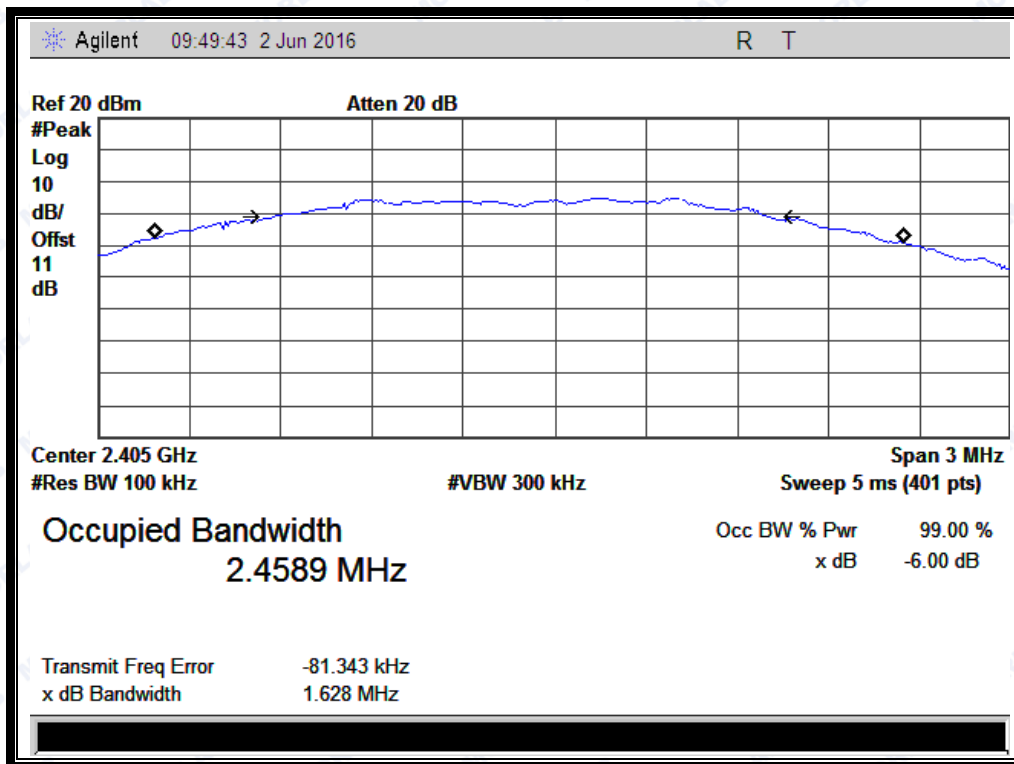


(Plot A: Channel 11: 2405MHz)

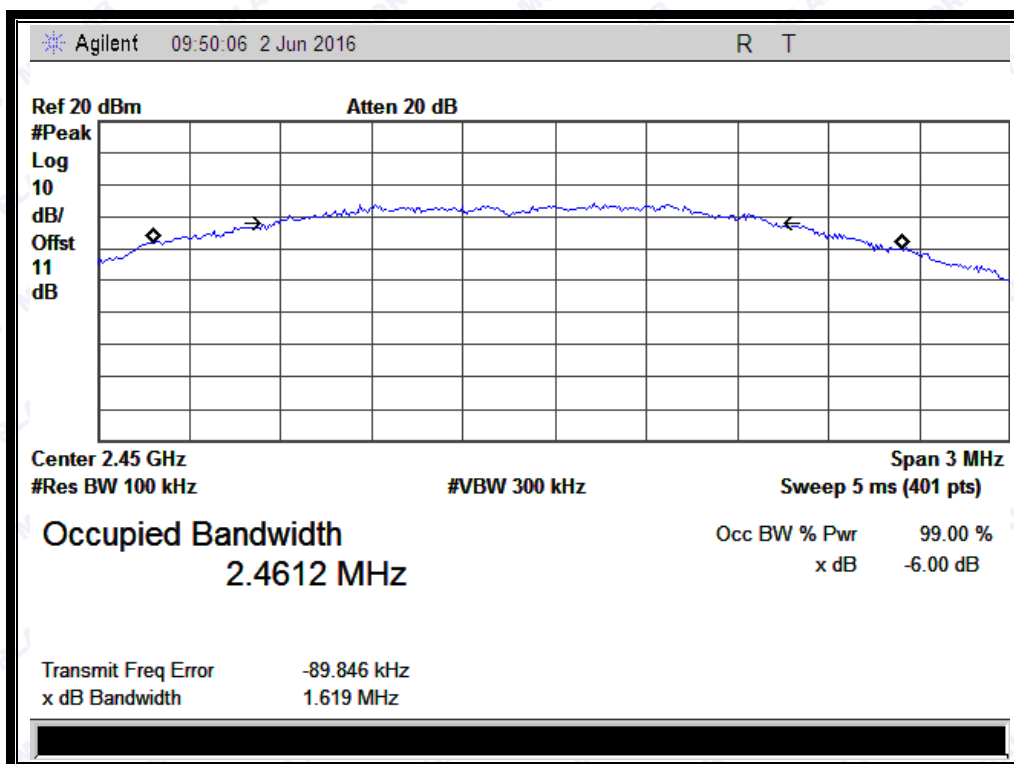

(Plot B: Channel 20: 2450 MHz)



REPORT No.: SZ16030031W01

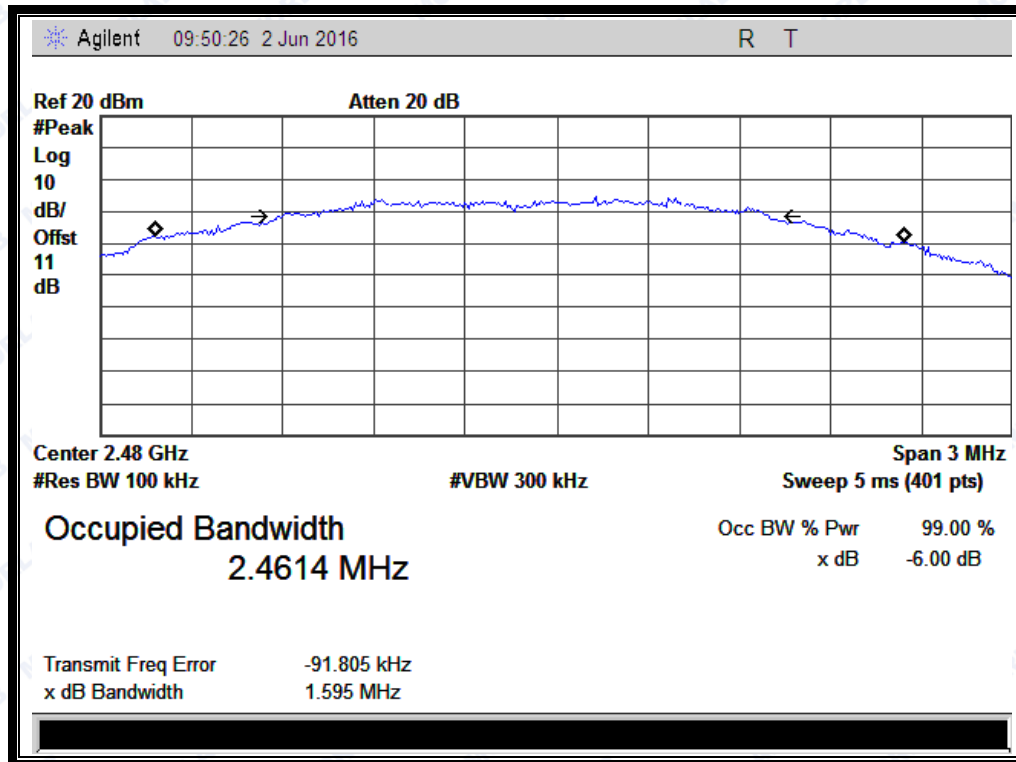

(Plot C: Channel 26: 2480MHz)


2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:

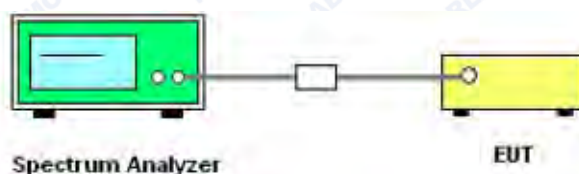

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A (1.5).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
11	2405	-42.32	Plot A.1	-6.28	-26.28	PASS
20	2450	-42.82	Plot B.1	-6.17	-26.17	PASS
26	2480	-42.43	Plot C.1	-6.96	-26.96	PASS

B. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.



REPORT No.: SZ16030031W01

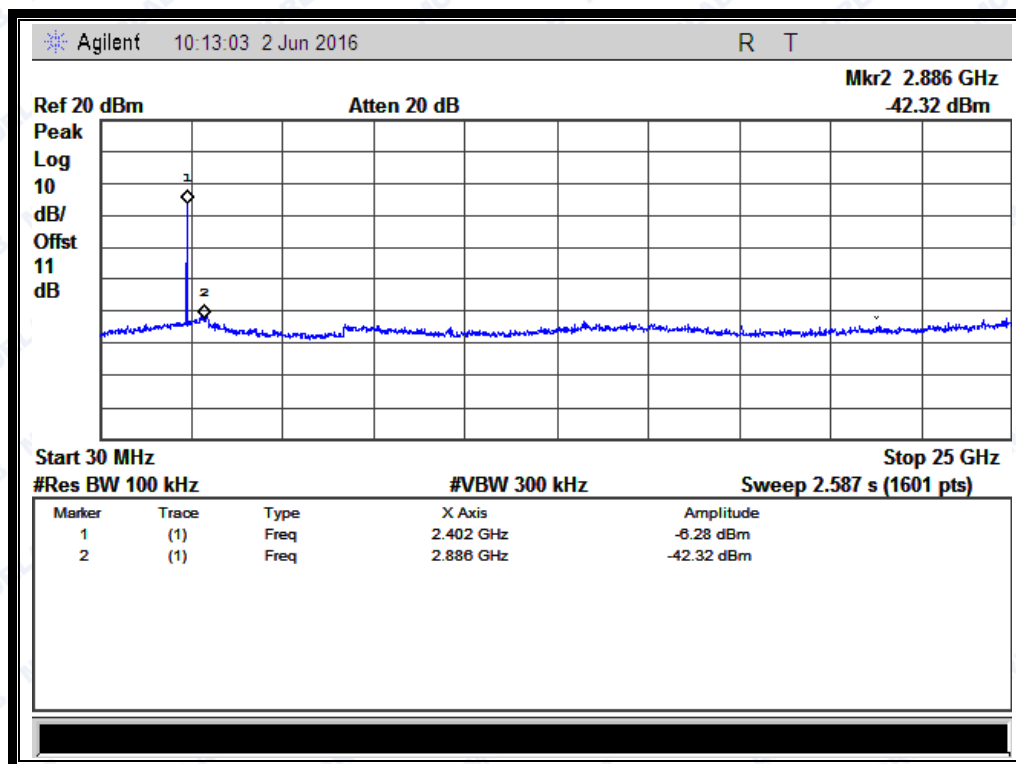


(Plot A.1: Channel = 11, 30MHz to 25GHz)

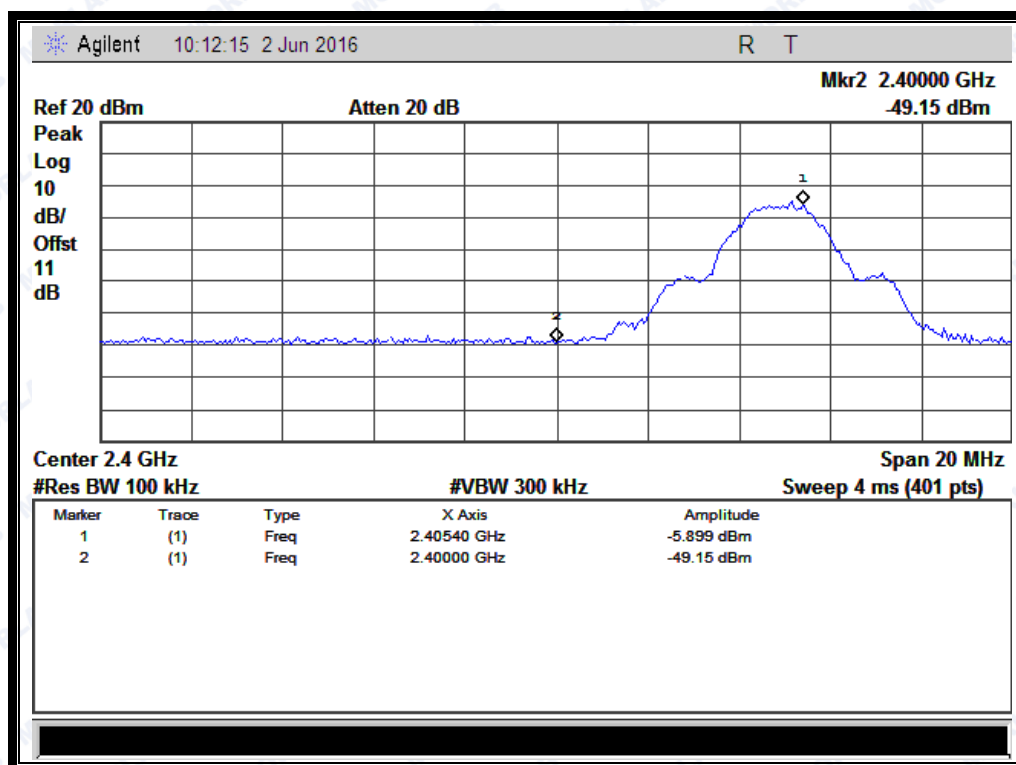


(Band Edge@ Channel = 11)



REPORT No.: SZ16030031W01

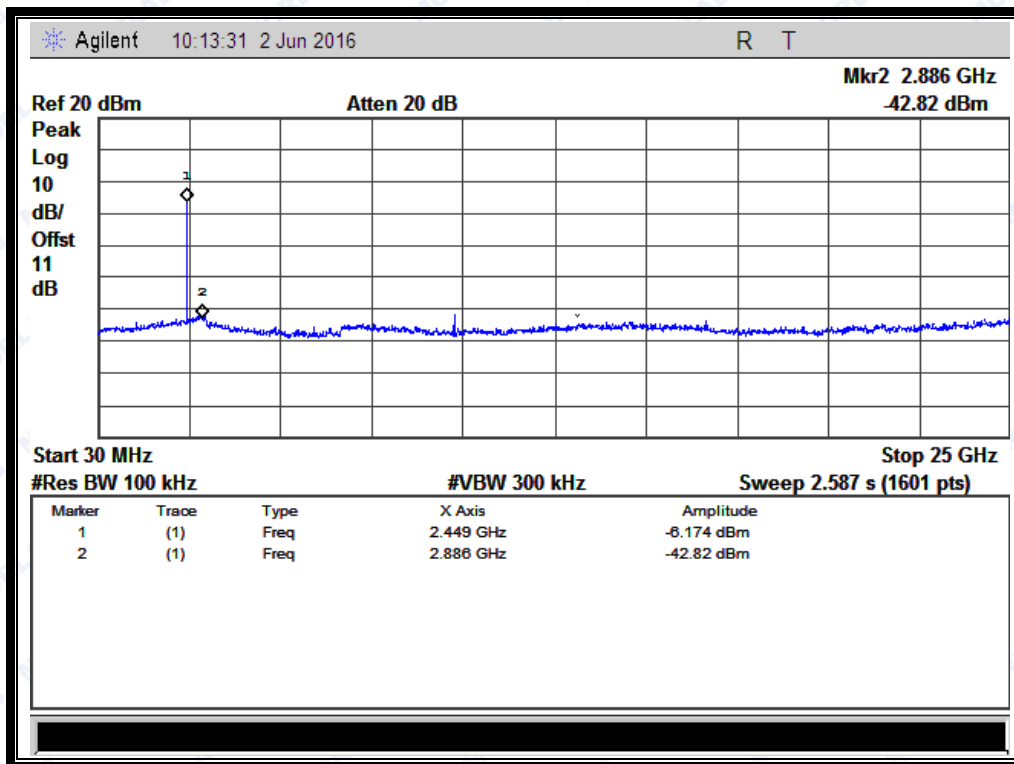


(Plot B.1: Channel = 20, 30MHz to 25GHz)

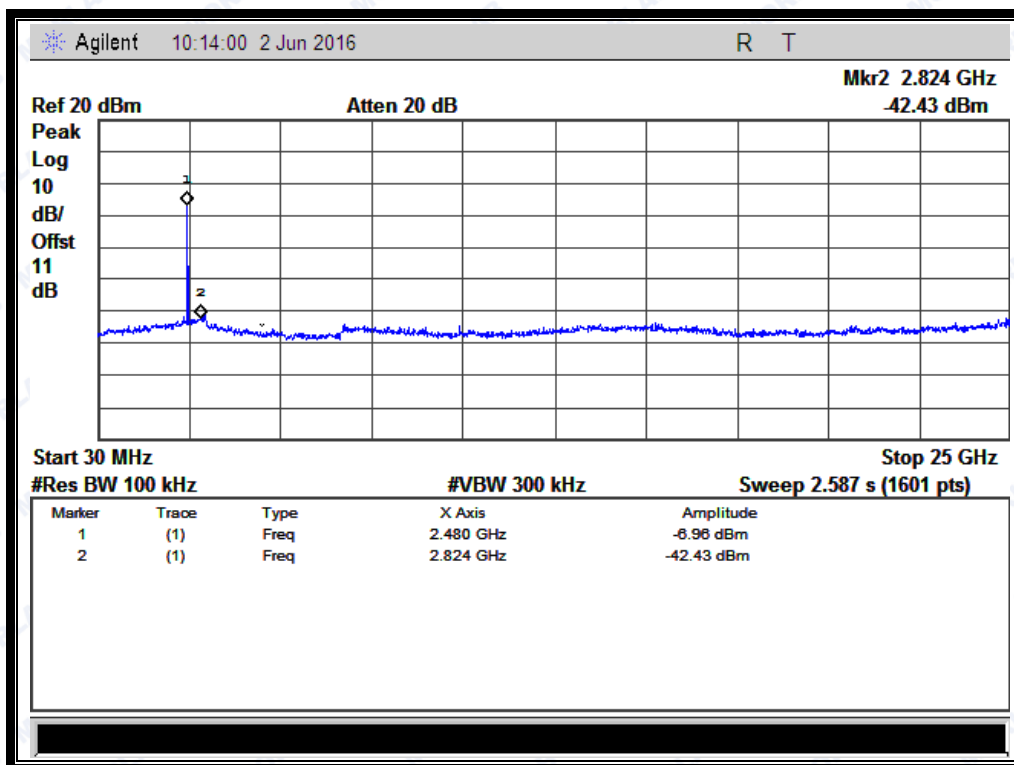

(Plot C.1: Channel = 26, 30MHz to 25GHz)



REPORT No.: SZ16030031W01

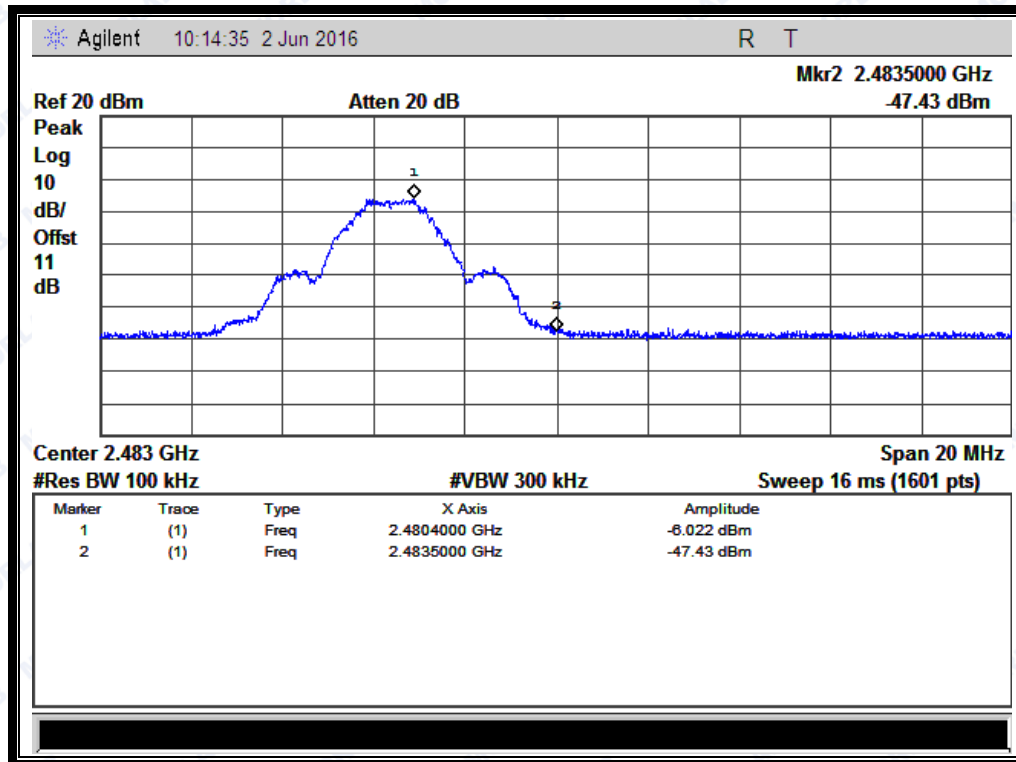

(Band Edge@ Channel = 26)

2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.5.2 Test Description

A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- Set analyzer center frequency to channel center frequency.
- Set the span to 3MHz
- Set the RBW to 3 kHz
- Set the VBW to 10KHz
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:

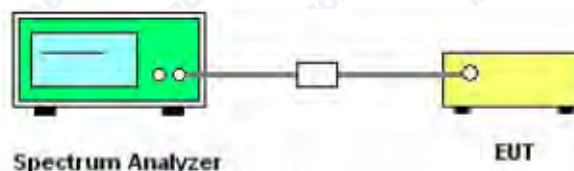

The EUT which is powered by the battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

C. Equipments List:

Please reference ANNEX A (1.5).

2.5.3 Test Result

The lowest, middle and highest channels are tested.




REPORT No.: SZ16030031W01

A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
11	2405	-14.23	Plot A	8	PASS
20	2450	-14.55	Plot B	8	PASS
26	2480	-14.97	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

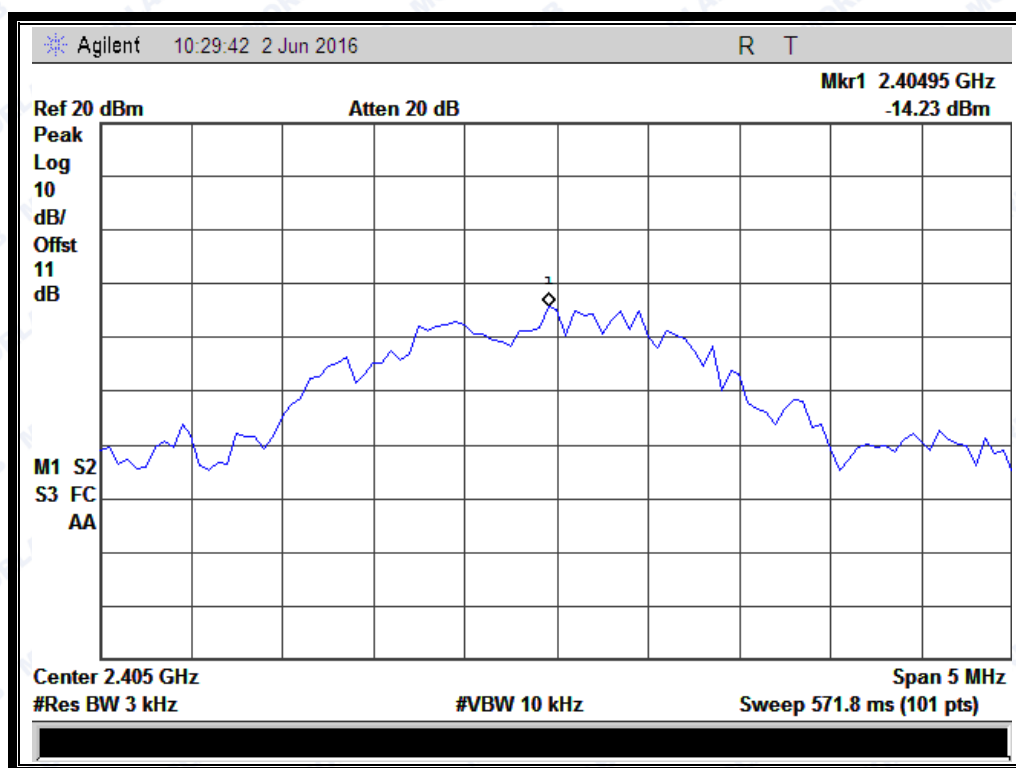


(Plot A: Channel = 11)



REPORT No.: SZ16030031W01

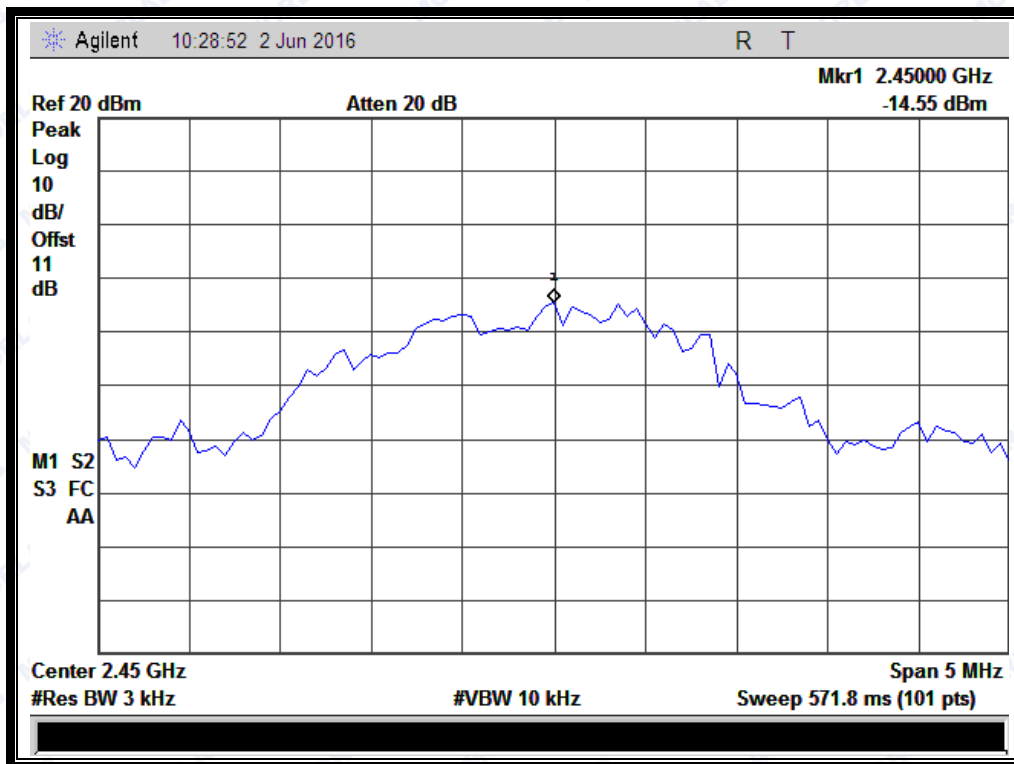

(Plot B: Channel = 20)

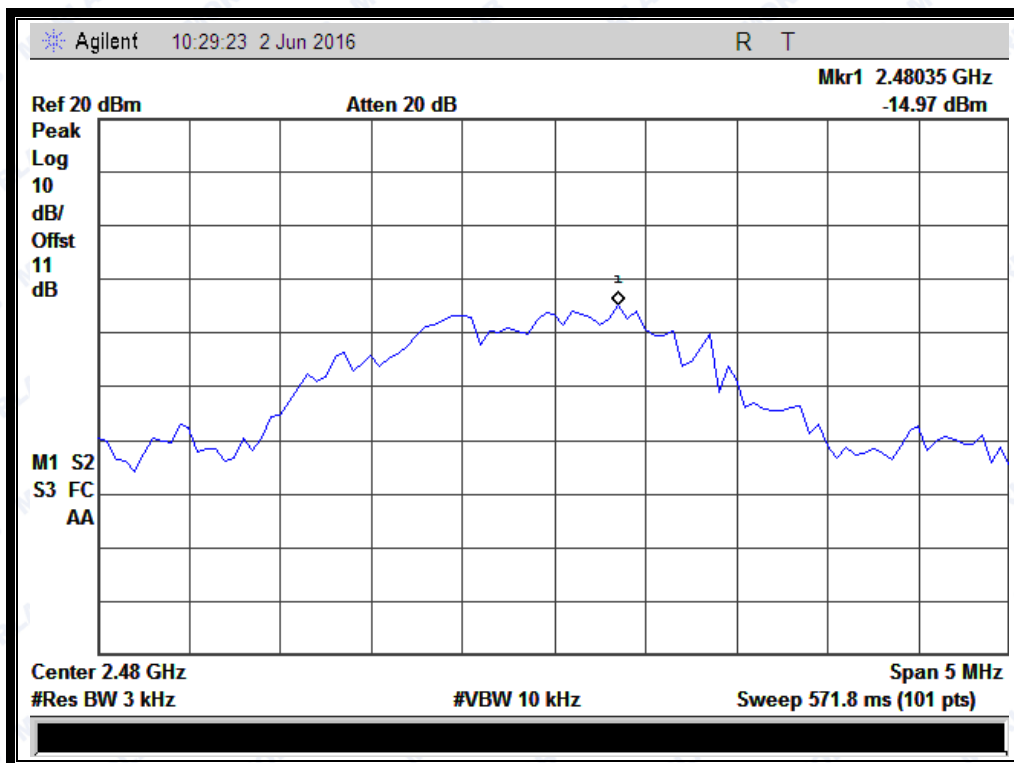

(Plot C: Channel = 26)


2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

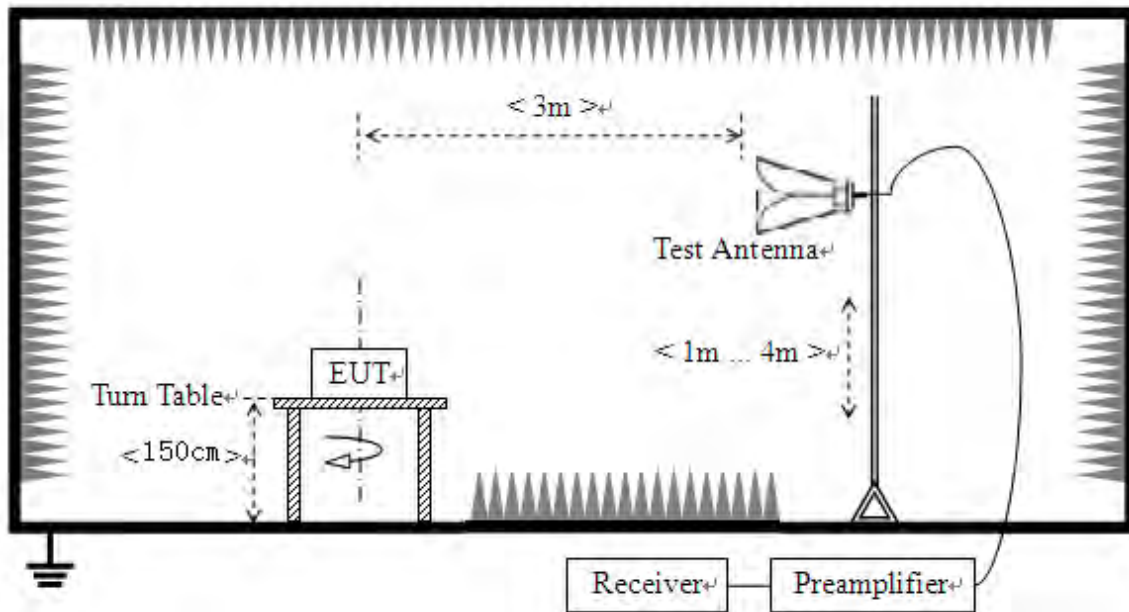

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.5).



2.6.3 Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
11	2390.00	PK	44.32	-33.63	32.56	43.25	74	Pass
11	2367.12	AV	32.93	-33.63	32.56	31.86	54	Pass
26	2483.50	PK	56.61	-33.18	32.5	55.93	74	Pass
26	2483.50	AV	44.10	-33.18	32.5	43.42	54	Pass


B. Test Plots:



REPORT No.: SZ16030031W01

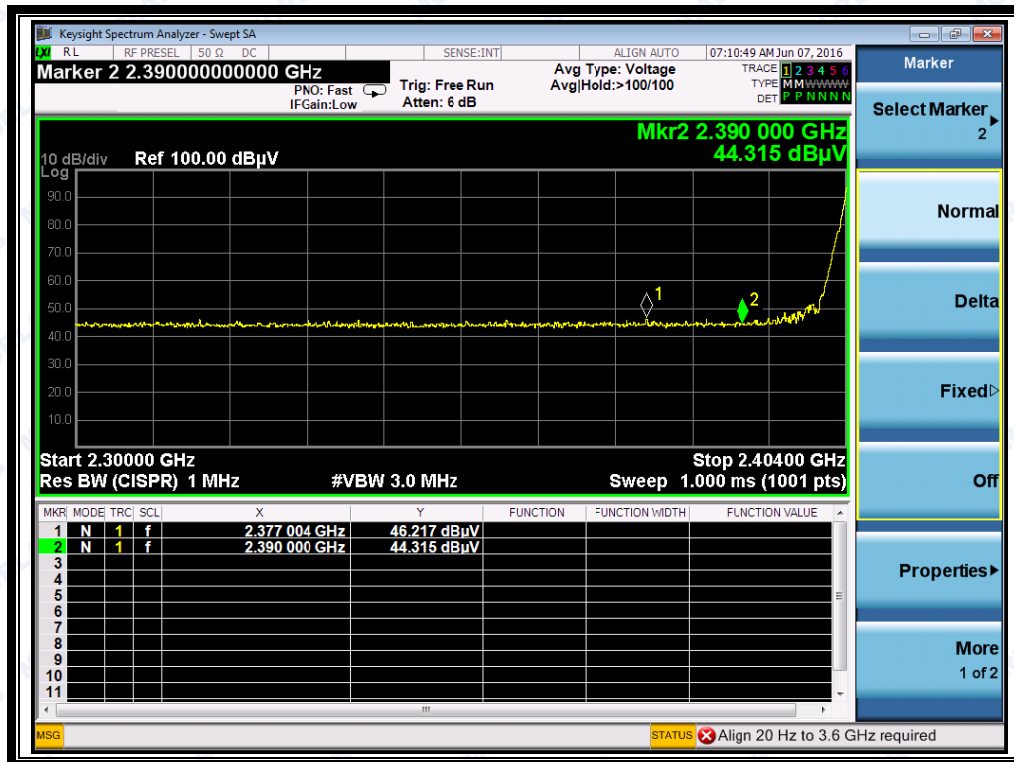


(Plot A1: Channel = 11 PEAK)

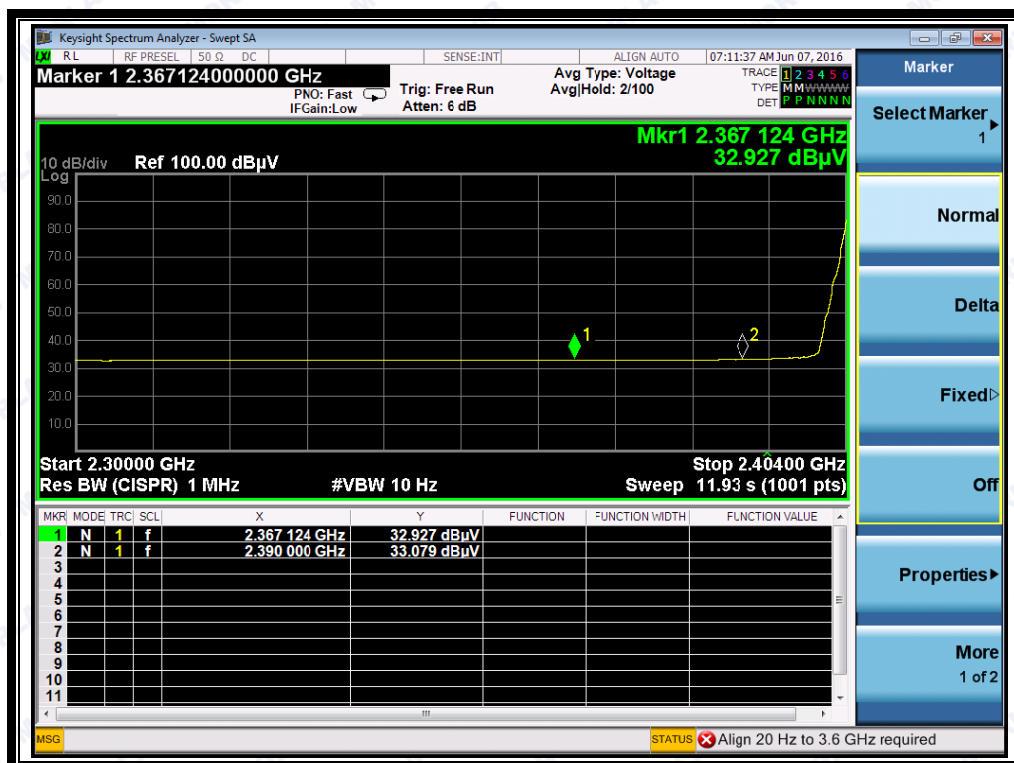

(Plot A2: Channel = 11 AVG)



REPORT No.: SZ16030031W01

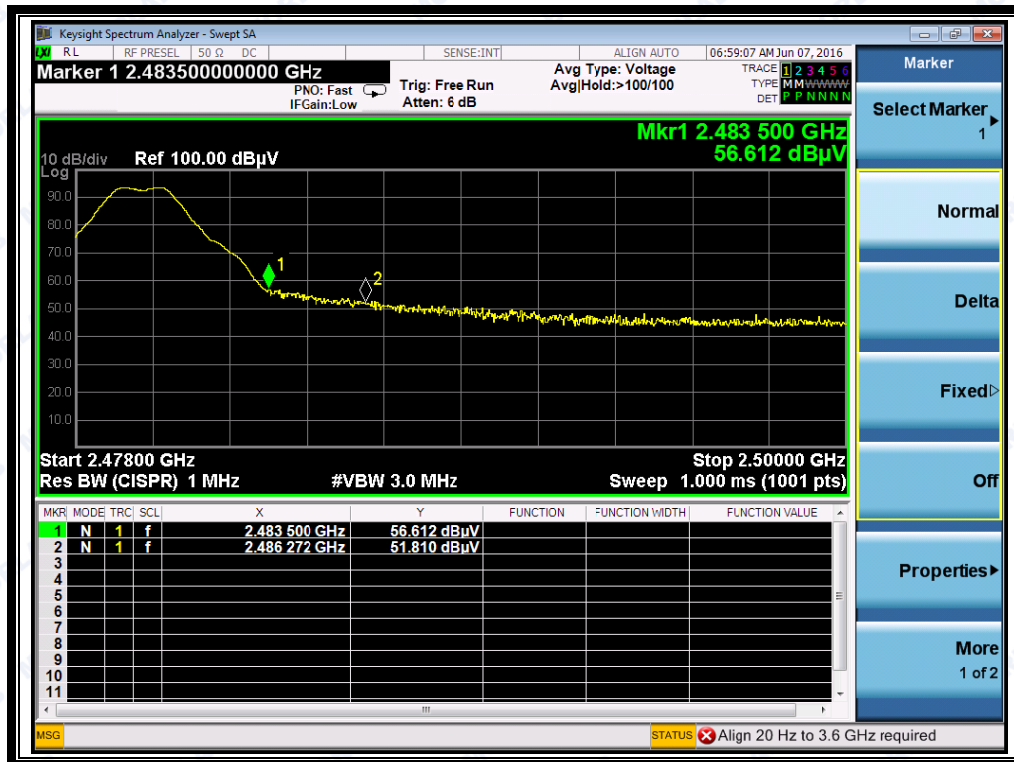

(Plot B1: Channel = 26 PEAK)



(Plot B2: Channel = 26 AVG)

2.7 Conducted Emission

2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2 Test Description

A. Test Setup:

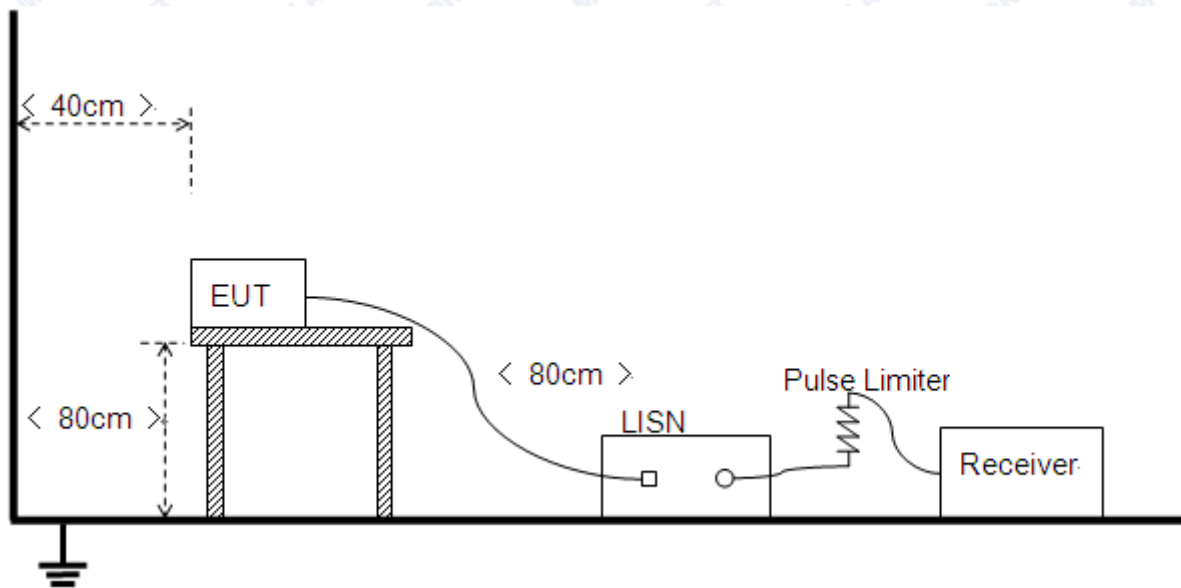

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:

Please reference ANNEX A(1.5).




2.7.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

B. Test Plots:

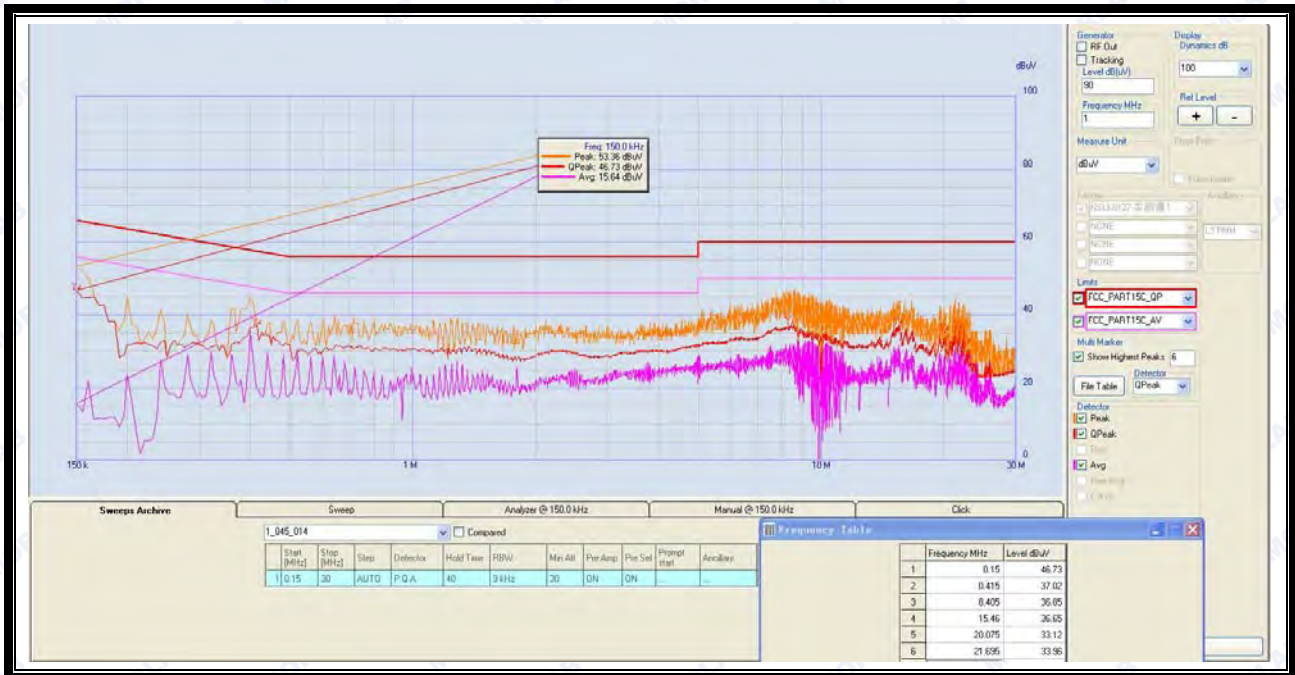

(Plot A: L Phase)

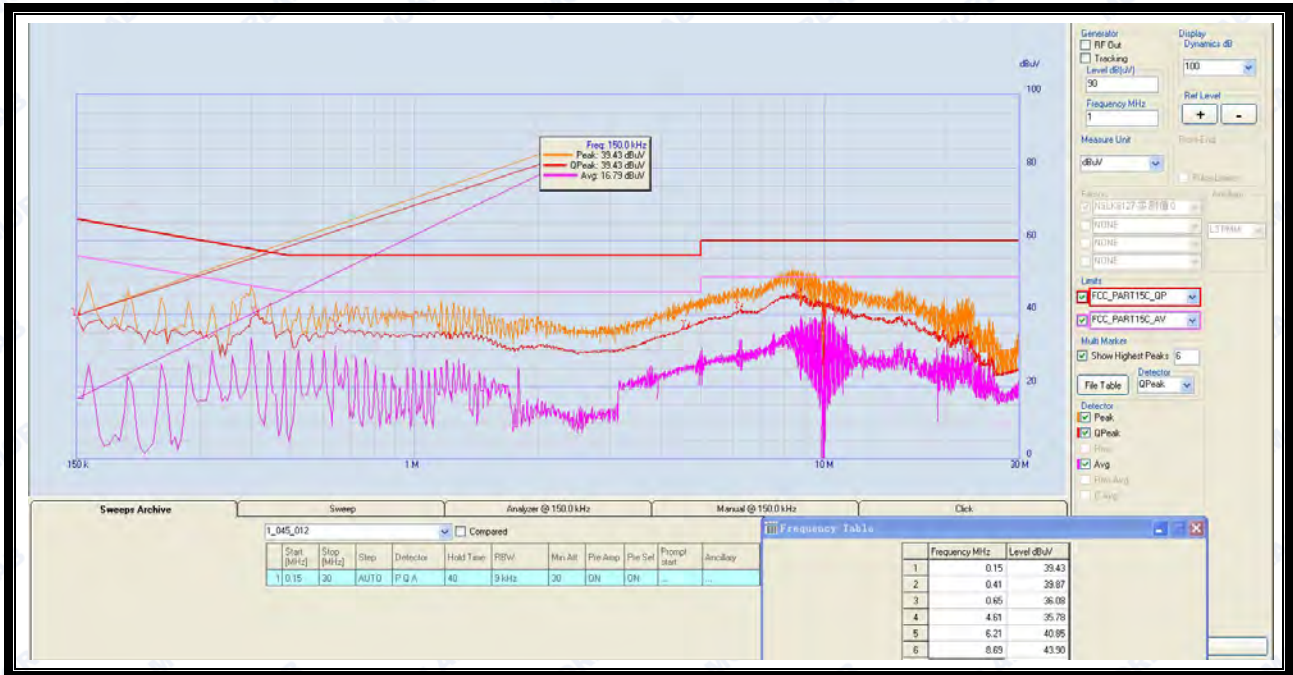

(Plot B: N Phase)



2.8 Radiated Emission

2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

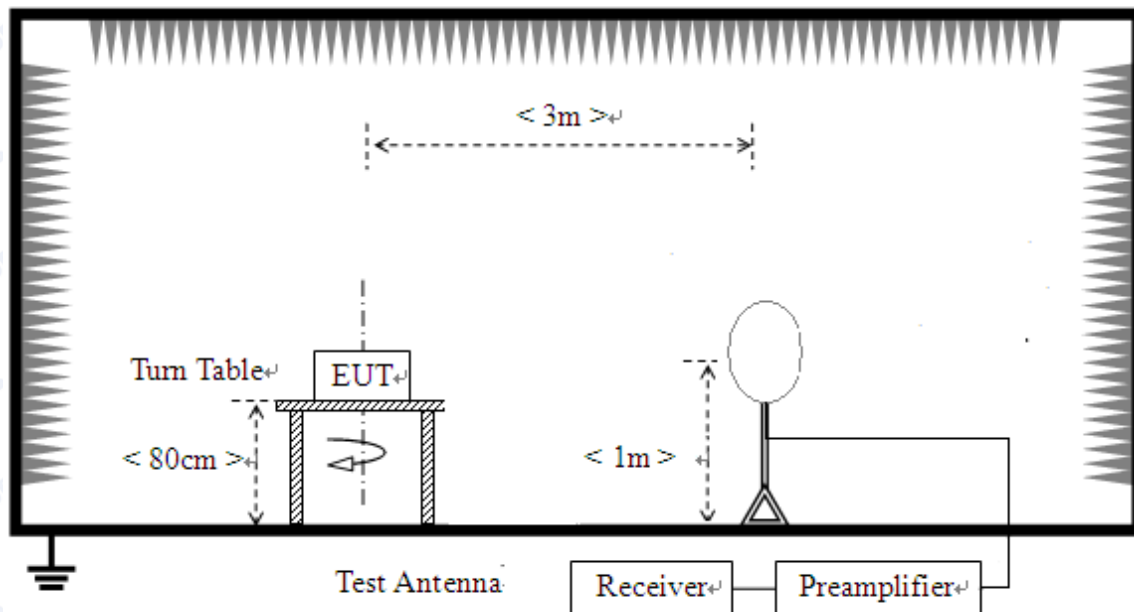

- 2) For radiated emissions from 30MHz to 1GHz

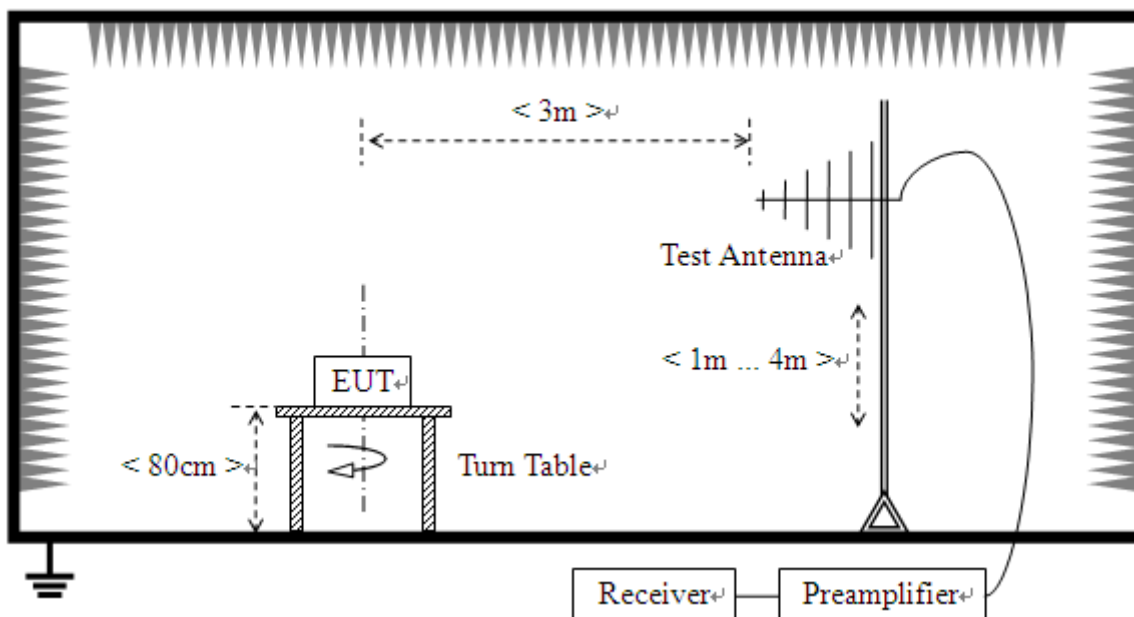

3) For radiated emissions above 1GHz

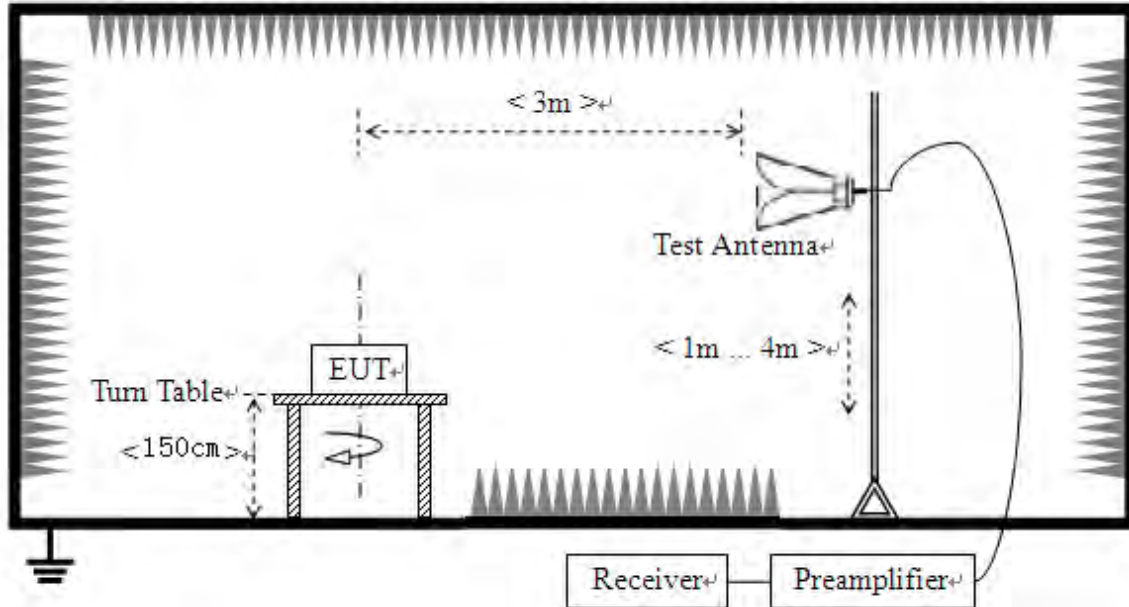

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna.



The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.8.3 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


**A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 11

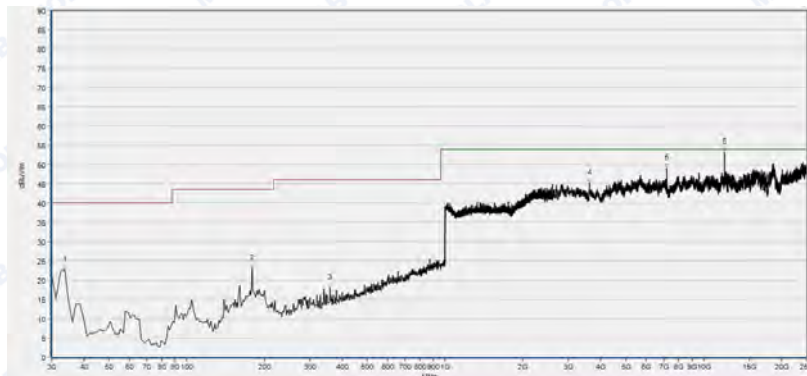

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	22.69	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
179.324	23.03	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
358.999	17.96	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3614.294	45.09	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
7211.166	49.03	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
12026.005	53.27	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

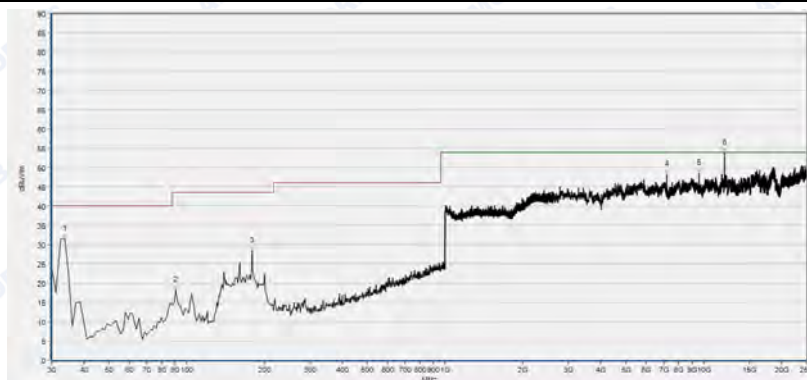

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	31.34	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
90.701	18.24	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
179.324	28.43	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
7215.239	48.21	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
9622.659	48.54	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
12026.005	53.80	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 20



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.424	10.75	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
91.915	11.33	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
179.324	20.93	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
3390.253	45.36	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
9761.157	49.86	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
12197.090	50.52	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
90.701	18.35	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
179.324	21.86	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
1074.910	43.66	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7317.076	48.04	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
9761.157	48.19	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12201.164	51.43	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 26



Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	23.80	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
57.922	15.26	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
179.324	23.46	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
2693.690	44.87	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
7439.280	49.61	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
11757.156	48.49	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	27.40	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
90.701	20.79	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
179.324	28.68	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
5667.321	47.48	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7439.280	49.46	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12164.503	48.61	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty
Conducted emissions	9KHz~30MHz	2.44dB
Radiated emissions	9KHz~30MHz	2.44dB
	30MHz~200MHz	2.93dB
	200MHz~1000MHz	2.95dB
	1GHz~18GHz	2.26dB
	18GHz~40GHz	1.94dB



REPORT No.: SZ16030031W01

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.03.02	2017.03.01
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2016.03.02	2017.03.01
3	EXA Signal Analyzer	MY53470838	N9010A	Agilent	2015.08.26	2016.08.25
4	RF cable	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector <small>Note</small>	CN01	RF03	HUBER-SUHNER	N/A	N/A

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.

1.5.2 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2016.03.02	2017.03.01
2	Receiver	MY54130016	N9038A	Agilent	2016.03.02	2017.03.01
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.03.02	2017.03.01
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2016.03.02	2017.03.01
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2016.03.02	2017.03.01
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.03.02	2017.03.01
7	Coaxial cable(N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable(N male)	CB03	EMC03	Morlab	N/A	N/A
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01



REPORT No.: SZ16030031W01

1.5.3 Climate Chamber

Climate Chamber

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2016.03.02	2017.03.01

1.5.4 Vibration Table

Vibration Table

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2016.03.02	2017.03.01

1.5.5 Anechoic Chamber

Anechoic Chamber

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2016.03.02	2017.03.01

1.5.6 Auxiliary Test Equipment

Auxiliary Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	N.A	PU500C	Asus	N.A	N.A

***** END OF REPORT *****