No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM160500367901

Email: ee.shenzhen@sgs.com Page: 1 of 83

FCC REPORT

Application No: SZEM1605003679CR (SGS HK No.:T31620210097EM)

Applicant: Genesis Industries Limited

Product Name: MY FRIEND CAYLA / MY FRIEND CAYLA – VER 2.0 PARTY SET

Model No.(EUT): #05661 (African Americaian)

Add Model No.: #05660 (Brown Hair), #01242 (Blonde)

FCC ID: 2AHUX01242-BT

Standards: 47 CFR Part 15, Subpart C (2015)

Date of Receipt: 2016-05-20

Date of Test: 2016-05-23 to 2016-05-25

Date of Issue: 2016-05-30

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.

Report No.: SZEM160500367901

Page: 2 of 83

2 Version

Revision Record							
Version	Chapter	Date	Modifier	Remark			
00		2016-05-30		Original			

Authorized for issue by:		
Tested By	Brir Chen	2016-05-25
	(Bill Chen) /Project Engineer	Date
Prepared By	Iris Zhou	2016-05-30
	(Iris Zhou) /Clerk	Date
Checked By	Eric Fu	2016-05-30
	(Eric Fu) /Reviewer	Date

Report No.: SZEM160500367901

Page: 3 of 83

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

Remark:

Model No.: #05661 (African Americaian), #05660 (Brown Hair), #01242 (Blonde)

Only the model #05661 (African Americaian) was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models, only different on model No., color and decorations.

Report No.: SZEM160500367901

Page: 4 of 83

4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	RSION	2
3		ST SUMMARY	
4		ONTENTS	
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TE	ST RESULTS AND MEASUREMENT DATA	11
	6.1	Antenna Requirement	11
	6.2	CONDUCTED PEAK OUTPUT POWER	12
	6.3	20DB OCCUPY BANDWIDTH	19
	6.4	CARRIER FREQUENCIES SEPARATION	
	6.5	HOPPING CHANNEL NUMBER	
	6.6	DWELL TIME	
	6.7	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.8	SPURIOUS RF CONDUCTED EMISSIONS	
	6.9	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	
	6.10	RADIATED SPURIOUS EMISSION	
		10.1 Radiated Emission below 1GHz	
	6.11	10.2 Transmitter Emission above 1GHz RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
		-	
7	PH	IOTOGRAPHS - EUT TEST SETUP	82
	7.1	RADIATED EMISSION	82
	7.2	RADIATED SPURIOUS EMISSION	82
8	PH	IOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	83

Report No.: SZEM160500367901

Page: 5 of 83

5 General Information

5.1 Client Information

Applicant:	Genesis Industries Limited
Address of Applicant:	8/F, Hong Kong Spinners Industrial BLDG., 818 Cheung Sha Wan Road, Kowloon, HK.

5.2 General Description of EUT

MY FRIEND CAYLA / MY FRIEND CAYLA – VER 2.0 PARTY SET		
#05661 (African Americaian)		
4+		
China		
2402MHz~2480MHz		
V4.1 + EDR		
Frequency Hopping Spread Spectrum(FHSS)		
GFSK; Pi/4DQPSK; 8DPSK for classical mode		
79		
Adaptive Frequency Hopping systems		
Portable production		
Integral		
0dBi		
Battery: 4.5V DC (1.5V x 3 "AA" Size Batteries)		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 6 of 83

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

Report No.: SZEM160500367901

Page: 7 of 83

5.3 Test Environment

Operating Environment:				
Temperature:	25.0 °C			
Humidity:	50 % RH			
Atmospheric Pressure:	1015mbar			

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

Report No.: SZEM160500367901

Page: 8 of 83

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

· A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

Report No.: SZEM160500367901

Page: 9 of 83

5.10 Equipment List

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2015-08-01	2016-08-01
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2016-04-25	2017-04-25
3	Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2016-01-26	2017-01-26
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-04-25	2017-04-25
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2016-08-14

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
7	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09
8	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A

Report No.: SZEM160500367901

Page: 10 of 83

RF connected test								
Item	Test Equipment	Test Equipment Manufacturer Model No. Inventory No.		Cal. date	Cal.Due date			
itein	rest Equipment	Mandiacturei	Wodel No.	Inventory No.	(yyyy-mm-dd)	(yyyy-mm-dd)		
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09		
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17		
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25		
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 11 of 83

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

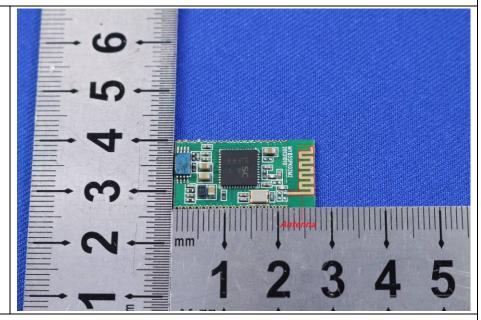


The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

Report No.: SZEM160500367901

Page: 12 of 83

6.2 Conducted Peak Output Power

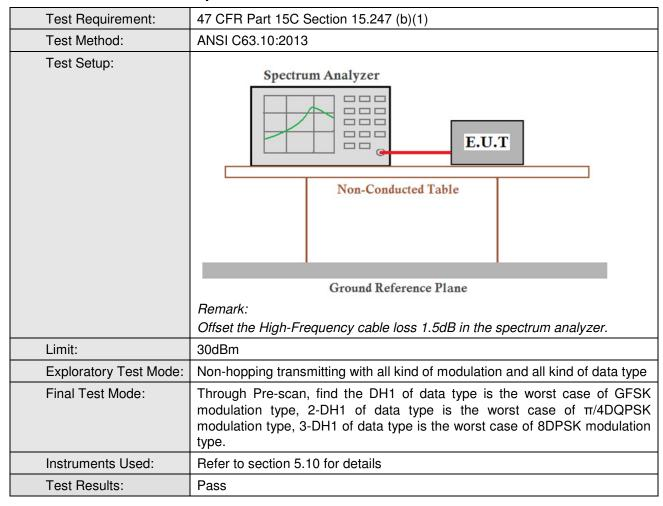

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 13 of 83

Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.89	30.00	Pass
Middle	-0.15	30.00	Pass
Highest	0.10	30.00	Pass
π/4DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.94	30.00	Pass
Middle	-0.19	30.00	Pass
Highest	0.06	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.86	30.00	Pass
Middle	-0.04	30.00	Pass
Highest	0.18	30.00	Pass

Report No.: SZEM160500367901


Page: 14 of 83

Test plot as follows:

Test mode: GFSK Test channel: Lowest

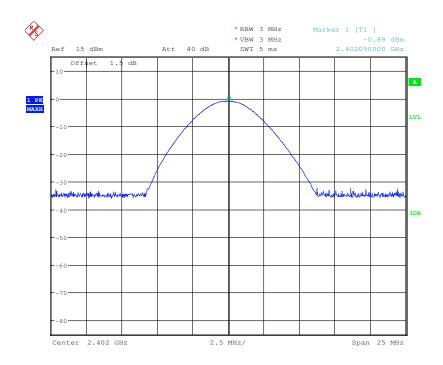




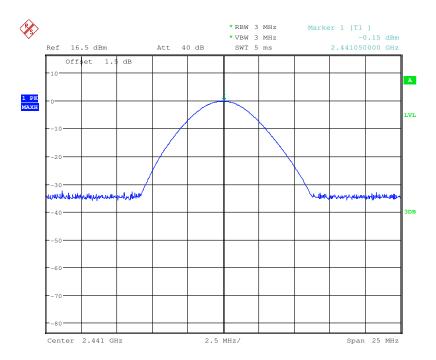


Report No.: SZEM160500367901

Page: 15 of 83

Test mode: GFSK Test channel: Highest

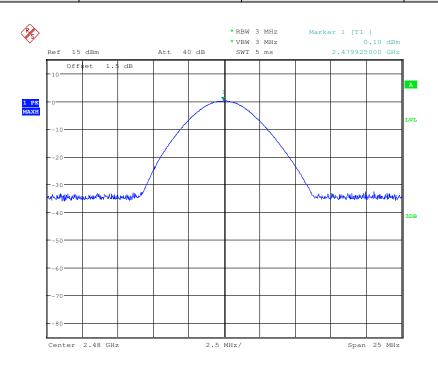




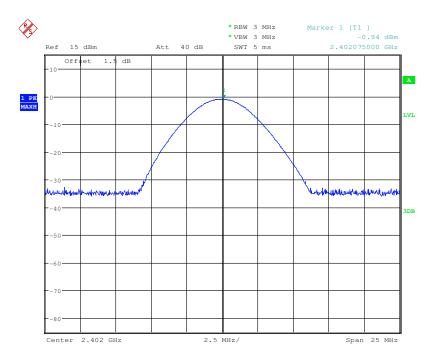


Report No.: SZEM160500367901

Page: 16 of 83

Test mode: π/4DQPSK Test channel: Middle

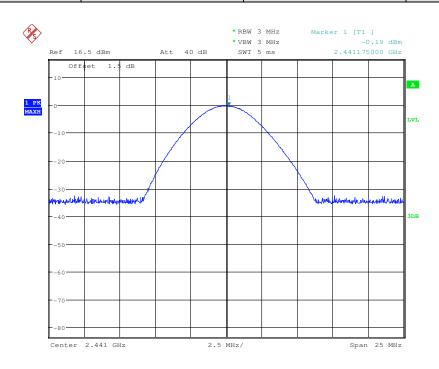




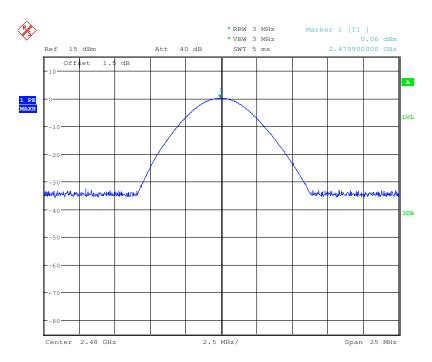


Report No.: SZEM160500367901

Page: 17 of 83

Test mode: 8DPSK Test channel: Lowest

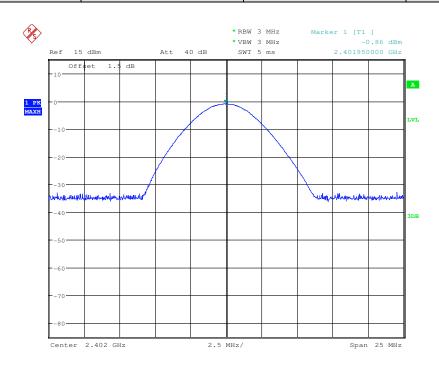




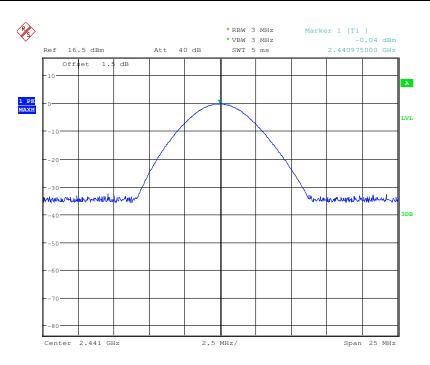

Report No.: SZEM160500367901

Page: 18 of 83


Test mode: 8DPSK Test channel: Highest

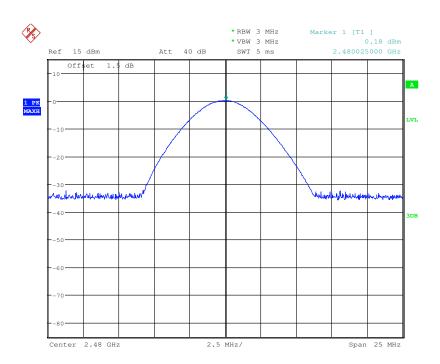

Report No.: SZEM160500367901

Page: 19 of 83

6.3 20dB Occupy Bandwidth

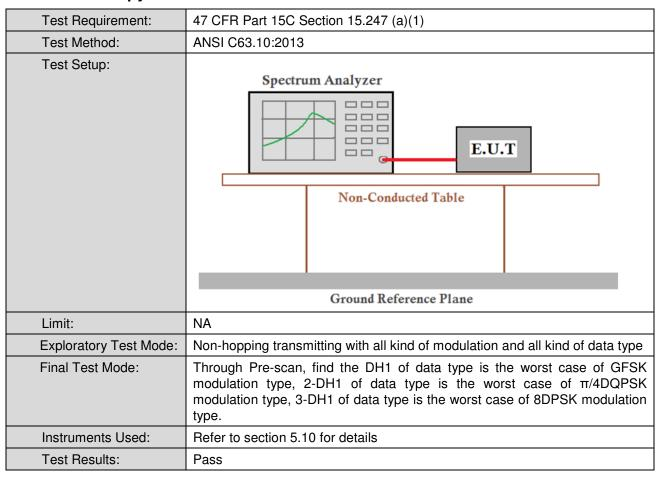

Measurement Data


Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	π/4DQPSK	8DPSK
Lowest	879.808	1219.538	1215.385
Middle	879.808	1216.346	1216.347
Highest	875.000	1221.000	1212.962

Report No.: SZEM160500367901


Page: 20 of 83

Test plot as follows:

Test mode: GFSK Test channel: Lowest

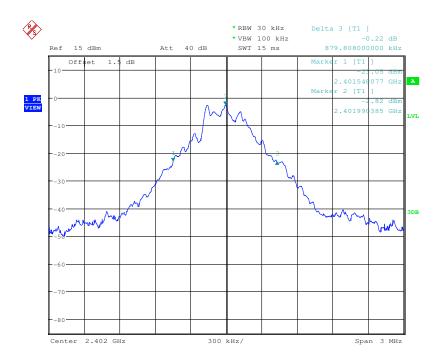




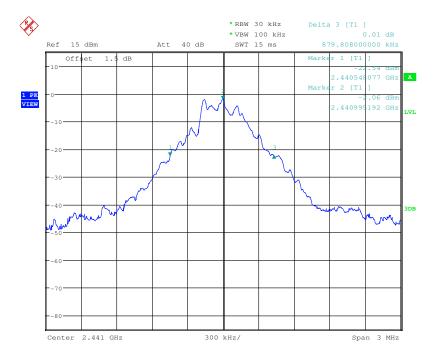


Report No.: SZEM160500367901

Page: 21 of 83

Test mode: GFSK Test channel: Highest

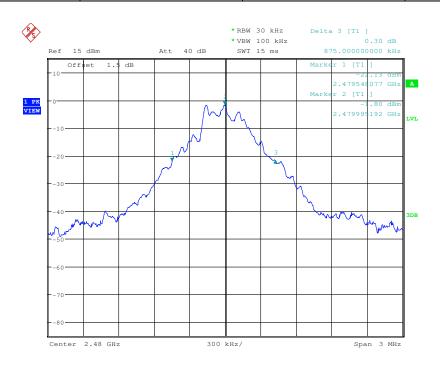




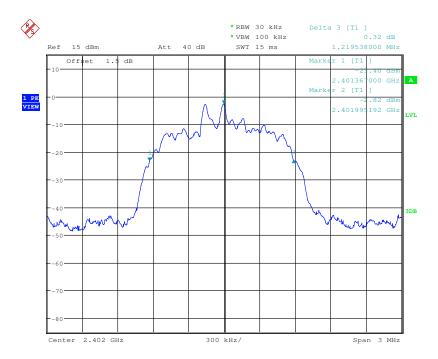


Report No.: SZEM160500367901

Page: 22 of 83

Test mode: π/4DQPSK Test channel: Middle

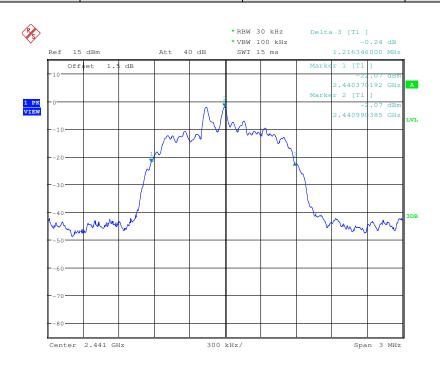




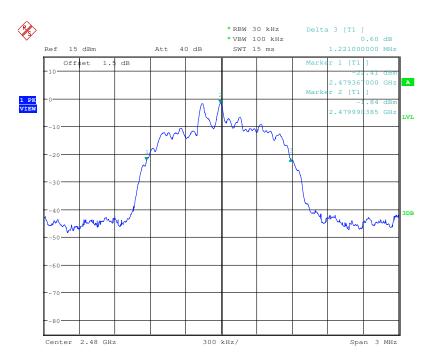


Report No.: SZEM160500367901

Page: 23 of 83

Test mode: 8DPSK Test channel: Lowest

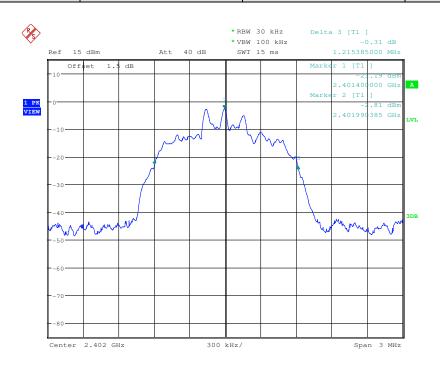





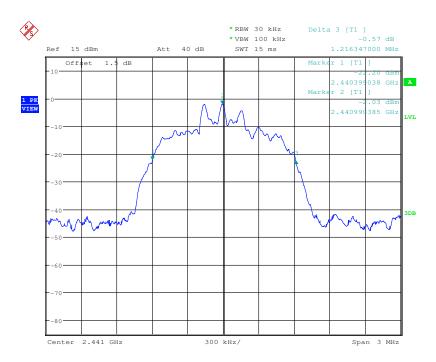

Report No.: SZEM160500367901

Page: 24 of 83



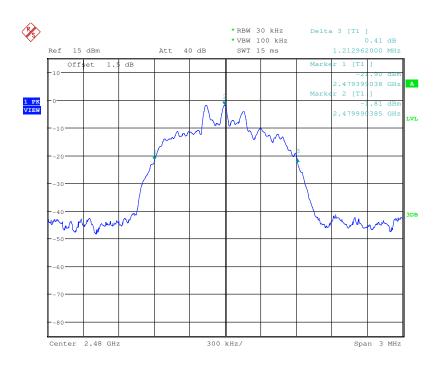


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 25 of 83

6.4 Carrier Frequencies Separation

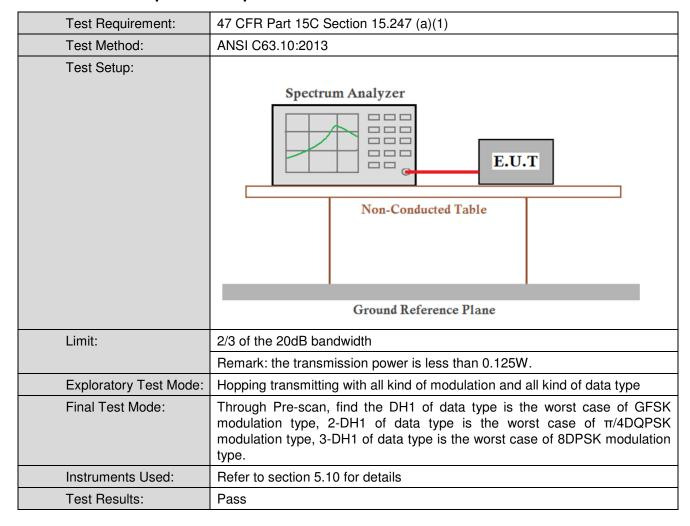

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 26 of 83

Measurement Data

Measurement Data			
GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	1032.0	≥586.5	Pass
π/4DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	1023.0	≥814.0	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Middle	985.6	≥810.9	Pass

Note: According to section 6.3,


Mode	20dB bandwidth (kHz)	Limit (kHz)	
	(worse case)	(Carrier Frequencies Separation)	
GFSK	879.808	586.5	
π/4DQPSK	1221.000	814.0	
8DPSK	1216.347	810.9	

Report No.: SZEM160500367901


Page: 27 of 83

Test plot as follows:

Test mode: GFSK Test channel: Middle

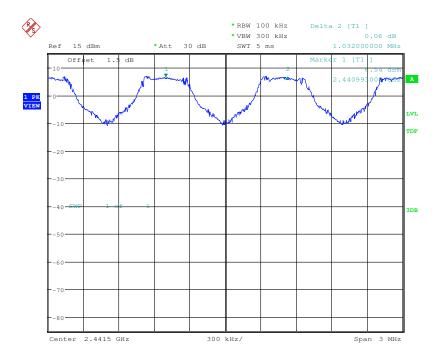



Test mode: π/4DQPSK Test channel: Middle

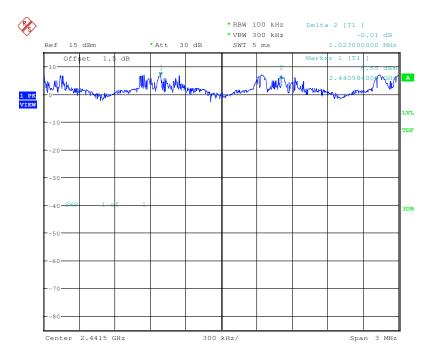

Report No.: SZEM160500367901

Page: 28 of 83



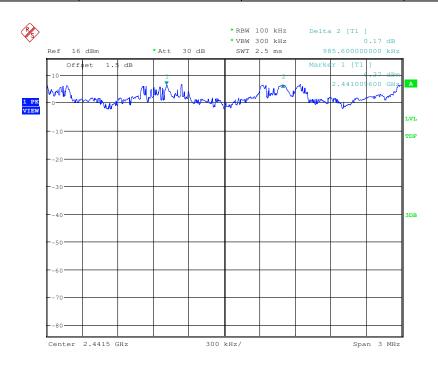


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 29 of 83

6.5 Hopping Channel Number

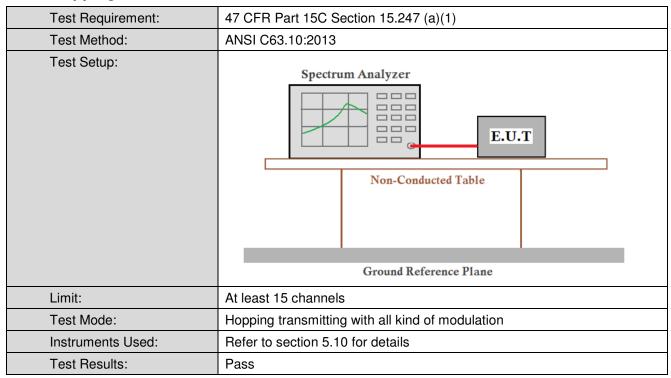

Measurement Data


Mode	Hopping channel numbers	Limit	
GFSK	79	≥15	
π/4DQPSK	79	≥15	
8DPSK	79	≥15	

Report No.: SZEM160500367901


Page: 30 of 83

Test plot as follows:

Test mode: GFSK

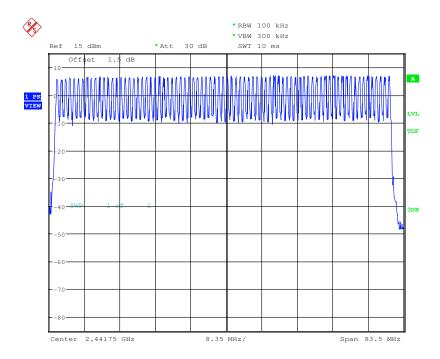





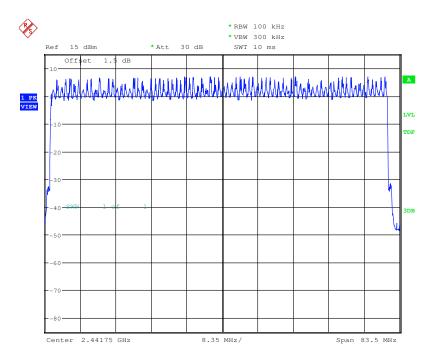

Report No.: SZEM160500367901

Page: 31 of 83




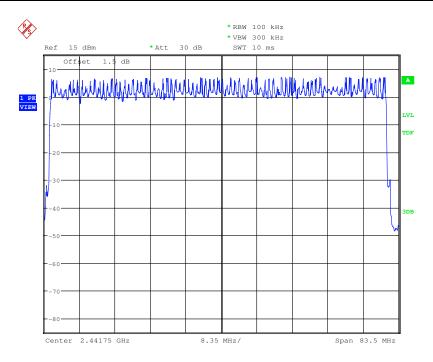

Report No.: SZEM160500367901

Page: 32 of 83

6.6 Dwell Time

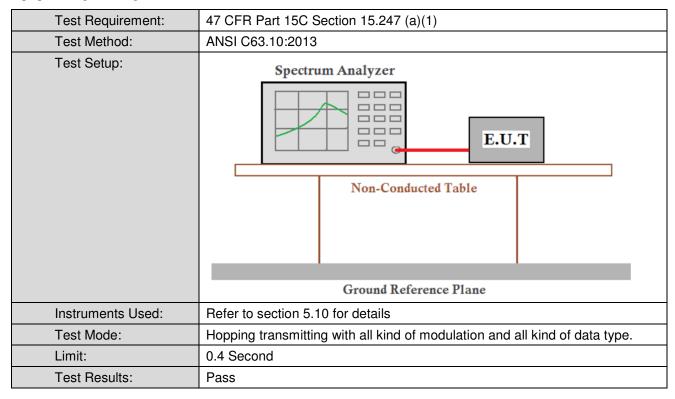

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.13	0.4
	DH3	0.30	0.4
	DH5	0.23	0.4
π/4DQPSK	2-DH1	0.13	0.4
	2-DH3	0.23	0.4
	2-DH5	0.29	0.4
8DPSK	3-DH1	0.13	0.4
	3-DH3	0.27	0.4
	3-DH5	0.38	0.4

Report No.: SZEM160500367901

Page: 33 of 83

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)*total number=dwell time (ms)

The lowest channel (2402MHz), as below:

DH1 time slot=0.400 (ms)*total number=128.00 (ms)

DH3 time slot=1.659 (ms)* total number =298.62 (ms)

DH5 time slot=2.912 (ms)* total number =232.96(ms)

2-DH1 time slot=0.412 (ms)*total number=131.84 (ms)

2-DH3 time slot=1.668 (ms)* total number =233.52 (ms)

2-DH5 time slot=2.920 (ms)* total number =292.00(ms)

3-DH1 time slot=0.411 (ms)*total number=127.41 (ms)

3-DH3 time slot=1.665 (ms)* total number =266.40 (ms)


3-DH5 time slot=2.920 (ms)* total number =379.60 (ms)


Report No.: SZEM160500367901

Page: 34 of 83

Test plot as follows:




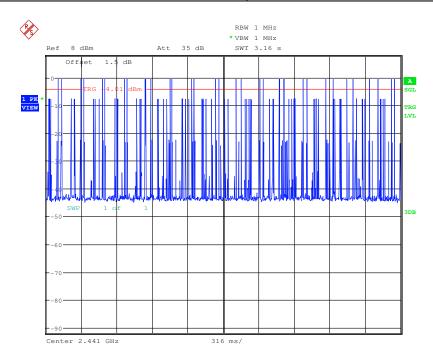


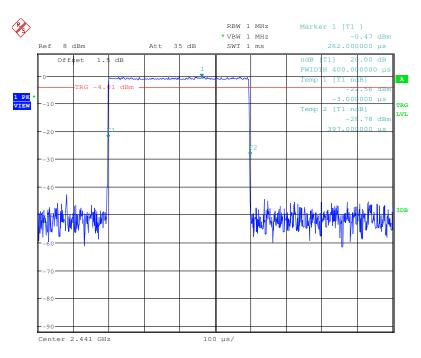


Report No.: SZEM160500367901

Page: 35 of 83




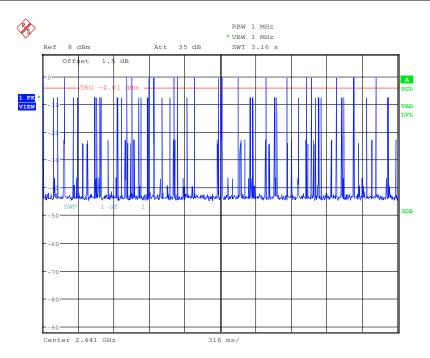


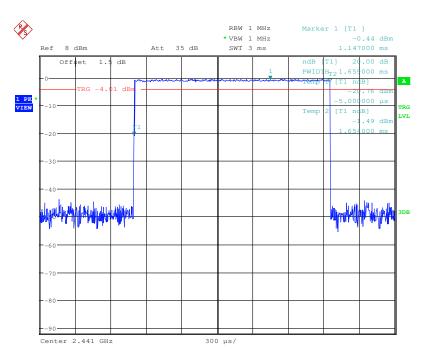


Report No.: SZEM160500367901

Page: 36 of 83



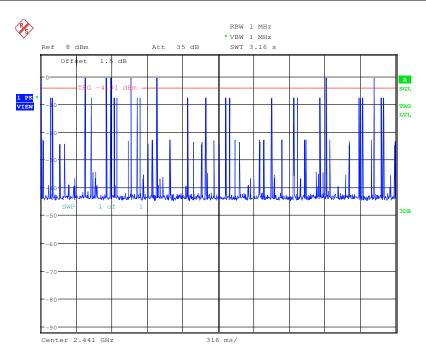


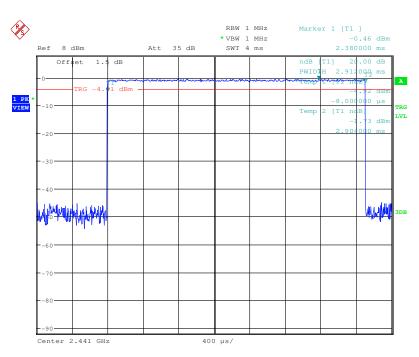


Report No.: SZEM160500367901

Page: 37 of 83




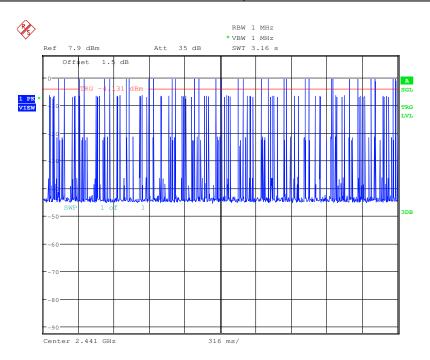


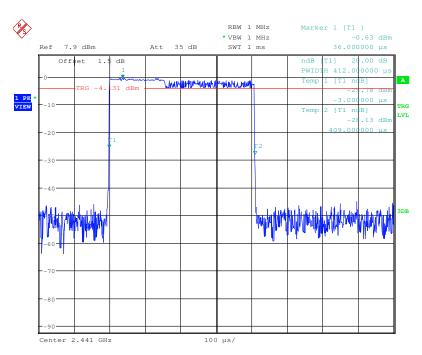


Report No.: SZEM160500367901

Page: 38 of 83



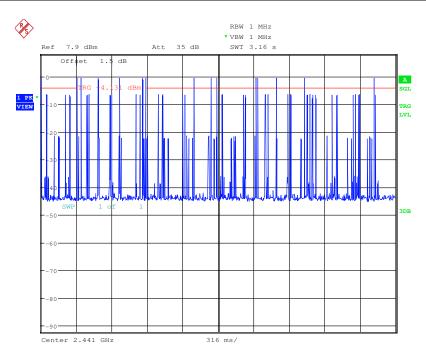


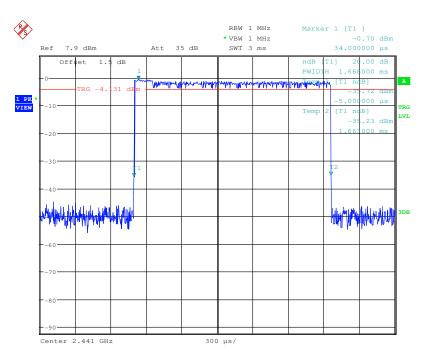


Report No.: SZEM160500367901

Page: 39 of 83



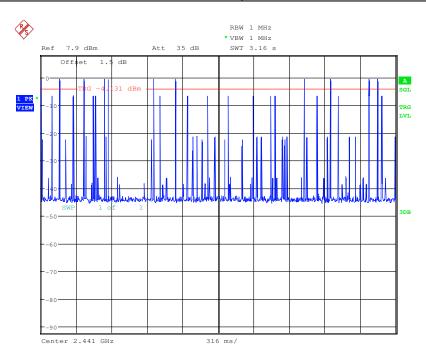


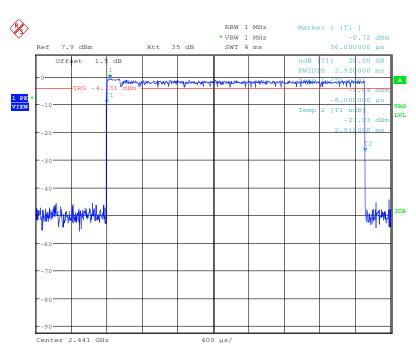


Report No.: SZEM160500367901

Page: 40 of 83



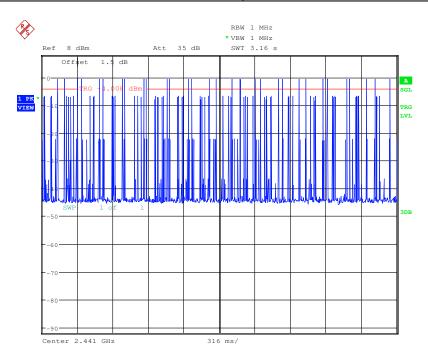


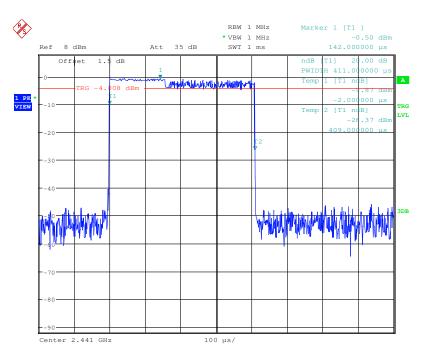


Report No.: SZEM160500367901

Page: 41 of 83




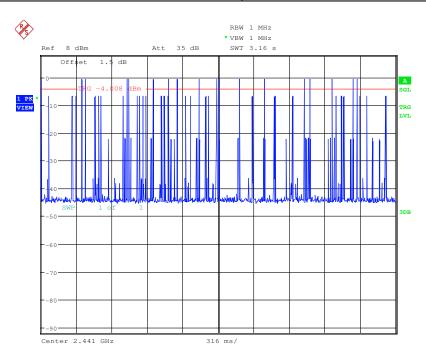


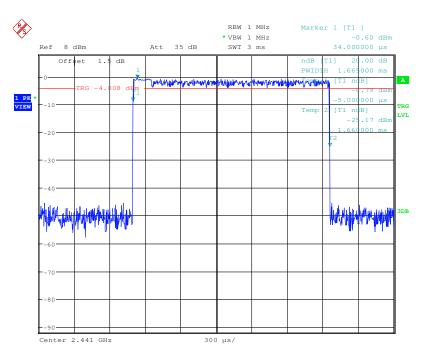


Report No.: SZEM160500367901

Page: 42 of 83



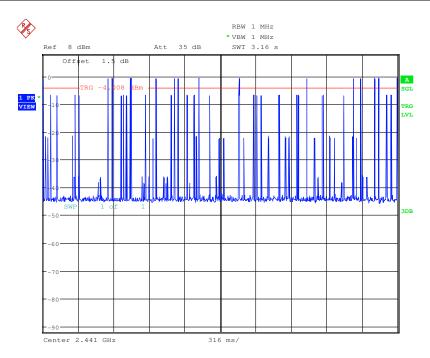


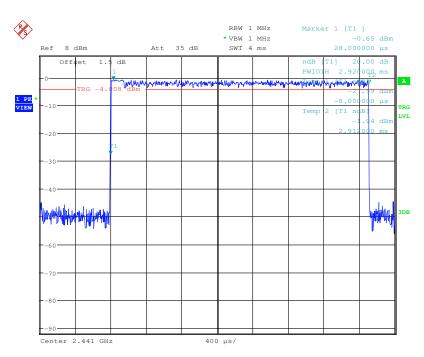

Report No.: SZEM160500367901

Page: 43 of 83

6.7 Band-edge for RF Conducted Emissions

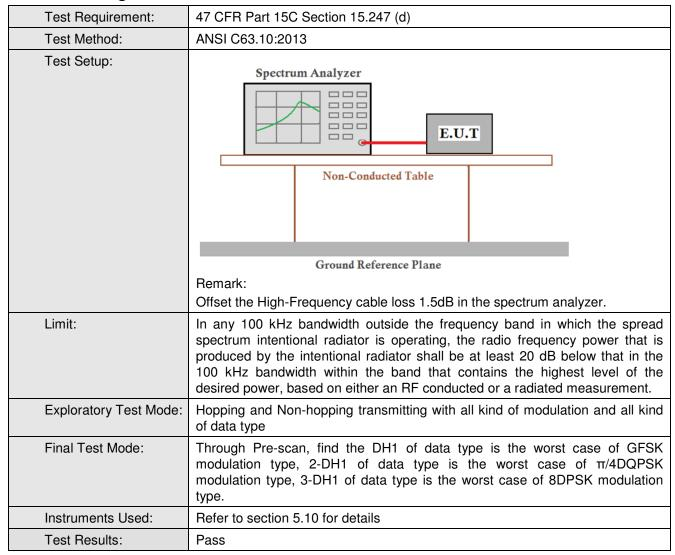


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


Report No.: SZEM160500367901

Page: 44 of 83

Test plot as follows:

Test mode: GFSK Test channel: Lowest

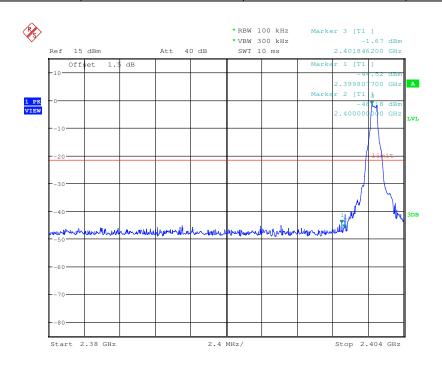


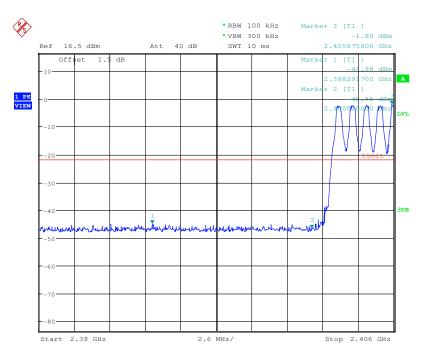


Report No.: SZEM160500367901

Page: 45 of 83



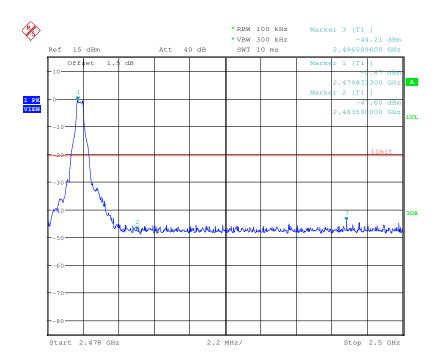


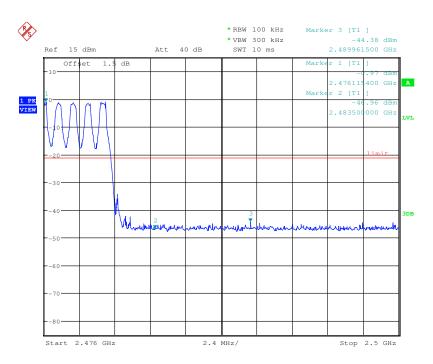


Report No.: SZEM160500367901

Page: 46 of 83

Test mode: π/4DQPSK Test channel: Lowest

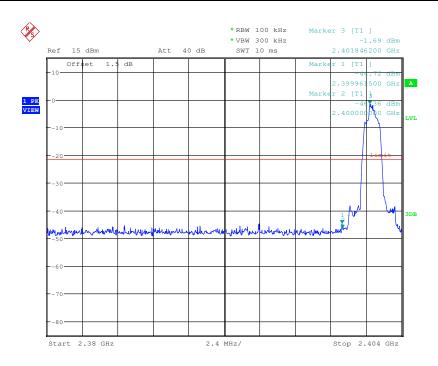


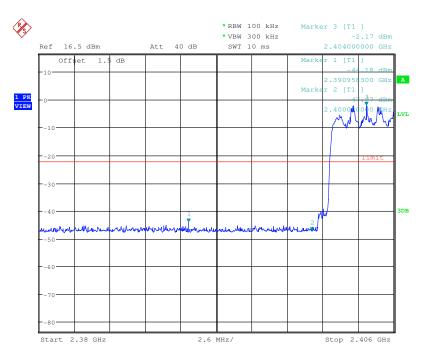


Report No.: SZEM160500367901

Page: 47 of 83



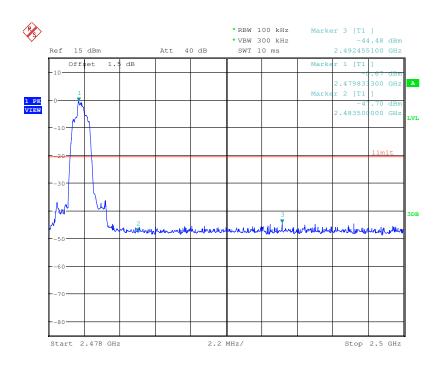


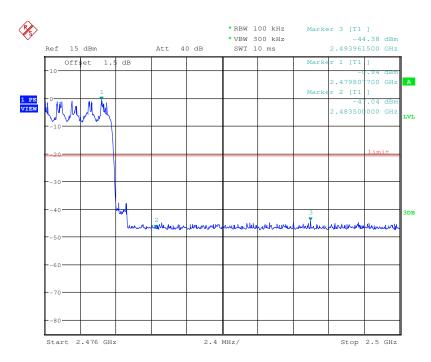


Report No.: SZEM160500367901

Page: 48 of 83

Test mode: 8DPSK Test channel: Lowest

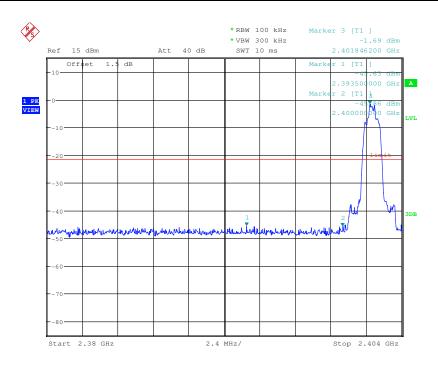


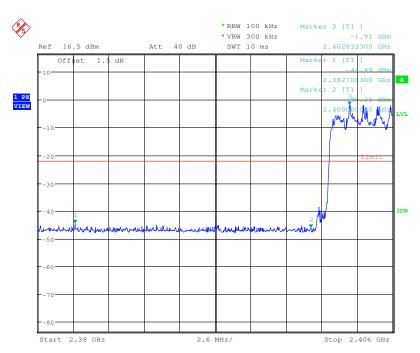


Report No.: SZEM160500367901

Page: 49 of 83

Test mode: 8DPSK Test channel: Highest

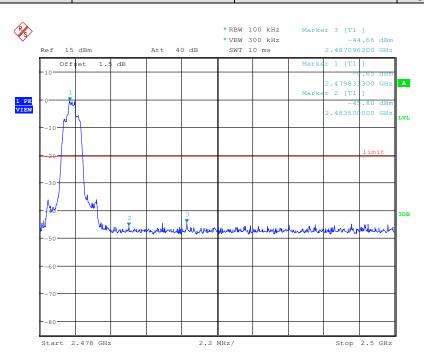

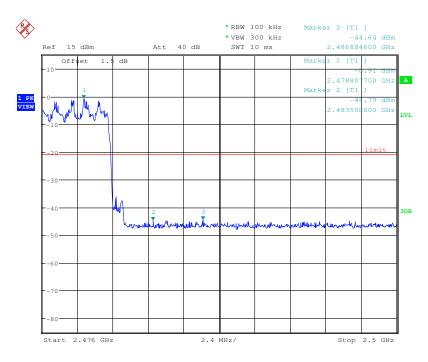

Report No.: SZEM160500367901

Page: 50 of 83

6.8 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10:2013			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 51 of 83


Test mode: GFSK Test channel: Lowest

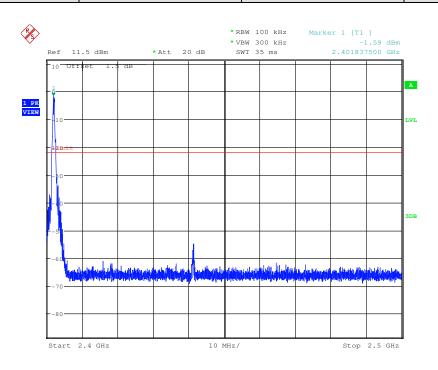

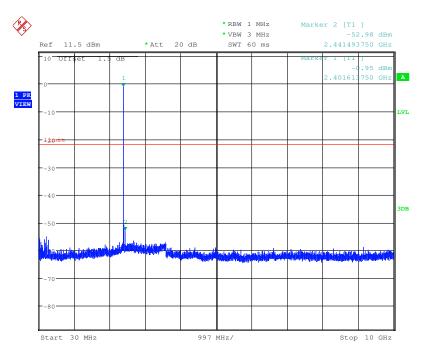


Report No.: SZEM160500367901

Page: 52 of 83

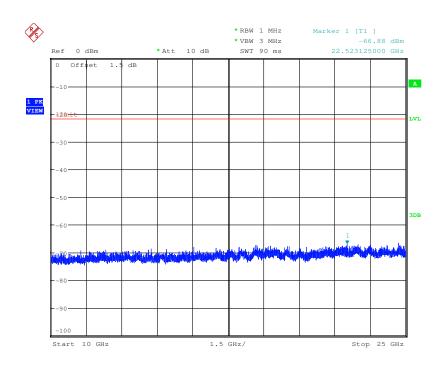





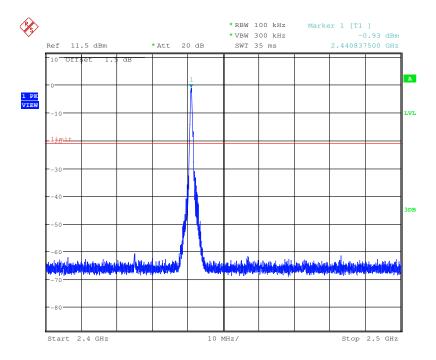

Report No.: SZEM160500367901


Page: 53 of 83

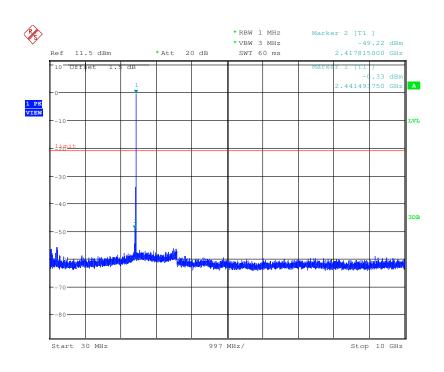


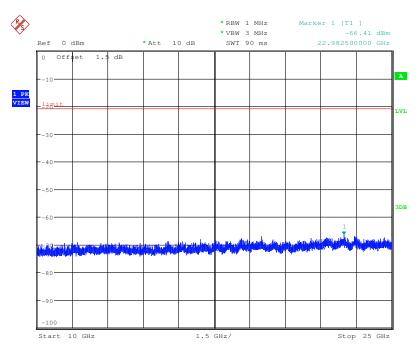


Report No.: SZEM160500367901

Page: 54 of 83




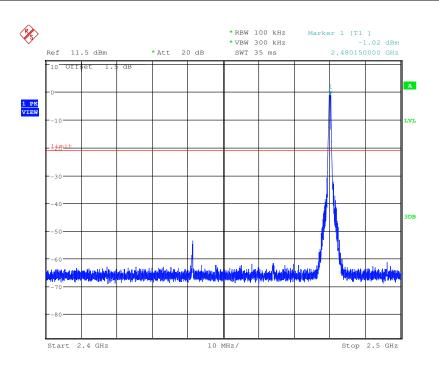

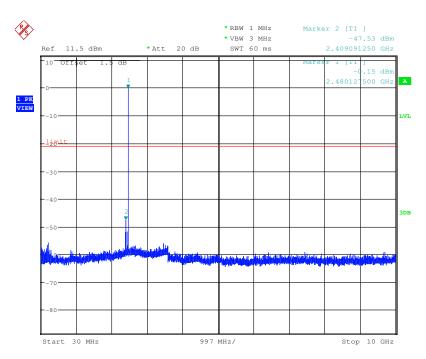


Report No.: SZEM160500367901

Page: 55 of 83

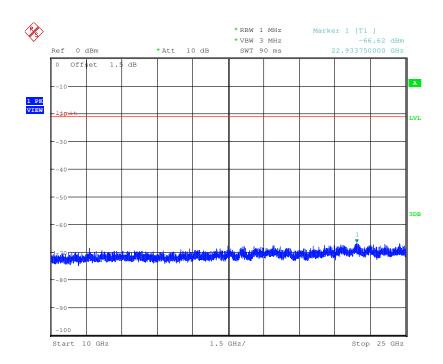





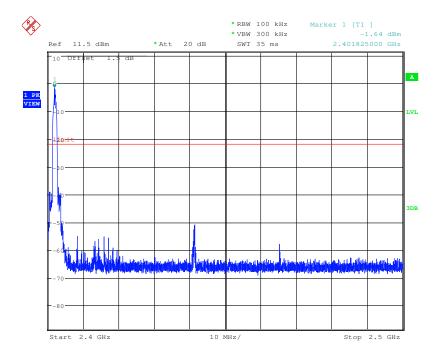

Report No.: SZEM160500367901

Page: 56 of 83

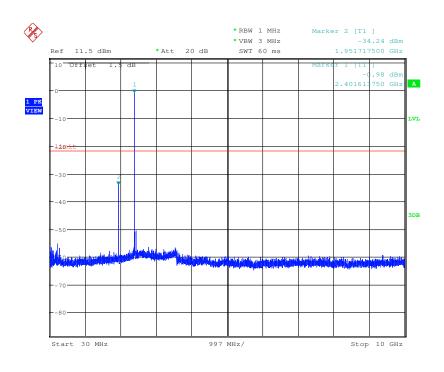


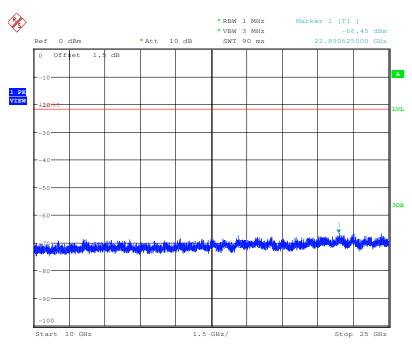


Report No.: SZEM160500367901

Page: 57 of 83


Test mode: π/4DQPSK Test channel: Middle

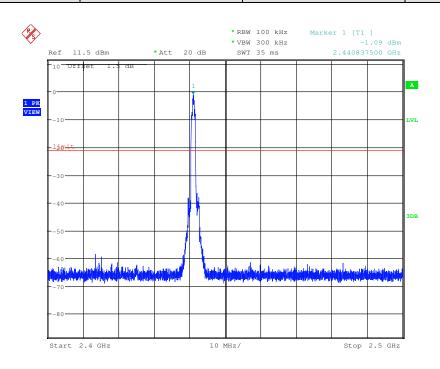

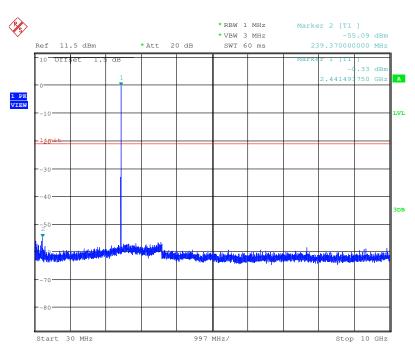


Report No.: SZEM160500367901

Page: 58 of 83

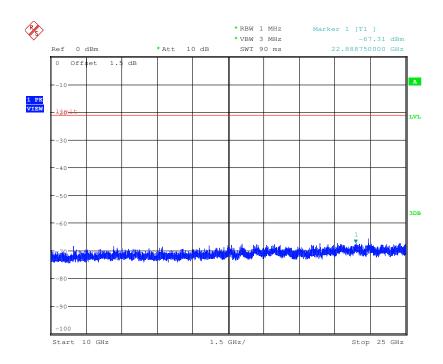





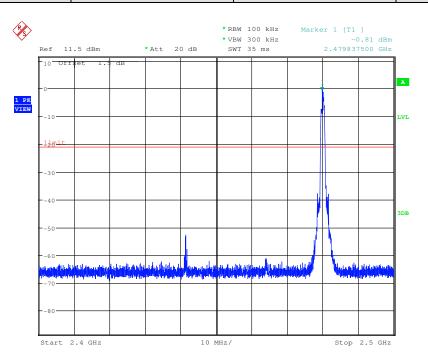

Report No.: SZEM160500367901

Page: 59 of 83

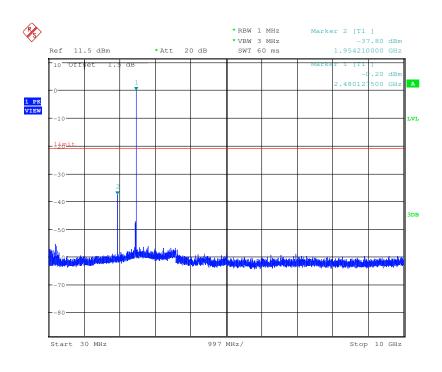


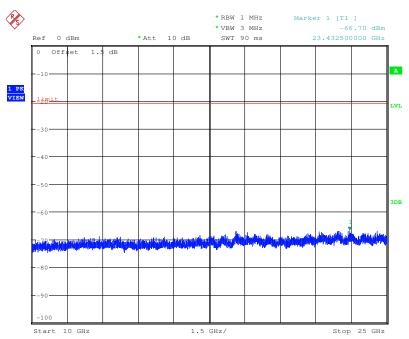


Report No.: SZEM160500367901

Page: 60 of 83




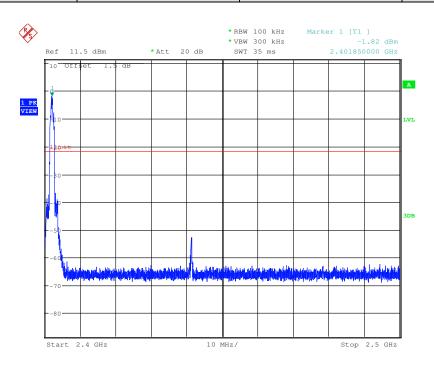

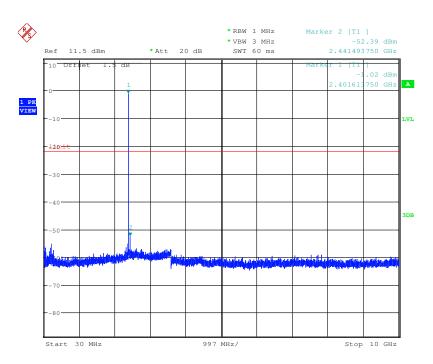


Report No.: SZEM160500367901

Page: 61 of 83

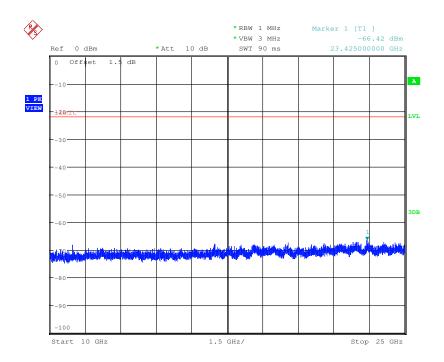





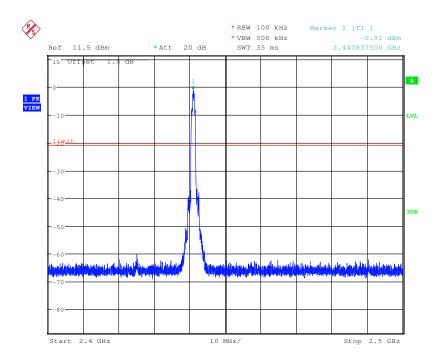

Report No.: SZEM160500367901

Page: 62 of 83

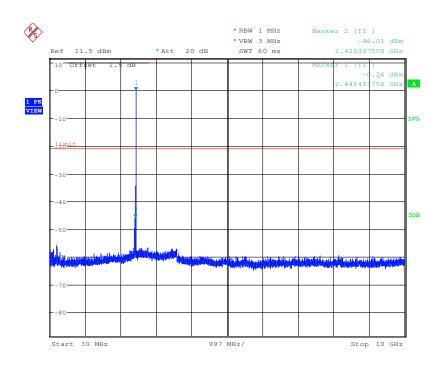


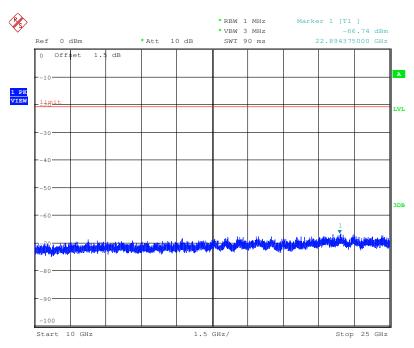


Report No.: SZEM160500367901

Page: 63 of 83




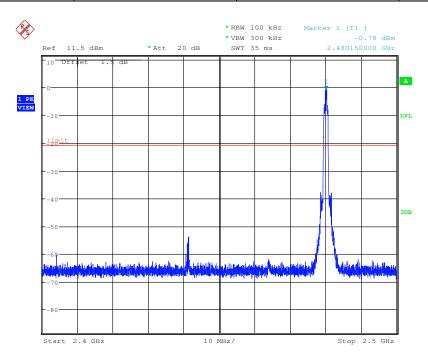

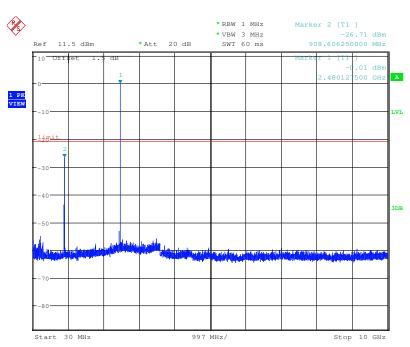

Report No.: SZEM160500367901

Page: 64 of 83

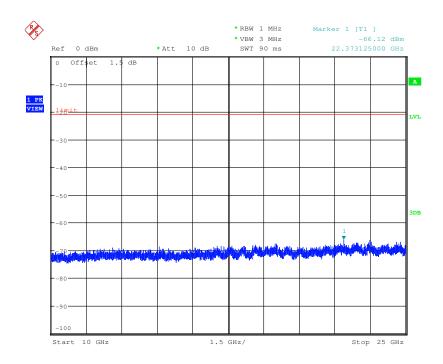

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 65 of 83

6.9 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:

47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage

outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF

Report No.: SZEM160500367901

Page: 66 of 83

bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

Report No.: SZEM160500367901

Page: 67 of 83

6.10 Radiated Spurious Emission


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10: 2013						
Test Site:	Measurement Distance	: 3m	n (Semi-Anech	oic Cham	ber)		
	Measurement Distance	: 10	m (Semi-Anec	choic Char	mber)		
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark	
	0.009MHz-0.090MH	Z	Peak	10kHz	30kHz	Peak	
	0.009MHz-0.090MH	Z	Average	10kHz	30kHz	Average	
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	30kHz	Quasi-peak	
	0.110MHz-0.490MH	Z	Peak	10kHz	30kHz	Peak	
	0.110MHz-0.490MH	Z	Average	10kHz	30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz	3MHz	Peak	
	Above Tariz		Peak	1MHz	10Hz	Average	
Limit:	Frequency		eld strength	Limit	Remark	Measurement	
		(mic	crovolt/meter)	(dBuV/m)	Homan	distance (m)	
	0.009MHz-0.490MHz	2400/F(kHz)		-	-	300	
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30	
	1.705MHz-30MHz		30	-	-	30	
	30MHz-88MHz		29.9	40.0	Quasi-peak	10	
	88MHz-216MHz		44.7	43.5	Quasi-peak	10	
	216MHz-960MHz		60.3	46.0	Quasi-peak	10	
	960MHz-1GHz		100	54.0	Quasi-peak	10	
	Above 1GHz 500 54.0				Average	3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Report No.: SZEM160500367901

Page: 68 of 83

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified

Report No.: SZEM160500367901

Page: 69 of 83


	 Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz) i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. 				
Exploratory Test Mode:	Transmitting mode				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				

Report No.: SZEM160500367901

Page: 70 of 83

6.10.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

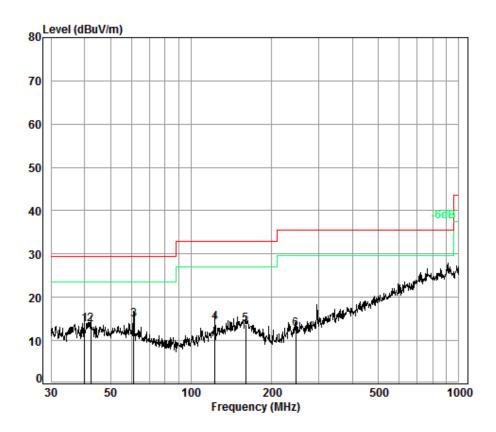

Condition: 10m Vertical

Job No. : 3679CR


Test Mode: a

	louc. u							
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	39.99	6.80	13.32	32.99	26.58	13.71	29.50	-15.79
2	42.15	6.80	13.13	32.99	26.74	13.68	29.50	-15.82
3 рр	61.13	7.00	11.77	32.94	28.97	14.80	29.50	-14.70
4	122.83	7.32	11.65	32.77	28.07	14.27	33.00	-18.73
5	159.78	7.50	13.39	32.73	25.63	13.79	33.00	-19.21
6	245.95	7.83	11.17	32.65	26.29	12.64	35.60	-22.96

Report No.: SZEM160500367901

Page: 71 of 83

Test mode:	Transmitting	Horizontal
------------	--------------	------------

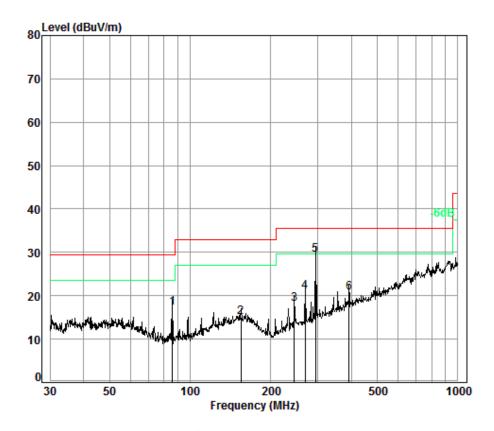

Condition: 10m Horizontal

Job No. : 3679CR

Test Mode: a

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	85.90	7.16	8.63	32.84	34.26	17.21	29.50	-12.29
2	154.82	7.48	13.40	32.74	26.96	15.10	33.00	-17.90
3	245.09	7.83	11.16	32.65	31.76	18.10	35.60	-17.50
4	269.43	7.95	11.83	32.63	33.69	20.84	35.60	-14.76
5 pp	294.11	8.04	12.51	32.60	41.55	29.50	35.60	-6.10
6	392.10	8.30	14.71	32.60	30.23	20.64	35.60	-14.96

Report No.: SZEM160500367901

Page: 72 of 83

6.10.2 Transmitter Emission above 1GHz

Test mode:		GF	SK(DH1)		Test	channel:	Lowe	est		Rema	ırk:	Peak
Frequency (MHz)	Anten Facto (dB/r	or	Cable loss (dB)	Fa	eamp actor dB)	Read Level (dBuV)	Lev (dBu\			Line IV/m)	Over Limit (dB)	Polarization
3792.453	32.8	7	7.74	38	3.48	44.74	46.	87	74	.00	-27.13	Vertical
4804.000	34.1	0	8.87	38	3.75	49.27	53.	49	74	.00	-20.51	Vertical
6034.386	34.7	2	10.52	38	3.91	46.03	52.	36	74	.00	-21.64	Vertical
7206.000	35.6	0	10.68	37	7.64	42.72	51.3	36	74	.00	-22.64	Vertical
9608.000	37.1	0	12.50	36	3.35	36.71	49.	96	74	.00	-24.04	Vertical
12639.790	37.9	2	14.55	37	7.79	38.77	53.	45	74	.00	-20.55	Vertical
3770.567	32.7	8	7.73	38	3.47	45.64	47.	68	74	.00	-26.32	Horizontal
4804.000	34.1	0	8.87	38	3.75	47.87	52.	09	74	.00	-21.91	Horizontal
6034.386	34.7	2	10.52	38	3.91	46.49	52.	82	74	.00	-21.18	Horizontal
7206.000	35.6	0	10.68	37	7.64	42.76	51.	40	74	.00	-22.60	Horizontal
9608.000	37.1	0	12.50	36	3.35	37.10	50.	35	74	.00	-23.65	Horizontal
12676.420	37.9	4	14.65	37	7.82	38.19	52.	96	74	.00	-21.04	Horizontal

Test mode:		GFSK(DH1)	Tes	t channel:	Middle	Rem	ark:	Peak
Frequency (MHz)	Antenna Factor (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3792.453	32.87	7.74	38.48	45.29	47.42	74.00	-26.58	Vertical
4882.000	34.18	8.98	38.77	49.15	53.54	74.00	-20.46	Vertical
6140.076	34.77	10.38	38.78	45.63	52.00	74.00	-22.00	Vertical
7323.000	35.54	10.72	37.59	42.05	50.72	74.00	-23.28	Vertical
9764.000	37.10	12.58	36.14	38.07	51.61	74.00	-22.39	Vertical
12639.790	37.92	14.55	37.79	38.38	53.06	74.00	-20.94	Vertical
3814.467	32.91	7.75	38.49	45.41	47.58	74.00	-26.42	Horizontal
4882.000	34.18	8.98	38.77	48.79	53.18	74.00	-20.82	Horizontal
5982.226	34.66	10.51	38.96	46.11	52.32	74.00	-21.68	Horizontal
7323.000	35.54	10.72	37.59	41.71	50.38	74.00	-23.62	Horizontal
9764.000	37.10	12.58	36.14	38.47	52.01	74.00	-21.99	Horizontal
12603.270	37.90	14.44	37.75	39.06	53.65	74.00	-20.35	Horizontal

Report No.: SZEM160500367901

Page: 73 of 83

Test mode:		GFSK(DH1)	Tes	st channel:	Highest	Ren	nark:	Peak
Frequency (MHz)	Antenna Factor (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3803.444	32.90	7.74	38.49	45.38	47.53	74.00	-26.47	Vertical
4960.000	34.26	9.09	38.78	49.23	53.80	74.00	-20.20	Vertical
6087.002	34.74	10.45	38.85	45.67	52.01	74.00	-21.99	Vertical
7440.000	35.60	10.77	37.54	42.15	50.98	74.00	-23.02	Vertical
9920.000	37.22	12.67	35.93	39.07	53.03	74.00	-20.97	Vertical
12530.530	37.83	14.24	37.68	38.21	52.60	74.00	-21.40	Vertical
3792.453	32.87	7.74	38.48	45.55	47.68	74.00	-26.32	Horizontal
4960.000	34.26	9.09	38.78	48.76	53.33	74.00	-20.67	Horizontal
6087.002	34.74	10.45	38.85	45.39	51.73	74.00	-22.27	Horizontal
7440.000	35.60	10.77	37.54	41.68	50.51	74.00	-23.49	Horizontal
9920.000	37.22	12.67	35.93	39.46	53.42	74.00	-20.58	Horizontal
12603.270	37.90	14.44	37.75	38.27	52.86	74.00	-21.14	Horizontal

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.

Report No.: SZEM160500367901

Page: 74 of 83

6.11 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2013							
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)					
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
	Above IGHZ	74.0	Peak Value					
Test Setup:								






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Report No.: SZEM160500367901

Page: 75 of 83


Test Procedure:	 a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Report No.: SZEM160500367901

Page: 76 of 83

Test plot as follows:

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	------------	---------------	--------	---------	------	----------

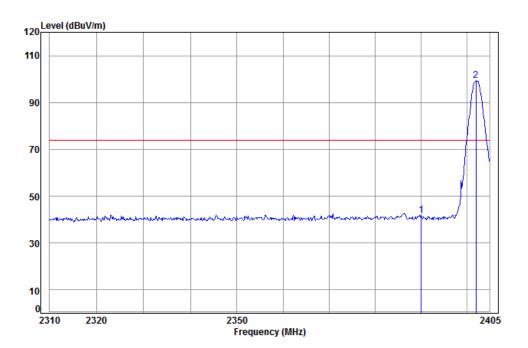

Condition: 3m Vertical Job No: : 3679CR


Mode: : 2402 Band edge

Cable Ant Preamp Read limit Over Freq Loss Factor Factor Level Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 2390.00 5.34 28.57 38.11 46.21 42.01 74.00 -31.99 5.35 28.61 38.11 103.41 99.26 74.00 25.26 2402.00

Report No.: SZEM160500367901

Page: 77 of 83

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal

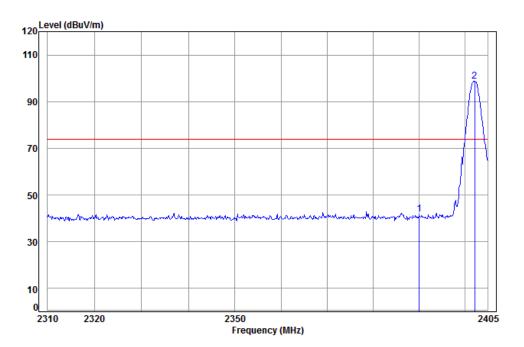

Condition: 3m Horizontal

Job No: : 3679CR

Mode: : 2402 Band edge

Cable

Loss Factor Factor Level Level Line Limit MHz dBuV dBuV/m dBuV/m dB dB/m dB 2390.00 5.34 28.57 38.11 46.05 41.85 74.00 -32.15 5.35 28.61 38.11 102.92 98.77 74.00 24.77 2402.19

Read

Limit


Over

Ant Preamp

Report No.: SZEM160500367901

Page: 78 of 83

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
	J. J. (– 1 1 J					

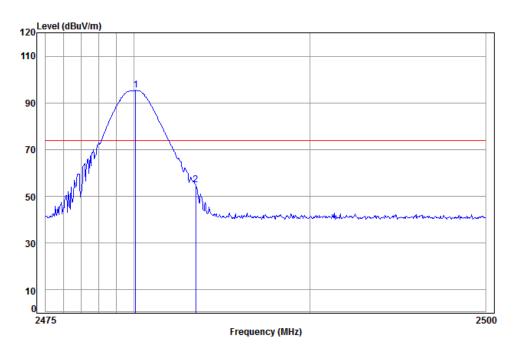

Condition: 3m Vertical Job No: : 3679CR


Mode: : 2480 Band edge

Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Line Limit Level dBuV dBuV/m dBuV/m MHz dB dB/m dB 2480.10 5.41 28.97 38.12 99.12 95.38 74.00 21.38 2483.50 5.41 28.98 38.12 58.56 54.83 74.00 -19.17

Report No.: SZEM160500367901

Page: 79 of 83

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
	J. J. (– 1 . J)					

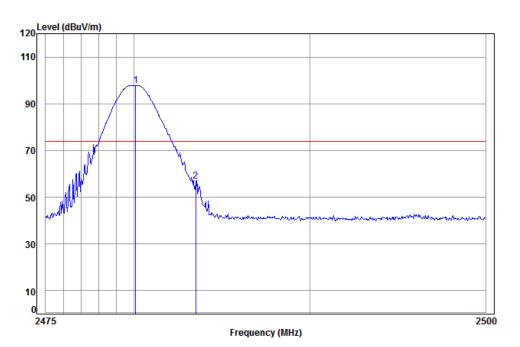

Condition: 3m Horizontal

Job No: : 3679CR


Mode: : 2480 Band edge

0ver	Limit		Read	Preamp	Ant	Cable		
Limit	Line	Level	Level	Factor	Factor	Loss	Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	-
23.87	74.00	97.87	101.61	38.12	28.97	5.41	2480.10	1 pp
-17.04	74.00	56.96	60.69	38.12	28.98	5.41	2483.50	2

Report No.: SZEM160500367901

Page: 80 of 83

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
	J. J. (_ 1 . J)		1 9			

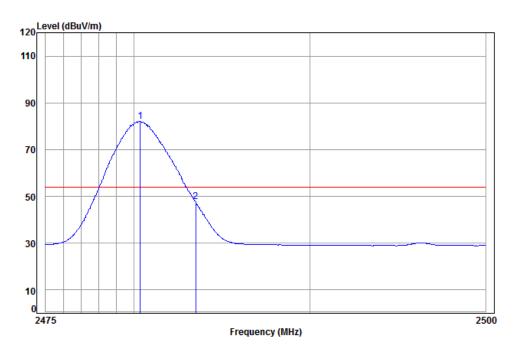

Condition: 3m Vertical Job No: : 3679CR


Mode: : 2480 Band edge

	Freq						Limit Line	
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2480.35 2483.50							

Report No.: SZEM160500367901

Page: 81 of 83

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
	J. J. (_ 1 . J)		1 9			

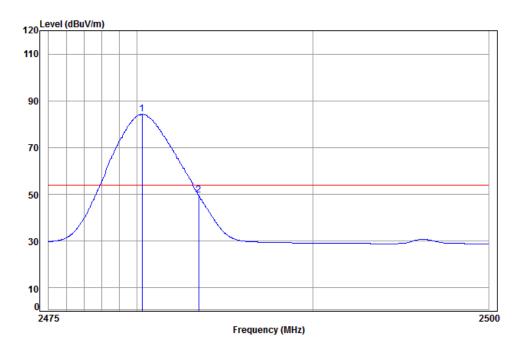

Condition: 3m Horizontal

Job No: : 3679CR

Mode: : 2480 Band edge

0ver	Limit		Read	Preamp	Ant	Cable		
Limit	Line	Level	Level	Factor	Factor	Loss	Freq	
dB	dBuV/m	dBuV/m	—dBuV	——dB	dB/m	dB	MHz	-
		-			-			
30.41	54.00	84.41	88.15	38.12	28.97	5.41	2480.30	1 pp
-4.30	54.00	49.70	53.43	38.12	28.98	5.41	2483.50	2

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

Report No.: SZEM160500367901

Page: 82 of 83


7 Photographs - EUT Test Setup

Test model No.: #05661 (African Americaian)

7.1 Radiated Emission



7.2 Radiated Spurious Emission

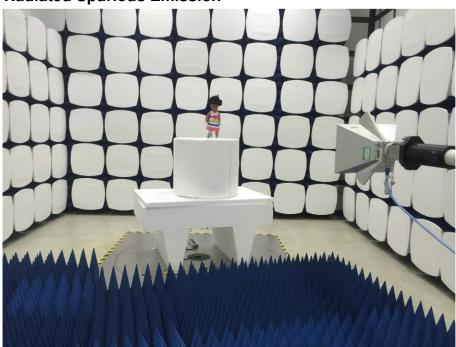

Report No.: SZEM160500367901

Page: 83 of 83

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1605003678CR.