

# FCC Test Report

## Part 15 subpart C

### Client Information:

Applicant : SHENZHEN HUAMA TECHNOLOGY Co.,Ltd  
Applicant add. : Building A2,Junxing Industrial Park,Fuyuan 2nd Road ,Baoan,SZ,China

### EUT Information:

EUT Name : Home audio system  
Model No. : BT-202  
Brand Name : N/A  
FCC ID : 2AHZBBT-202

### Prepared By:

Shenzhen ECT Testing Technology Co., Ltd.  
Add. : Room 1106, Era Innovation Center, Xixiang gushu second road,  
Baoan district, Shenzhen city, China

Date of Receipt: Mar. 18, 2016      Date of Test: Mar. 18~24, 2016  
Date of Issue: Mar. 25, 2016      Test Result: **Pass**

### Test procedure used: ANSI C63.10-2009

This device described above has been tested by Shenzhen ECT Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

\*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by:



Nancy Xu

Approved by:



Kelly Jiang

# 1 Contents

	Page
<b>COVER PAGE</b>	
<b>1 CONTENTS .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>4</b>
2.1 COMPLIANCE WITH FCC PART 15 SUBPART C .....	4
2.2 MEASUREMENT UNCERTAINTY .....	4
<b>3 GENERAL INFORMATION .....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF EUT .....	5
3.2 TEST LOCATION .....	6
3.3 DESCRIPTION OF TEST CONDITIONS .....	7
3.4 EUT PERIPHERAL LIST .....	8
3.5 TEST PERIPHERAL LIST .....	8
<b>4 EQUIPMENTS LIST FOR ALL TEST ITEMS .....</b>	<b>9</b>
<b>5 TEST RESULT .....</b>	<b>10</b>
5.1 ANTENNA REQUIREMENT .....	10
5.1.1 Standard requirement .....	10
5.1.2 EUT Antenna .....	10
5.2 CONDUCTION EMISSIONS MEASUREMENT .....	11
5.2.1 Applied procedures / Limit .....	11
5.2.2 Test procedure .....	11
5.2.3 Test setup .....	11
5.2.4 Test results .....	12
5.3 RADIATED EMISSIONS MEASUREMENT .....	14
5.3.1 Applied procedures / Limit .....	14
5.3.2 Test setup .....	15
5.3.3 Test procedure .....	17
5.3.4 Test Result .....	18
5.3.5 TEST RESULTS (Restricted Bands Requirements) .....	27
5.4 BANDWIDTH TEST .....	29
5.4.1 Applied procedures / Limit .....	29
5.4.2 Test procedure .....	29
5.4.3 Deviation from standard .....	29
5.4.4 Test setup .....	29
5.4.5 Test results .....	30
5.5 CARRIER FREQUENCIES SEPARATED .....	34
5.5.1 Applied procedures / Limit .....	34
5.5.2 Test procedure .....	34
5.5.3 Deviation from standard .....	34

5.5.4	Test setup .....	34
5.5.5	Test results .....	35
5.6	HOPPING CHANNEL NUMBER .....	39
5.6.1	Applied procedures / Limit .....	39
5.6.2	Test procedure .....	39
5.6.3	Deviation from standard .....	39
5.6.4	Test setup .....	39
5.6.5	Test result .....	39
5.7	DWELL TIME .....	41
5.7.1	Applied procedures / Limit .....	41
5.7.2	Test procedure .....	41
5.7.3	Deviation from standard .....	41
5.7.4	TEST SETUP .....	41
5.7.5	Test result .....	42
5.8	MAXIMUM PEAK OUTPUT POWER .....	46
5.8.1	Applied procedures / Limit .....	46
5.8.2	Test procedure .....	46
5.8.3	Deviation from standard .....	46
5.8.4	Test setup .....	46
5.8.5	Test results .....	47
5.9	BAND EDGE .....	48
5.9.1	Applied procedures / Limit .....	48
5.9.2	Test procedure .....	48
5.9.3	Deviation from standard .....	48
5.9.4	Test setup .....	48
5.9.5	Test results .....	49
5.10	CONDUCTED SPURIOUS EMISSIONS .....	53
5.10.1	Applied procedures / Limit .....	53
5.10.2	Test procedure .....	53
5.10.3	Deviation from standard .....	53
5.10.4	Test setup .....	53
5.10.5	Test results .....	54
<b>6</b>	<b>PHOTOGRAPHS .....</b>	<b>66</b>
6.1	CONDUCTED EMISSIONS TEST SETUP .....	66
6.2	RADIATED SPURIOUS EMISSIONS TEST SETUP(BELOW 1GHz) .....	66
6.3	RADIATED SPURIOUS EMISSIONS TEST SETUP(ABOVE 1GHz) .....	67
6.4	EUT CONSTRUCTIONAL DETAILS .....	68

## 2 Test Summary

### 2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result
Antenna Requirement	FCC Part 15 C:2016	Section 15.247(c)	PASS
Conduction Emissions	FCC Part 15 C:2016	Section 15.207(a)	PASS
Radiated Emissions	FCC Part 15 C:2016	Section 15.247(d)	PASS
Carrier Frequencies Separated	FCC Part 15 C:2016	Section 15.247(a)(1)	PASS
Hopping Channel Number	FCC Part 15 C:2016	Section 15.247(a)(1) (iii)	PASS
Dwell Time	FCC Part 15 C:2016	Section 15.247(a)(1) (iii)	PASS
Maximum Peak Output Power	FCC Part 15 C:2016	Section 15.247(b)	PASS
Band edge	FCC Part 15 C:2016	Section 15.247(d)	PASS
Conducted Spurious Emissions	FCC Part 15 C:2016	Section 15.247(d)	PASS
Note: Reference to the FCC Public Notice DA 00-705			

### 2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels have estimated based on ANSI C63.10:2009, the maximum value of the uncertainty as below

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	Radiated Emission Test	$\pm 3.57\text{dB}$

### 3 General Information

#### 3.1 General Description of EUT

<b>Manufacturer:</b>	SHENZHEN HUAMA TECHNOLOGY Co.,Ltd	
<b>Address:</b>	Building A2,Junxing Industrial Park,Fuyuan 2nd Road ,Baoan,SZ,China	
<b>EUT Name:</b>	Home audio system	
<b>Model No:</b>	BT-202	
<b>Derivative model No.:</b>	N/A	
<b>Operation frequency:</b>	2402MHz to 2480MHz	
<b>Channel Number:</b>	79	
<b>Modulation Technology:</b>	GFSK, ( $\pi/4$ )DQPSK, 8DPSK	
<b>Bluetooth version:</b>	Bluetooth 2.1+EDR	
<b>H/W No.:</b>	V1.2	
<b>S/W No.:</b>	V0.1	
<b>AntennaType:</b>	Integral	
<b>Antenna Gain:</b>	maximum: 0 dBi	
<b>Brand Name:</b>	Pakesn	
<b>Serial No:</b>	N/A	
<b>Power Supply Range:</b>	AC 120V/60Hz	
<b>Power Supply:</b>	AC 120V/60Hz	
<b>Power Cord:</b>	1.7m x 2 wires unscreened AC Cable	
<b>Signal Cord:</b>	1.3m x 2 wires unscreened speaker Cable 1.2m x 2 wires unscreened AUX Cable	
<b>Effective Isotropic Radiated Power(max):</b>	1Mbps: 1.00dBm	Peak detector
	3Mbps: -0.08dBm	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3.2 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited


No.22, Jinqianling Third Street, Jitigang, Huangjiang,Dongguan, Guangdong, China

Tel.: +86.769.82020499 Fax.: +86.769.82020495

The FCC Registration No. of Dongguan Yaxu (AiT) Technology Limited is 248337.

### 3.3 Description of Test conditions

- (1) EUT was tested in normal configuration (Please See following Block diagram)

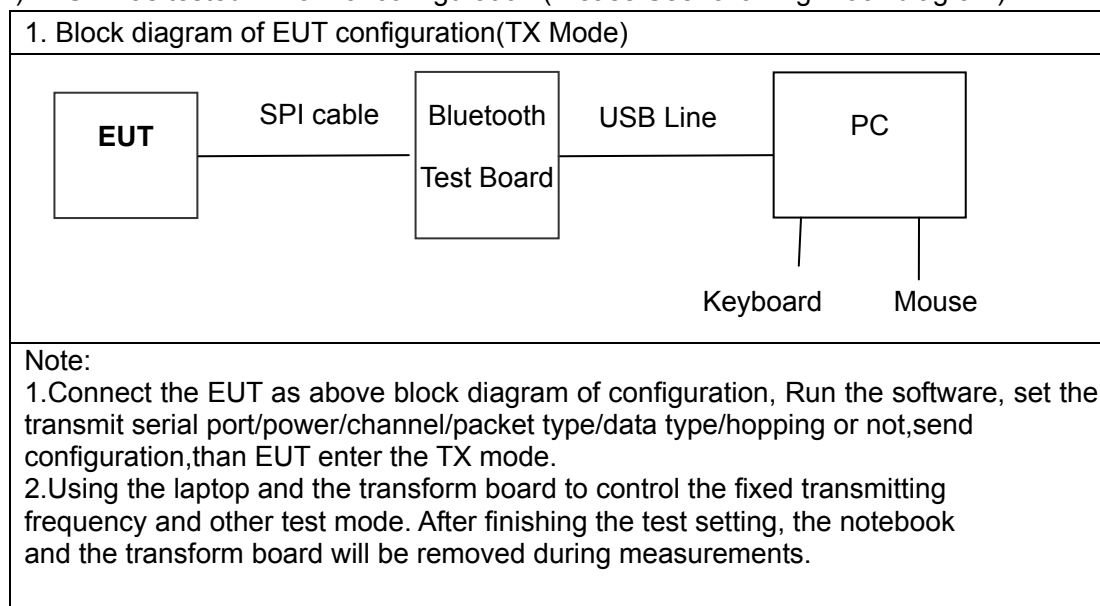

- (2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the adiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

- (3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

- (4) Frequency range of radiated measurements:

According to the 15.33, The test range will be up to the tenth harmonic of the highest fundamental frequency .

- (5) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode, only the worst-case results(1Mbps/3Mbps) are recorded in this report.

### 3.4 EUT Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	Remote control	N/A	N/A	N/A	N/A	N/A
2	AUX cable	N/A	N/A	N/A	1.2m x 2 wires unscreened	N/A

### 3.5 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Personal computer	H P	CE 、 FCC	DX2310	CNG8250MZ3	1.8m/unshielded /detachable	N/A
2	Keyboard	DELL	CE	SK-8115	CN-ONM432- 71616-81M-OLK B	N/A	1.5m/unshielded /undetachable
3	Mouse	Microsoft	CE	X800898	30603	N/A	1.5m/unshielded /undetachable
4	USB cable	N/A	N/A	N/A	N/A	N/A	0.6m /unshielded /detachable



## 4 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	ADVANTEST	R3182	150900201	2015.06.29	2016.06.28
2	EMI Measuring Receiver	Schaffner	SCR3501	235	2015.06.29	2016.06.28
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2015.06.29	2016.06.28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2015.06.29	2016.06.28
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2015.06.29	2016.06.28
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2015.06.29	2016.06.28
7	SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170367	2015.06.29	2016.06.28
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.29	2016.06.28
9	EMI Test Receiver	R&S	ESCI	100124	2015.06.29	2016.06.28
10	LISN	Kyoritsu	KNW-242	8-837-4	2015.06.29	2016.06.28
11	LISN	Kyoritsu	KNW-407	8-1789-3	2015.06.29	2016.06.28
12	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.29	2016.06.28
13	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.29	2016.06.28
14	Power Meter	R&S	NRVS	101336	2015.06.29	2016.06.28
15	EMI Test Receiver	Rohde & Schwarz	ESIB26	100394	2015.06.29	2016.06.28
16	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2016.01.04	2017.01.03
17	Radiated Cable 2# (1GHz -25GHz)	FUJIKURA	10D2W	02	2015.12.25	2016.12.24
18	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2016.01.04	2017.01.03
19	SMA Antenna connector (Impedance:50OHM, cable loss:0.5dBm)	Dosin	Dosin-SMA	N/A	N/A	N/A
20	Power sensor	Anritsu	MA2411B	1126168	2015.06.29	2016.06.28

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## **5 Test Result**

### **5.1 Antenna Requirement**

#### **5.1.1 Standard requirement**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### **5.1.2 EUT Antenna**

The antenna is integrated on the main PCB and no consideration of replacement. Antenna gain is maximum 0 dBi from 2.4GHz to 2.5GHz.

## 5.2 Conduction Emissions Measurement

### 5.2.1 Applied procedures / Limit


Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

### 5.2.2 Test procedure


EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

### 5.2.3 Test setup

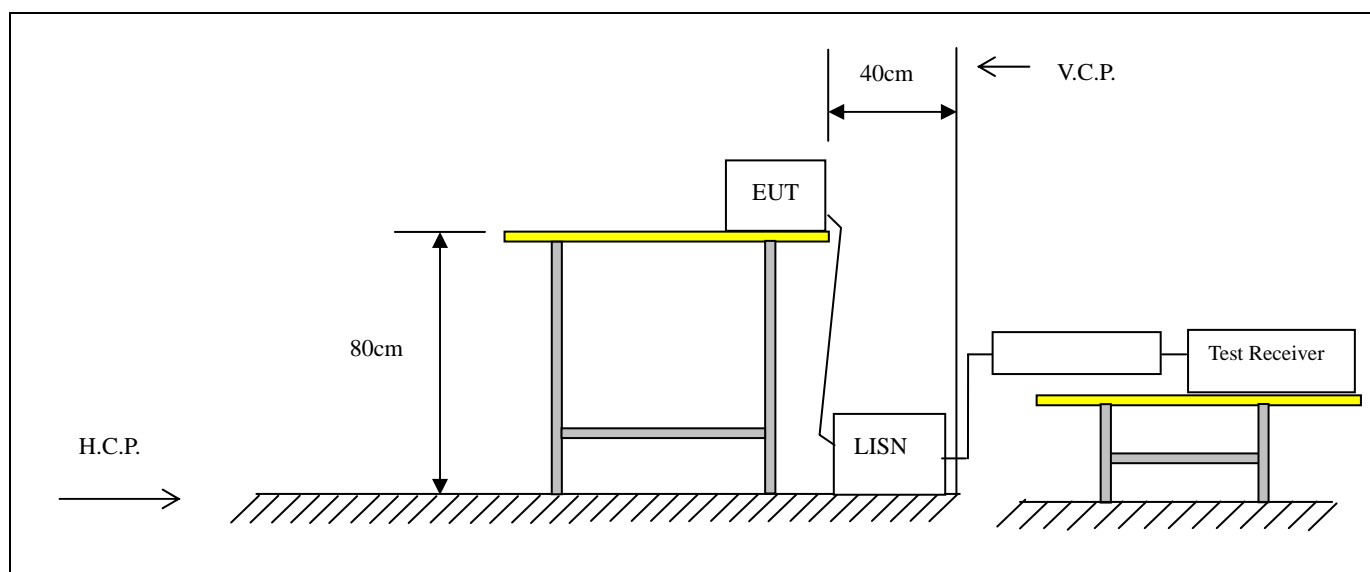

## 5.2.4 Test results

EUT:	Home audio system	Model Name. :	BT-202
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2016-03-22
Test Mode:	TX (1Mbps) CH00 (worst case)	Phase :	Line
<b>Test Voltage :</b>	AC 120V/60Hz		

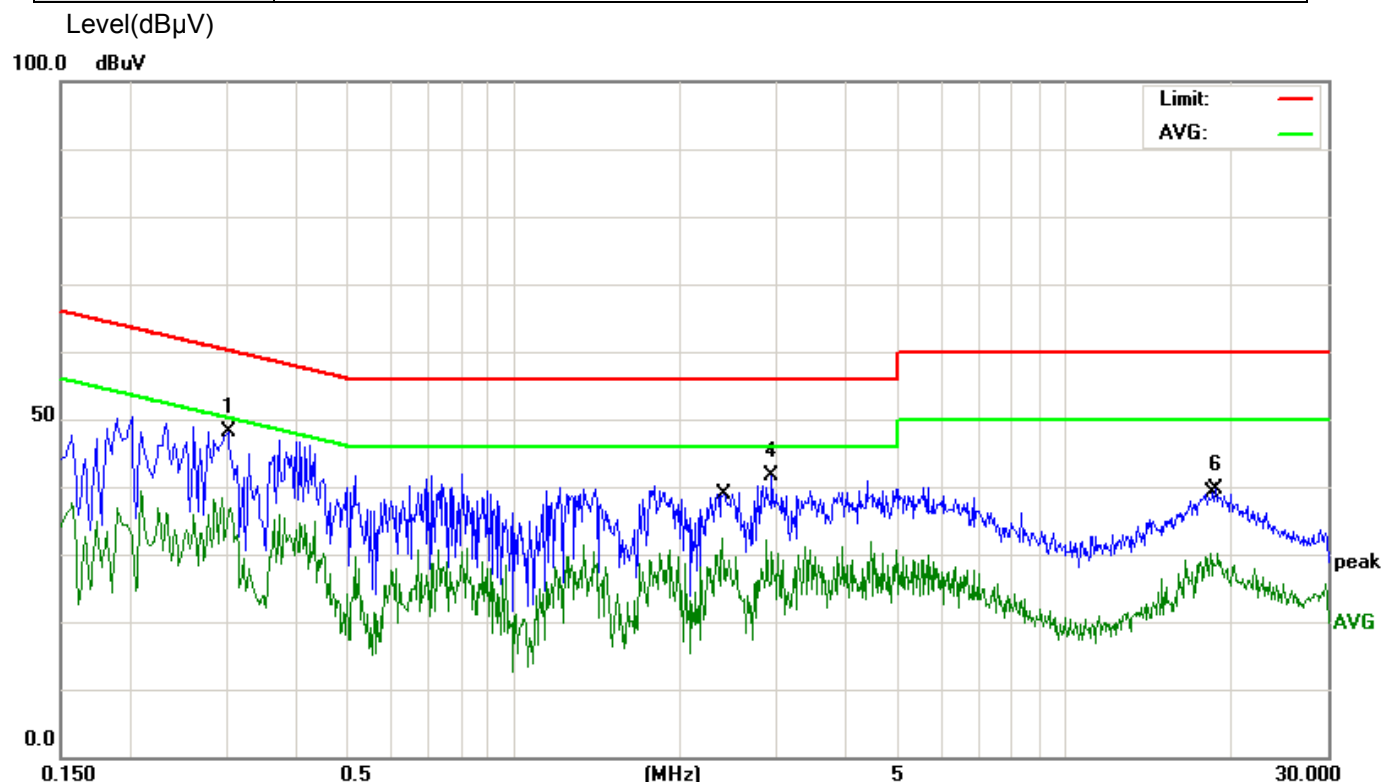


Measure data:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.3020	47.02	1.19	48.21	60.19	-11.98	peak
2		0.3060	35.61	1.18	36.79	50.08	-13.29	AVG
3		2.3940	22.47	10.01	32.48	46.00	-13.52	AVG
4		2.9380	31.67	10.03	41.70	56.00	-14.30	peak
5		18.3300	28.26	1.83	30.09	50.00	-19.91	AVG
6		18.7700	37.79	1.88	39.67	60.00	-20.33	peak

EUT:	Home audio system	Model Name. :	BT-202
Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	2016-03-22
Test Mode:	TX (1Mbps) CH00 (worst case)	Phase :	Neutral
<b>Test Voltage :</b>	AC 120V/60Hz		

Level(dBμV)

100.0 dBμV

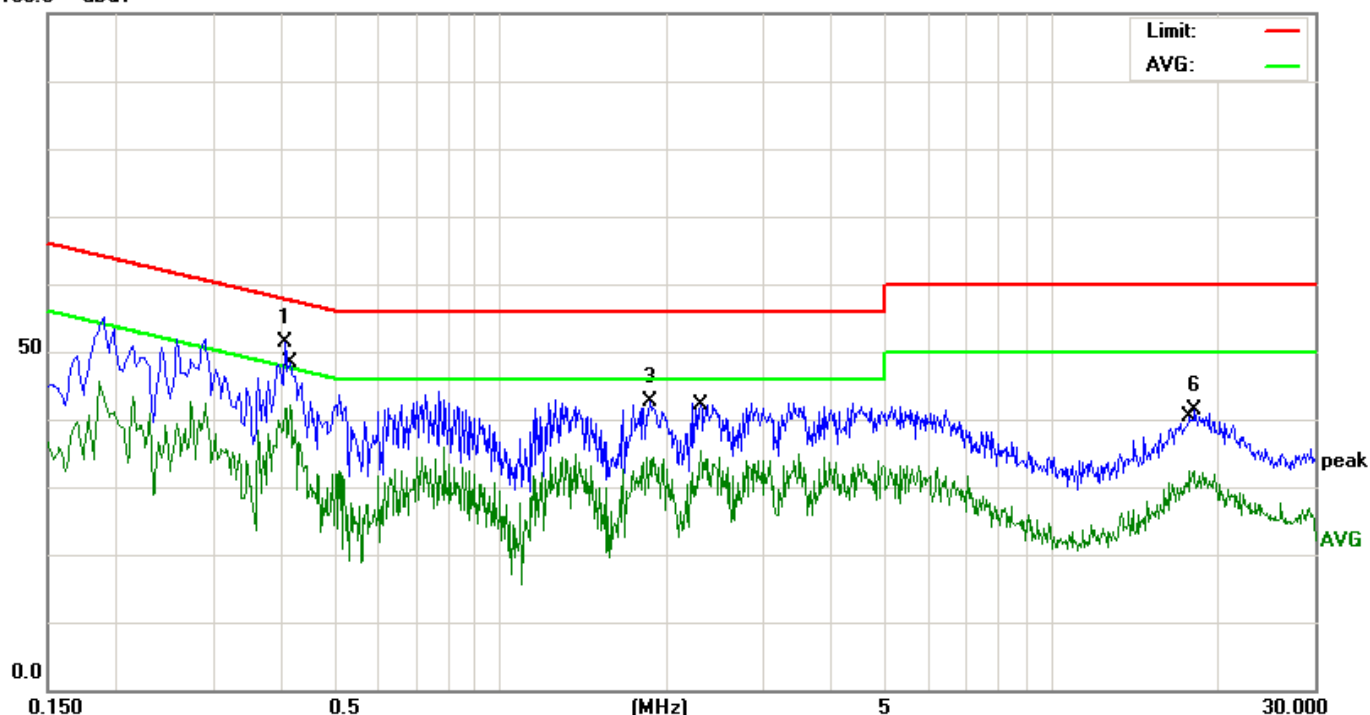

Measure result:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBμV	dB	dBμV	dBμV	dB	Detector
1		0.4060	50.35	1.05	51.40	57.73	-6.33	peak
2	*	0.4140	41.07	1.04	42.11	47.57	-5.46	AVG
3		1.8620	32.75	9.99	42.74	56.00	-13.26	peak
4		2.2980	25.30	10.00	35.30	46.00	-10.70	AVG
5		17.7740	30.59	1.76	32.35	50.00	-17.65	AVG
6		18.1700	39.52	1.81	41.33	60.00	-18.67	peak

Factor = LISN factor + Cable Loss + Pulse limiter factor.

## 5.3 Radiated Emissions Measurement

### 5.3.1 Applied procedures / Limit


15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency of Emission (MHz)	Field Strength		Measurement Distance (meters)
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
0.009-0.49	2400/F(kHz)		300
0.49-1.705	24000/F(kHz)		30
1.705-30	30		30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3


### 5.3.2 Test setup

#### Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

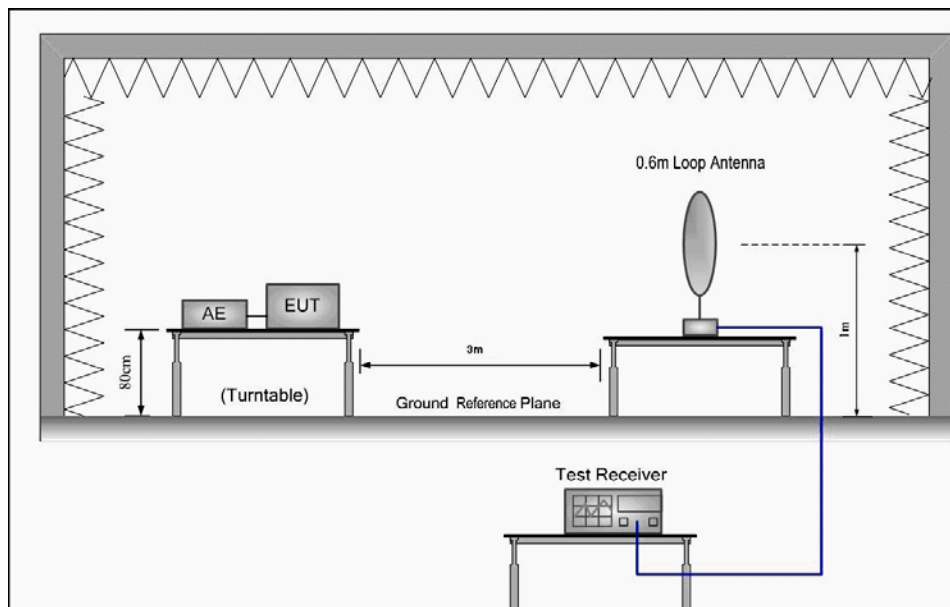

- 2) 30 MHz to 1 GHz emissions:

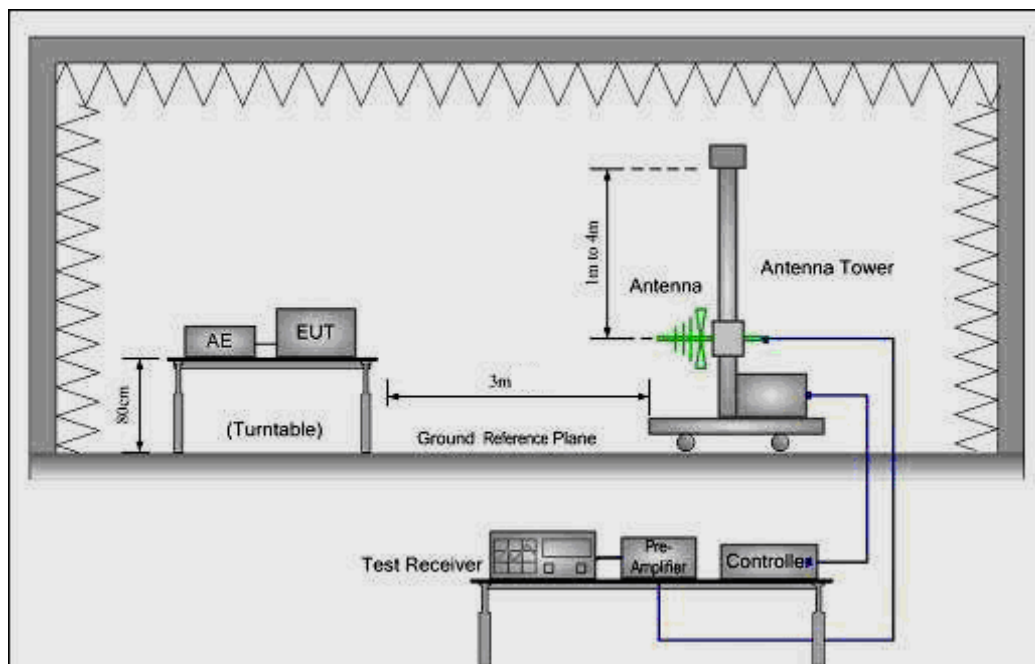

3) 1 GHz to 25 GHz emissions:

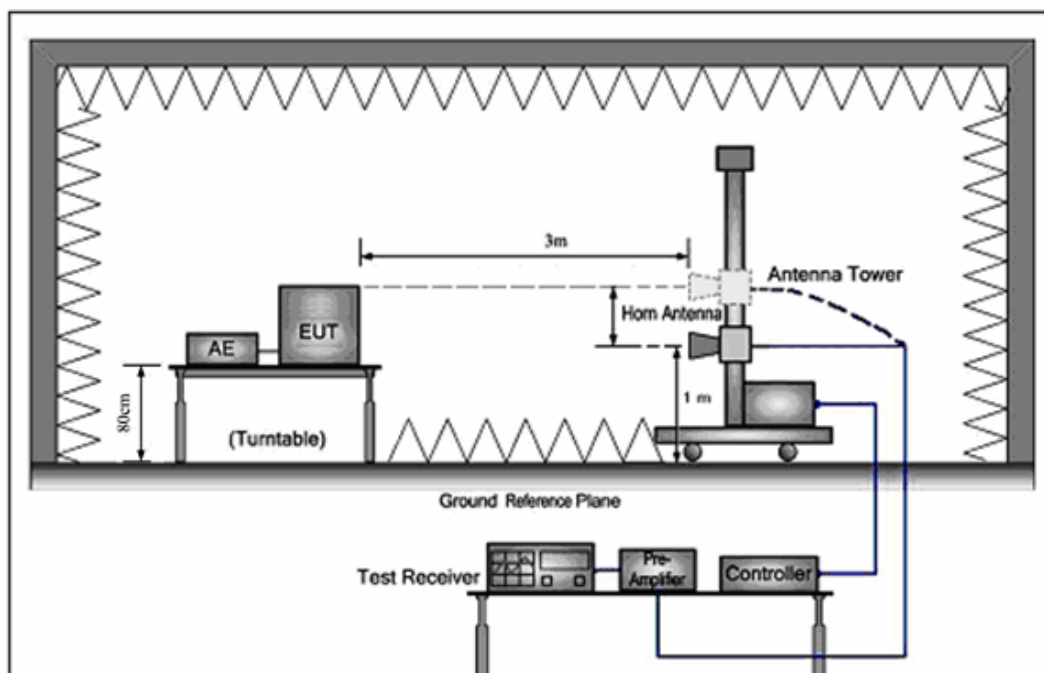



### 5.3.3 Test procedure

EUT was placed upon a wooden test table which was placed on the turn table 0.8m above the horizontal metal ground plane, and operating in the mode as mentioned above. A receiving antenna was placed 3m away from the EUT. During testing, turn around the turn table and move the antenna from 1m to 4m to find the maximum field-strength reading. All peripherals were placed at a distance of 10cm between each other. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

For measurement at frequency above 1GHz

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

### 5.3.4 Test Result

#### Radiated Emissions Test Data Below 30MHz

EUT:	Home audio system	Model Name :	BT-202
Temperature:	25 °C	Test Data	2016-03-22
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX	Test Voltage :	AC 120V/60Hz
Measurement Distance	3 m	Frenqucy Range	9KHz to 30MHz
RBW/VBW	9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP		

No emission found between lowest internal used/generated frequencies to 30MHz.

## Radiated Emissions Test Data Below 1GHz


EUT:	Home audio system	Model Name :	BT-202
Temperature:	25 °C	Test Data	2016-03-22
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	TX (1Mbps) CH00 (worst case)	Test Voltage :	AC 120V/60Hz
Measurement Distance	3 m	Frenqucy Range	30MHz to 1GHz
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.		

(a) Antenna polarization: Horizontal

Peak scan

Level (dBμV/m)

80.0 dBμV

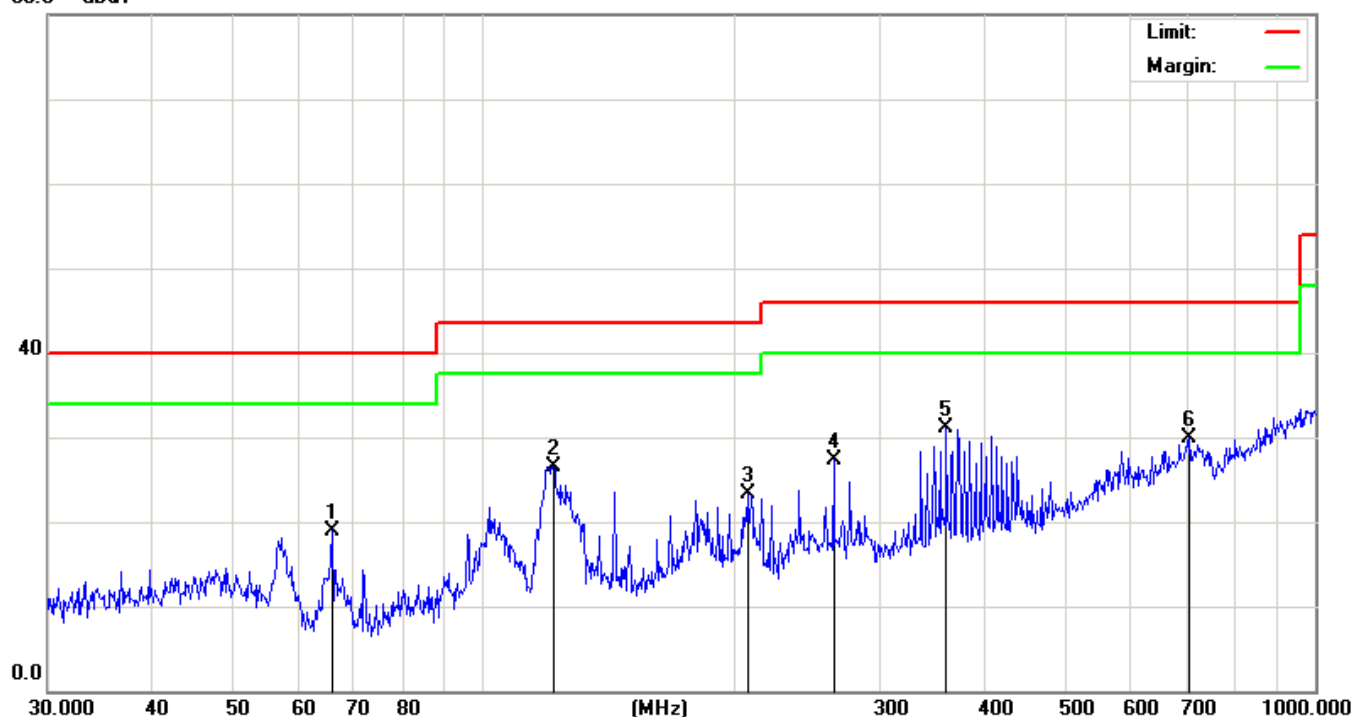


Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector
1		65.8031	36.61	-17.65	18.96	40.00	-21.04	QP
2		121.5485	41.52	-14.98	26.54	43.50	-16.96	QP
3		207.8500	37.92	-14.55	23.37	43.50	-20.13	QP
4		263.8190	38.41	-11.10	27.31	46.00	-18.69	QP
5	*	360.4476	38.71	-7.59	31.12	46.00	-14.88	QP
6		706.6998	30.02	-0.16	29.86	46.00	-16.14	QP

(b) Antenna polarization: vertical

Peak scan

Level (dBμV/m)

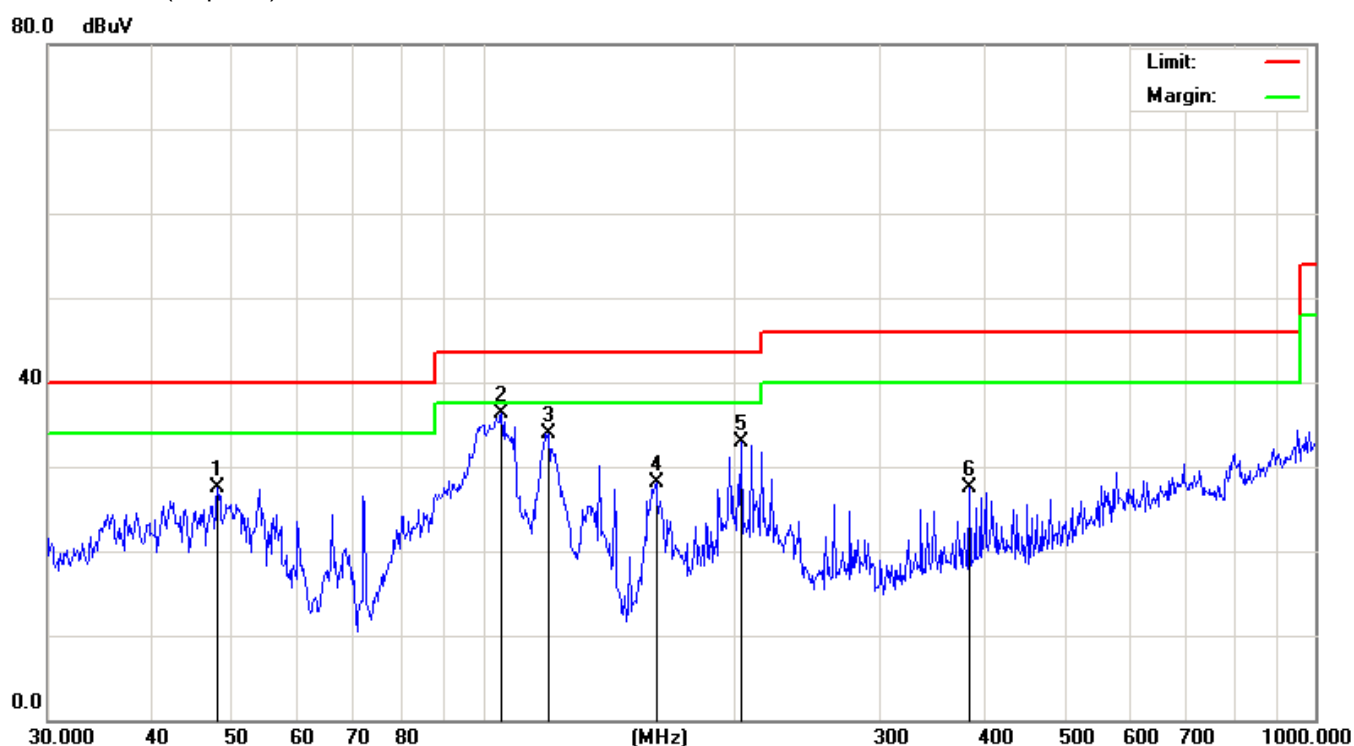

Quasi-peak measurement

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBμV	dB	dBμV	dBμV	dB	
1		47.9939	45.77	-18.34	27.43	40.00	-12.57	QP
2	*	105.2717	49.94	-13.54	36.40	43.50	-7.10	QP
3		119.8555	48.87	-14.87	34.00	43.50	-9.50	QP
4		161.4740	43.08	-14.88	28.20	43.50	-15.30	QP
5		204.2376	48.16	-15.20	32.96	43.50	-10.54	QP
6		383.9318	35.03	-7.45	27.58	46.00	-18.42	QP

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

### Radiated Emissions Test Data Above 1GHz

EUT:	Home audio system	Model Name :	BT-202
Temperature:	25 °C	Test Data	2016-03-22
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	1Mbps	Test Voltage :	AC 120V/60Hz
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average.		

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

#### Vertical Measurement:

Frequency (MHz)	Reading Level (dBμV)	factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization
4804.000	50.27	5.06	55.33	74.00	-18.67	peak
4804.000	36.46	5.06	41.52	54.00	-12.48	AVG
7206.000	49.56	7.03	56.59	74.00	-17.41	peak
7206.000	31.44	7.03	38.47	54.00	-15.53	AVG
9608.000	42.52	10.63	53.15	74.00	-20.85	peak
9608.000	28.17	10.63	38.80	54.00	-15.20	AVG

#### Horizontal Measurement:

Frequency (MHz)	Reading Level (dBμV)	factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization
4804.000	52.78	5.06	57.84	74.00	-16.16	peak
4804.000	36.92	5.06	41.98	54.00	-12.02	AVG
7206.000	49.14	7.03	56.17	74.00	-17.83	peak
7206.000	33.43	7.03	40.46	54.00	-13.54	AVG
9608.000	43.76	10.63	54.39	74.00	-19.61	peak
9608.000	28.92	10.63	39.55	54.00	-14.45	AVG

Note:

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Low Channel 00: 2402 MHz

Data rate: 1Mbps

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4882.000	51.41	5.14	56.55	74.00	-17.45	peak
4882.000	36.19	5.14	41.33	54.00	-12.67	AVG
7323.000	45.75	7.54	53.29	74.00	-20.71	peak
7323.000	31.83	7.54	39.37	54.00	-14.63	AVG
9764.000	40.37	11.39	51.76	74.00	-22.24	peak
9764.000	28.56	11.39	39.95	54.00	-14.05	AVG

**Horizontal Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4882.000	52.25	5.14	57.39	74.00	-16.61	peak
4882.000	35.76	5.14	40.90	54.00	-13.10	AVG
7323.000	45.45	7.54	52.99	74.00	-21.01	peak
7323.000	32.62	7.54	40.16	54.00	-13.84	AVG
9764.000	42.05	11.39	53.44	74.00	-20.56	peak
9764.000	26.17	11.39	37.56	54.00	-16.44	AVG

**Note:**

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Middle Channel 39: 2441 MHz

Data rate: 1Mbps

# 1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

## Vertical Measurement:

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4960.000	50.25	5.22	55.47	74.00	-18.53	peak
4960.000	35.41	5.22	40.63	54.00	-13.37	AVG
7440.000	46.62	8.06	54.68	74.00	-19.32	peak
7440.000	33.77	8.06	41.83	54.00	-12.17	AVG
9920.000	42.45	12.10	54.55	74.00	-19.45	peak
9920.000	28.38	12.10	40.48	54.00	-13.52	AVG

## Horizontal Measurement:

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4960.000	52.74	5.22	57.96	74.00	-16.04	peak
4960.000	37.46	5.22	42.68	54.00	-11.32	AVG
7440.000	45.58	8.06	53.64	74.00	-20.36	peak
7440.000	32.99	8.06	41.05	54.00	-12.95	AVG
9920.000	40.23	12.10	52.33	74.00	-21.67	peak
9920.000	25.58	12.10	37.68	54.00	-16.32	AVG

### Note:

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

High Channel 78: 2480 MHz

Data rate: 1Mbps

EUT:	Home audio system	Model Name :	BT-202
Temperature:	25 °C	Test Data	2016-03-22
Pressure:	1010 hPa	Relative Humidity:	60%
Test Mode :	3Mbps	Test Voltage :	AC 120V/60Hz
Measurement Distance	3 m	Frenqucy Range	1GHz to 25GHz
RBW/VBW	1MHz/1MHz for Peak, 1MHz/10Hz for Average.		

# 1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

## Vertical Measurement:

Frequency (MHz)	Reading Level (dBμV)	factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization
4804.000	50.86	5.06	55.92	74.00	-18.08	peak
4804.000	35.96	5.06	41.02	54.00	-12.98	AVG
7206.000	44.41	7.03	51.44	74.00	-22.56	peak
7206.000	28.25	7.03	35.28	54.00	-18.72	AVG
9608.000	40.17	10.63	50.80	74.00	-23.20	peak
9608.000	24.66	10.63	35.29	54.00	-18.71	AVG

## Horizontal Measurement:

Frequency (MHz)	Reading Level (dBμV)	factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization
4804.000	52.41	5.06	57.47	74.00	-16.53	peak
4804.000	36.27	5.06	41.33	54.00	-12.67	AVG
7206.000	46.55	7.03	53.58	74.00	-20.42	peak
7206.000	33.07	7.03	40.10	54.00	-13.90	AVG
9608.000	42.43	10.63	53.06	74.00	-20.94	peak
9608.000	26.78	10.63	37.41	54.00	-16.59	AVG

## Note:

Measurement Level = Reading Level + Factor  
Factor=Ant Factor + Cable Loss-Preamp Factor  
Low Channel 00: 2402 MHz  
Data rate: 3Mbps



## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4882.000	50.26	5.14	55.40	74.00	-18.60	peak
4882.000	37.43	5.14	42.57	54.00	-11.43	AVG
7323.000	43.17	7.54	50.71	74.00	-23.29	peak
7323.000	32.59	7.54	40.13	54.00	-13.87	AVG
9764.000	40.36	11.39	51.75	74.00	-22.25	peak
9764.000	27.44	11.39	38.83	54.00	-15.17	AVG

**Horizontal Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4882.000	51.45	5.14	56.59	74.00	-17.41	peak
4882.000	36.72	5.14	41.86	54.00	-12.14	AVG
7323.000	47.26	7.54	54.80	74.00	-19.20	peak
7323.000	32.08	7.54	39.62	54.00	-14.38	AVG
9764.000	43.11	11.39	54.50	74.00	-19.50	peak
9764.000	28.49	11.39	39.88	54.00	-14.12	AVG

**Note:**

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Middle Channel 39: 2441 MHz

Data rate: 3Mbps

# 1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

## Vertical Measurement:

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4960.000	49.97	5.22	55.19	74.00	-18.81	peak
4960.000	36.86	5.22	42.08	54.00	-11.92	AVG
7440.000	46.19	8.06	54.25	74.00	-19.75	peak
7440.000	31.33	8.06	39.39	54.00	-14.61	AVG
9920.000	40.87	12.10	52.97	74.00	-21.03	peak
9920.000	28.69	12.10	40.79	54.00	-13.21	AVG

## Horizontal Measurement:

Frequency (MHz)	Reading Level (dB $\mu$ V)	factor (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna polarization
4960.000	50.64	5.22	55.86	74.00	-18.14	peak
4960.000	36.17	5.22	41.39	54.00	-12.61	AVG
7440.000	48.52	8.06	56.58	74.00	-17.42	peak
7440.000	34.69	8.06	42.75	54.00	-11.25	AVG
9920.000	42.57	12.10	54.67	74.00	-19.33	peak
9920.000	25.88	12.10	37.98	54.00	-16.02	AVG

### Note:

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

High Channel 78: 2480 MHz

Data rate: 3Mbps

### 5.3.5 TEST RESULTS (Restricted Bands Requirements)

EUT:	Home audio system	Model Name :	BT-202
Temperature:	26 °C	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2402MHz/2480MHz (1Mbps)		
Note:	1. The transmitter was setup to transmit at the lowest channel (CH00). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH78). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	V	40.06	26.75	-5.79	34.27	20.96	74.00	54.00	CH00
2390.00	H	39.49	26.18	-5.79	33.70	20.39	74.00	54.00	CH00
2483.50	V	40.13	29.69	-4.98	35.15	24.71	74.00	54.00	CH78
2483.50	H	38.94	29.55	-4.98	33.96	24.57	74.00	54.00	CH78

#### Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT:	Home audio system	Model Name :	BT-202
Temperature:	26℃	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX 2402MHz/2480MHz (3Mbps)		
Note:	1. The transmitter was setup to transmit at the lowest channel (CH00). Then the field strength was measured at 2310-2390 MHz. 2. The transmitter was setup to transmit at the highest channel (CH78). Then the field strength was measured at 2483.5-2500 MHz. 3. The data of 2390MHz and 2483.5MHz was the worst.		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	V	40.33	26.75	-5.79	34.54	20.96	74.00	54.00	CH00
2390.00	H	39.58	27.69	-5.79	33.79	21.90	74.00	54.00	CH00
2483.50	V	41.12	29.52	-4.98	36.14	24.54	74.00	54.00	CH78
2483.50	H	39.36	29.44	-4.98	34.38	24.46	74.00	54.00	CH78

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (3) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: No any other emission which falls in restricted bands can be detected and be reported.

**Test result: The unit does meet the FCC requirements.**

## 5.4 BANDWIDTH TEST

### 5.4.1 Applied procedures / Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 5.4.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW $\geq$ RBW, Sweep time = Auto.

### 5.4.3 Deviation from standard

No deviation.

### 5.4.4 Test setup



### 5.4.5 Test results

EUT:	Home audio system	Model Name :	BT-202
Temperature:	26 °C	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX 1Mbps\ 3Mbps		

#### Test result:


##### Normal mode:

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.0984	0.732
Middle	1.1027	0.735
Highest	1.1071	0.738


##### 3EDR mode:

Test Channel	bandwidth	2/3 bandwidth
Lowest	1.3502	0.900
Middle	1.3546	0.903
Highest	1.3546	0.903


## CH00-1Mbps

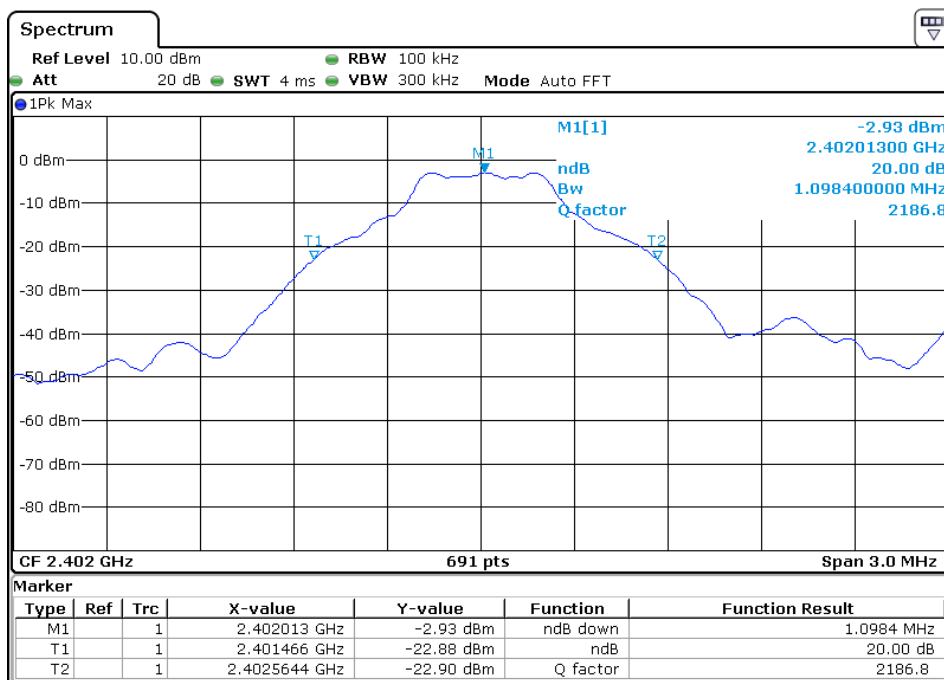


## CH 39-1Mbps

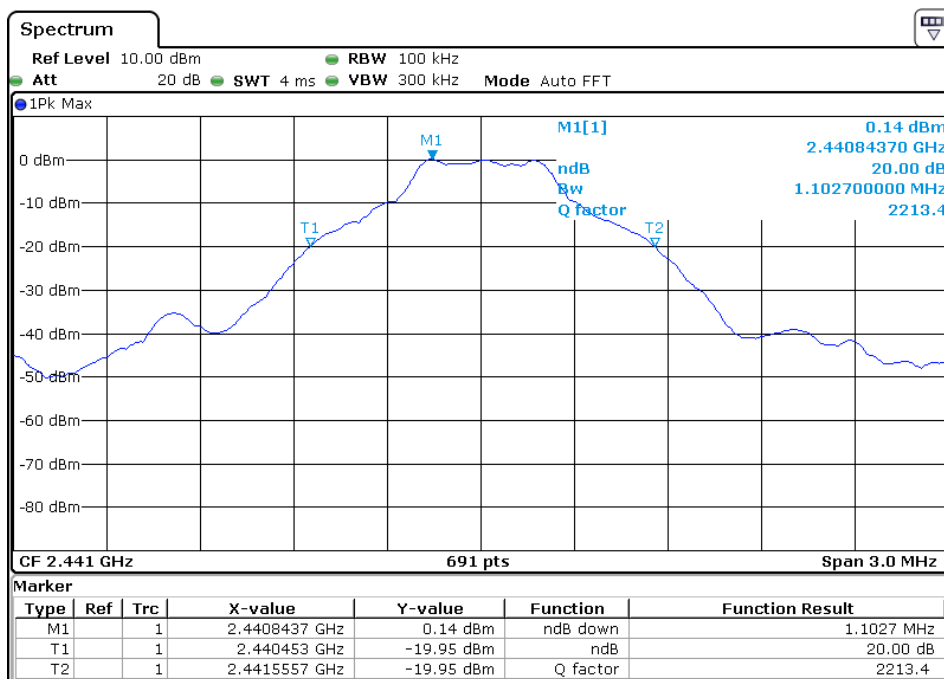

## CH 78-1Mbps

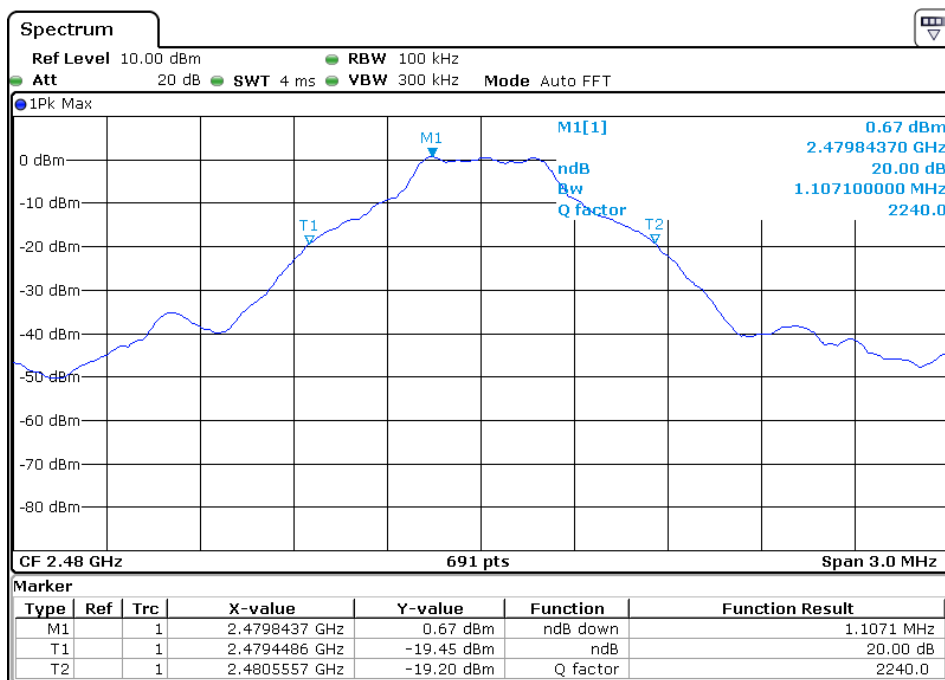


## CH 00-3Mbps

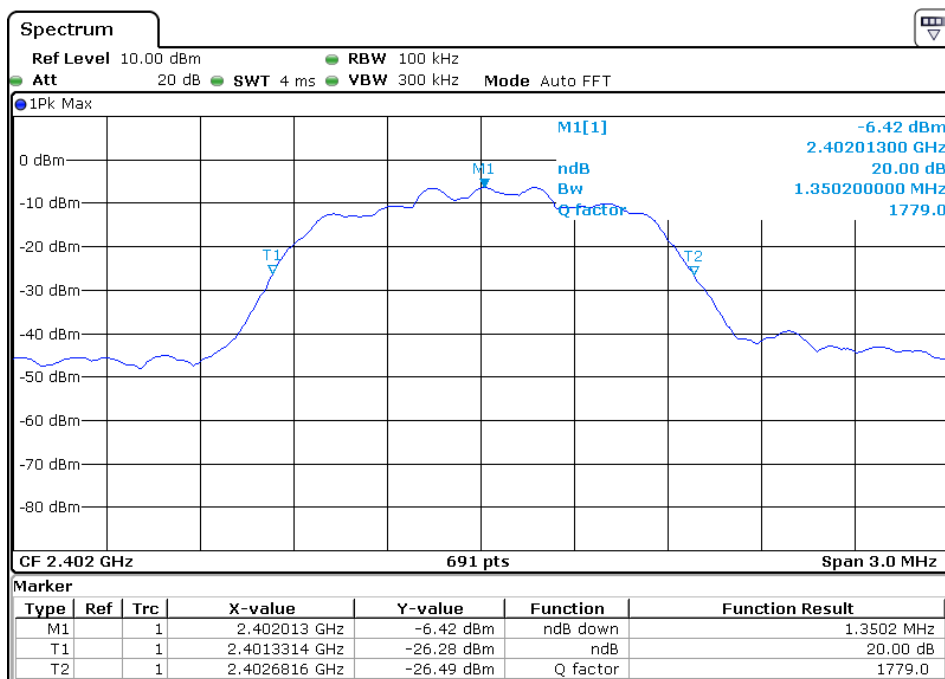




## CH 39-3Mbps

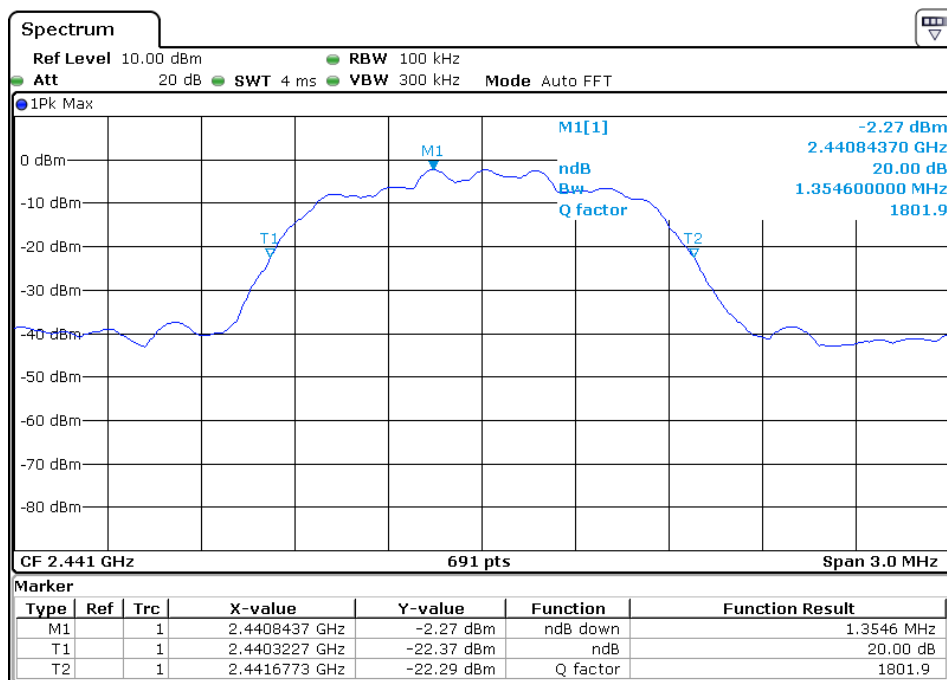

## CH 78-3Mbps

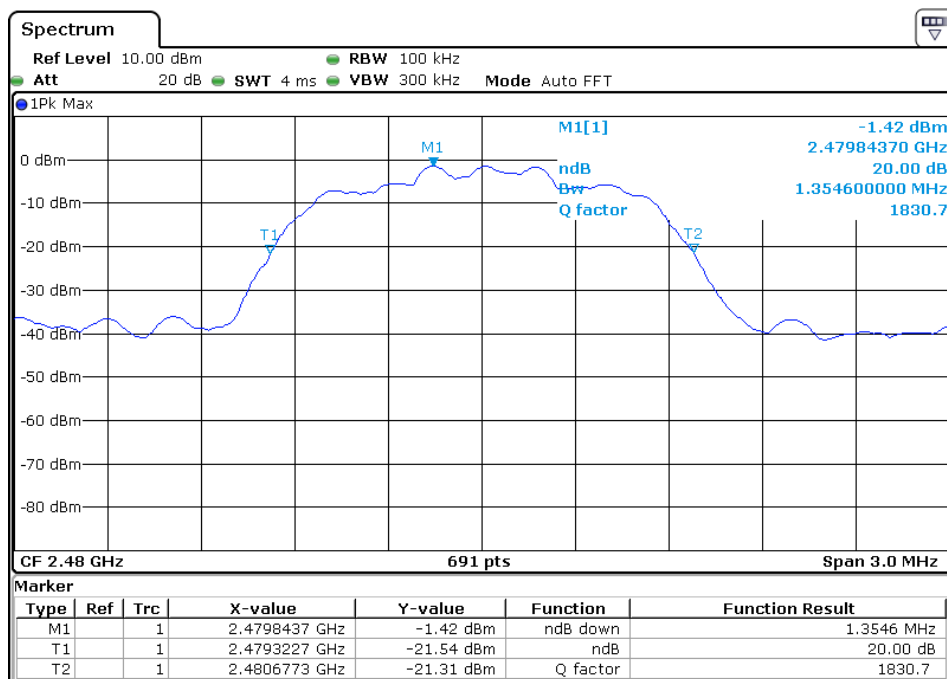

## 5.5 Carrier Frequencies Separated

### 5.5.1 Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### 5.5.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=100kHz, VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak.
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

### 5.5.3 Deviation from standard

No deviation.

### 5.5.4 Test setup

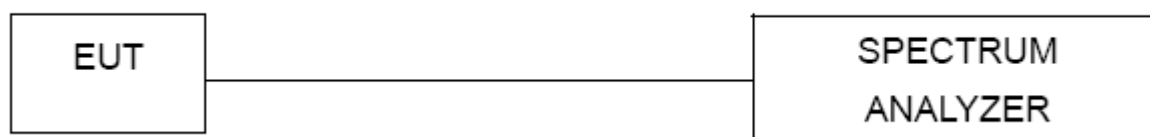

### 5.5.5 Test results

EUT:	Home audio system	Model Name :	BT-202
Temperature:	22 °C	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX 1Mbps/ 3Mbps		

#### Test result:

1Mbps

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	998.6 KHz	Pass
Middle Channels (channel 39 and channel 40)	998.6 KHz	Pass
Upper Channels (channel 77 and channel 78)	1002.9 KHz	Pass


3Mbps

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1002.9 KHz	Pass
Middle Channels (channel 39 and channel 40)	998.6 KHz	Pass
Upper Channels (channel 77 and channel 78)	998.6 KHz	Pass


#### Remark:

The limit is maximum two-thirds of the 20 dB bandwidth: 903 KHz.


## CH 00-1Mbps

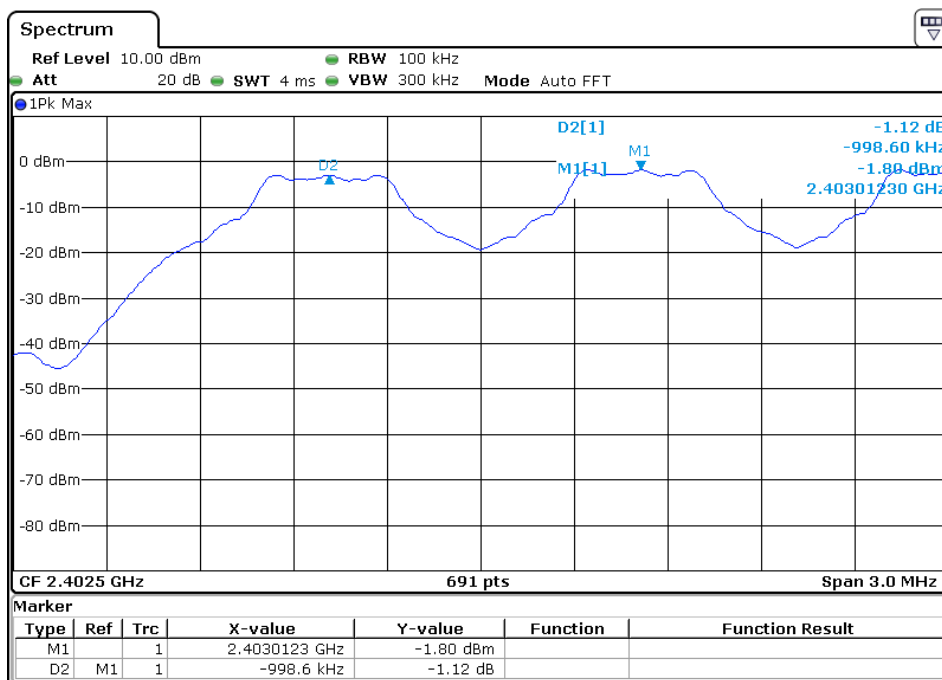


## CH 39-1Mbps

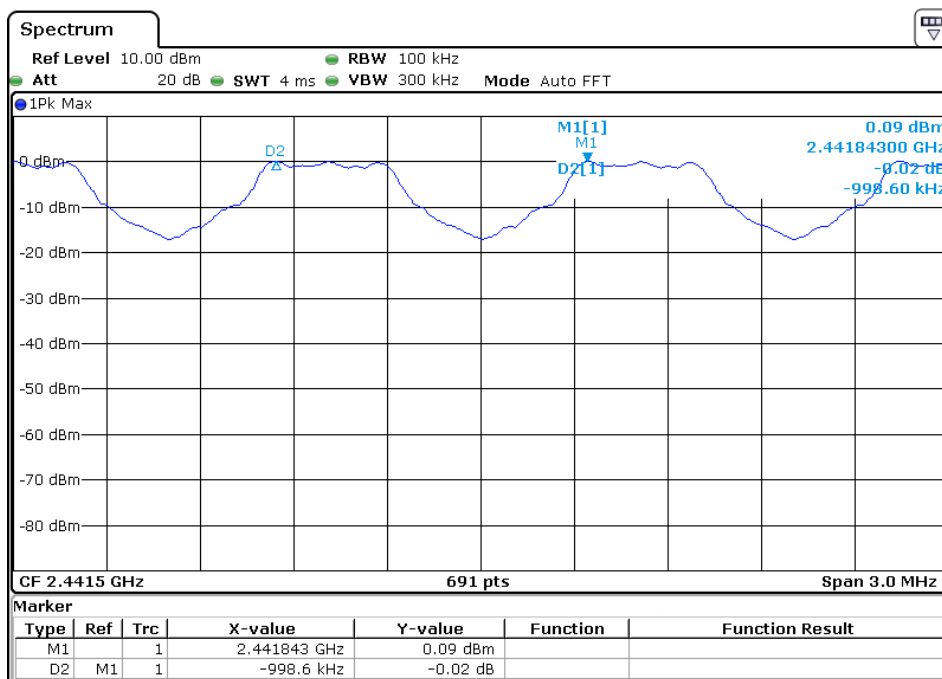


## CH 78-1Mbps

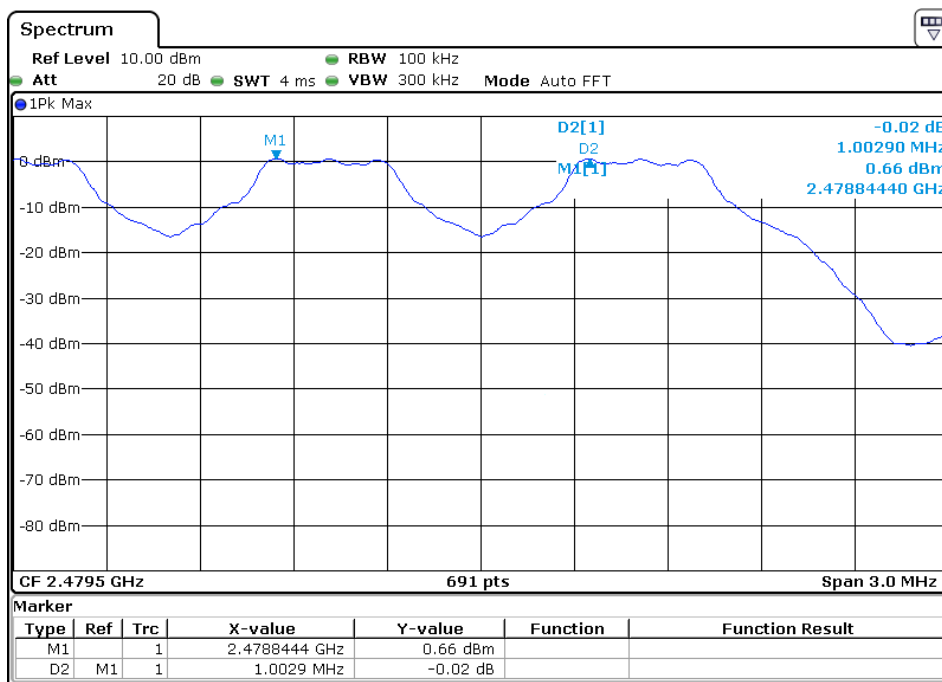


## CH00 -3Mbps

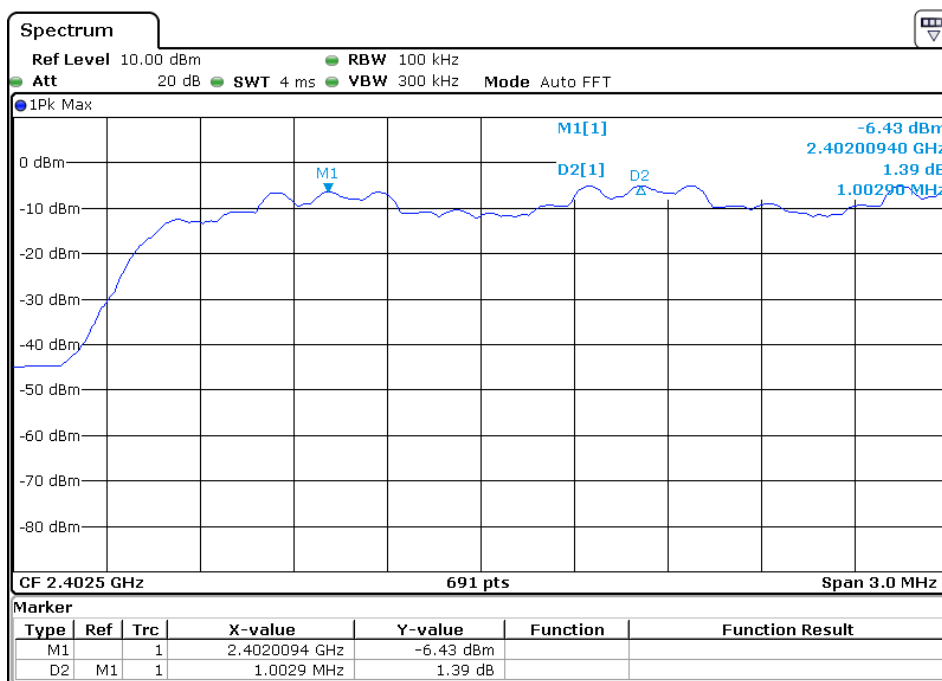

## CH39 -3Mbps

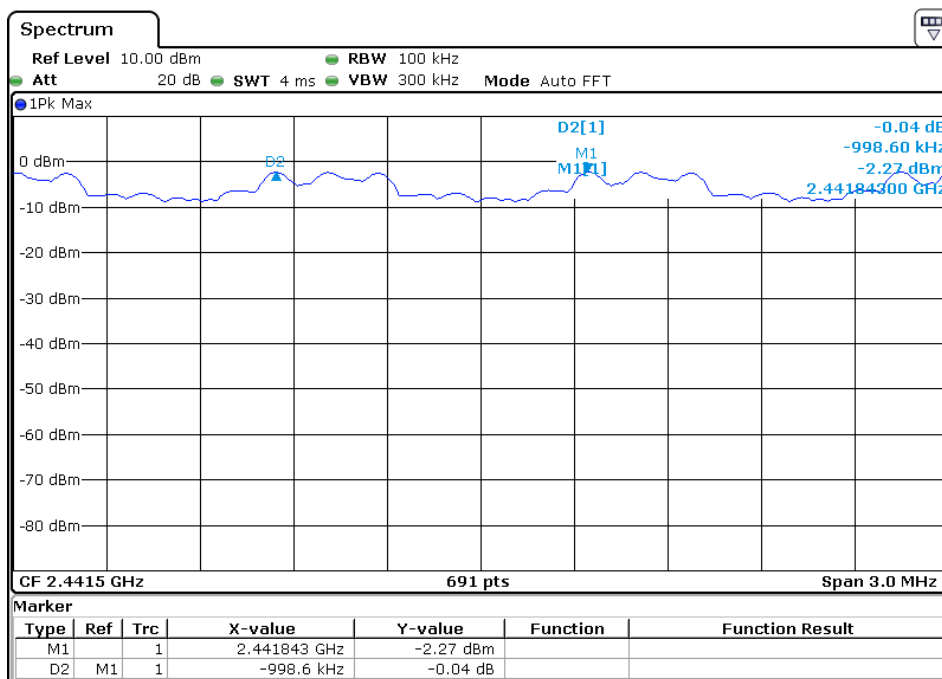

## CH78 -3Mbps

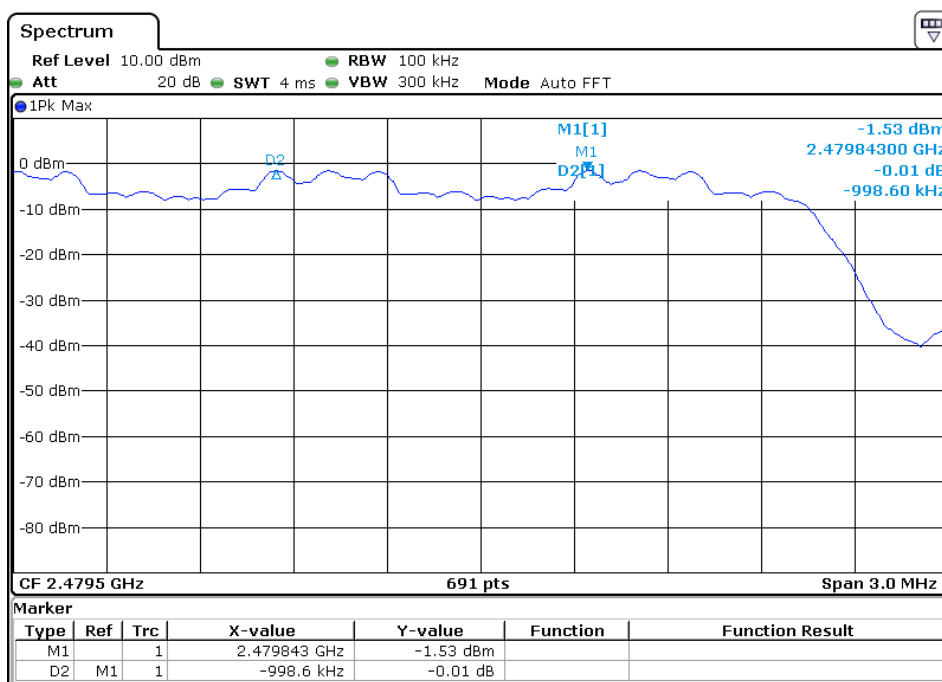

Test result: The unit does meet the FCC requirements.

## 5.6 Hopping Channel Number

### 5.6.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


### 5.6.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as RBW=100kHz,VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak Trace=Maxhold.
- (2) The EUT should be have its hopping function enabled. Maxhold and record hopping channels It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

### 5.6.3 Deviation from standard

No deviation.

### 5.6.4 Test setup

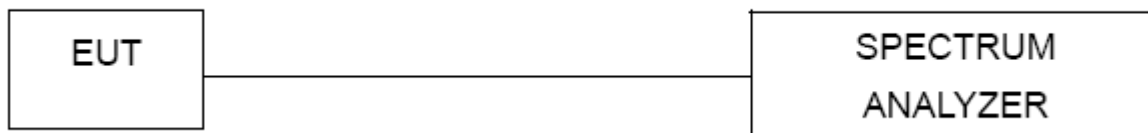


### 5.6.5 Test result


Hopping Channel Number result		
Operating Mode: 1Mbps\ 3Mbps Mode		Test date:2016-03-22
Result	Limit	Conclusion
79	15	Pass

EUT:	Home audio system	Model Name :	BT-202
Temperature:	22 °C	Relative Humidity:	53%
Pressure:	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX 1Mbps/ 3Mbps		

1Mbps

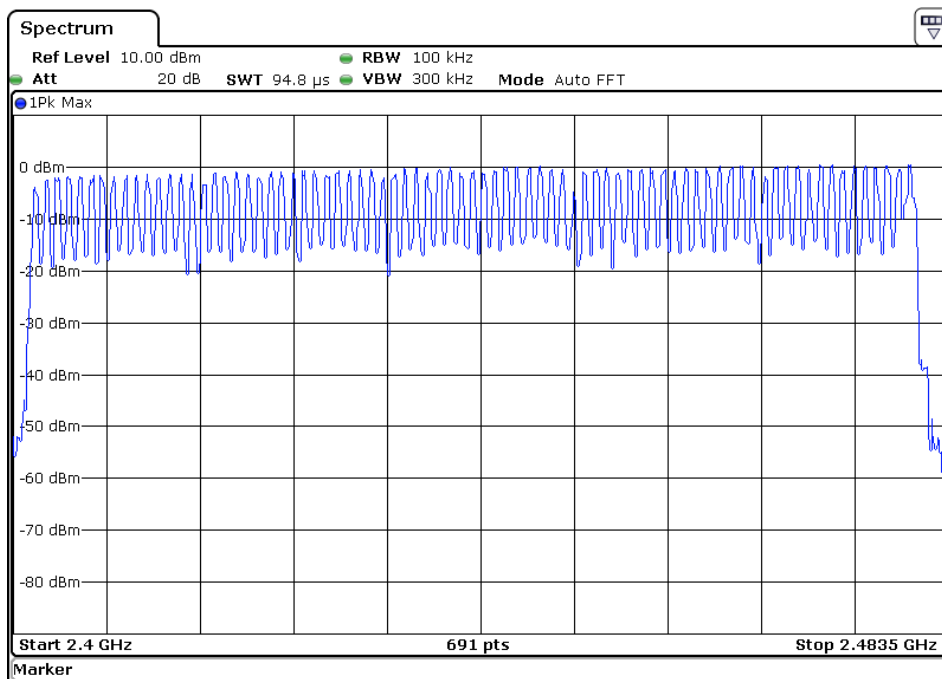

3Mbps

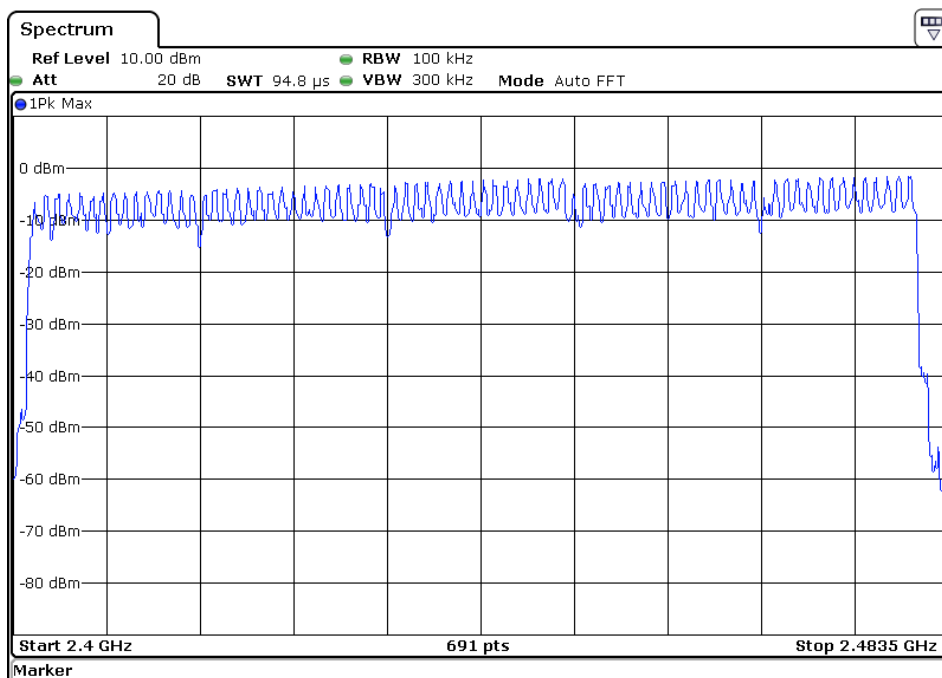

**Test result: The unit does meet the FCC requirements.**



## 5.7 Dwell time

### 5.7.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


### 5.7.2 Test procedure

- (1) Place the EUT on the table in the chamber or connect the antenna port of the EUT to spectrum analyzer and set it in transmitting mode.
- (2) Set RBW of spectrum analyzer to 1MHz, VBW  $\geq$  RBW
- (3) Use a video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for DH5, DH3 and DH1 packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) A Period Time =  $79 \times 0.4 = 31.6$  S  
DH1 Time Slot: Reading \*  $(1600/2) \times 31.6/79$   
DH3 Time Slot: Reading \*  $(1600/4) \times 31.6/79$   
DH5 Time Slot: Reading \*  $(1600/6) \times 31.6/79$

### 5.7.3 Deviation from standard

No deviation.


### 5.7.4 TEST SETUP

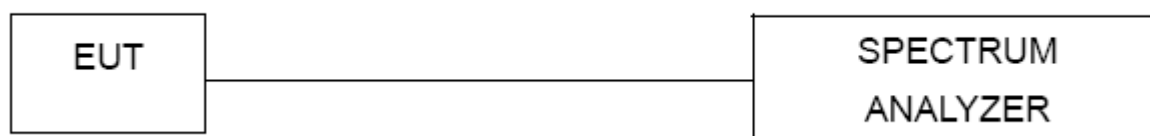


### 5.7.5 Test result

EUT:	Home audio system	Model Name :	BT-202
Temperature:	26 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH0-DH1/DH3/DH5 (1Mbps Mode)		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH1	2402 MHz	0.441	0.1411	0.4000
DH3	2402 MHz	1.699	0.2718	0.4000
DH5	2402 MHz	2.945	0.3141	0.4000

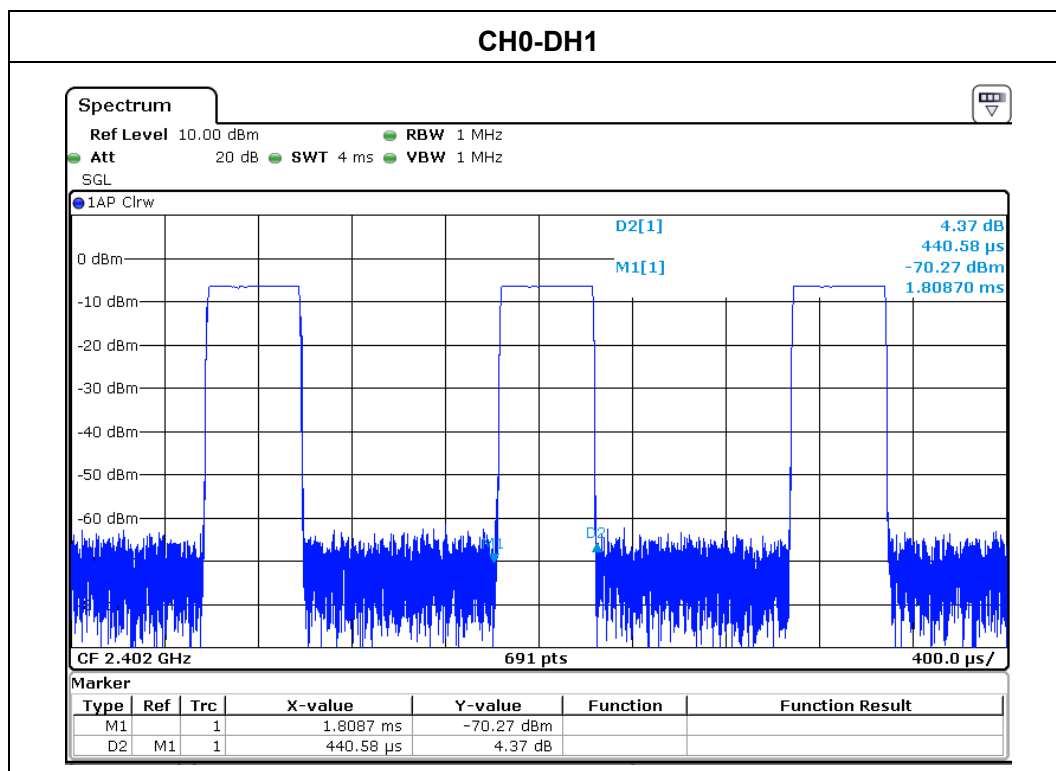

## CH0-DH3

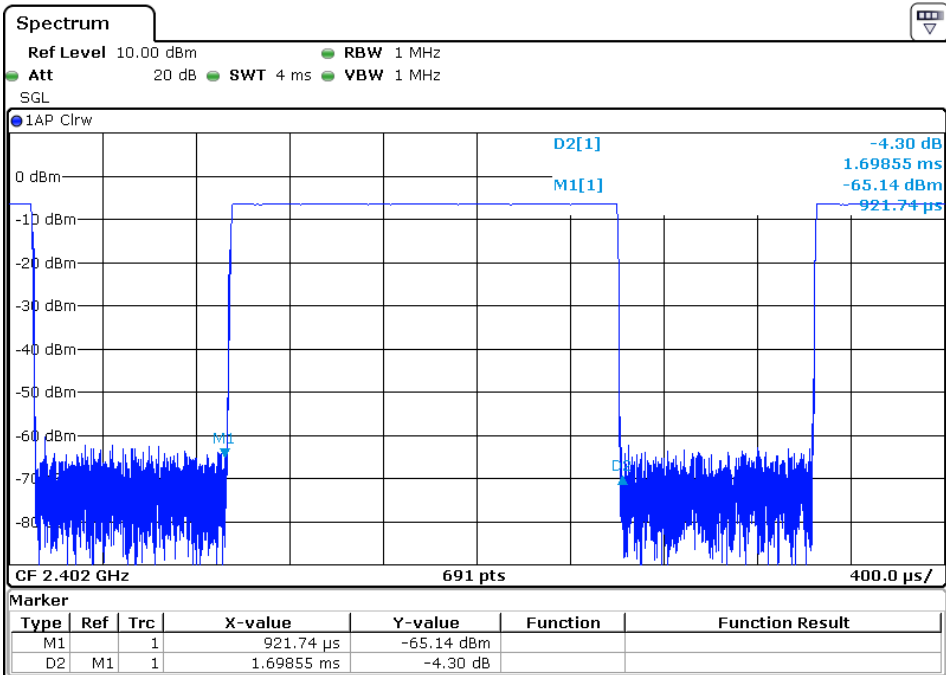


## CH0-DH5

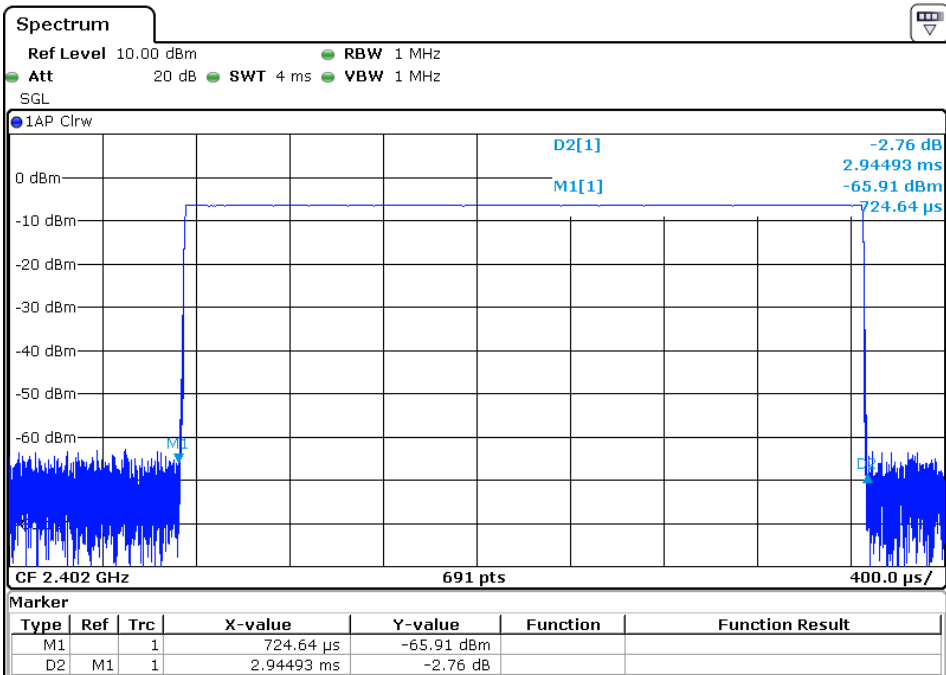


EUT:	Home audio system	Model Name :	BT-202
Temperature:	26 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH0-3DH1/3DH3/3DH5 (3Mbps Mode)		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH1	2402 MHz	0.458	0.1466	0.4000
DH3	2402 MHz	1.704	0.2726	0.4000
DH5	2402 MHz	2.957	0.3154	0.4000

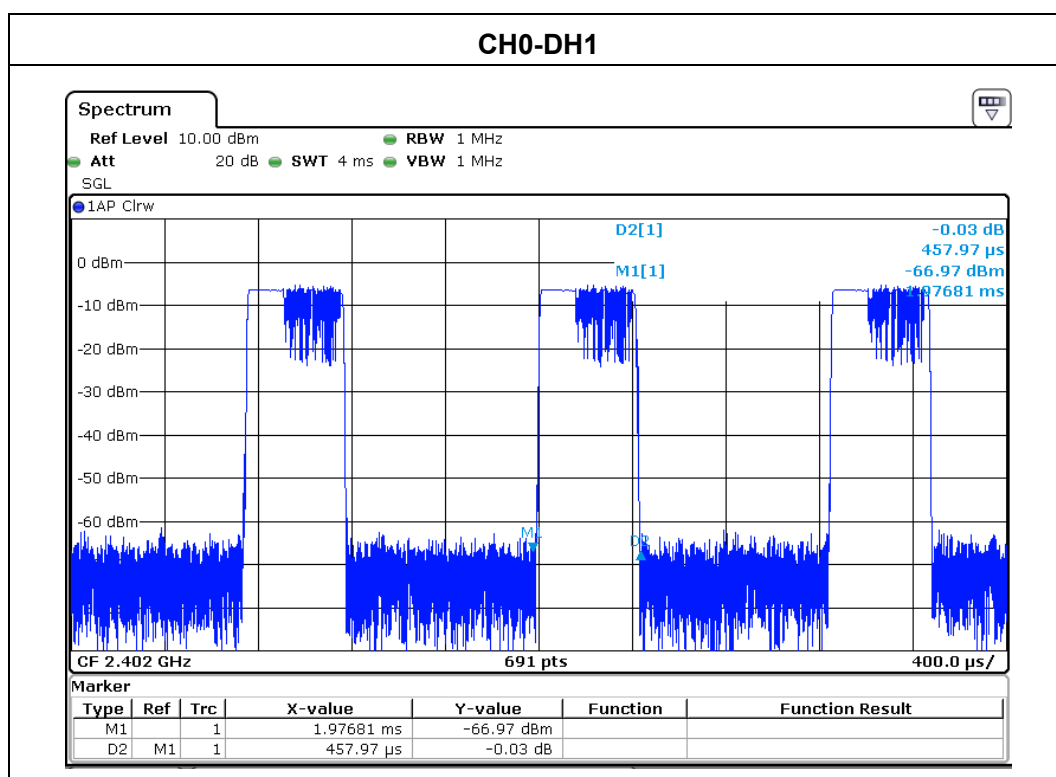

## CH0-DH3

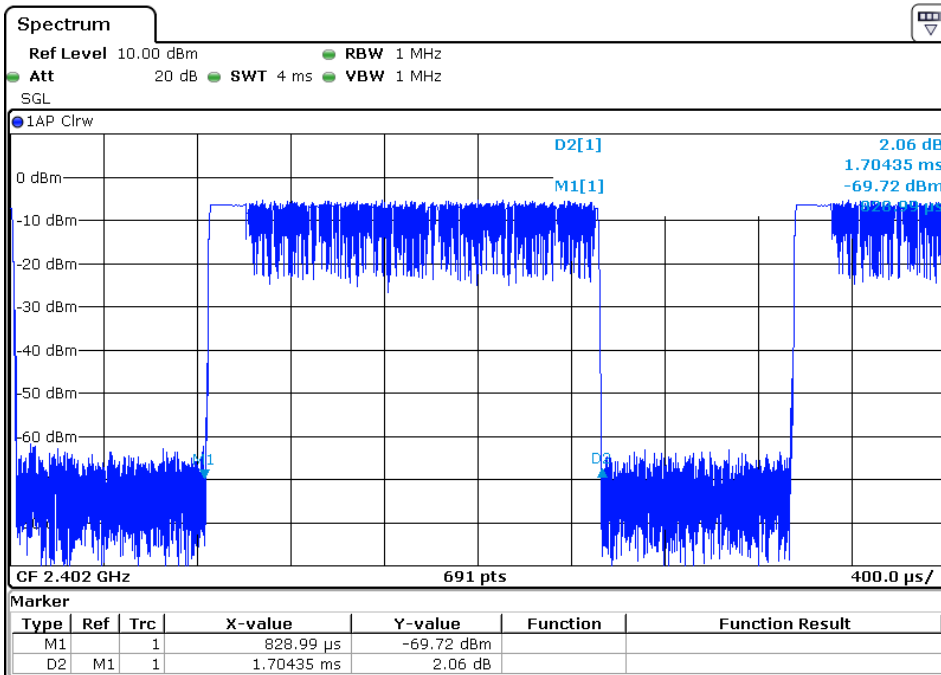

## CH0-DH5

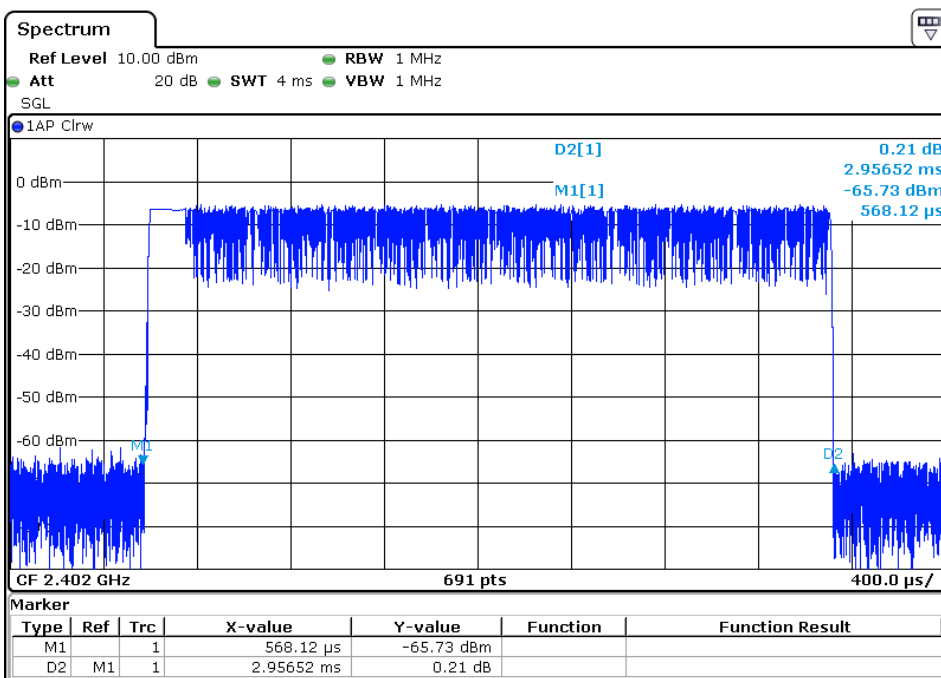

## 5.8 Maximum Peak Output Power

### 5.8.1 Applied procedures / Limit

5.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

15.247(b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


### 5.8.2 Test procedure

- (1) Connected the antenna port to the broadband peak RF power meter, Allow the transmitted power to stabilize, record the max peak value.
- (2) The EUT should be transmitting at its maximum data rate.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

### 5.8.3 Deviation from standard

No deviation.

### 5.8.4 Test setup

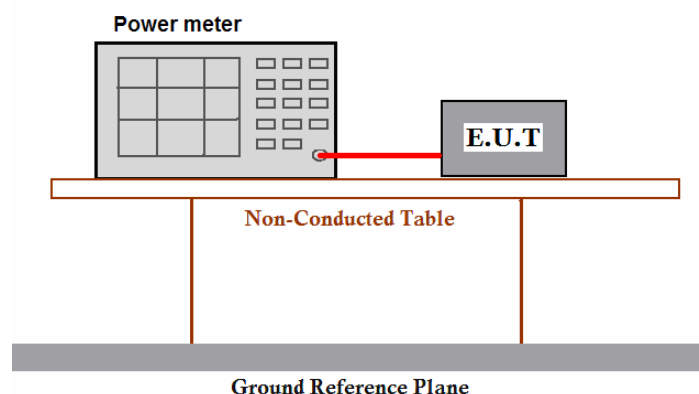

### 5.8.5 Test results

EUT:	Home audio system	Model Name :	BT-202
Temperature:	22 °C	Relative Humidity:	60%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX		
Note: All the data rates have be tested and the worst-case as the table below.			

<b>Test Result:</b>				
<b>Normal mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	-2.30	30.0	Pass
Middle	2441	0.40	30.0	Pass
Highest	2480	1.00	30.0	Pass
<b>3EDR mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	-4.32	21.0	Pass
Middle	2441	-0.75	21.0	Pass
Highest	2480	-0.08	21.0	Pass
<b>Test result: The unit does meet the FCC requirements.</b>				

## 5.9 Band edge

### 5.9.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


### 5.9.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation, RBW  $\geq$  1% of the span, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold

### 5.9.3 Deviation from standard

No deviation.


### 5.9.4 Test setup

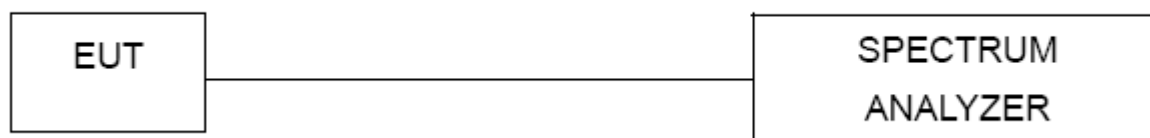




## 5.9.5 Test results


## CH00 (Lower) Data rate 1Mbps

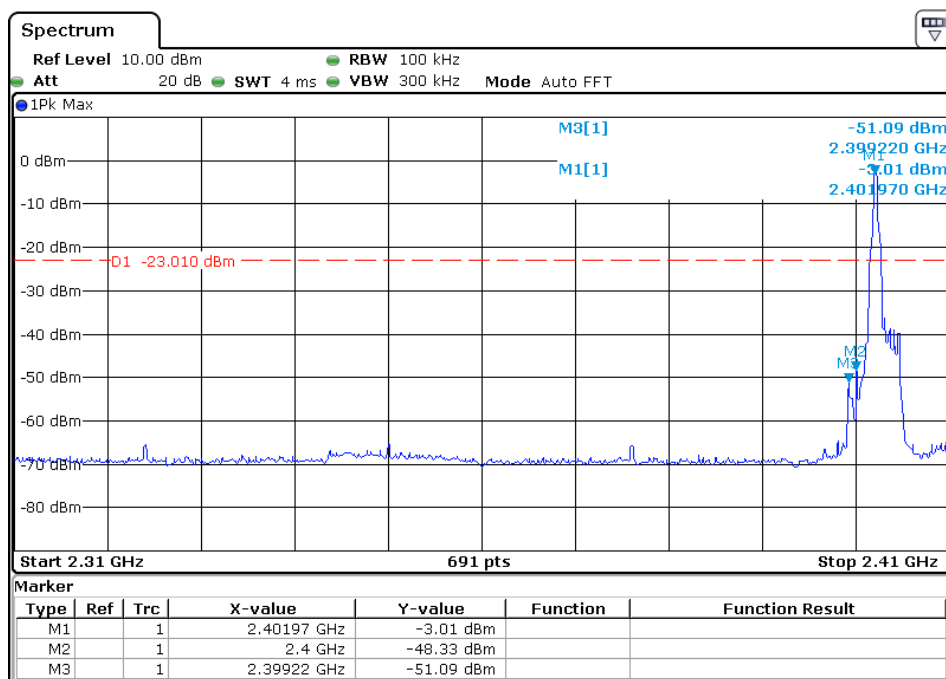


## CH 78 (Upper) Data rate 1Mbps

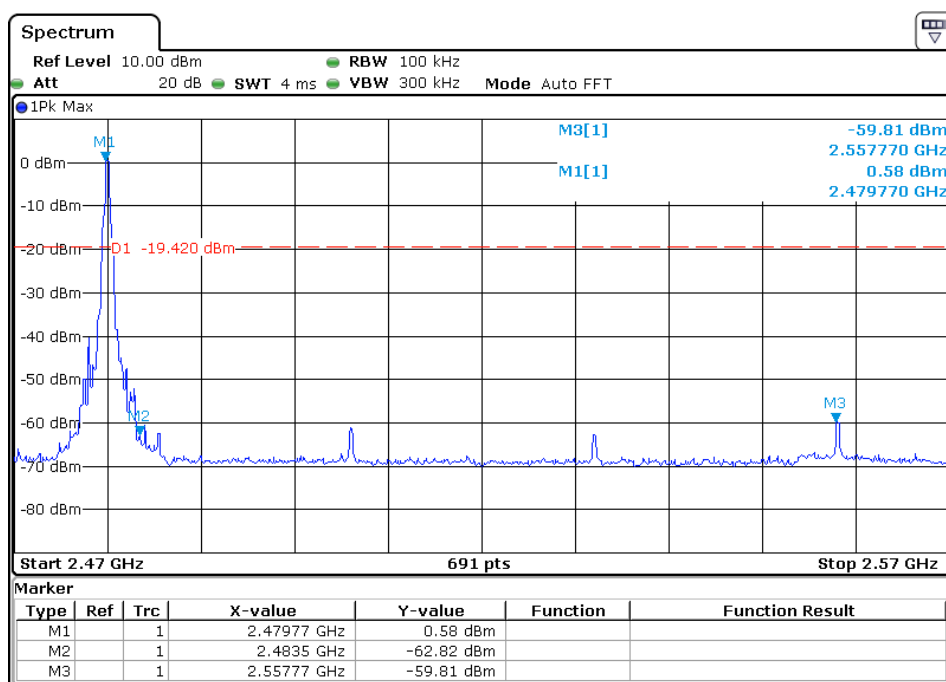


## CH00 (Lower) Data rate 3Mbps

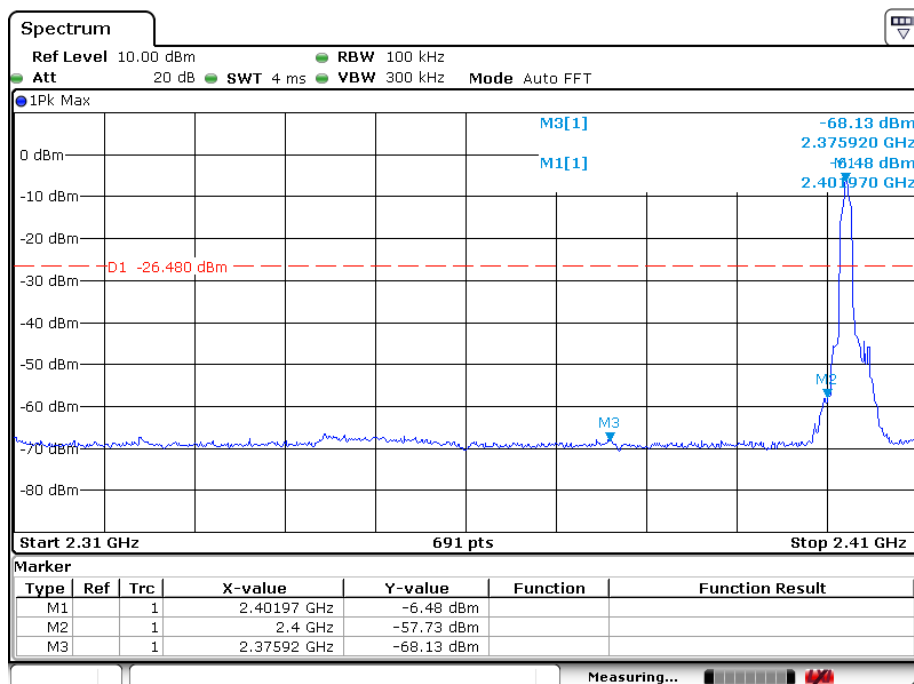


## CH 78 (Upper) Data rate 3Mbps

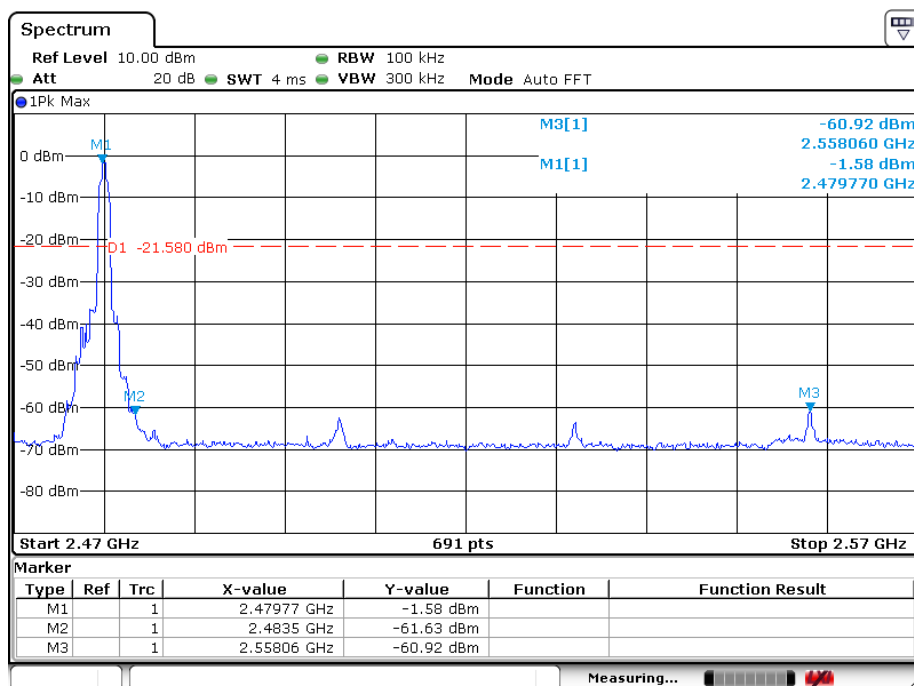


## CH00 (Lower) Data rate 1Mbps

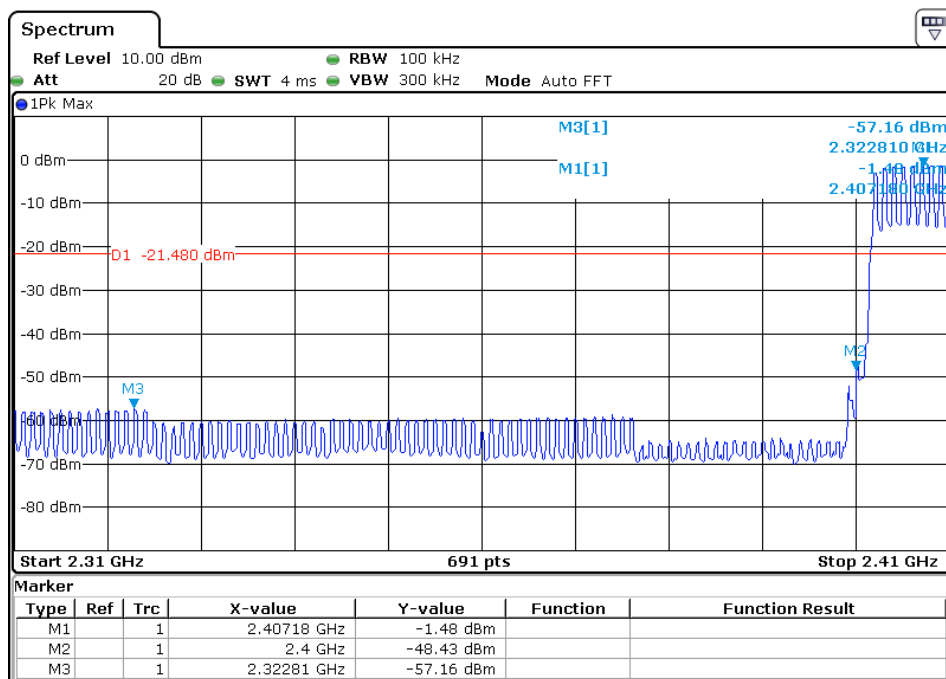


## CH 78 (Upper) Data rate 1Mbps

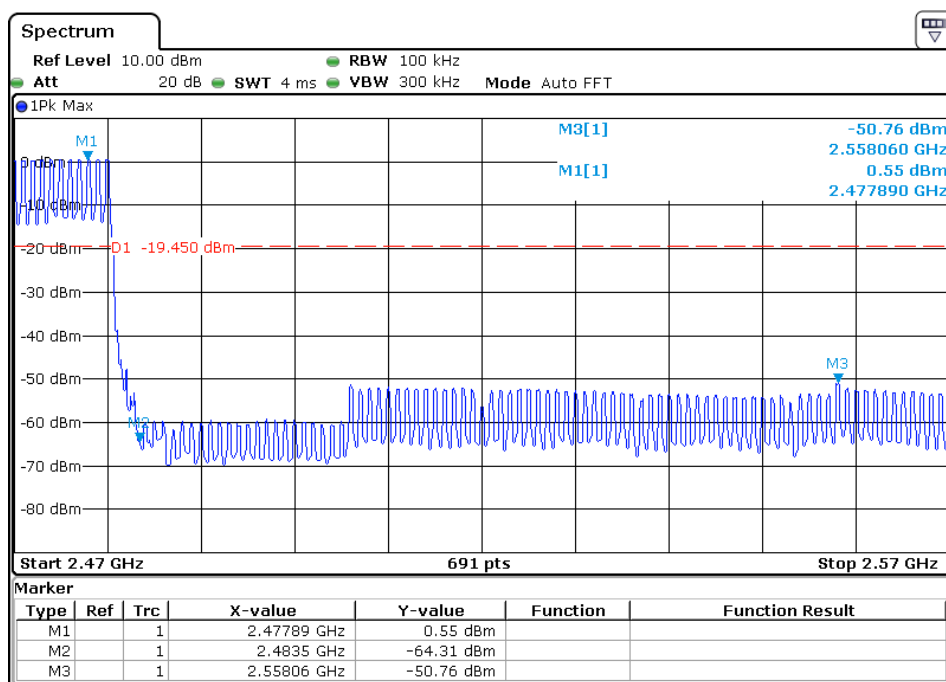

## CH00 (Lower) Data rate 3Mbps

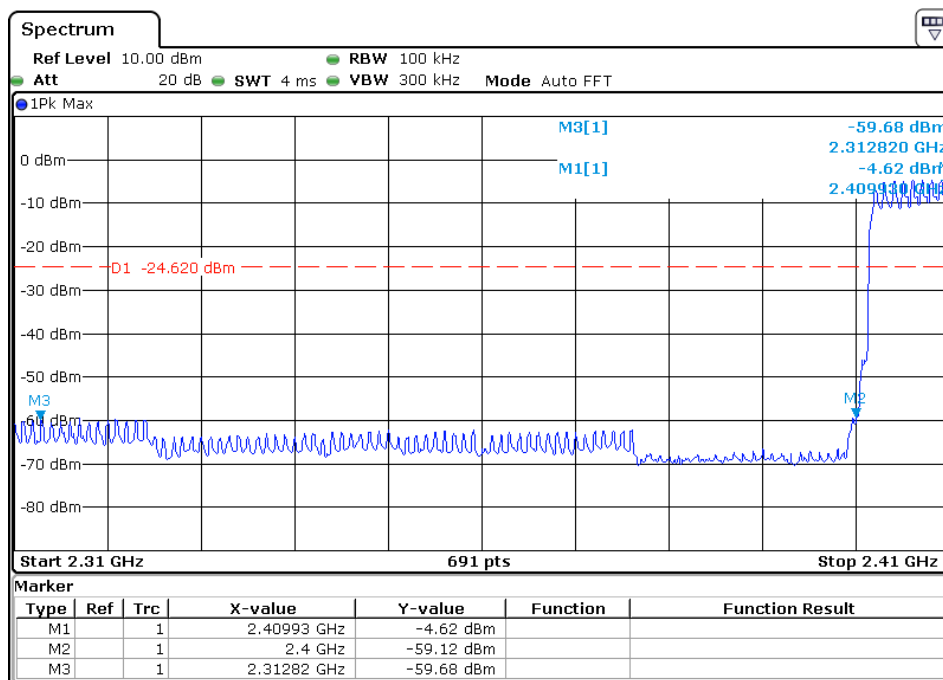

## CH 78 (Upper) Data rate 3Mbps

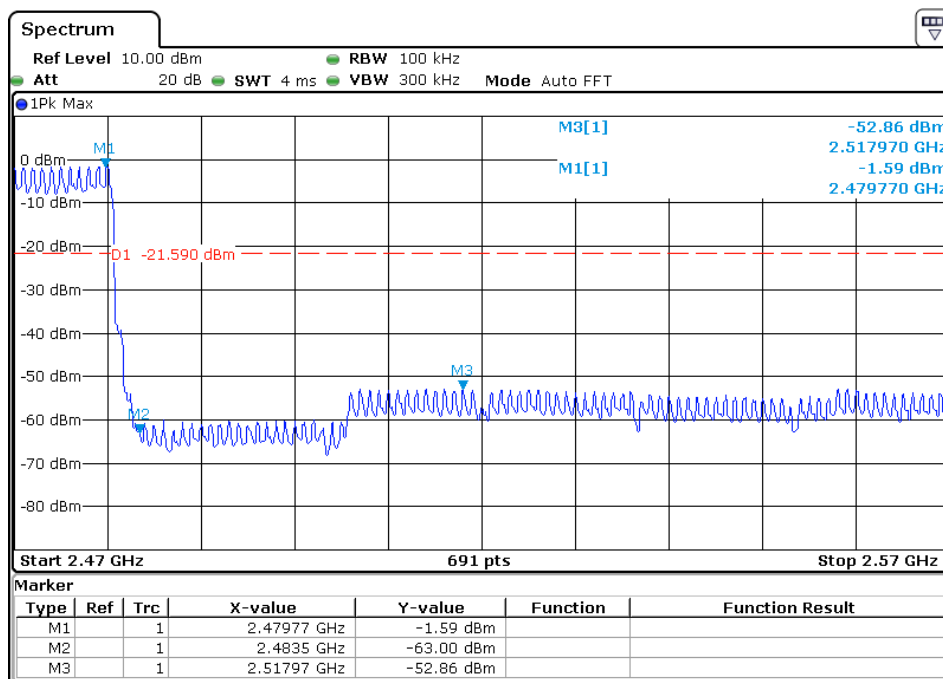

## 5.10 Conducted Spurious Emissions

### 5.10.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


### 5.10.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span. RBW = 100 kHz  
VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold  
sweep points  $\geq$  investigated frequency range/RBW.

### 5.10.3 Deviation from standard


No deviation.

### 5.10.4 Test setup

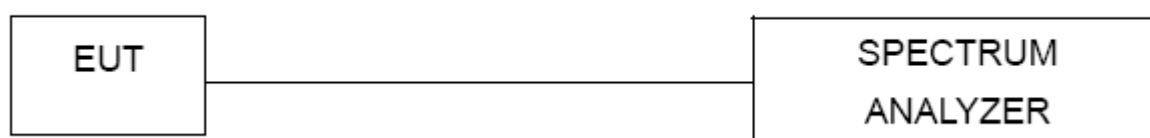


## 5.10.5 Test results


## CH00 Data rate 1Mbps 30MHz to 25GHz

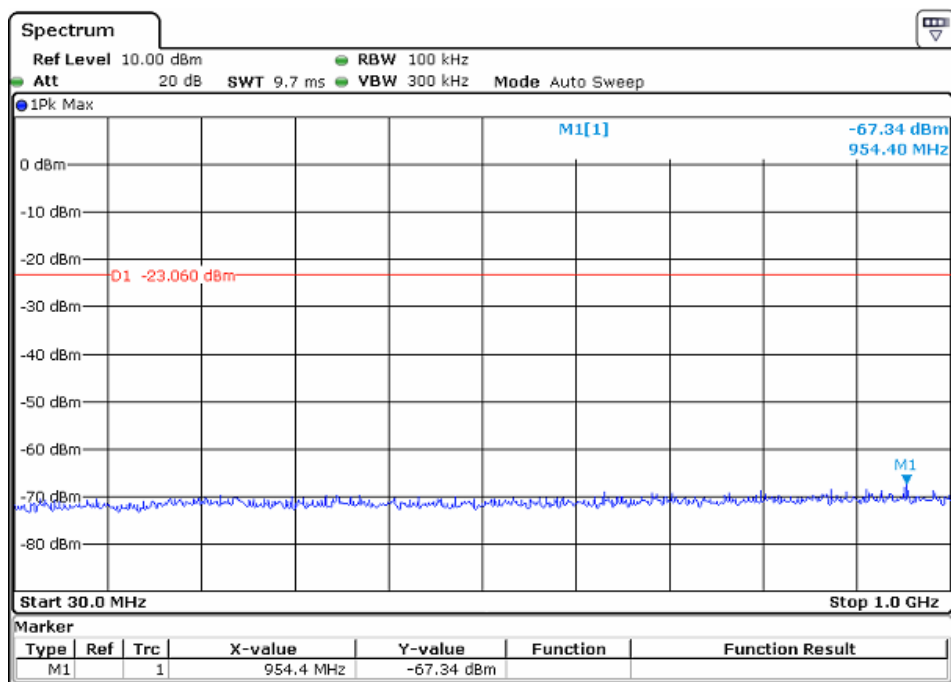


Note: Sweep Points=9700

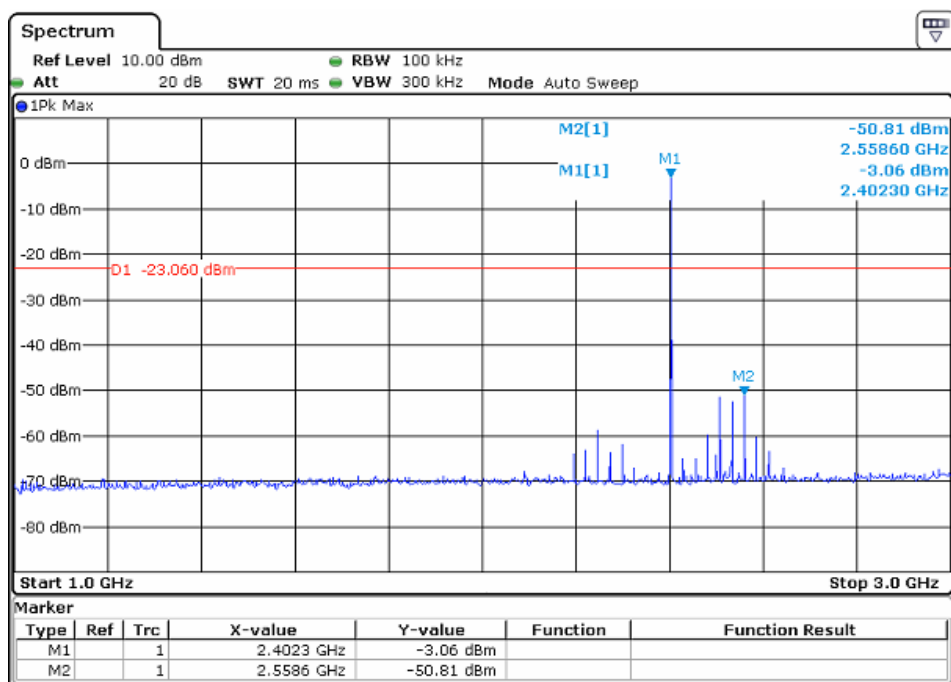

Note: Sweep Points=20000

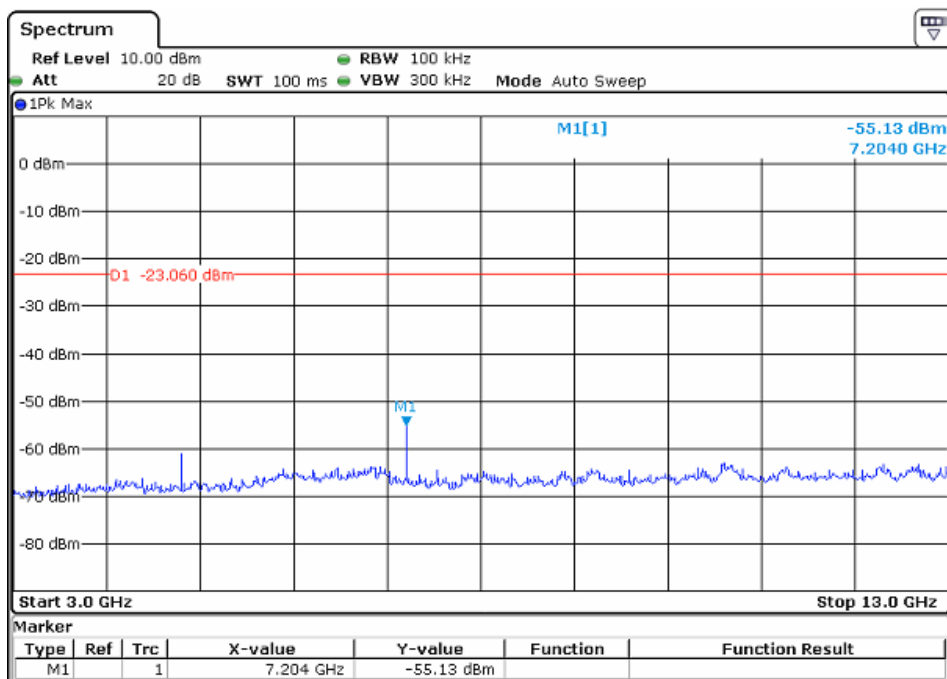


Note: Sweep Points=100000

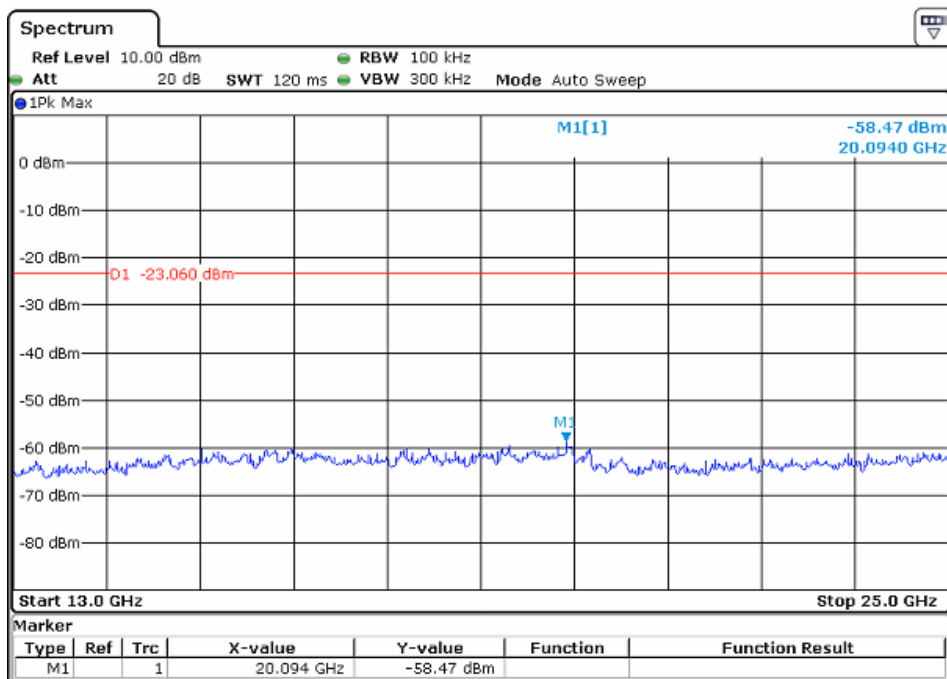


Note: Sweep Points=120000

## CH39 Data rate 1Mbps 30MHz to 25GHz

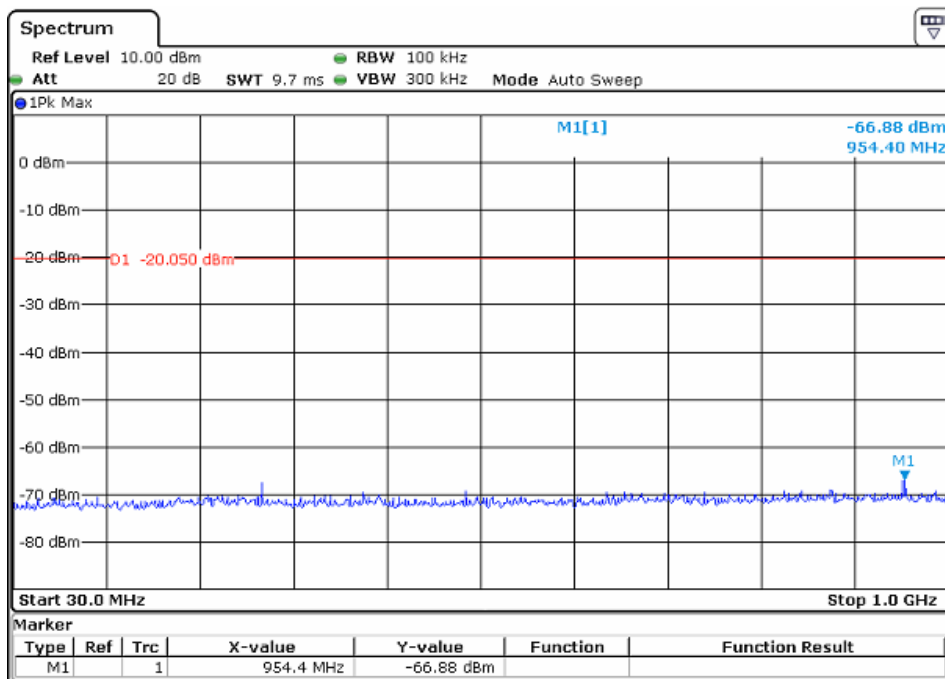


Note: Sweep Points=9700

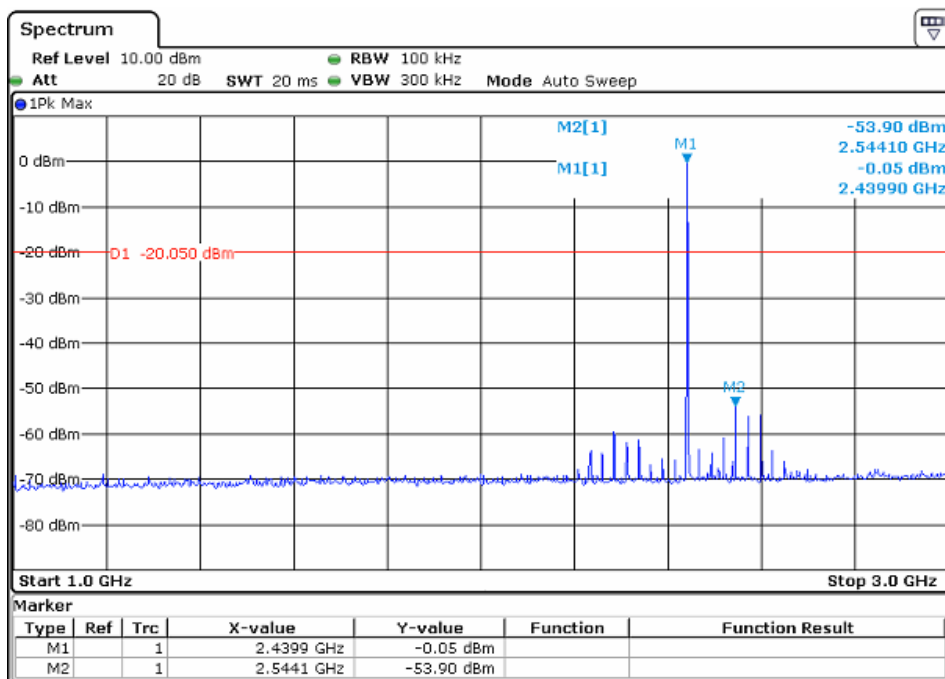


Note: Sweep Points=20000



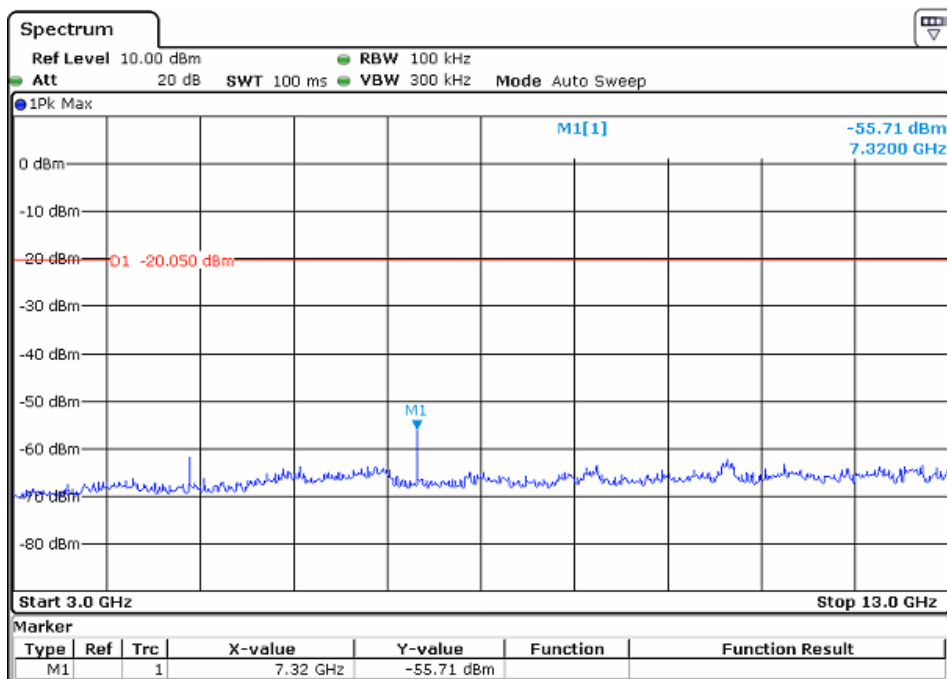


Note: Sweep Points=100000

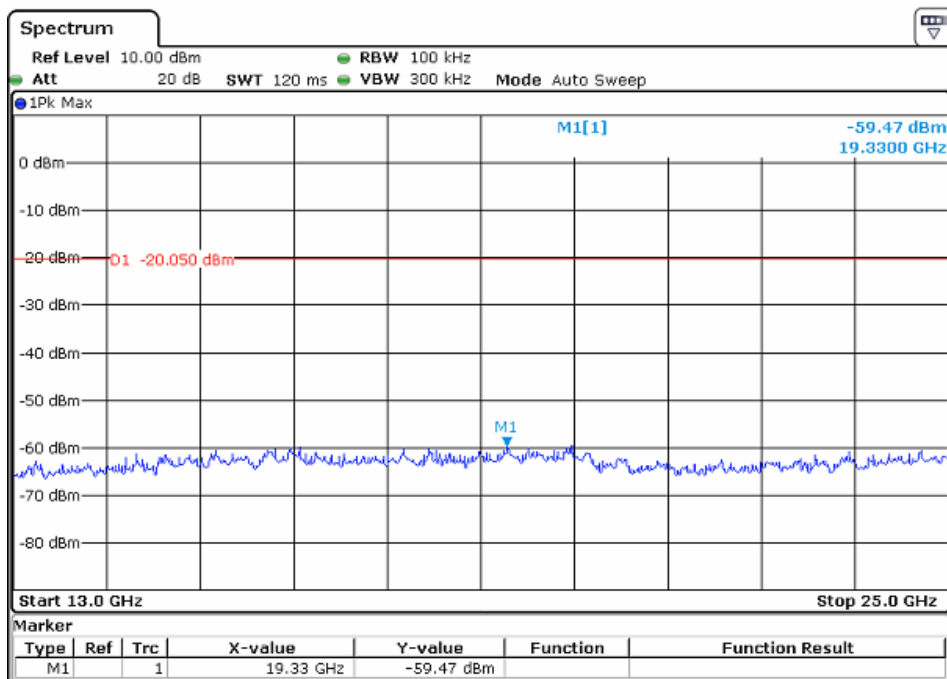


Note: Sweep Points=120000


## CH78 Data rate 1Mbps 30MHz to 25GHz

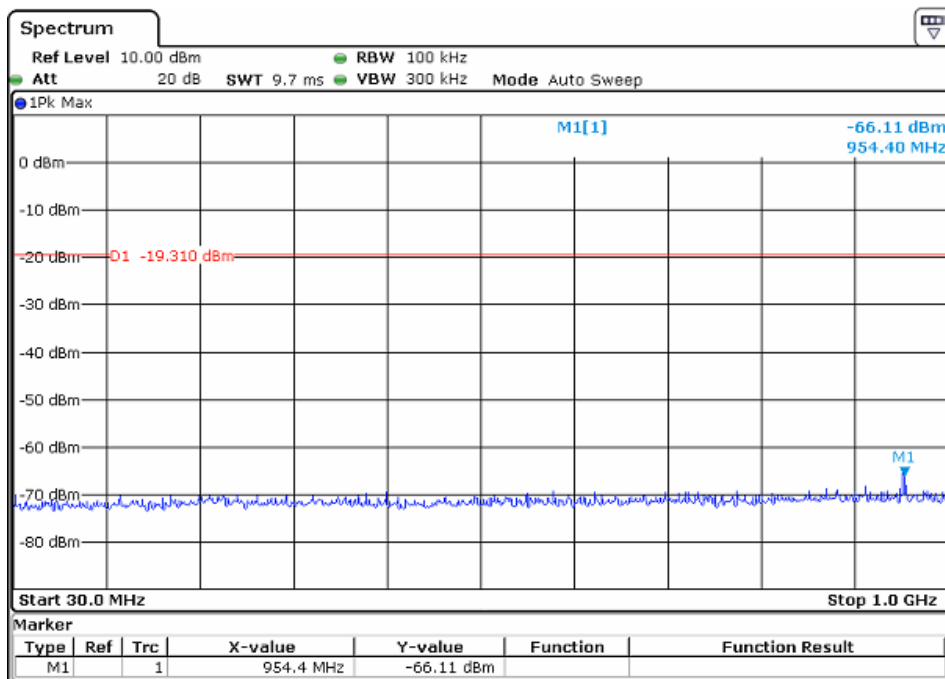


Note: Sweep Points=9700

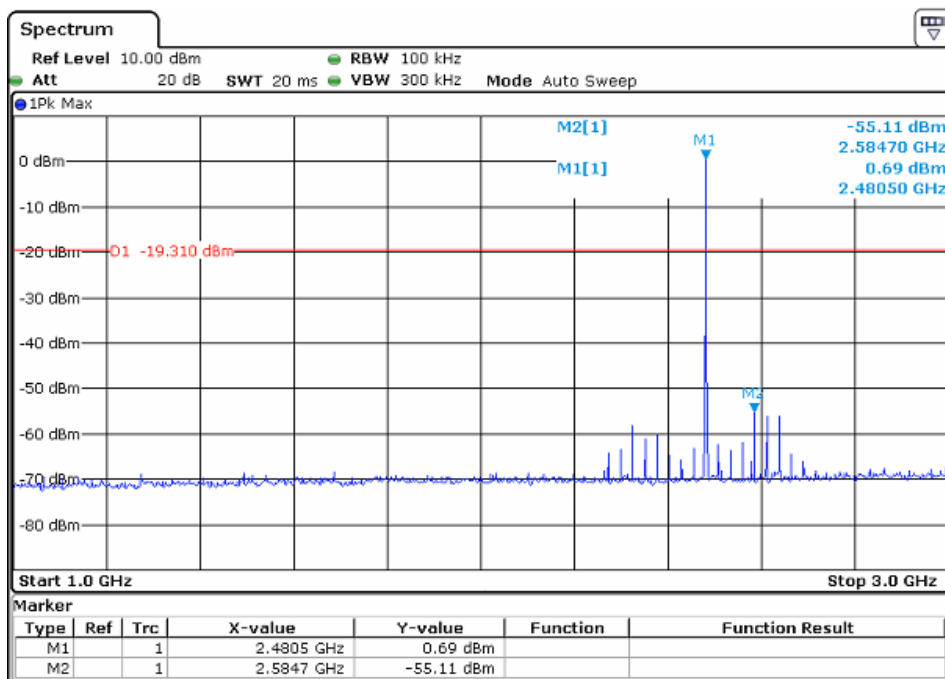

Note: Sweep Points=20000

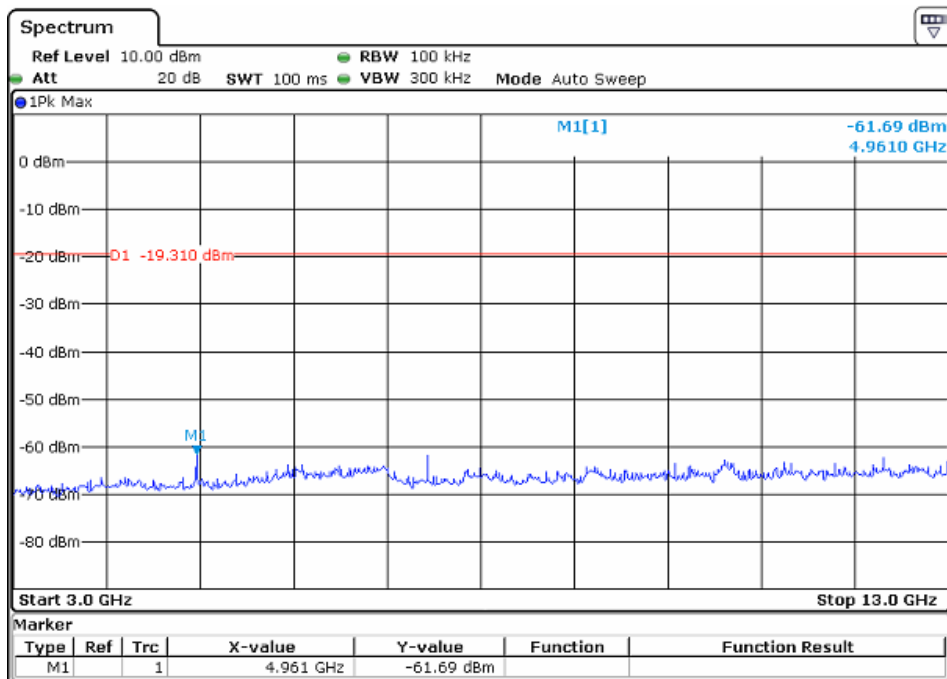


Note: Sweep Points=100000

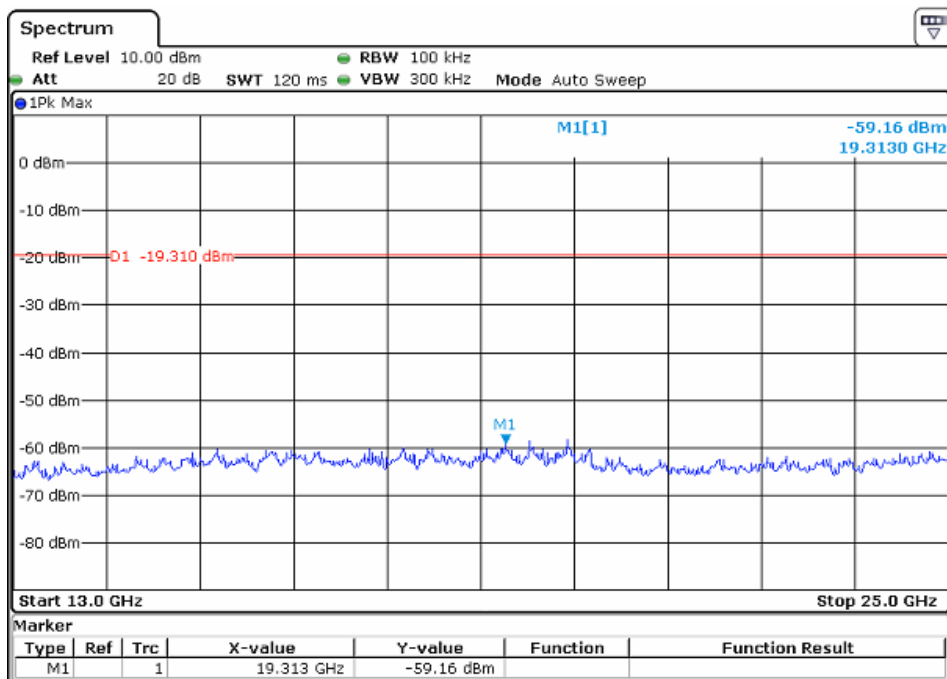


Note: Sweep Points=120000


## CH00 Data rate 3Mbps 30MHz to 25GHz

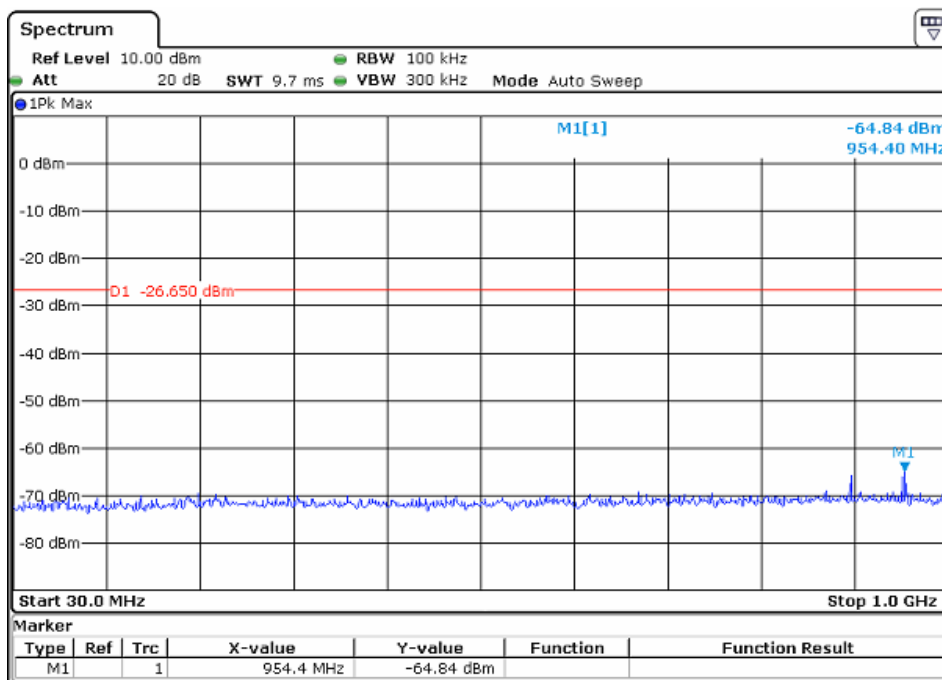


Note: Sweep Points=9700

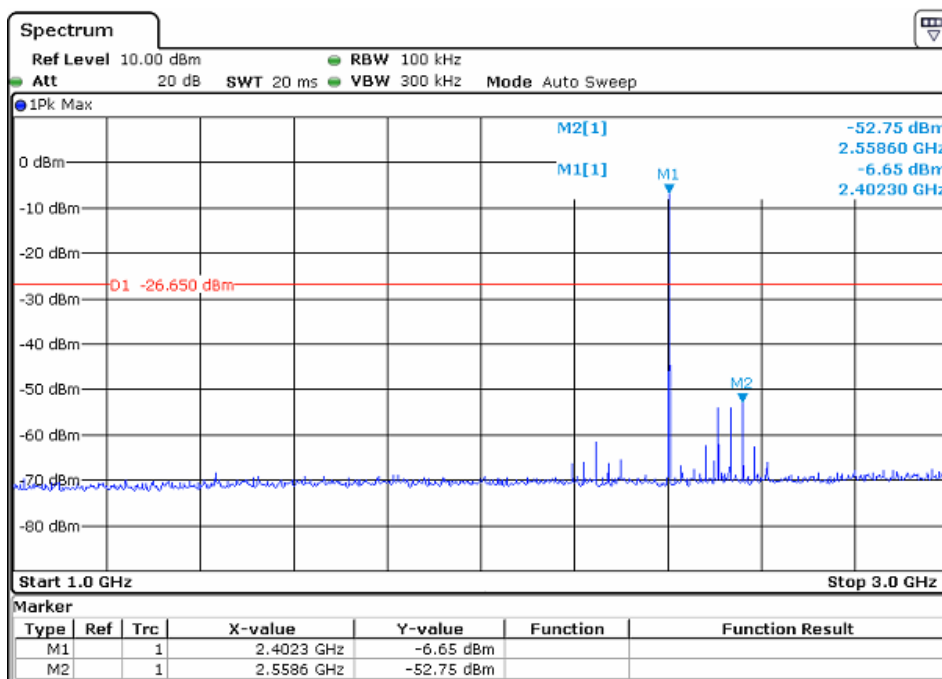

Note: Sweep Points=20000

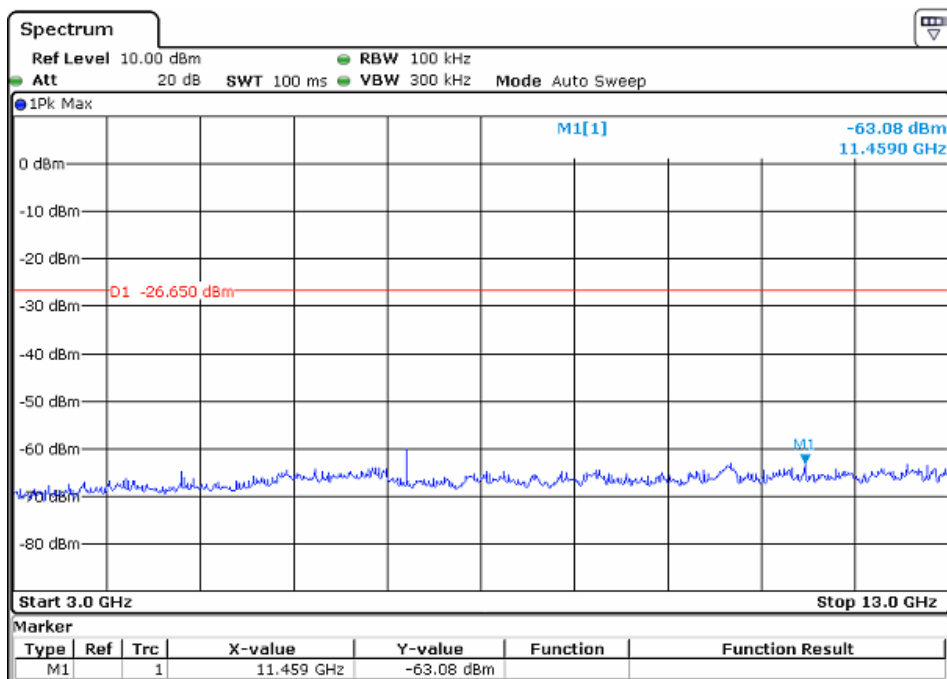


Note: Sweep Points=100000

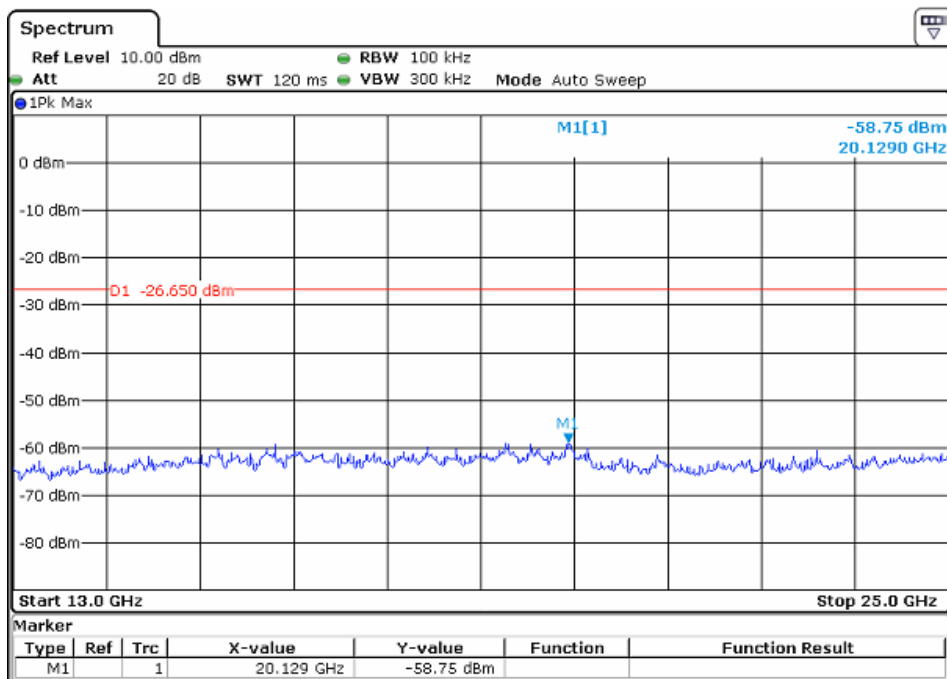


Note: Sweep Points=120000


## CH39 Data rate 3Mbps 30MHz to 25GHz

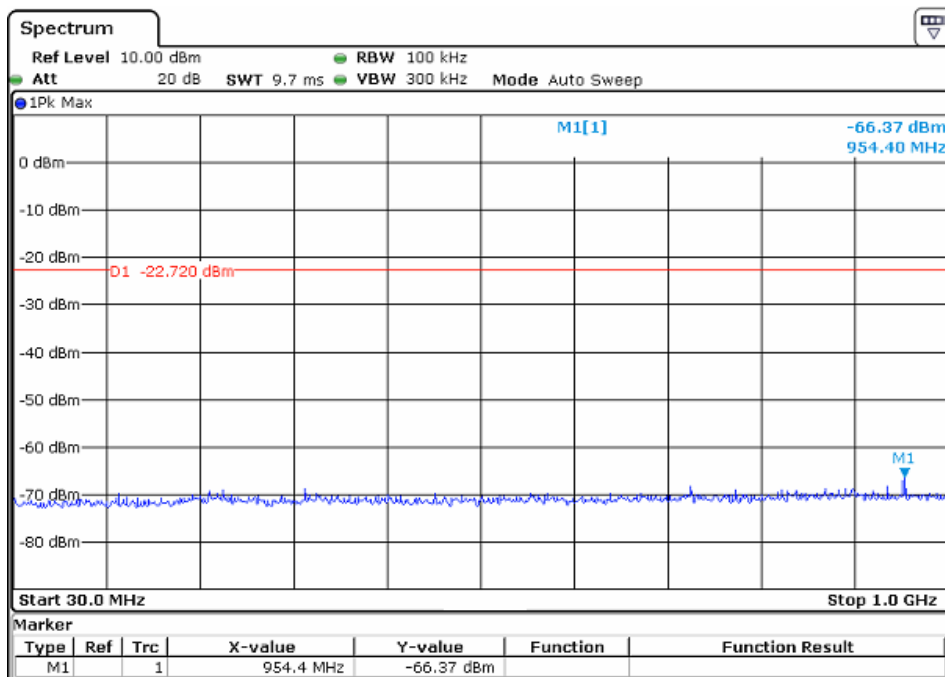


Note: Sweep Points=9700

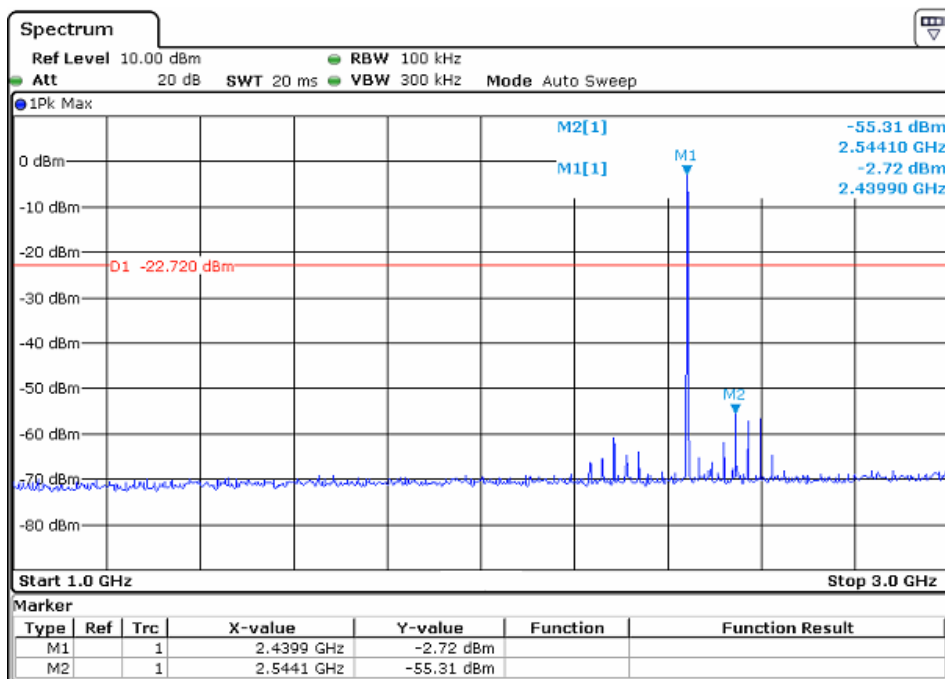

Note: Sweep Points=20000

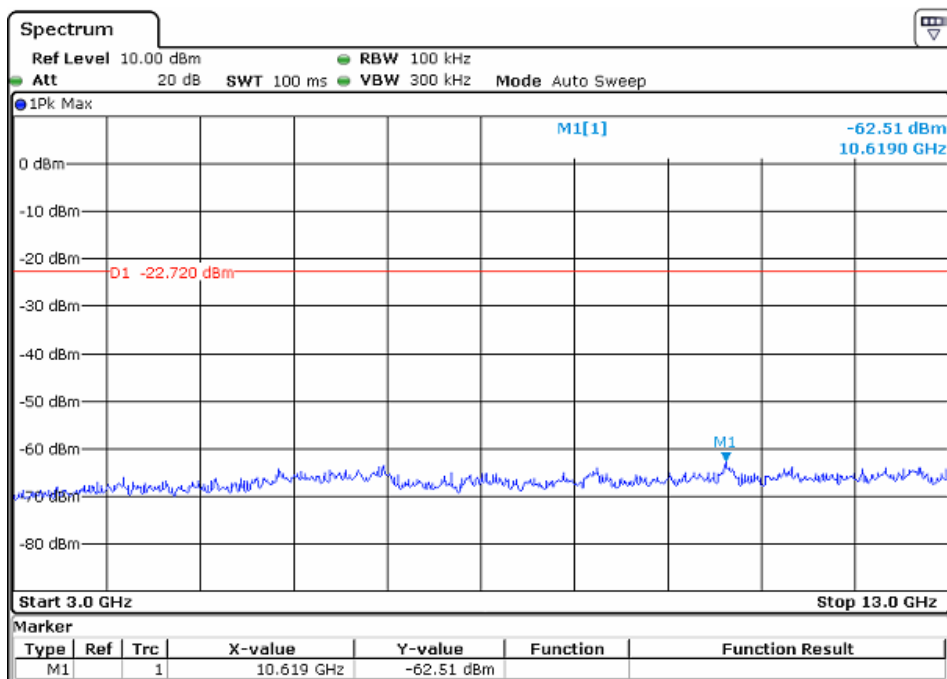


Note: Sweep Points=100000

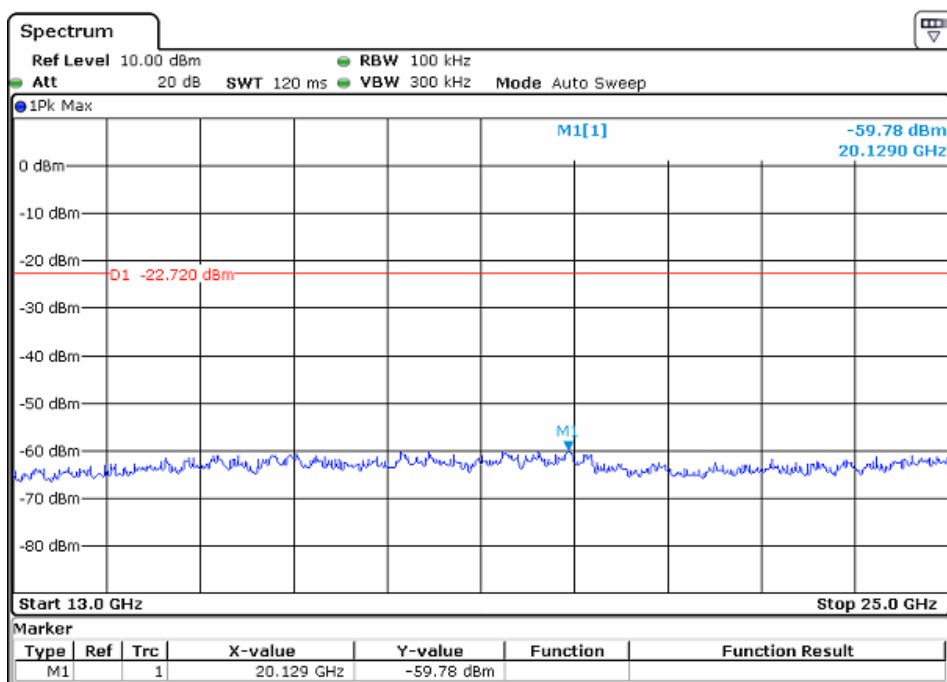


Note: Sweep Points=120000

## CH78 Data rate 3Mbps 30MHz to 25GHz

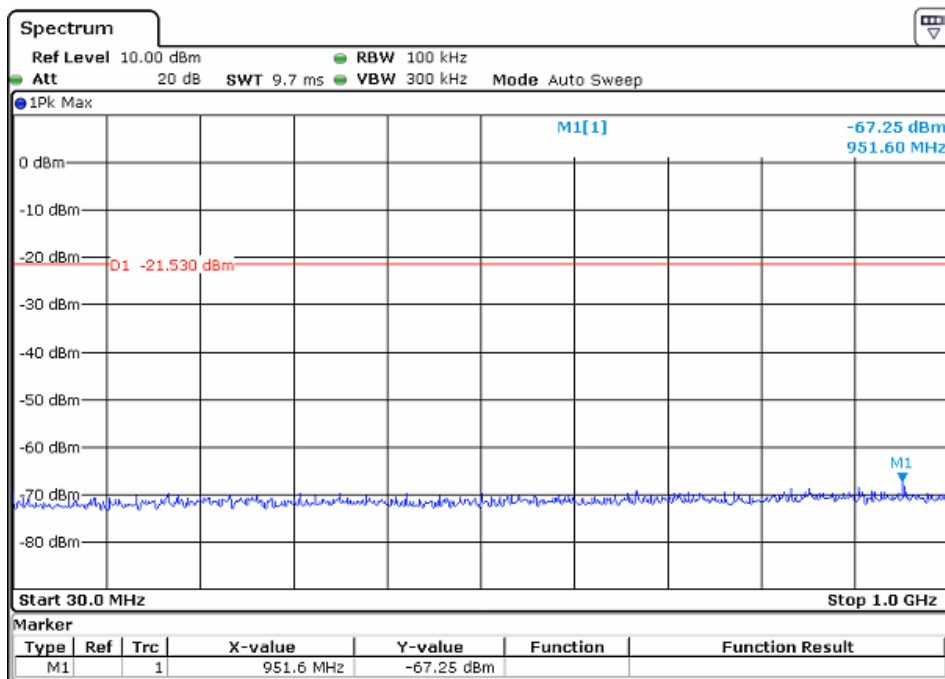


Note: Sweep Points=9700

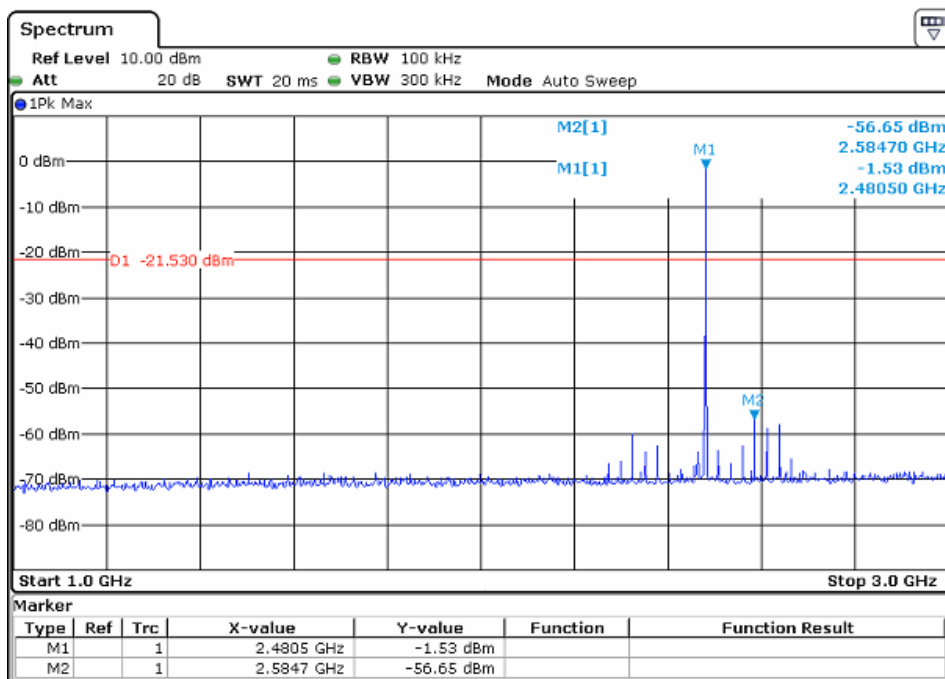


Note: Sweep Points=20000



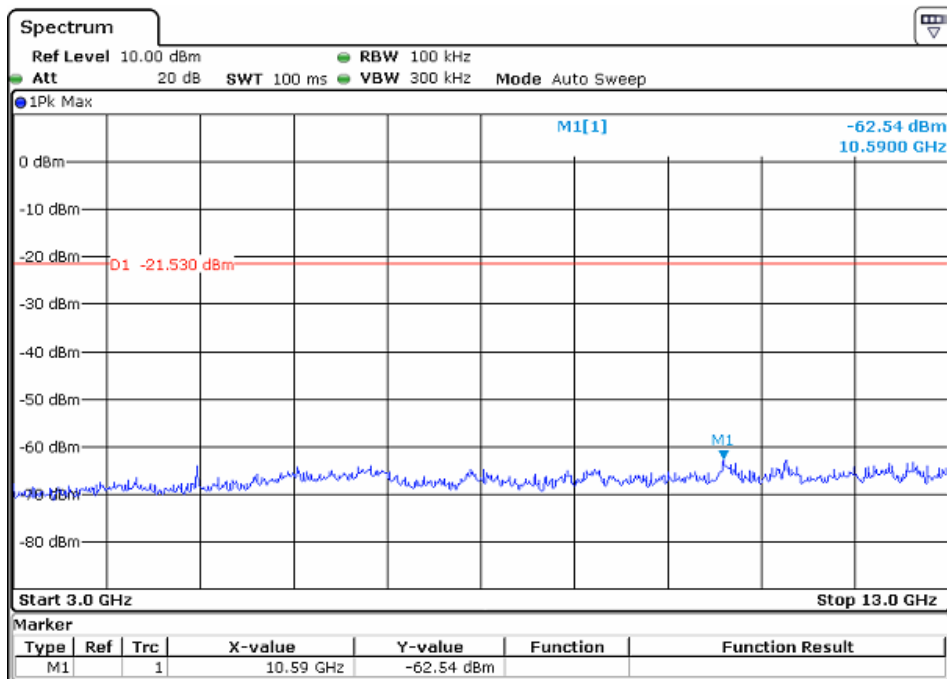

Note: Sweep Points=100000

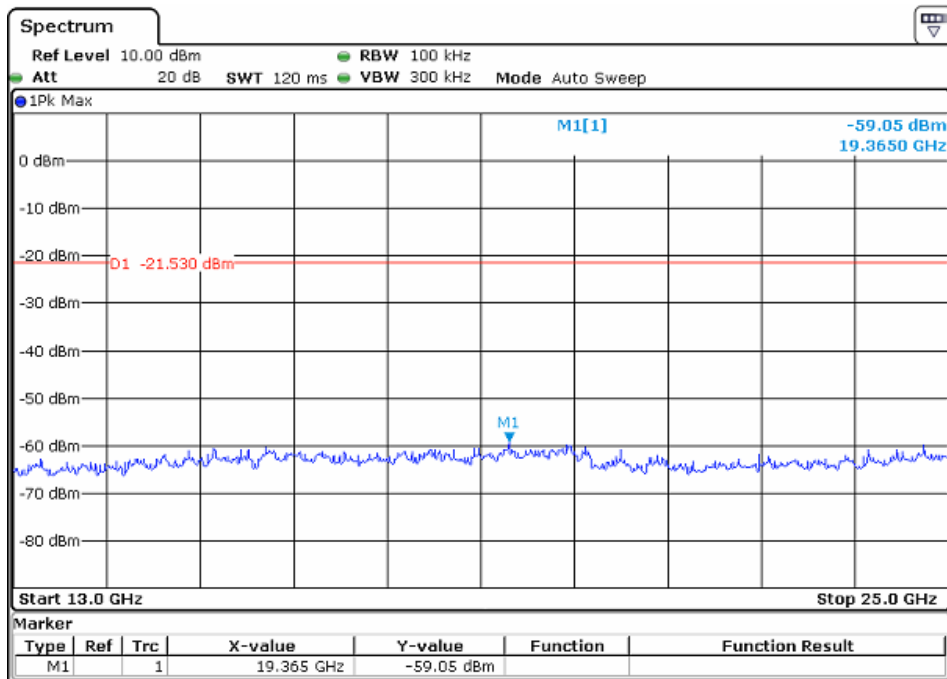


Note: Sweep Points=120000

## 6 Photographs


### 6.1 Conducted emissions Test Setup



### 6.2 Radiated spurious emissions Test Setup(below 1GHz)

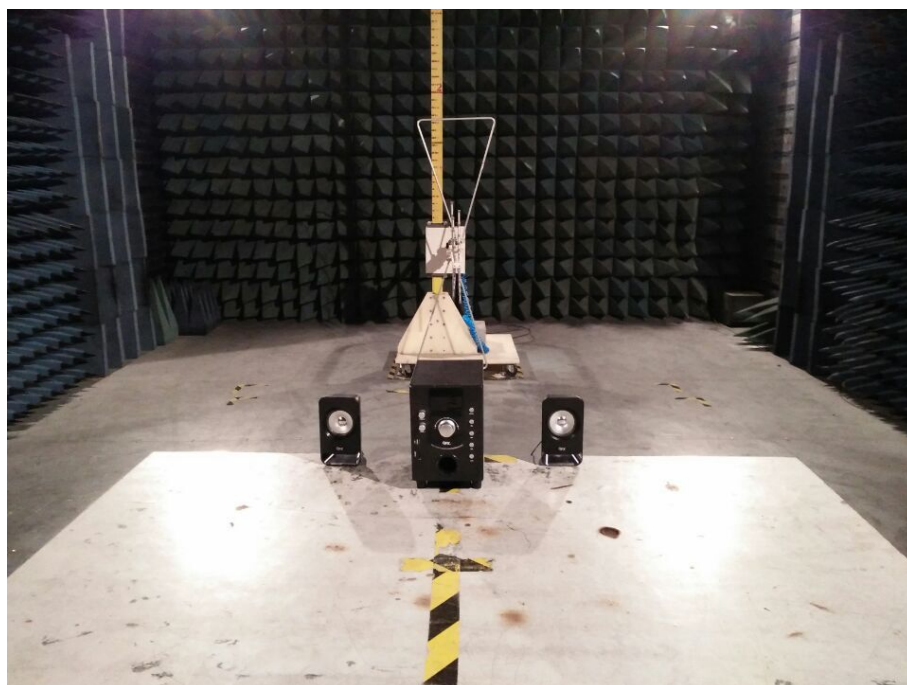

### 6.3 Radiated spurious emissions Test Setup(above 1GHz)

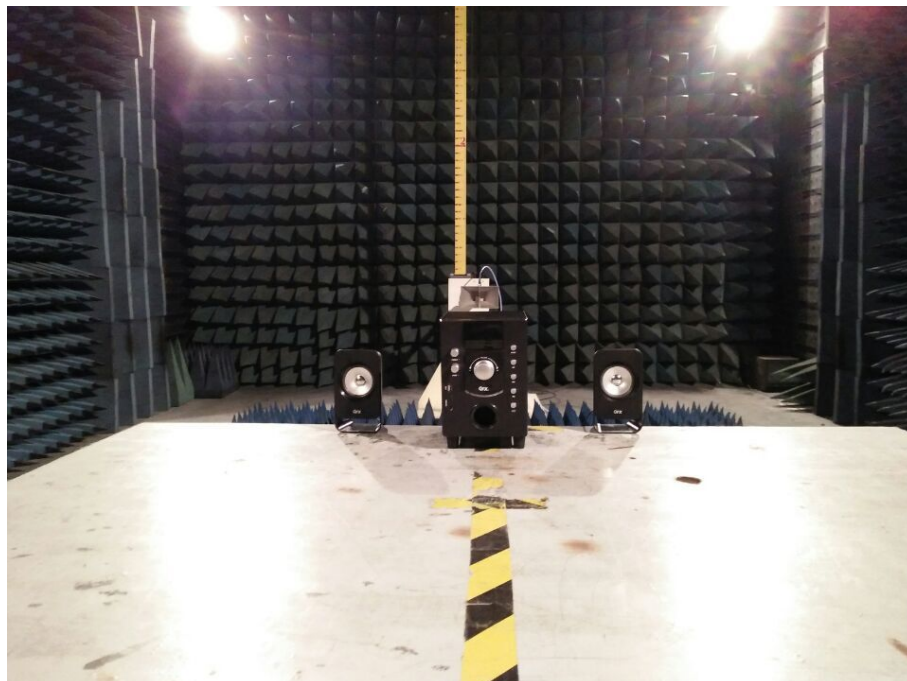

## 6.4 EUT Constructional Details







