

FCC TEST REPORT

For

Shenzhen Lasmex Industrial Co., Limited

Bluetooth Headset

Model No.: HB-65, Q1

Prepared For : Shenzhen Lasmex Industrial Co., Limited
Address : NO. 1703, Building 2, Zhongliang Business Park, Liuxian 2nd Road,
Baoan 67 District, Shenzhen City, China

Prepared For : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0116121596I
Date of Test : Dec. 29, 2016~Jan. 23, 2017
Date of Report : Jan. 23, 2017

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	7
1.6. Description Of Test Setup.....	8
1.7. Test Equipment List.....	9
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	10
2. Summary of Test Results.....	11
3. Conducted Emission Test.....	12
3.1. Test Standard and Limit.....	12
3.2. Test Setup.....	12
3.3. Test Procedure.....	12
3.4. Test Data.....	12
4. Radiation Spurious Emission and Band Edge.....	17
4.1. Test Standard and Limit.....	17
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	19
5. Maximum Peak Output Power Test.....	26
5.1. Test Standard and Limit.....	26
5.2. Test Setup.....	26
5.3. Test Procedure.....	26
5.4. Test Data.....	26
6. 6DB Occupy Bandwidth Test.....	29
6.1. Test Standard and Limit.....	29
6.2. Test Setup.....	29
6.3. Test Procedure.....	29
6.4. Test Data.....	29
7. Power Spectral Density Test.....	32
7.1. Test Standard and Limit.....	32
7.2. Test Setup.....	32
7.3. Test Procedure.....	32
7.4. Test Data.....	32
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	35
8.1. Test Standard and Limit.....	35
8.2. Test Setup.....	35
8.3. Test Procedure.....	35

8.4. Test Data.....	35
9. Antenna Requirement.....	37
9.1. Test Standard and Requirement.....	37
9.2. Antenna Connected Construction.....	37
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	38
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	40
APPENDIX III -- INTERNAL PHOTOGRAPH.....	44

Anbotech

TEST REPORT

Applicant : Shenzhen Lasmex Industrial Co., Limited
Manufacturer : Lezun Electronics Ltd.
Product Name : Bluetooth Headset
Model No. : HB-65, Q1
Trade Mark :  **LASMEX**
Rating(s) : Input DC 5V, 150mA (DC 3.7V, 230mAh Lithium Battery)

Test Standard(s) : FCC Part15 Subpart C 2016, Section 15.247

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Test : : Dec. 29, 2016~Jan. 23, 2017

Prepared by :




(Tested Engineer / Baron Wen)

Reviewer :



(Project Manager / Amy Ding)

Approved & Authorized Signer :




(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Lasmex Industrial Co., Limited
Address	:	NO. 1703, Building 2, Zhongliang Business Park, Liuxian 2nd Road, Baoan 67 District, Shenzhen City, China
Manufacturer	:	Lezun Electronics Ltd.
Address	:	3 rd Floor, C Section, Factory Building 1, Huiye Technology Park, Guanguang Road, Tangjia Community, Gongming Office, Guangming New District, Shenzhen City, Guangdong Province, P.R. China

1.2. Description of Device (EUT)

Product Name	:	Bluetooth Headset	
Model No.	:	HB-65, Q1 (Note: All samples are the same except the model number and colour, so we prepare “HB-65” for test only.)	
Trade Mark	:		
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter/ DC 3.7V Battery inside	
Product Description	:	Operation Frequency:	2402MHz~2480MHz
	:	Transfer Rate:	1 Mbits/s
	:	Number of Channel:	40 Channels
	:	Modulation Type:	GFSK
	:	Antenna Type:	Multilayer Chip Antenna
	:	Antenna Gain(Peak):	0.5 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: ZTE M/N: STC-A2050I1000USBA-C S/N: 201202102100876 Input: 100-240V~50/60Hz 0.3A Output: DC 5V, 1000mA
Mobile Phone	:	Manufacturer: HUAWEI M/N: C8650 S/N: L6W7NA11B1013157 CE , FCC, DOC

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Keeping TX mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2)The data rate was set in 1Mbps for radiated emission due to the highest RF output power.

1.5. List of channels


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
05	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

1.6. Description Of Test Setup

CE

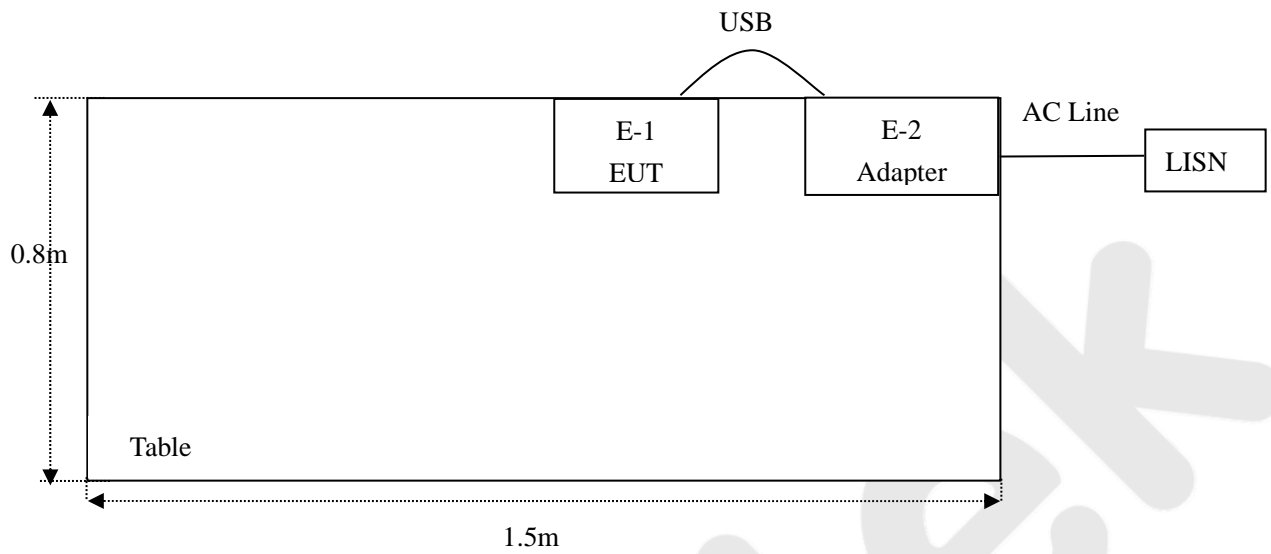

RE

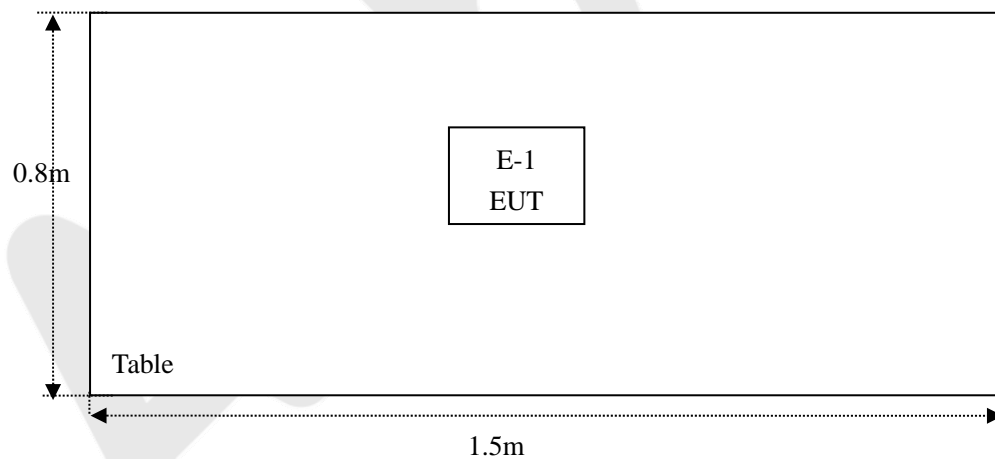

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Jul. 19, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Jun. 17, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Jun. 17, 2016	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Jul. 12, 2016	1 Year
5	Preamplifier	Instruments corporation	EMC011830	980100	Jun. 17, 2016	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Jun. 17, 2016	1 Year
7	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 06, 2016	1 Year
8	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 06, 2016	1 Year
9	Pre-amplifier	SONOMA	310N	186860	Jun. 17, 2016	1 Year
10.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
11	Power Sensor	Agilent	KFSW150502	15I00041SN045	Jun. 17, 2016	1 Year
12	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun. 17, 2016	1 Year
13	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun. 17, 2016	1 Year
14	Signal Generator	Agilent	E4421B	MY41000743	Jun. 17, 2016	1 Year
15	DC Power supply	IV	IV-8080	YQSB0096	Jun. 17, 2016	1 Year
16	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150 M8	SE-0137	Jun. 17, 2016	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

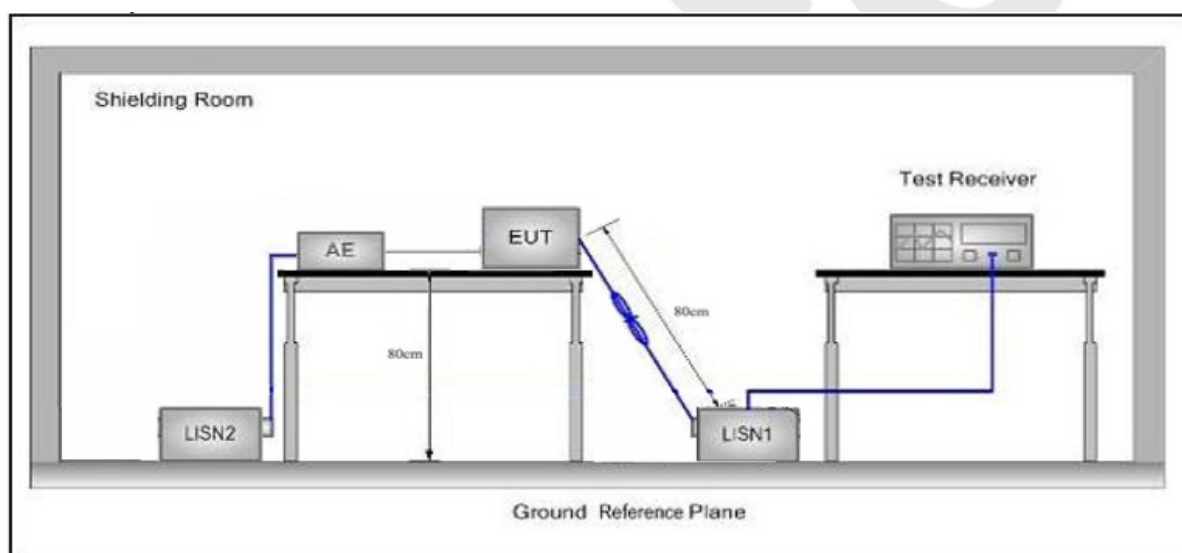

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%

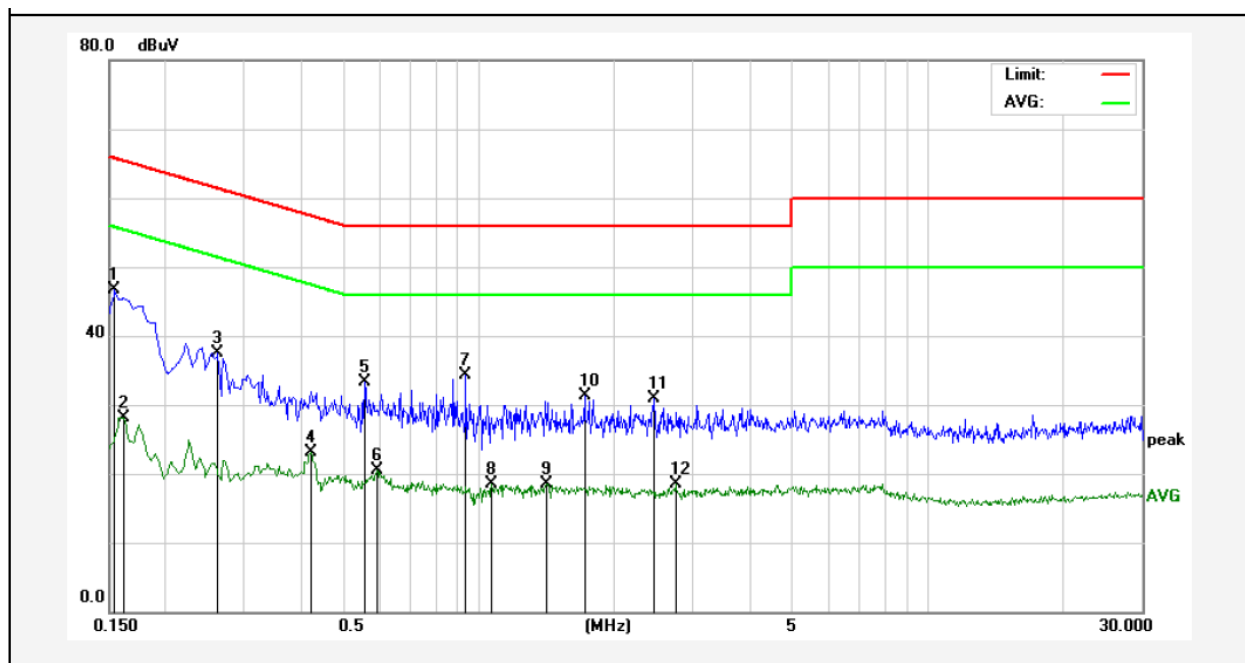

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	26.76	19.90	46.66	65.78	-19.12	QP	
2	0.1620	8.18	19.90	28.08	55.36	-27.28	AVG	
3	0.2620	17.54	19.89	37.43	61.36	-23.93	QP	
4	0.4220	3.07	19.94	23.01	47.41	-24.40	AVG	
5	0.5580	13.23	20.00	33.23	56.00	-22.77	QP	
6	0.5940	0.43	20.01	20.44	46.00	-25.56	AVG	
7	0.9340	14.23	20.10	34.33	56.00	-21.67	QP	
8	1.0700	-1.69	20.12	18.43	46.00	-27.57	AVG	
9	1.4140	-1.59	20.13	18.54	46.00	-27.46	AVG	
10	1.7220	11.12	20.13	31.25	56.00	-24.75	QP	
11	2.4539	10.80	20.15	30.95	56.00	-25.05	QP	
12	2.7460	-1.68	20.15	18.47	46.00	-27.53	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

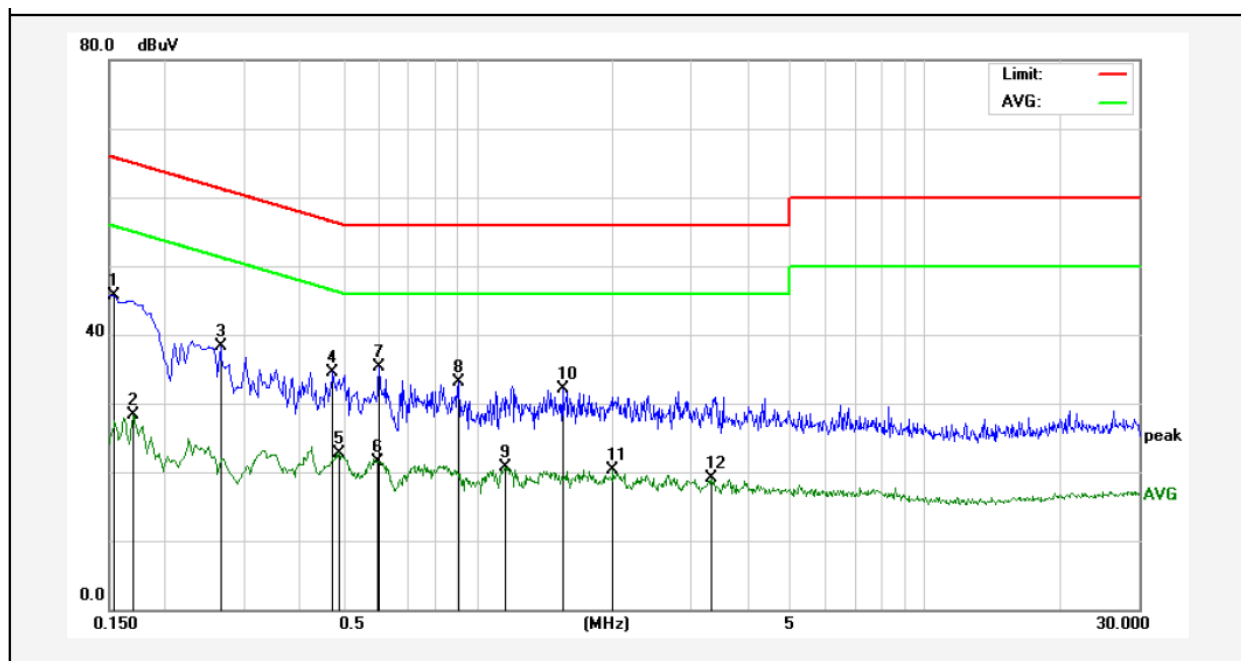

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	25.88	19.90	45.78	65.78	-20.00	QP	
2	0.1700	8.40	19.90	28.30	54.96	-26.66	AVG	
3	0.2660	18.50	19.89	38.39	61.24	-22.85	QP	
4	0.4740	14.63	19.97	34.60	56.44	-21.84	QP	
5	0.4900	2.82	19.98	22.80	46.17	-23.37	AVG	
6	0.5980	1.55	20.01	21.56	46.00	-24.44	AVG	
7	0.6020	15.31	20.01	35.32	56.00	-20.68	QP	
8	0.9060	13.00	20.09	33.09	56.00	-22.91	QP	
9	1.1580	0.52	20.12	20.64	46.00	-25.36	AVG	
10	1.5460	11.98	20.13	32.11	56.00	-23.89	QP	
11	2.0059	0.10	20.14	20.24	46.00	-25.76	AVG	
12	3.3140	-1.09	20.17	19.08	46.00	-26.92	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%

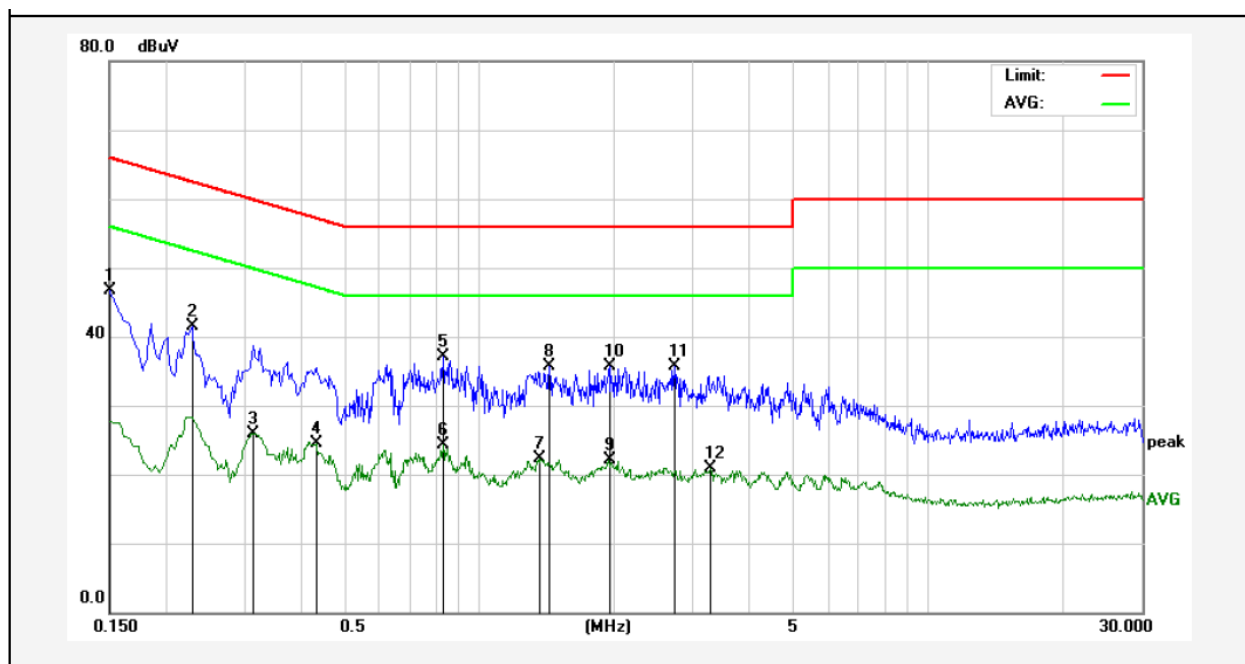

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	26.85	19.90	46.75	65.99	-19.24	QP	
2	0.2300	21.56	19.89	41.45	62.45	-21.00	QP	
3	0.3140	6.07	19.90	25.97	49.86	-23.89	AVG	
4	0.4340	4.64	19.95	24.59	47.18	-22.59	AVG	
5	0.8340	16.93	20.08	37.01	56.00	-18.99	QP	
6	0.8340	4.19	20.08	24.27	46.00	-21.73	AVG	
7	1.3700	2.22	20.13	22.35	46.00	-23.65	AVG	
8	1.4380	15.57	20.13	35.70	56.00	-20.30	QP	
9	1.9420	1.88	20.14	22.02	46.00	-23.98	AVG	
10	1.9500	15.53	20.14	35.67	56.00	-20.33	QP	
11	2.7340	15.51	20.15	35.66	56.00	-20.34	QP	
12	3.2780	0.73	20.17	20.90	46.00	-25.10	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

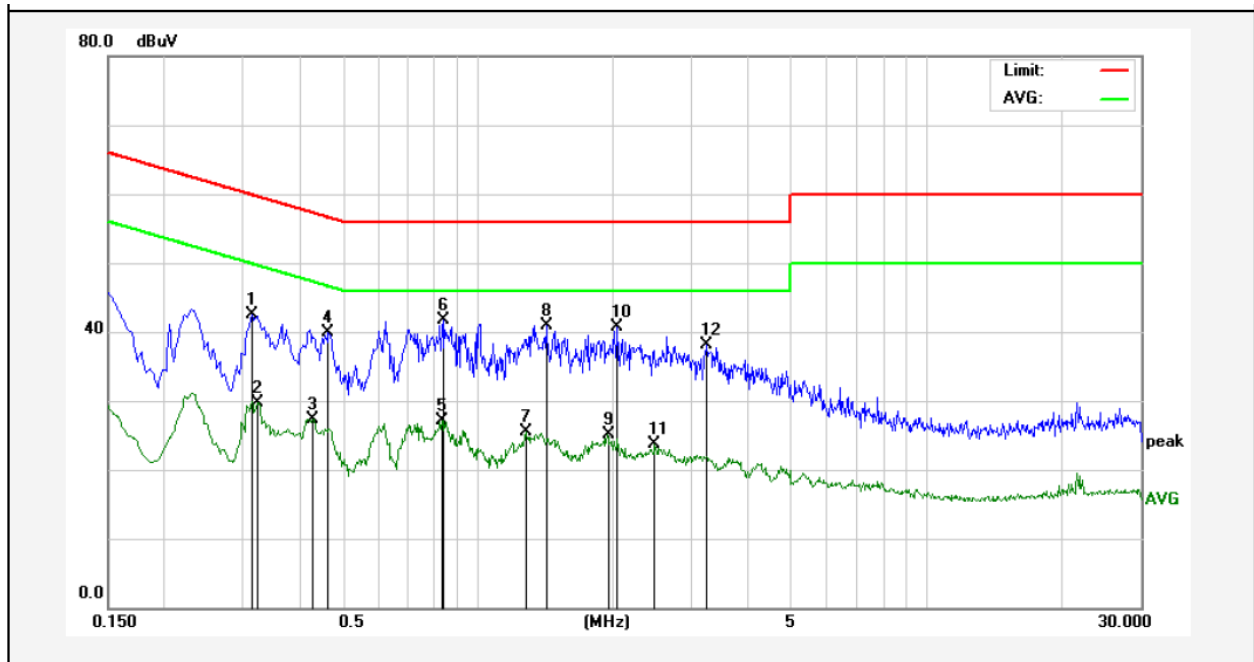

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3140	22.67	19.90	42.57	59.86	-17.29	QP	
2	0.3220	9.88	19.90	29.78	49.65	-19.87	AVG	
3	0.4300	7.36	19.95	27.31	47.25	-19.94	AVG	
4	0.4660	20.00	19.96	39.96	56.58	-16.62	QP	
5	0.8340	7.06	20.08	27.14	46.00	-18.86	AVG	
6	0.8420	21.69	20.08	41.77	56.00	-14.23	QP	
7	1.2820	5.33	20.13	25.46	46.00	-20.54	AVG	
8	1.4220	20.79	20.13	40.92	56.00	-15.08	QP	
9	1.9420	4.87	20.14	25.01	46.00	-20.99	AVG	
10	2.0460	20.49	20.14	40.63	56.00	-15.37	QP	
11	2.4860	3.53	20.15	23.68	46.00	-22.32	AVG	
12	3.2300	17.89	20.16	38.05	56.00	-17.95	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

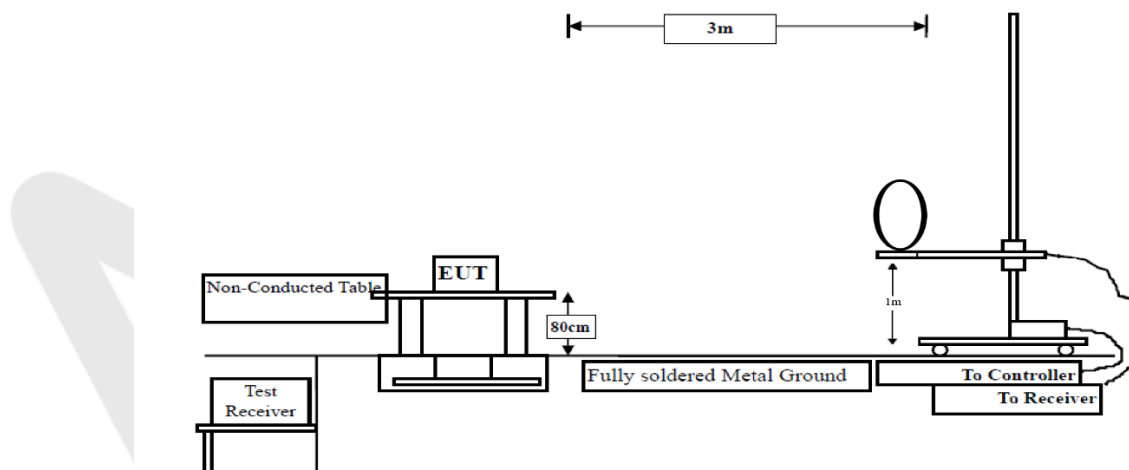


Figure 1. Below 30MHz

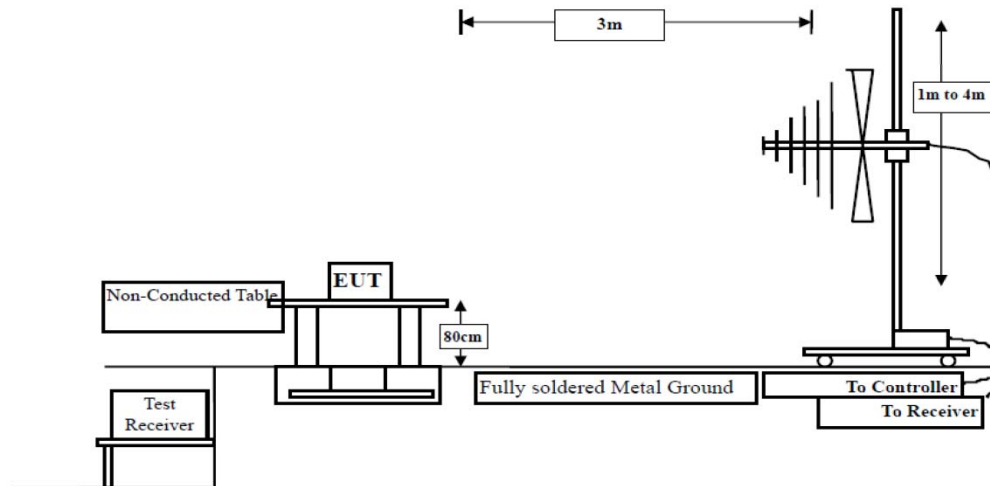


Figure 2. 30MHz to 1GHz

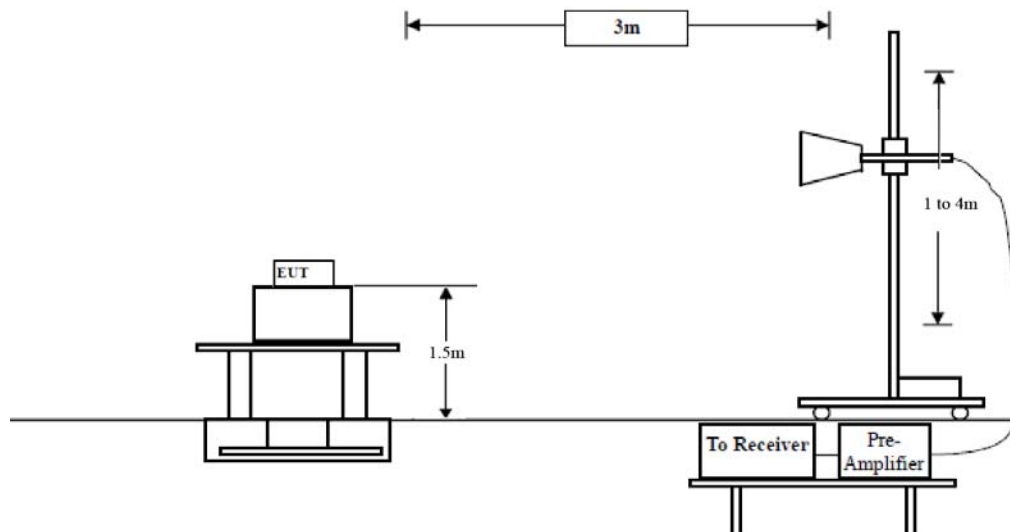


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Job No.: 0116121596I Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 3.7V
Test Mode: TX Mode Polarization: Horizontal

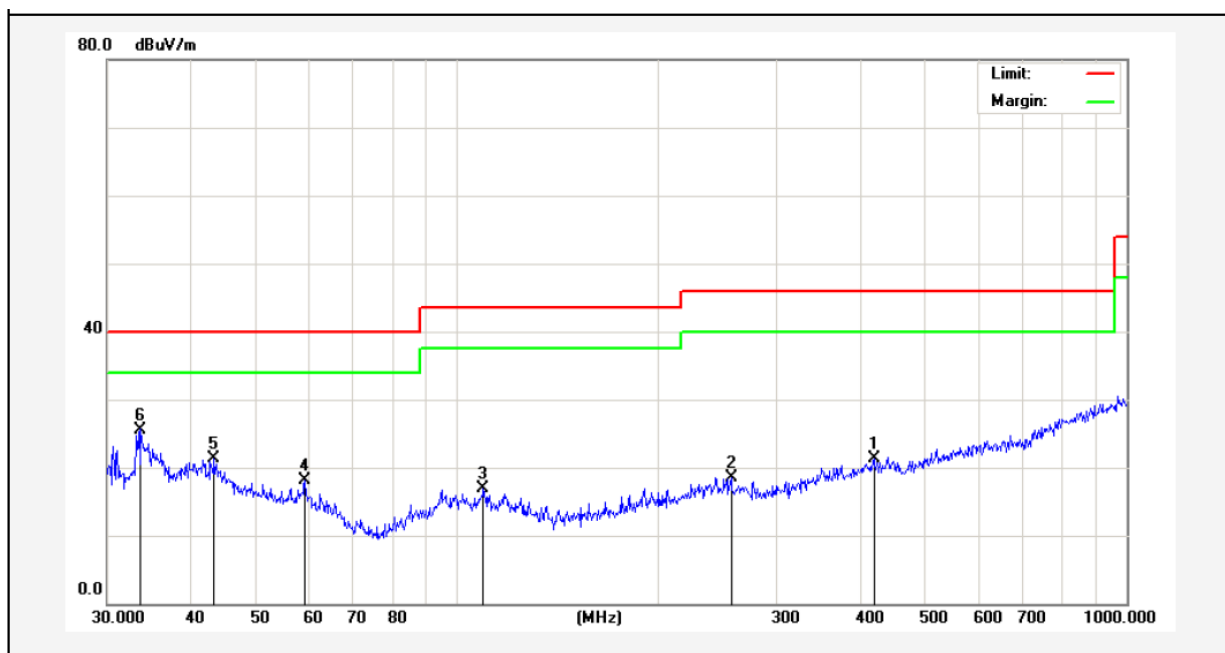

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	419.1080	33.62	-12.40	21.22	46.00	-24.78	peak			
2	256.5210	37.40	-18.83	18.57	46.00	-27.43	peak			
3	109.4116	37.46	-20.63	16.83	43.50	-26.67	peak			
4	59.2325	33.49	-15.32	18.17	40.00	-21.83	peak			
5	43.3534	33.00	-11.68	21.32	40.00	-18.68	peak			
6	33.6802	40.59	-14.99	25.60	40.00	-14.40	peak			

Test Results (30~1000MHz)

Job No.: 0116121596I Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 3.7V
Test Mode: TX Mode Polarization: Vertical

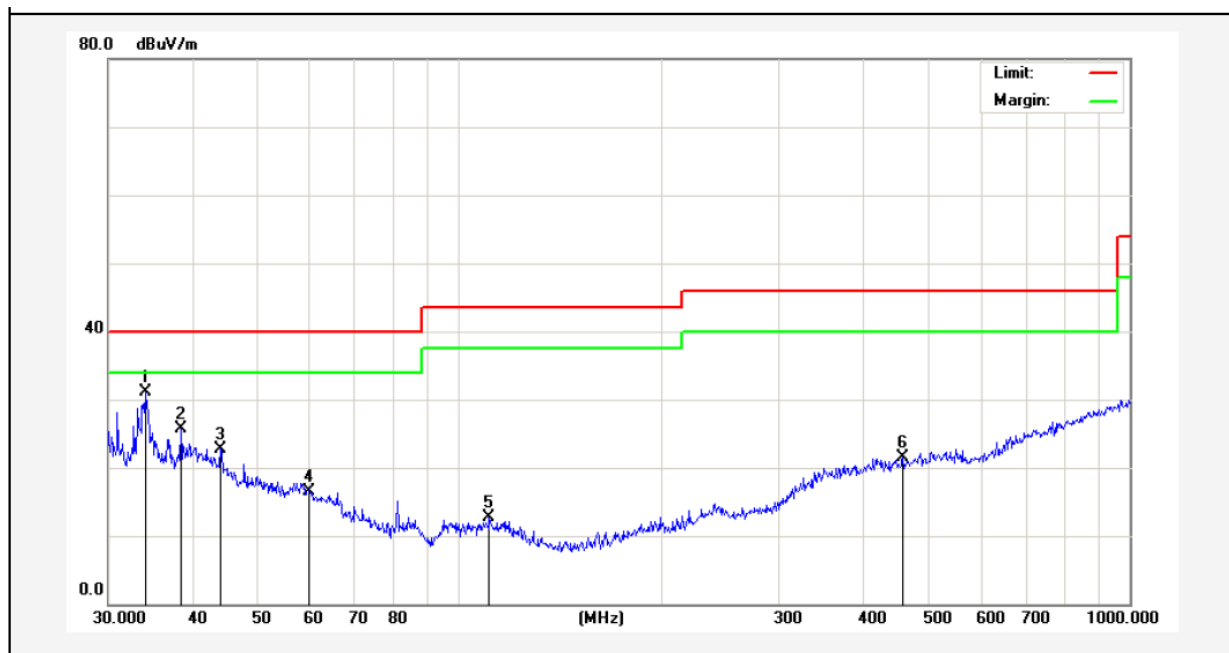

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.0363	45.87	-14.80	31.07	40.00	-8.93	peak			
2	38.4808	37.31	-11.56	25.75	40.00	-14.25	peak			
3	44.1200	34.78	-11.98	22.80	40.00	-17.20	peak			
4	59.8588	31.86	-15.38	16.48	40.00	-23.52	peak			
5	110.9570	28.32	-15.69	12.63	43.50	-30.87	peak			
6	459.1143	33.65	-12.06	21.59	46.00	-24.41	peak			

Test Results (Above 1000MHz)

Test Mode: TX Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	38.16	34.04	6.58	34.09	44.69	74.00	-29.31	V
7206.00	32.40	37.11	7.73	34.50	42.74	74.00	-31.26	V
9608.00	31.98	39.31	9.23	34.79	45.73	74.00	-28.27	V
12010.00	*					74.00		V
14412.00	*					74.00		V
4804.00	42.63	34.04	6.58	34.09	49.16	74.00	-24.84	H
7206.00	34.23	37.11	7.73	34.50	44.57	74.00	-29.43	H
9608.00	31.48	39.31	9.23	34.79	45.23	74.00	-28.77	H
12010.00	*					74.00		H
14412.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	26.82	34.04	6.58	34.09	33.35	54.00	-20.65	V
7206.00	20.99	37.11	7.73	34.50	31.33	54.00	-22.67	V
9608.00	20.01	39.31	9.23	34.79	33.76	54.00	-20.24	V
12010.00	*					54.00		V
14412.00	*					54.00		V
4804.00	31.14	34.04	6.58	34.09	37.67	54.00	-16.33	H
7206.00	23.22	37.11	7.73	34.50	33.56	54.00	-20.44	H
9608.00	19.81	39.31	9.23	34.79	33.56	54.00	-20.44	H
12010.00	*					54.00		H
14412.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: TX Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	36.60	34.38	6.69	34.09	43.58	74.00	-30.42	V
7320.00	31.36	37.22	7.78	34.53	41.83	74.00	-32.17	V
9760.00	31.05	39.46	9.35	34.80	45.06	74.00	-28.94	V
12200.00	*					74.00		V
14640.00	*					74.00		V
4880.00	40.74	34.38	6.69	34.09	47.72	74.00	-26.28	H
7320.00	33.06	37.22	7.78	34.53	43.53	74.00	-30.47	H
9760.00	30.41	39.46	9.35	34.80	44.42	74.00	-29.58	H
12200.00	*					74.00		H
14640.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	25.56	34.38	6.69	34.09	32.54	54.00	-21.46	V
7320.00	20.14	37.22	7.78	34.53	30.61	54.00	-23.39	V
9760.00	19.26	39.46	9.35	34.80	33.27	54.00	-20.73	V
12200.00	*					54.00		V
14640.00	*					54.00		V
4880.00	29.71	34.38	6.69	34.09	36.69	54.00	-17.31	H
7320.00	22.26	37.22	7.78	34.53	32.73	54.00	-21.27	H
9760.00	18.93	39.46	9.35	34.80	32.94	54.00	-21.06	H
12200.00	*					54.00		H
14640.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: TX Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	36.20	34.72	6.79	34.09	43.62	74.00	-30.38	V
7440.00	31.10	37.34	7.82	34.57	41.69	74.00	-32.31	V
9920.00	30.82	39.62	9.46	34.81	45.09	74.00	-28.91	V
12400.00	*					74.00		V
14880.00	*					74.00		V
4960.00	40.26	34.72	6.79	34.09	47.68	74.00	-26.32	H
7440.00	32.75	37.34	7.82	34.57	43.34	74.00	-30.66	H
9920.00	30.13	39.62	9.46	34.81	44.40	74.00	-29.60	H
12400.00	*					74.00		H
14880.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	25.28	34.72	6.79	34.09	32.70	54.00	-21.30	V
7440.00	19.94	37.34	7.82	34.57	30.53	54.00	-23.47	V
9920.00	19.09	39.62	9.46	34.81	33.36	54.00	-20.64	V
12400.00	*					54.00		V
14880.00	*					54.00		V
4960.00	29.39	34.72	6.79	34.09	36.81	54.00	-17.19	H
7440.00	22.05	37.34	7.82	34.57	32.64	54.00	-21.36	H
9920.00	18.73	39.62	9.46	34.81	33.00	54.00	-21.00	H
12400.00	*					54.00		H
14880.00	*					54.00		H

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Radiated Band Edge:

Test Mode: GFSK					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	45.31	29.15	3.41	34.01	43.86	74.00	-30.14	H
2400.00	62.44	29.16	3.43	34.01	61.02	74.00	-12.98	H
2390.00	46.09	29.15	3.41	34.01	44.64	74.00	-29.36	V
2400.00	64.74	29.16	3.43	34.01	63.32	74.00	-10.68	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	35.31	29.15	3.41	34.01	33.86	54.00	-20.14	H
2400.00	46.69	29.16	3.43	34.01	45.27	54.00	-8.73	H
2390.00	35.43	29.15	3.41	34.01	33.98	54.00	-20.02	V
2400.00	48.57	29.16	3.43	34.01	47.15	54.00	-6.85	V

Test Mode: GFSK					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	47.70	29.28	3.53	34.03	46.48	74.00	-27.52	H
2500.00	46.41	29.30	3.56	34.03	45.24	74.00	-28.76	H
2483.50	48.95	29.28	3.53	34.03	47.73	74.00	-26.27	V
2500.00	47.64	29.30	3.56	34.03	46.47	74.00	-27.53	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.17	29.28	3.53	34.03	36.95	54.00	-17.05	H
2500.00	35.82	29.30	3.56	34.03	34.65	54.00	-19.35	H
2483.50	39.58	29.28	3.53	34.03	38.36	54.00	-15.64	V
2500.00	35.94	29.30	3.56	34.03	34.77	54.00	-19.23	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW \geq DTS bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Set the span $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.


5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
2402	0.024	30	PASS
2440	-0.051	30	PASS
2480	2.212	30	PASS

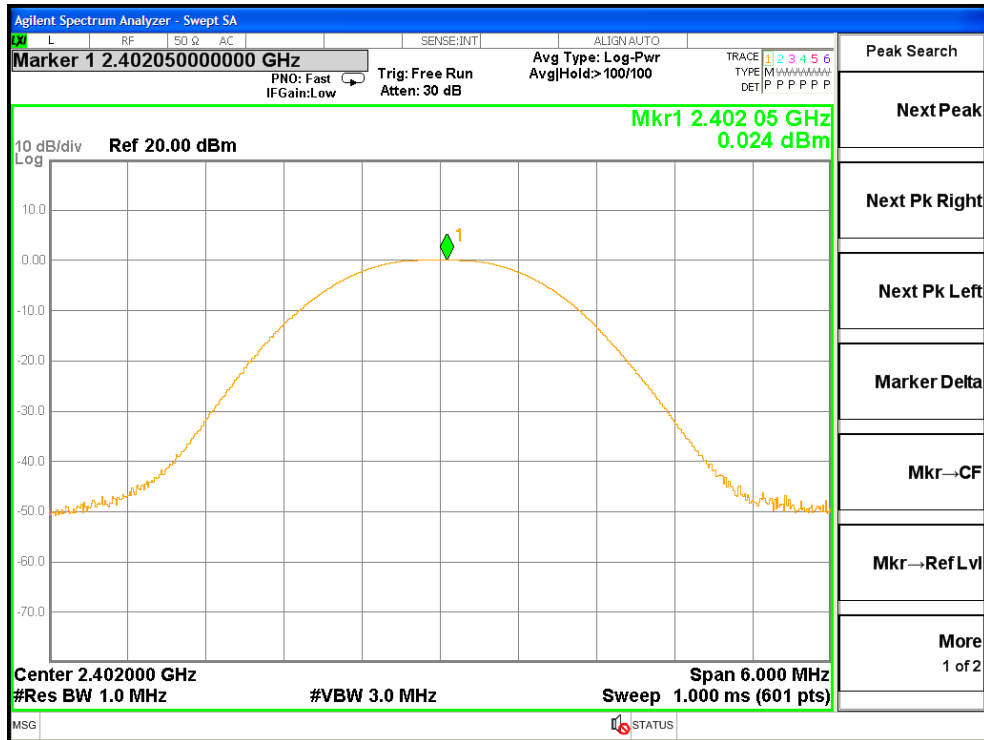

CH: Low

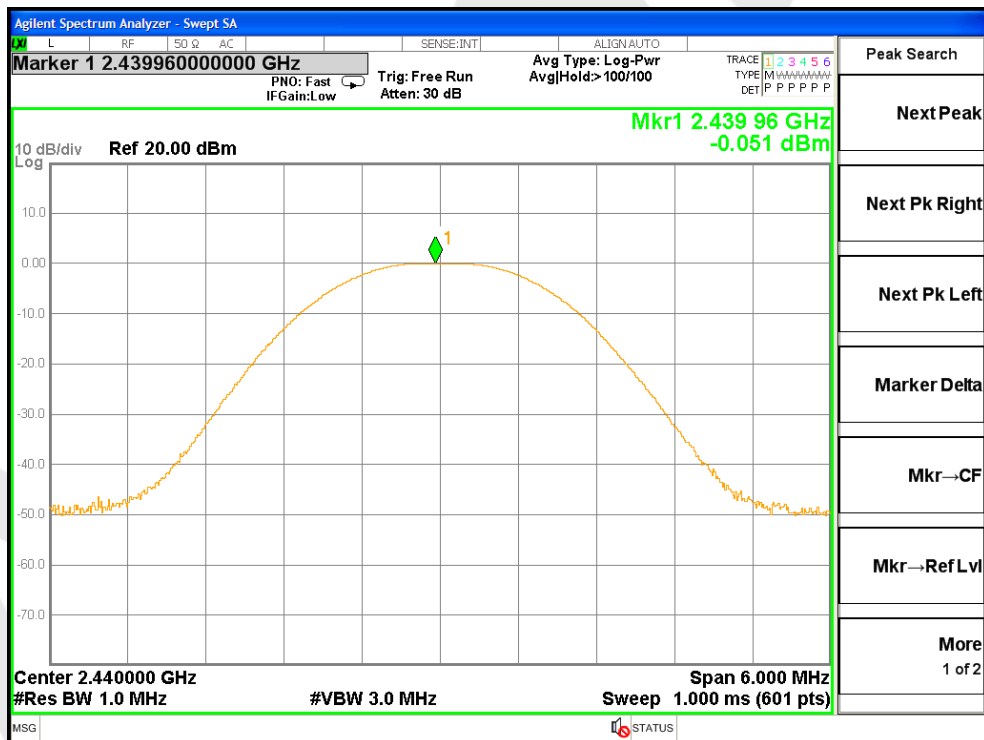

CH: Middle

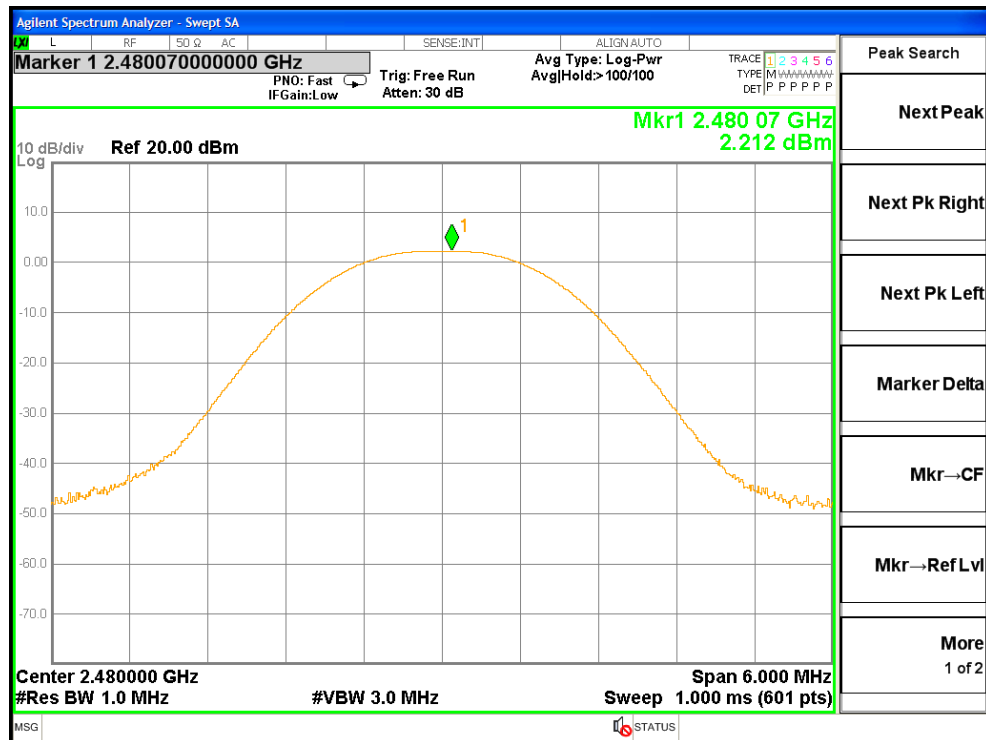


CH: High

6. 6dB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup




6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW \geq 3*RBW = 300kHz,
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


6.4. Test Data

Test Item	: 6dB Bandwidth	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH


Channel	Frequency(MHz)	Bandwidth (kHz)	Limit (kHz)	Results
Low	2402	512.5	>500	PASS
Middle	2440	507.5		PASS
High	2480	510.6		PASS

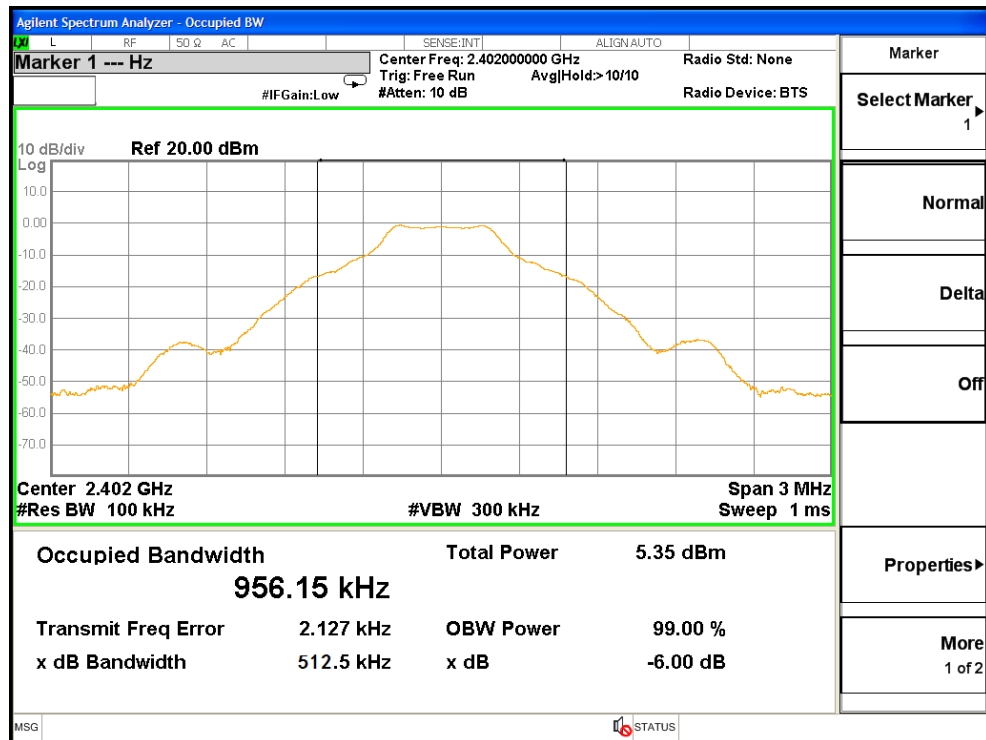

CH: Low

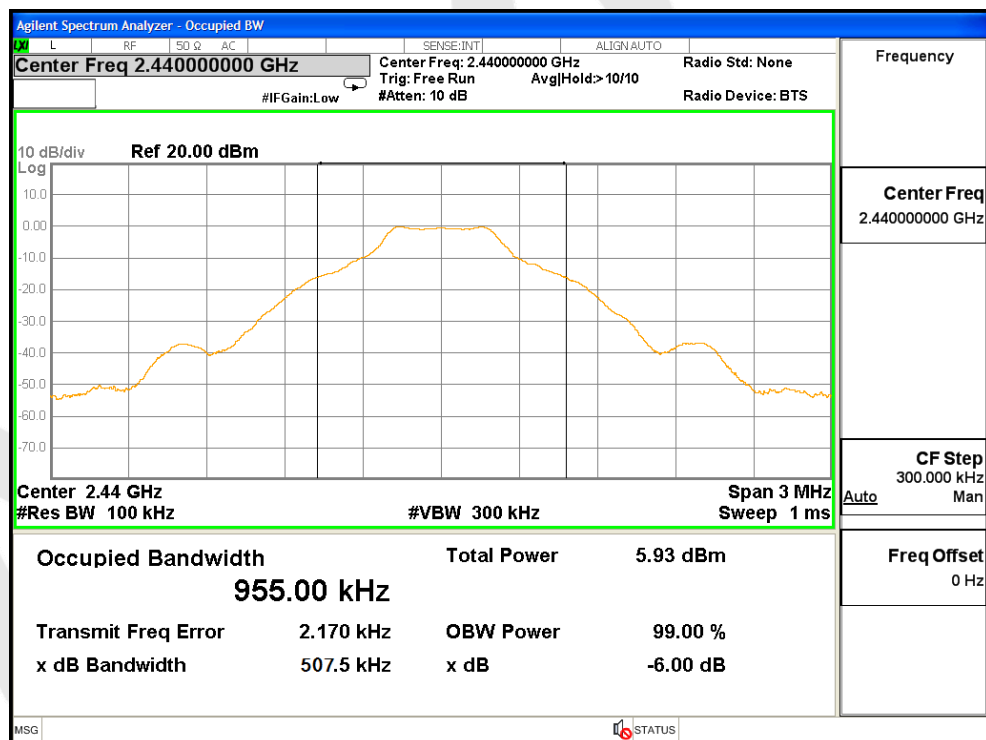

CH: Middle

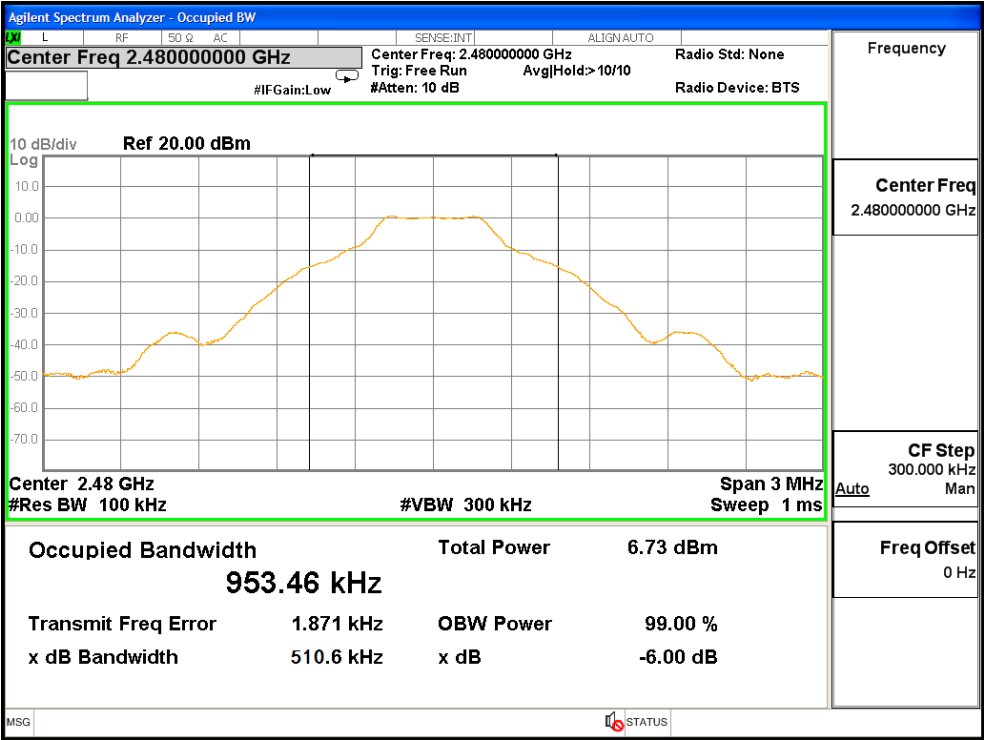


CH: High

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm

7.2. Test Setup




7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.


7.4. Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
Low	2402	-12.402	8.00	PASS
Middle	2440	-11.959	8.00	PASS
High	2480	-11.138	8.00	PASS

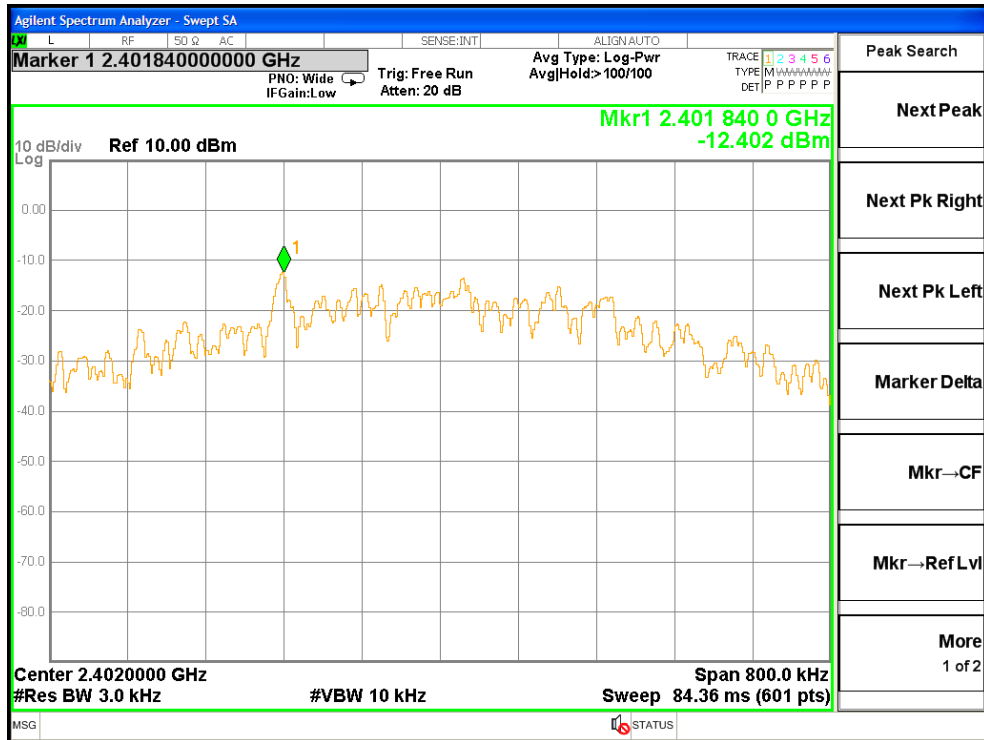

CH: Low

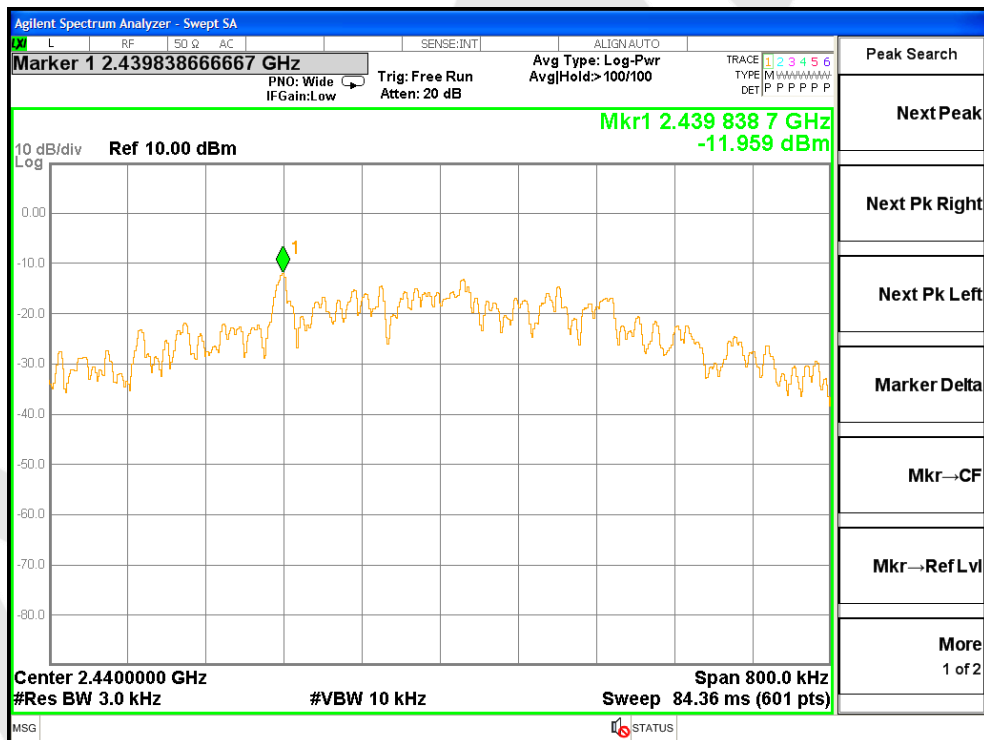

CH: Middle

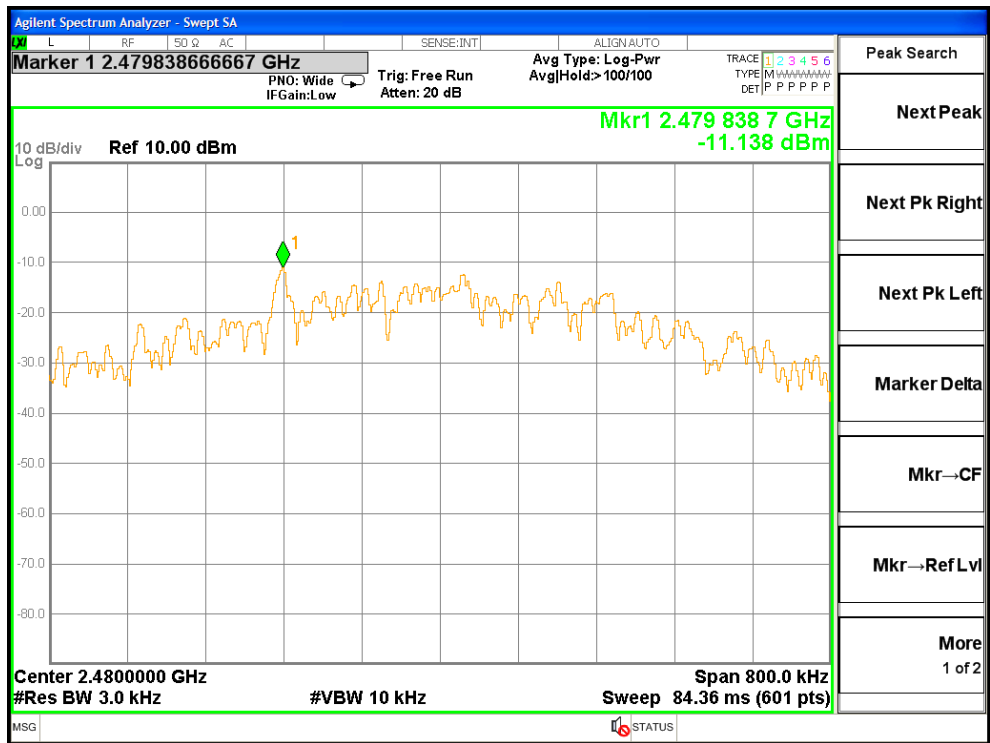


CH: High

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Test Setup

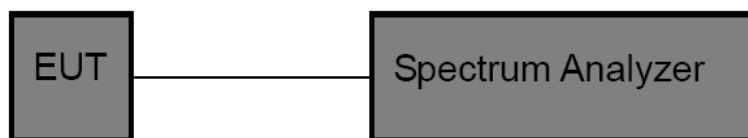

8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


8.4. Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.7V	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH

Frequency Band (MHz)	Delta Peak toBand Emission (dBc)	Limit (dBc)	Results
2400	56.227	>20	PASS
2483.5	61.480	>20	PASS



CH: Low

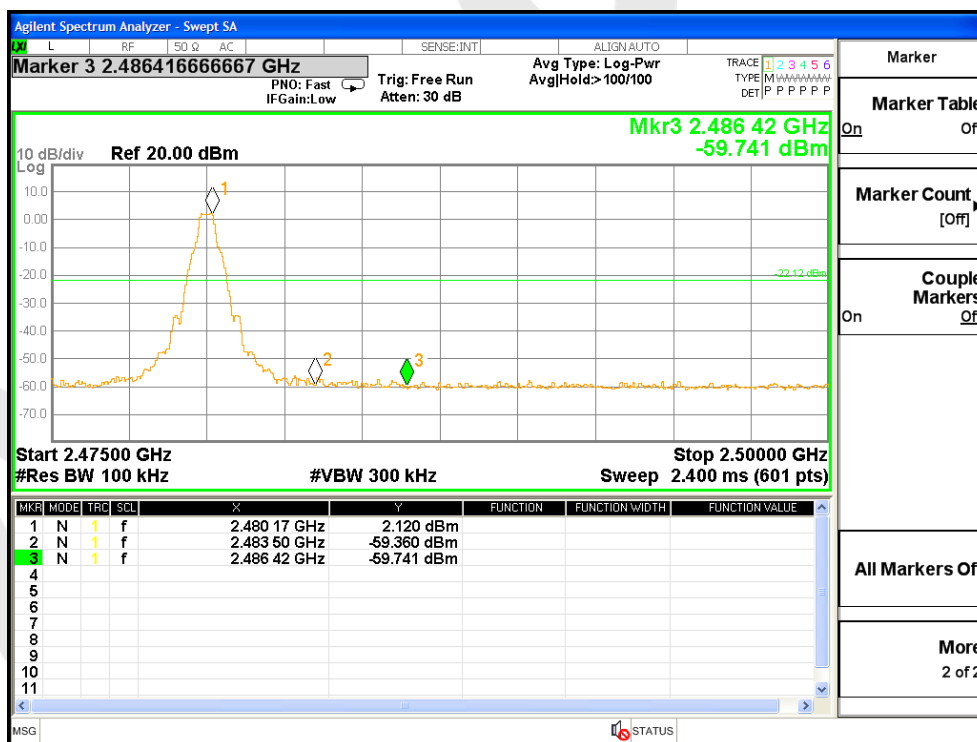

CH: High


9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

9.2. Antenna Connected Construction

The bluetooth antenna is a multilayer chip antenna which permanently attached, and the best case gain of the antenna is 0.5dBi. It complies with the standard requirement.

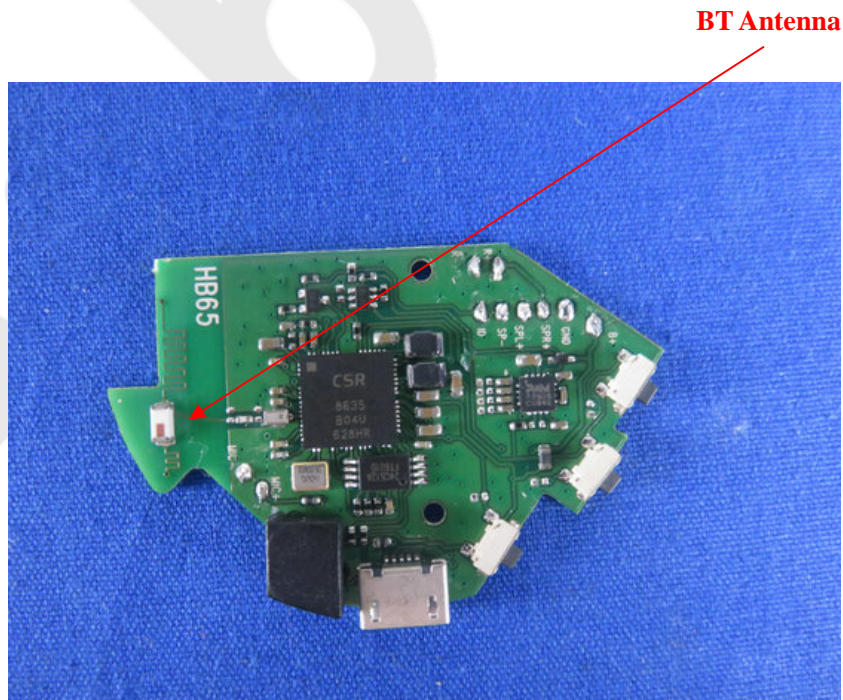

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



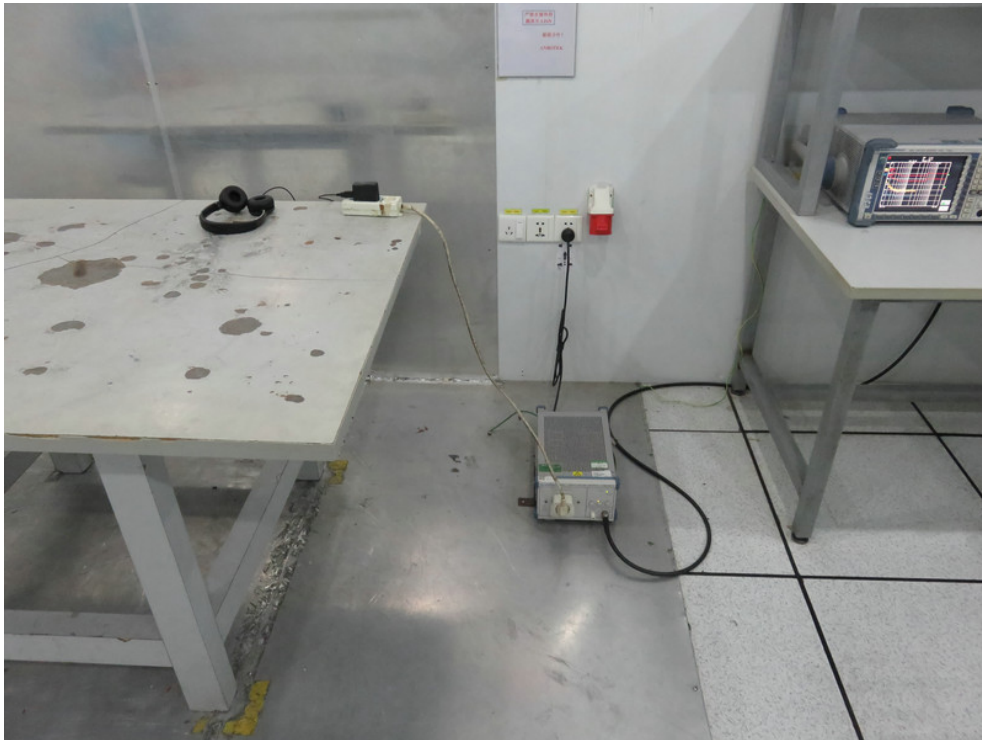


Photo of Radiation Emission Test



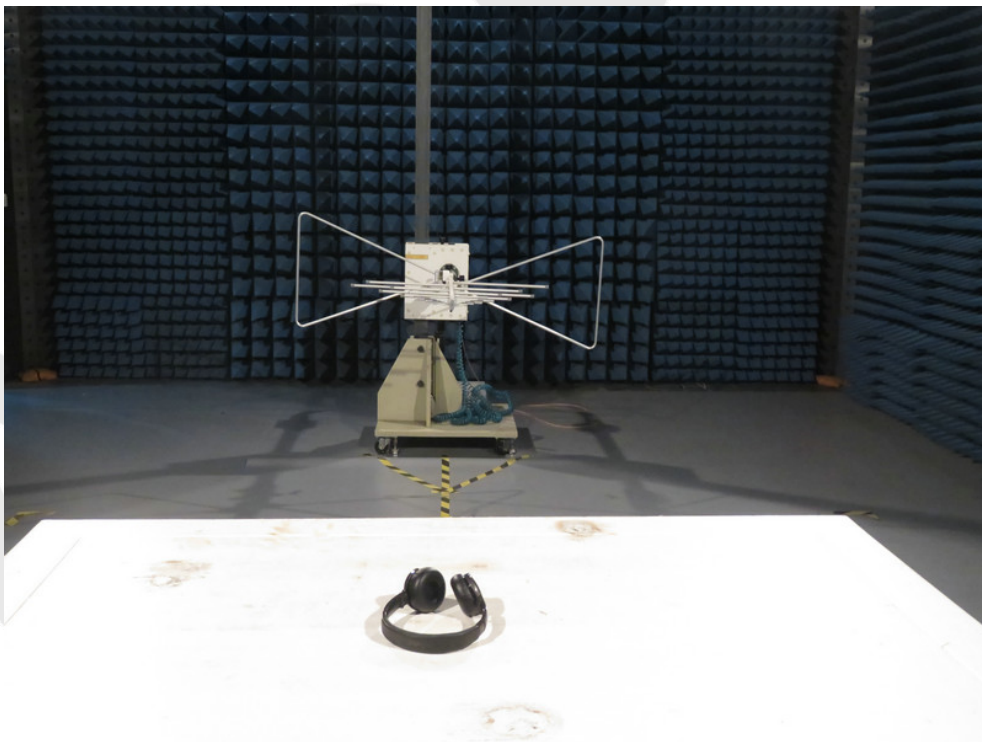

APPENDIX II -- EXTERNAL PHOTOGRAPH

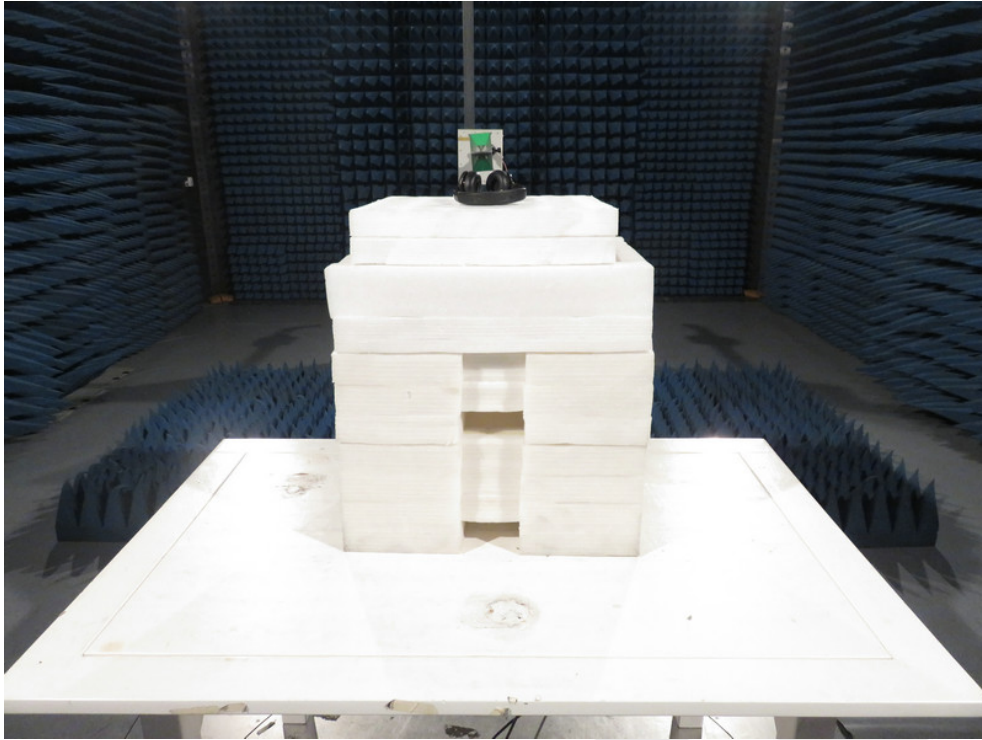







APPENDIX III -- INTERNAL PHOTOGRAPH

