

# FCC TEST REPORT

## FCC ID: 2AIGPH1

Product : CoWatch

Model Name : H1

Brand : iMCO

Report No. : PT800321160428E-FC02

### Prepared for

Shenzhen Hongtuo Tongda Electronics Technology Co.Ltd  
02/1F,Block 2,East Industrial Park, Minqiang Community, Longhua New District,  
Shenzhen, Guangdong, China

### Prepared by

DongGuan Precise Testing Service Co.,Ltd.  
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community  
Dongcheng District, Dongguan, Guangdong, China

## TEST RESULT CERTIFICATION


Applicant's name : Shenzhen Hongtuo Tongda Electronics Technology Co.Ltd  
Address : 02/1F,Block 2,East Industrial Park, Minqiang Community, Longhua New District, Shenzhen, Guangdong, China  
Manufacture's name : Shenzhen Hongtuo Tongda Electronics Technology Co.Ltd  
Address : 02/1F,Block 2,East Industrial Park, Minqiang Community, Longhua New District, Shenzhen, Guangdong, China  
Product name : CoWatch  
Model name : H1  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2013, DA 00-705  
Test Date : May. 05, 2016 ~ May. 24, 2016  
Date of Issue : May. 26, 2016  
Test Result : Pass

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Testing Engineer

August Qiu

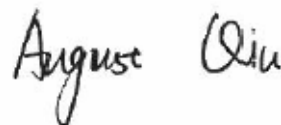

Technical Manager

Hack Ye



Authorized Signatory

Chris Du



## Contents

	Page
<b>2 TEST SUMMARY.....</b>	<b>5</b>
<b>3 GENERAL INFORMATION.....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST .....	7
3.3 TEST MODE.....	7
3.4 TEST VOLTAGE .....	8
3.5 CONFIGURATION OF SYSTEM .....	8
<b>4 EQUIPMENT DURING TEST.....</b>	<b>9</b>
4.1 EQUIPMENTS LIST.....	9
4.2 DESCRIPTION OF SUPPORT UNITS.....	10
4.3 MEASUREMENT UNCERTAINTY .....	10
<b>5 CONDUCTED EMISSION.....</b>	<b>11</b>
5.1 E.U.T. OPERATION.....	11
5.2 EUT SETUP .....	11
5.3 MEASUREMENT DESCRIPTION.....	12
5.4 CONDUCTED EMISSION TEST RESULT .....	12
<b>6 RADIATED SPURIOUS EMISSIONS.....</b>	<b>14</b>
6.1 EUT OPERATION .....	14
6.2 TEST SETUP.....	15
6.3 SPECTRUM ANALYZER SETUP.....	16
6.4 TEST PROCEDURE .....	17
6.5 SUMMARY OF TEST RESULTS.....	18
<b>7 BAND EDGE MEASUREMENT .....</b>	<b>36</b>
7.1 TEST PROCEDURE .....	36
7.2 TEST RESULT.....	37
<b>8 6DB BANDWIDTH MEASUREMENT.....</b>	<b>42</b>
8.1 TEST PROCEDURE .....	42
8.2 TEST RESULT.....	42
<b>9 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>51</b>
9.1 TEST PROCEDURE .....	51
9.2 TEST RESULT.....	52
<b>10 POWER SPECTRAL DENSITY.....</b>	<b>55</b>

10.1	TEST PROCEDURE.....	55
10.2	TEST RESULT .....	55
<b>11</b>	<b>Conducted Spurious Emissions.....</b>	<b>64</b>
<b>12</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>69</b>

## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable

### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	:	CoWatch
Model Name	:	H1
Model Description	:	N/A
Bluetooth Version	:	V4.1
Operating frequency	:	For BT(Normal) 2402-2480MHz, 79 channels For BLE: 2402-2480MHz, 40 channels For WIFI 802.11b/g/n-HT20:2412-2462MHz, 11 channels 802.11n-HT40: 2422-2452MHz:7 channels
Antenna installation:	:	internal permanent antenna
Antenna Gain:	:	0.5dBi
Type of Modulation	:	For BT(Normal) GFSK, Pi/4DQPSK, 8DPSK For BLE: GFSK For WIFI: IEEE 802.11b CCK/QPSK/BPSK IEEE 802.11g BPSK/QPSK/16QAM/64QAM IEEE 802.11n-HT20/HT40 BPSK/QPSK/16QAM/64QAM
Power supply	:	DC3.7V power by battery, DC 5V charging by USB port

### 3.2 Channel List

WIFI							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/
BLE							
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 3.3 Test Mode


All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
802.11b/g/n-HT20	Transmitting	2412MHz	2437MHz	2462MHz
802.11n-HT40	Transmitting	2412MHz	2437MHz	2452MHz
GFSK(BLE)	Transmitting	2402MHz	2440MHz	2480MHz
Tests Carried Out Under FCC part 15.207				
Test Item		Test Mode		
Conduction Emission, 0.15MHz to 30MHz		WIFI & BT Communication		

### 3.4 Test Voltage

Normal Test Voltage	Item
120V 60Hz	Conducted Emission & Radiated Emission
240V 60Hz	Conducted Emission & Radiated Emission
Remark: Only the worst case (120V 60Hz) was recorded in the report.	

### 3.5 Configuration of System

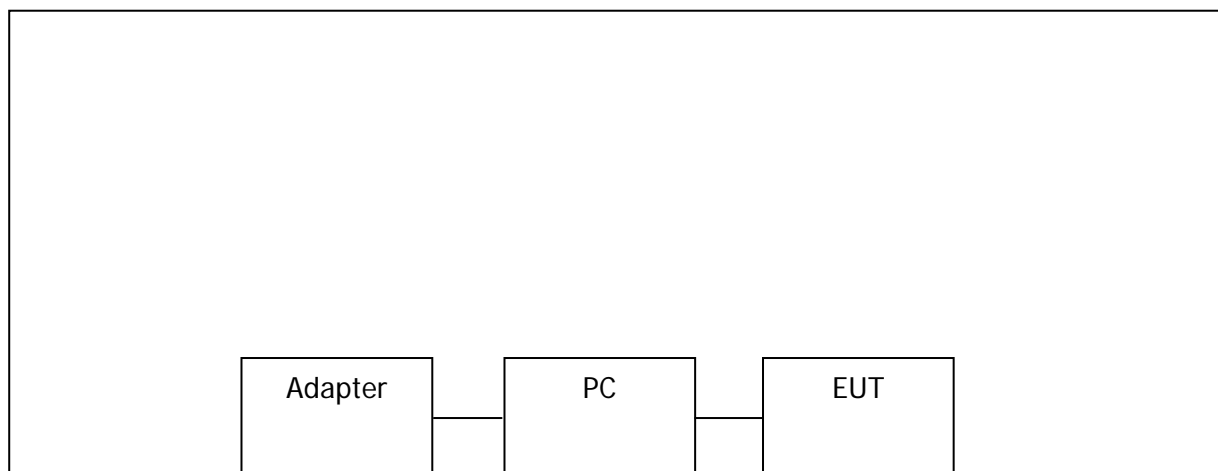



## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz )	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2015	Aug.03, 2016	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
4.	Power Sensor	Keysight	U2021XA	SG5440003	Aug.04, 2015	Aug.03, 2016	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2015	July 14, 2016	1 year
2	Trilog Broadband Antenna	SCHWARZB ECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year
4	Horn Antenna	SCHWARZB ECK	BBHA9120 D	9120D-1246	July 15, 2015	July 14, 2016	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
2	LISN	SCHWARZB ECK	NSLK 8128	8128-289	July 15, 2015	July 14, 2016	1 year
3	Cable	LARGE	RF300	-	July 15, 2015	July 14, 2016	1 year

## 4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Note Book	Sony	PCG-51111T	X16-96081
AC Adapter	Sony	NSW24063	SNPA-1900-11SY
AC power line(1.0m)	Cold come	JYD-20	C-2201

## 4.3 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

## 5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207  
 Test Method: : ANSI C63.10:2013  
 Test Result: : PASS  
 Frequency Range: : 150kHz to 30MHz  
 Class/Severity: : Class B  
 Limit: : 66-56 dB $\mu$ V between 0.15MHz & 0.5MHz  
           : 56 dB $\mu$ V between 0.5MHz & 5MHz  
           : 60 dB $\mu$ V between 5MHz & 30MHz  
 Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


### 5.1 E.U.T. Operation

Operating Environment :

Temperature: : 25.5 °C  
 Humidity: : 51 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

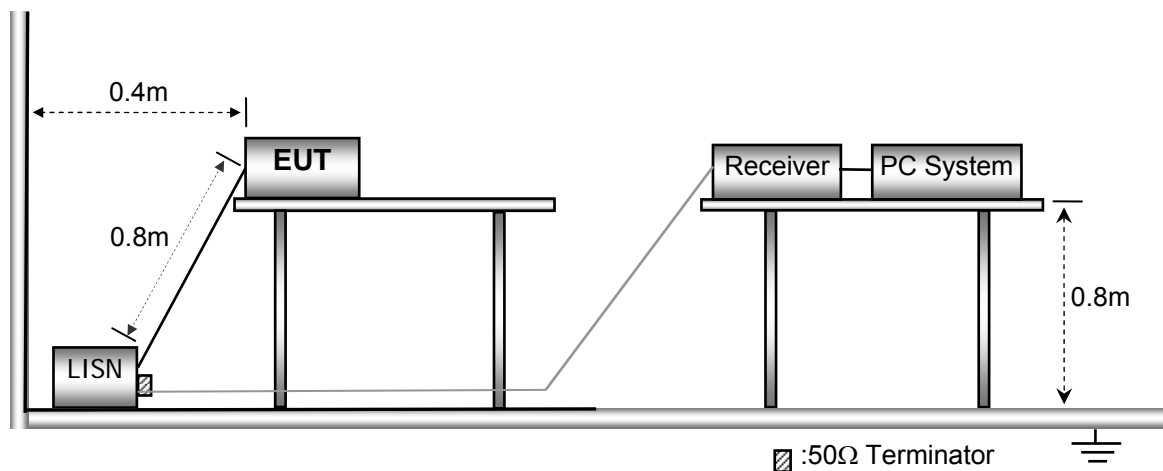


### 5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 5.4 Conducted Emission Test Result

Live line:

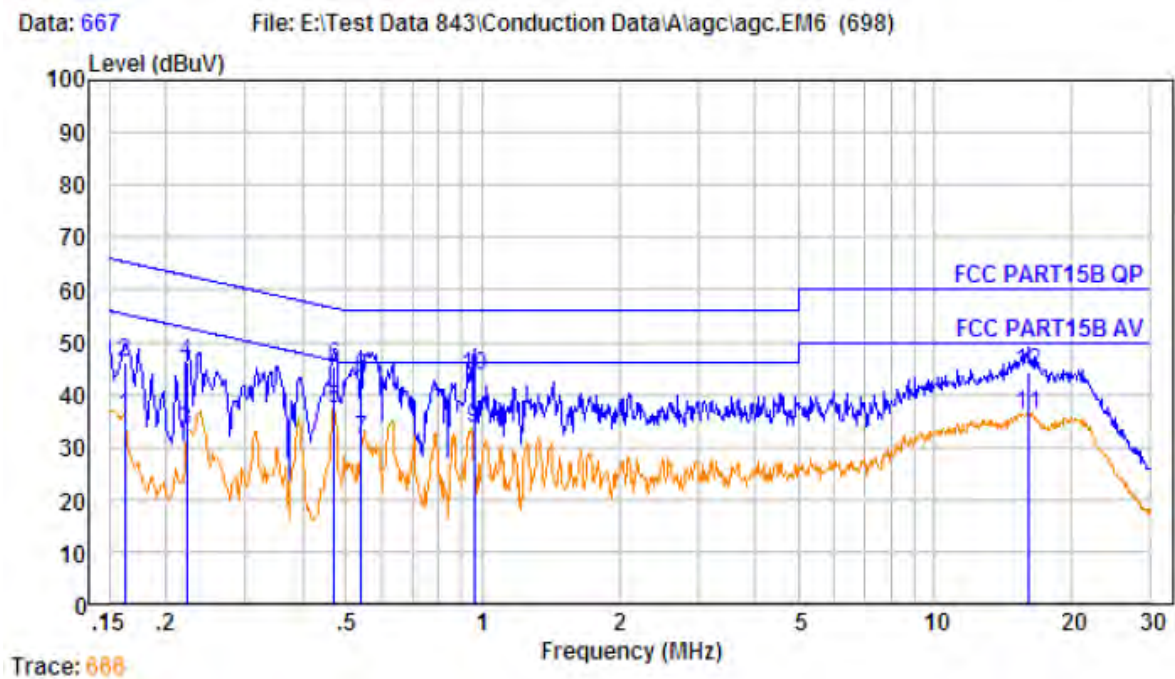


No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBUV	Emission Level dBUV	Limit dBUV	Over Limit dB	Remark
1.	0.162	10.60	0.60	24.76	35.96	55.34	-19.38	Average
2.	0.162	10.60	0.60	34.76	45.96	65.34	-19.38	QP
3.	0.222	10.61	0.60	21.83	33.04	52.74	-19.70	Average
4.	0.222	10.61	0.60	34.83	46.04	62.74	-16.70	QP
5.	0.471	10.64	0.60	26.07	37.31	46.49	-9.18	Average
6.	0.471	10.64	0.60	34.07	45.31	56.49	-11.18	QP
7.	0.541	10.65	0.60	19.93	31.18	46.00	-14.82	Average
8.	0.541	10.65	0.60	31.93	43.18	56.00	-12.82	QP
9.	0.958	10.67	0.60	22.34	33.61	46.00	-12.39	Average
10.	0.958	10.67	0.60	32.34	43.61	56.00	-12.39	QP
11.	16.055	10.78	0.60	24.85	36.23	50.00	-13.77	Average
12.	16.055	10.78	0.60	32.85	44.23	60.00	-15.77	QP

Neutral line:

Data: 669

File: E:\Test Data 843\Conduction Data\A\agc\agc.EM6 (698)

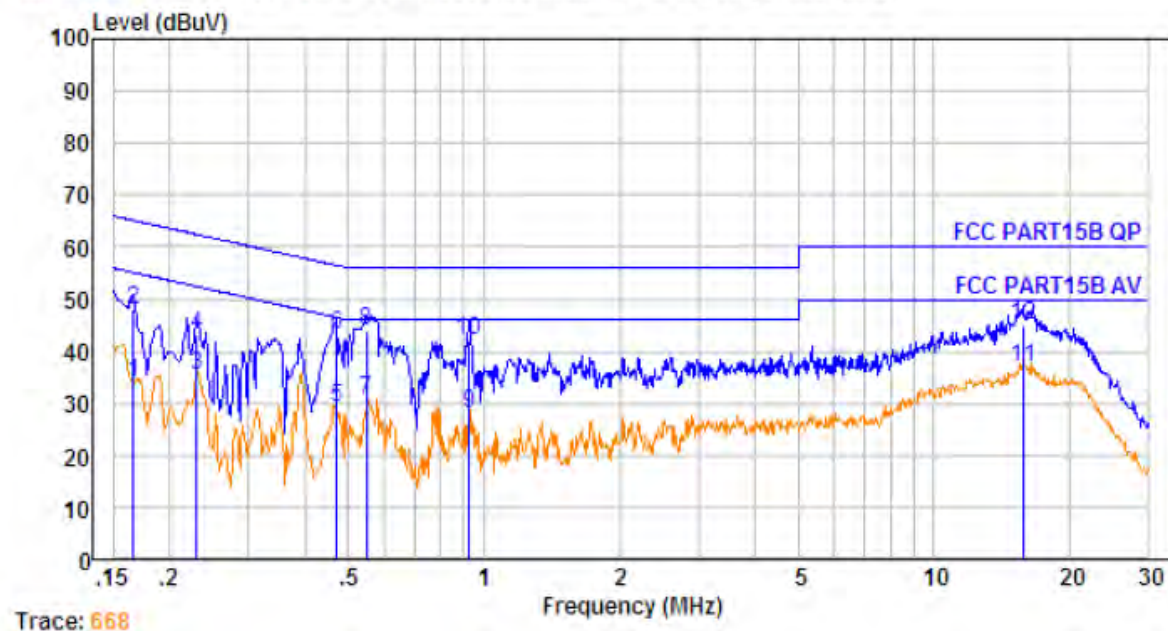

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.166	10.60	0.60	22.86	34.06	55.16	-21.10	Average
2.	0.166	10.60	0.60	36.86	48.06	65.16	-17.10	QP
3.	0.230	10.62	0.60	24.09	35.31	52.44	-17.13	Average
4.	0.230	10.62	0.60	32.09	43.31	62.44	-19.13	QP
5.	0.471	10.64	0.60	17.97	29.21	46.49	-17.28	Average
6.	0.471	10.64	0.60	31.97	43.21	56.49	-13.28	QP
7.	0.549	10.65	0.60	19.49	30.74	46.00	-15.26	Average
8.	0.549	10.65	0.60	32.49	43.74	56.00	-12.26	QP
9.	0.928	10.67	0.60	16.91	28.18	46.00	-17.82	Average
10.	0.928	10.67	0.60	30.91	42.18	56.00	-13.82	QP
11.	15.801	10.78	0.60	25.47	36.85	50.00	-13.15	Average
12.	15.801	10.78	0.60	33.47	44.85	60.00	-15.15	QP

## 6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method: : ANSI C63.10:2013,KDB 558074 D01 DTS MEAS GUIDANCE V03R05  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 EUT Operation : : Refer to section 3.3


## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

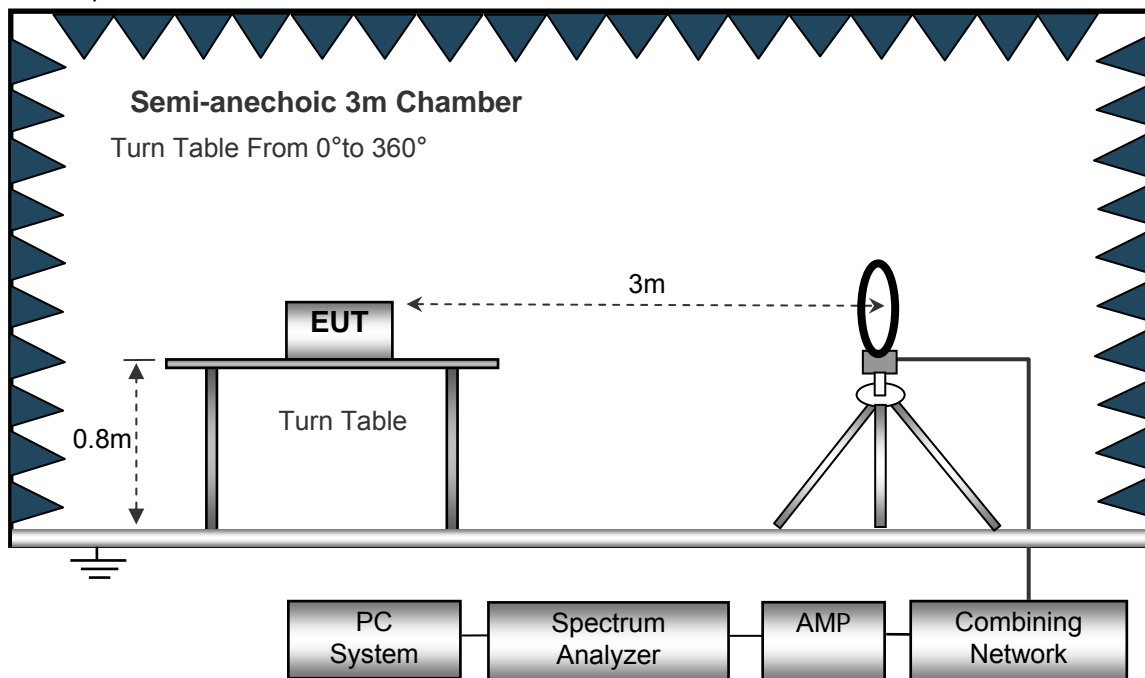

The test setup for emission measurement from 30 MHz to 1 GHz.

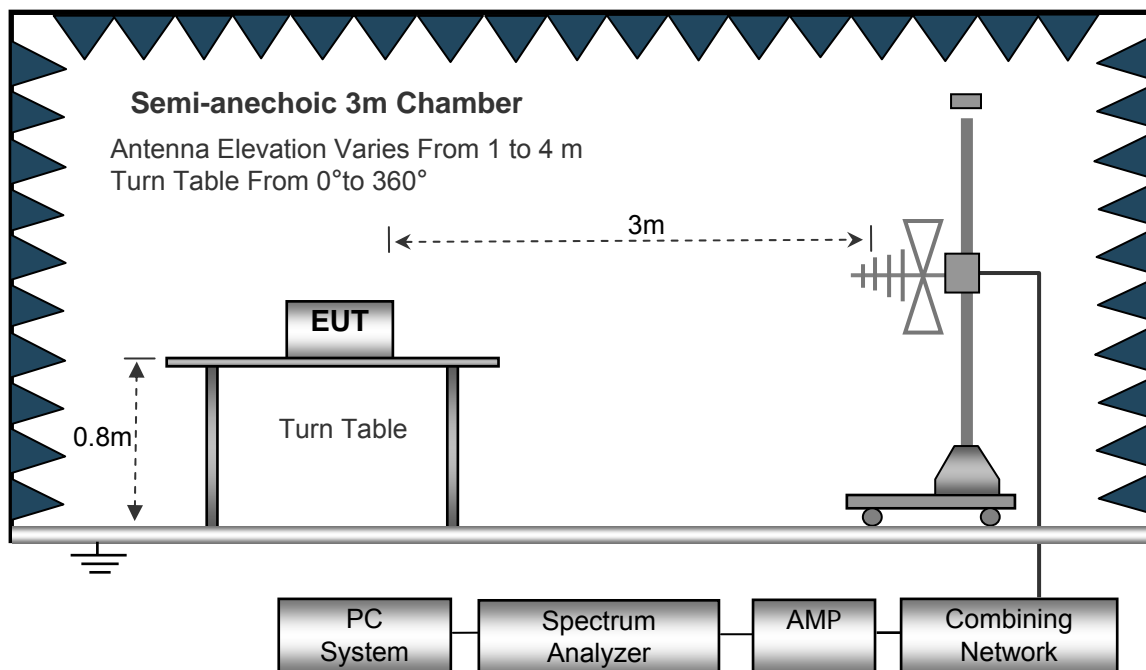

The test setup for emission measurement above 1 GHz.

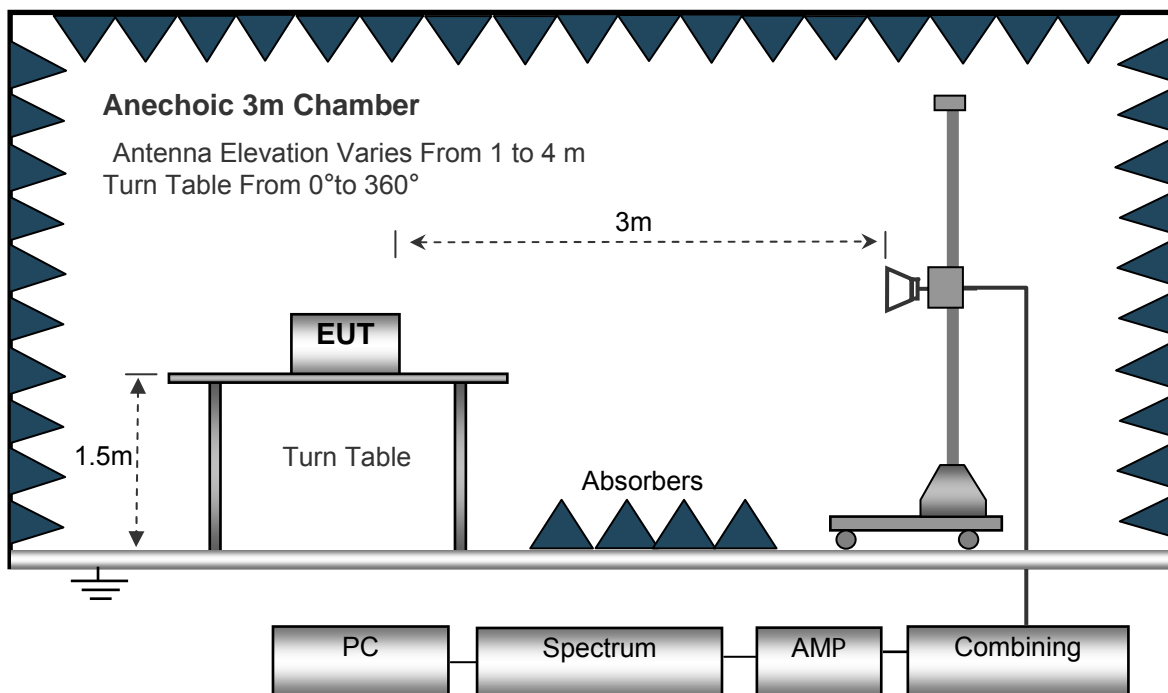

### 6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
IF Bandwidth ..... 10kHz  
Video Bandwidth ..... 10kHz  
Resolution Bandwidth ..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth ..... 100kHz  
Video Bandwidth ..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
Detector ..... PK  
Resolution Bandwidth ..... 1MHz  
Video Bandwidth ..... 3MHz  
Detector ..... Ave.  
Resolution Bandwidth ..... 1MHz  
Video Bandwidth ..... 10Hz



## **6.4 Test Procedure**

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 6.5 Summary of Test Results


### Test Frequency: Below 30MHz

The measurements were more than 30 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 1GHz

All applicable test modes have been tested and only the worst case (802.11b TX in middle channel) is recorded.

Antenna Polarization: Horizontal

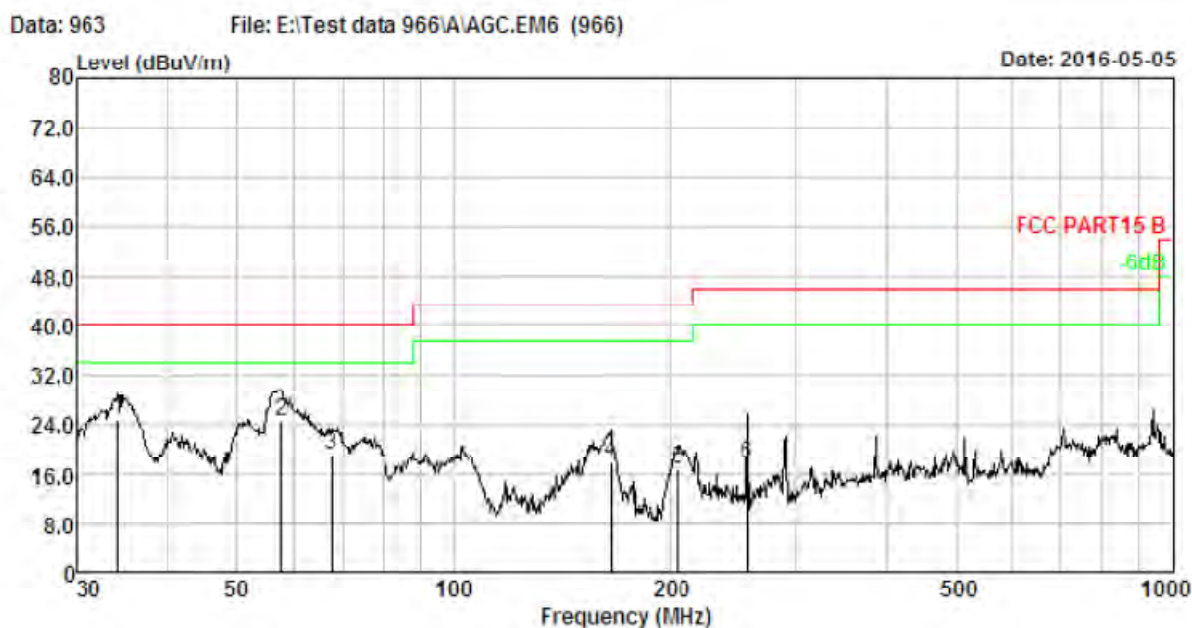


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	34.276	1.18	13.35	40.32	30.02	24.83	40.00	-15.17	QP
2.	57.594	1.65	12.04	40.96	30.20	24.45	40.00	-15.55	QP
3.	67.675	1.79	10.83	36.84	30.25	19.21	40.00	-20.79	QP
4.	165.487	2.60	13.57	32.50	30.56	18.11	43.50	-25.39	QP
5.	204.955	2.79	10.48	34.15	30.64	16.78	43.50	-26.72	QP
6.	256.521	3.00	12.06	33.49	30.72	17.83	46.00	-28.17	QP



Antenna Polarization: Vertical

Data: 964 File: E:\Test data 966\A\AGC.EM6 (966)

Date: 2016-05-05

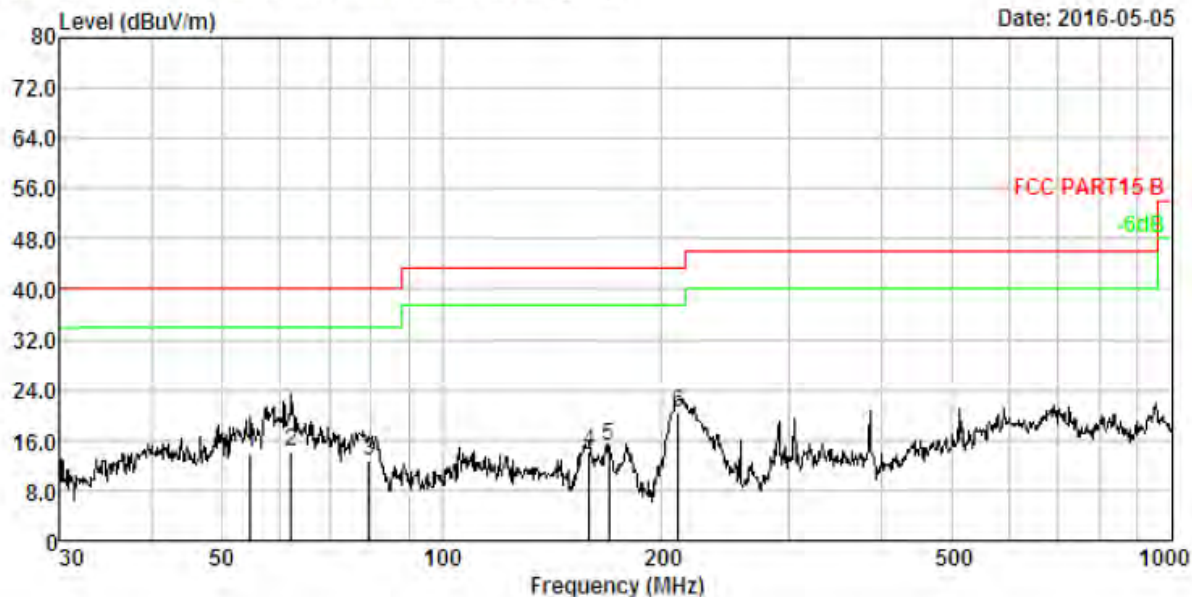

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	54.643	1.60	11.93	30.46	30.18	13.81	40.00	-26.19	QP
2.	62.213	1.72	12.02	30.75	30.22	14.27	40.00	-25.73	QP
3.	79.521	1.94	8.87	32.13	30.31	12.63	40.00	-27.37	QP
4.	159.225	2.57	13.88	28.17	30.55	14.07	43.50	-29.43	QP
5.	169.599	2.62	13.35	29.65	30.57	15.05	43.50	-28.45	QP
6.	210.786	2.82	10.59	37.73	30.65	20.49	43.50	-23.01	QP

**Test Frequency: 1GHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) Low Channel						
Harmonic & Spurious Emission						
1184.32	44.09	PK	-18.92	25.17	43.50	-18.33
1184.32	38.77	PK	-18.92	19.85	43.50	-23.65
4804.00	49.40	PK	-1.06	48.34	74.00	-25.66
4804.00	43.47	Ave	-1.06	42.41	54.00	-11.59
7206.00	50.55	PK	1.33	51.88	74.00	-22.12
7206.00	44.29	Ave	1.33	45.62	54.00	-8.38
Restricted bands Emission						
2311.68	47.26	PK	-13.19	34.07	74.00	-39.93
2311.68	42.88	Ave	-13.19	29.69	54.00	-24.31
2702.30	51.59	PK	-12.54	39.05	74.00	-34.95
2702.30	47.42	Ave	-12.54	34.88	54.00	-19.12
3335.40	45.19	PK	-10.89	34.30	74.00	-39.70
3335.40	45.39	Ave	-10.89	34.50	54.00	-19.50
Remark:						
1. Corrected Factor=ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) Middle Channel						
Harmonic & Spurious Emission						
1184.32	44.53	PK	-18.92	25.61	43.50	-17.89
1184.32	37.78	PK	-18.92	18.86	43.50	-24.64
4880.00	50.28	PK	-0.93	49.35	74.00	-24.65
4880.00	43.83	Ave	-0.93	42.90	54.00	-11.10
7320.00	51.48	PK	1.67	53.15	74.00	-20.85
7320.00	44.10	Ave	1.67	45.77	54.00	-8.23
Restricted bands Emission						
2338.78	49.99	PK	-13.19	36.80	74.00	-37.20
2338.78	42.12	Ave	-13.19	28.93	54.00	-25.07
2703.37	52.28	PK	-12.54	39.74	74.00	-34.26
2703.37	47.16	Ave	-12.54	34.62	54.00	-19.38
3332.06	46.92	PK	-10.89	36.03	74.00	-37.97
3332.06	44.40	Ave	-10.89	33.51	54.00	-20.49
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK(BLE) High Channel						
Harmonic & Spurious Emission						
1184.32	44.82	PK	-18.92	25.90	43.50	-17.60
1184.32	37.59	PK	-18.92	18.67	43.50	-24.83
4960.00	49.82	PK	-0.87	48.95	74.00	-25.05
4960.00	43.65	Ave	-0.87	42.78	54.00	-11.22
7440.00	51.70	PK	1.84	53.54	74.00	-20.46
7440.00	44.52	Ave	1.84	46.36	54.00	-7.64
Restricted bands Emission						
2334.69	51.79	PK	-13.19	38.60	74.00	-35.40
2334.69	42.04	Ave	-13.19	28.85	54.00	-25.15
2691.20	51.40	PK	-12.54	38.86	74.00	-35.14
2691.20	45.92	Ave	-12.54	33.38	54.00	-20.62
3335.70	47.27	PK	-10.89	36.38	74.00	-37.62
3335.70	43.99	Ave	-10.89	33.10	54.00	-20.90
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b Low Channel						
Harmonic & Spurious Emission						
1173.52	43.60	QP	-18.59	25.01	43.50	-18.49
1173.52	46.23	QP	-18.59	27.64	43.50	-15.86
4824.00	48.29	PK	-1.06	47.23	74.00	-26.77
4824.00	45.65	Ave	-1.06	44.59	54.00	-9.41
7236.00	50.46	PK	1.33	51.79	74.00	-22.21
7236.00	44.87	Ave	1.33	46.20	54.00	-7.80
Restricted bands Emission						
2324.22	47.06	PK	-13.19	33.87	74.00	-40.13
2324.22	42.20	Ave	-13.19	29.01	54.00	-24.99
2709.34	50.63	PK	-12.54	38.09	74.00	-35.91
2709.34	47.23	Ave	-12.54	34.69	54.00	-19.31
3332.17	44.38	PK	-10.89	33.49	74.00	-40.51
3332.17	44.60	Ave	-10.89	33.71	54.00	-20.29
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b Middle Channel						
Harmonic & Spurious Emission						
1173.52	42.76	QP	-18.59	24.17	43.50	-19.33
1173.52	46.85	QP	-18.59	28.26	43.50	-15.24
4874.00	48.67	PK	-0.93	47.74	74.00	-26.26
4874.00	46.49	Ave	-0.93	45.56	54.00	-8.44
7311.00	49.50	PK	1.67	51.17	74.00	-22.83
7311.00	45.82	Ave	1.67	47.49	54.00	-6.51
Restricted bands Emission						
2328.88	49.99	PK	-13.19	36.80	74.00	-37.20
2328.88	42.12	Ave	-13.19	28.93	54.00	-25.07
2707.49	52.28	PK	-12.54	39.74	74.00	-34.26
2707.49	47.16	Ave	-12.54	34.62	54.00	-19.38
3338.43	46.92	PK	-10.89	36.03	74.00	-37.97
3338.43	44.40	Ave	-10.89	33.51	54.00	-20.49
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11b High Channel						
Harmonic & Spurious Emission						
1173.52	42.78	QP	-18.59	24.19	43.50	-19.31
1173.52	46.59	QP	-18.59	28.00	43.50	-15.50
4924.00	47.67	PK	-0.87	46.80	74.00	-27.20
4924.00	45.75	Ave	-0.87	44.88	54.00	-9.12
7386.00	50.16	PK	1.84	52.00	74.00	-22.00
7386.00	46.09	Ave	1.84	47.93	54.00	-6.07
Restricted bands Emission						
2344.96	51.79	PK	-13.19	38.60	74.00	-35.40
2344.96	42.04	Ave	-13.19	28.85	54.00	-25.15
2695.50	51.40	PK	-12.54	38.86	74.00	-35.14
2695.50	45.92	Ave	-12.54	33.38	54.00	-20.62
3334.34	47.27	PK	-10.89	36.38	74.00	-37.62
3334.34	43.99	Ave	-10.89	33.10	54.00	-20.90
Remark:						
1. Corrected Factor=ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g Low Channel						
Harmonic & Spurious Emission						
1176.98	44.51	QP	-18.59	25.92	43.50	-17.58
1176.98	46.39	QP	-18.59	27.80	43.50	-15.70
4824.00	48.93	PK	-1.06	47.87	74.00	-26.13
4824.00	45.36	Ave	-1.06	44.30	54.00	-9.70
7236.00	50.61	PK	1.33	51.94	74.00	-22.06
7236.00	44.50	Ave	1.33	45.83	54.00	-8.17
Restricted bands Emission						
2348.96	49.69	PK	-13.19	36.50	74.00	-37.50
2348.96	42.85	Ave	-13.19	29.66	54.00	-24.34
2715.44	52.17	PK	-12.54	39.63	74.00	-34.37
2715.44	47.54	Ave	-12.54	35.00	54.00	-19.00
3337.02	46.82	PK	-10.89	35.93	74.00	-38.07
3337.02	45.19	Ave	-10.89	34.30	54.00	-19.70
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g Middle Channel						
Harmonic & Spurious Emission						
1176.98	44.97	QP	-18.59	26.38	43.50	-17.12
1176.98	46.02	QP	-18.59	27.43	43.50	-16.07
4874.00	48.78	PK	-0.93	47.85	74.00	-26.15
4874.00	45.53	Ave	-0.93	44.60	54.00	-9.40
7311.00	51.52	PK	1.67	53.19	74.00	-20.81
7311.00	44.90	Ave	1.67	46.57	54.00	-7.43
Restricted bands Emission						
2336.49	49.99	PK	-13.19	36.80	74.00	-37.20
2336.49	42.12	Ave	-13.19	28.93	54.00	-25.07
2690.52	52.28	PK	-12.54	39.74	74.00	-34.26
2690.52	47.16	Ave	-12.54	34.62	54.00	-19.38
3337.29	46.92	PK	-10.89	36.03	74.00	-37.97
3337.29	44.40	Ave	-10.89	33.51	54.00	-20.49
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11g High Channel						
Harmonic & Spurious Emission						
1176.98	44.13	QP	-18.59	25.54	43.50	-17.96
1176.98	45.07	QP	-18.59	26.48	43.50	-17.02
4924.00	48.66	PK	-0.87	47.79	74.00	-26.21
4924.00	45.28	Ave	-0.87	44.41	54.00	-9.59
7386.00	52.40	PK	1.84	54.24	74.00	-19.76
7386.00	45.65	Ave	1.84	47.49	54.00	-6.51
Restricted bands Emission						
2332.10	51.79	PK	-13.19	38.60	74.00	-35.40
2332.10	42.04	Ave	-13.19	28.85	54.00	-25.15
2701.30	51.40	PK	-12.54	38.86	74.00	-35.14
2701.30	45.92	Ave	-12.54	33.38	54.00	-20.62
3335.35	47.27	PK	-10.89	36.38	74.00	-37.62
3335.35	43.99	Ave	-10.89	33.10	54.00	-20.90
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20 Low Channel						
Harmonic & Spurious Emission						
1178.39	45.18	QP	-18.59	26.59	43.50	-16.91
1178.39	47.29	QP	-18.59	28.70	43.50	-14.80
4824.00	48.37	PK	-1.06	47.31	74.00	-26.69
4824.00	45.17	Ave	-1.06	44.11	54.00	-9.89
7236.00	50.07	PK	1.33	51.40	74.00	-22.60
7236.00	45.26	Ave	1.33	46.59	54.00	-7.41
Restricted bands Emission						
2311.36	50.22	PK	-13.19	37.03	74.00	-36.97
2311.36	42.92	Ave	-13.19	29.73	54.00	-24.27
2711.84	53.04	PK	-12.54	40.50	74.00	-33.50
2711.84	46.59	Ave	-12.54	34.05	54.00	-19.95
3336.01	46.99	PK	-10.89	36.10	74.00	-37.90
3336.01	45.49	Ave	-10.89	34.60	54.00	-19.40
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20 Middle Channel						
Harmonic & Spurious Emission						
1178.39	45.71	QP	-18.59	27.12	43.50	-16.38
1178.39	46.71	QP	-18.59	28.12	43.50	-15.38
4874.00	48.11	PK	-0.93	47.18	74.00	-26.82
4874.00	45.76	Ave	-0.93	44.83	54.00	-9.17
7311.00	49.00	PK	1.67	50.67	74.00	-23.33
7311.00	43.11	Ave	1.67	44.78	54.00	-9.22
Restricted bands Emission						
2326.86	49.99	PK	-13.19	36.80	74.00	-37.20
2326.86	42.12	Ave	-13.19	28.93	54.00	-25.07
2701.05	52.28	PK	-12.54	39.74	74.00	-34.26
2701.05	47.16	Ave	-12.54	34.62	54.00	-19.38
3334.60	46.92	PK	-10.89	36.03	74.00	-37.97
3334.60	44.40	Ave	-10.89	33.51	54.00	-20.49
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT20 High Channel						
Harmonic & Spurious Emission						
1178.39	44.72	QP	-18.59	26.13	43.50	-17.37
1178.39	46.20	QP	-18.59	27.61	43.50	-15.89
4924.00	48.03	PK	-0.87	47.16	74.00	-26.84
4924.00	46.46	Ave	-0.87	45.59	54.00	-8.41
7386.00	48.04	PK	1.84	49.88	74.00	-24.12
7386.00	43.18	Ave	1.84	45.02	54.00	-8.98
Restricted bands Emission						
2347.78	51.79	PK	-13.19	38.60	74.00	-35.40
2347.78	42.04	Ave	-13.19	28.85	54.00	-25.15
2711.78	51.40	PK	-12.54	38.86	74.00	-35.14
2711.78	45.92	Ave	-12.54	33.38	54.00	-20.62
3337.78	47.27	PK	-10.89	36.38	74.00	-37.62
3337.78	43.99	Ave	-10.89	33.10	54.00	-20.90
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT40 Low Channel						
Harmonic & Spurious Emission						
1174.92	46.40	QP	-18.59	27.81	43.50	-15.69
1174.92	46.16	QP	-18.59	27.57	43.50	-15.93
4844.00	45.80	PK	-1.06	44.74	74.00	-29.26
4844.00	44.31	Ave	-1.06	43.25	54.00	-10.75
7266.00	46.82	PK	1.33	48.15	74.00	-25.85
7266.00	42.16	Ave	1.33	43.49	54.00	-10.51
Restricted bands Emission						
2344.39	50.11	PK	-13.19	36.92	74.00	-37.08
2344.39	42.79	Ave	-13.19	29.60	54.00	-24.40
2694.34	51.99	PK	-12.54	39.45	74.00	-34.55
2694.34	46.44	Ave	-12.54	33.90	54.00	-20.10
3334.01	47.85	PK	-10.89	36.96	74.00	-37.04
3334.01	44.51	Ave	-10.89	33.62	54.00	-20.38
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						



Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT40 Middle Channel						
Harmonic & Spurious Emission						
1174.92	46.93	QP	-18.59	28.34	43.50	-15.16
1174.92	46.49	QP	-18.59	27.90	43.50	-15.60
4874.00	46.61	PK	-0.93	45.68	74.00	-28.32
4874.00	43.63	Ave	-0.93	42.70	54.00	-11.30
7311.00	46.12	PK	1.67	47.79	74.00	-26.21
7311.00	42.35	Ave	1.67	44.02	54.00	-9.98
Restricted bands Emission						
2336.60	49.99	PK	-13.19	36.80	74.00	-37.20
2336.60	42.12	Ave	-13.19	28.93	54.00	-25.07
2693.07	52.28	PK	-12.54	39.74	74.00	-34.26
2693.07	47.16	Ave	-12.54	34.62	54.00	-19.38
3334.42	46.92	PK	-10.89	36.03	74.00	-37.97
3334.42	44.40	Ave	-10.89	33.51	54.00	-20.49
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n HT40 High Channel						
Harmonic & Spurious Emission						
1174.92	47.70	QP	-18.59	29.11	43.50	-14.39
1174.92	44.84	QP	-18.59	26.25	43.50	-17.25
4904.00	46.67	PK	-0.87	45.80	74.00	-28.20
4904.00	44.19	Ave	-0.87	43.32	54.00	-10.68
7356.00	47.97	PK	1.84	49.81	74.00	-24.19
7356.00	41.46	Ave	1.84	43.30	54.00	-10.70
Restricted bands Emission						
2338.96	51.79	PK	-13.19	38.60	74.00	-35.40
2338.96	42.04	Ave	-13.19	28.85	54.00	-25.15
2708.56	51.40	PK	-12.54	38.86	74.00	-35.14
2708.56	45.92	Ave	-12.54	33.38	54.00	-20.62
3337.15	47.27	PK	-10.89	36.38	74.00	-37.62
3337.15	43.99	Ave	-10.89	33.10	54.00	-20.90
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

**Radiated band edge:**

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
<b>GFSK(BLE)</b>						
2400.00	48.92	PK	-13.12	35.80	74.00	-38.20
2400.00	41.64	PK	-13.12	28.52	74.00	-45.48
2483.50	46.82	PK	-13.06	33.76	74.00	-40.24
2483.50	43.28	PK	-13.06	30.22	74.00	-43.78
<b>802.11b</b>						
2400.00	49.17	PK	-13.12	36.05	74.00	-37.95
2400.00	40.85	PK	-13.12	27.73	74.00	-46.27
2483.50	48.80	PK	-13.06	35.74	74.00	-38.26
2483.50	43.49	PK	-13.06	30.43	74.00	-43.57
<b>802.11g</b>						
2400.00	49.96	PK	-13.12	36.84	74.00	-37.16
2400.00	39.86	PK	-13.12	26.74	74.00	-47.26
2483.50	48.78	PK	-13.06	35.72	74.00	-38.28
2483.50	43.06	PK	-13.06	30.00	74.00	-44.00
<b>802.11n HT20</b>						
2400.00	50.02	PK	-13.12	36.90	74.00	-37.10
2400.00	39.36	PK	-13.12	26.24	74.00	-47.76
2483.50	48.84	PK	-13.06	35.78	74.00	-38.22
2483.50	42.43	PK	-13.06	29.37	74.00	-44.63
<b>802.11n HT40</b>						
2400.00	50.86	PK	-13.12	37.74	74.00	-36.26
2400.00	37.97	PK	-13.12	24.85	74.00	-49.15
2483.50	48.43	PK	-13.06	35.37	74.00	-38.63
2483.50	41.76	PK	-13.06	28.70	74.00	-45.30

**Test Frequency: Above 18GHz**

The measurements were more than 30 dB below the limit and not reported

Remark : 1. The wifi testing has been conformed to  $10 \times 2472 = 24720$  MHz.  
 2. The BLE testing has been conformed to  $10 \times 2480 = 24800$  MHz.  
 3. All other emissions more than 20dB below the limit

## 7 Band Edge Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05
- Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
- Test Mode : Refer to section 3.3

### 7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Mode	Band edge	Value	Limit	Result
BLE	Left	-48.57	-13.42	Pass
	Right	-48.67	-15.01	Pass
802.11b	Left	-56.19	-23.75	Pass
	Right	-55.51	-23.95	Pass
802.11g	Left	-52.21	-31.75	Pass
	Right	-56.96	-32.55	Pass
802.11n HT20	Left	-55.50	-33.04	Pass
	Right	-56.74	-33.00	Pass
802.11n HT40	Left	-54.52	-35.43	Pass
	Right	-57.33	-35.56	Pass
Remark:				
The limit is 20dB below the maximum peak level, please refer to the display line of the follow plot				

## 7.2 Test Result


GFSK(BLE) Band edge-left side

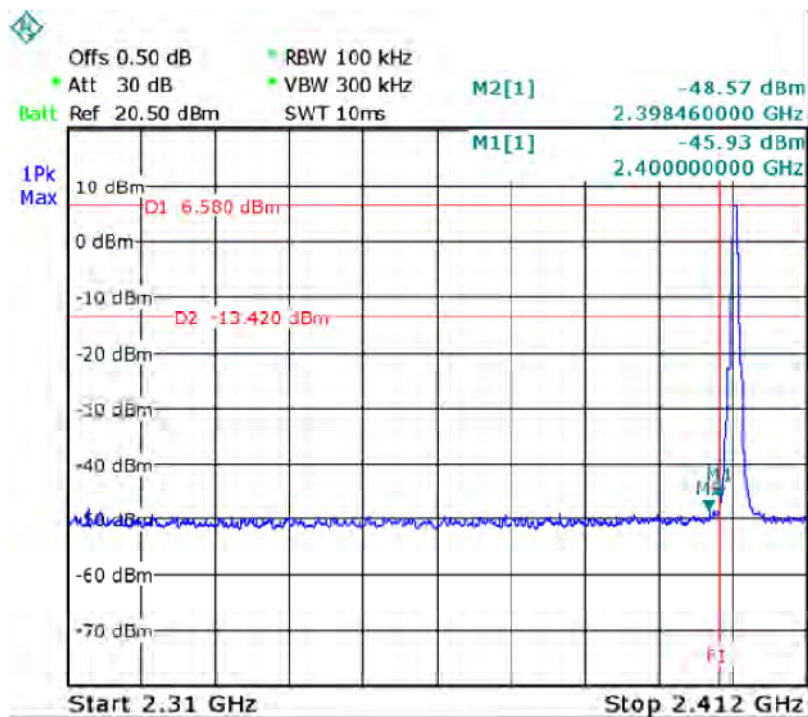


GFSK(BLE) Band edge-right side

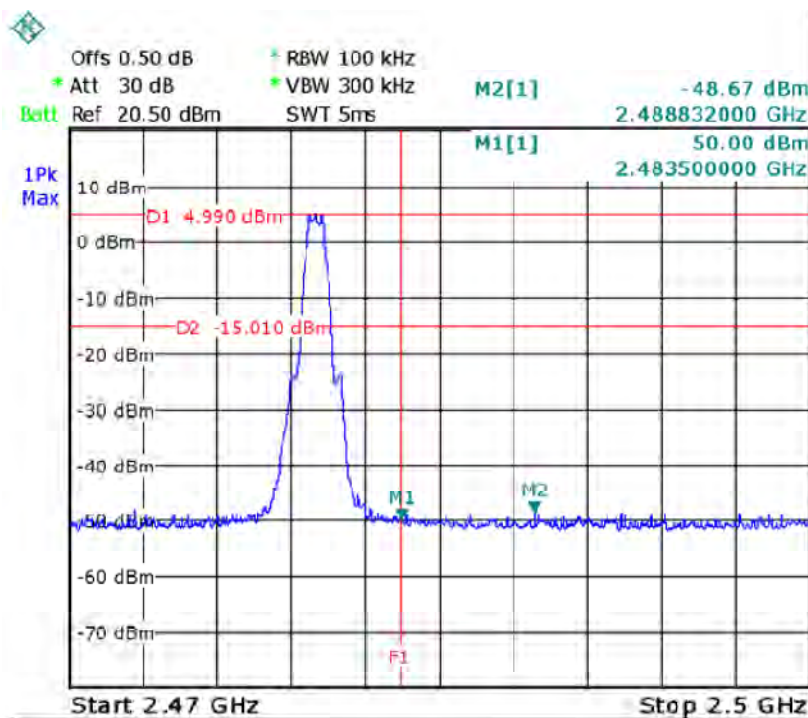


802.11b Band edge-left side

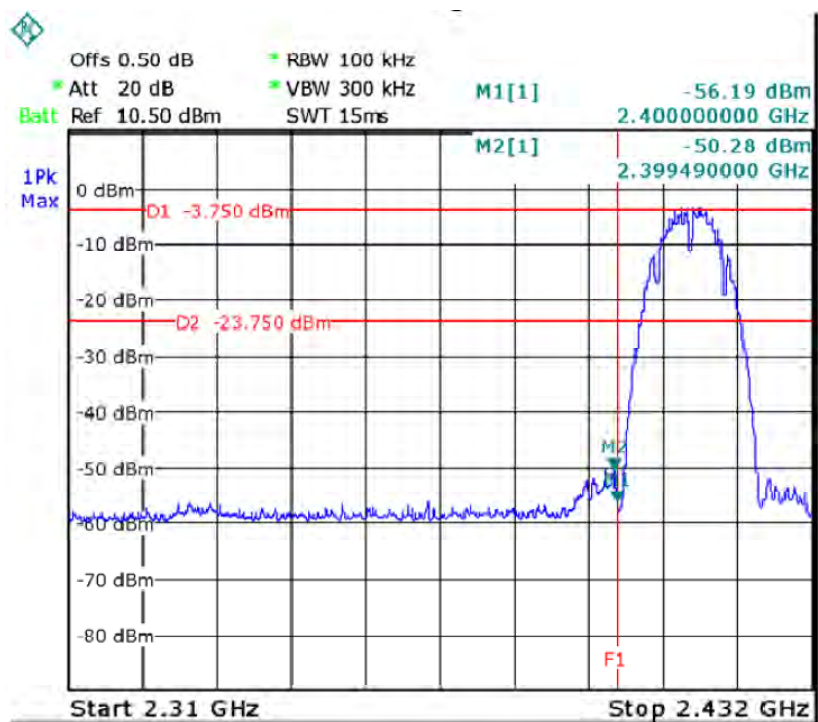


802.11b Band edge-right side

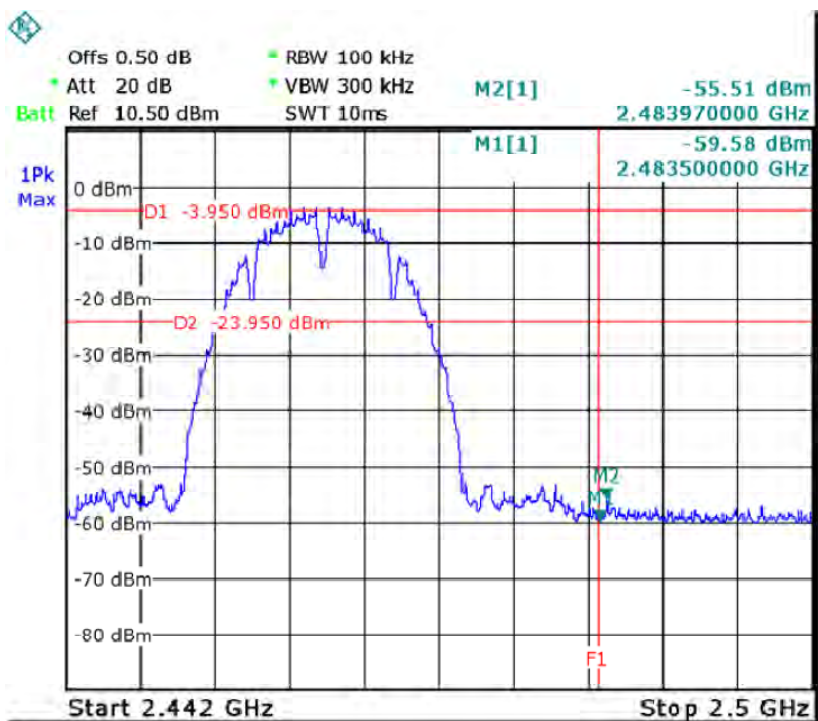

802.11g Band edge-left side

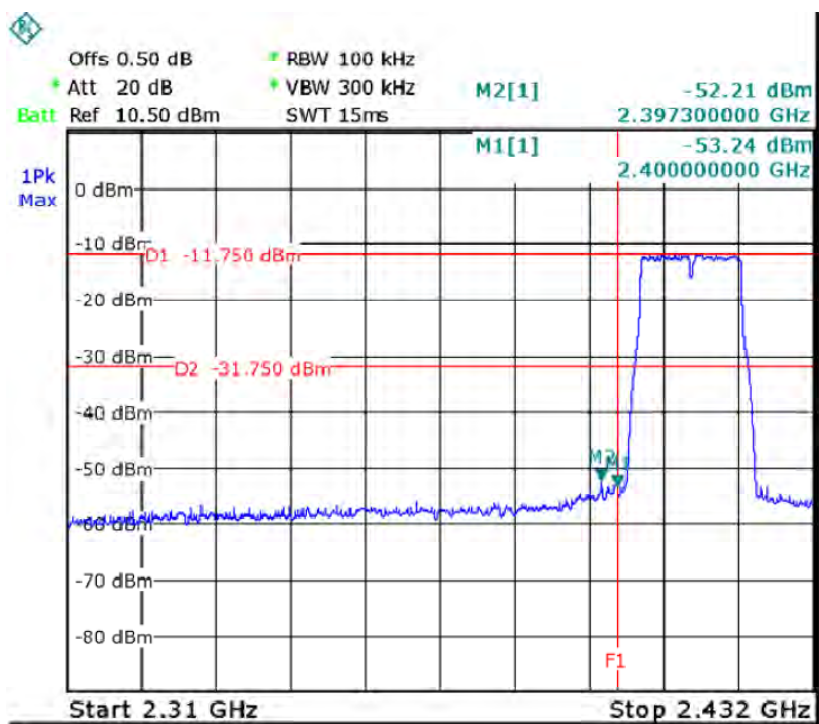


802.11g Band edge-right side

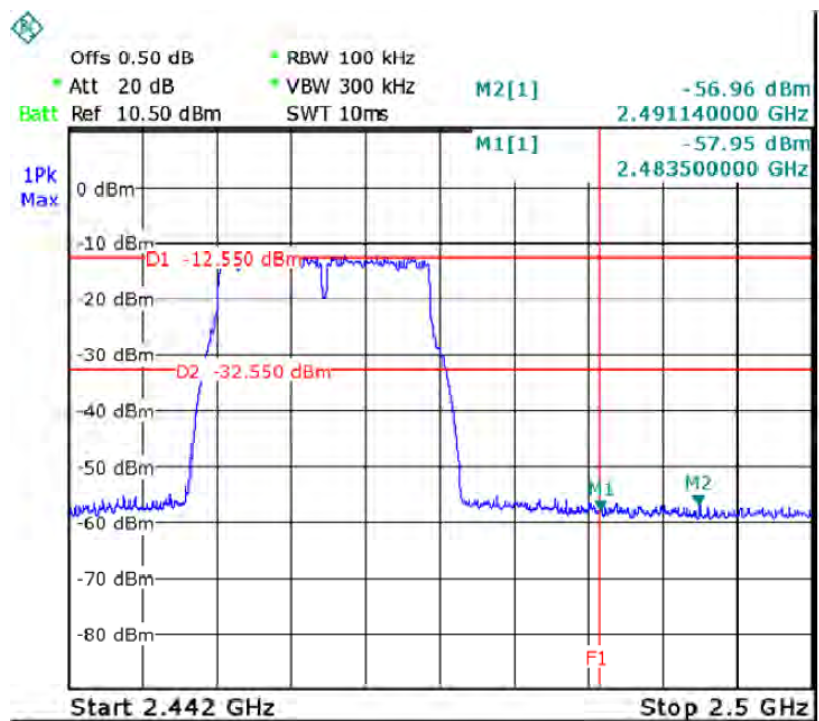




802.11n-HT20 Band edge-left side

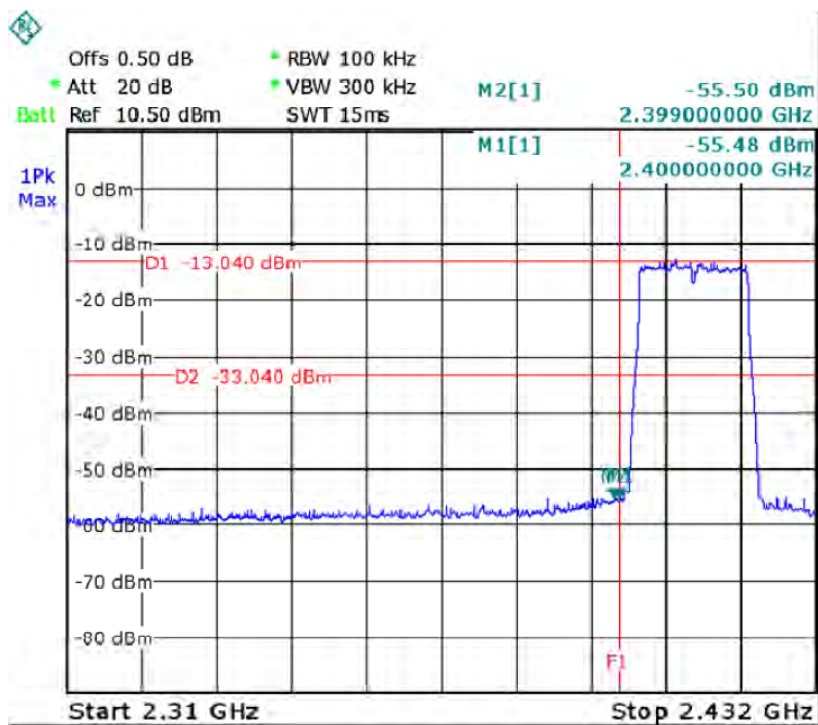


802.11n-HT20 Band edge-right side

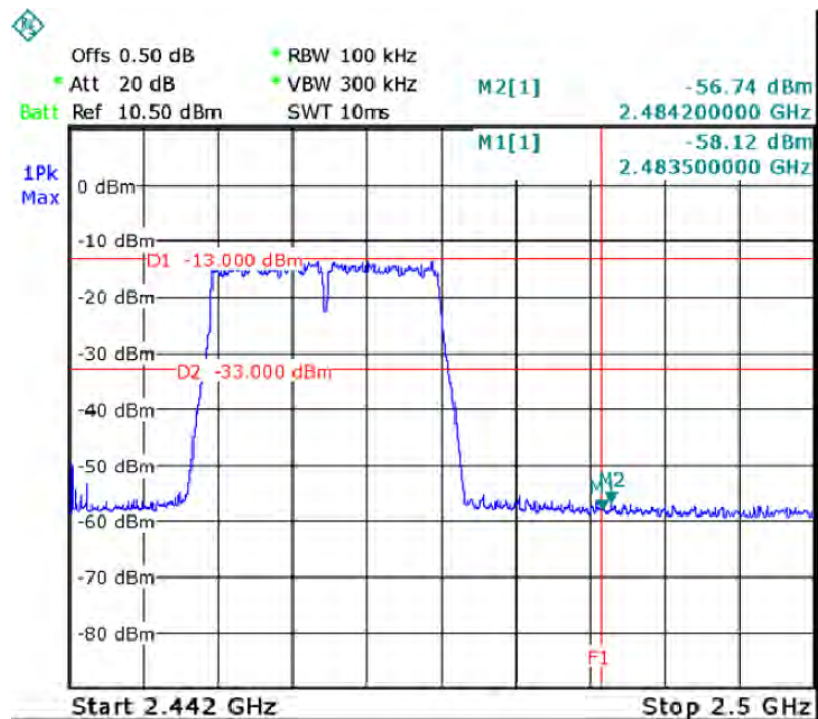




802.11n-HT40 Band edge-left side

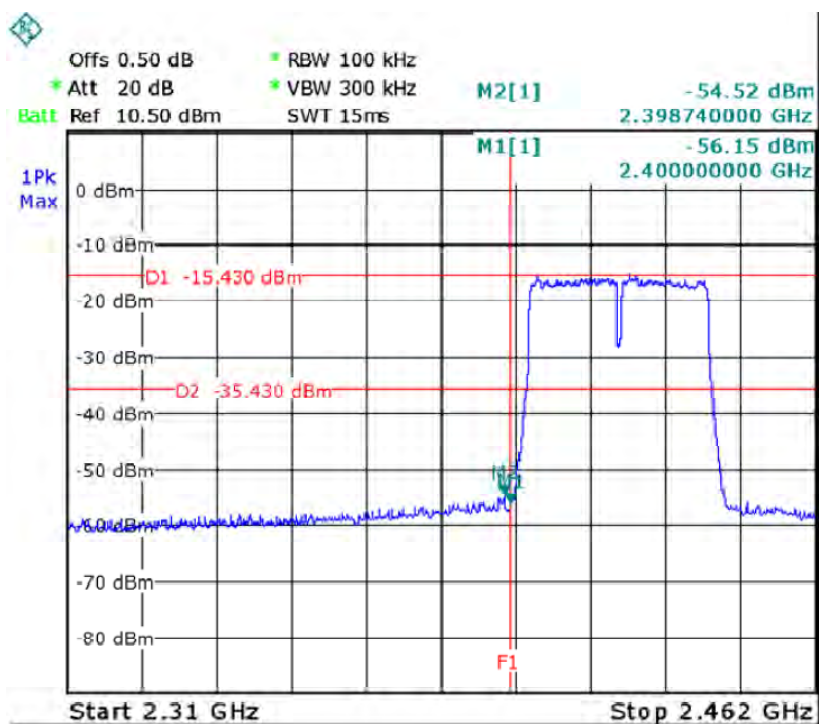

802.11n-HT40 Band edge-right side

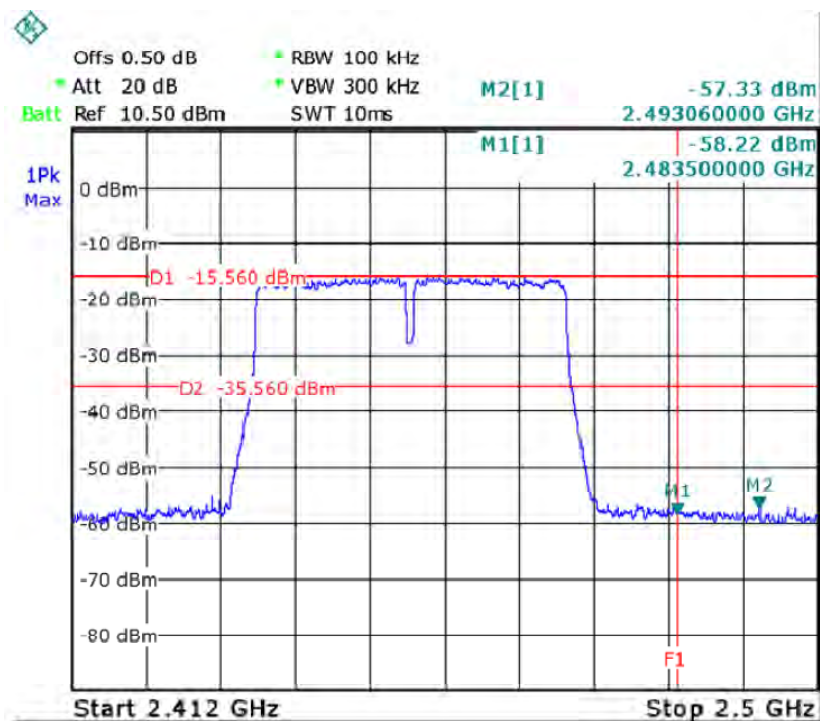

## 8 6dB Bandwidth Measurement

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05
Test Limit	Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Mode	: Refer to section 3.3


### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: For BLE, RBW = 30kHz, VBW = 100kHz, For WIFI, RBW = 100kHz, VBW = 300kHz,


### 8.2 Test Result

Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	0.719	0.719	0.719	≥500kHz
802.11b	10.06	10.06	10.06	≥500kHz
802.11g	16.62	16.62	16.62	≥500kHz
802.11n-HT20	17.84	17.84	17.84	≥500kHz
802.11n-HT40	36.56	36.56	36.56	≥500kHz


### GFSK(BLE) Low Channel

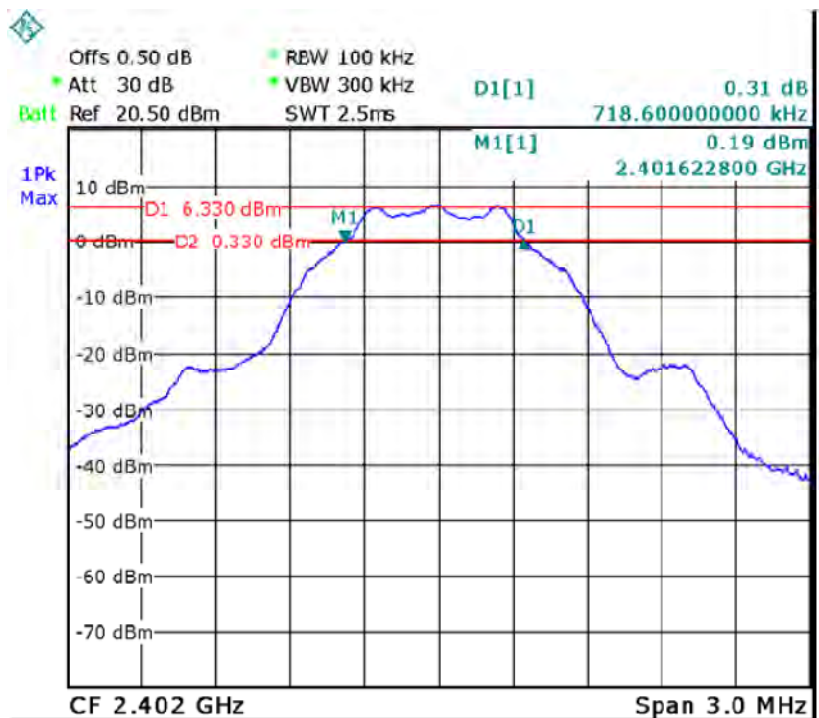


### GFSK(BLE) Middle Channel

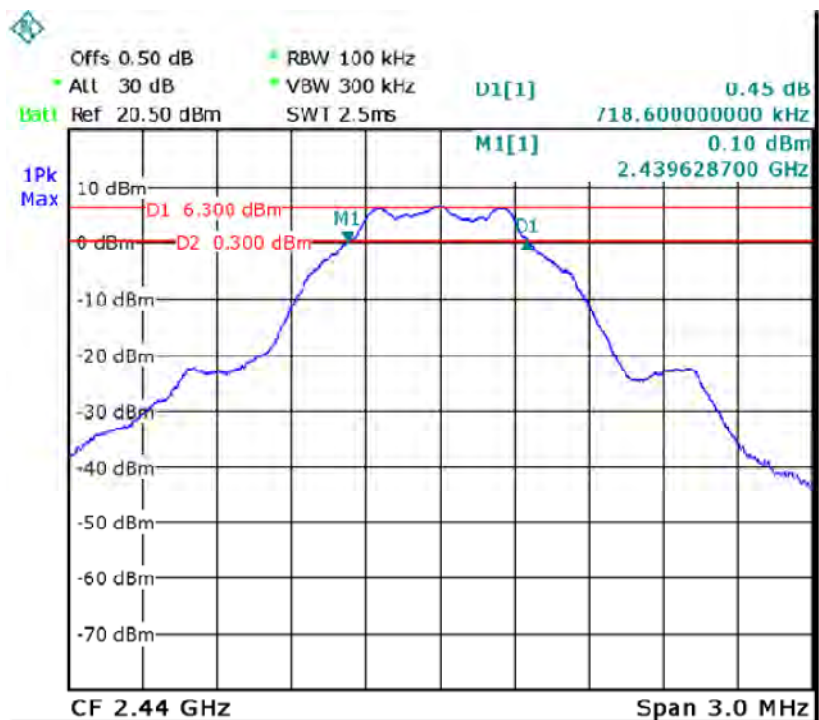


### GFSK(BLE) High Channel

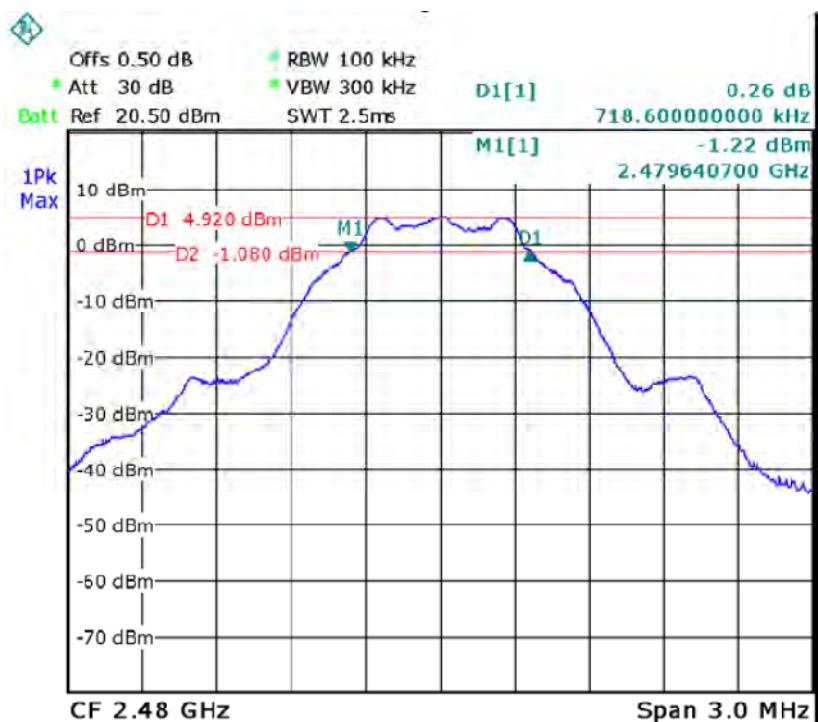


### 802.11b Low Channel

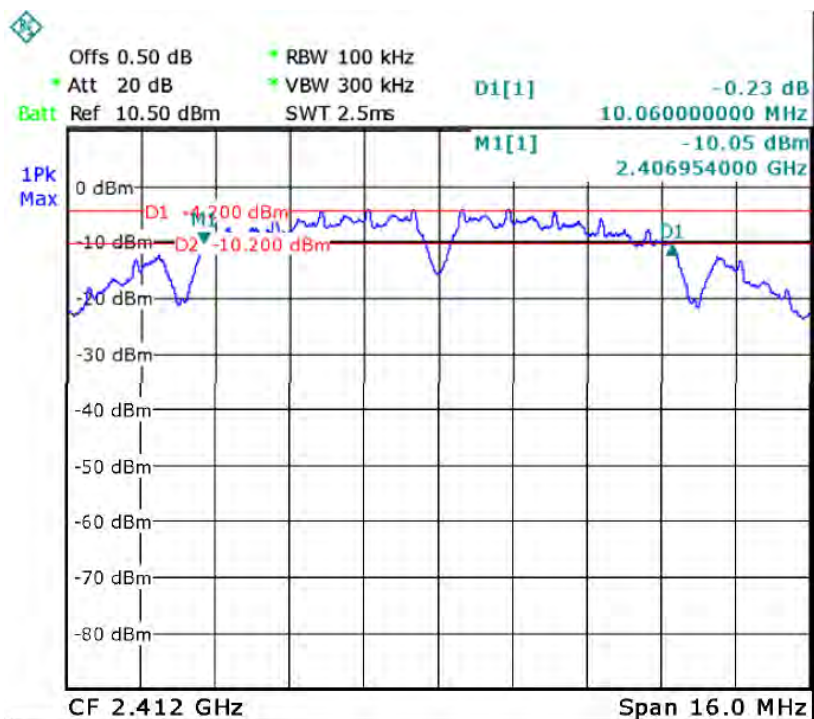

### 802.11b Middle Channel

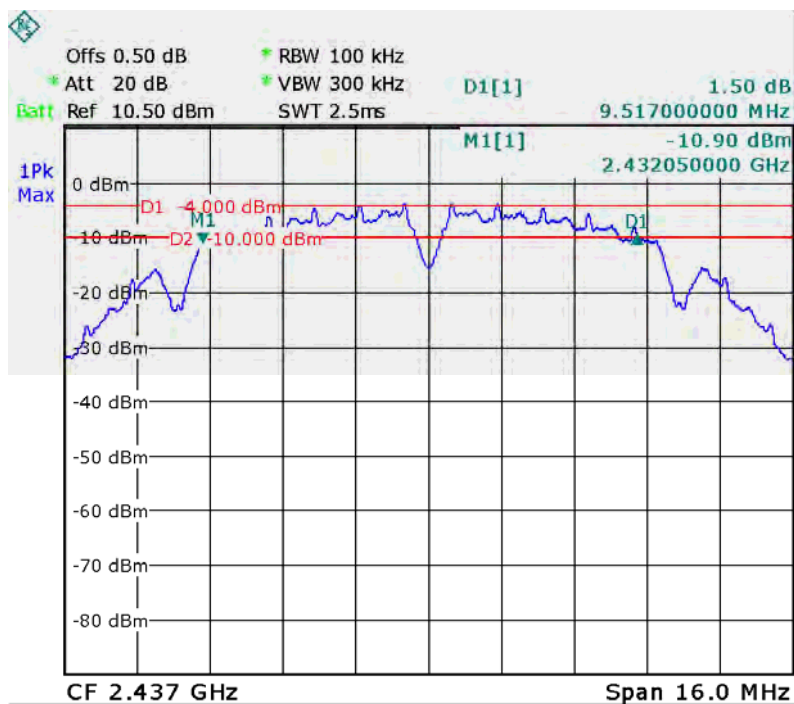


### 802.11b High Channel

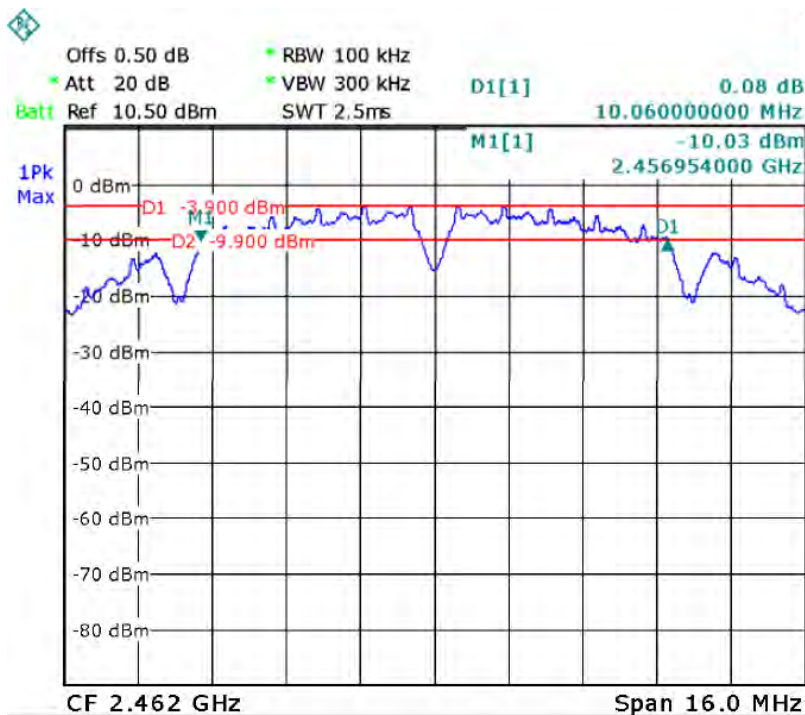





### 802.11g Low Channel

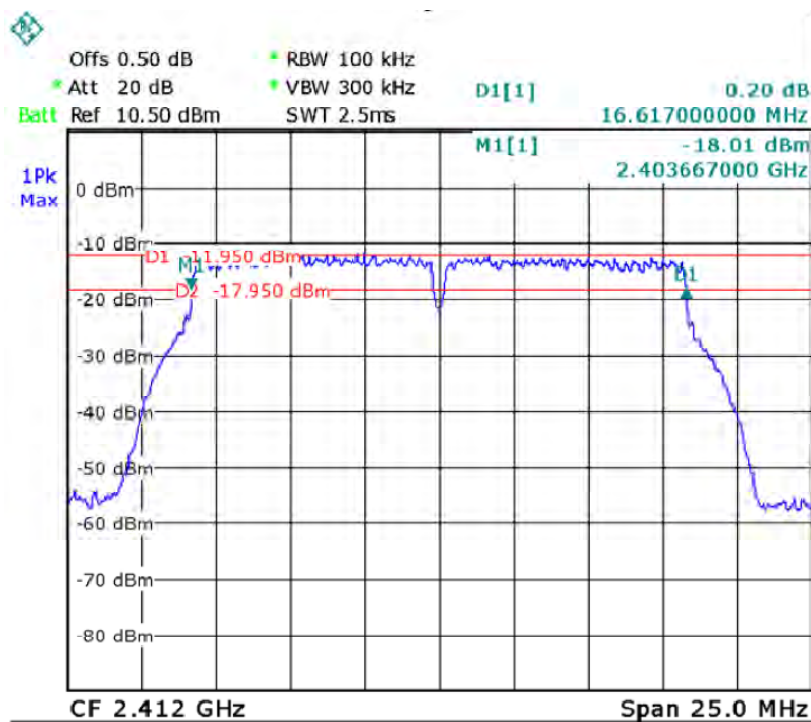


### 802.11g Middle Channel

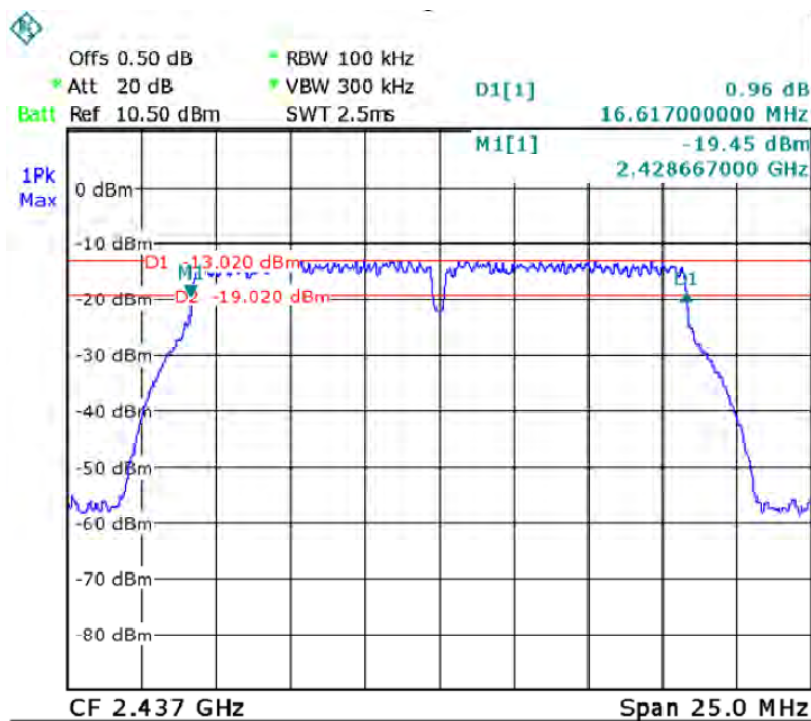


### 802.11g High Channel

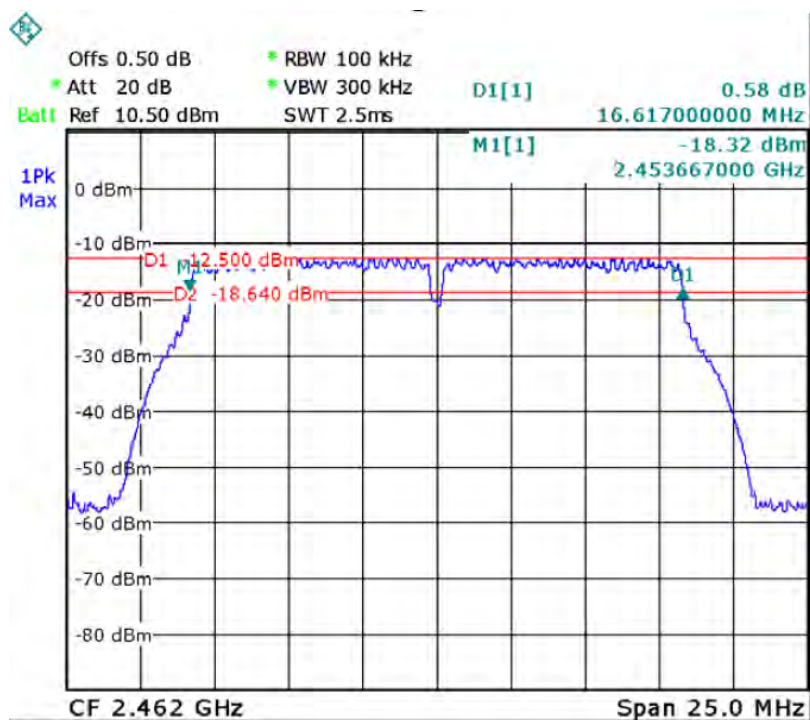


### 802.11n-HT20 Low Channel

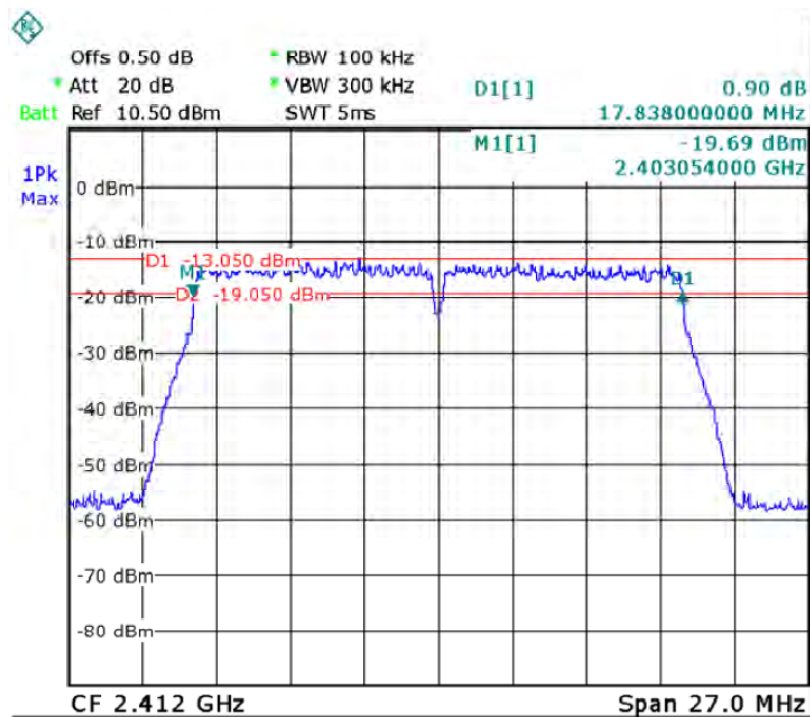

802.11n-HT20 Middle Channel

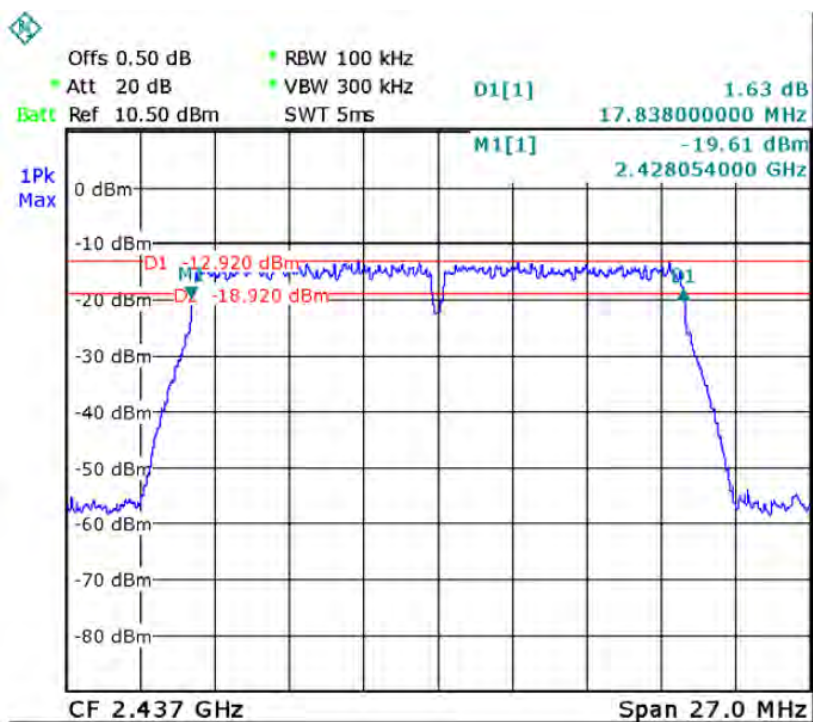


802.11n-HT20 High Channel

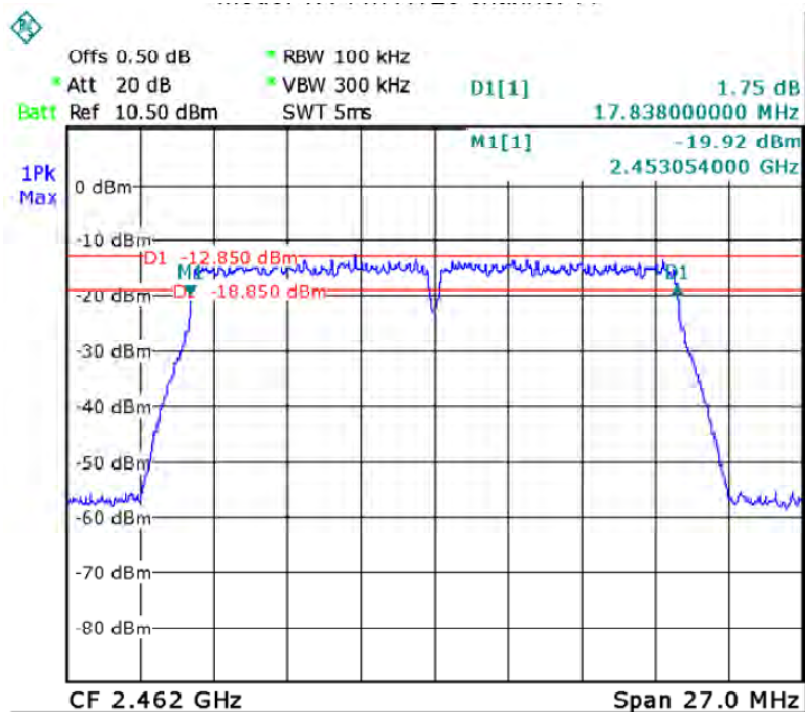





### 802.11n-HT40 Low Channel

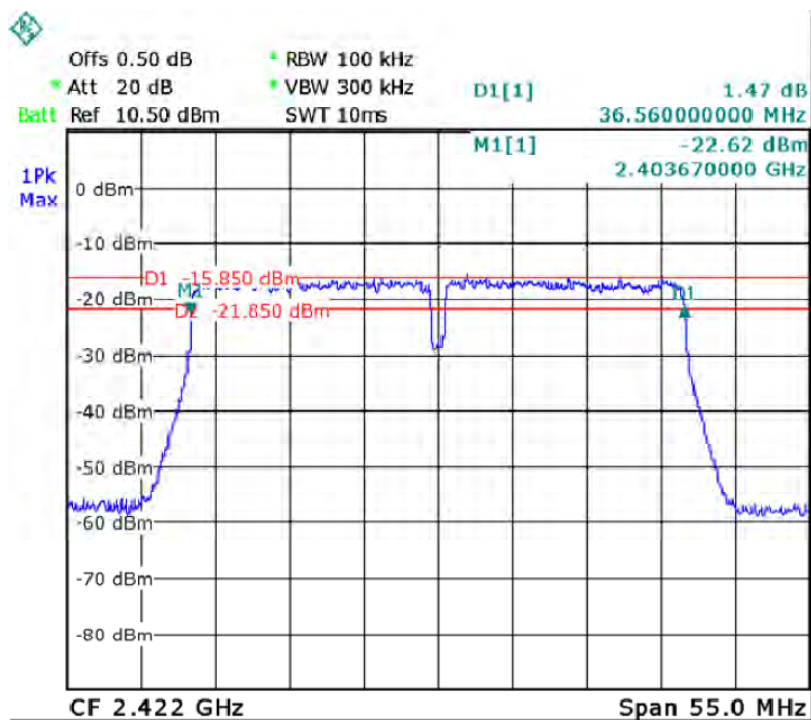

### 802.11n-HT40 Middle Channel

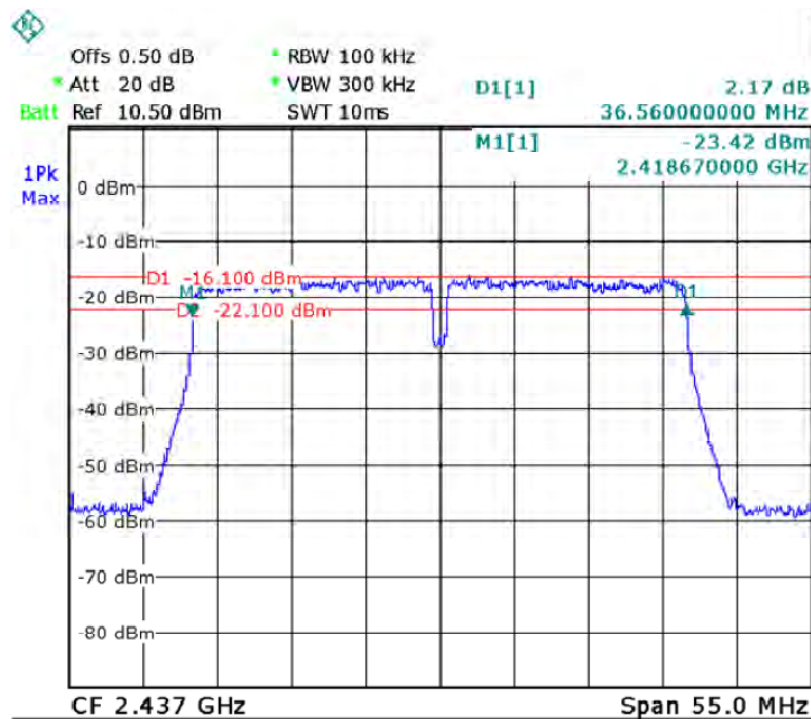

802.11n-HT40 High Channel

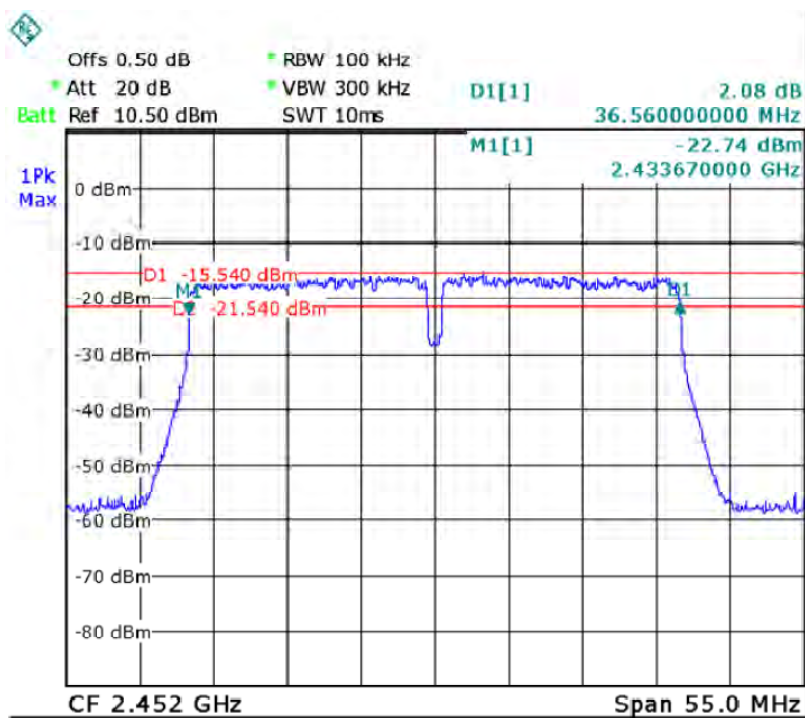

## 9 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
Test Mode	: Refer to section 3.3

### 9.1 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r05

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq$  3 RBW.
- c) Set span  $\geq$  3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


section 9.1.2 (For WIFI)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.


## 9.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	7.20	7.11	5.75	1W(30dBm)
802.11b	9.22	9.48	9.17	1W(30dBm)
802.11g	9.43	9.24	9.26	1W(30dBm)
802.11n-HT20	9.21	9.18	9.28	1W(30dBm)
802.11n-HT40	9.27	9.11	9.35	1W(30dBm)


### GFSK(BLE) Low Channel

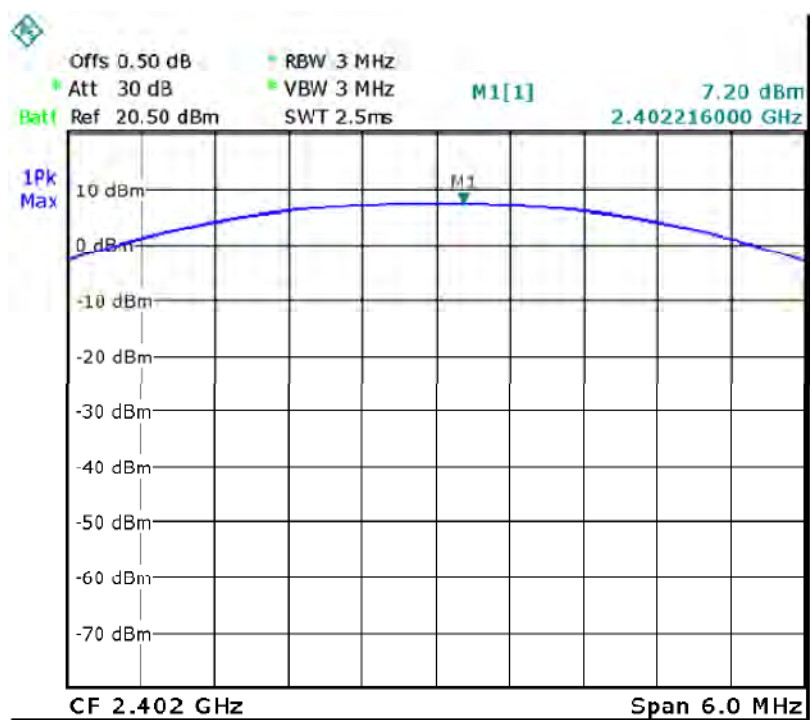

### GFSK(BLE) Middle Channel

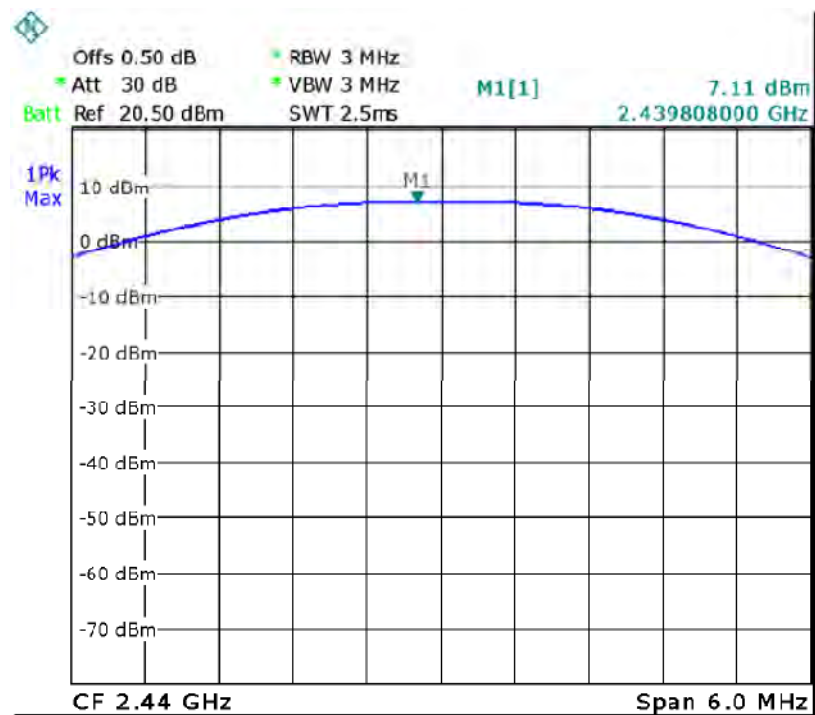

GFSK(BLE) High Channel

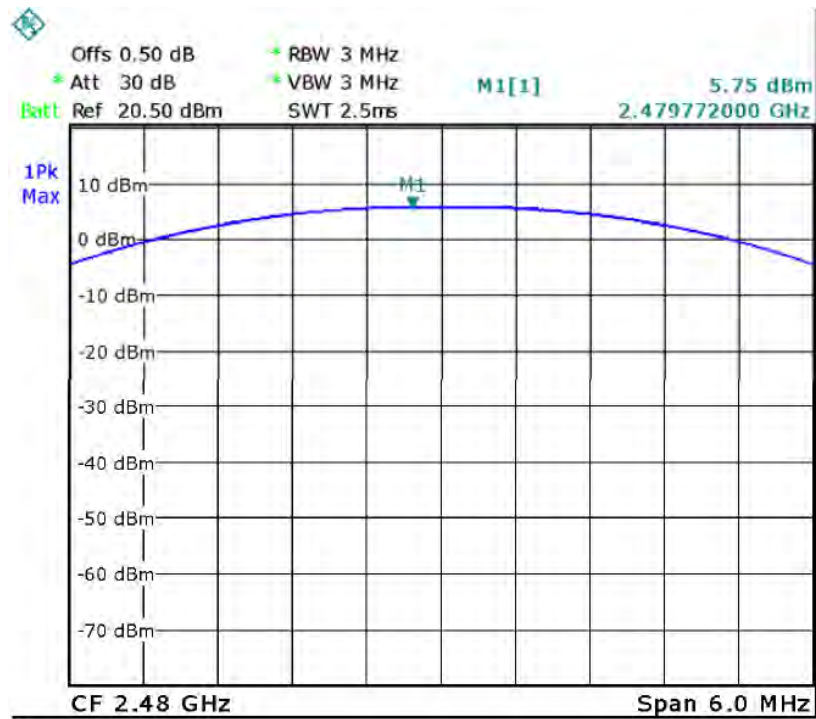

802.11b Low Channel

## 10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, KDB 558074 D01 DTS MEAS GUIDANCE V03R05
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Test Mode	: Refer to section 3.3

### 10.1 Test Procedure


KDB 558074 D01 DTS Meas Guidance v03r05

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


### 10.2 Test Result

Modulation	Power Spectral density ( dBm/3kHz )			Limit
	Low Channel	Middle Channel	High Channel	
GFSK(BLE)	-7.75	-7.68	-9.05	8dBm/3kHz
802.11b	-22.13	-22.44	-22.33	8dBm/3kHz
802.11g	-26.01	-27.48	-26.76	8dBm/3kHz
802.11n-HT20	-27.15	-27.45	-26.84	8dBm/3kHz
802.11n-HT40	-23.89	-23.37	-24.64	8dBm/3kHz

### GFSK(BLE) Low Channel

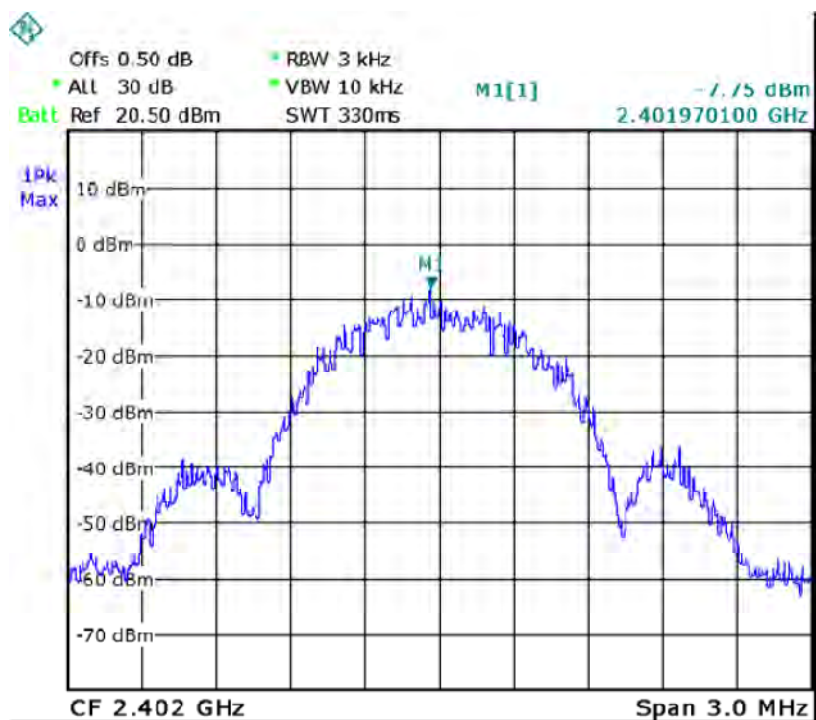


### GFSK(BLE) Middle Channel

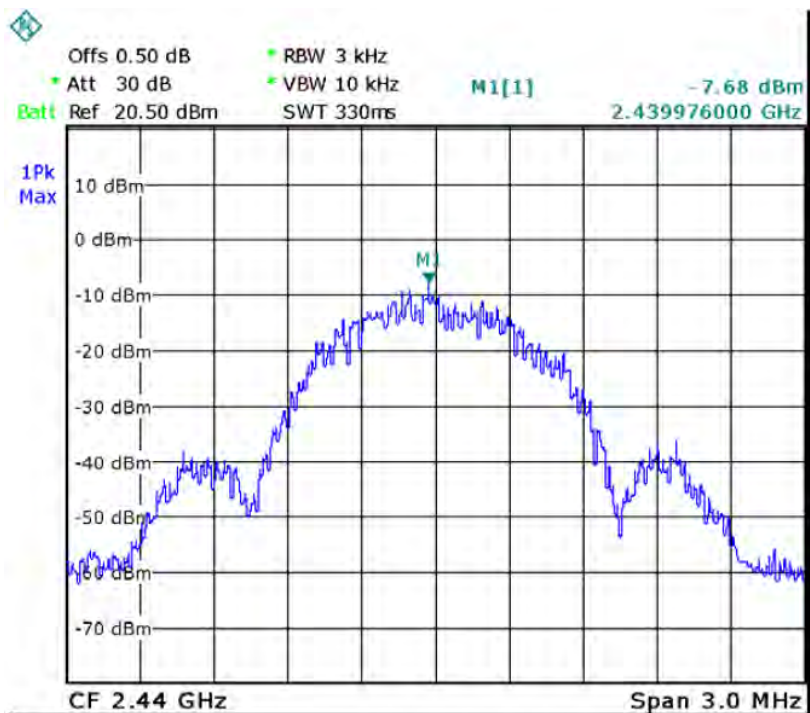





### GFSK(BLE) High Channel

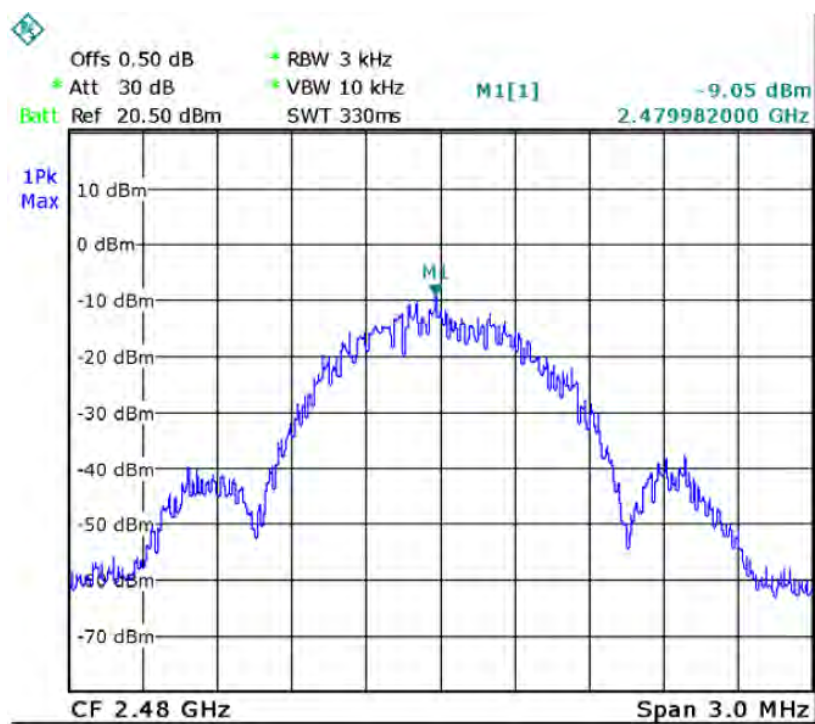


### 802.11b Low Channel

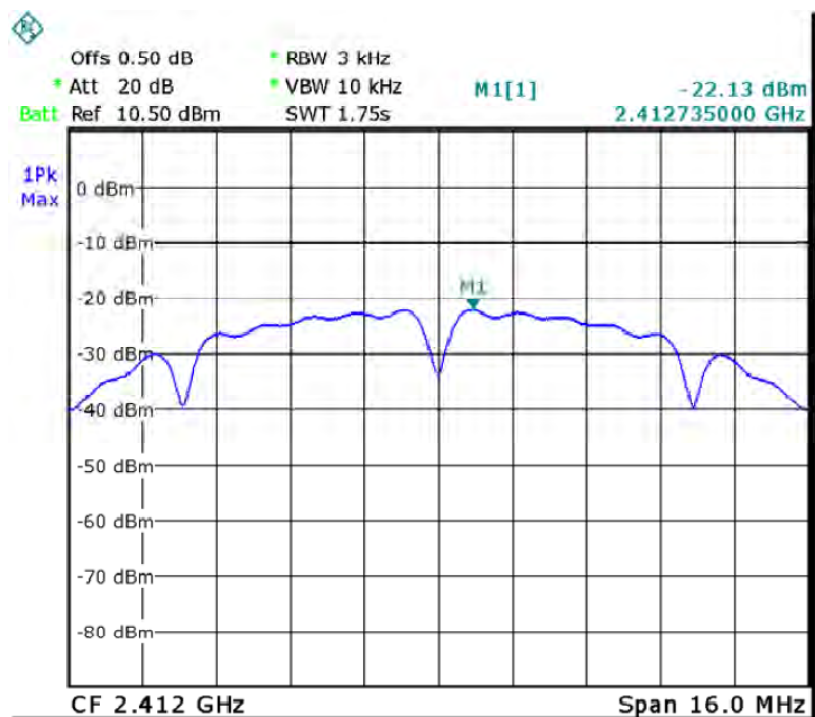


### 802.11b Middle Channel

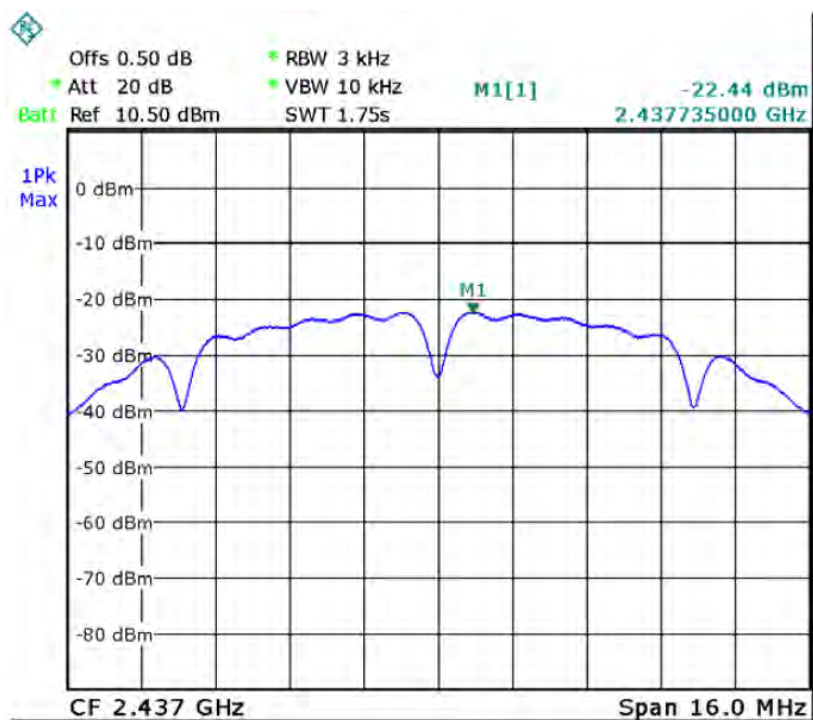


### 802.11b High Channel

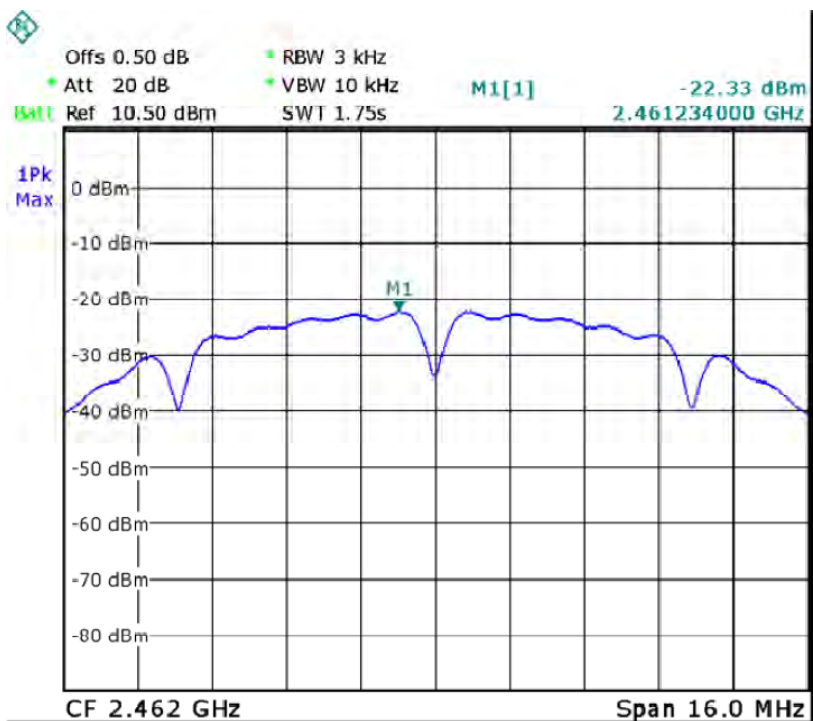


### 802.11g Low Channel

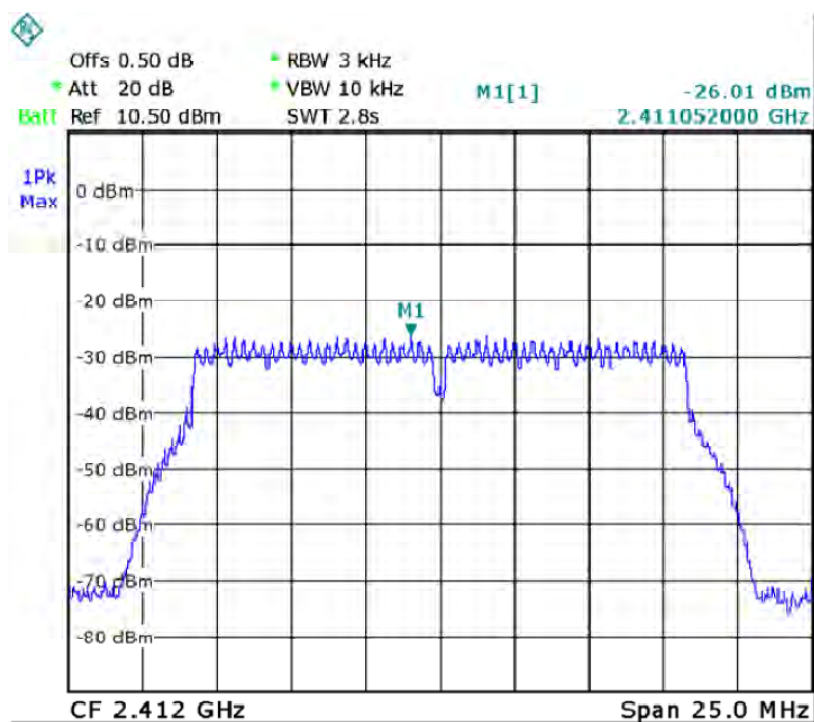


### 802.11g Middle Channel

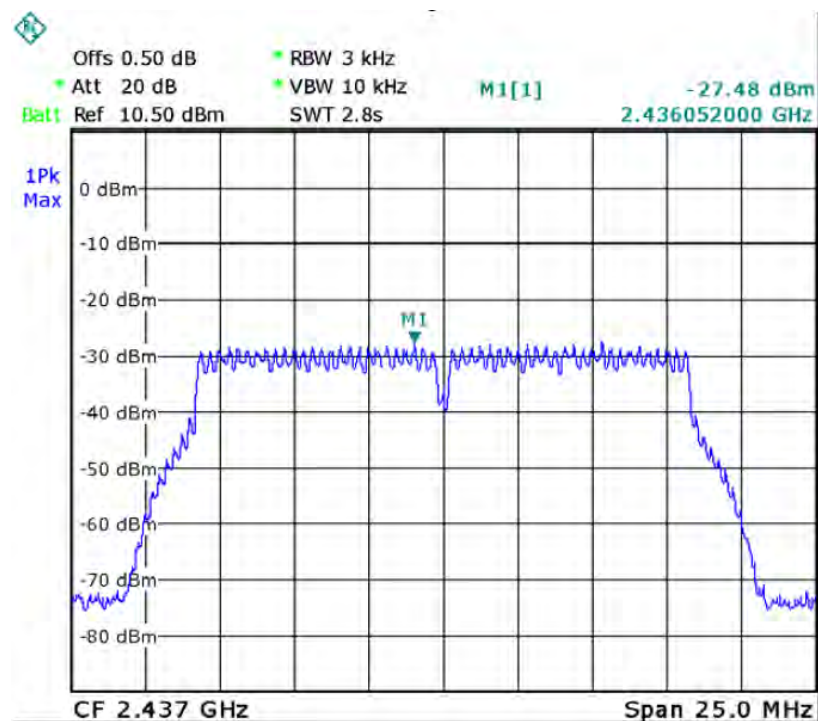


### 802.11g High Channel

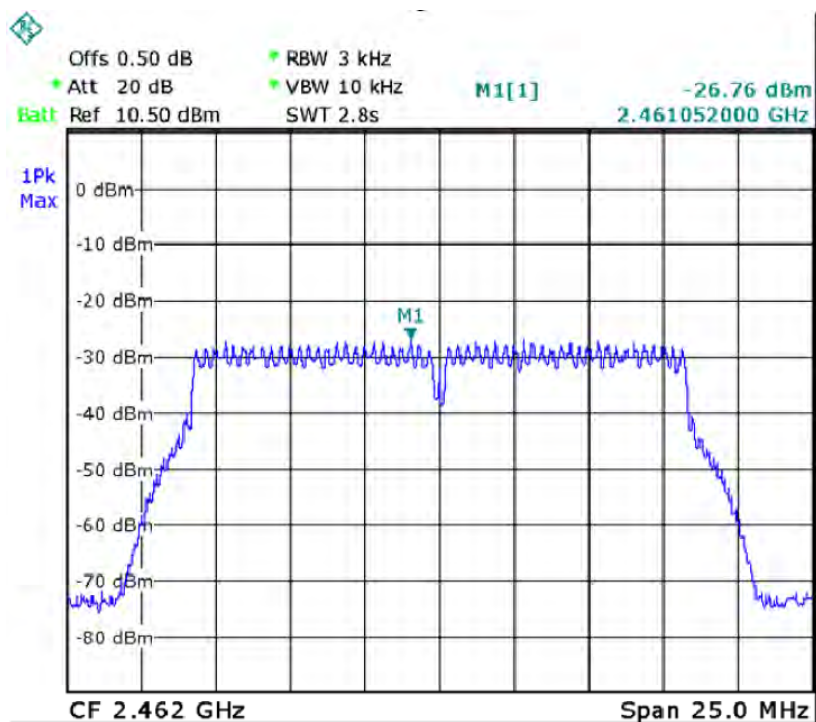


### 802.11n-HT20 Low Channel

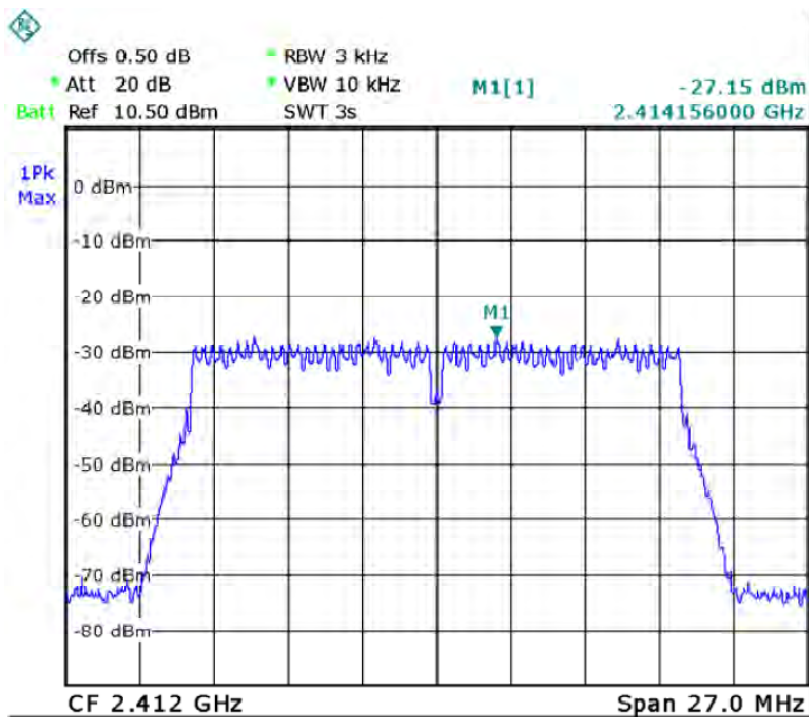


### 802.11n-HT20 Middle Channel

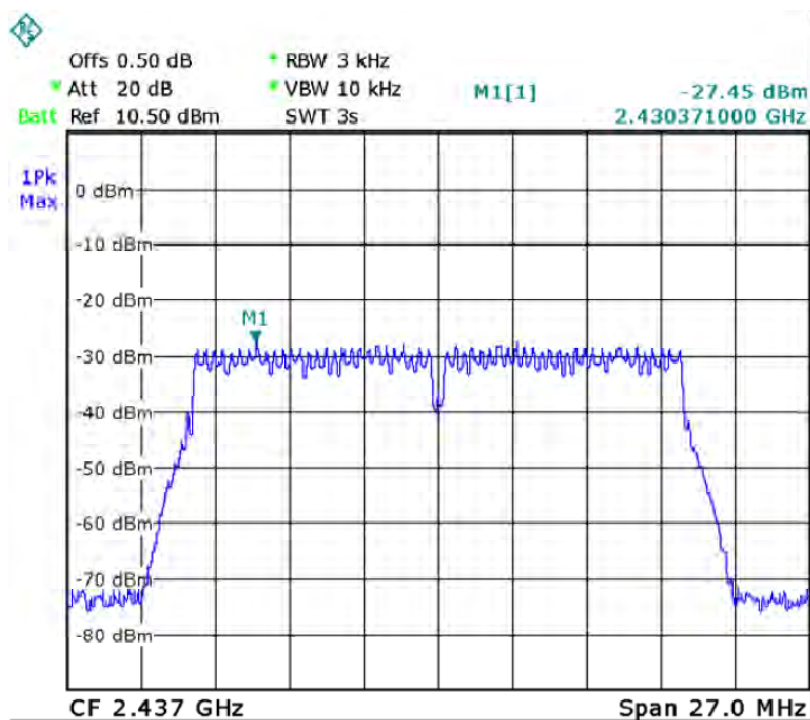


### 802.11n-HT20 High Channel

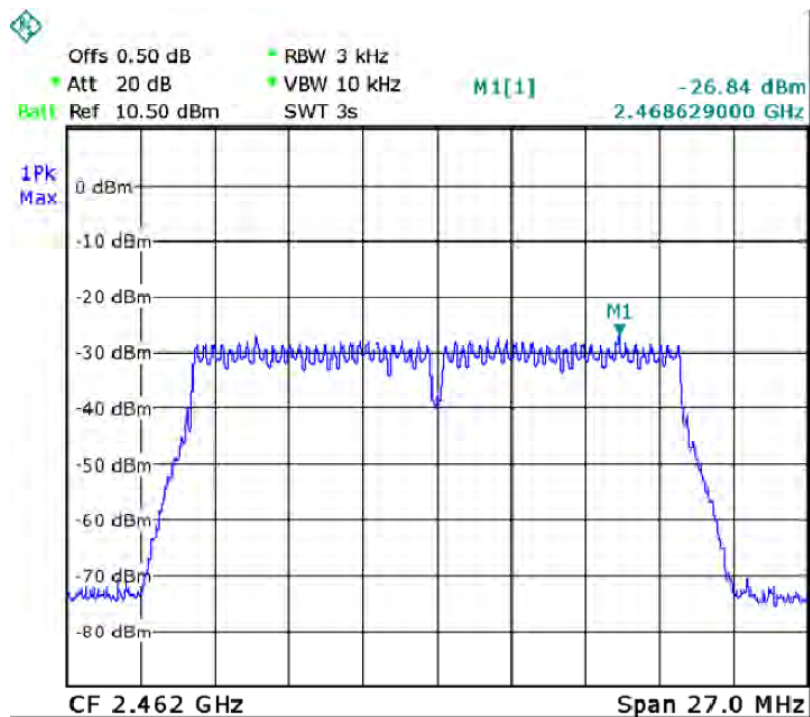

### 802.11n-HT40 Low Channel

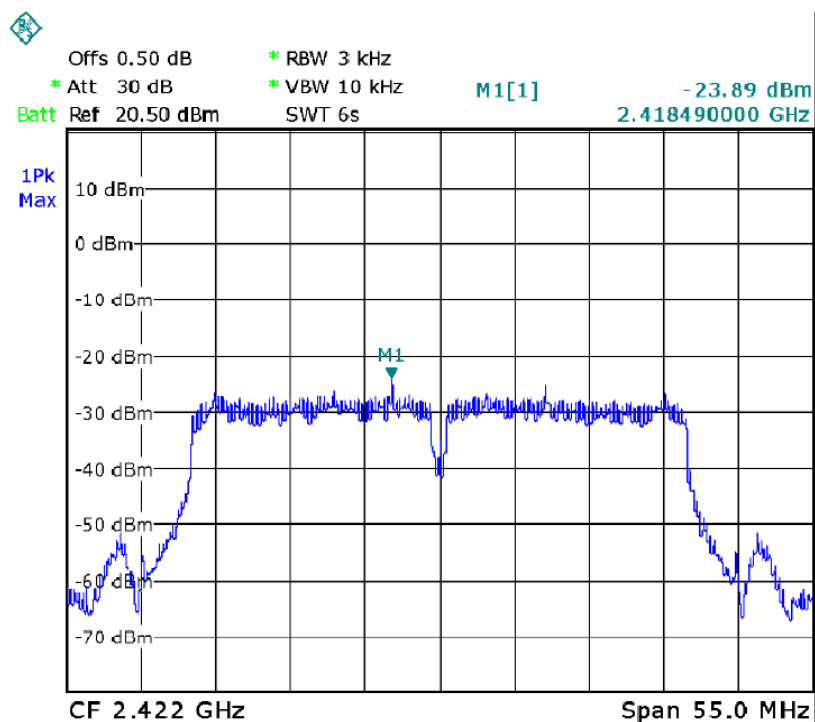


### 802.11n-HT40 Middle Channel

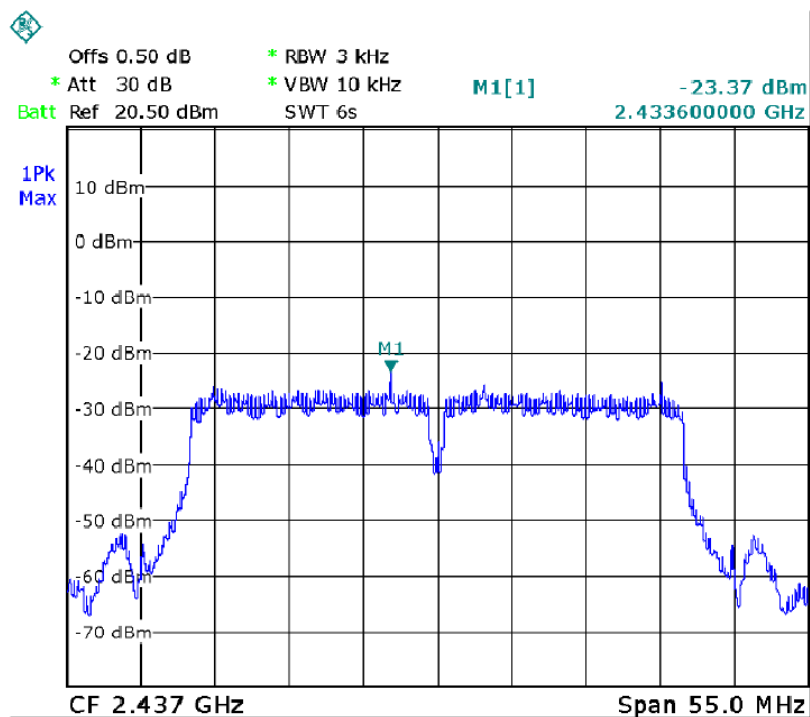



802.11n-HT40 High Channel

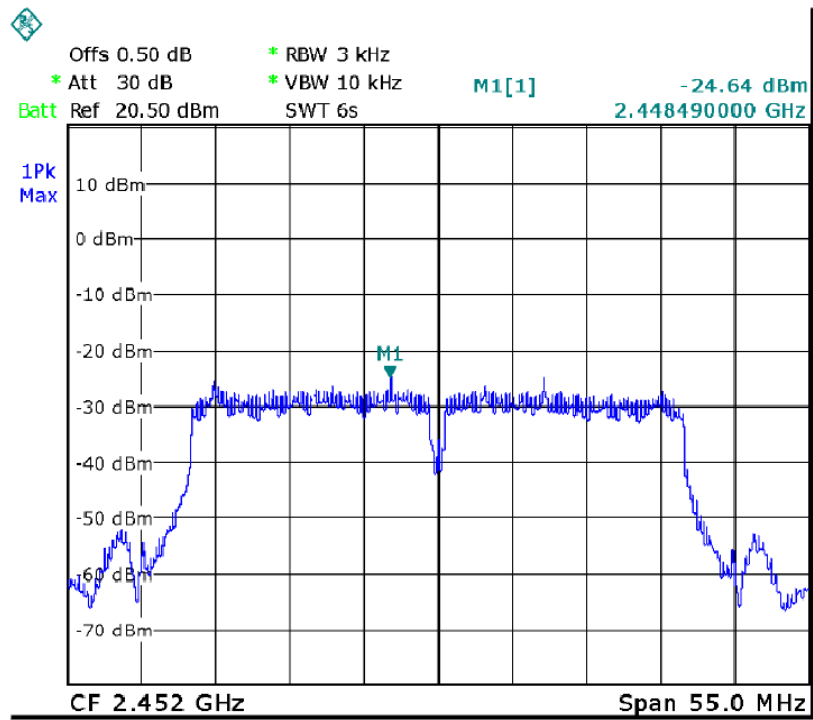

## 11 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Result: PASS

Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold




### BLE Low Channel

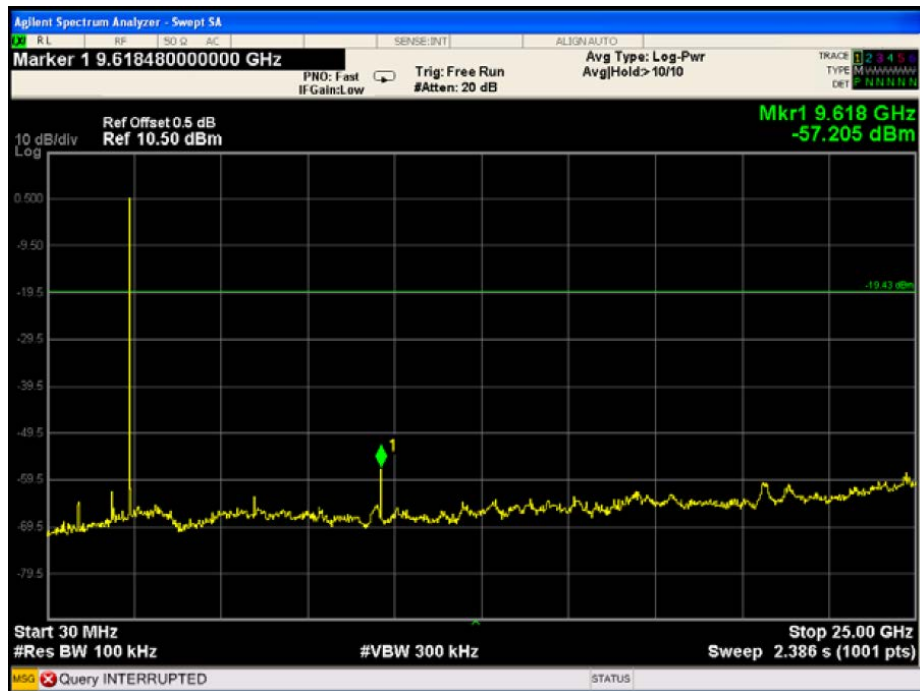

### BLE Middle Channel

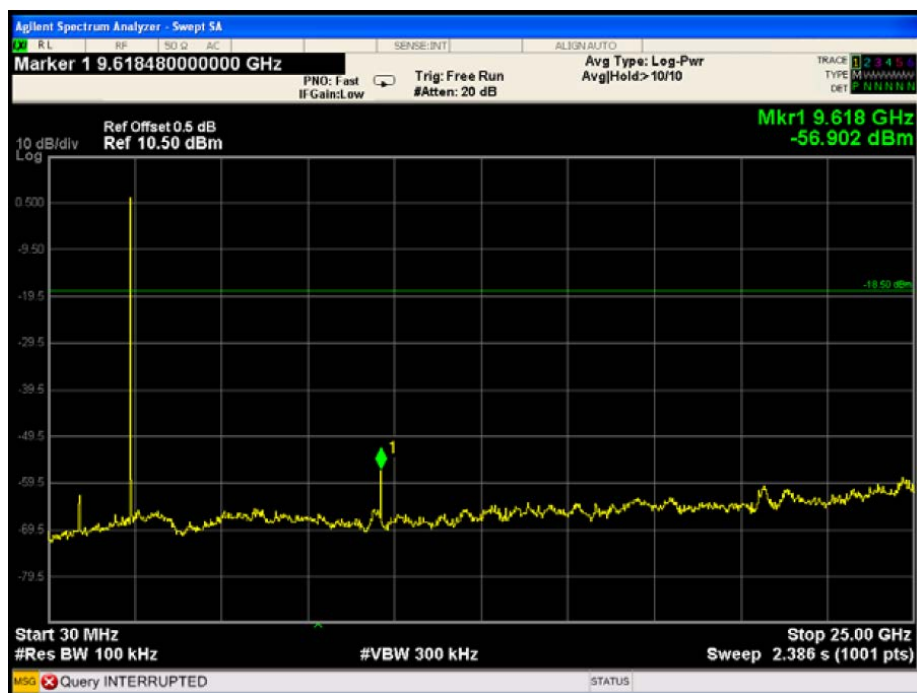

### BLE High Channel

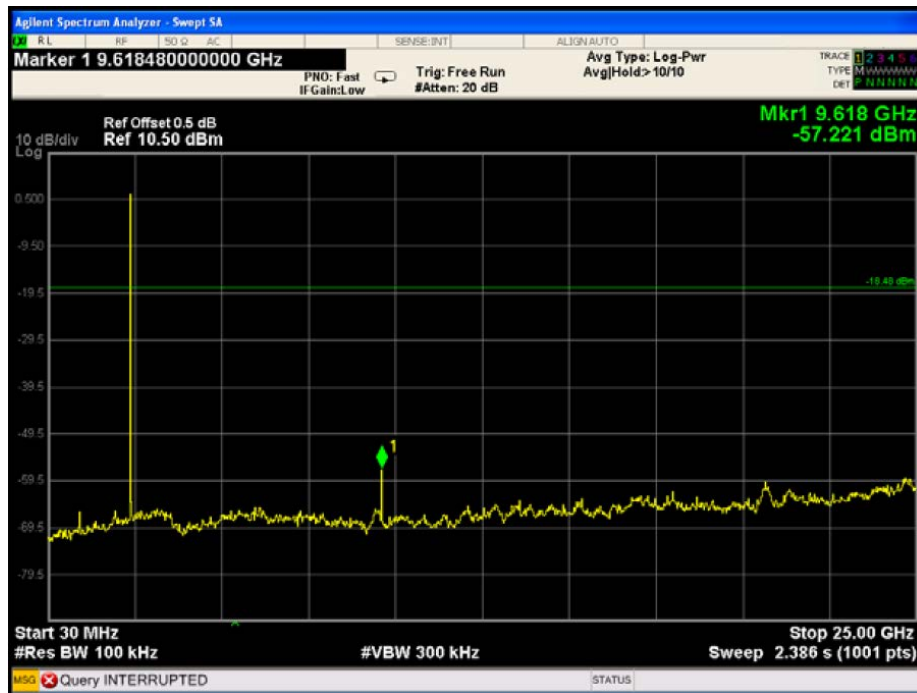

### 802.11b Low Channel



### 802.11b Middle Channel



### 802.11b High Channel



Remark: All applicable test modes have been tested and only the worst case (802.11b TX ) is recorded.

## **12 Antenna Requirement**

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has a internal permanent antenna , it meet the requirement of this section.

\*\*\*\*\*THE END REPORT\*\*\*\*\*