

FCC TEST REPORT

FCC ID: 2AIGPH1

Product : CoWatch

Model Name : H1

Brand : iMCO

Report No. : PT800321160428E-FC01

Prepared for

Shenzhen Hongtuo Tongda Electronics Technology Co.Ltd
02/1F,Block 2,East Industrial Park, Minqiang Community, Longhua New District,
Shenzhen, Guangdong, China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community
Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Hongtuo Tongda Electronics Technology Co.Ltd

Address : 02/1F,Block 2,East Industrial Park, Minqiang Community, Longhua New District, Shenzhen, Guangdong, China

Manufacture's name : Shenzhen Hongtuo Tongda Electronics Technology Co.Ltd

Address : 02/1F,Block 2,East Industrial Park, Minqiang Community, Longhua New District, Shenzhen, Guangdong, China

Product name : CoWatch

Model name : H1

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10:2013, DA 00-705

Test Date : May. 05, 2016 ~ May. 24, 2016

Date of Issue : May. 26, 2016


Test Result : Pass

This device described above has been tested by PTS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTS, this document may be altered or revised by PTS, personal only, and shall be noted in the revision of the document.


Testing Engineer

August Qiu




Technical Manager

Hack Ye



Authorized Signatory

Chris Du



Contents

	Page
2 TEST SUMMARY.....	5
3 GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST	7
3.3 TEST MODE.....	7
3.4 TEST VOLTAGE	8
3.5 CONFIGURATION OF SYSTEM	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST.....	9
4.2 DESCRIPTION OF SUPPORT UNITS.....	10
4.3 MEASUREMENT UNCERTAINTY	10
5 CONDUCTED EMISSION.....	11
5.1 E.U.T. OPERATION.....	11
5.2 EUT SETUP	11
5.3 MEASUREMENT DESCRIPTION.....	12
5.4 CONDUCTED EMISSION TEST RESULT	12
6 RADIATED SPURIOUS EMISSIONS	14
6.1 EUT OPERATION	14
6.2 TEST SETUP.....	15
6.3 SPECTRUM ANALYZER SETUP.....	16
6.4 TEST PROCEDURE.....	17
6.5 SUMMARY OF TEST RESULTS.....	18
7 BAND EDGE MEASUREMENT	27
7.1 TEST PROCEDURE.....	27
7.2 TEST RESULT.....	27
8 20 DB BANDWIDTH MEASUREMENT	34
8.1 TEST PROCEDURE.....	34
8.2 TEST RESULT.....	34
9 MAXIMUM PEAK OUTPUT POWER	40
9.1 TEST PROCEDURE.....	40
9.2 TEST RESULT.....	40
10 HOPPING CHANNEL SEPARATION.....	46

10.1	TEST PROCEDURE.....	46
10.2	TEST RESULT	46
11	NUMBER OF HOPPING FREQUENCY.....	52
11.1	TEST PROCEDURE.....	52
11.2	TEST RESULT	52
12	DWELL TIME.....	53
12.1	TEST PROCEDURE.....	53
12.2	TEST RESULT	53
13	Conducted Spurious Emissions.....	56
14	ANTENNA REQUIREMENT.....	59
15	TEST SETUP.....	60
16	EUT PHOTOS.....	62

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable

3 General Information

3.1 General Description of E.U.T.

Product Name	:	CoWatch
Model Name	:	H1
Model Description	:	N/A
Bluetooth Version	:	V4.1
Operating frequency	:	For BT(Normal) 2402-2480MHz, 79 channels For BLE: 2402-2480MHz, 40 channels For WIFI 802.11b/g/n-HT20:2412-2462MHz, 11 channels 802.11n-HT40: 2422-2452MHz:7 channels
Antenna installation:	:	internal permanent antenna
Antenna Gain:	:	0.5dBi
Type of Modulation	:	For BT(Normal) GFSK, Pi/4DQPSK, 8DPSK For BLE: GFSK For WIFI: IEEE 802.11b CCK/QPSK/BPSK IEEE 802.11g BPSK/QPSK/16QAM/64QAM IEEE 802.11n-HT20/HT40 BPSK/QPSK/16QAM/64QAM
Power supply	:	DC3.7V power by battery, DC 5V charging by USB port

3.2 Channel List

BT(Normal)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

3.3 Test Mode


All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz
Hopping	2402-2480MHz		
Tests Carried Out Under FCC part 15.207 & 15.209			
Test Item	Test Mode		
Conduction Emission, 0.15MHz to 30MHz	BT Communication		
Radiated Emission 30M-1GHz	BT Communication		

3.4 Test Voltage

Normal Test Voltage	Item
120V 60Hz	Conducted Emission & Radiated Emission
240V 60Hz	Conducted Emission & Radiated Emission
Remark: Only the worst case (120V 60Hz) was recorded in the report.	

3.5 Configuration of System

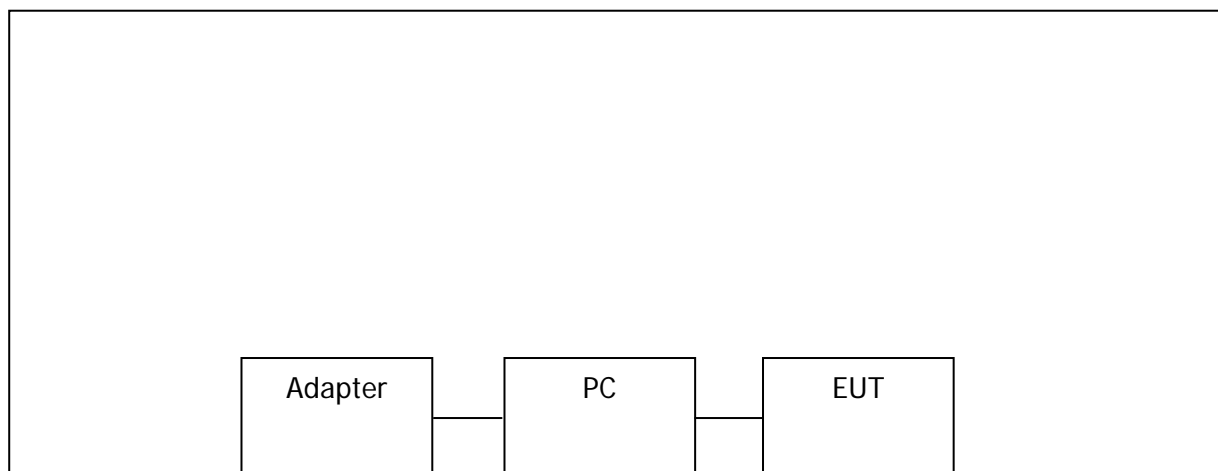

4 Equipment During Test

4.1 Equipments List

RF Conducted Test							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug.04, 2015	Aug.03, 2016	1 year
2	EXA Signal Analyzer	Keysight	N9010A	MY50520207 526B25MPB W7X	Aug.04, 2015	Aug.03, 2016	1 year
3	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2015	July 14, 2016	1 year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	July 15, 2015	July 14, 2016	1 year
3	Amplifier	EM	EM-30180	060538	July 15, 2015	July 14, 2016	1 year
4	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	July 15, 2015	July 14, 2016	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2015	July 14, 2016	1 year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	July 15, 2015	July 14, 2016	1 year
3	Cable	LARGE	RF300	-	July 15, 2015	July 14, 2016	1 year

4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
Note Book	Sony	PCG-51111T	X16-96081
AC Adapter	Sony	NSW24063	SNPA-1900-11SY
AC power line(1.0m)	Cold come	JYD-20	C-2201

4.3 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Frequency Range: : 150kHz to 30MHz
 Class/Severity: : Class B
 Limit: : 66-56 dB μ V between 0.15MHz & 0.5MHz
 : 56 dB μ V between 0.5MHz & 5MHz
 : 60 dB μ V between 5MHz & 30MHz
 Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


5.1 E.U.T. Operation

Operating Environment :

Temperature: : 25.5 °C
 Humidity: : 51 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

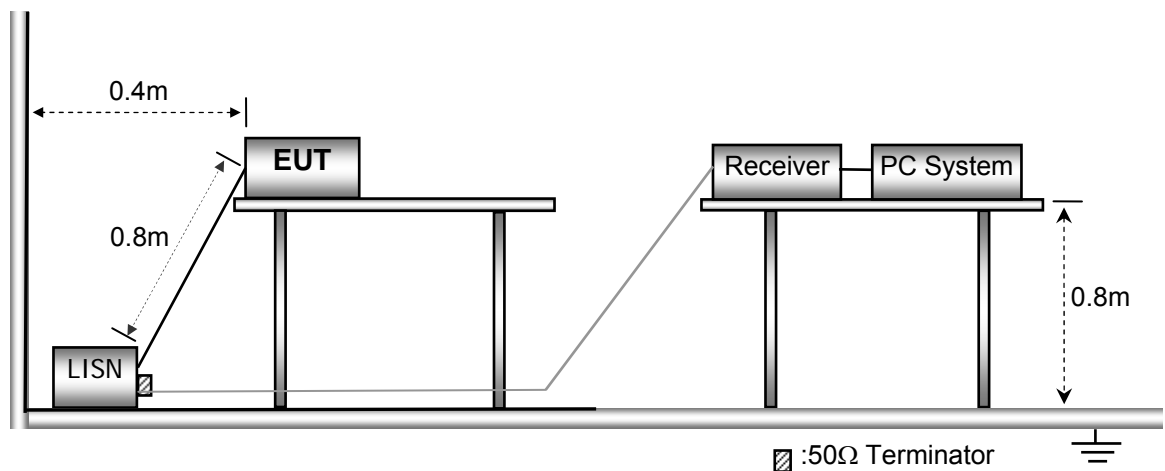

5.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.4 Conducted Emission Test Result

Live line:

Data: 663

File: E:\Test Data 843\Conduction Data\A\agc\agc.EM6 (698)

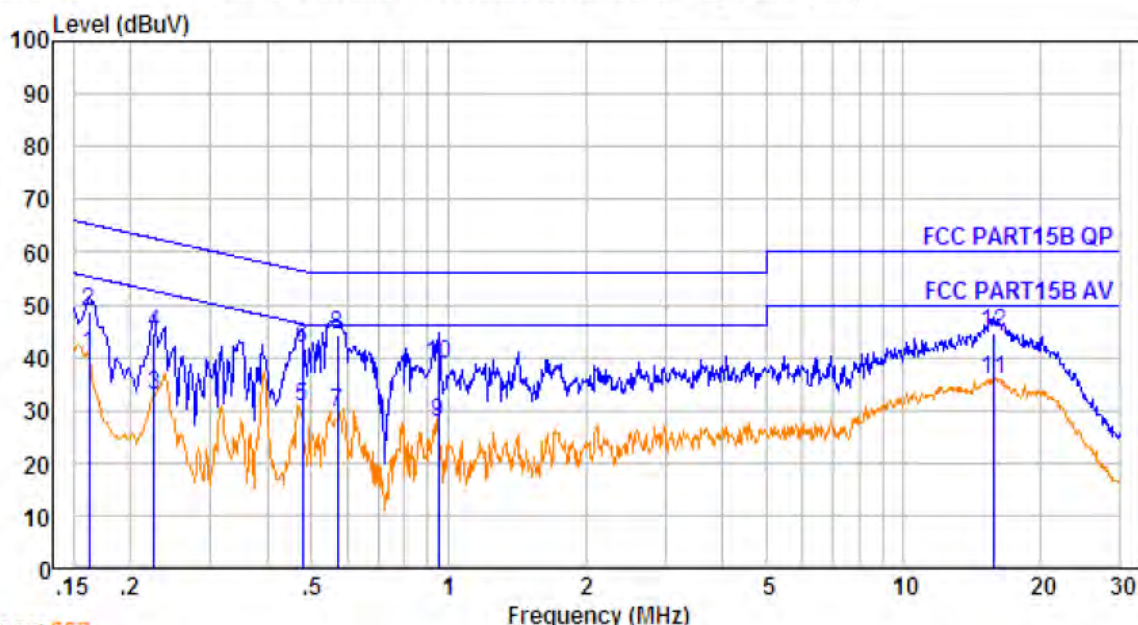


Trace: 662

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.162	10.60	0.60	29.45	40.65	55.34	-14.69	Average
2.	0.162	10.60	0.60	37.45	48.65	65.34	-16.69	QP
3.	0.226	10.62	0.60	21.57	32.79	52.61	-19.82	Average
4.	0.226	10.62	0.60	33.57	44.79	62.61	-17.82	QP
5.	0.479	10.64	0.60	19.31	30.55	46.36	-15.81	Average
6.	0.479	10.64	0.60	30.31	41.55	56.36	-14.81	QP
7.	0.570	10.66	0.60	18.11	29.37	46.00	-16.63	Average
8.	0.570	10.66	0.60	33.11	44.37	56.00	-11.63	QP
9.	0.948	10.67	0.60	16.42	27.69	46.00	-18.31	Average
10.	0.948	10.67	0.60	27.42	38.69	56.00	-17.31	QP
11.	15.885	10.78	0.60	24.25	35.63	50.00	-14.37	Average
12.	15.885	10.78	0.60	33.25	44.63	60.00	-15.37	QP

Neutral line:

Data: 665

File: E:\Test Data 843\Conduction Data\A\agc\agc.EM6 (698)

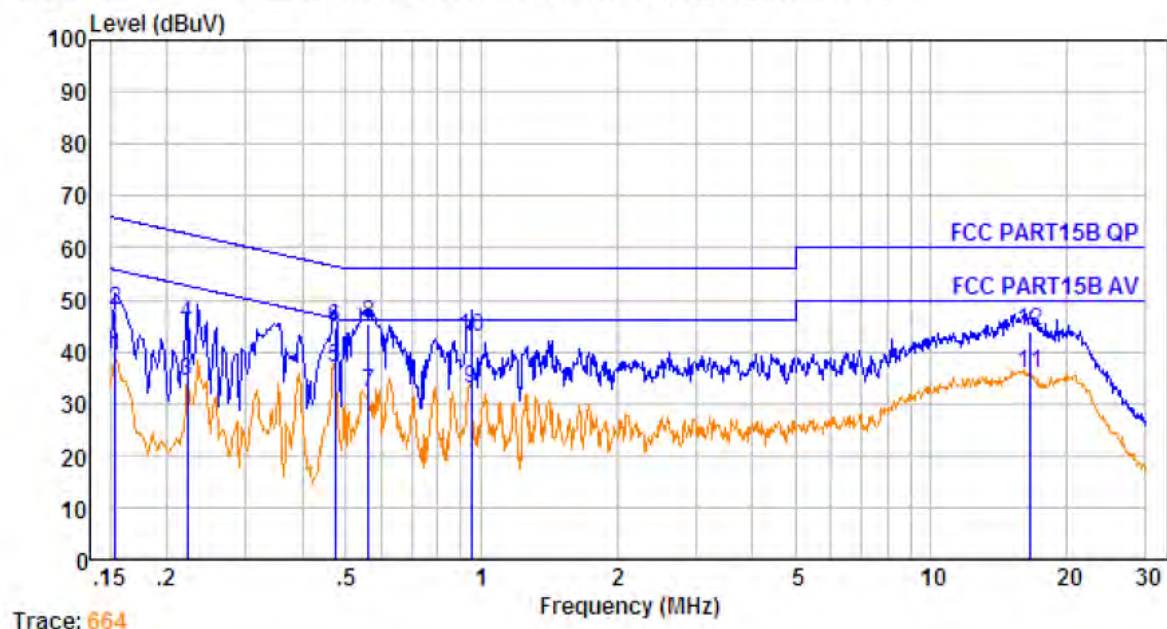

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.154	10.60	0.60	27.92	39.12	55.78	-16.66	Average
2.	0.154	10.60	0.60	36.92	48.12	65.78	-17.66	QP
3.	0.222	10.61	0.60	23.03	34.24	52.74	-18.50	Average
4.	0.222	10.61	0.60	34.03	45.24	62.74	-17.50	QP
5.	0.474	10.64	0.60	25.53	36.77	46.45	-9.68	Average
6.	0.474	10.64	0.60	33.53	44.77	56.45	-11.68	QP
7.	0.561	10.65	0.60	21.02	32.27	46.00	-13.73	Average
8.	0.561	10.65	0.60	34.02	45.27	56.00	-10.73	QP
9.	0.948	10.67	0.60	21.52	32.79	46.00	-13.21	Average
10.	0.948	10.67	0.60	31.52	42.79	56.00	-13.21	QP
11.	16.661	10.78	0.60	24.39	35.77	50.00	-14.23	Average
12.	16.661	10.78	0.60	32.39	43.77	60.00	-16.23	QP

6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: : ANSI C63.10:2013, DA 00-705
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

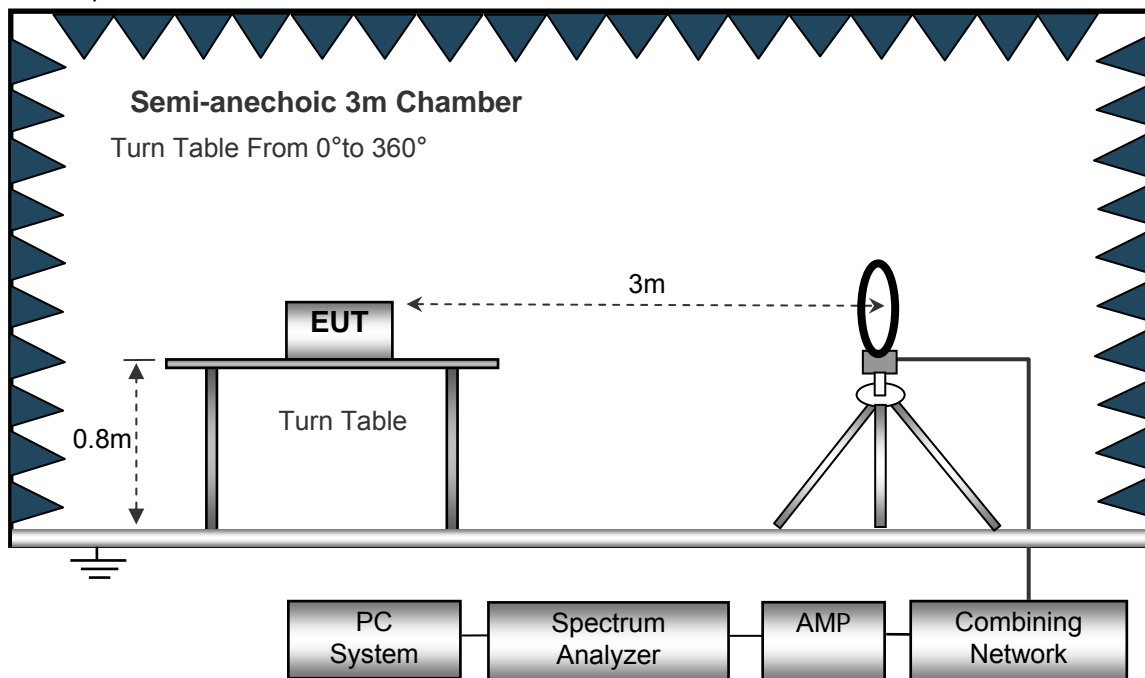

The test setup for emission measurement from 30 MHz to 1 GHz.

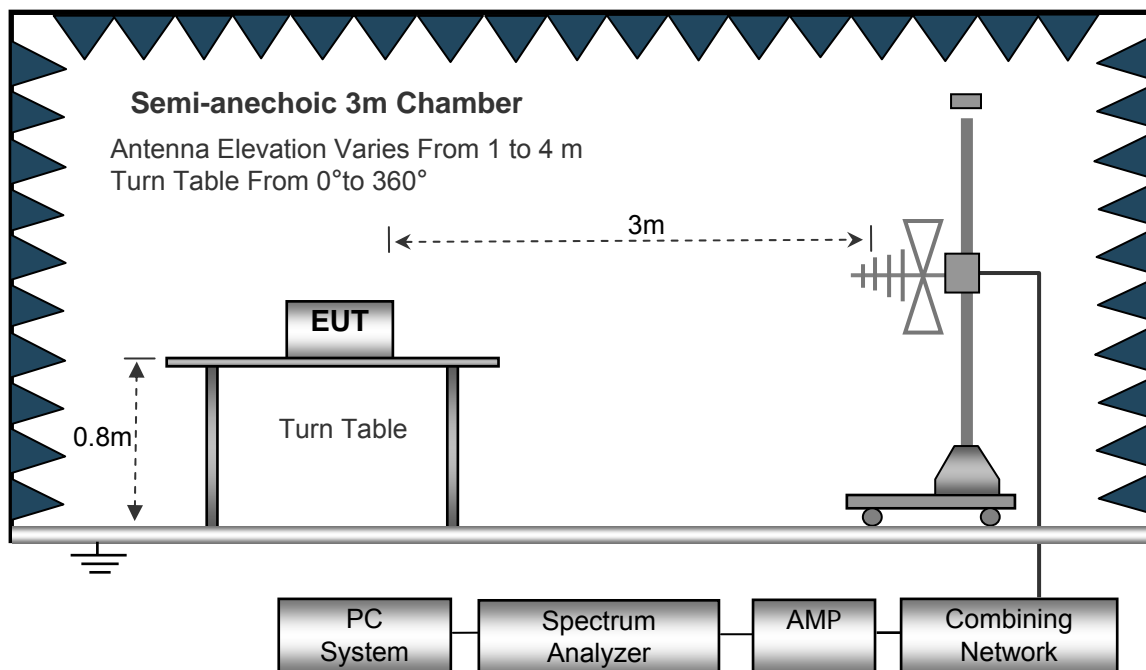

The test setup for emission measurement above 1 GHz.

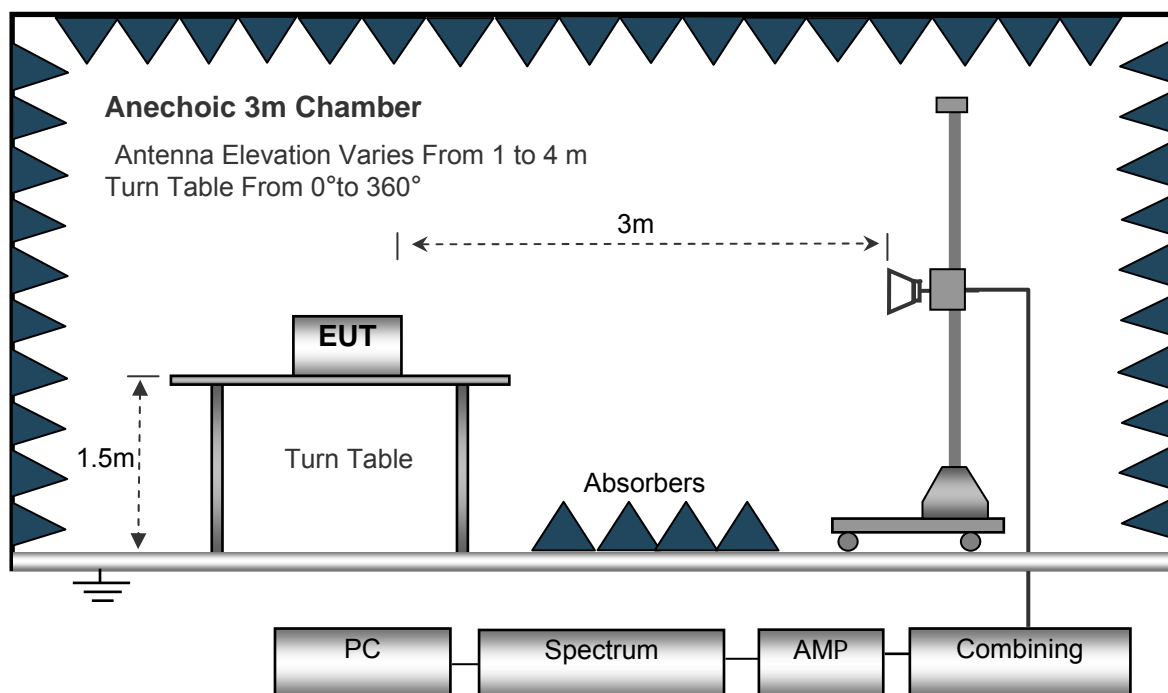

6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth 10kHz
Video Bandwidth 10kHz
Resolution Bandwidth 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth 100kHz
Video Bandwidth 300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth 1MHz
Video Bandwidth 3MHz
Detector Ave.
Resolution Bandwidth 1MHz
Video Bandwidth 10Hz

6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Summary of Test Results


Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 1GHz

All applicable test modes have been tested and only the worst case (GFSK TX in High channel) is recorded.

Antenna Polarization: Horizontal

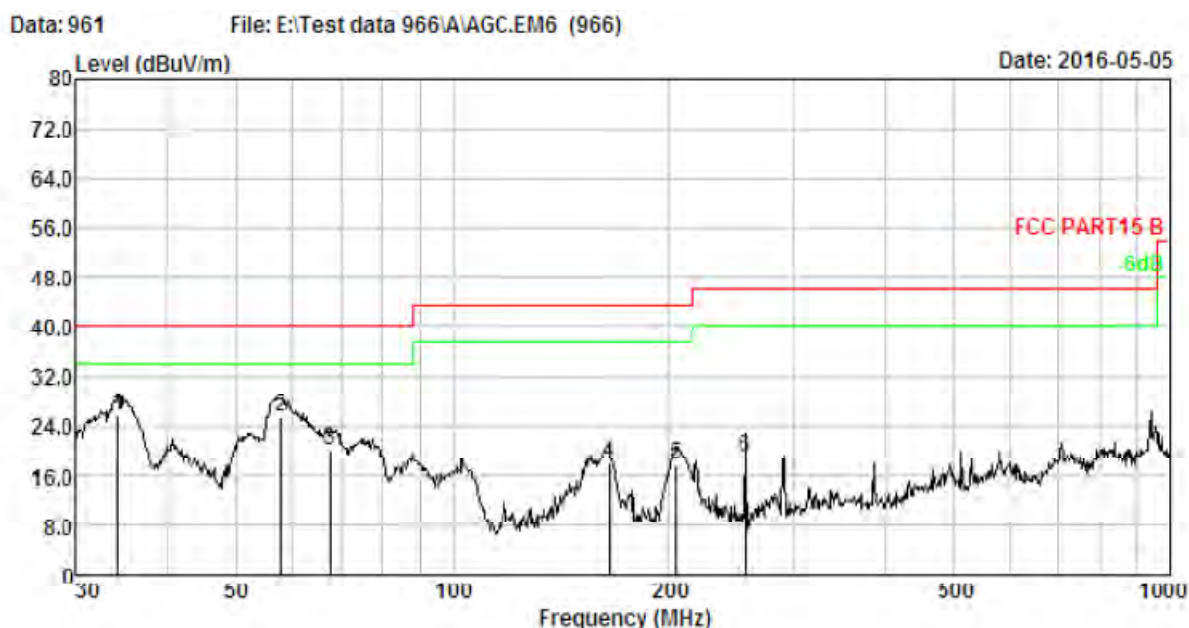

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	34.276	1.18	13.35	41.32	30.02	25.83	40.00	-14.17	QP
2.	57.594	1.65	12.04	41.96	30.20	25.45	40.00	-14.55	QP
3.	67.675	1.79	10.83	37.84	30.25	20.21	40.00	-19.79	QP
4.	165.487	2.60	13.57	32.50	30.56	18.11	43.50	-25.39	QP
5.	204.955	2.79	10.48	35.15	30.64	17.78	43.50	-25.72	QP
6.	256.521	3.00	12.06	34.49	30.72	18.83	46.00	-27.17	QP




Antenna Polarization: Vertical

Data: 962

File: E:\Test data 966\A\AGC.EM6 (966)

Date: 2016-05-05

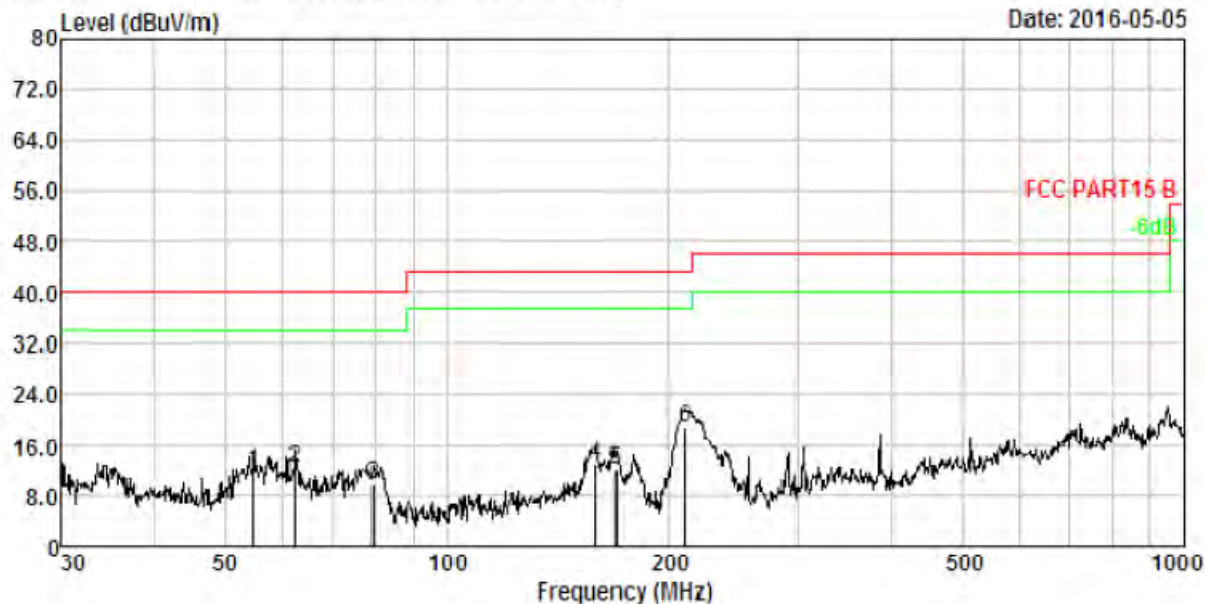

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dEuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	54.643	1.60	11.93	26.46	30.18	11.81	40.00	-28.19	QP
2.	62.213	1.72	12.02	26.75	30.22	12.27	40.00	-27.73	QP
3.	79.521	1.94	8.87	29.13	30.31	9.63	40.00	-30.37	QP
4.	159.225	2.57	13.88	27.17	30.55	13.07	43.50	-30.43	QP
5.	169.599	2.62	13.35	25.65	30.57	12.05	43.50	-31.45	QP
6.	210.786	2.82	10.59	35.73	30.65	18.49	43.50	-25.01	QP

Test Frequency: 1GHz ~ 18GHz

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel						
Harmonic & Spurious Emission						
1204.53	49.32	PK	-18.67	30.65	74.00	-43.35
1204.53	44.15	Ave	-18.67	25.48	54.00	-28.52
4804.00	49.15	PK	-1.06	48.09	74.00	-25.91
4804.00	43.01	Ave	-1.06	41.95	54.00	-12.05
7206.00	48.33	PK	1.33	49.66	74.00	-24.34
7206.00	44.10	Ave	1.33	45.43	54.00	-8.57
Restricted bands Emission						
2324.96	45.02	PK	-13.19	31.83	74.00	-42.17
2324.96	39.30	Ave	-13.19	26.11	54.00	-27.89
2698.50	51.40	PK	-12.54	38.86	74.00	-35.14
2698.50	45.92	Ave	-12.54	33.38	54.00	-20.62
3335.87	47.27	PK	-10.89	36.38	74.00	-37.62
3335.87	43.99	Ave	-10.89	33.10	54.00	-20.90
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel						
Harmonic & Spurious Emission						
1204.53	48.85	PK	-18.67	30.18	74.00	-43.82
1204.53	43.80	Ave	-18.67	25.13	54.00	-28.87
4882.00	49.36	PK	-0.93	48.43	74.00	-25.57
4882.00	43.98	Ave	-0.93	43.05	54.00	-10.95
7323.00	48.53	PK	1.67	50.20	74.00	-23.80
7323.00	43.92	Ave	1.67	45.59	54.00	-8.41
Restricted bands Emission						
2341.92	44.51	PK	-13.19	31.32	74.00	-42.68
2341.92	39.52	Ave	-13.19	26.33	54.00	-27.67
2712.10	52.28	PK	-12.54	39.74	74.00	-34.26
2712.10	47.16	Ave	-12.54	34.62	54.00	-19.38
3334.47	46.92	PK	-10.89	36.03	74.00	-37.97
3334.47	44.40	Ave	-10.89	33.51	54.00	-20.49
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel						
Harmonic & Spurious Emission						
1204.53	48.17	PK	-18.67	29.50	74.00	-44.50
1204.53	43.85	Ave	-18.67	25.18	54.00	-28.82
4960.00	49.20	PK	-0.87	48.33	74.00	-25.67
4960.00	44.52	Ave	-0.87	43.65	54.00	-10.35
7440.00	47.78	PK	1.84	49.62	74.00	-24.38
7440.00	43.67	Ave	1.84	45.51	54.00	-8.49
Restricted bands Emission						
2324.90	43.96	PK	-13.19	30.77	74.00	-43.23
2324.90	39.97	Ave	-13.19	26.78	54.00	-27.22
2703.87	52.07	PK	-12.54	39.53	74.00	-34.47
2703.87	48.14	Ave	-12.54	35.60	54.00	-18.40
3337.91	44.68	PK	-10.89	33.79	74.00	-40.21
3337.91	44.61	Ave	-10.89	33.72	54.00	-20.28
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
8DPSK Low Channel						
Harmonic & Spurious Emission						
1205.98	48.83	PK	-18.67	30.16	74.00	-43.84
1205.98	44.37	Ave	-18.67	25.70	54.00	-28.30
4804.00	50.08	PK	-1.06	49.02	74.00	-24.98
4804.00	43.31	Ave	-1.06	42.25	54.00	-11.75
7206.00	47.99	PK	1.33	49.32	74.00	-24.68
7206.00	44.15	Ave	1.33	45.48	54.00	-8.52
Restricted bands Emission						
2314.65	48.09	PK	-13.19	34.90	74.00	-39.10
2314.65	42.18	Ave	-13.19	28.99	54.00	-25.01
2702.22	51.58	PK	-12.54	39.04	74.00	-34.96
2702.22	48.35	Ave	-12.54	35.81	54.00	-18.19
3338.12	45.11	PK	-10.89	34.22	74.00	-39.78
3338.12	45.47	Ave	-10.89	34.58	54.00	-19.42
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
8DPSK Middle Channel						
Harmonic & Spurious Emission						
1205.98	49.17	PK	-18.67	30.50	74.00	-43.50
1205.98	45.13	Ave	-18.67	26.46	54.00	-27.54
4882.00	49.33	PK	-0.93	48.40	74.00	-25.60
4882.00	43.45	Ave	-0.93	42.52	54.00	-11.48
7323.00	47.92	PK	1.67	49.59	74.00	-24.41
7323.00	43.92	Ave	1.67	45.59	54.00	-8.41
Restricted bands Emission						
2339.58	49.99	PK	-13.19	36.80	74.00	-37.20
2339.58	42.12	Ave	-13.19	28.93	54.00	-25.07
2702.58	52.28	PK	-12.54	39.74	74.00	-34.26
2702.58	47.16	Ave	-12.54	34.62	54.00	-19.38
3333.54	46.92	PK	-10.89	36.03	74.00	-37.97
3333.54	44.40	Ave	-10.89	33.51	54.00	-20.49
Remark:						
1. Corrected Factor = ANT Factor + Cable Loss – Amp Gain						

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
8DPSK High Channel						
Harmonic & Spurious Emission						
1205.98	48.93	PK	-18.67	30.26	74.00	-43.74
1205.98	46.05	Ave	-18.67	27.38	54.00	-26.62
4960.00	49.22	PK	-0.87	48.35	74.00	-25.65
4960.00	43.25	Ave	-0.87	42.38	54.00	-11.62
7440.00	47.83	PK	1.84	49.67	74.00	-24.33
7440.00	43.87	Ave	1.84	45.71	54.00	-8.29
Restricted bands Emission						
2347.90	51.79	PK	-13.19	38.60	74.00	-35.40
2347.90	42.04	Ave	-13.19	28.85	54.00	-25.15
2717.85	51.40	PK	-12.54	38.86	74.00	-35.14
2717.85	45.92	Ave	-12.54	33.38	54.00	-20.62
3334.50	47.27	PK	-10.89	36.38	74.00	-37.62
3334.50	43.99	Ave	-10.89	33.10	54.00	-20.90
Remark:						
1.Corrected Factor=ANT Factor + Cable Loss – Amp Gain						

Radiated band edge:

Frequency	Receiver Reading	Detector	Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK						
2400.00	48.79	PK	-13.12	35.67	74.00	-38.33
2400.00	41.45	PK	-13.12	28.33	74.00	-45.67
2483.50	47.99	PK	-13.06	34.93	74.00	-39.07
2483.50	43.40	PK	-13.06	30.34	74.00	-43.66
8DPSK						
2400.00	48.33	PK	-13.12	35.21	74.00	-38.79
2400.00	41.75	PK	-13.12	28.63	74.00	-45.37
2483.50	47.22	PK	-13.06	34.16	74.00	-39.84
2483.50	43.33	PK	-13.06	30.27	74.00	-43.73
Remark: The PK margin is below the AV limit, the AV value was not recorded.						

Test Frequency: 18-25GHz

The measurements were more than 20 dB below the limit and not reported

Remark : 1. The testing has been conformed to $10 \times 2480 = 24800$ MHz.
 2. All other emissions more than 20dB below the limit
 3: Only the worst data (GFSK/8DPSK modulation mode) were reported.

7 Band Edge Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013,DA 00-705
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode	:	Transmitting & Hopping
Remark	:	The worst case was recorded.

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

7.2 Test Result

Modulation	Mode	Band edge	Value	Limit	Result
GFSK	Transmitting	Left	-32.37	-18.40	Pass
		Right	-37.83	-18.12	Pass
	Hopping	Left	-32.48	-18.55	Pass
		Right	-40.06	-18.17	Pass
Pi/4 DQPSK	Transmitting	Left	-34.05	-19.74	Pass
		Right	-38.88	-19.40	Pass
	Hopping	Left	-36.73	-19.85	Pass
		Right	-39.54	-19.45	Pass
8DPSK	Transmitting	Left	-33.05	-19.70	Pass
		Right	-38.17	-19.38	Pass
	Hopping	Left	-35.40	-19.82	Pass
		Right	-39.05	-19.42	Pass
Remark:					
The limit is 20dB below the maximum peak level, please refer to the display line of the follow plot					

Offs 0.50 dB * RBW 100 kHz
 * Att 20 dB * VBW 300 kHz
 Batt Ref 10.50 dBm SWT 10ms

M2[1] -32.37 dBm
 2.399480000 GHz
 M1[1] -29.86 dBm
 2.400000000 GHz


1Pk
 Max

D1 1.600 dBm
 D2 -18.400 dBm
 F1


Start 2.31 GHz Stop 2.412 GHz

[illegible]


TX in Pi/4 DQPSK Band edge-left side

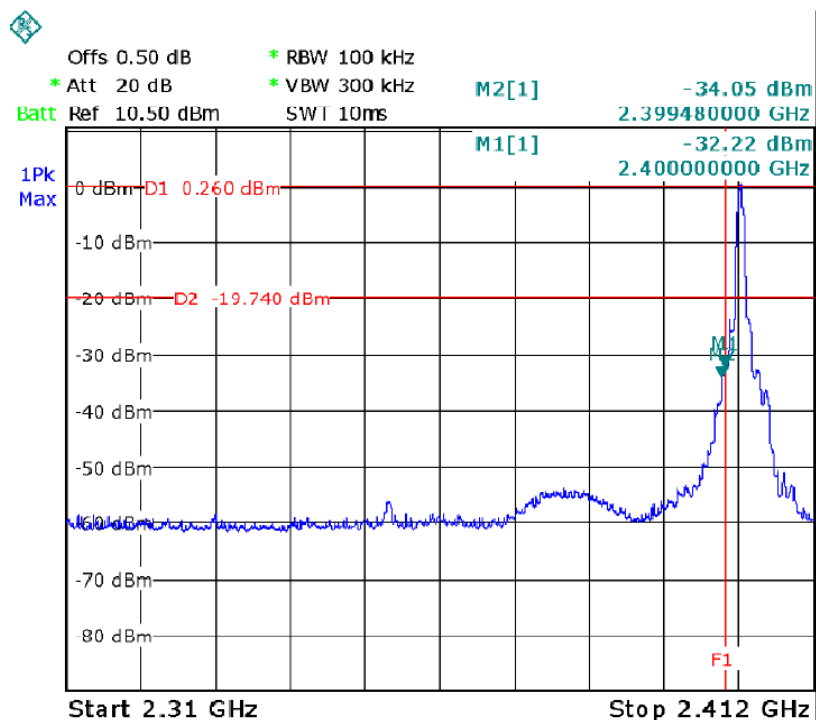


TX in Pi/4 DQPSK Band edge-right side

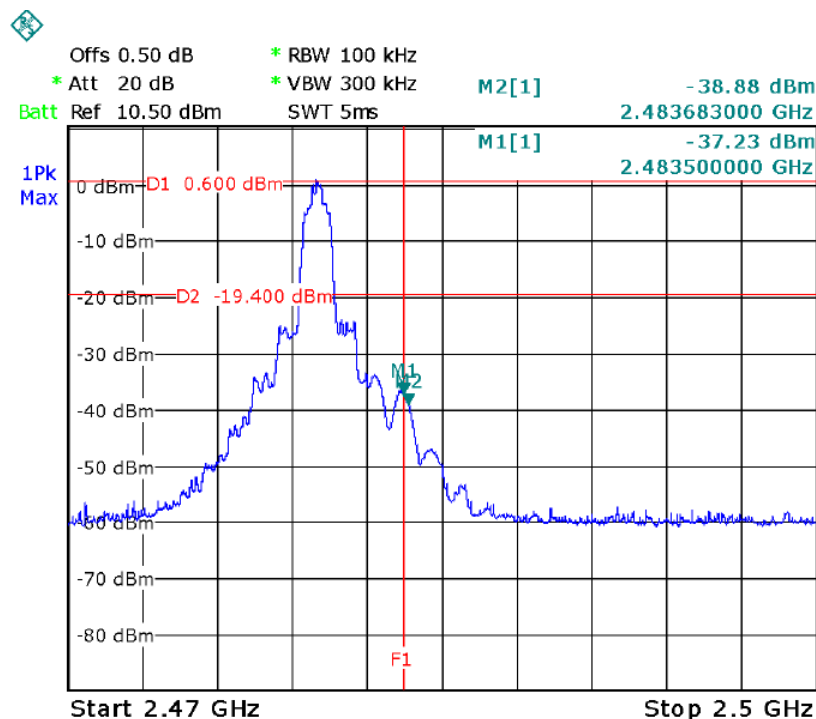


TX in 8DPSK Band edge-left side

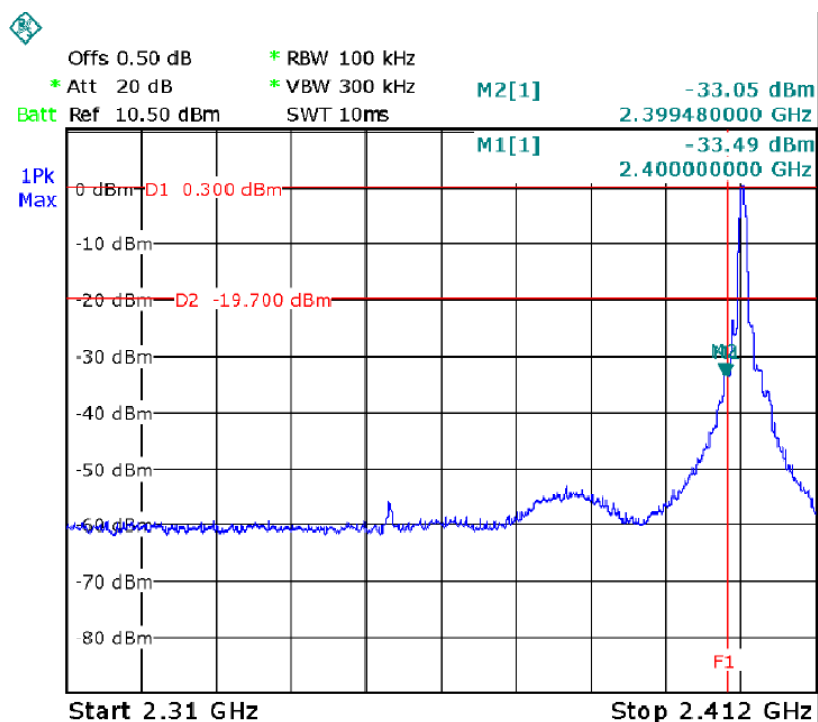


TX in 8DPSK Band edge-right side

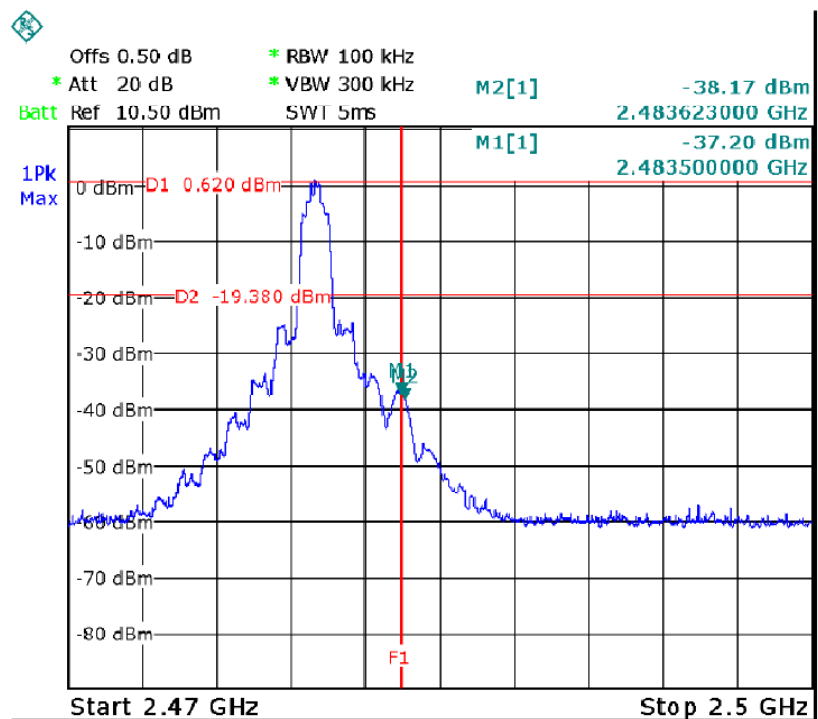


Hopping in GFSK Band edge-left side

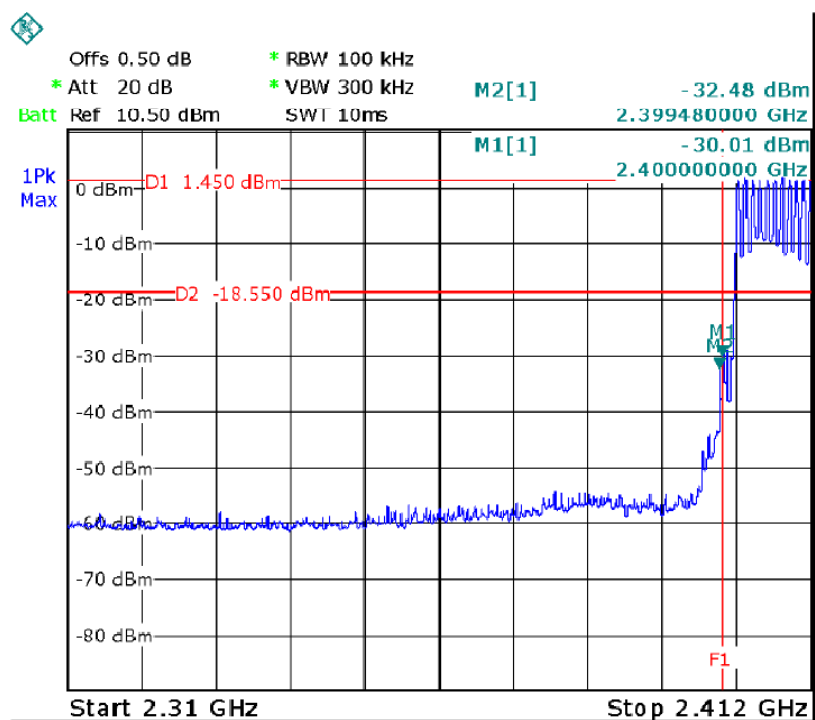


Hopping in GFSK Band edge-right side

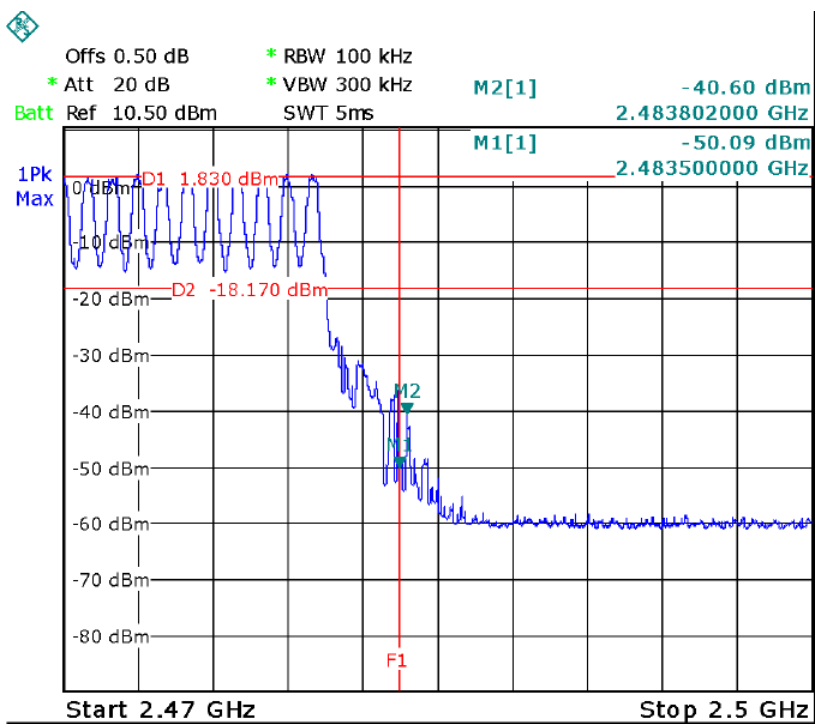


Hopping in Pi/4 DQPSK Band edge-left side

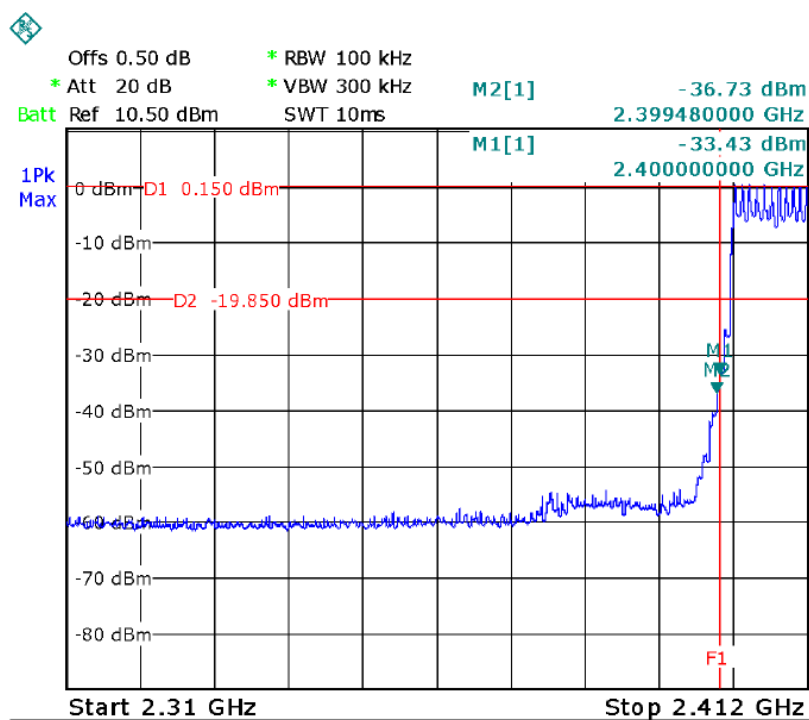


Hopping in Pi/4 DQPSK Band edge-right side

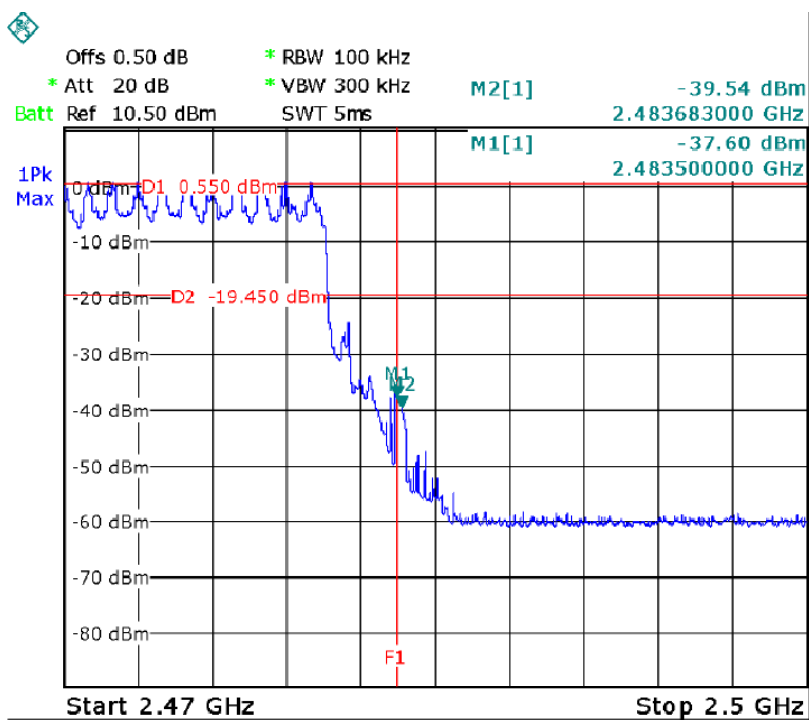

Hopping in 8DPSK Band edge-left side

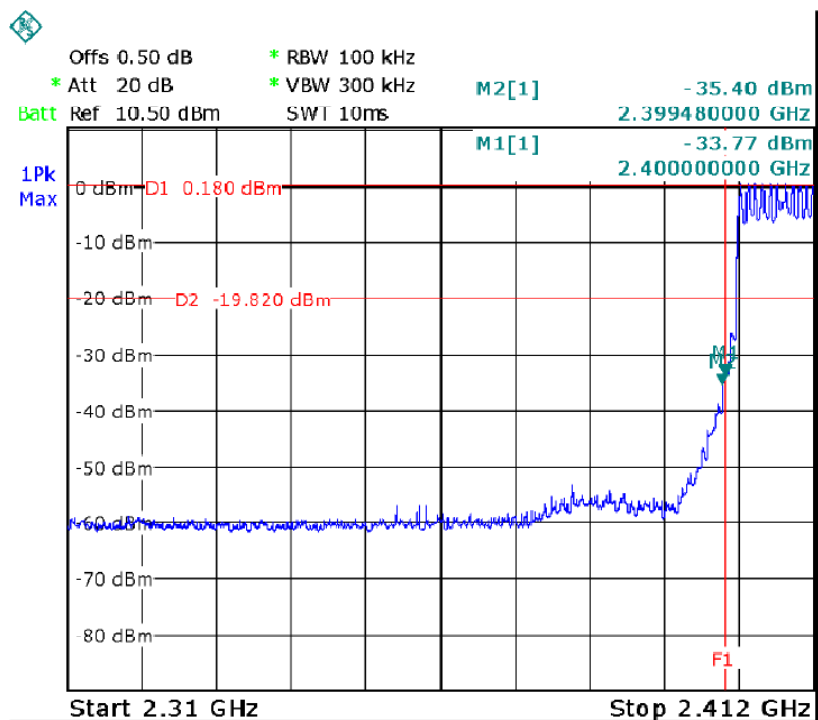

Hopping in 8DPSK Band edge-right side

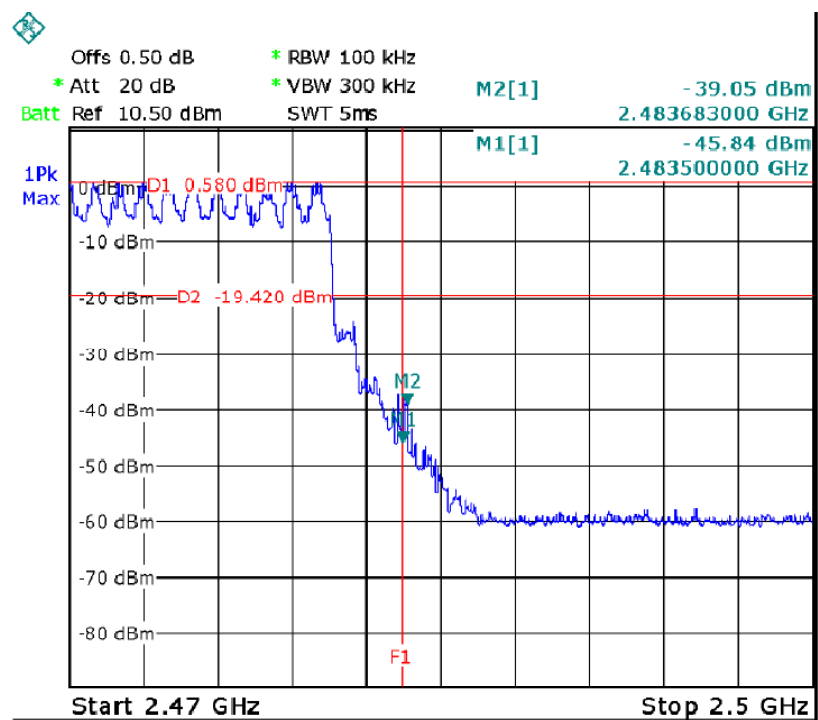

8 20 dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247
 Test Method : ANSI C63.10:2013, DA 00-705
 Test Mode : Refer to section 3.3


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz


8.2 Test Result

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.874
GFSK	Middle	0.874
GFSK	High	0.874
Pi/4 DQPSK	Low	1.216
Pi/4 DQPSK	Middle	1.216
Pi/4 DQPSK	High	1.216
8DPSK	Low	1.216
8DPSK	Middle	1.216
8DPSK	High	1.216


GFSK Low Channel

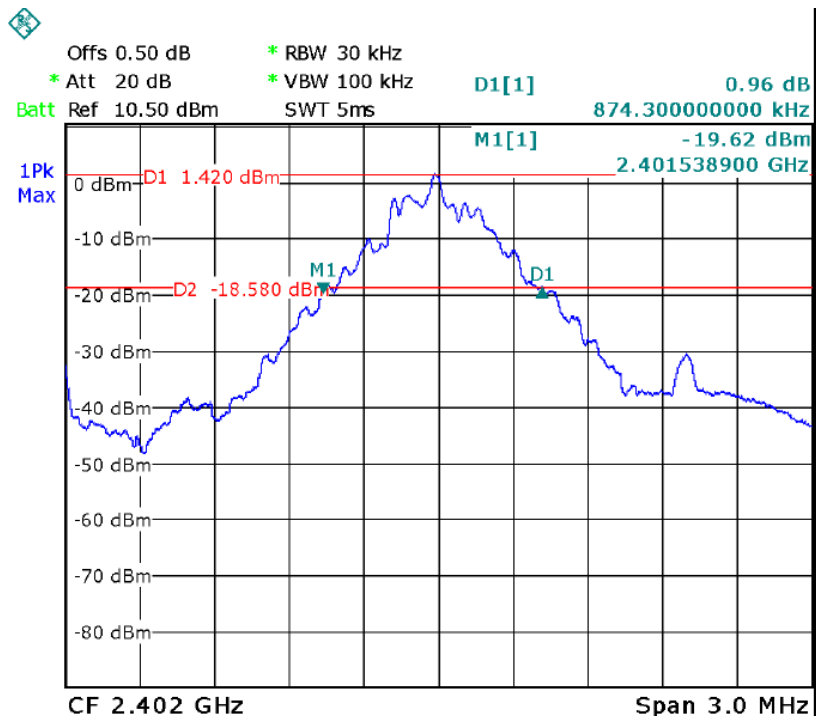


GFSK Middle Channel

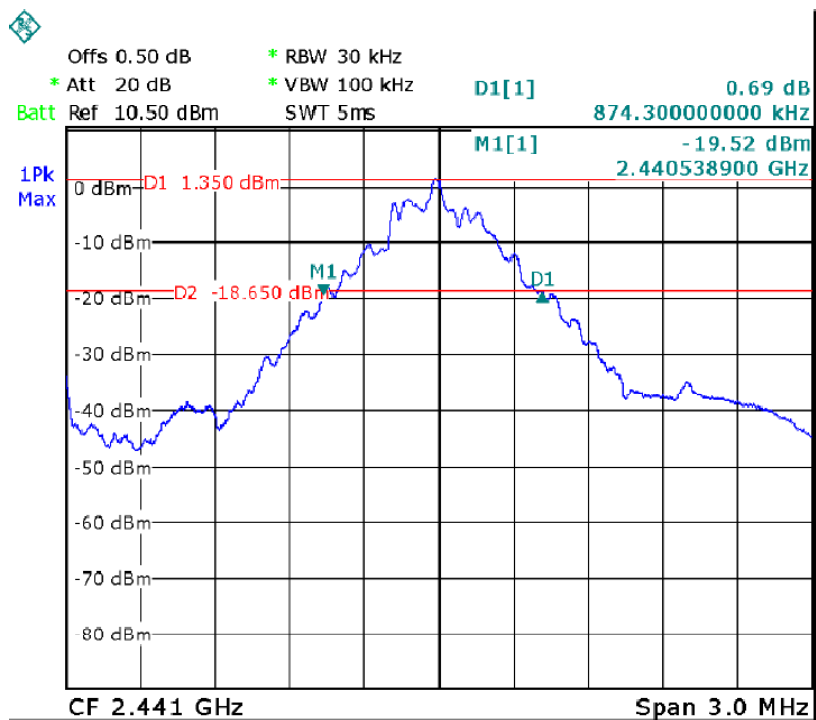


GFSK High Channel

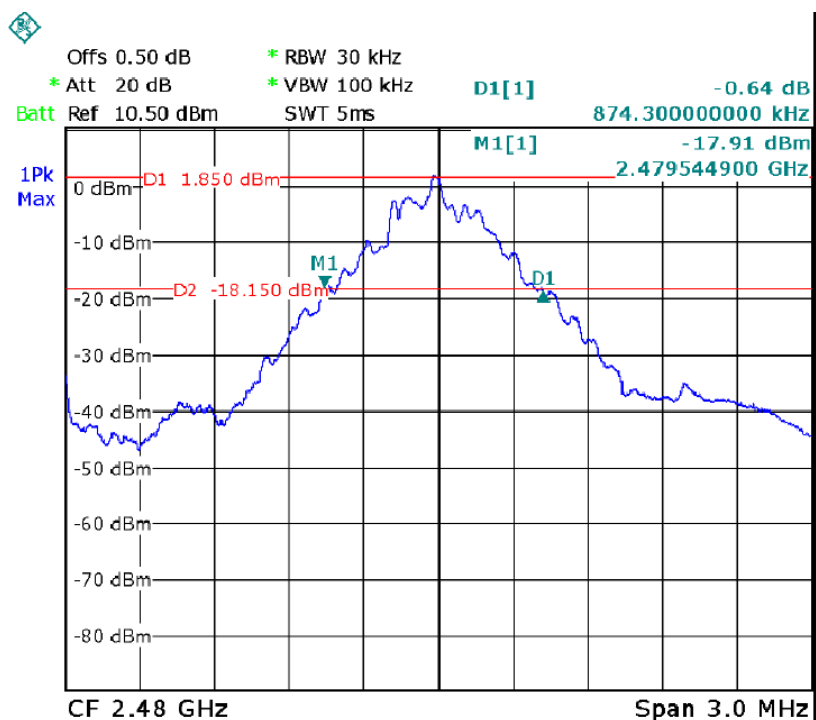


Pi/4DQPSK Low Channel

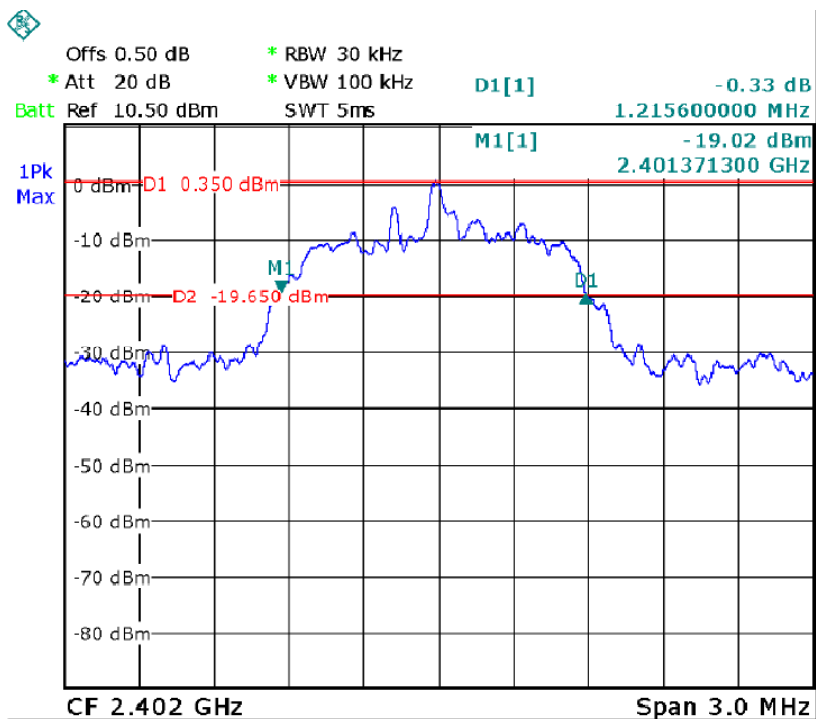


Pi/4DQPSK Middle Channel

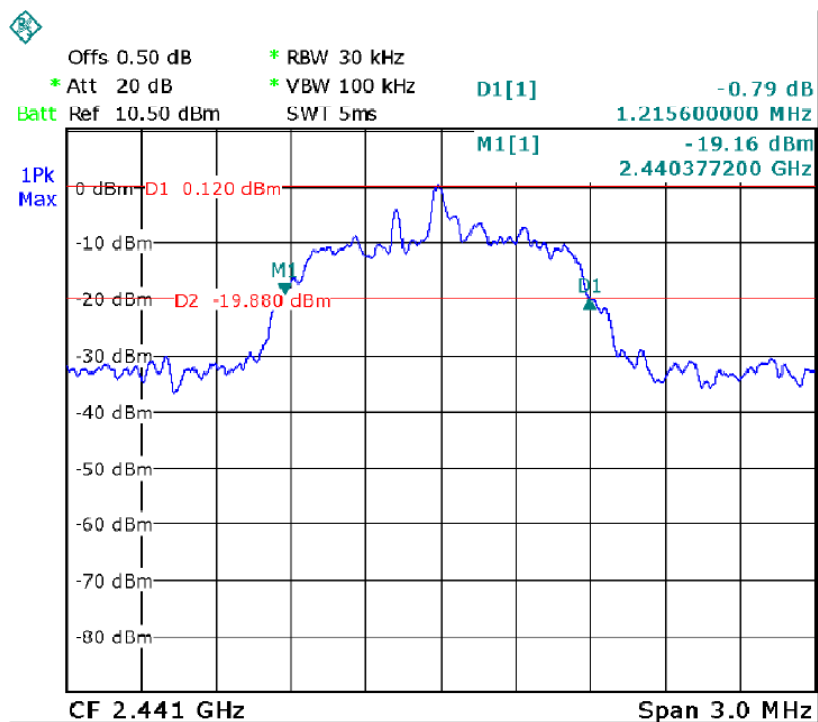


Pi/4DQPSK High Channel

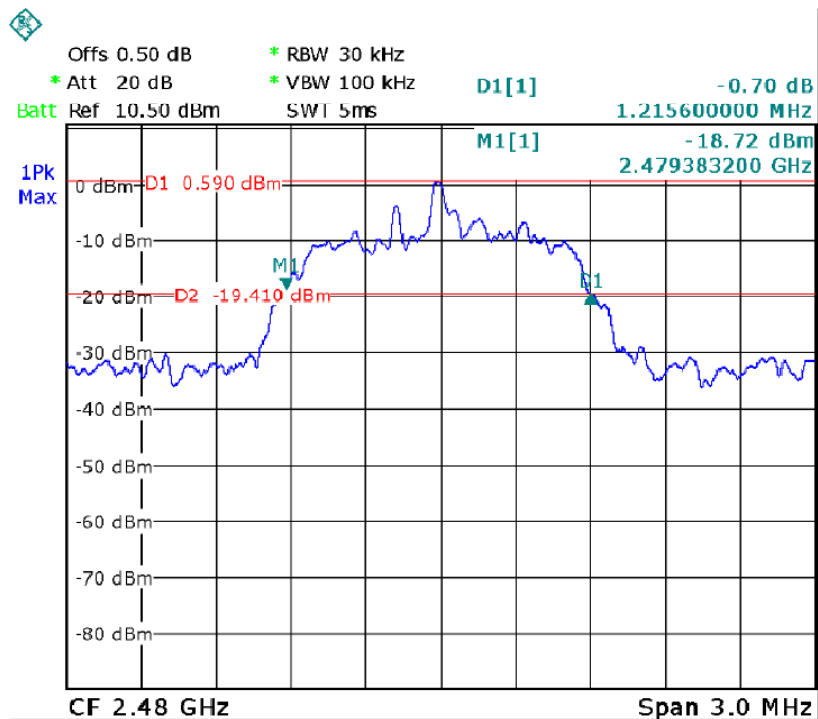


8DPSK Low Channel

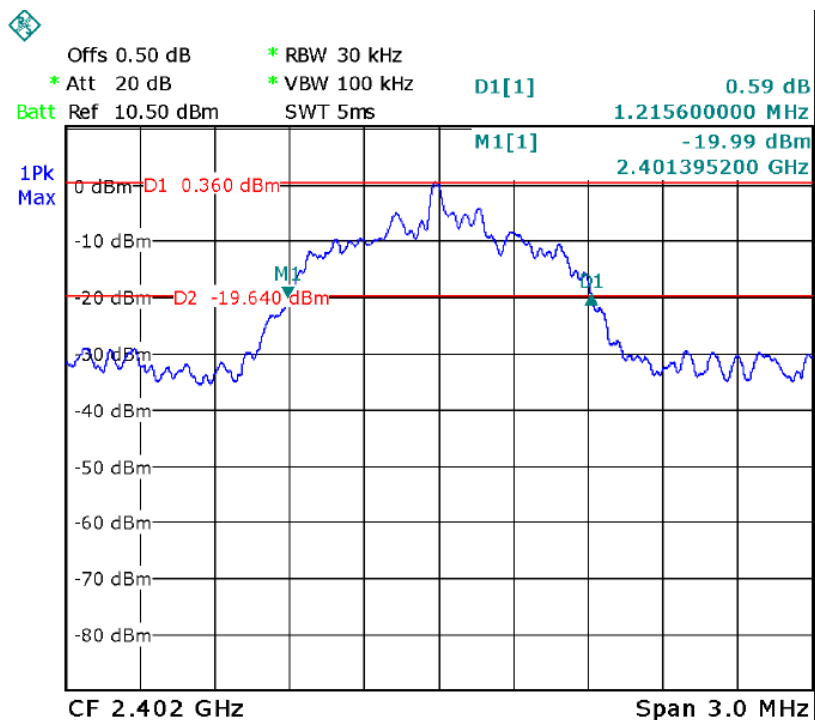

8DPSK Middle Channel

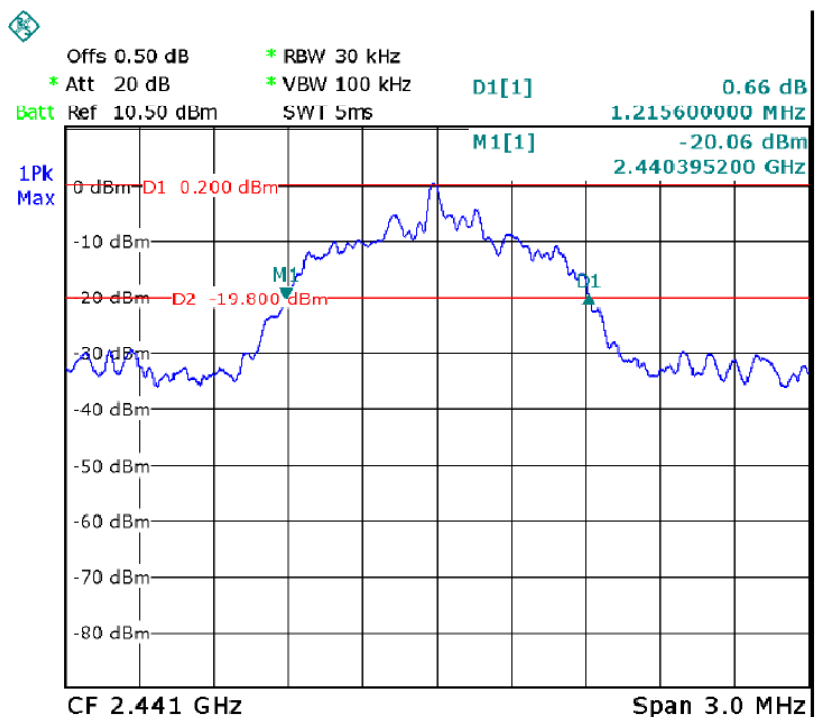

8DPSK High Channel

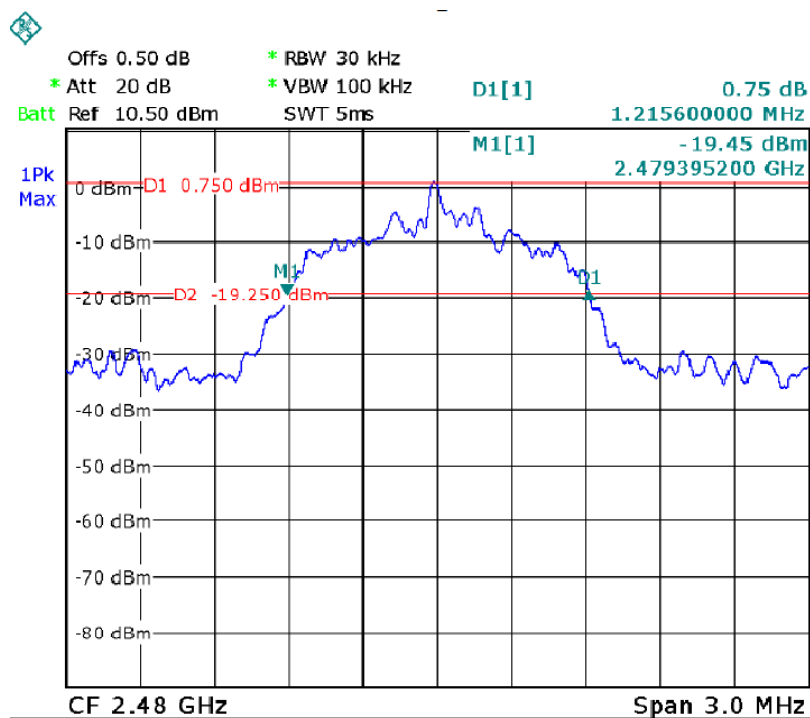

9 Maximum Peak Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test Mode	: Refer to section 3.3


9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


9.2 Test Result

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	2.01	30
GFSK	Middle	2.07	30
GFSK	High	2.90	30
Pi/4 DQPSK	Low	1.24	20.97
Pi/4 DQPSK	Middle	1.28	20.97
Pi/4 DQPSK	High	2.21	20.97
8DPSK	Low	1.33	20.97
8DPSK	Middle	1.04	20.97
8DPSK	High	1.60	20.97


GFSK Low Channel

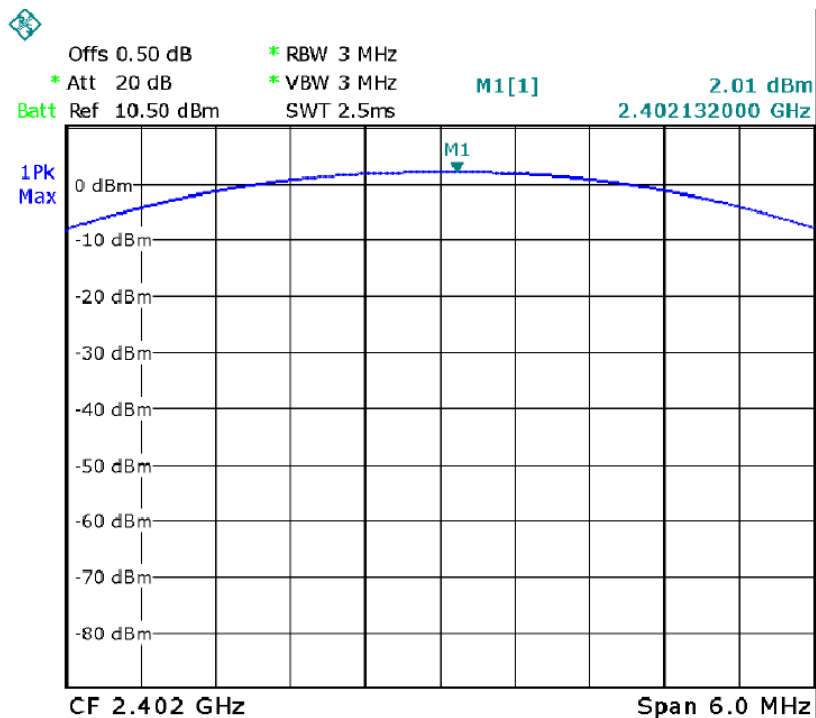


GFSK Middle Channel

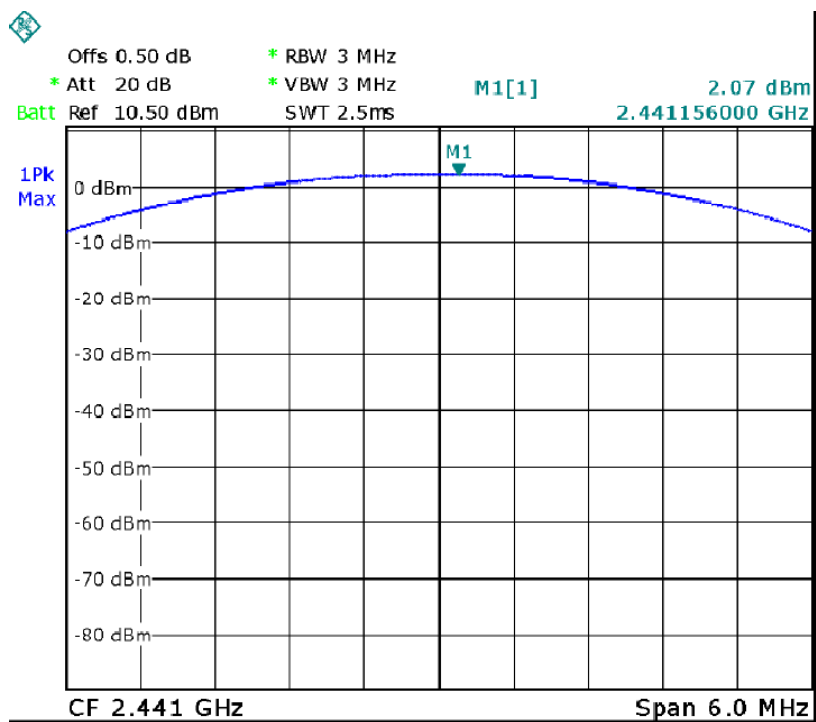


GFSK High Channel

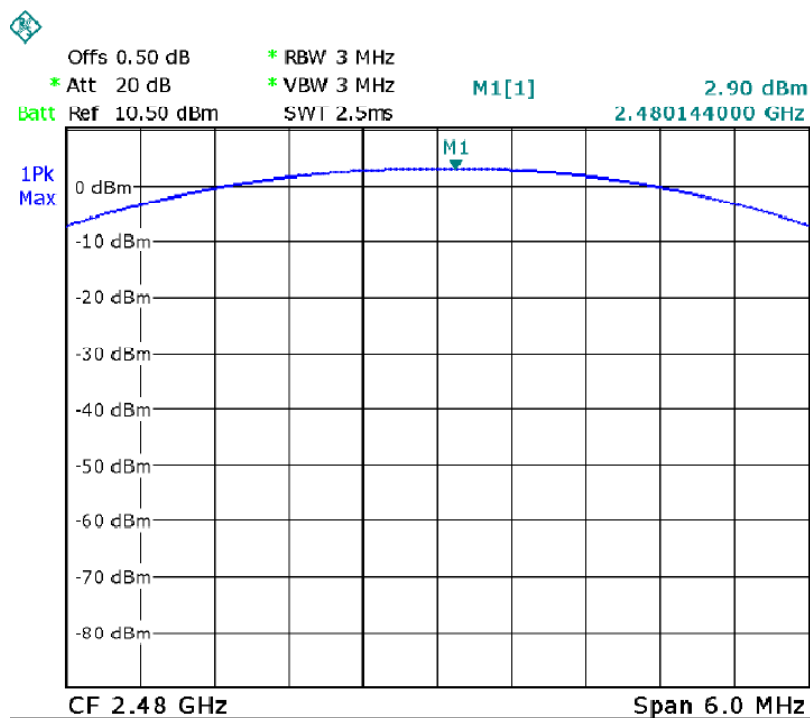


Pi/4DQPSK Low Channel

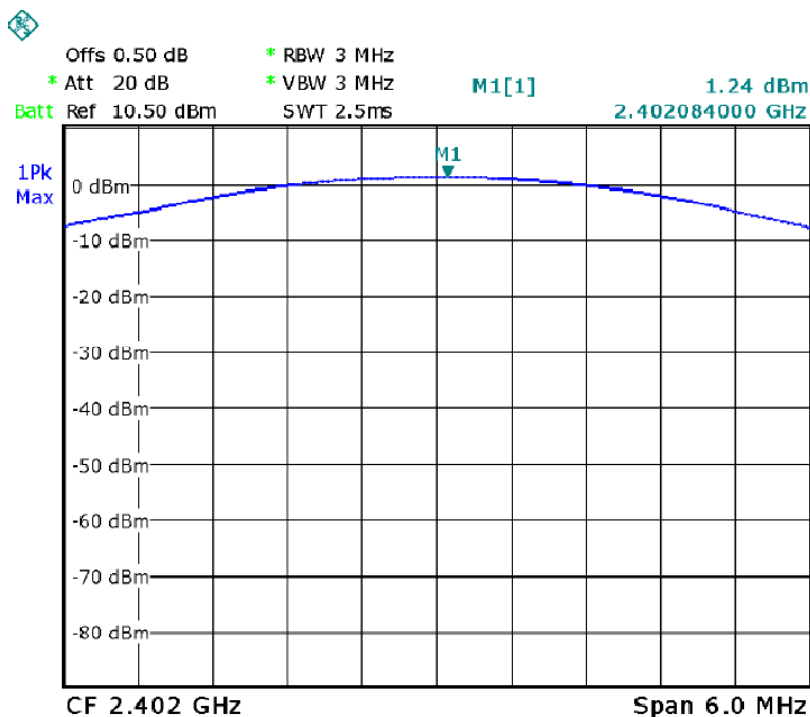


Pi/4DQPSK Middle Channel

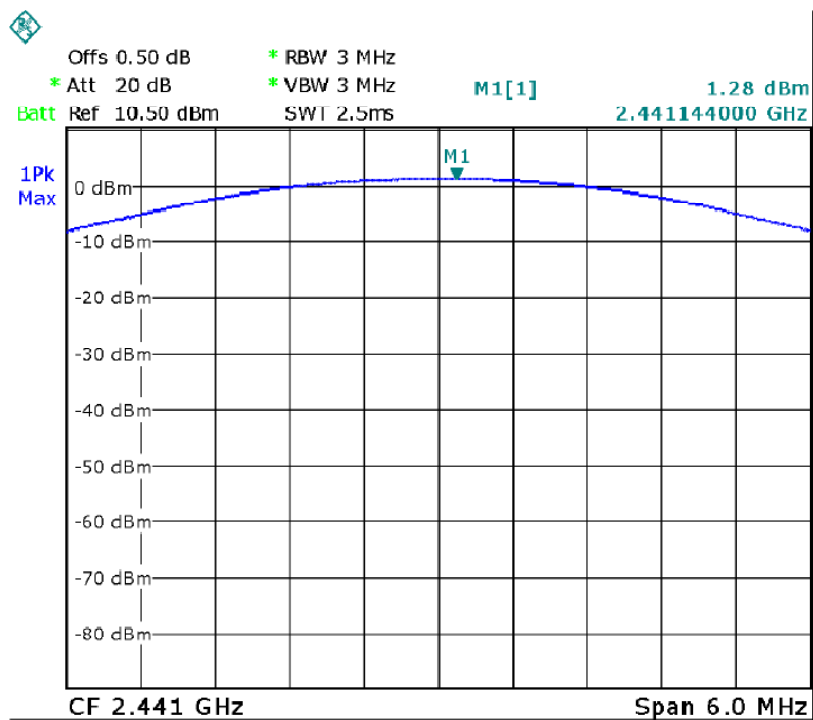


Pi/4DQPSK High Channel

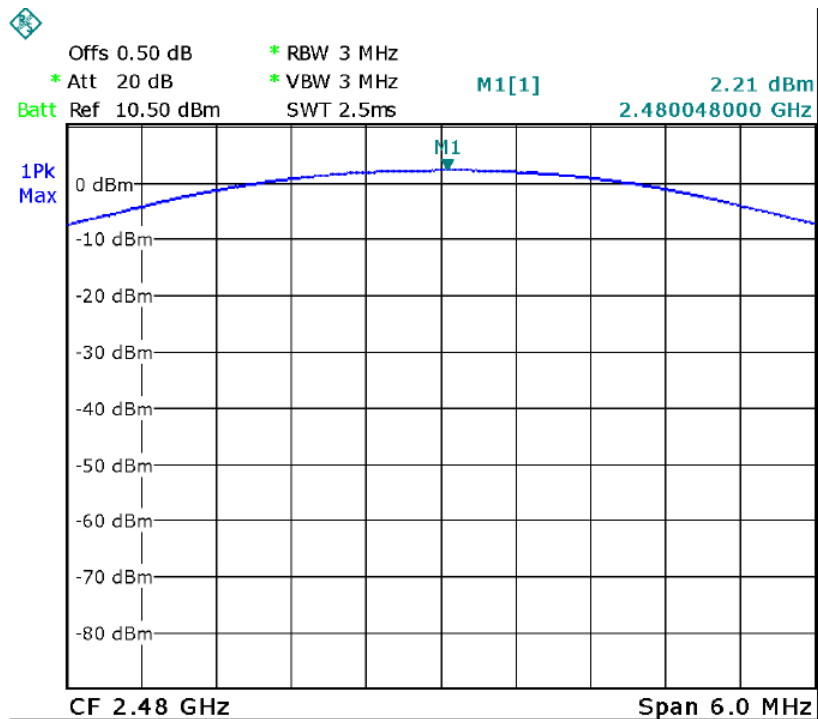


8DPSK Low Channel

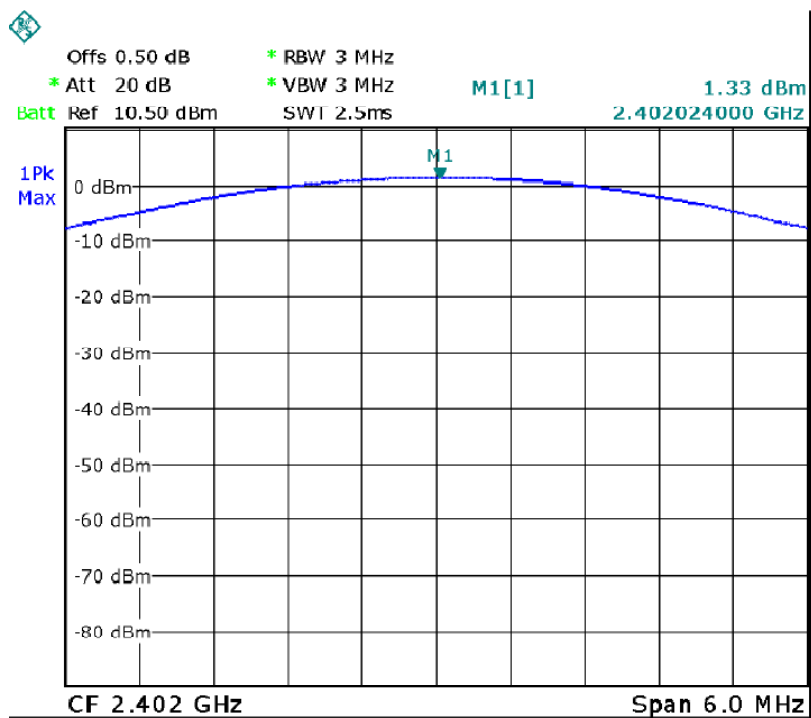

8DPSK Middle Channel

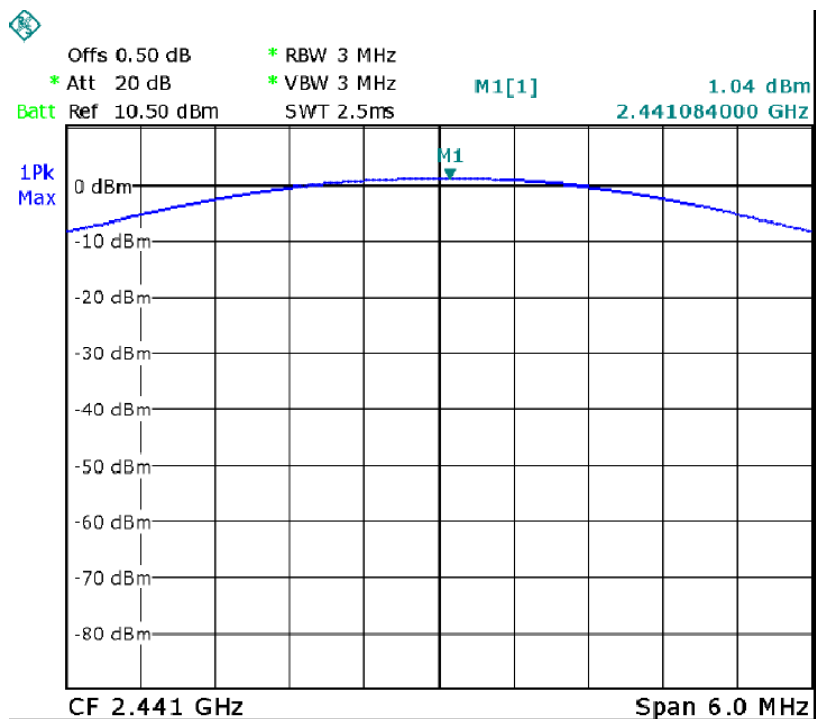

8DPSK High Channel

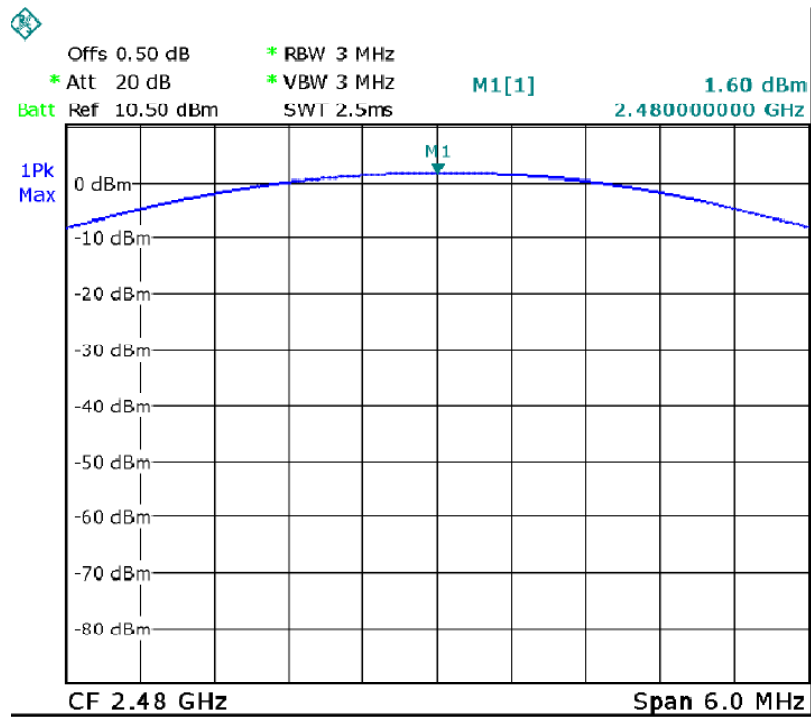

10 Hopping Channel Separation

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode	: Hopping


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


10.2 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.874	PASS
GFSK	Middle	1.000	0.874	PASS
GFSK	High	1.000	0.874	PASS
Pi/4 DQPSK	Low	1.000	0.811	PASS
Pi/4 DQPSK	Middle	1.000	0.811	PASS
Pi/4 DQPSK	High	1.000	0.811	PASS
8DPSK	Low	1.000	0.811	PASS
8DPSK	Middle	1.000	0.811	PASS
8DPSK	High	1.000	0.811	PASS


GFSK Low Channel

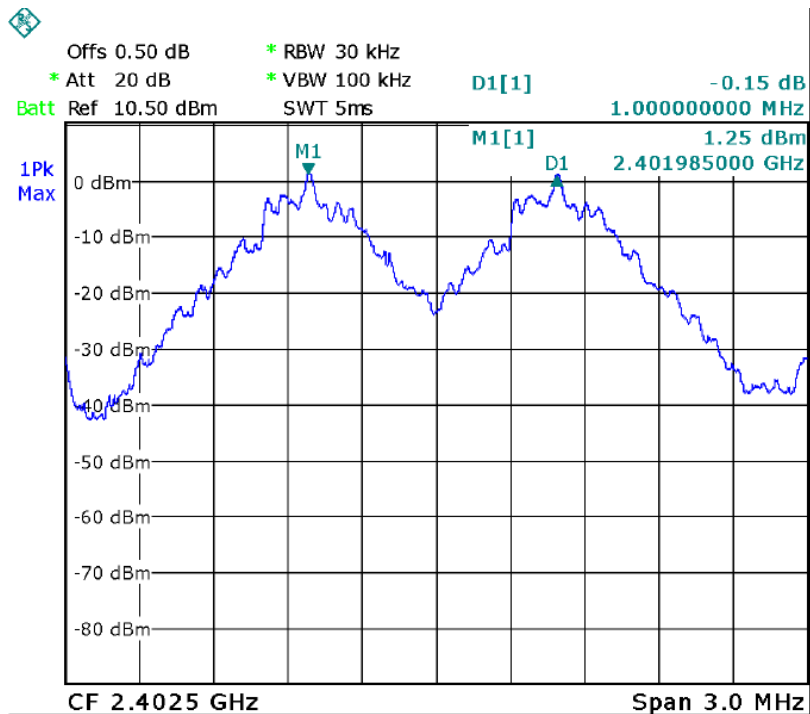


GFSK Middle Channel

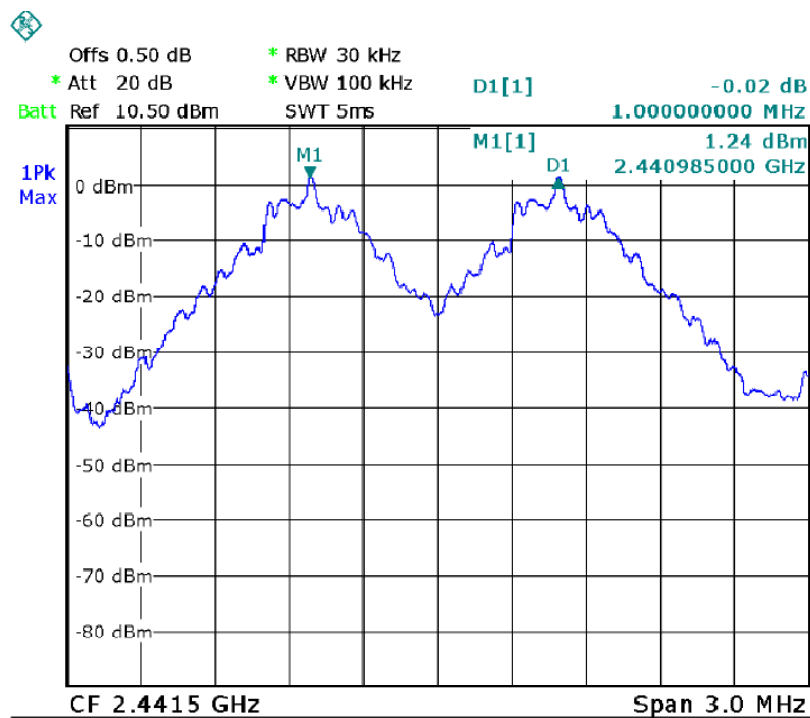


GFSK High Channel

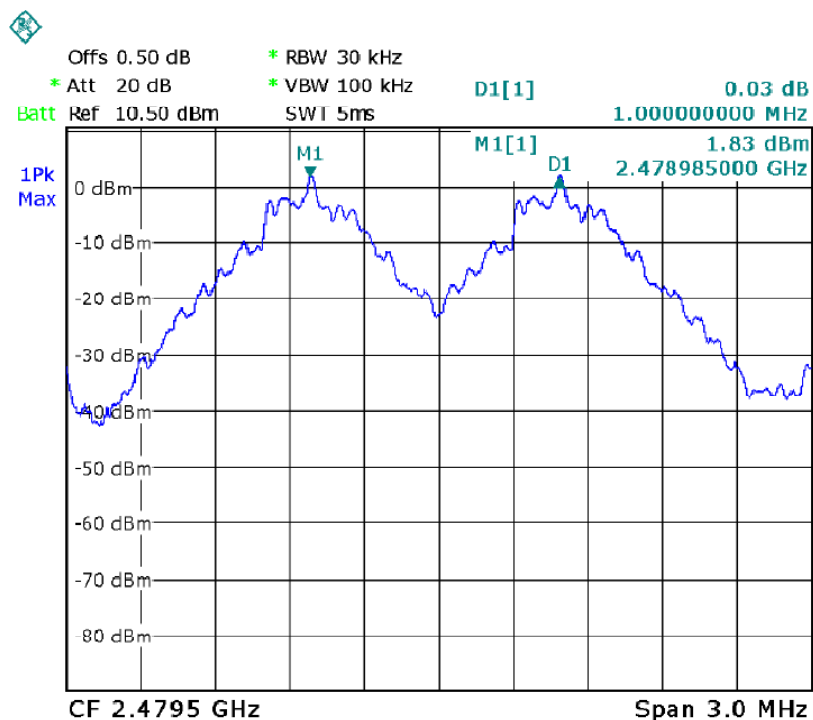


Pi/4DQPSK Low Channel

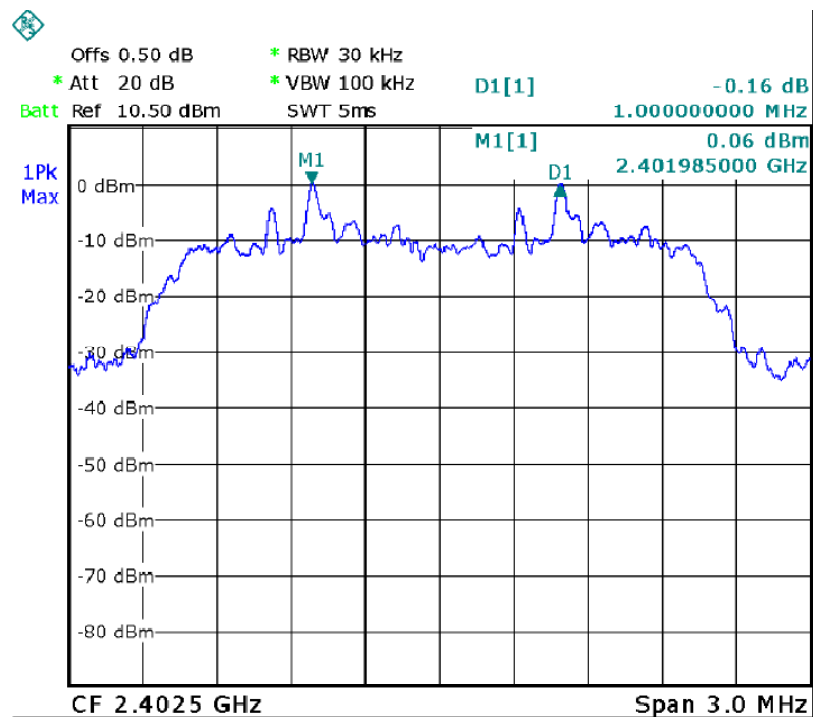


Pi/4DQPSK Middle Channel

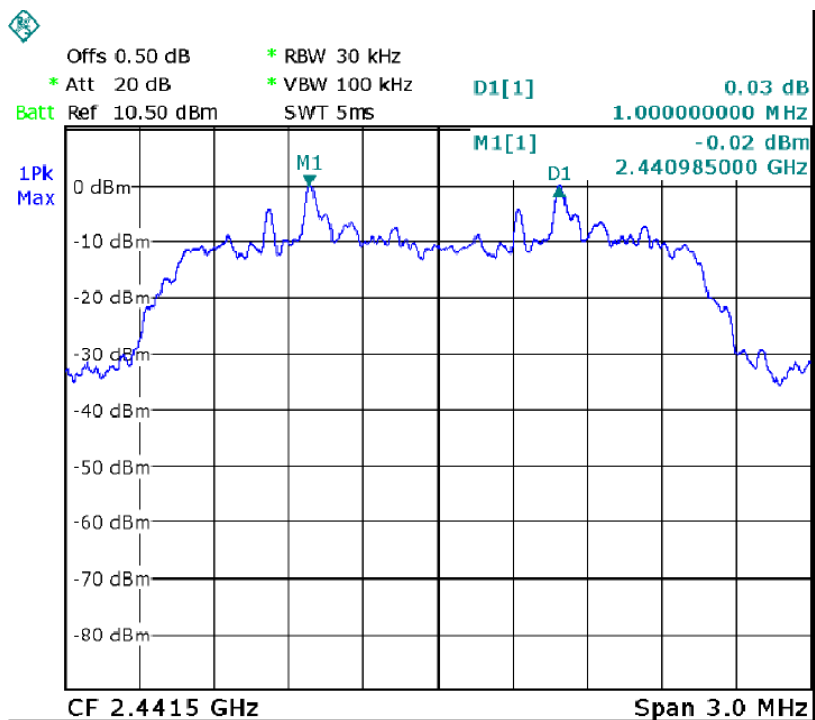


Pi/4DQPSK High Channel

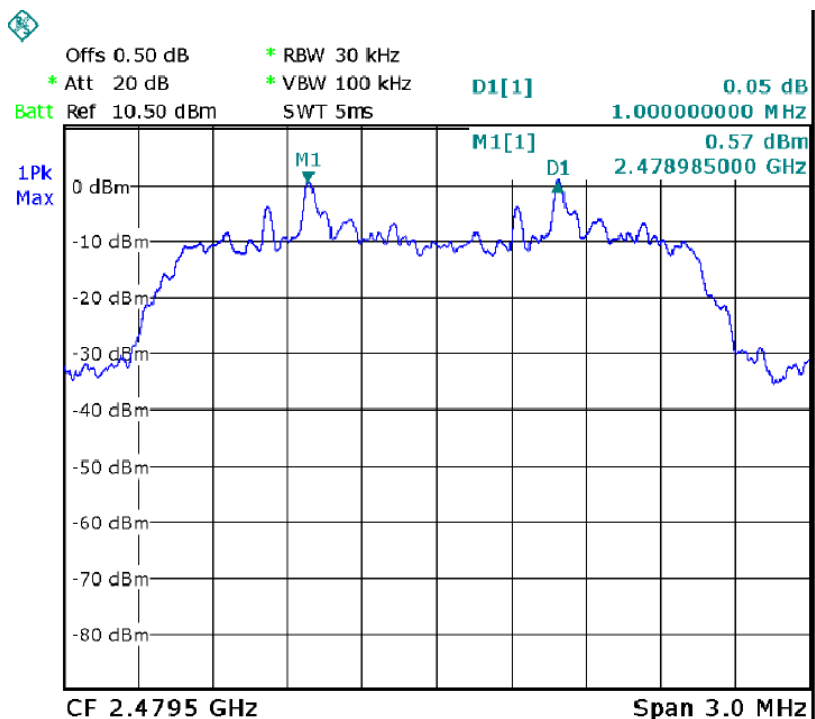


8DPSK Low Channel

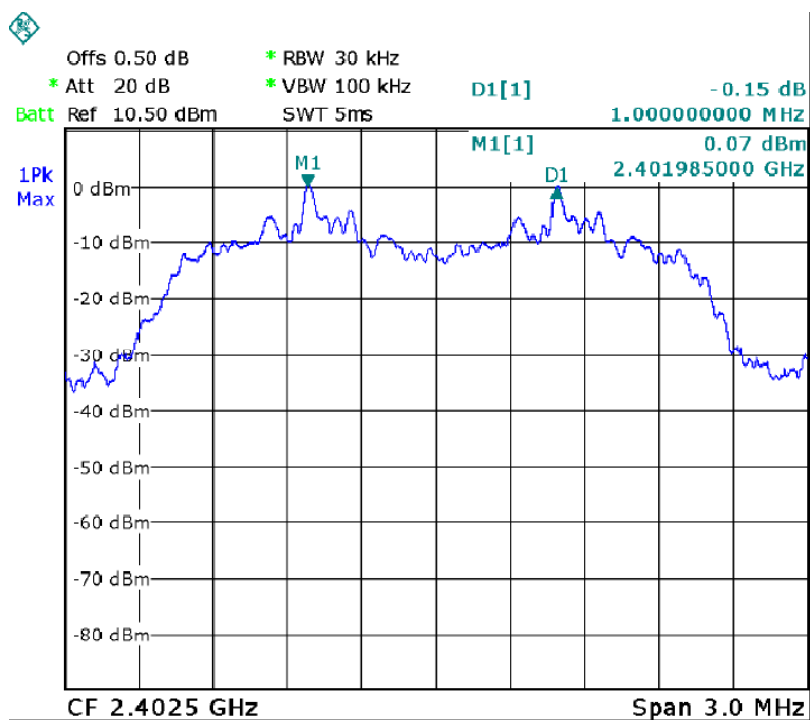

8DPSK Middle Channel

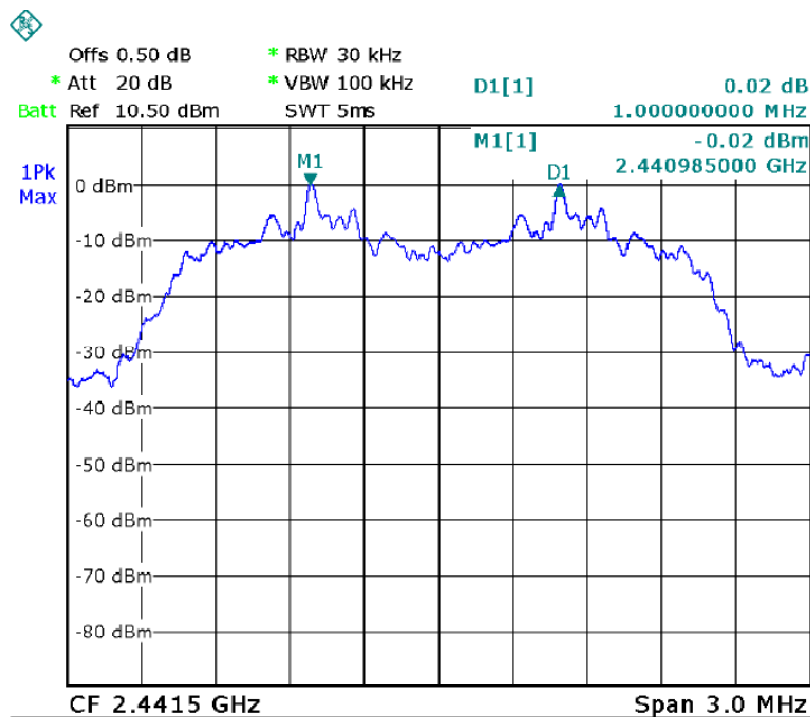

8DPSK High Channel

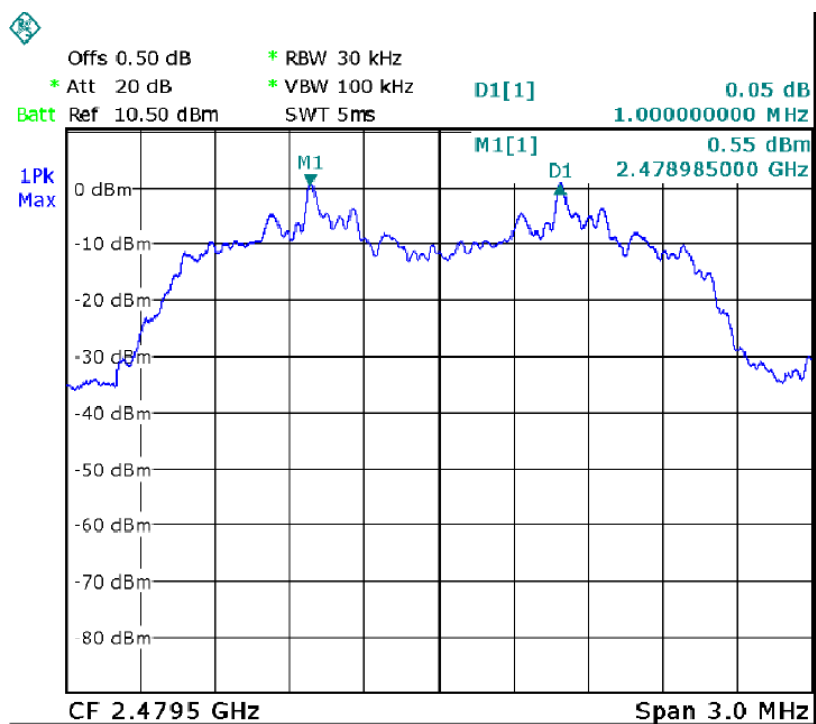

11 Number of Hopping Frequency


Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode	: Hopping(GFSK)

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

11.2 Test Result

Channel Number	Limit
79	≥ 15

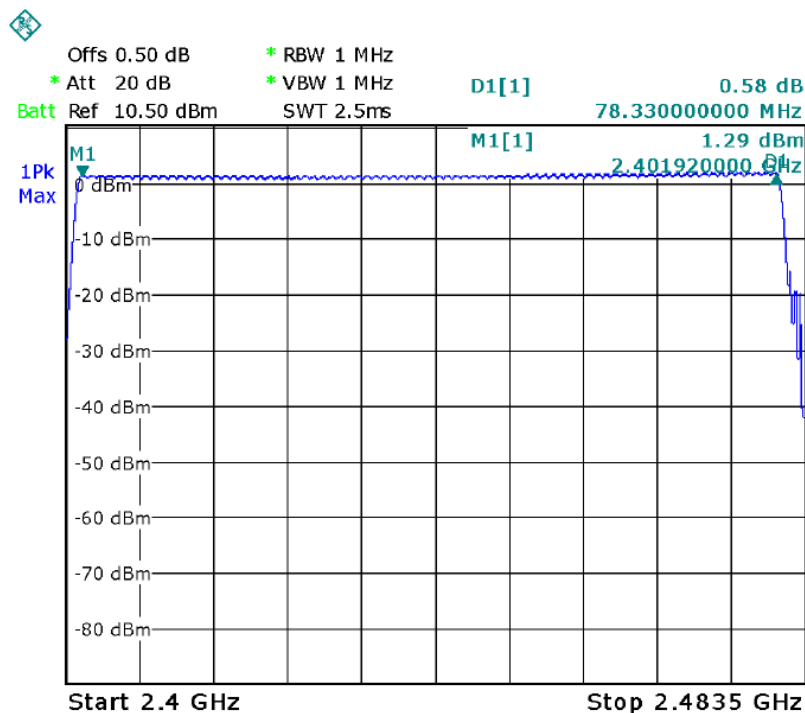

12 Dwell Time

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013, DA 00-705
Test Limit	: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode	: Hopping
Remark	: The worst case(8DPSK,3DH5) was recorded

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

12.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5/2DH5/3DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3/2DH3/3DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1/2DH1/3DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time. Only the worst data(DH5) were show as follow.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
8DPSK	3DH5	Low	2.928	0.312	0.4
		middle	2.928	0.312	0.4
		High	2.928	0.312	0.4


8DPSK Low Channel

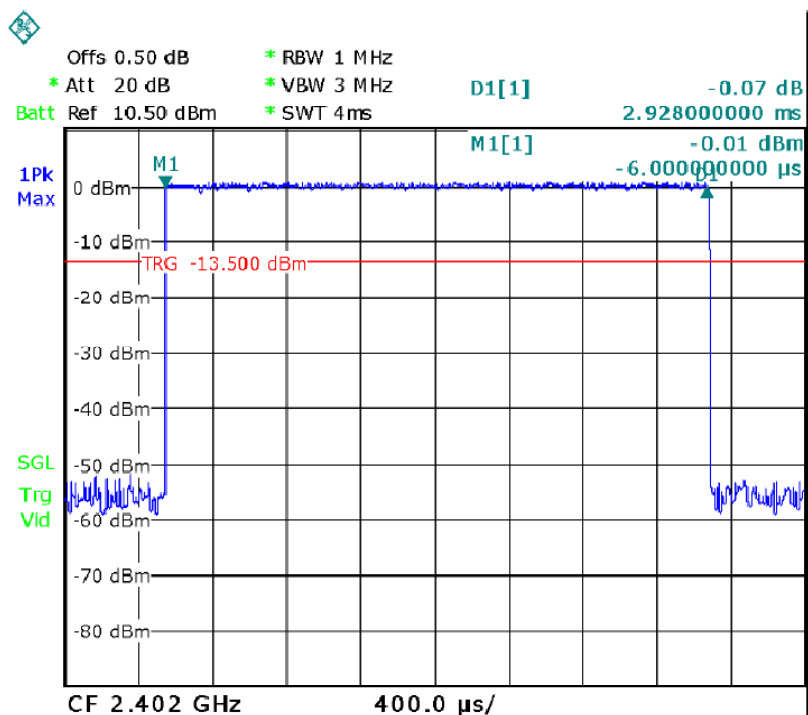

8DPSK Middle Channel

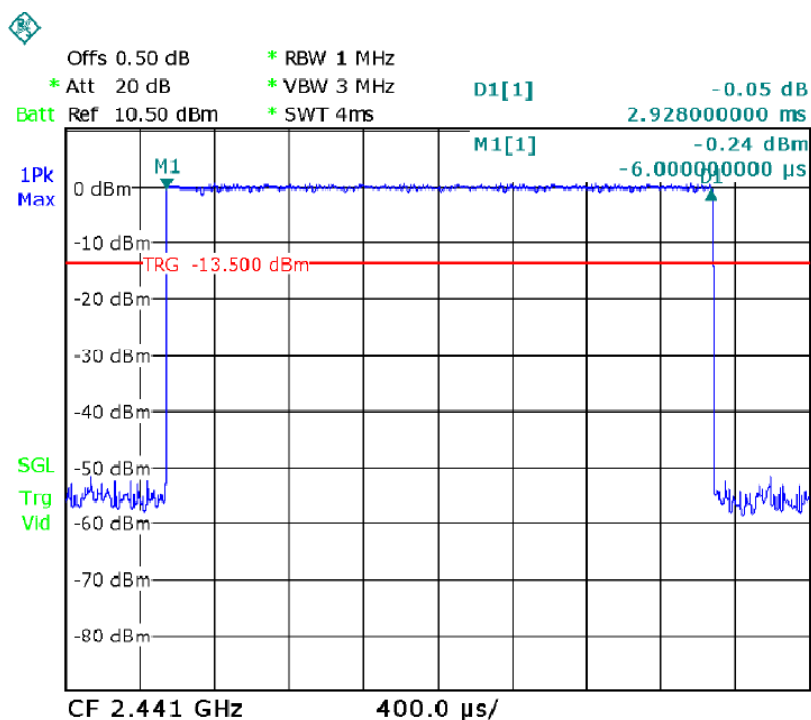

8DPSK High Channel

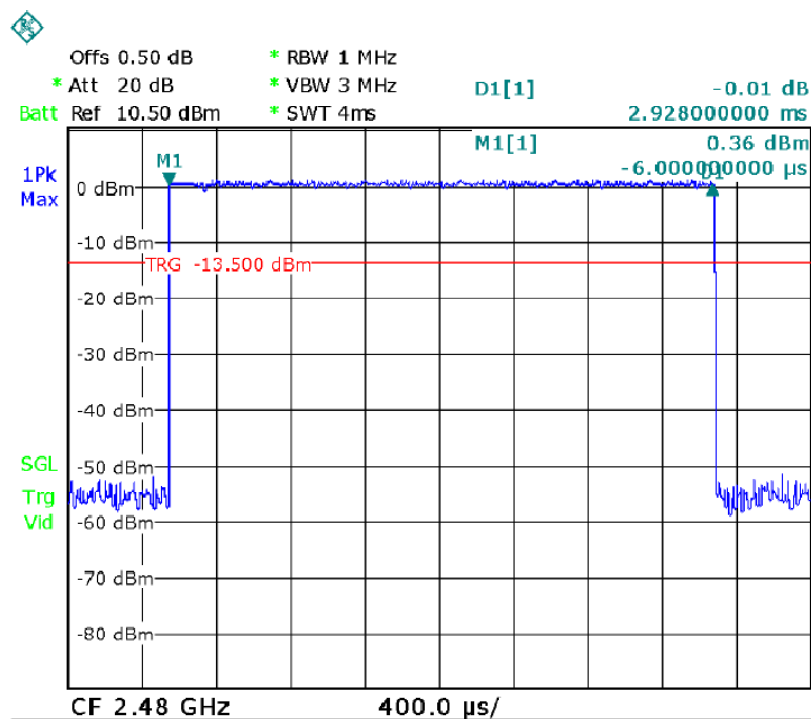

13 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10

Test Result: PASS


Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


GFSK Low Channel

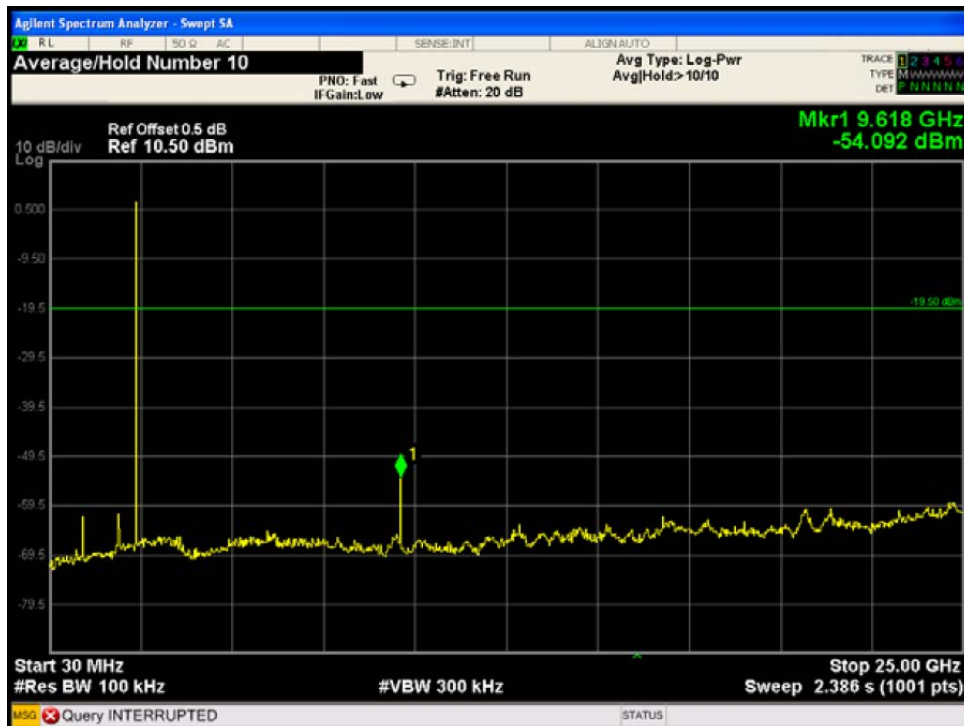

GESK Middle Channel

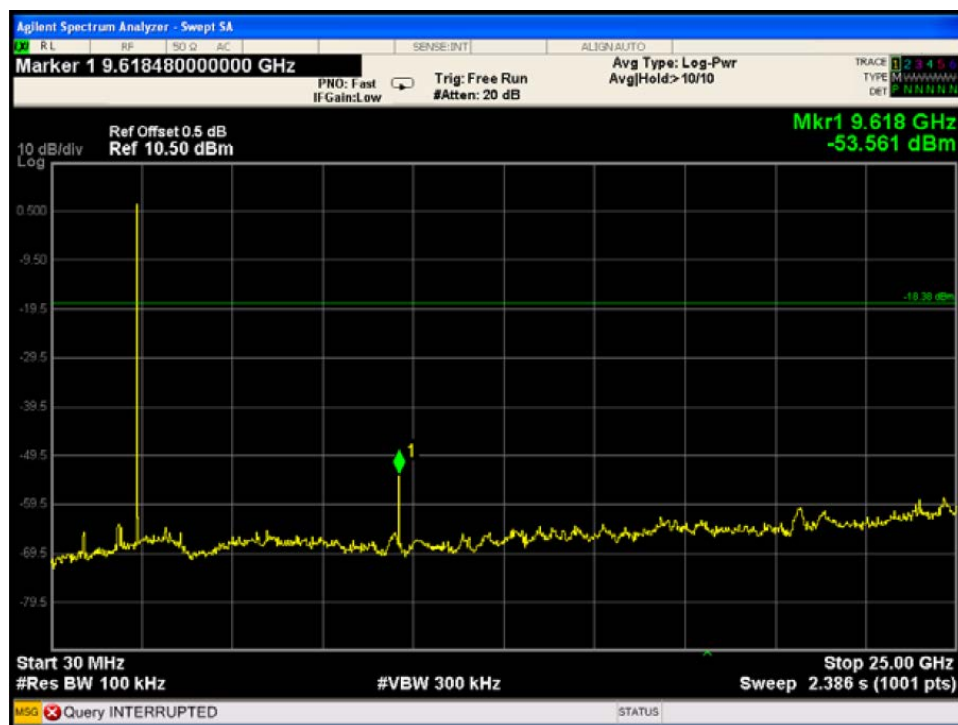

GFSK High Channel

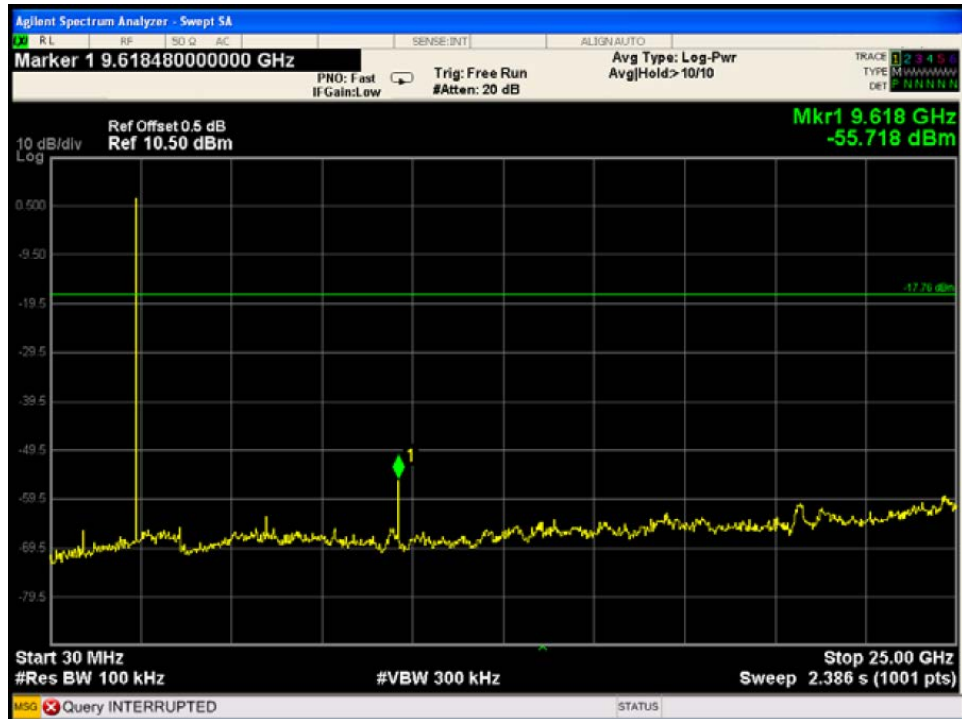


14 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has a internal permanent antenna, it meet the requirement of this section.

15 Test Setup

Spurious Emissions
From 30MHz-1000MHz

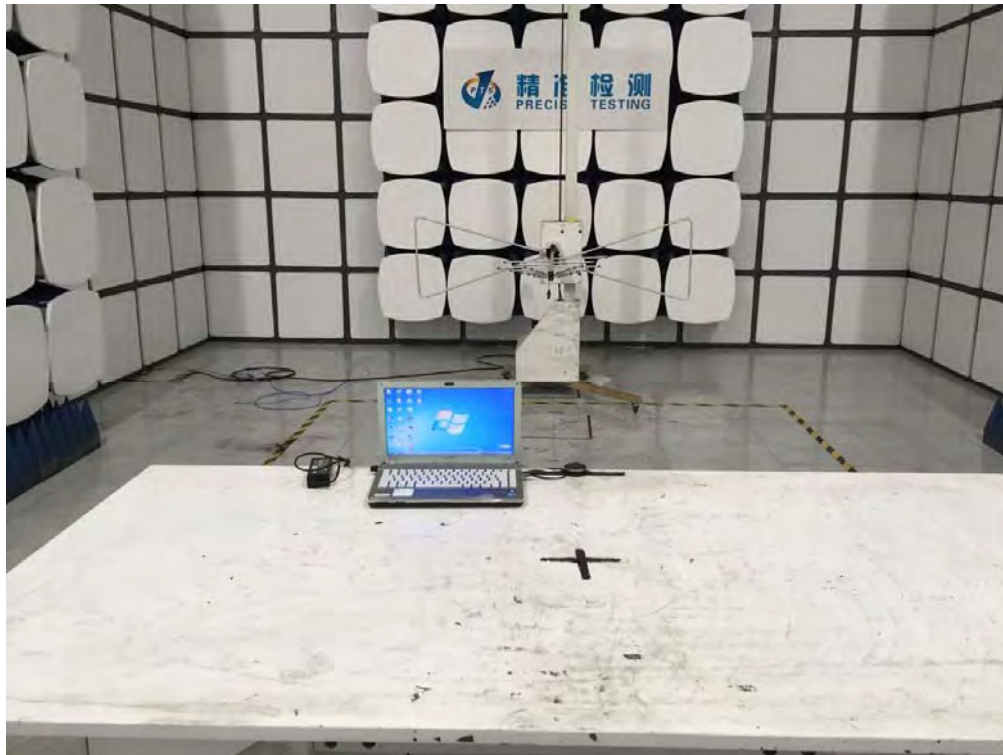

Above 1GHz



Conducted Emissions



16 EUT Photos

External Photos











Internal Photos



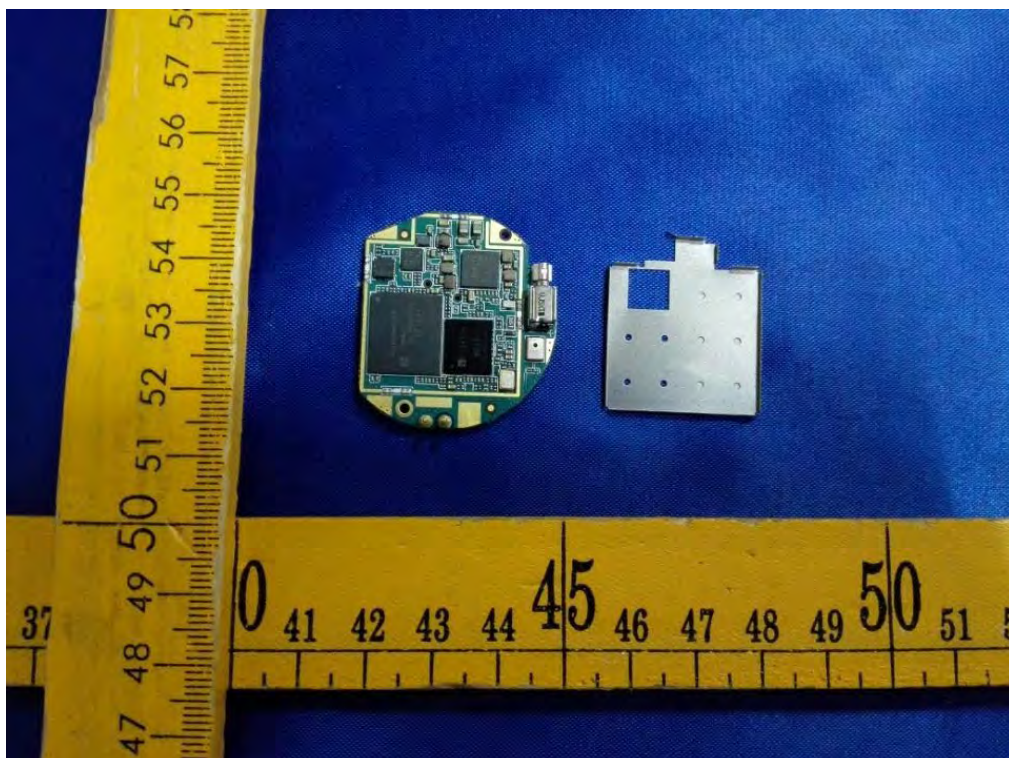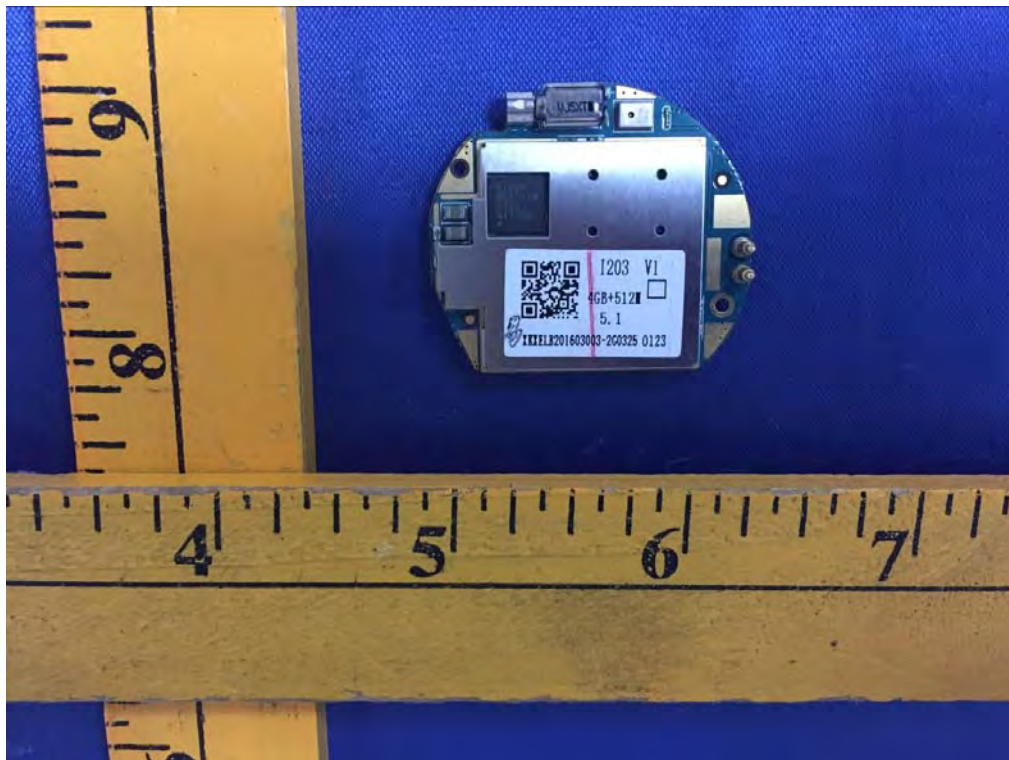

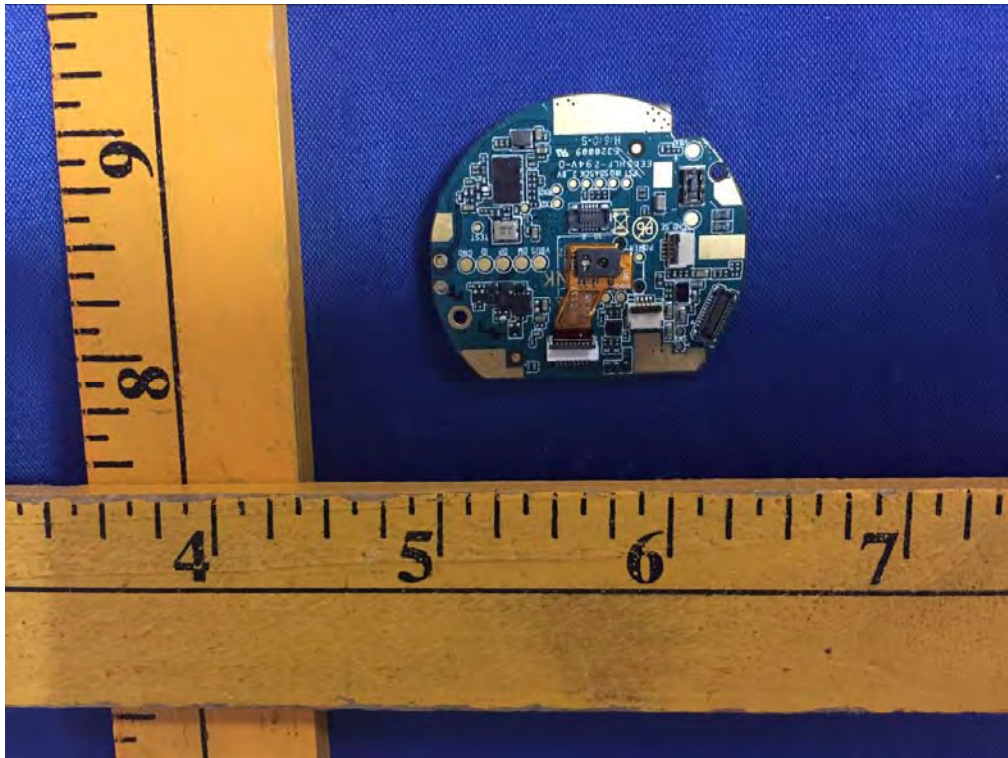

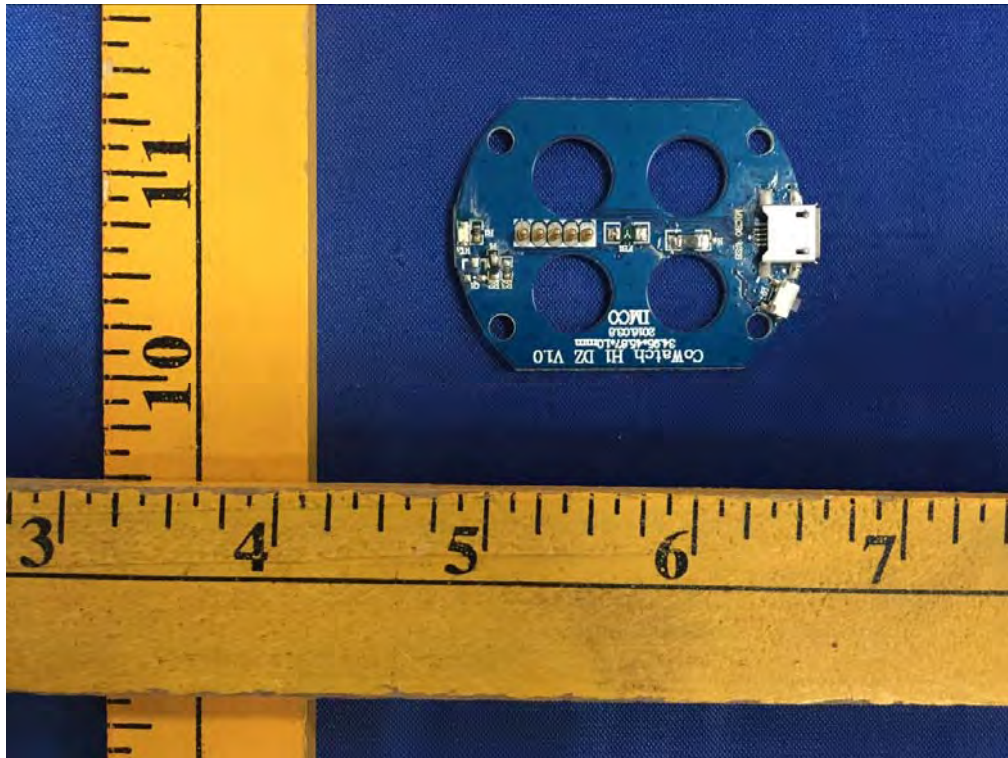

*****THE END REPORT*****