

APPLICATION CERTIFICATION  
On Behalf of  
HESHAN TONGFANG LIGHTING TECHNOLOGY COMPANY LIMITED

Remote Controller  
Model No.: TF001

FCC ID: 2AIHZ-TF001

Prepared for : HESHAN TONGFANG LIGHTING TECHNOLOGY  
COMPANY LIMITED  
Address : Gonghe Town, Heshan City, Jiangmen, Guangdong,  
529728, China  
Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20180814  
Date of Test : May 26, 2018  
Date of Report : May 28, 2018

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty .....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. THE FIELD STRENGTH OF RADIATION EMISSION .....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement .....	10
4.4. Operating Condition of EUT .....	10
4.5. Test Procedure .....	10
4.6. The Field Strength of Radiation Emission Measurement Results .....	11
<b>5. 20DB OCCUPIED BANDWIDTH .....</b>	<b>13</b>
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c).....	13
5.3. EUT Configuration on Measurement .....	14
5.4. Operating Condition of EUT .....	14
5.5. Test Procedure .....	14
5.6. Measurement Result .....	14
<b>6. RELEASE TIME MEASUREMENT.....</b>	<b>15</b>
6.1. Block Diagram of Test Setup.....	15
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a) .....	15
6.3. EUT Configuration on Measurement .....	16
6.4. Operating Condition of EUT .....	16
6.5. Test Procedure .....	16
6.6. Measurement Result .....	16
<b>7. AVERAGE FACTOR MEASUREMENT .....</b>	<b>17</b>
7.1. Block Diagram of Test Setup.....	17
7.2. Average factor Measurement according to ANSI C63.10-2013.....	17
7.3. EUT Configuration on Measurement .....	18
7.4. Operating Condition of EUT .....	18
7.5. Test Procedure .....	18
7.6. Measurement Result .....	18
<b>8. ANTENNA REQUIREMENT.....</b>	<b>19</b>
8.1. The Requirement .....	19
8.2. Antenna Construction .....	19

## Test Report Certification

Applicant : HESHAN TONGFANG LIGHTING TECHNOLOGY COMPANY LIMITED  
Manufacturer : HESHAN TONGFANG LIGHTING TECHNOLOGY COMPANY LIMITED  
Product : Remote Controller  
Model No. : TF001  
Trade name : N/A


Measurement Procedure Used:


**FCC Rules and Regulations Part 15 Subpart C Section 15.231a  
ANSI C63.10-2013**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231a. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd..

Date of Test : May 26, 2018  
Date of Report : May 28, 2018

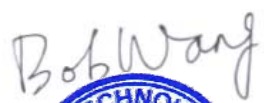Prepared by :   
(Bob Wang, Engineer)

Approved & Authorized Signer :   
( Sean Liu, Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	: Remote Controller
Model Number	: TF001
Power Supply	: DC 3V(Powered by battery)
Modulation:	: ASK
antenna gain	: 0dBi
TX Frequency	: 433.92MHz
Type of Antenna	: PCB antenna
Applicant	: HESHAN TONGFANG LIGHTING TECHNOLOGY COMPANY LIMITED
Address	: Gonghe Town, Heshan City, Jiangmen, Guangdong, 529728, China
Manufacturer	: HESHAN TONGFANG LIGHTING TECHNOLOGY COMPANY LIMITED
Address	: Gonghe Town, Heshan City, Jiangmen, Guangdong, 529728, China
Date of sample received	: May 20, 2018
Date of Test	: May 26, 2018
Sample No.	: 1800617

## 1.2.Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358
		Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2
		Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193
		Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd.
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

## 1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Cal. Interval
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 06, 2018	One Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 06, 2018	One Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 06, 2018	One Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 06, 2018	One Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 06, 2018	One Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 06, 2018	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 06, 2018	One Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Jan. 06, 2018	One Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 06, 2018	One Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 06, 2018	One Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 06, 2018	One Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 06, 2018	One Year

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(b)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(a)(1)	Release Time Measurement	Compliant
Section 15.203	Antenna Requirement	Compliant

The product is a manually operated transmitter.

Section 15.231 (a) (2), (3), (4) and (5) are not applicable.

Note: The power supply mode of the EUT is DC 3V, According to the FCC standard requirements, conducted emission is not applicable

All normal using modes of the normal function were tested but only the worst test data of the worst mode is recorded by this report.

## 4. THE FIELD STRENGTH OF RADIATION EMISSION

### 4.1. Block Diagram of Test Setup


#### 4.1.1. Block diagram of connection between the EUT and simulators




(EUT: Remote Controller)

#### 4.1.2. Semi-Anechoic Chamber Test Setup Diagram

**Below 30MHz**

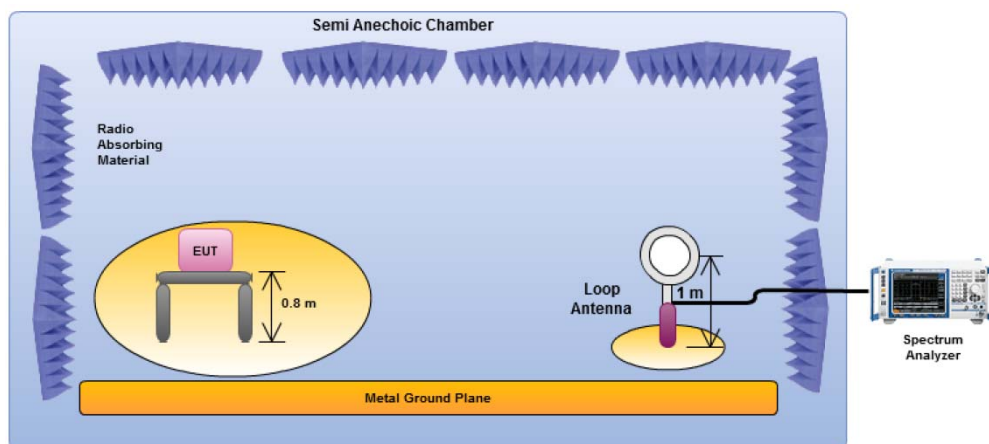


**Below 1GHz:**

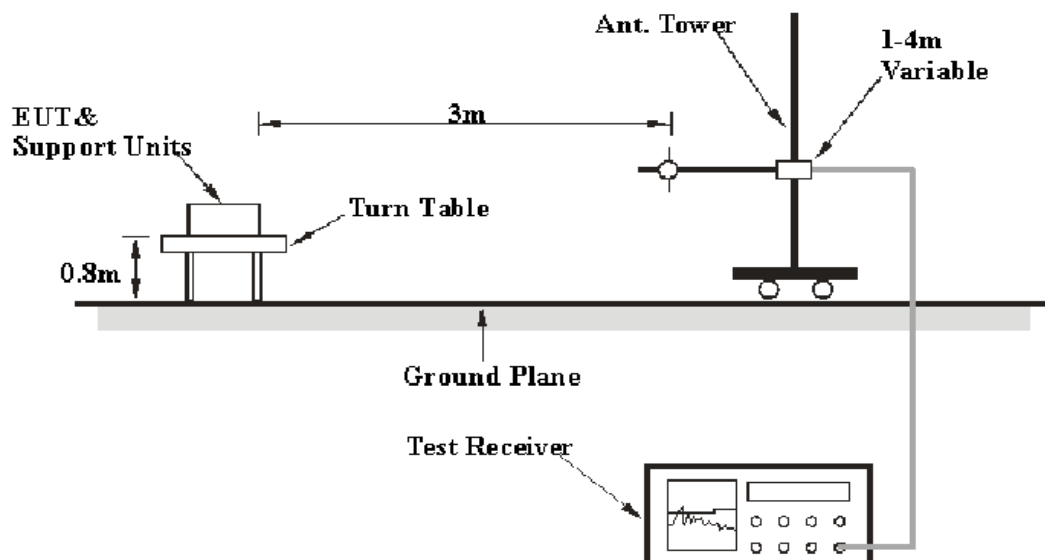



Above 1GHz:

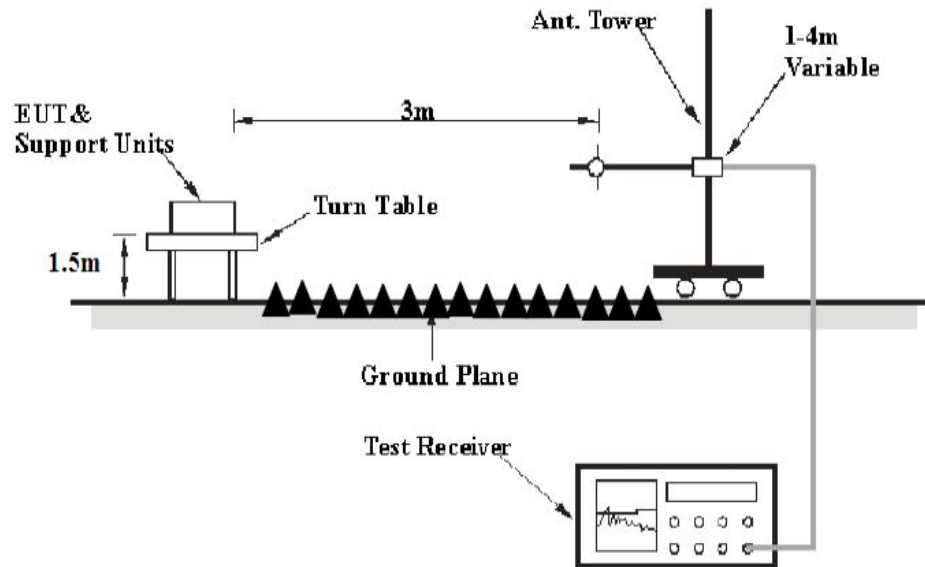

(EUT: Remote Controller)

## 4.2. The Field Strength of Radiation Emission Measurement Limits

### 4.2.1. Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [ $\mu\text{V/m}$ ]	Field Strength of Spurious Emission [Average] [ $\mu\text{V/m}$ ]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250
Above 470	12500	1250

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

#### 4.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section 15.209.

### 4.3. Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.3.1. Remote Controller (EUT)

Model Number	:	TF001
Serial Number	:	N/A
Manufacturer	:	HESHAN TONGFANG LIGHTING TECHNOLOGY COMPANY LIMITED

### 4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX mode measure it.

### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120 kHz in 30-1000 MHz, and 1 MHz in 1000-5000 MHz.

The frequency range from 30 MHz to 5000 MHz is checked.

#### 4.6.The Field Strength of Radiation Emission Measurement Results

**PASS.**

The frequency range 30MHz to 5000MHz is investigated.

EUT:	Remote Controller		Power Supply:	DC 3V	
Model No.:	TF001		Test Engineer:	Frank	
Test Mode:	TX				

Frequency (MHz)	Reading (dBμV/m)	Factor Corr.	Average Factor	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
53.0056	46.64	-26.69	-	-	19.95	-	40.00	-	-20.05 (QP)	Vertical
111.2483	52.96	-27.29	-	-	25.67	-	43.50	-	-17.83 (QP)	
254.0312	49.82	-23.41	-	-	26.41	-	46.00	-	-19.59 (QP)	
340.0473	47.15	-19.75	-	-	27.40	-	46.00	-	-18.60 (QP)	
<b>433.92</b>	<b>94.87</b>	<b>-17.78</b>	<b>-7.91</b>	<b>69.18</b>	<b>77.09</b>	<b>80.82</b>	<b>100.82</b>	<b>-11.64</b>	<b>-23.73</b>	
867.84	46.70	-7.98	<b>-7.91</b>	30.81	38.72	60.82	<b>80.82</b>	-30.01	-42.10	
1301.760	55.95	-8.43	<b>-7.91</b>	52.91	39.61	60.82	80.82	-21.21	-33.30	
1735.680	54.23	-7.28	<b>-7.91</b>	39.01	46.95	60.82	80.82	-21.81	-33.87	
2169.600	53.15	-5.43	<b>-7.91</b>	39.81	47.72	60.82	80.82	-21.01	-33.10	
2603.520	51.98	-3.46	<b>-7.91</b>	40.61	48.52	60.82	80.82	-21.11	-32.30	
3474.360	47.60	0.02	<b>-7.91</b>	39.71	47.62	60.82	80.82	-20.77	-33.20	
4339.200	47.04	1.52	<b>-7.91</b>	40.65	48.56	60.82	80.82	-20.17	-32.26	
166.6384	41.61	-26.36	-	-	15.25	-	43.50	-	-28.25 (QP)	Horizontal
183.8660	41.10	-25.65	-	-	15.45	-	43.50	-	-28.05 (QP)	
210.1294	41.11	-24.11	-	-	17.00	-	43.50	-	-26.50 (QP)	
307.1051	39.03	-21.02	-	-	18.01	-	46.00	-	-27.99 (QP)	
<b>433.92</b>	<b>96.61</b>	<b>-17.78</b>	<b>-7.91</b>	<b>70.92</b>	<b>78.83</b>	<b>80.82</b>	<b>100.82</b>	<b>-9.90</b>	<b>-21.99</b>	
867.84	48.69	-7.98	<b>-7.91</b>	32.80	40.71	60.82	<b>80.82</b>	-28.02	-40.11	
1301.760	54.45	-8.43	<b>-7.91</b>	38.11	46.02	54.00	74.00	-22.71	-34.80	
1735.680	53.23	-7.28	<b>-7.91</b>	38.04	45.95	60.82	80.82	-22.78	-34.87	
2603.520	50.98	-3.46	<b>-7.91</b>	39.61	47.52	60.82	80.82	-21.21	-33.30	

3471.360	48.10	0.02	<b>-7.91</b>	40.21	48.12	60.82	80.82	-20.61	-32.70	
3905.280	47.74	0.95	<b>-7.91</b>	40.78	48.69	54.00	74.00	-20.04	-32.13	
4339.200	47.04	1.52	<b>-7.91</b>	40.65	48.56	60.82	80.82	-20.17	-32.26	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. FCC Limit for Average Measurement =  $41.6667(433.92) - 7083.3333 = 10996.6812 \mu\text{V/m} = 80.82 \mu\text{V/m}$
4. The spectral diagrams in appendix I display the measurement of peak values.
5. Average value= PK value + Average Factor (duty factor)
6. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.
7. The EUT is tested radiation emission in three axes(X,Y,Z). The worst emissions are reported in three axes.

#### 8. Pulse Desensitization Correction Factor

Pulse Width (PW) = 1.38ms

$2/PW = 2/1.38\text{ms} = 1.45\text{kHz}$

RBW (100 kHz) > 2/PW (1.45 kHz)

Therefore PDCF is not needed

## 5. 20DB OCCUPIED BANDWIDTH


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Remote Controller)

#### 5.1.2. Semi-Anechoic Chamber Test Setup Diagram

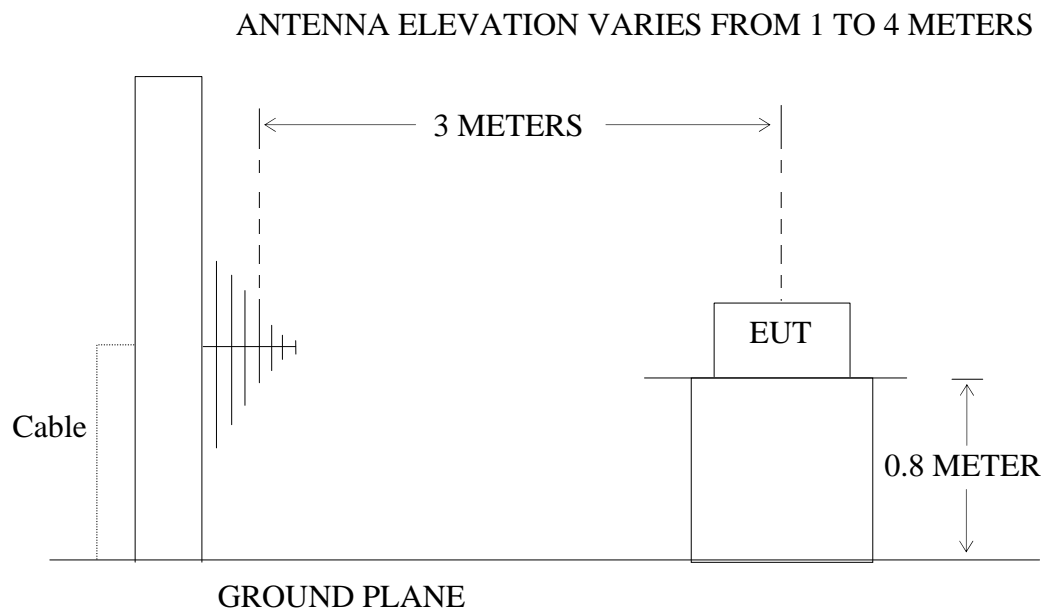

(EUT: Remote Controller)

### 5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

#### 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is  $433.92 \text{ MHz} \times 0.25\% = 1084.8 \text{ kHz}$ . Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

### 5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1.Remote Controller (EUT)

Model Number	:	TF001
Serial Number	:	N/A
Manufacturer	:	HESHAN TONGFANG LIGHTING TECHNOLOGY COMPANY LIMITED

### 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in TX mode measure it.

### 5.5.Test Procedure

5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10 kHz, VBW = 30 kHz, Span = 1.0MHz.

5.5.2.Set SPA Max hold, Mark peak, -20 dB.

### 5.6.Measurement Result

**The EUT does meet the FCC requirement.**

-20 dB bandwidth = 50 kHz <1084.8 kHz.

The spectral diagrams in appendix I.

## 6. RELEASE TIME MEASUREMENT


### 6.1. Block Diagram of Test Setup

#### 6.1.1. Block diagram of connection between the EUT and simulators



(EUT: Remote Controller)

#### 6.1.2. Semi-Anechoic Chamber Test Setup Diagram

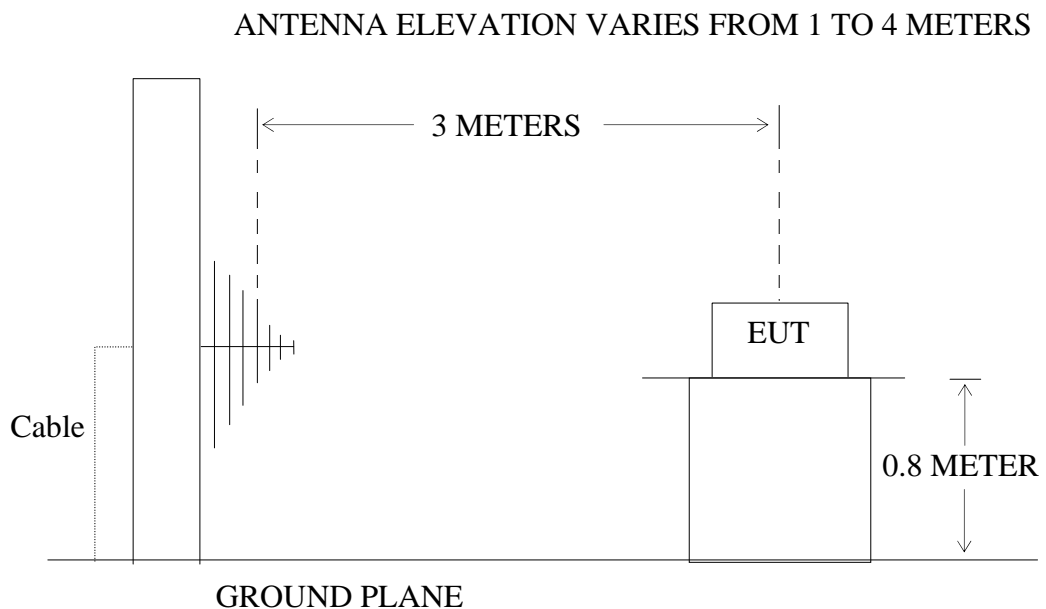

(EUT: Remote Controller)

### 6.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 6.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.3.1. Remote Controller (EUT)

Model Number : TF001  
Serial Number : N/A  
Manufacturer : HESHAN TONGFANG LIGHTING TECHNOLOGY  
COMPANY LIMITED

### 6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in TX mode measure it.

### 6.5.Test Procedure

6.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz. Sweep time = 10 s.

6.5.2.Set EUT as normal operation and press Transmitter button.

6.5.3.Set SPA View. Delta Mark time.

### 6.6. Measurement Result

**The release time less than 5 seconds.**

Release Time = 0.67ms

The spectral diagrams in appendix I.



## 7. AVERAGE FACTOR MEASUREMENT


### 7.1. Block Diagram of Test Setup

#### 7.1.1. Block diagram of connection between the EUT and simulators



(EUT: Remote Controller)

#### 7.1.2. Semi-Anechoic Chamber Test Setup Diagram

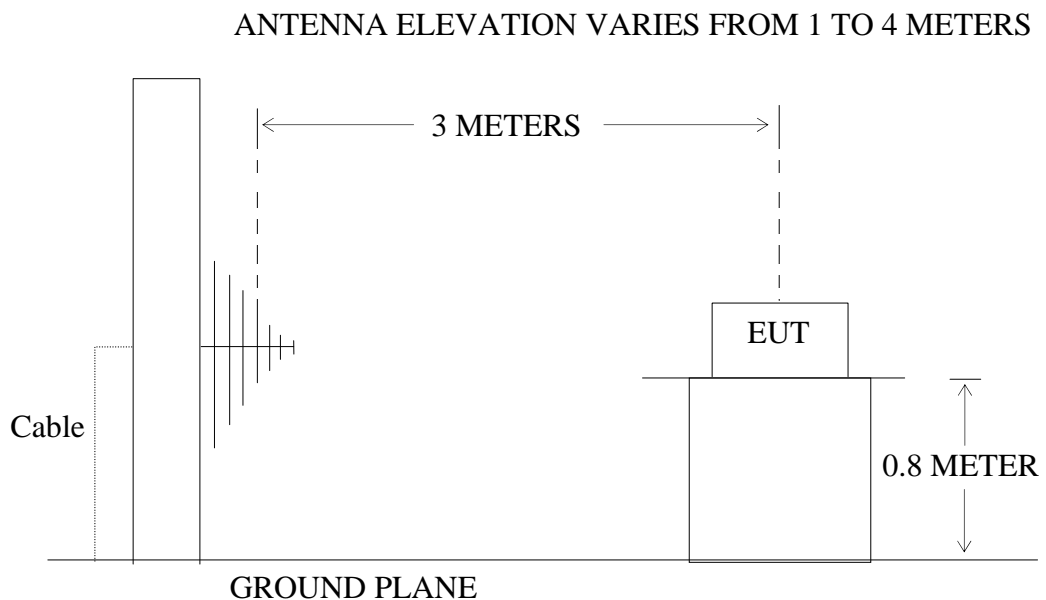

### 7.2. Average factor Measurement according to ANSI C63.10-2013

**ANSI C63.10-2013 Section 7.5** Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval.<sup>64</sup> The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in Equation (10):

**Average factor in dB = 20 log (duty cycle)**

### 7.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 7.3.1. Remote Controller (EUT)

Model Number : TF001  
Serial Number : N/A  
Manufacturer : HESHAN TONGFANG LIGHTING TECHNOLOGY  
COMPANY LIMITED

### 7.4.Operating Condition of EUT

7.4.1.Setup the EUT and simulator as shown as Section 7.1.

7.4.2.Turn on the power of all equipment.

7.4.3.Let the EUT work in TX mode measure it.

### 7.5.Test Procedure

7.5.1.The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2.Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz.

7.5.3.Set EUT as normal operation.

7.5.4.Set SPA View. Delta Mark time.

### 7.6. Measurement Result

**The duty cycle is simply the on time divided by the period:**

The duration of one cycle = 57.30ms

Effective period of the cycle =  $(5.10 \times 1) + (1.38 \times 13) \text{ms} = 23.04 \text{ ms}$

DC =  $23.04 \text{ms} / 57.30 \text{ms} = 0.402$

**Therefore, the average factor is found by  $20 \log 0.402 = -7.91 \text{dB}$**

The spectral diagrams in appendix I.


## 8. ANTENNA REQUIREMENT

### 8.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.2.Antenna Construction

Device is equipped with PCB antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

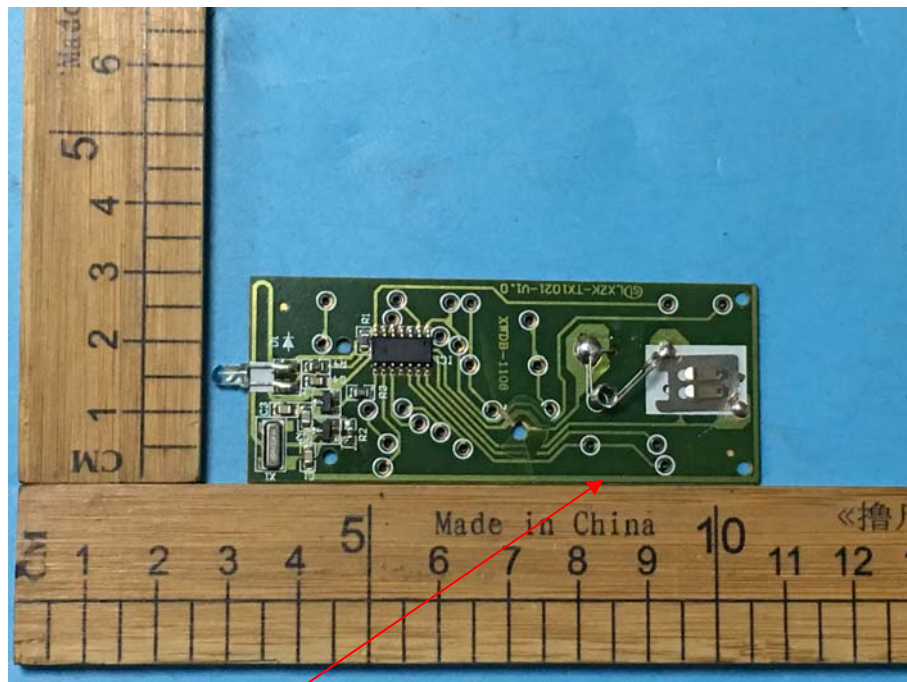

Antenna

## APPENDIX I (Test Curves)



## ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: frank2018 #26  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Remote Controller  
Mode: TX433.92MHz  
Model: TF001  
Manufacturer: HESHAN TONGFANG LIGHTING TECHNOLOGY

Polarization: Horizontal  
Power Source: DC 3V  
Date: 18/05/26/  
Time: 10/27/15  
Engineer Signature: Frank  
Distance: 3m

Note: Report NO.:ATE20180814

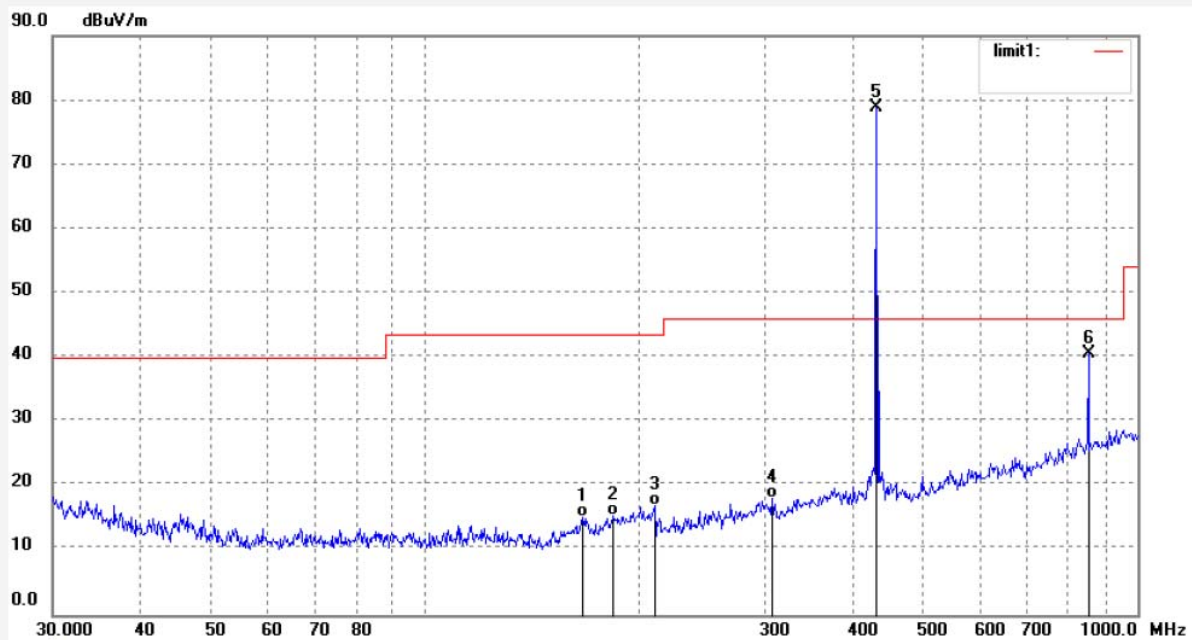

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	166.6384	41.61	-26.36	15.25	43.50	-28.25	QP	100	102	
2	183.8660	41.10	-25.65	15.45	43.50	-28.05	QP	100	38	
3	210.1294	41.11	-24.11	17.00	43.50	-26.50	QP	100	197	
4	307.1051	39.03	-21.02	18.01	46.00	-27.99	QP	100	249	
5	433.9200	96.61	-17.78	78.83	100.82	-21.99	peak	100	154	
6	867.8400	48.69	-7.98	40.71	80.82	-40.11	peak	100	24	





## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290


Fax:+86-0755-26503396

Job No.: frank2018 #27  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 55 %  
EUT: Remote Controller  
Mode: TX433.92MHz  
Model: TF001

Polarization: Vertical  
Power Source: DC 3V  
Date: 18/05/26/  
Time: 10/28/45  
Engineer Signature: Frank  
Distance: 3m

Manufacturer: HESHAN TONGFANG LIGHTING TECHNOLOGY

Note: Report NO.:ATE20180814

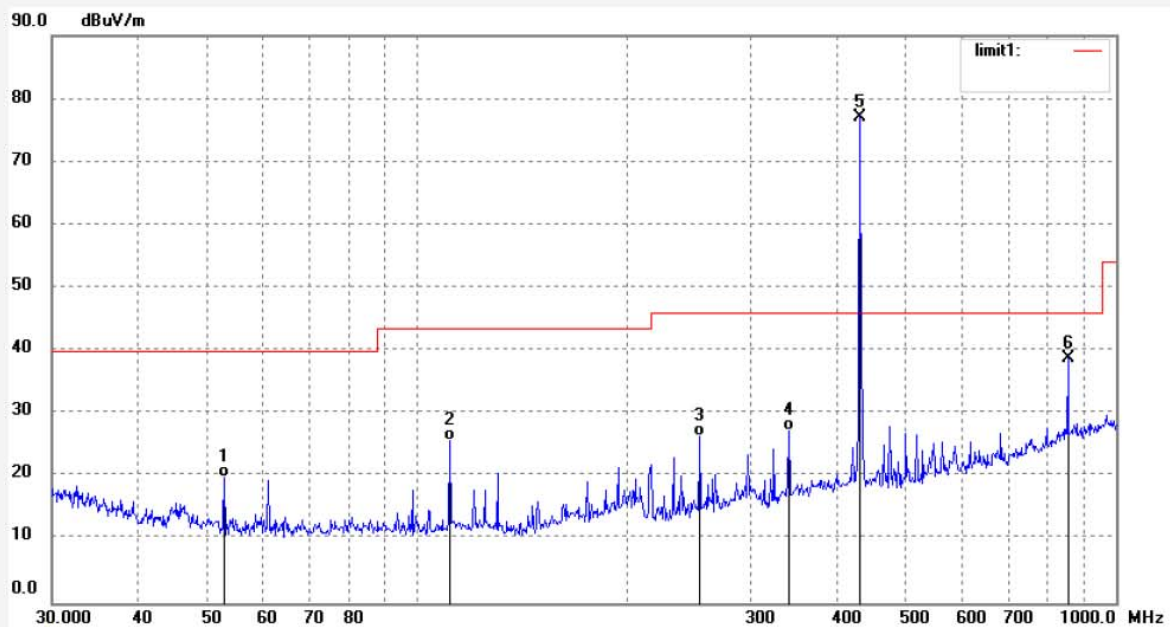

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	53.0056	46.64	-26.69	19.95	40.00	-20.05	QP	100	125	
2	111.2483	52.96	-27.29	25.67	43.50	-17.83	QP	100	97	
3	254.0312	49.82	-23.41	26.41	46.00	-19.59	QP	100	101	
4	340.0473	47.15	-19.75	27.40	46.00	-18.60	QP	100	327	
5	433.9200	94.87	-17.78	77.09	100.82	-23.73	peak	100	157	
6	867.8400	46.70	-7.98	38.72	80.82	-42.10	peak	100	222	



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: frank2018 #28

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Remote Controller

Mode: TX433.92MHz

Model: TF001

Manufacturer: HESHAN TONGFANG LIGHTING TECHNOLOGY

Polarization: Vertical

Power Source: DC 3V


Date: 18/05/26/

Time: 10/32/19

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20180814

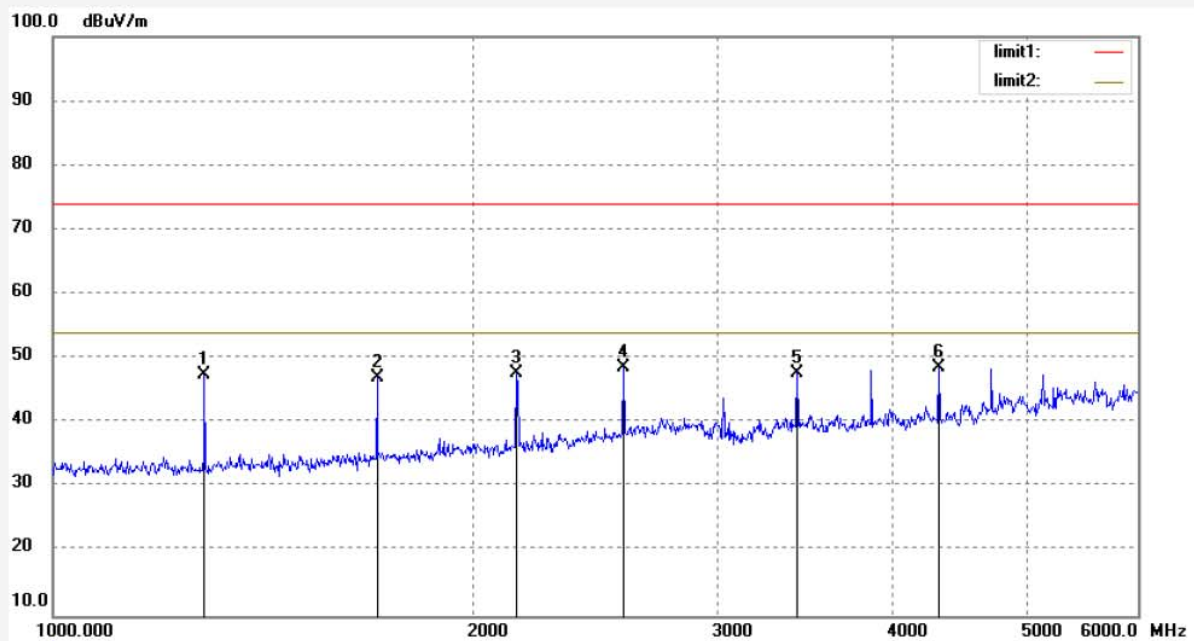

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	55.95	-8.43	47.52	80.82	-33.30	peak	150	113	
2	1735.680	54.23	-7.28	46.95	80.82	-33.87	peak	150	244	
3	2169.600	53.15	-5.43	47.72	80.82	-33.10	peak	150	321	
4	2603.520	51.98	-3.46	48.52	80.82	-32.30	peak	150	114	
5	3474.360	47.60	0.02	47.62	80.82	-33.20	peak	150	47	
6	4339.200	47.04	1.52	48.56	80.82	-32.26	peak	150	264	



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: frank2018 #29

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 25 C / 55 %

EUT: Remote Controller

Mode: TX433.92MHz

Model: TF001

Manufacturer: HESHAN TONGFANG LIGHTING TECHNOLOGY

Polarization: Horizontal

Power Source: DC 3V


Date: 18/05/26/

Time: 10/32/26

Engineer Signature: Frank


Distance: 3m


Note: Report NO.:ATE20180814

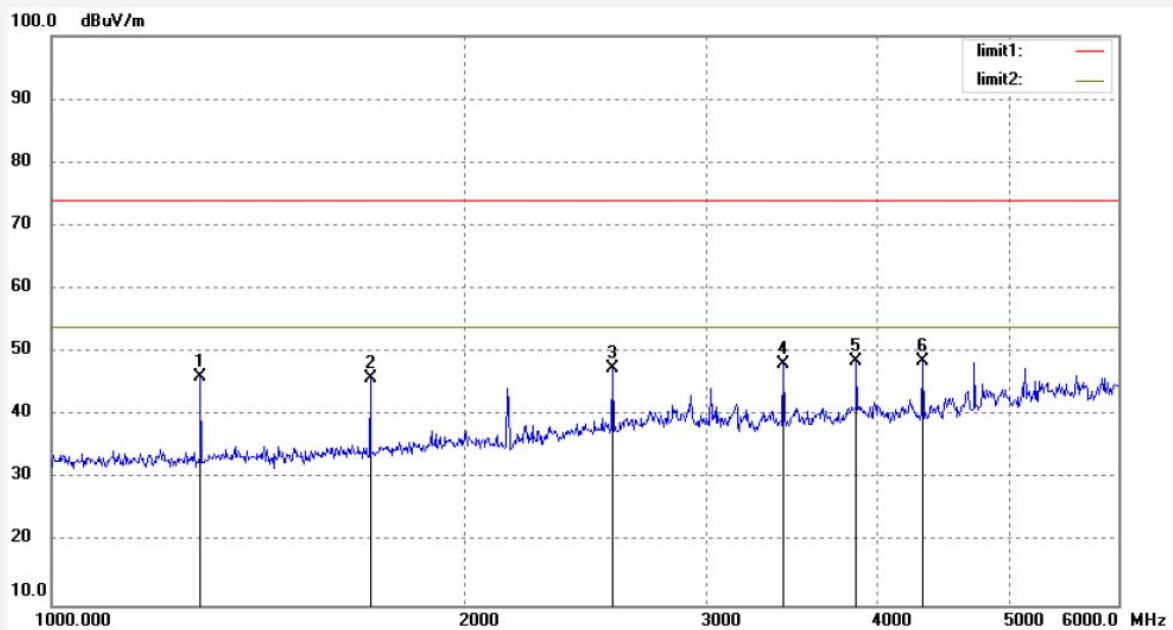

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	54.45	-8.43	46.02	80.82	-34.80	peak	150	46	
2	1735.680	53.23	-7.28	45.95	80.82	-34.87	peak	150	135	
3	2603.520	50.98	-3.46	47.52	80.82	-33.30	peak	150	36	
4	3471.360	48.10	0.02	48.12	80.82	-32.70	peak	150	222	
5	3905.280	47.74	0.95	48.69	80.82	-32.13	peak	150	147	
6	4339.200	47.04	1.52	48.56	80.82	-32.26	peak	150	358	




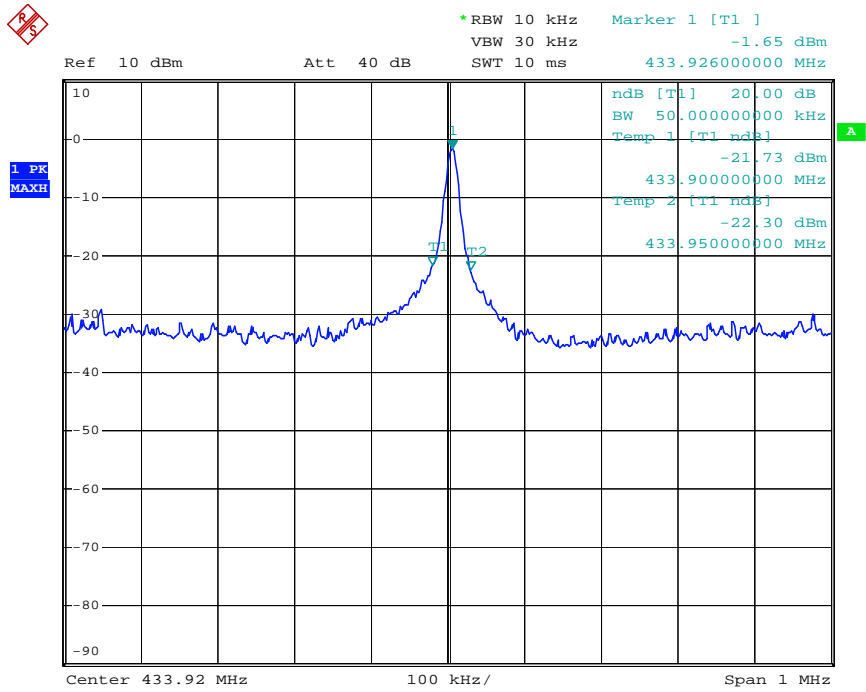


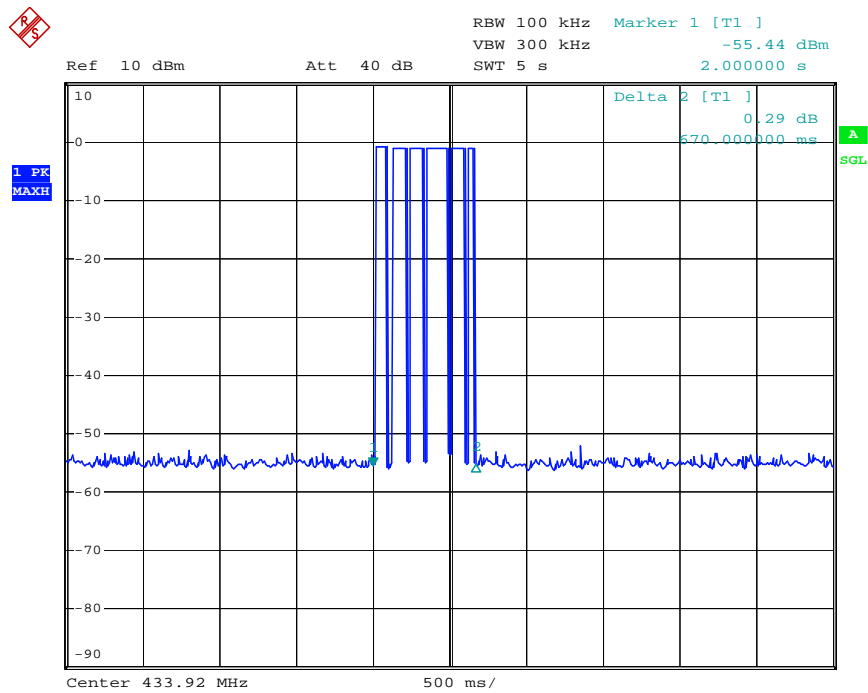


Release Time = 0.67ms

The graph shows the pattern of coding during the signal transmission.  
The duration of one cycle = 57.30 ms.

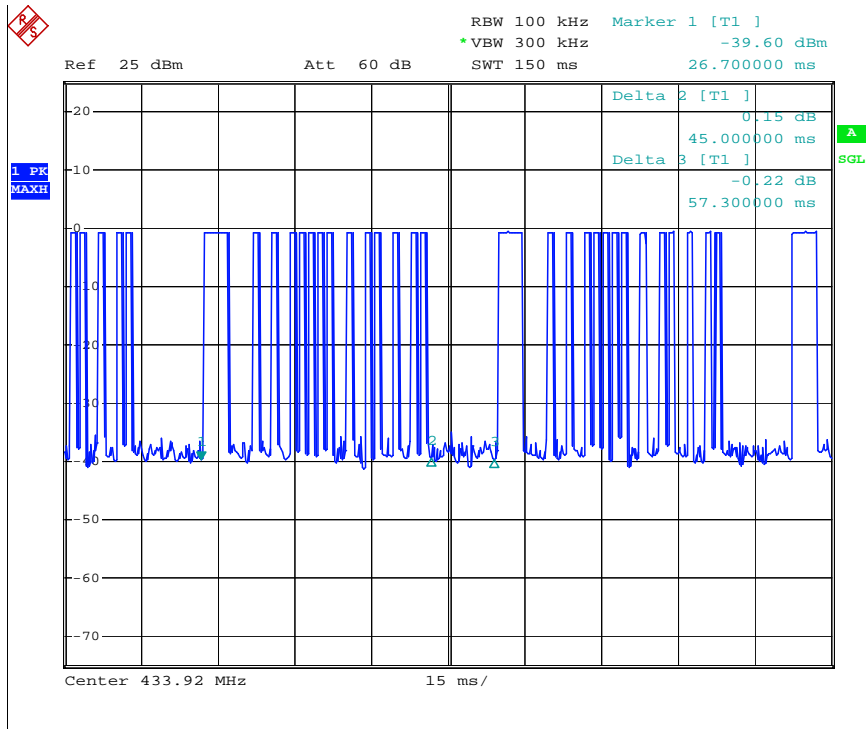

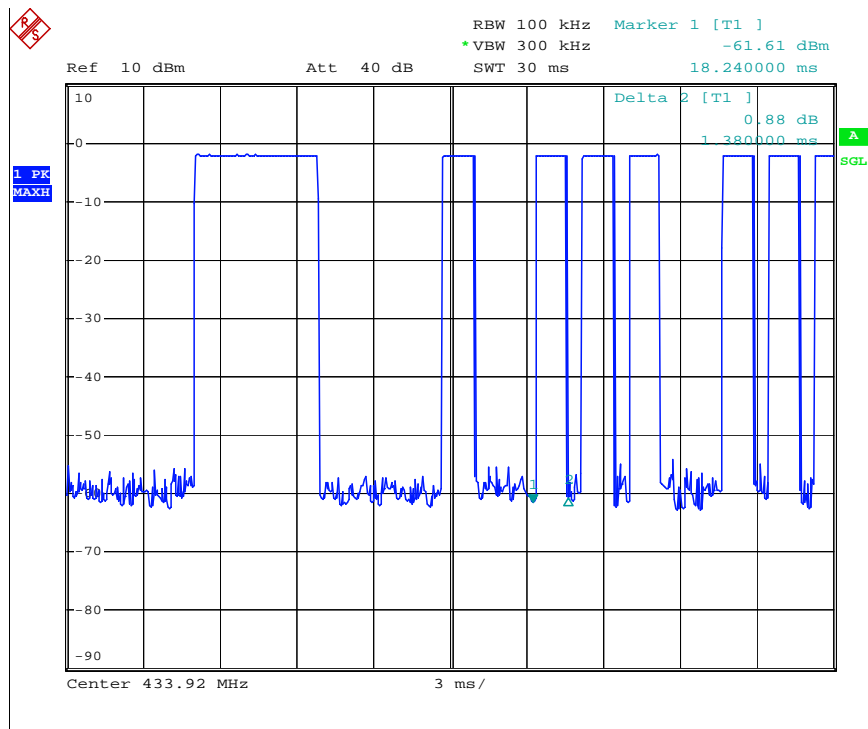

The graph shows the duration of 'on' signal. From marker 1 to marker 1, duration is 1.38ms.

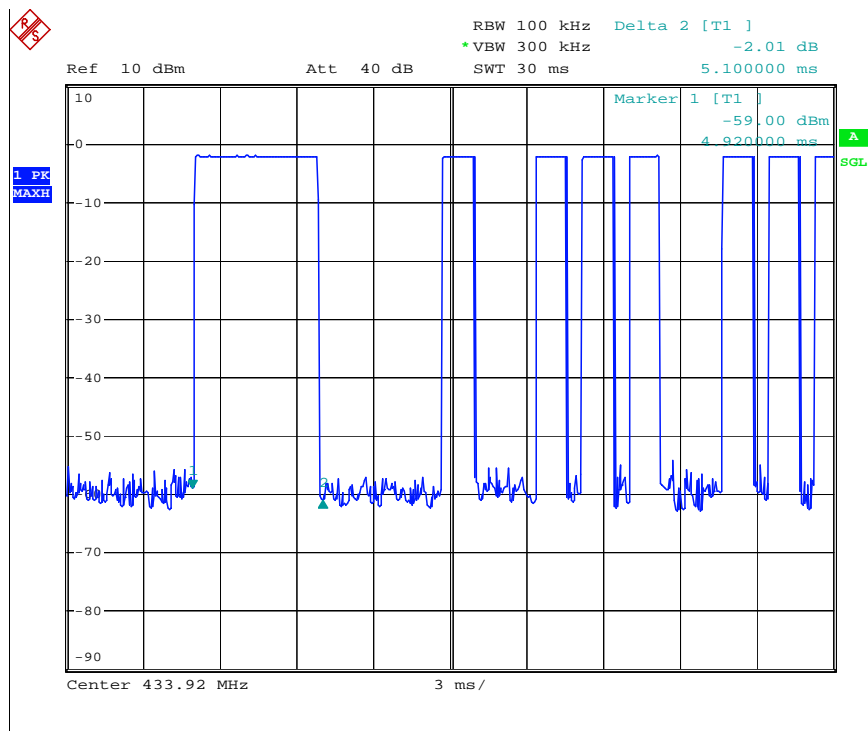

The graph shows the duration of 'on' signal. From marker 1 to marker 1, duration is 5.10ms.