



FCC TEST REPORT

Test report
On Behalf of
Qingdao Zhonghaihuizhi Power Technology Co., Ltd.
For
Wireless Charging Smart Bluetooth Speaker
Model No.: WSS-503GB-E,WSS-503BB-E,
WSS-503GB-A,WSS-503BB-A,WSS-503GB-B,
WSS-503BB-B,WSS-503GB-Au,WSS-503BB-Au

FCC ID: 2AISC-WSS503GBE

Prepared for : Qingdao Zhonghaihuizhi Power Technology Co., Ltd.
B2,5th floor section B, No.1, Keyuanwei 1st Road, Laoshan, Qingdao,
Shandong, China

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
F1-008, Tai Yi Building, No.1, Haicheng West Road, Xixiang Street, Bao'an
District, Shenzhen City, China

Date of Test: June. 01, 2016 ~ June. 10, 2016

Date of Report: June. 10, 2016

Report Number: HUAK160601010-E



TEST RESULT CERTIFICATION

Applicant's name : Qingdao Zhonghaihuizhi Power Technology Co., Ltd.
Address : B2,5th floor section B, No.1, Keyuanwei 1st Road, Laoshan,
Qingdao, Shandong, China
Manufacture's Name..... : Qingdao Zhonghaihuizhi Power Technology Co., Ltd.
Address : B2,5th floor section B, No.1, Keyuanwei 1st Road, Laoshan,
Qingdao, Shandong, China
Product description
Trade Mark: N/A
Product name : Wireless Charging Smart Bluetooth Speaker
Model and/or type reference : WSS-503GB-E,WSS-503BB-E,WSS-503GB-A,WSS-503BB-A,
WSS-503GB-B,WSS-503BB-B,WSS-503GB-Au,WSS-503BB-Au
Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
Date (s) of performance of tests : **June. 01, 2016 ~ June. 10, 2016**
Date of Issue..... : **June. 10, 2016**
Test Result..... : **Pass**

Testing Engineer : Eric Xie
(Eric Xie)

Technical Manager : Dora Qin
(Dora Qin)

Authorized Signatory : Kait Chen
(Kait Chen)



Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
Operation of EUT during testing	6
2.2 DESCRIPTION OF TEST SETUP	6
2.3 MEASUREMENT INSTRUMENTS LIST	7
3 . CONDUCTED EMISSIONS TEST	9
3.1 Conducted Power Line Emission Limit	9
3.2 Test Setup	9
3.3 Test Procedure	9
3.4 Test Result	9
4 RADIATED EMISSION TEST	11
4.1 Radiation Limit	11
4.2 Test Setup	11
4.3 Test Procedure	12
4.4 Test Result	12
5 BAND EDGE	17
5.1 Limits	17
5.2 Test Procedure	17
5.3 Test Result	17
6 OCCUPIED BANDWIDTH MEASUREMENT	20
6.1 Test Setup	20
6.2 Test Procedure	20
6.3 Measurement Equipment Used	20
6.4 Test Result	20
7 ANTENNA REQUIREMENT	22
8 PHOTOGRAPH OF TEST	23
8.1 Radiated Emission	23
8.2 Conducted Emission	24



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen WST Testing Technology Co., Ltd.
Certificated by FCC, Registration No.: 939433
Address : 1F, No.9 Building, TKG Science & Technology Park, Yangtian Rd.,
NO.72 Bao'an Dist., Shenzhen, Guangdong, China. 518101

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Charging Smart Bluetooth Speaker
Model Name	WSS-503GB-E
Serial Model	WSS-503BB-E,WSS-503GB-A,WSS-503BB-A, WSS-503GB-B,WSS-503BB-B,WSS-503GB-Au, WSS-503BB-Au
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: WSS-503GB-E
FCC ID	2AISC-WSS503GBE
Antenna Type	PCB Antenna
Antenna gains	0 dBi
BT Operation frequency	2402-2480MHz
Number of Channels	40CH
Modulation Type	GFSK
Power Source	AC 120V/60Hz



2.1.1 Carrier Frequency of Channels

Operation Frequency List BT4.0 :

Channel	Frequency (MHz)
00	2402
02	2404
03	2406
⋮	⋮
19	2440
⋮	⋮
37	2476
38	2478
39	2480

Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode**


Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

2.2 DESCRIPTION OF TEST SETUP

Operation of EUT during testing





2.3 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2016	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2016	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
5.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2016	1 Year
6.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 19, 2016	1 Year
7.	Pre-amplifier	Compliance Direction	PAP-0203	22008	May 19, 2016	1 Year
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2016	1 Year
10.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2016	1 Year
11.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2016	1 Year
12.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
13.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2016	1 Year
14.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 19, 2016	1 Year
15.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2016	1 Year
16.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2016	1 Year
17.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
18.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	May 19, 2016	1 Year
19.	Harmonic and Flicker Analyzer	LAPLACE	AC2000A	272629	May 19, 2016	1 Year
20.	Harmonic and Flicker Test Software AC 2000A	LAPLACE	N/A	N/A	N/A	N/A
21.	ESD Simulators	KIKUSUI	KES4021	LJ003477	May 19, 2016	1 Year
22.	EFT Generator	EMPEK	EFT-4040B	0430928N	May 19, 2016	1 Year
23.	Shielding Room	ChangZhou ZhongYu	JB88	SEL0166	May 19, 2016	1 Year
24.	Signal Generator 9KHz~2.2GHz	R&S	SML02	SEL0143	May 19, 2016	1 Year
25.	Signal Generator 9KHz~1.1GHz	R&S	SML01	SEL0135	May 19, 2016	1 Year
26.	Power Meter	R&S	NRVS	SEL0144	May 19, 2016	1 Year
27.	RF Level Meter		URV35	SEL0137	May 19, 2016	1 Year
28.	Audio Analyzer	R&S	UPL	SEL0136	May 19, 2016	1 Year
29.	RF-Amplifier 150KHz~150MHz	BONN Elektronik	BSA1515-25	SEL0157	May 19, 2016	1 Year



30.	Stripline Test Cell	Erika Fiedler	VDE0872	SEL0167	May 19, 2016	N/A
31.	TV Test Transmitter	R&S	SFM	SEL0159	May 19, 2016	1 Year
32.	TV Generator PAL	R&S	SGPF	SEL0138	May 19, 2016	1 Year
33.	TV Generator Ntsc	R&S	SGMF	SEL0140	May 19, 2016	1 Year
34.	TV Generator Secam	R&S	SGSF	SEL0139	May 19, 2016	1 Year
35.	TV Test Transmitter 0.3MHz~3300MHz	R&S	SFQ	SEL0142	May 19, 2016	1 Year
36.	MPEG2 Measurement Generator	R&S	DVG	SEL0141	May 19, 2016	1 Year
37.	Spectrum Analyzer	R&S	FSP	SEL0177	May 19, 2016	1 Year
38.	Matching	R&S	RAM	SEL0146	N/A	N/A
39.	Matching	R&S	RAM	SEL0148	N/A	N/A
40.	Absorbing Clamp	R&S	MDS21	SEL0158	May 19, 2016	1 Year
41.	Coupling Set	Erika Fiedler	Rco, Rci, MC, AC, LC	SEL0149	May 19, 2016	N/A
42.	Filters	Erika Fiedler	Sr, LBS	SEL0150	N/A	N/A
43.	Matching Network	Erika Fiedler	MN, T1	SEL0151	N/A	N/A
44.	Fully Anechoic Room	ChangZhou ZhongYu	854	SEL0169	May 19, 2016	1 Year
45.	Signal Generator	R&S	SML03	SEL0068	May 19, 2016	1 Year
46.	RF-Amplifier 30M~1GHz	Amplifier Reasearch	250W1000A	SEL0066	Oct. 24, 2015	1 Year
47.	RF-Amplifier 0.8~3.0GHz	Amplifier Reasearch	60S1G3	SEL0065	Oct. 24, 2015	1 Year
48.	Power Meter	R&S	NRVD	SEL0069	April 26, 2016	1 Year
49.	Power Sensor	R&S	URV5-Z2	SEL0071	April 26, 2016	1 Year
50.	Power Sensor	R&S	URV5-Z2	SEL0072	April 26, 2016	1 Year
51.	Software EMC32	R&S	EMC32-S	SEL0082	April 26, 2016	1 Year
52.	Log-periodic Antenna	Amplifier Reasearch	AT1080	SEL0073	April 26, 2016	1 Year
53.	Antenna Tripod	Amplifier Reasearch	TP1000A	SEL0074	April 26, 2016	1 Year
54.	Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	April 26, 2016	1 Year
55.	High Gain Horn Antenna(0.8-5G Hz)	Amplifier Reasearch	AT4002A	SEL0075	April 26, 2016	1 Year



3. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

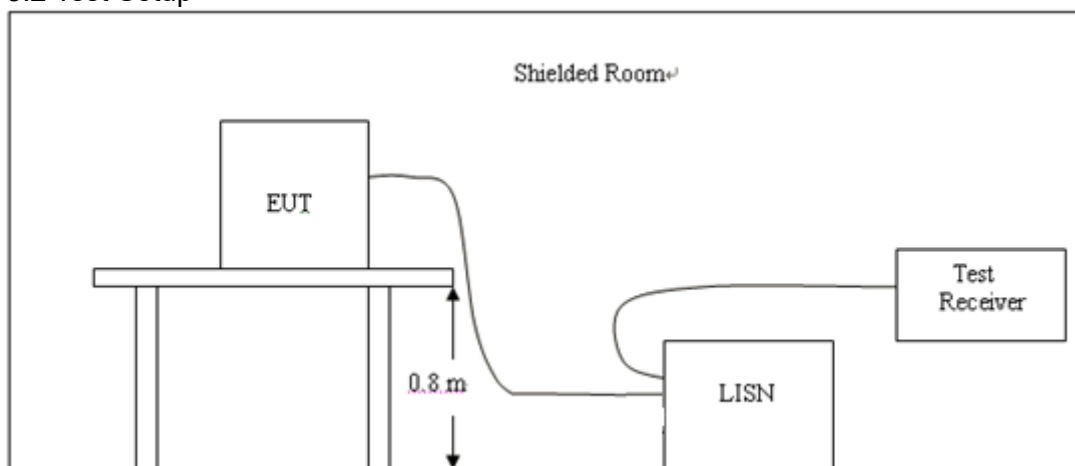

3.3 Test Procedure


- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

3.4 Test Result

PASS




L Line

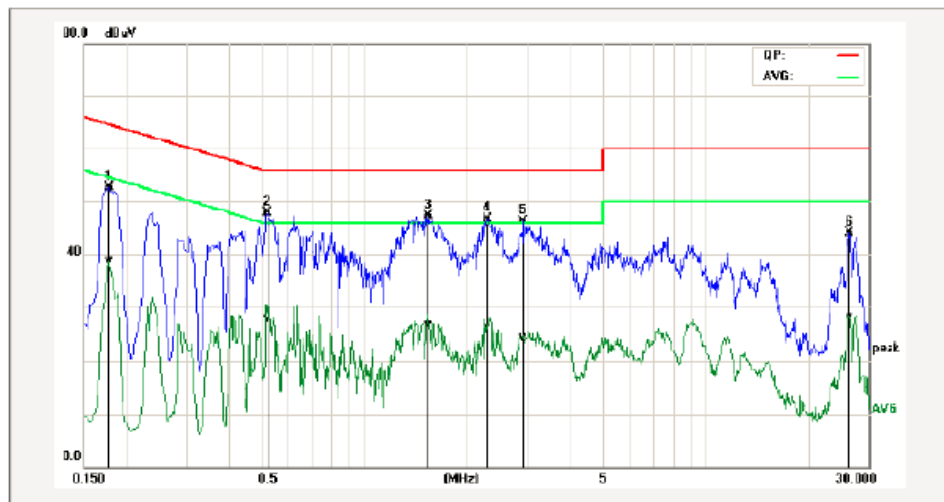

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
	(MHz)	reading	reading	factor	result	result	limit	limit	margin	margin	
		(dBμV)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dB)	(dB)	
1P	0.1780	42.94	29.11	9.79	52.73	38.90	64.57	54.58	-11.84	-15.68	Pass
2*	0.5220	38.29	18.18	9.68	47.97	27.86	56.00	46.00	-8.03	-18.14	Pass
3P	1.5540	37.61	17.08	9.76	47.37	26.84	56.00	46.00	-8.63	-19.16	Pass
4P	2.3060	37.05	16.76	9.74	46.79	26.50	56.00	46.00	-9.21	-19.50	Pass
5P	2.9460	36.46	14.65	9.75	46.21	24.40	56.00	46.00	-9.79	-21.60	Pass
6P	26.4100	34.20	18.57	9.82	44.02	28.39	60.00	50.00	-15.98	-21.61	Pass

N Line

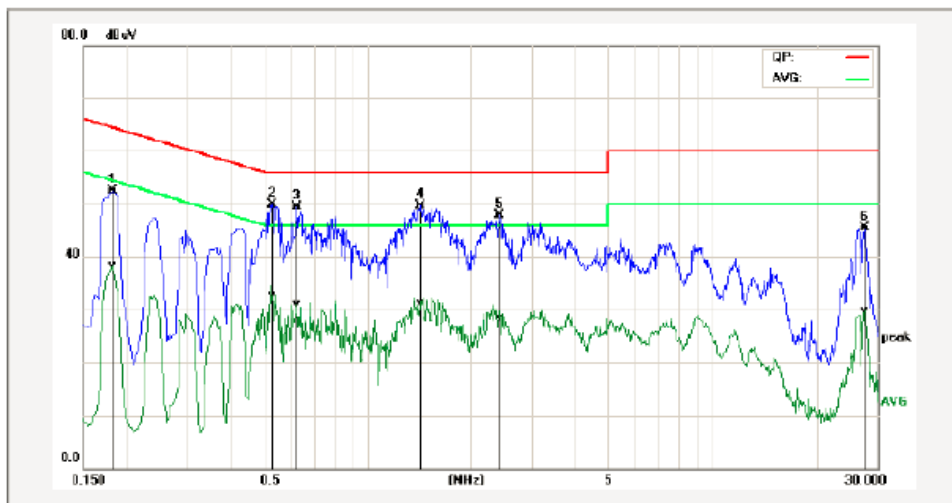

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
	(MHz)	reading	reading	factor	result	result	limit	limit	margin	margin	
		(dBμV)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dBμV)	(dBμV)	(dB)	(dB)	
1P	0.1819	42.94	28.76	9.65	52.59	38.41	64.39	54.40	-11.80	-15.99	Pass
2*	0.5299	40.30	23.00	9.69	49.99	32.69	56.00	46.00	-6.01	-13.31	Pass
3P	0.6260	39.74	21.35	9.75	49.49	31.10	56.00	46.00	-6.51	-14.90	Pass
4P	1.4260	40.03	21.87	9.72	49.75	31.59	56.00	46.00	-6.25	-14.41	Pass
5P	2.4219	38.10	18.74	9.73	47.83	28.47	56.00	46.00	-8.17	-17.53	Pass
6P	27.4760	35.54	19.90	9.84	45.48	29.84	60.00	50.00	-14.52	-20.16	Pass

4 RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

4.2 Test Setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

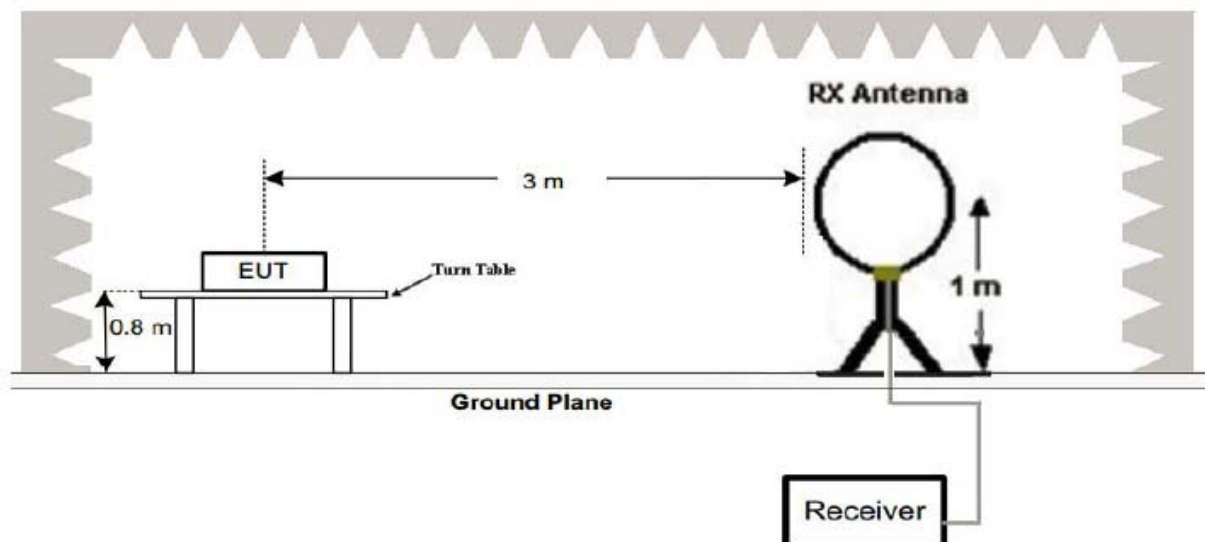

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

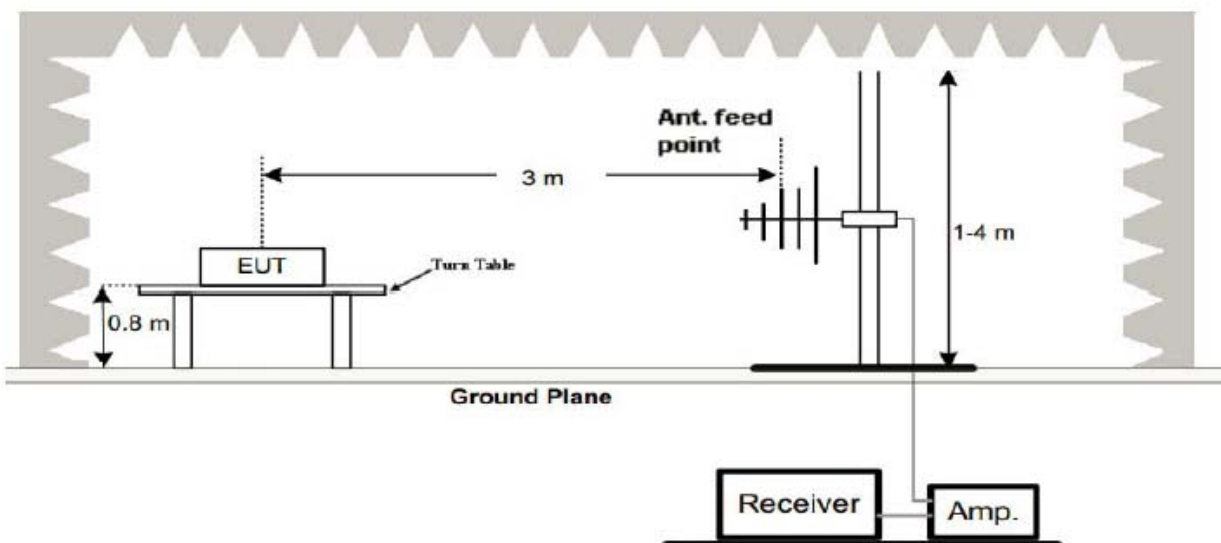

(3) Radiated Emission Test-Up Frequency Above 1GHz

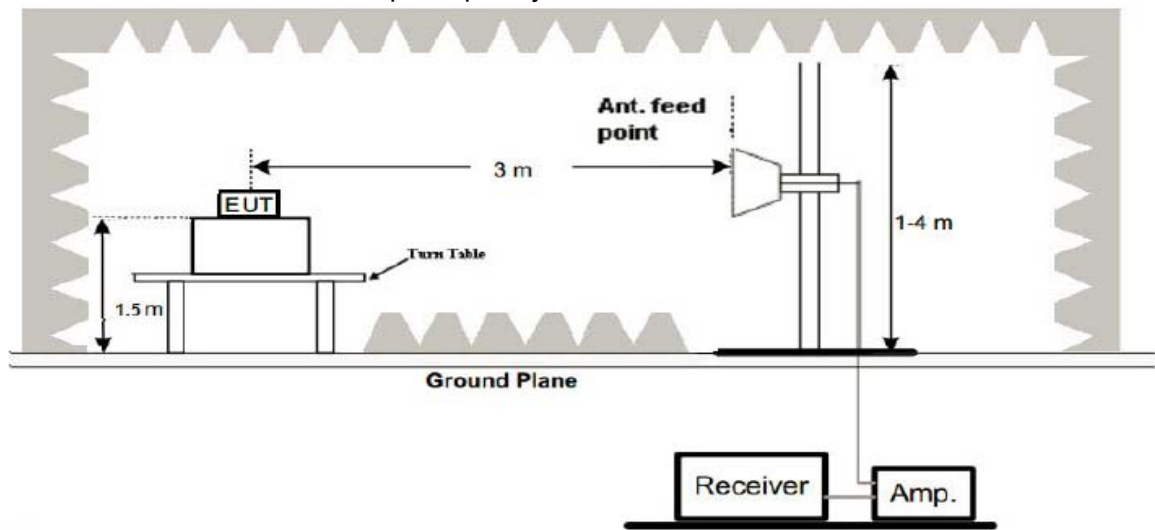

4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.


4.4 Test Result

PASS


All the test modes completed for test. The worst case of Radiated Emission is CH 2402; the test data of this mode was reported.



Below 1GHz Test Results:
Antenna polarity: H

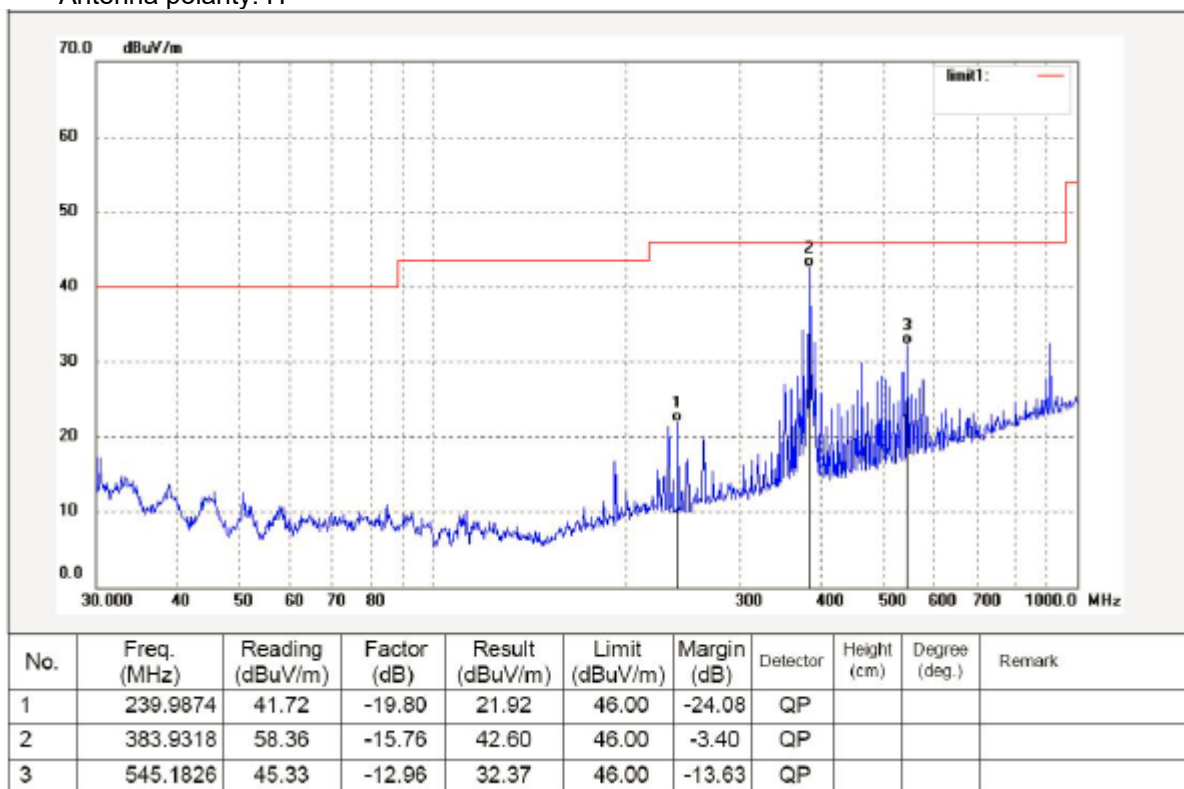

Antenna polarity: V

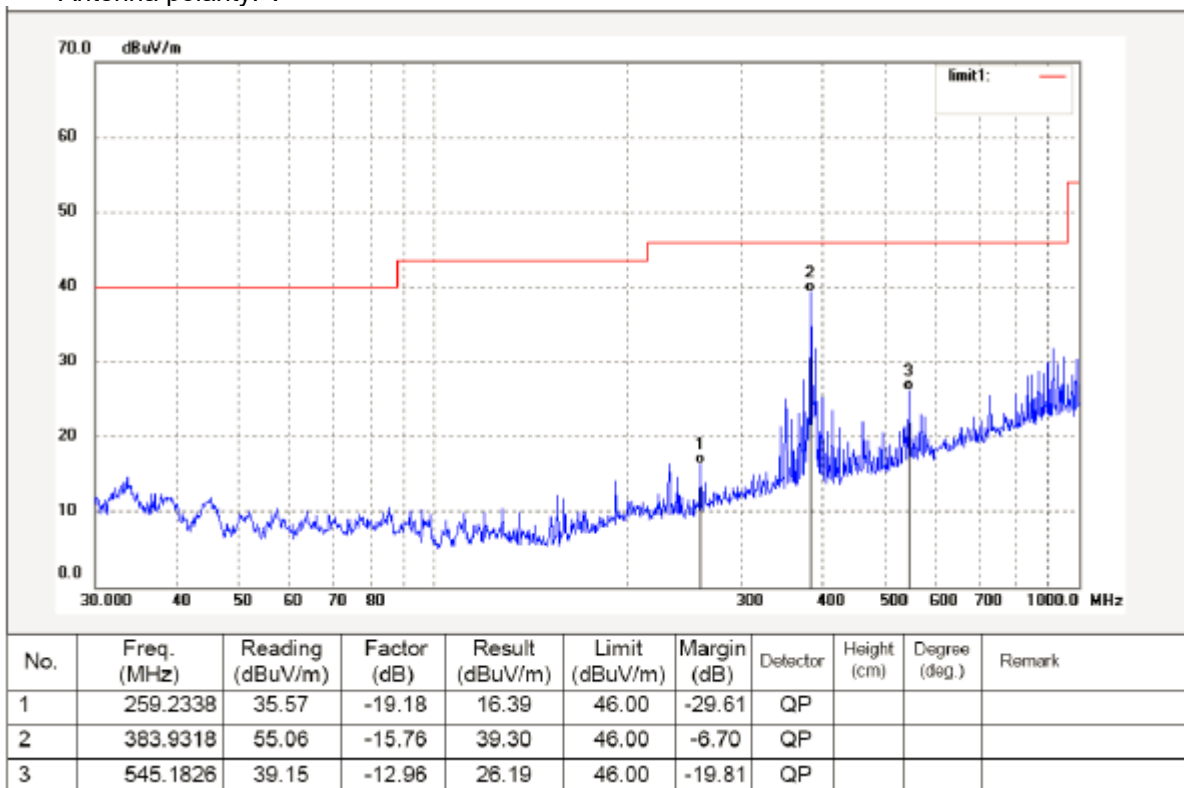


Remark:


- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.



Above 1 GHz Test Results:
CH Low (2402MHz) Horizontal

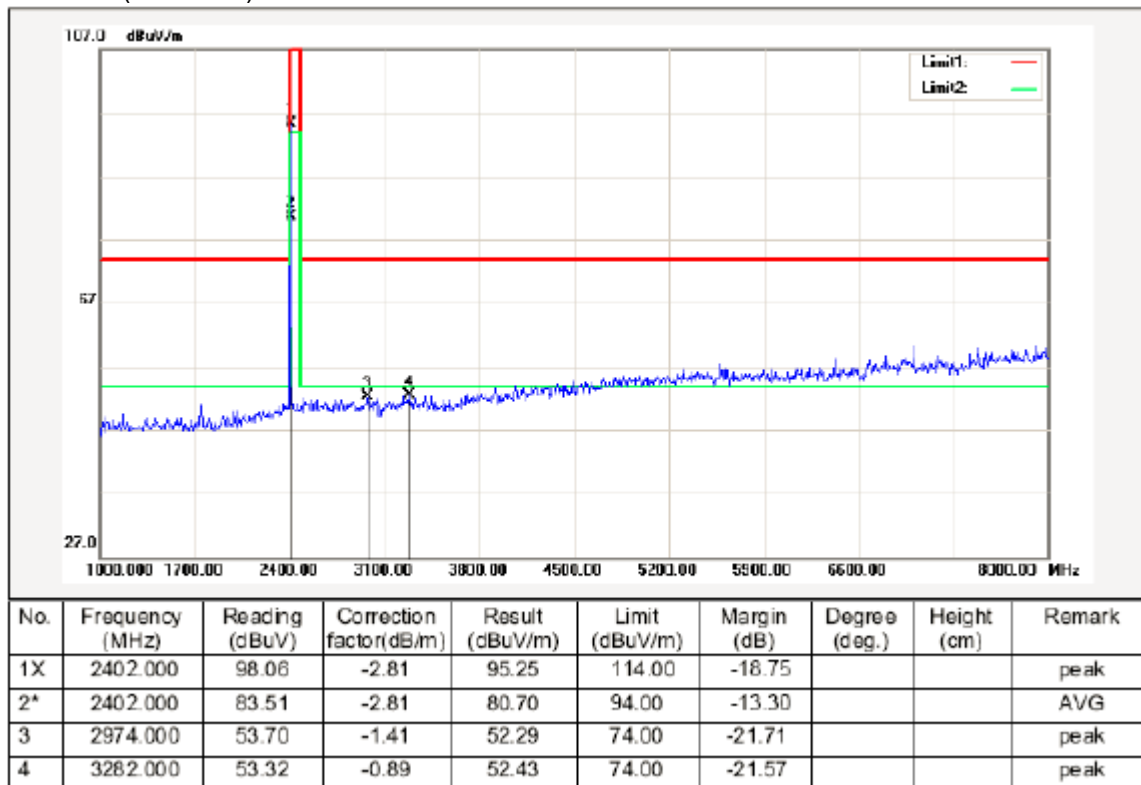


CH Low (2402MHz) Ver.

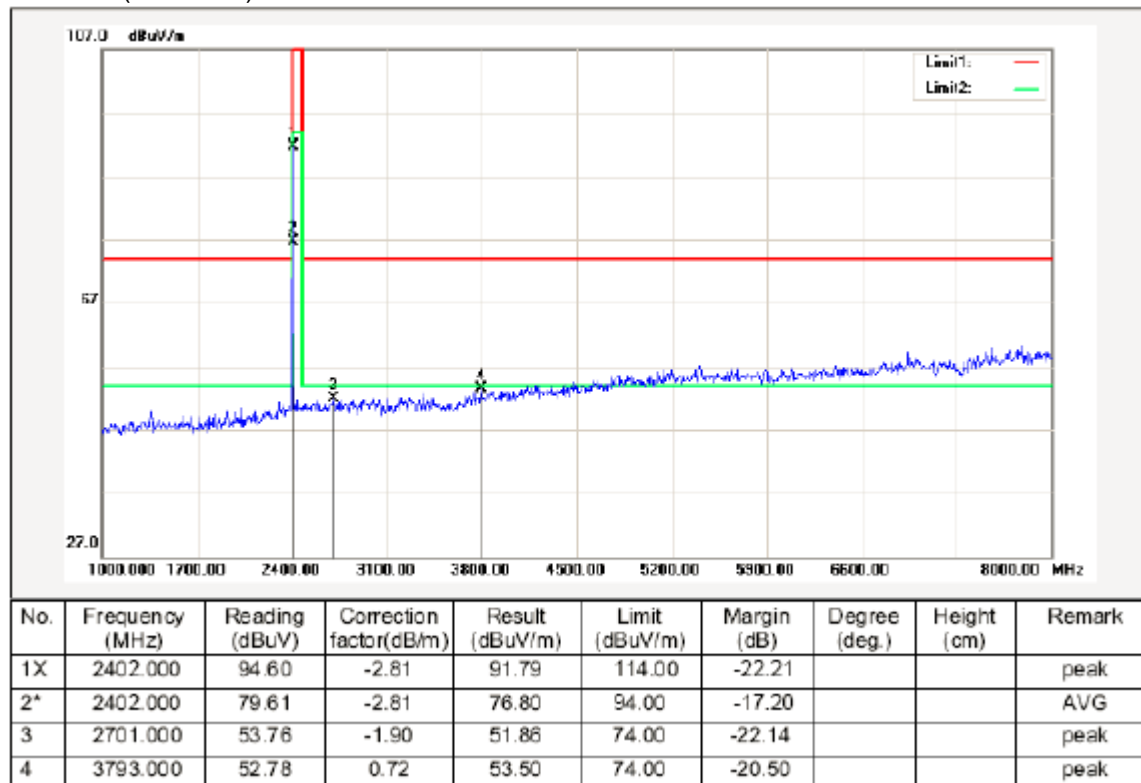




CH Middle (2440MHz) Horizontal

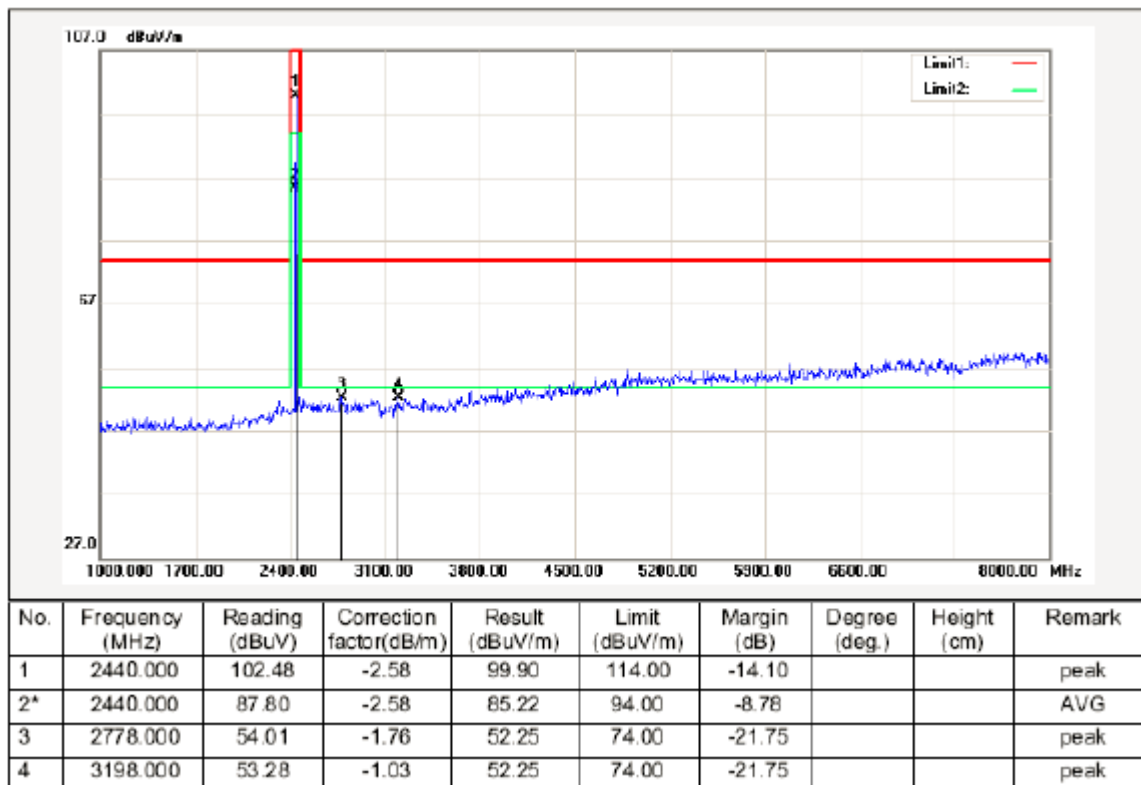


CH Middle (2440MHz) Ver.

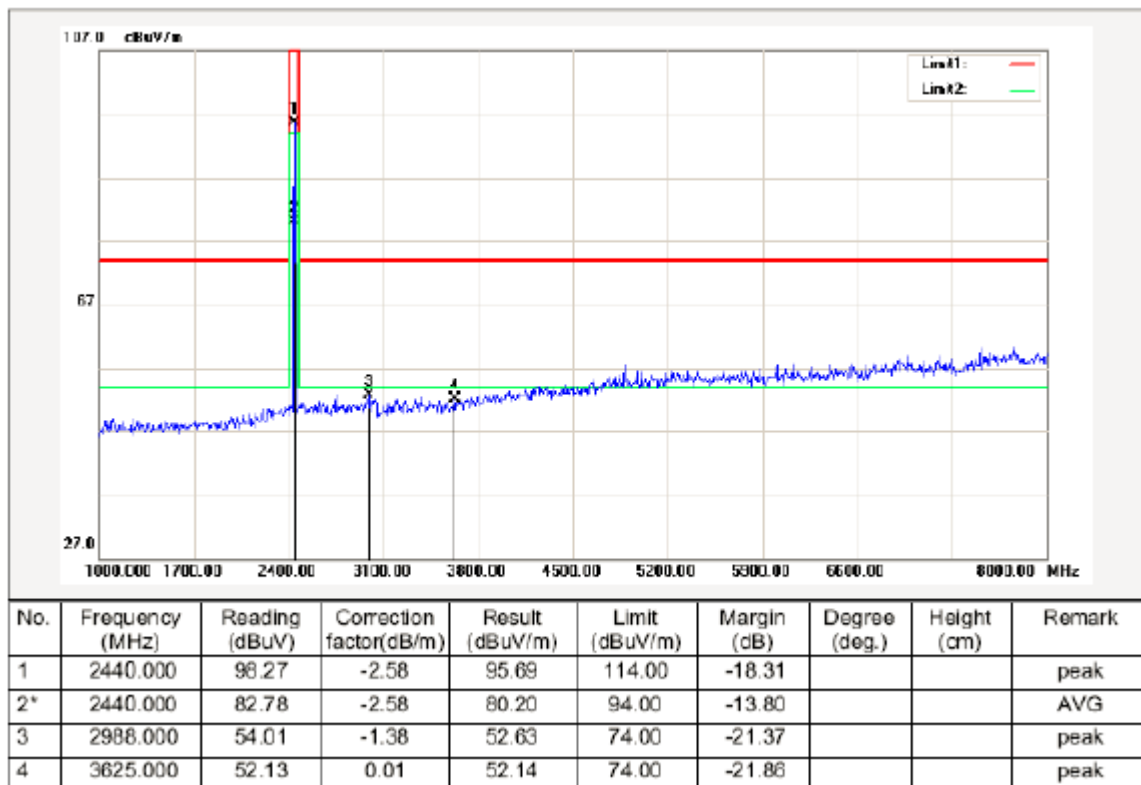




CH High (2480MHz) Horizontal

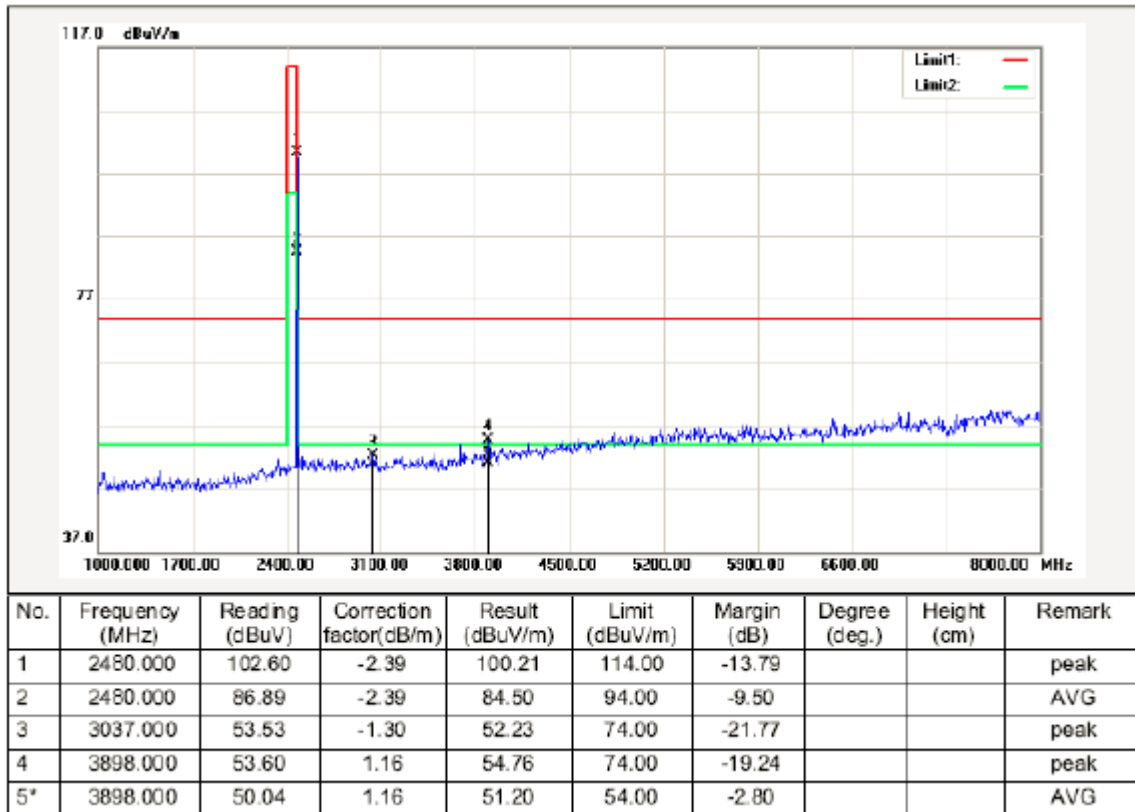

CH High (2480MHz) Ver.

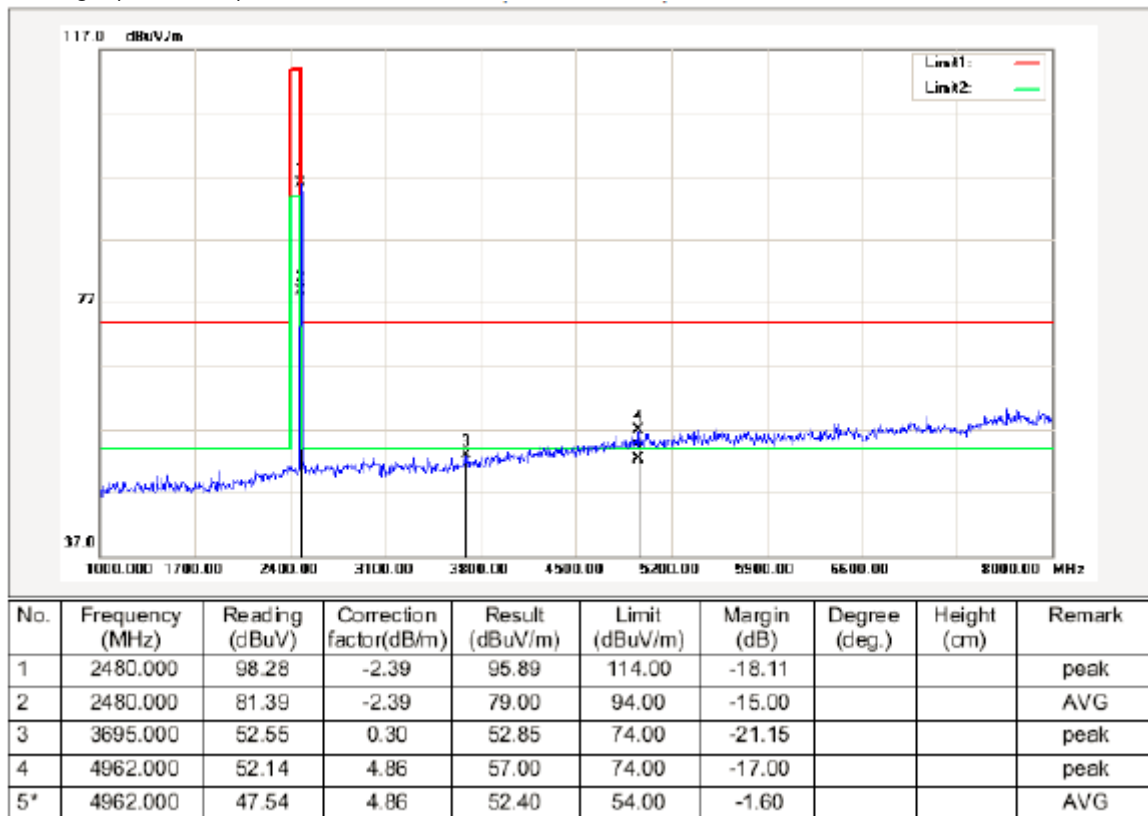

Note: 8-25GHz at least have 20dB margin, so no recording in the test report.



5 BAND EDGE

5.1 Limits

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure


The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 100KHz and VBM to 300KHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW to 100 KHz and VBW to 300 KHz, to measure the conducted peak band edge.

5.3 Test Result


PASS



Radiated Test:
Operation Mode: TX Low CH
Vertical

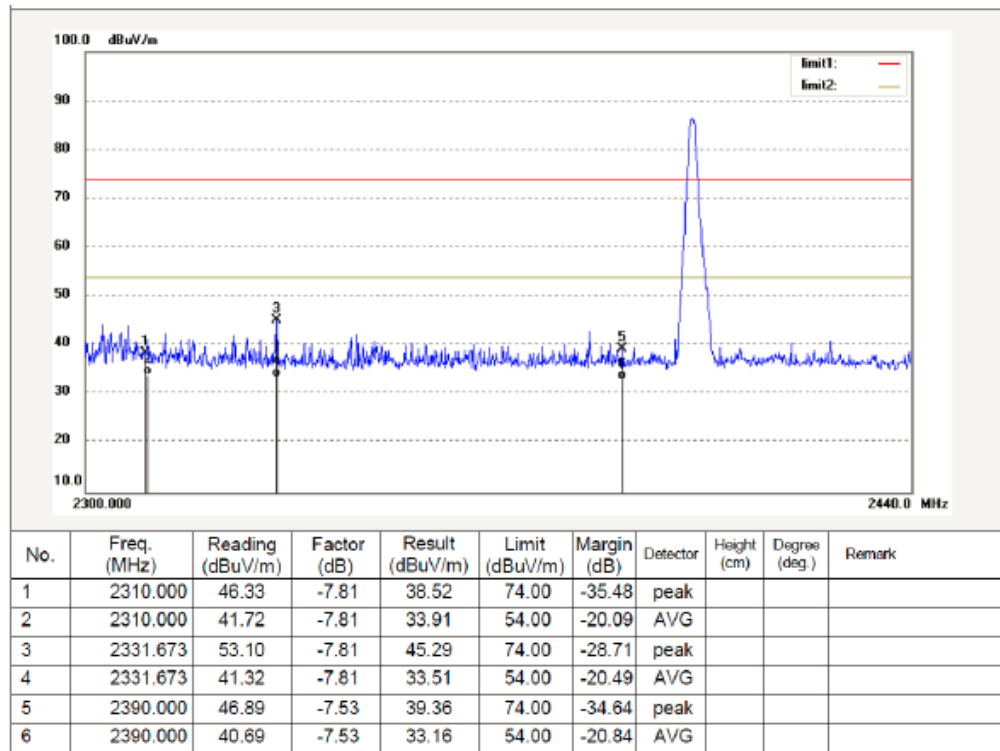


Horizontal

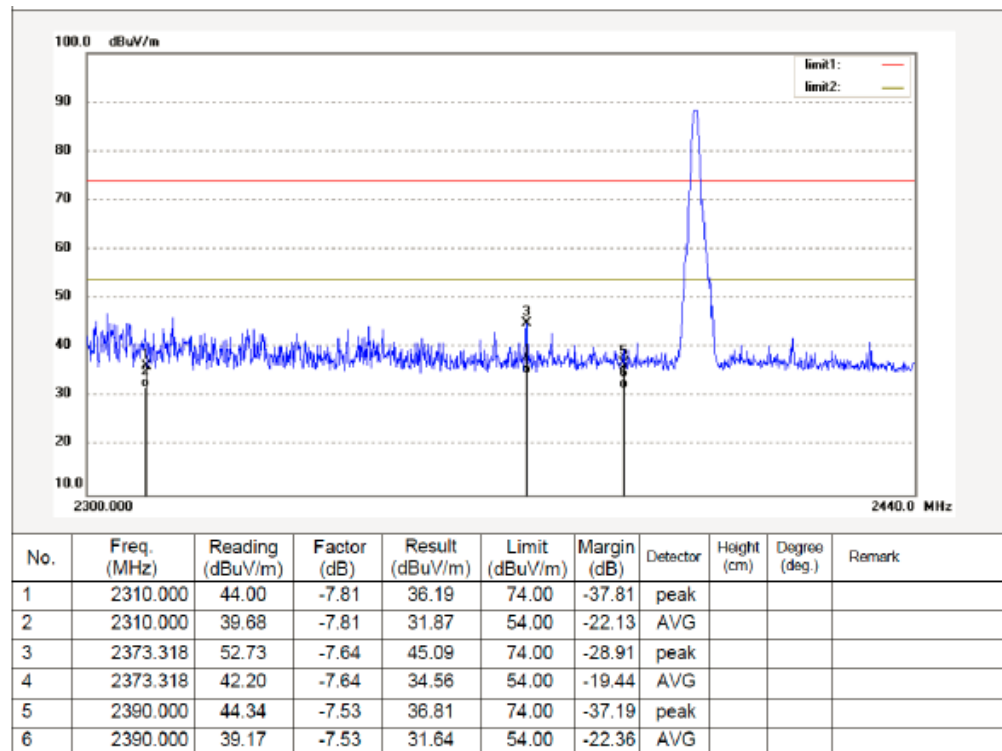




Operation Mode: TX High CH

Vertical

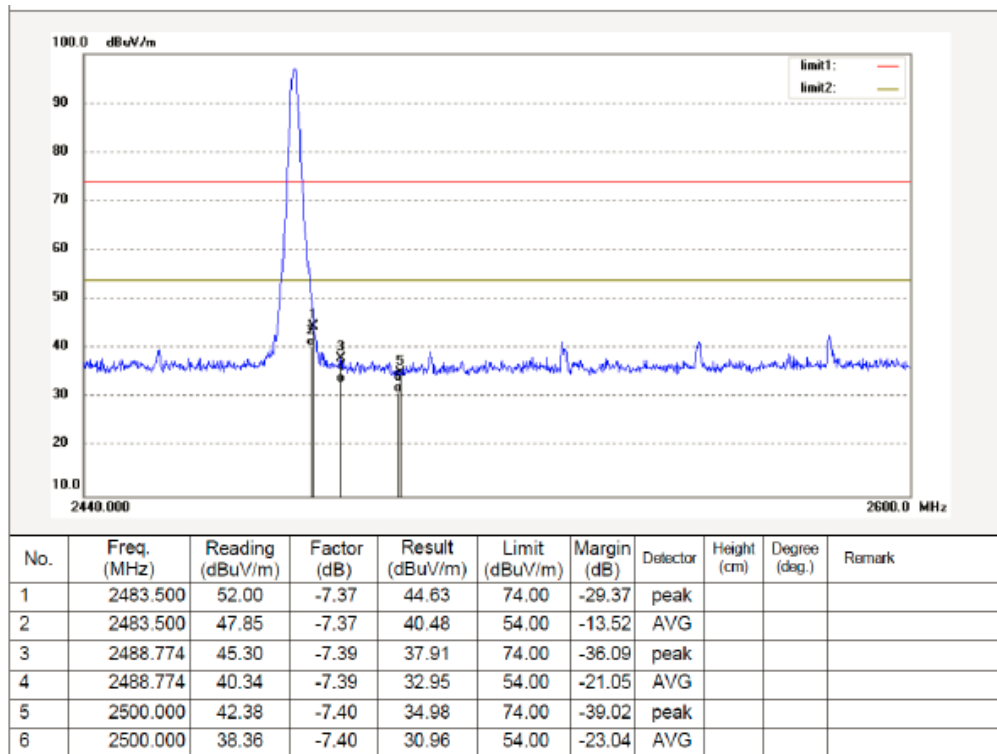

Horizontal

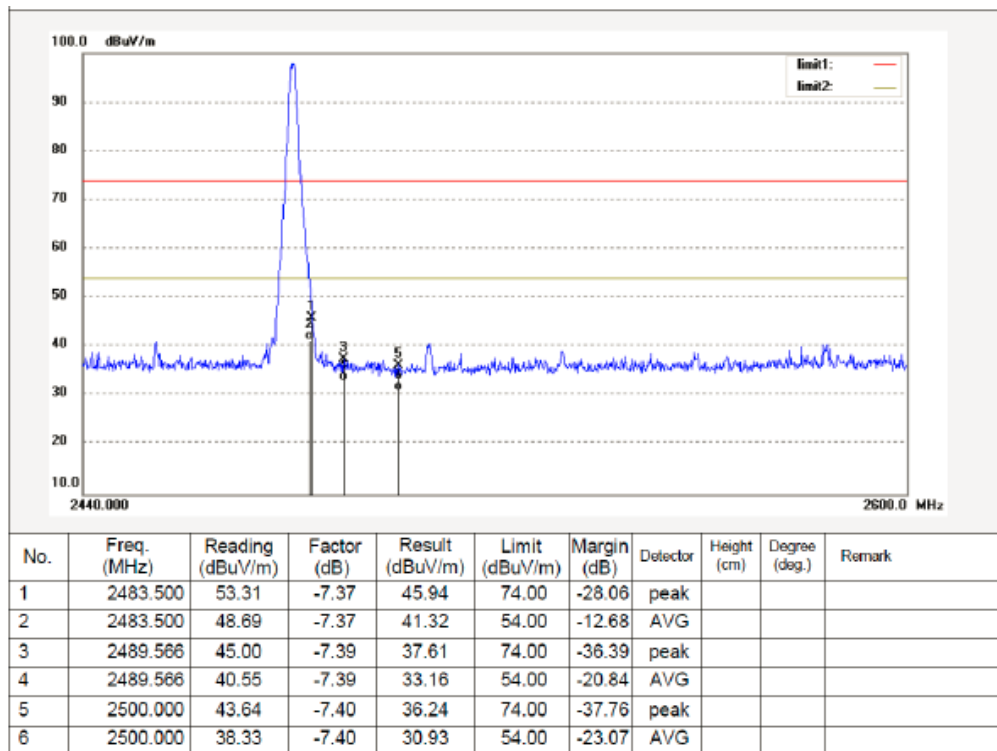



6 OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Setup

Same as Radiated Emission Measurement

6.2 Test Procedure

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.249(a): RBW= 10KHz. VBW= 30 KHz, Span=1MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.


6.3 Measurement Equipment Used

Same as Radiated Emission Measurement

6.4 Test Result


Measurement Result		
Test Data (MHz)		Criteria
Low Channel	1.194	PASS
Middle Channel	1.208	PASS
High Channel	1.202	PASS

CH: 2402MHz

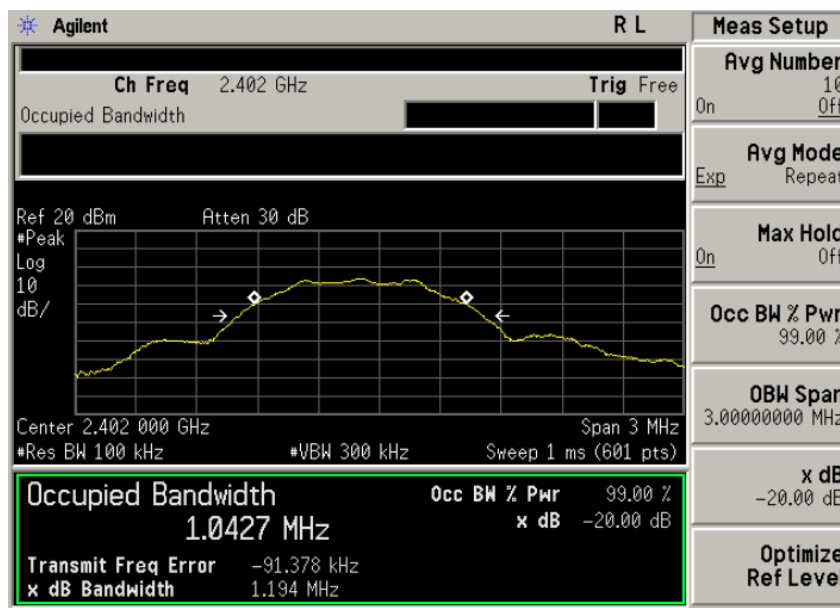




CH: 2440MHz

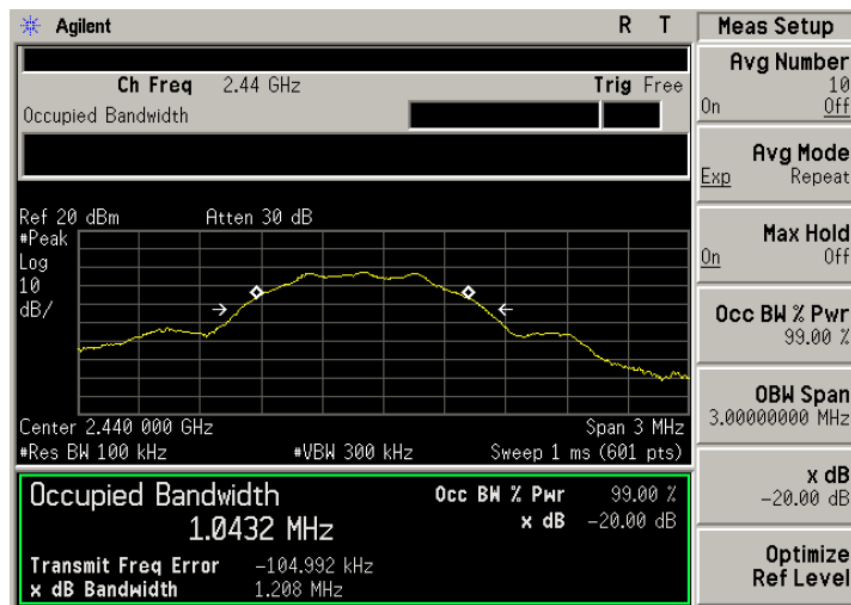

CH: 2480MHz

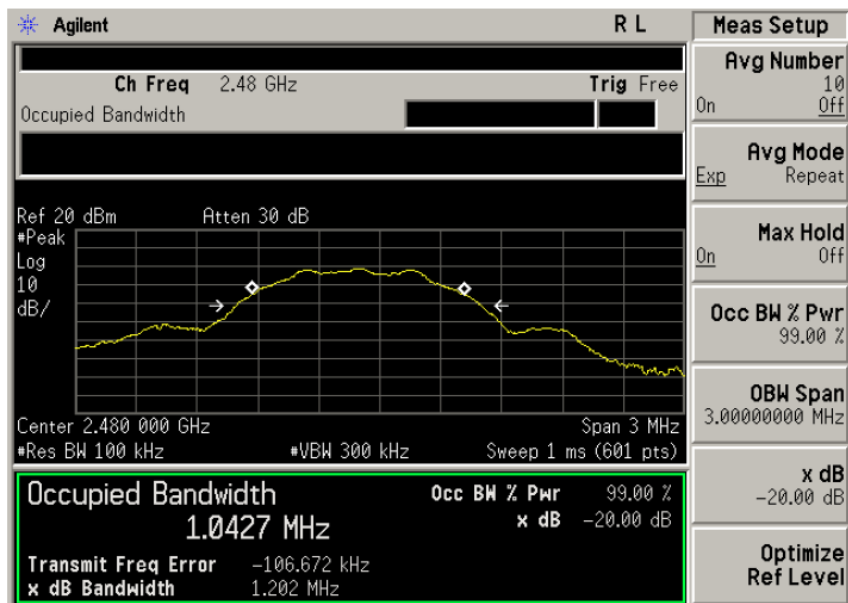



7 ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 0dBi.

ANTENNA

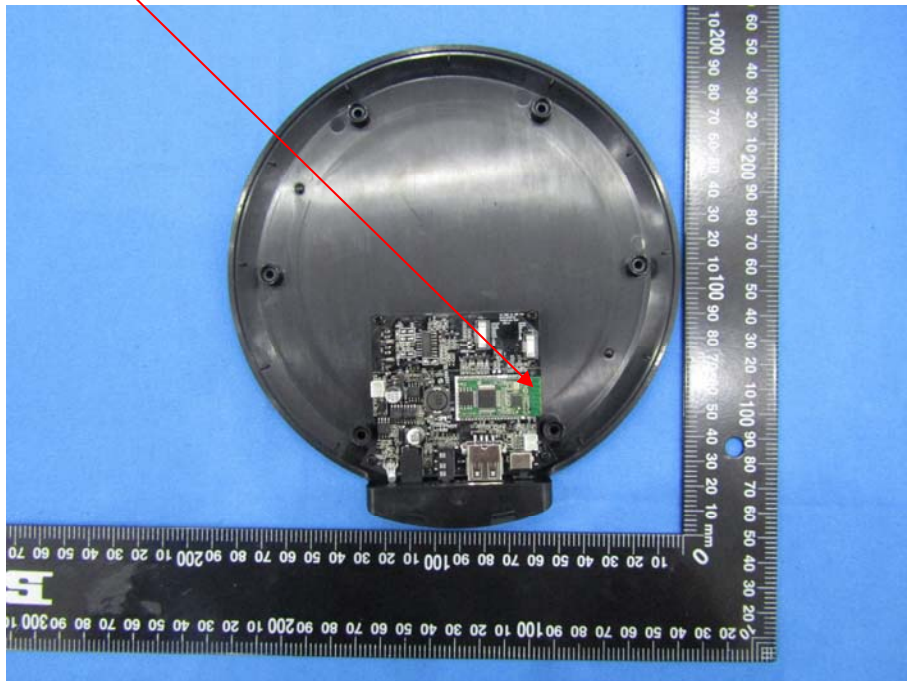



8 PHOTOGRAPH OF TEST

8.1 Radiated Emission



8.2 Conducted Emission

