



Report No: FCC 1705036 File reference No: 2017-05-19

Applicant: Dongguan Shijie Langyi Electronics Factory

Product: Bluetooth Headset

Model No: SP-7, SP-9

Trademark: Phrodi

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4, FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: May 19, 2017

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1705036 Page 2 of 82

Date: 2017-05-19



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

# **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

# **IC-Registration No.: IC5205A-02**

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 82

Report No.: FCC1705036

Date: 2017-05-19



# **Test Report Conclusion** Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	12
7.0	20dB Bandwidth	22
8.0	Maximum Output Power	34
9.0	Carrier Frequency Separation.	37
10.0	Number of Hopping Channel	41
11.0	Time of Occupancy (Dwell Time)	45
12.0	Out of Band Measurement.	58
13.0	Antenna Requirement	71
14.0	FCC ID Label	72
15.0	Photo of Test Setup and EUT View	73

Report No.: FCC1705036 Page 4 of 82

Date: 2017-05-19



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

## 1.2 Applicant Details

Applicant: Dongguan Shijie Langyi Electronics Factory

Address: 8#, Lianxin Street, Sijia Industrial Zone, Shijie Town, Dongguan City, Guangdong, China

Telephone: 0769-86363156 Fax: 0769-86362858

# 1.3 Description of EUT

Product: Bluetooth Headset

Manufacturer: Dongguan Shijie Langyi Electronics Factory

Address: 8#, Lianxin Street, Sijia Industrial Zone, Shijie Town, Dongguan City,

Guangdong, China

Brand Name: Phrodi Model Number: SP-7 Additional Model Number: SP-9

Type of Modulation GFSK, Л/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: PCB Antenna and the maximum Gain of this antenna is 2.3dBi

#### 1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1705036 Page 5 of 82

Date: 2017-05-19



1.5 Test Duration 2017-05-08 to 2017-05-18

1.6 Test Uncertainty Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer 1.7

The sample tested by

Print Name: Terry Tang

Page 6 of 82

Report No.: FCC1705036

Date: 2017-05-19



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2016-08-22	2017-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2016-08-22	2017-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2016-08-22	2017-08-21
Ultra Broadband ANT	R&S	HL562	100157	2016-08-23	2017-08-22
ESDV Test Receiver	R&S	ESDV	100008	2016-08-22	2017-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-22	2017-08-21
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-22	2017-08-21
3m OATS			N/A	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-22	2017-08-21
Power sensor	Anritsu	MA2491A	32263	2016-08-22	2017-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-23	2017-08-21
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-23	2017-08-22
9*6*6 Anechoic			N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-22	2017-08-21

Page 7 of 82

Report No.: FCC1705036

Date: 2017-05-19



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT has	heen tested	according to	the foll	owing sn	ecifications
THE LUI HAS	been testeu	i accoruing u	) the ion	owing sp	ecincanons:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
<b>Conducted Emissions</b>	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Page 8 of 82


Report No.: FCC1705036

Date: 2017-05-19



#### 5. **Power Line Conducted Emission Test**

#### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 -2014.

Test Voltage: 120V~60Hz Block diagram of Test setup

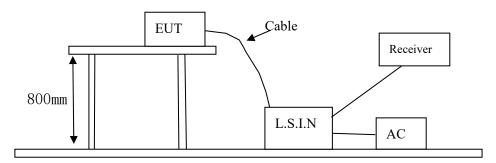

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1705036 Page 9 of 82

Date: 2017-05-19



#### A. **EUT**

Device	Manufacturer	Model	FCC ID
Bluetooth Headset	Dongguan Shijie Langyi Electronics Factory	SP-7, SP-9	2AIVKSP-7

#### В. Internal Device

Device	Manufacturer	Model	Rating

#### C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Rating
Power	RCL	RCL051000	VOC	Input: 100-240V~, 50/60Hz, 0.2A;
Supply				Output: DC5V, 1A

#### 5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.4-2014.

- Α Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

#### Power line conducted Emission Limit according to Paragraph 15.107, 15.207 5.5

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 **Test Results**

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1705036 Page 10 of 82

Date: 2017-05-19



#### A: Conducted Emission on Live Terminal (150kHz to 30MHz)

**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Keep Bluetooth Transmitting** 

**Equipment Level: Class B** 

**Results: PASS** 

Please refer to following diagram for individual

# 80.0 dBuV



No. Mk.	Freq.	_		Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	1.0272	-3.90	10.90	7.00	56.00	-49.00	QP	
2 *	1.0272	-12.20	10.90	-1.30	46.00	-47.30	AVG	

Report No.: FCC1705036 Page 11 of 82

Date: 2017-05-19



#### B: **Conducted Emission on Neutral Terminal (150kHz to 30MHz)**

**EUT Operating Environment** 


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

**EUT set Condition: Keep Bluetooth Transmitting** 

**Equipment Level: Class B** 

**Results: Pass** 

Please refer to following diagram for individual

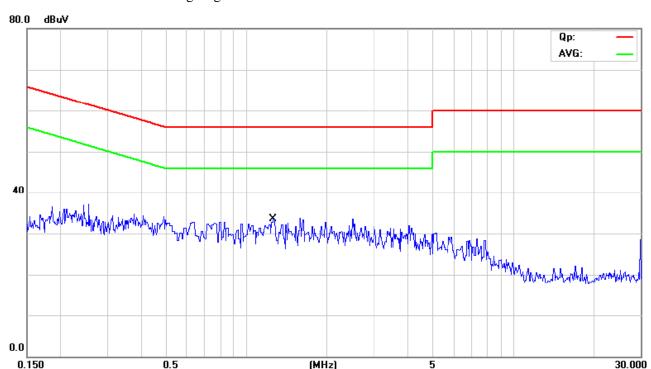

No. Mk.	Freq.			Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	1.2510	1.90	10.89	12.79	56.00	-43.21	QP	
2	1.2510	-10.00	10.89	0.89	46.00	-45.11	AVG	

Report No.: FCC1705036 Page 12 of 82


Date: 2017-05-19



## **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

# **Block diagram of Test setup**

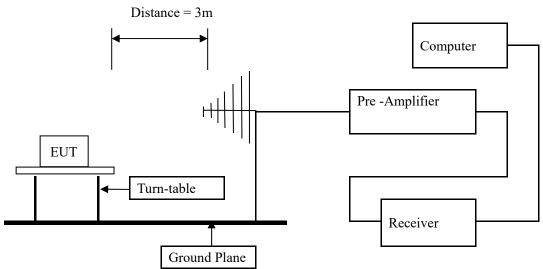

- 6.2 Configuration of The EUT

  Same as section 5.3 of this report
- 6.3 EUT Operating Condition
  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1705036 Page 13 of 82

Date: 2017-05-19



All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

# Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All modulation have been tested ,GFSK was found as the worst case and only reported

Report No.: FCC1705036 Page 14 of 82

Date: 2017-05-19



#### Test result

# General Radiated Emission Data and Harmonics Radiated Emission Data

# Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

**EUT set Condition:** Keep Bluetooth Transmitting

**Results:** Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
250.160	31.64	Н	46.00
969.720	40.78	Н	54.00
151.440	29.01	V	43.50
953.680	40.34	V	46.00


Page 15 of 82

Report No.: FCC1705036

Date: 2017-05-19



# Test Figure:

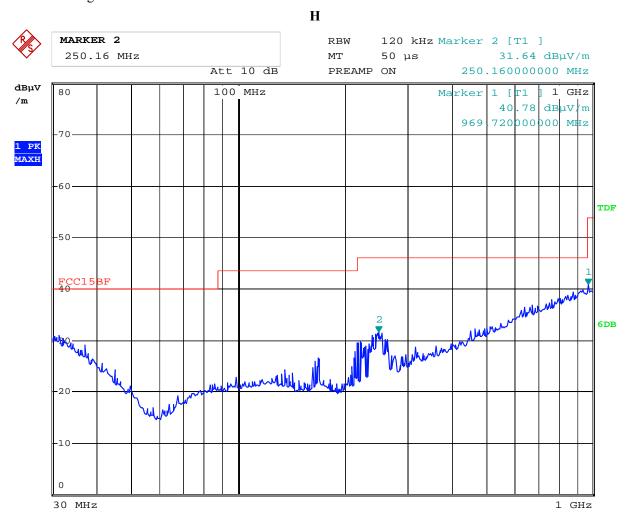


8.MAY.2017 15:16:48 Date:

Report No.: FCC1705036 Page 16 of 82

Date: 2017-05-19



Test Figure:

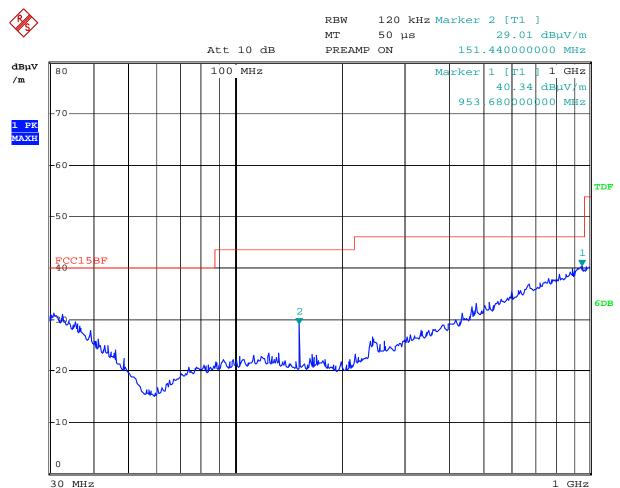

8.MAY.2017 15:13:34 Date:

Report No.: FCC1705036 Page 17 of 82

Date: 2017-05-19



# Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4804	ı	Н	74(Peak)/ 54(AV)
4804	1	V	74(Peak)/ 54(AV)
7206	1	H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618	1	H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

# **Operation Mode: Transmitting g under Middle Channel (2441MHz)**

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4882	ı	Н	74(Peak)/ 54(AV)
4882	1	V	74(Peak)/ 54(AV)
7323	1	H/V	74(Peak)/ 54(AV)
9764	-	H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087	-	H/V	74(Peak)/ 54(AV)
19528	-	H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1705036 Page 18 of 82

Date: 2017-05-19



# Operation Mode: Transmitting under High Channel (2480MHz)

	0 0	,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured


Report No.: FCC1705036

Date: 2017-05-19




Please refer to the following test plots for details:

## Low Channel: Horizontal

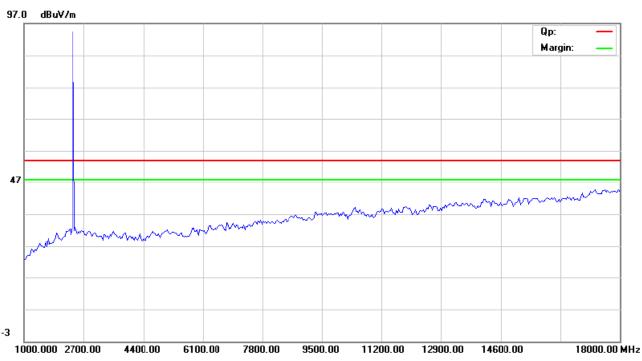

## Low Channel: Vertical

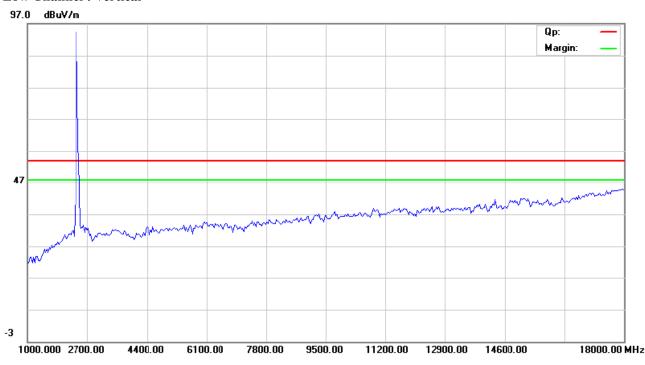

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 20 of 82

Report No.: FCC1705036


Date: 2017-05-19



#### **Middle Channel: Horizontal**

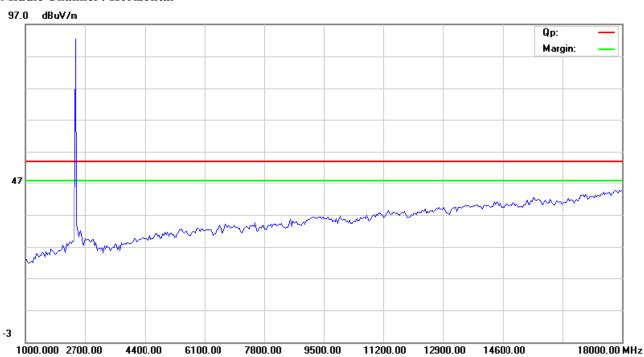

#### Middle Channel: Vertical

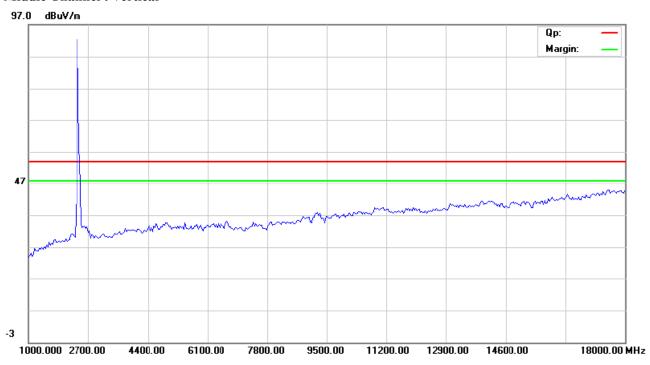

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Report No.: FCC1705036


Date: 2017-05-19



# **High Channel: Horizontal**

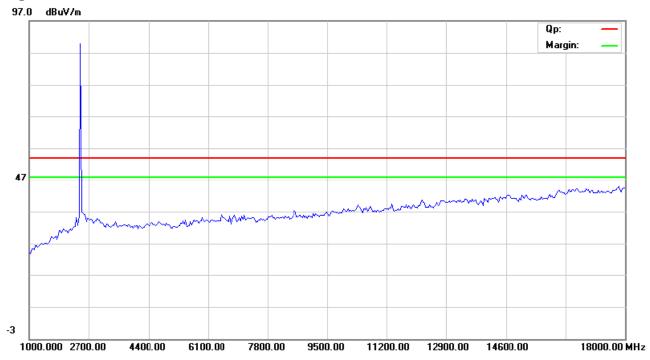

## **High Channel: Vertical**

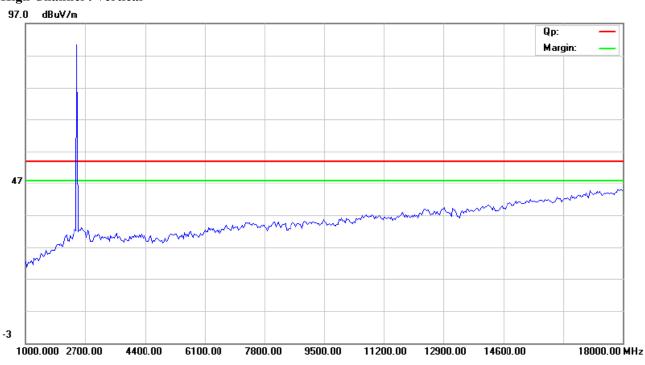

# Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: FCC1705036 Page 22 of 82

Date: 2017-05-19



# 7.0 20dB Bandwidth Measurement

## 7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

## 7.2 Limits of 20dB Bandwidth Measurement

N/A

#### 7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

#### 7.4 Test Result

# **Type of Modulation: GFSK**

Type of Modulation. Grox					
EUT	Blı	Bluetooth Headset		SP-7	
Mode	Ke	Keep Transmitting		DC3.7V	
Temperat	ure	24 deg. C,		56% RH	
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail	
Low	2402	1034		Pass	
Middle	2441	1040		Pass	
High	2480	1040		Pass	


Report No.: FCC1705036 Page 23 of 82

Date: 2017-05-19



# Test Figure:

## 1. Condition: Low Channel

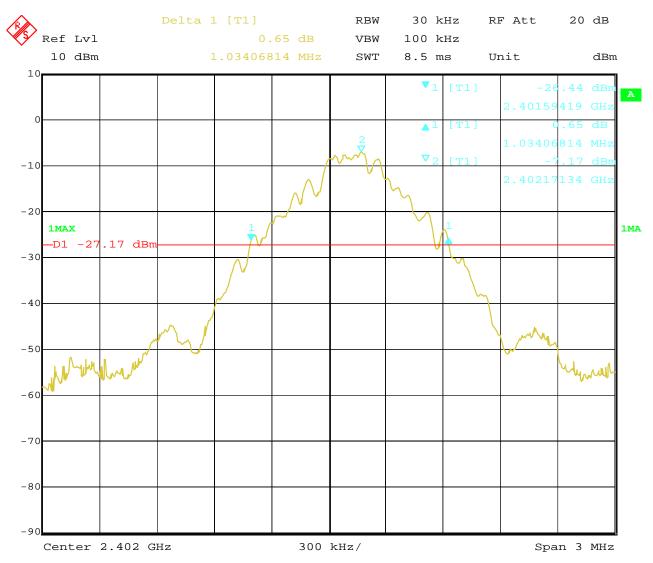


Date: 13.MAY.2017 16:50:44 Report No.: FCC1705036 Page 24 of 82

Date: 2017-05-19



## 2. Condition: Middle Channel

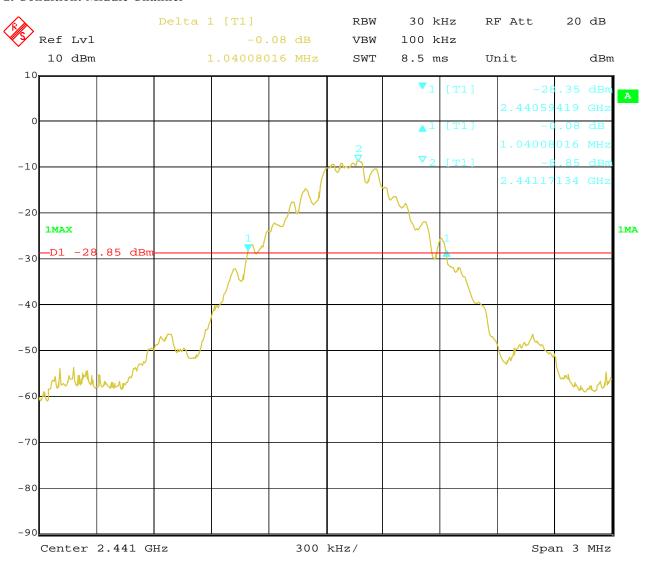


Date: 13.MAY.2017 16:46:19 Report No.: FCC1705036 Page 25 of 82

Date: 2017-05-19



# 3. High Channel

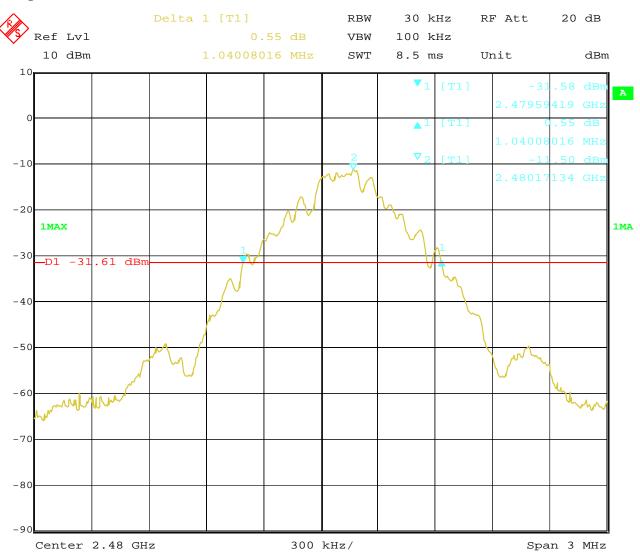

Date: 13.MAY.2017 16:40:50

Page 26 of 82 Report No.: FCC1705036

Date: 2017-05-19



# **Test Result**

Type of Modulation: JI/4DQPSK

EUT	В	Bluetooth Headset		SP-7
Mode	K	Keep Transmitting		DC3.7V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1359		Pass
Middle	2441	1353		Pass
High	2480	1353		Pass

Page 27 of 82


Date: 2017-05-19

Report No.: FCC1705036



# Test Figure:

# 1. Condition: Low Channel

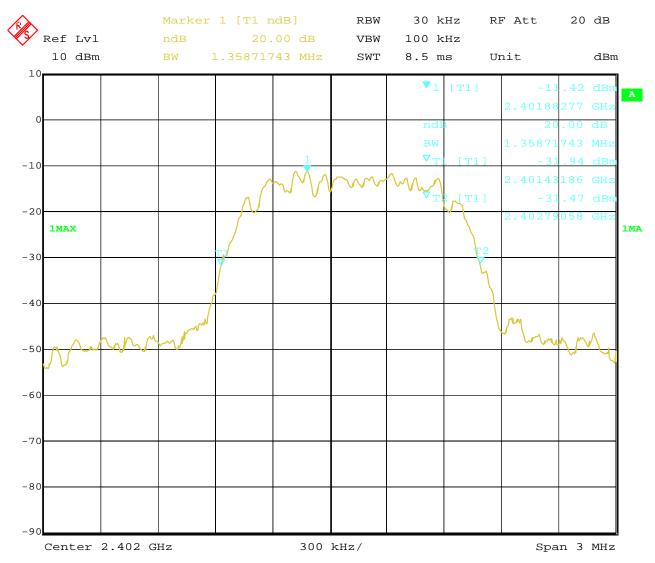


16:03:09 Date: 13.MAY.2017

Report No.: FCC1705036 Page 28 of 82

Date: 2017-05-19



## 2. Condition: Middle Channel

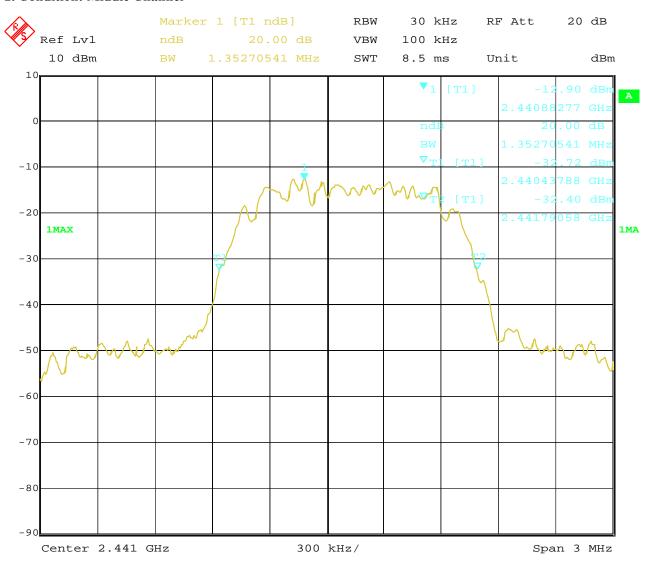


Date: 13.MAY.2017 16:00:58 Report No.: FCC1705036 Page 29 of 82

Date: 2017-05-19



# 3. High Channel

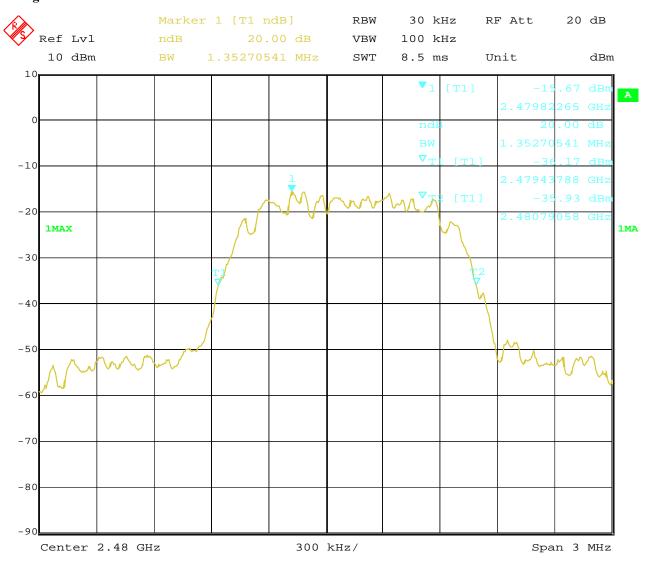

Date: 13.MAY.2017 15:58:07

Page 30 of 82 Report No.: FCC1705036

Date: 2017-05-19



## **Test Result**

**Type of Modulation: 8DPSK** 

EUT	Blu	Bluetooth Headset		SP-7
Mode	Kee	Keep Transmitting		DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1377		Pass
Middle	2441	1377		Pass
High	2480	1383		Pass

Page 31 of 82


Date: 2017-05-19

Report No.: FCC1705036



# Test Figure:

# 1. Condition: Low Channel

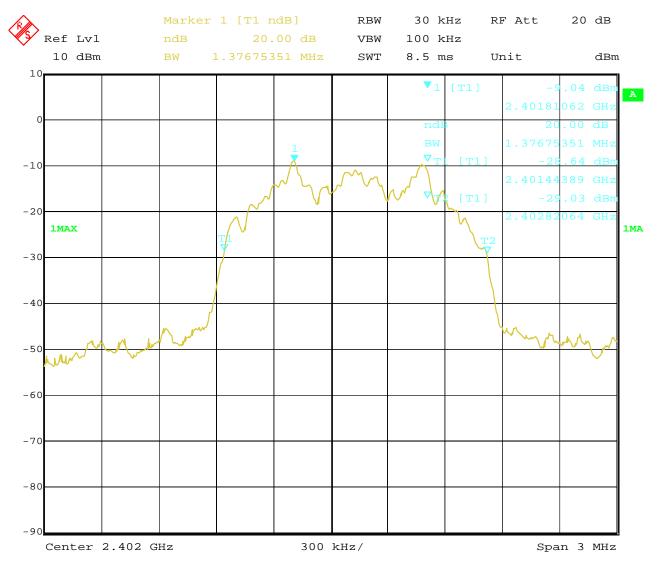


16:06:51 Date: 13.MAY.2017

Report No.: FCC1705036 Page 32 of 82

Date: 2017-05-19



## 2. Condition: Middle Channel

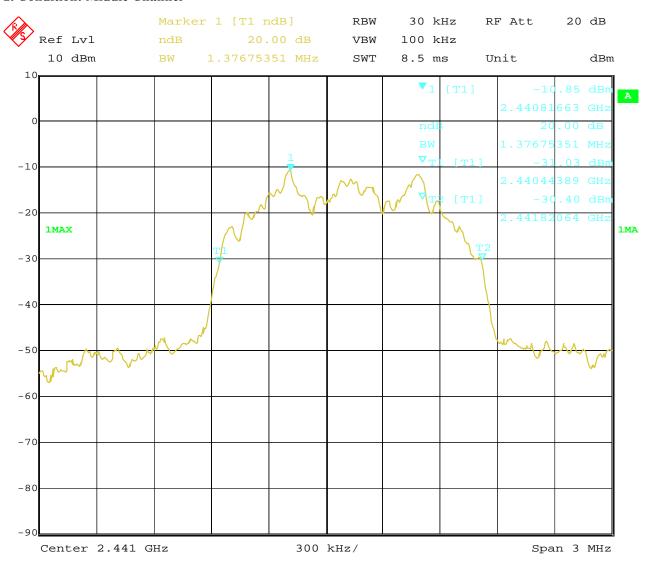


Date: 13.MAY.2017 16:08:53 Report No.: FCC1705036 Page 33 of 82

Date: 2017-05-19



# 3. High Channel

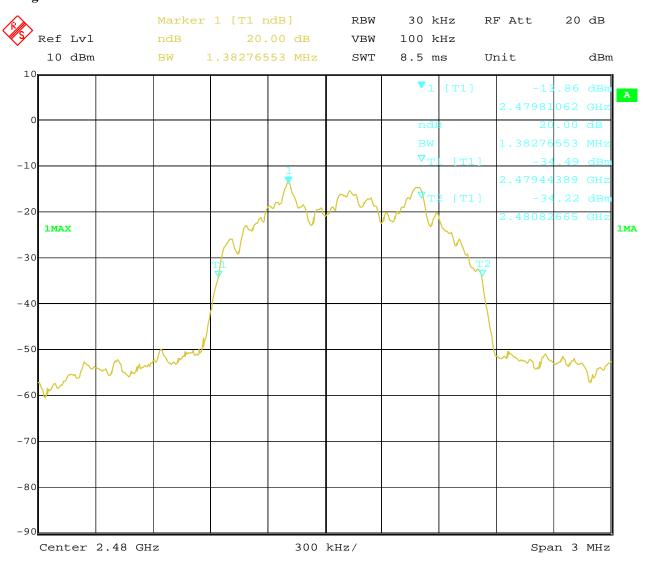

Date: 13.MAY.2017 16:13:07 Report No.: FCC1705036 Page 34 of 82

Date: 2017-05-19



# 8. Maximum Output Power

### 8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## 8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

#### 8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = 10MHz, RBW=3MHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1705036 Page 35 of 82

Date: 2017-05-19



## **8.4Test Results**

# Type of Modulation: GFSK

EUT	Bl	Bluetooth Headset		SP-7
Mode	Ke	Keep Transmitting		DC3.7V
Temperature	e	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	PK Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-1.47	30	Pass
Middle	2441	-3.58	30	Pass
High	2480	-5.94	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

## Type of Modulation: $\pi/4DQPSK$

EUT	Bl	Bluetooth Headset		SP-7
Mode	Ke	Keep Transmitting		DC3.7V
Temperature	е	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	PK Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-3.18	30	Pass
Middle	2441	-5.09	30	Pass
High	2480	-7.38	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 36 of 82 Report No.: FCC1705036

Date: 2017-05-19



## **Type of Modulation: 8DPSK**

EUT	В	Bluetooth Headset		SP-7
Mode	K	Keep Transmitting		DC3.7V
Temperature	e	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	PK Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-3.36	30	Pass
Middle	2441	-5.20	30	Pass
High	2480	-7.33	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Report No.: FCC1705036

Date: 2017-05-19



Page 37 of 82

## 9. Carrier Frequency Separation

### 9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

#### 9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span; Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 82

Report No.: FCC1705036

Date: 2017-05-19




#### 9.4Test Result

### **Type of Modulation: GFSK**

EUT	Bluetooth Headset N		Model		SP-7
Mode	Hopping On In		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation		Limit		Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2/3 of the 20 dB bandwidth		dwidth	Pass

### **Test Plots**

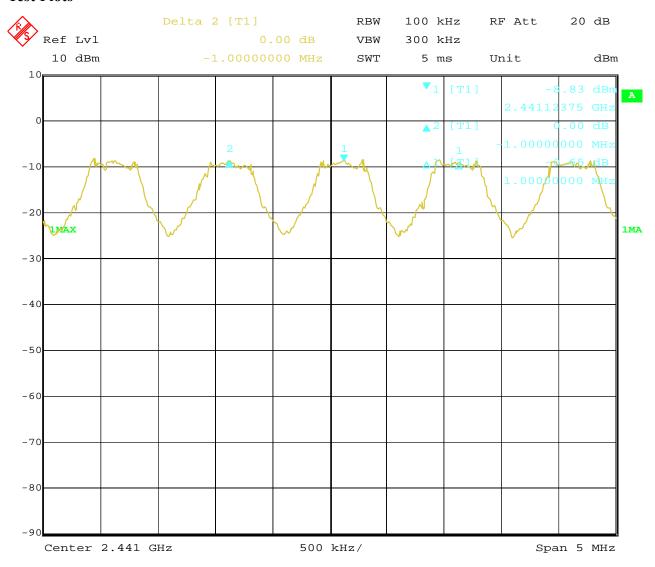

13.MAY.2017 11:26:47 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1705036 Page 39 of 82


Date: 2017-05-19



## Type of Modulation: $\sqrt{1/4}$ DOPSK

EUT	Bluetooth Headset N		Model		SP-7
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation		Limit		Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth		vidth	Pass

## **Test Plots**

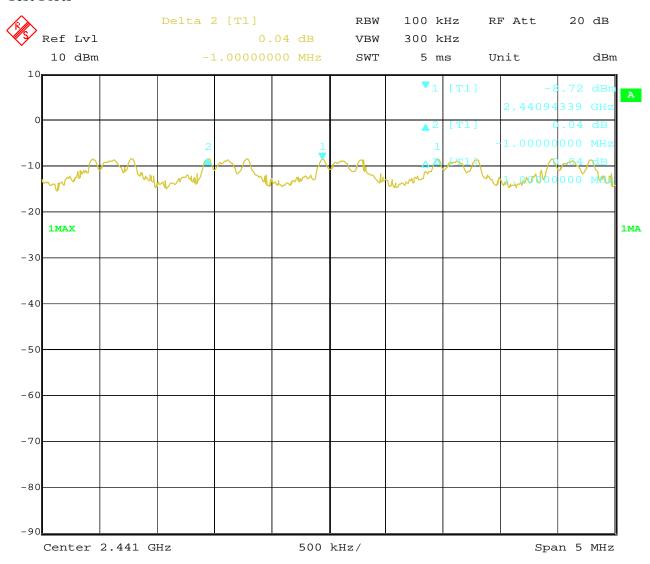

Date: 13.MAY.2017 11:50:41 Report No.: FCC1705036 Page 40 of 82


Date: 2017-05-19



### **Type of Modulation: 8DPSK**

EUT	Bluetooth Headset N		Model		SP-7
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation		Limit		Pass/ Fail	
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth		vidth	Pass

## **Test Plots**

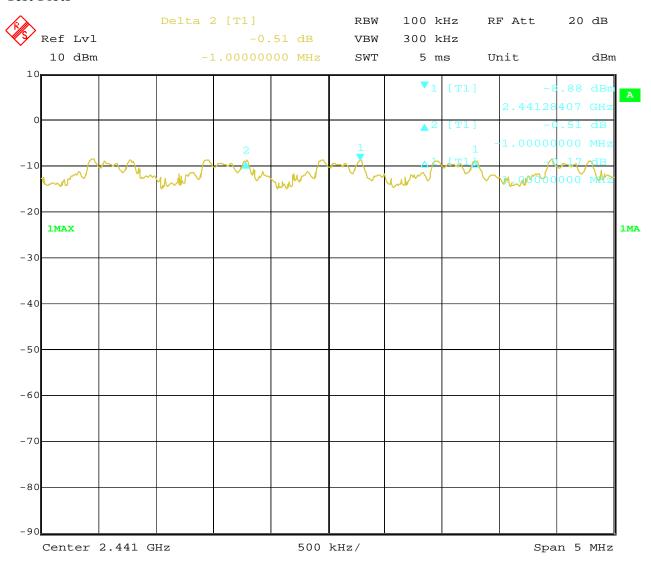

Date: 13.MAY.2017 12:31:29 Report No.: FCC1705036 Page 41 of 82

Date: 2017-05-19



## 10. Number of Hopping Channels

#### 10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

#### **10.3 Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 42 of 82

Report No.: FCC1705036

Date: 2017-05-19




#### 10.4Test Result

## Type of Modulation: GFSK

EUT	Bluetooth Headset		Model	SP-7	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Operating Frequency Number of hopping cha		ping channels	Limit	Pass/ Fail	
2402-2480MHz		79		≥ 15	Pass

### **Test Plot**

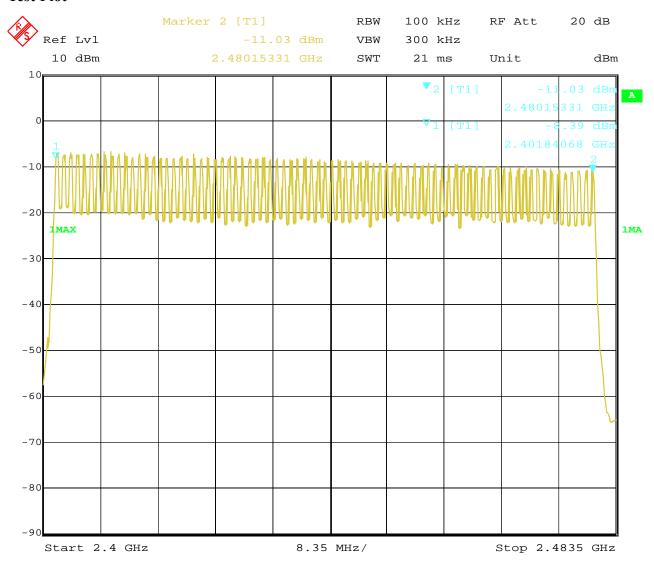

13.MAY.2017 11:19:39 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 43 of 82

Report No.: FCC1705036


Date: 2017-05-19



## Type of Modulation: $\sqrt{J/4DQPSK}$

EUT	Bluetooth Headset		Model		SP-7	
Mode	Hopping On		Input V	oltage	DC3.7V	
Temperature	24 deg. C,		Humidi	ity	56% RH	
Operating Frequency  Number of hopp channels		oing	Liı	nit	Pass/ Fail	
2402-2480MHz 79			≥	15	Pass	

### **Test Plot**

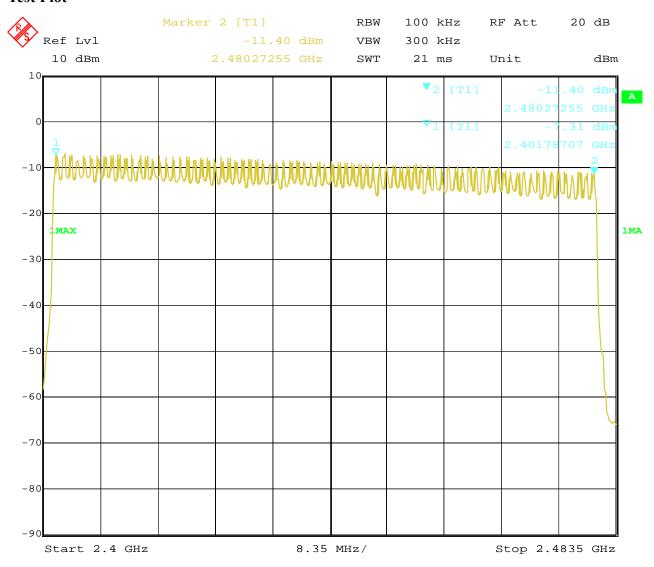

Date: 13.MAY.2017 11:56:49

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1705036 Page 44 of 82


Date: 2017-05-19



## **Type of Modulation: 8DPSK**

EUT	Bluetooth Headset		Model		SP-7	
Mode	Hopping On		Input V	oltage		DC3.7V
Temperature	24 deg. C,		Humidi	ity		56% RH
Operating Frequency		Number of hopp channels	oing	Liı	mit	Pass/ Fail
2402-2480MHz		79		≥	15	Pass

### **Test Plot**

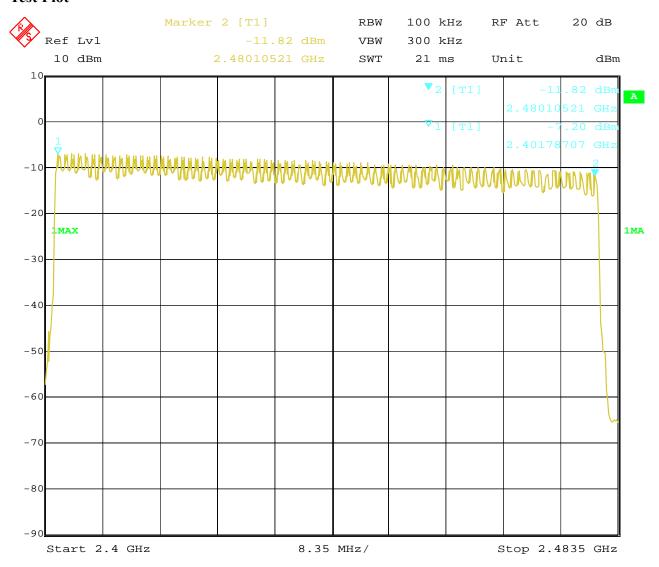

Date: 13.MAY.2017 12:05:55

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1705036

Date: 2017-05-19



Page 45 of 82

## 11. Time of Occupancy (Dwell Time)

#### 11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

## 11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

#### 11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW
- ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak;
  Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1705036 Page 46 of 82

Date: 2017-05-19



#### 11.4 Test Result

Type of Modulation: GFSK

EUT	Bluetoo	Bluetooth Headset			SP-7	
Mode	Keep Tr	Insmitting Input Voltage		Keep Transmitting Input Voltage DC3.7V		OC3.7V
Temperatur	re 24 c	leg. C,	Humidity	50	6% RH	
Channel	Reading	Hoping	g Rate	Actual	Limit	
High	2.926ms	266.66	7 hop/s	0.312s	0.4s	
Middle	2.906ms	266.667 hop/s		0.310s	0.4s	
Low	2.906ms	266.66	7 hop/s	0.310s	0.4s	

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

Note: DH5 was the wore case

Page 47 of 82

Report No.: FCC1705036


Date: 2017-05-19



Test Plots:

#### DH5

High Channel:

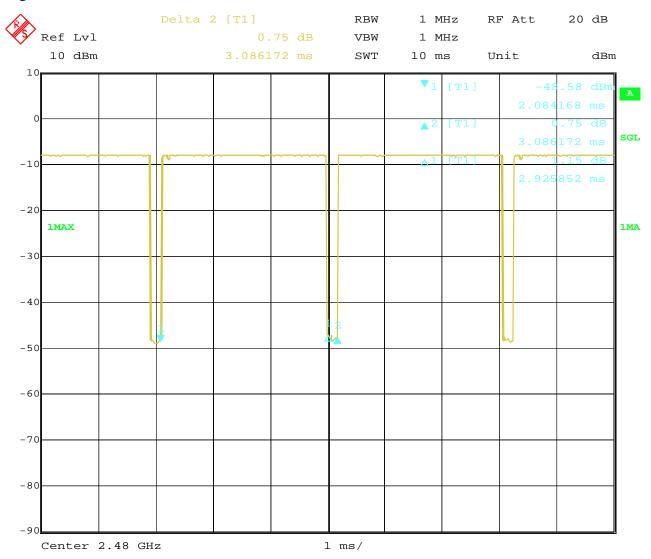

Date: 15.MAY.2017 18:26:52

Page 48 of 82


Report No.: FCC1705036

Date: 2017-05-19



DH5

#### Middle Channel

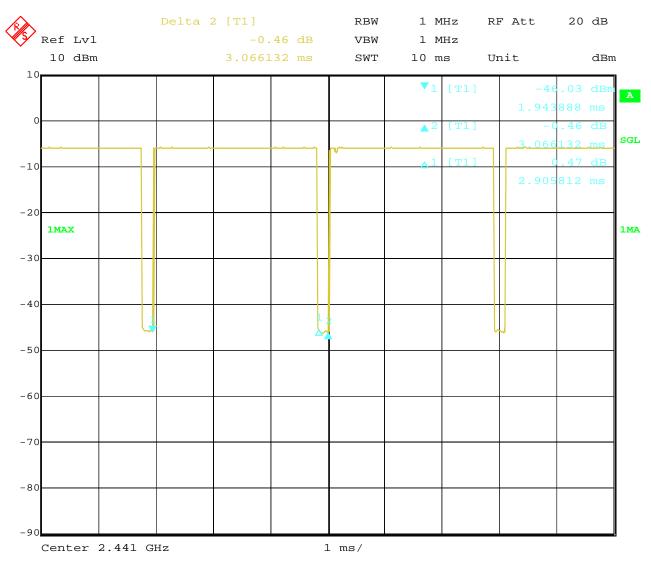

15.MAY.2017 18:26:00 Date:

Page 49 of 82


Report No.: FCC1705036

Date: 2017-05-19



DH5

Low Channel

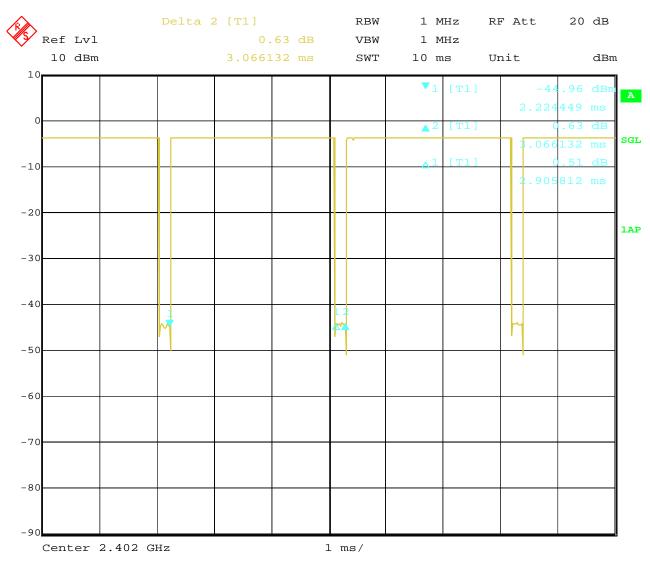

15.MAY.2017 18:19:08 Date:

Report No.: FCC1705036 Page 50 of 82

Date: 2017-05-19



#### **Test Result**

Type of Modulation:  $\sqrt{J/4DQPSK}$ 

EUT	Bluetoo	Bluetooth Headset			SP-7
Mode	Keep Tr	ansmitting	Input Voltage	DC3.7V	
Temperatur	re 24 c	leg. C,	g. C, Humidity		66% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
High	2.926ms	266.66	7 hop/s	0.312s	0.4s
Middle	2.926ms	266.66	7 hop/s	0.312s	0.4s
Low	2.946ms	266.66	7 hop/s	0.314s	0.4s

Actual = Reading  $\times$  (Hopping rate / Number of channels)  $\times$  Test period, Test period = 0.4 [seconds / channel]  $\times$  79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

Note: DH5 was the worse case.

Page 51 of 82 Report No.: FCC1705036


Date: 2017-05-19



Test Plots:

#### **2DH5**

## **High Channel**

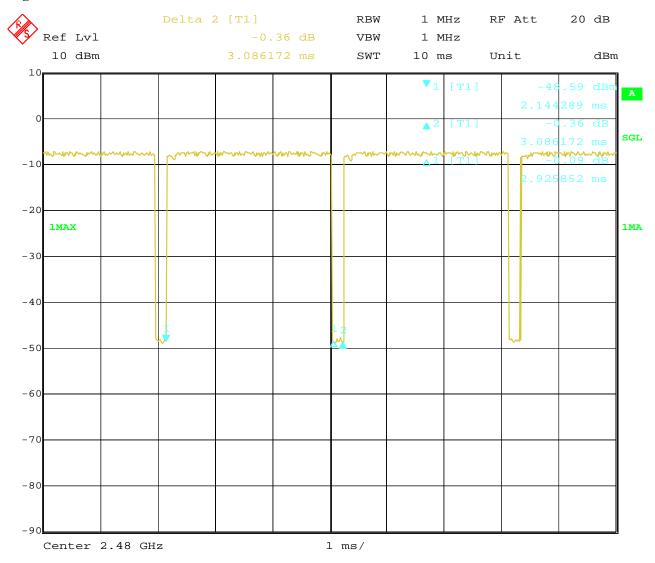


Date: 15.MAY.2017 18:27:25 Report No.: FCC1705036 Page 52 of 82

Date: 2017-05-19



# **2DH5**

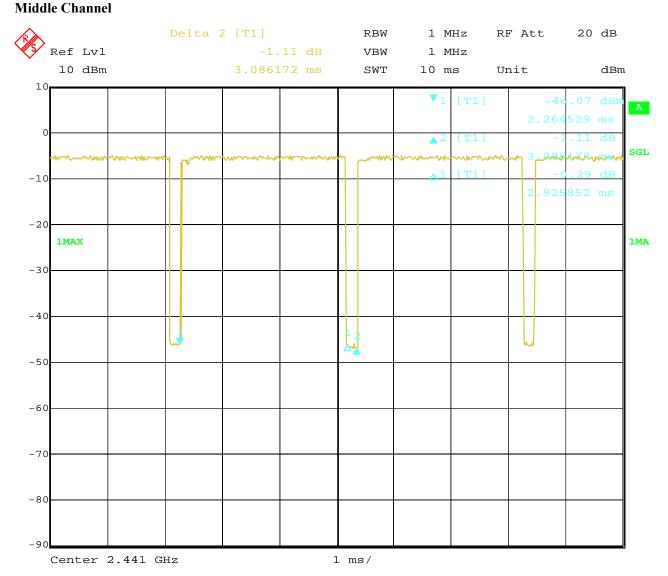

15.MAY.2017 18:25:19 Date:


Page 53 of 82 Report No.: FCC1705036

Date: 2017-05-19



### **2DH5**

### **Low Channel**

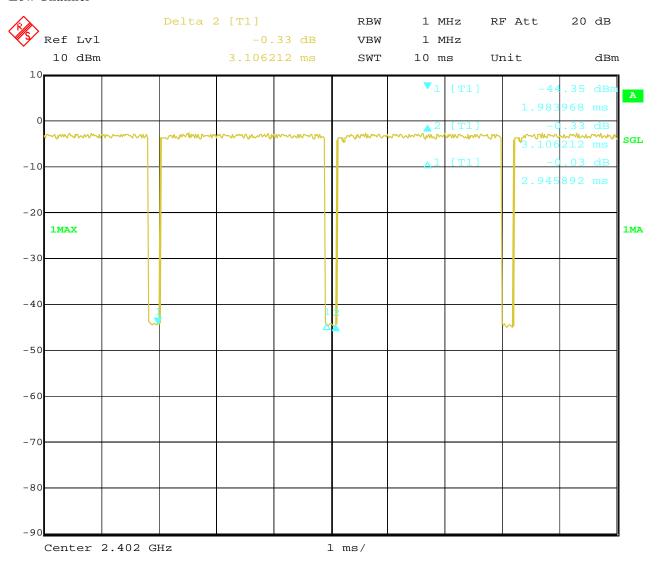

Date: 15.MAY.2017 18:21:16 Report No.: FCC1705036 Page 54 of 82

Date: 2017-05-19



## Type of Modulation: 8DPSK

EUT	Bluetoo	Bluetooth Headset			SP-7
Mode	Keep Tr	ansmitting	Input Voltage	DC3.7V	
Temperatur	re 24 d	leg. C, Humidity		56% RH	
Channel	Reading	Hopin	g Rate	Actual	Limit
High	2.946ms	266.66	7 hop/s	0.314s	0.4s
Middle	2.946ms	266.667 hop/s		0.314s	0.4s
Low	2.926ms	266.66	7 hop/s	0.312s	0.4s

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

Note: DH5 was the worse case.

Page 55 of 82

Report No.: FCC1705036


Date: 2017-05-19



Test Plots:

#### **3DH5**

## **High Channel**

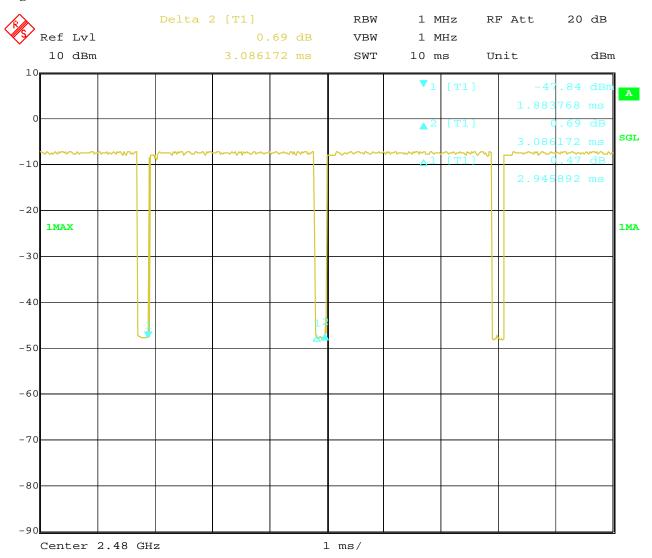

Date: 15.MAY.2017 18:29:40


Page 56 of 82

Report No.: FCC1705036

Date: 2017-05-19



**3DH5 Middle Channel** 

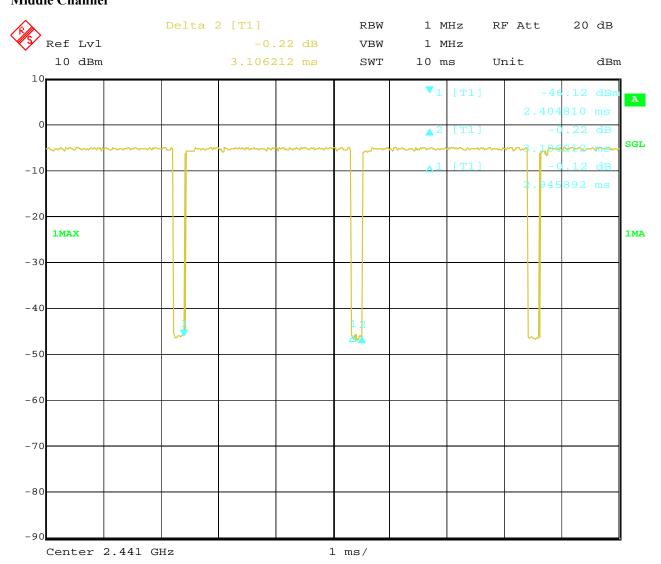


15.MAY.2017 18:23:50 Date:

Report No.: FCC1705036 Page 57 of 82

Date: 2017-05-19



## **3DH5 Low Channel**

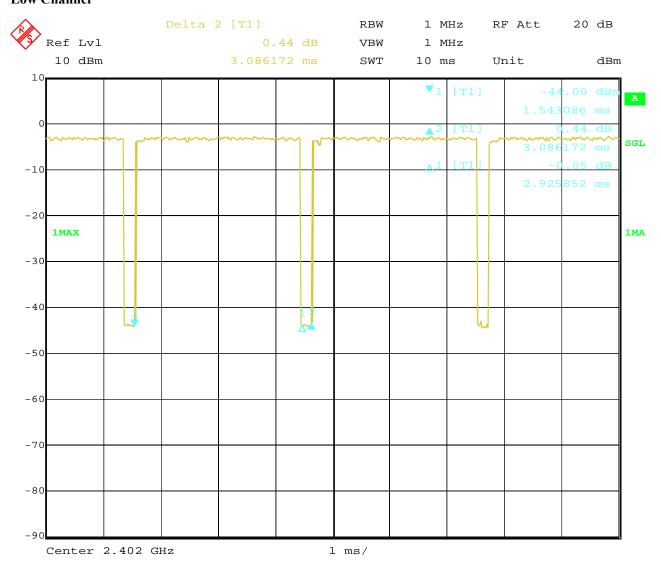

15.MAY.2017 18:22:48 Date:

Report No.: FCC1705036


Date: 2017-05-19



Page 58 of 82

### 12 Out of Band Measurement

## 12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

### 12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### 12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

- Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.
- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 59 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: GFSK

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	Low Channel
Mode	Keeping Transmitting I		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBμV/m)	45.4		74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

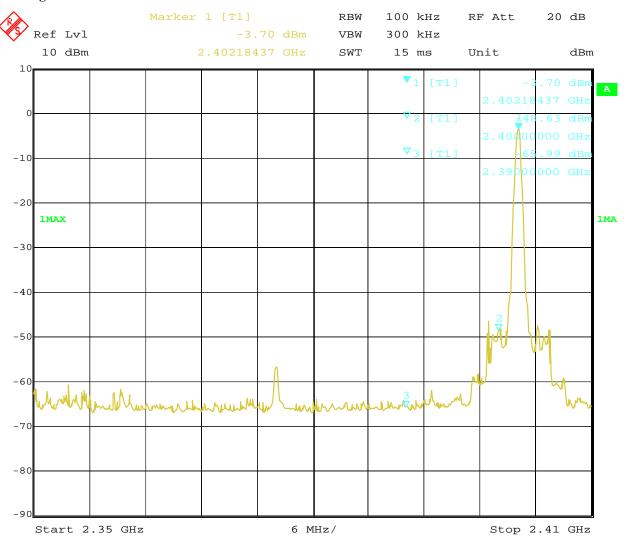

13.MAY.2017 15:24:33 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 60 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: GFSK

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature		24 deg. C,		56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	42.3		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

## **Test Figure:**

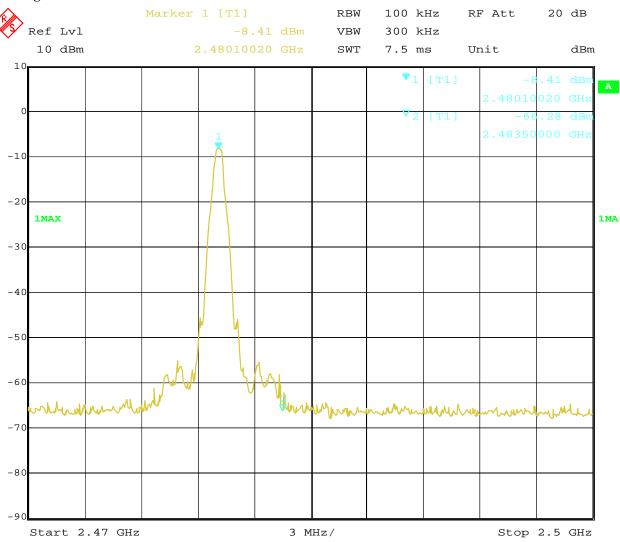

Date: 13.MAY.2017 15:25:14

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 61 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: GFSK

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBμV/m)	43.7		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

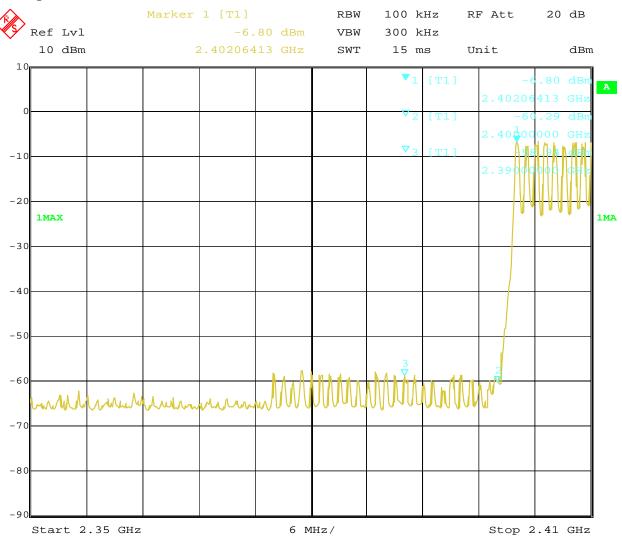

Date: 13.MAY.2017 15:04:56

Page 62 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: GFSK

### Out of Band Test Result

Product:	Bluetooth Headset		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 42.1			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

## **Test Figure:**

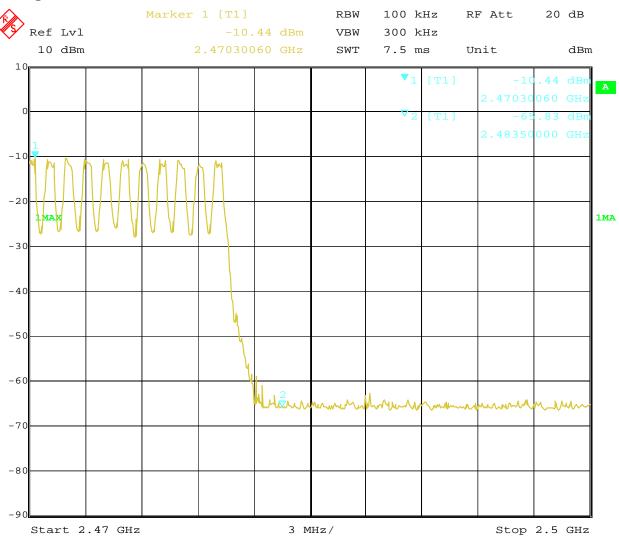

Date: 13.MAY.2017 15:02:01

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 63 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: $\sqrt{1/4}$ DQPSK

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

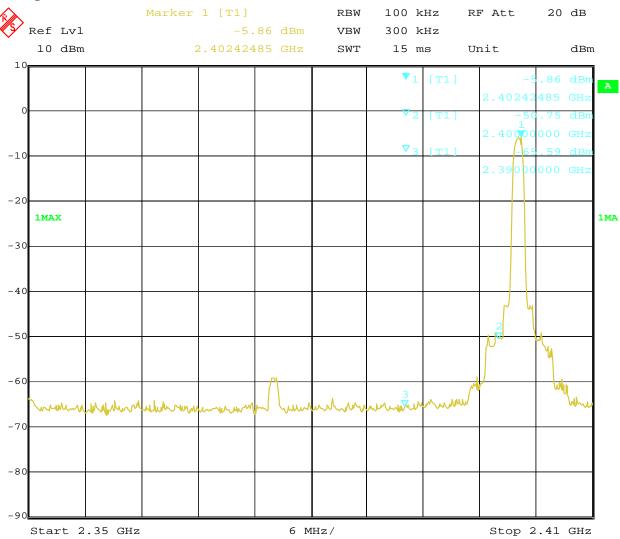

Date: 13.MAY.2017 15:24:02

Page 64 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: $\sqrt{1/4}$ DQPSK

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 41.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

## **Test Figure:**

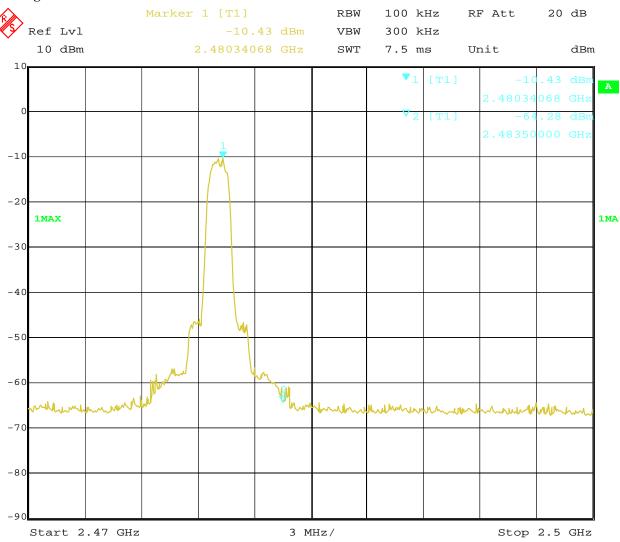

Date: 13.MAY.2017 15:29:18

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 65 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: $\sqrt{1/4}$ DQPSK

### Out of Band Test Result

Product:	Bluetooth Headset		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

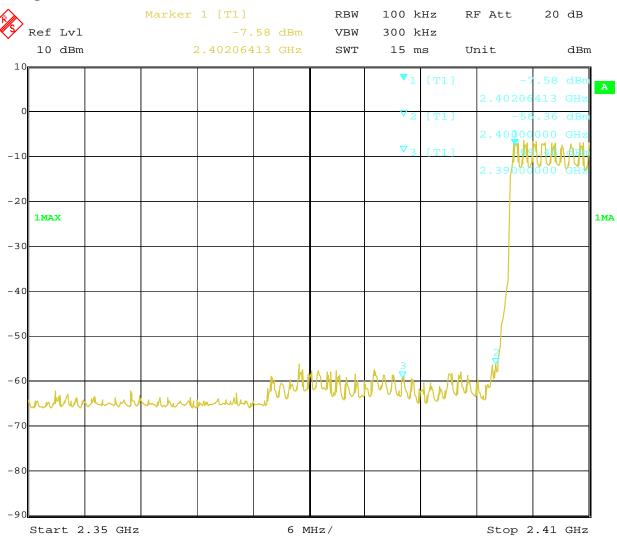

Date: 13.MAY.2017 15:13:05 Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: $\sqrt{1/4}$ DQPSK

### Out of Band Test Result

Product:	Blı	uetooth Headset	Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 41.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

## **Test Figure:**

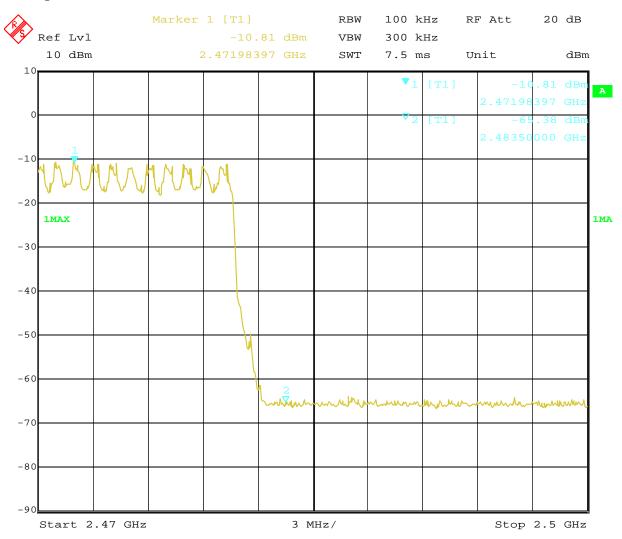

13.MAY.2017 12:59:36 Date:

Page 67 of 82

Report No.: FCC1705036

Date: 2017-05-19




## **Type of Modulation: 8DPSK**

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	Low Channel
Mode	Keeping Transmitting I		Input Voltage	DC3.7V
Temperature	24 deg. C I		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	44.8		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

## **Test Figure:**

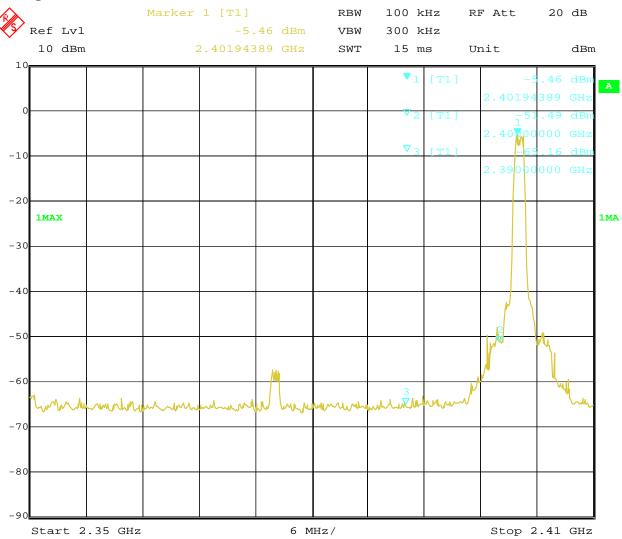

Date: 13.MAY.2017 15:17:57

Page 68 of 82

Report No.: FCC1705036

Date: 2017-05-19




## **Type of Modulation: 8DPSK**

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 42.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

## **Test Figure:**

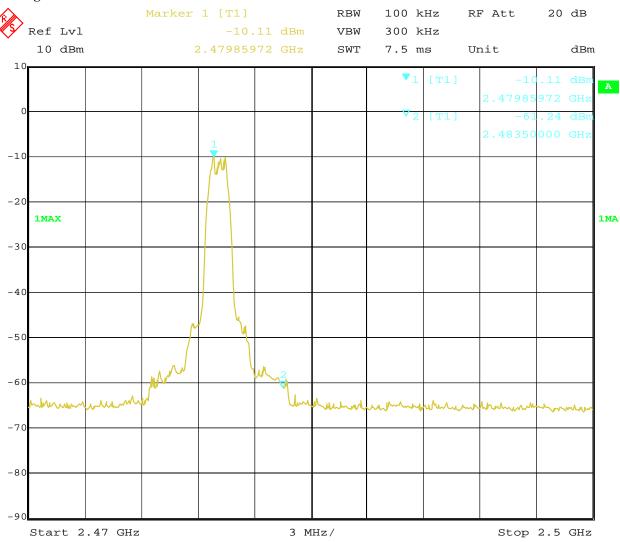

Date: 13.MAY.2017 15:33:16

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 69 of 82

Report No.: FCC1705036

Date: 2017-05-19




## **Type of Modulation: 8DPSK**

#### Out of Band Test Result 12.4

Product:	Bluetooth Headset		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

## **Test Figure:**

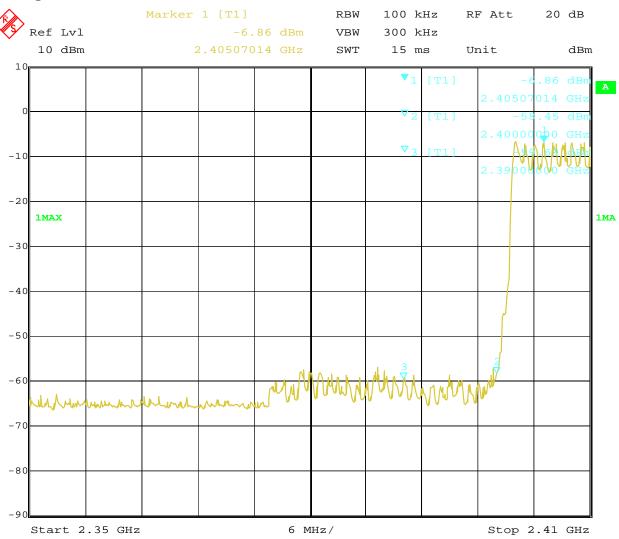

Date: 13.MAY.2017 15:17:15

Page 70 of 82

Report No.: FCC1705036

Date: 2017-05-19




## Type of Modulation: 8DPSK

### Out of Band Test Result

Product:	Bluetooth Headset		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 41.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

## **Test Figure:**

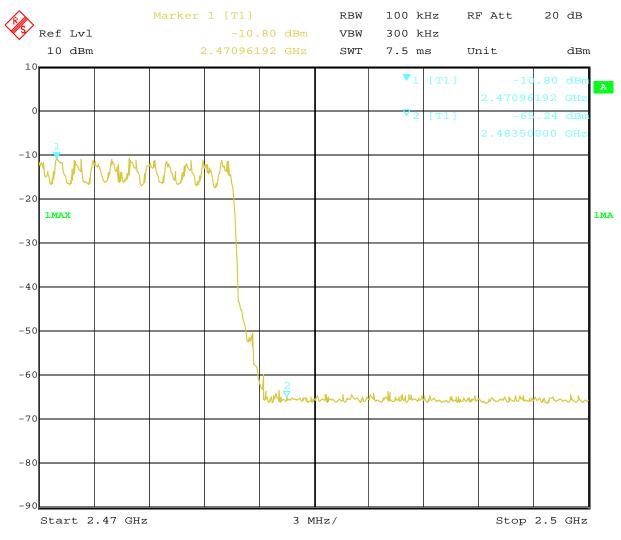

13.MAY.2017 12:52:23 Date:

Report No.: FCC1705036

Date: 2017-05-19



Page 71 of 82

## 13.0 Antenna Requirement

### 13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

### 13.2 Antenna Connected constructions

PCB Antenna and the maximum Gain of this antenna is 2.3dBi

Report No.: FCC1705036 Page 72 of 82

Date: 2017-05-19




#### 14.0 FCC ID Label

### FCC ID: 2AIVKSP-7

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### **Mark Location:**

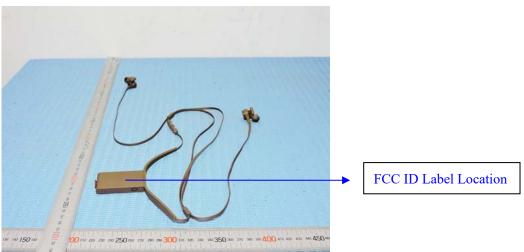


Page 73 of 82 Report No.: FCC1705036

Date: 2017-05-19



#### 15.0 Photo of testing

Conducted Emission Test Setup:

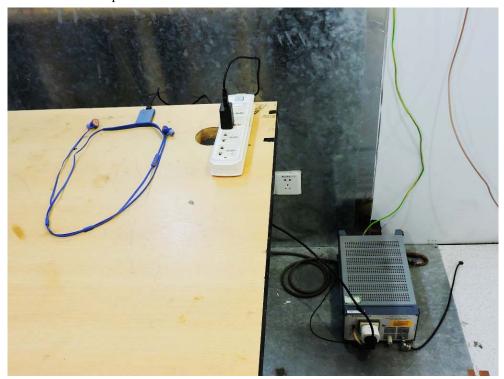


Page 74 of 82


Report No.: FCC1705036

Date: 2017-05-19



## Radiated Emission Test Setup:

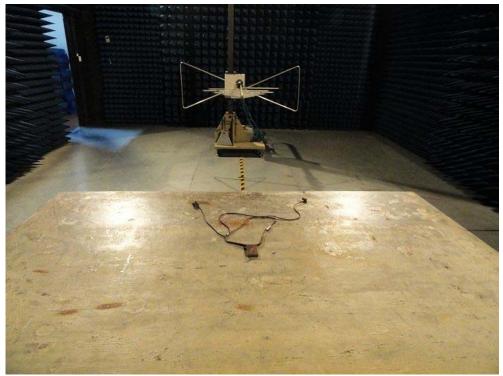

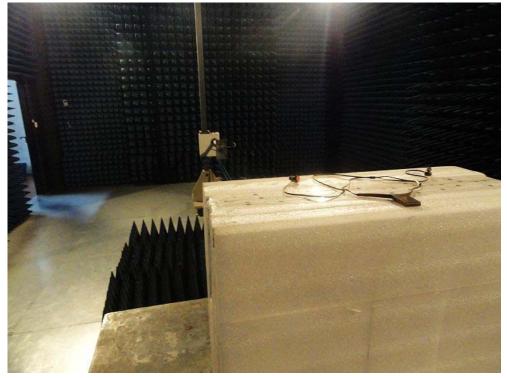

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1705036

Date: 2017-05-19



## Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 76 of 82

Report No.: FCC1705036

Date: 2017-05-19



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 77 of 82

Report No.: FCC1705036

Date: 2017-05-19



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 78 of 82


Report No.: FCC1705036

Date: 2017-05-19



Outside view



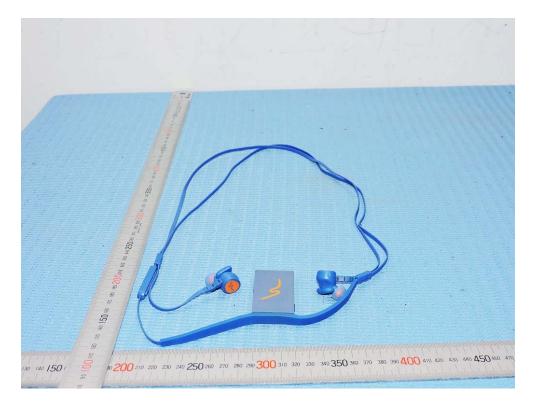

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 79 of 82

Report No.: FCC1705036

Date: 2017-05-19



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 80 of 82


Report No.: FCC1705036

Date: 2017-05-19



Inside view



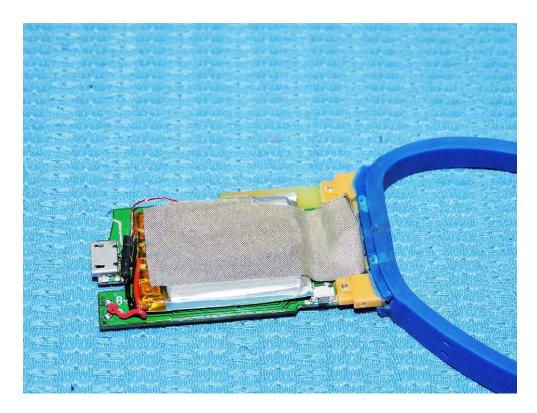

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 81 of 82


Report No.: FCC1705036

Date: 2017-05-19



Inside view

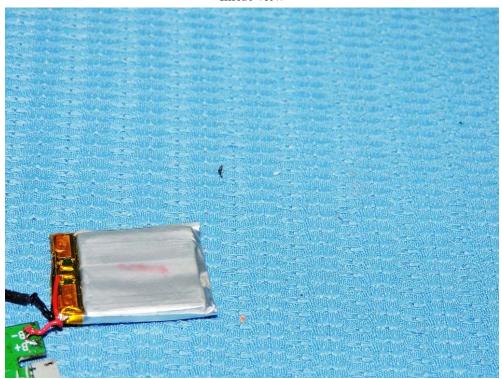

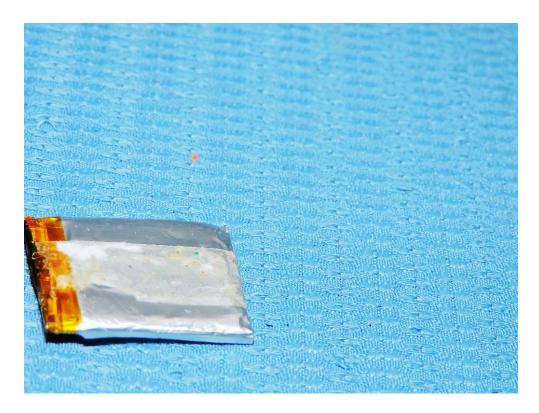

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 82 of 82 Report No.: FCC1705036

Date: 2017-05-19



Inside view

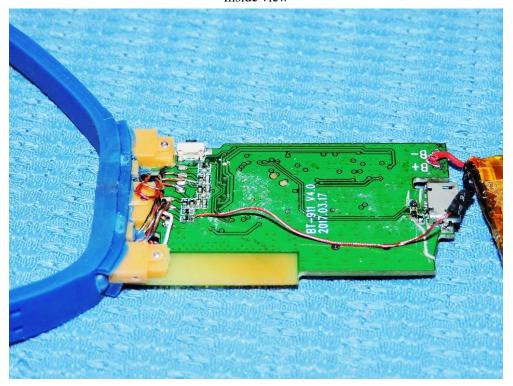

End of the report