
FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Tvmining (overseas) Holding Limited

OMC Chambers Wickhams Cay 1 Road Town, Tortola British Virgin Islands

E.U.T.: Android OTT BOX

Model Name: TFD-43-CA

Brand Name: SUNTV HD BOX

FCC ID: 2AJIB-TFD-43-CA

Report Number: NTC1608094F

Test Date(s): August 13, 2016 to August 29, 2016

Report Date(s): August 29, 2016

Prepared by

Dongguan Nore Testing Center Co., Ltd.

**Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer


Rose Hu / Engineer


Sunm LV / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	7
1.4 EQUIPMENT MODIFICATIONS	7
1.5 SUPPORT DEVICE	7
1.6 TEST FACILITY AND LOCATION	8
1.7 SUMMARY OF TEST RESULTS	9
2. SYSTEM TEST CONFIGURATION	10
2.1 EUT CONFIGURATION	10
2.2 SPECIAL ACCESSORIES	10
2.3 DESCRIPTION OF TEST MODES	10
2.4 EUT EXERCISE	10
3. CONDUCTED EMISSIONS TEST	11
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
3.2 TEST CONDITION	11
3.3 MEASUREMENT RESULTS	11
4. MAX. CONDUCTED OUTPUT POWER	14
4.1 MEASUREMENT PROCEDURE	14
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.3 MEASUREMENT RESULTS	14
5. 6DB&20DB BANDWIDTH	16
5.1 MEASUREMENT PROCEDURE	16
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
5.3 MEASUREMENT RESULTS	16
6. POWER SPECTRAL DENSITY	23
6.1 MEASUREMENT PROCEDURE	23
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	23
6.3 MEASUREMENT RESULTS	23
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	30
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE	30
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
7.3 MEASUREMENT RESULTS	30



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS 37

8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....37

8.2 MEASUREMENT PROCEDURE38

8.3 LIMIT.....39

8.4 MEASUREMENT RESULTS39

9. ANTENNA APPLICATION 43

9.1 ANTENNA REQUIREMENT43

9.2 MEASUREMENT RESULTS.....43

10. TEST EQUIPMENT LIST..... 44

Revision History of This Test Report

Report Number	Description	Issued Date
NTC1608094F	Initial Issue	2016-08-29

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This device is a Android OTT BOX with WIFI function. It's powered by DC 12V come from external power adapter. For more details features, please refer to User's Manual.

Manufacturer	: Sun Global Media Ltd.
Address	: 7361 Calhoun Place, Suite 460, Rockville Maryland 20855 USA
Factory	: Same as the applicant.
Power Supply	: DC 12V come from Adapter
Adapter	: M/N: TEKA012-1201000UK Input: AC 100-240V 50/60Hz 0.35A Max Output: DC 12V 1A
Test voltage	: AC120V 60Hz or AC 240V 60Hz Only the worst case was recorded in the test report.
Model name	: TFD-43-CA
Model difference	: None
Hardware version	: HD6065-S905-VER2.0
Software version	: TW: 20160727 test-keys
Serial number	: N/A
Technical parameters For WIFI Function	
Frequency Range	: 2412-2462MHz for 802.11b/g/n(HT20)
Modulation	: DSSS for 802.11b OFDM for 802.11g/n(HT20)
Number of Channel	: 11 for 802.11b/g/n(HT20)
Channel space	: 5MHz
Date Rate	: 802.11b:1~11Mbps, 802.11g:6~54Mbps 802.11n: 6.5~135Mbps
Antenna Type	: FPC Antenna
Antenna Gain	: 2.0 dBi

WIFI Channel List

802.11 b/g/n(HT20)	
Channel	Frequency MHz
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

802.11b/g/n(HT20)	
Channel	Frequency MHz
1	2412
6	2437
11	2462

Test SW version	RFTEST TOOL
-----------------	-------------

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AJIB-TFD-43-CA filing to comply with Section 15.247 of the FCC Part 15(2016), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

LCD Monitor	: Manufacturer: DELL M/N: S2240Tb S/N: CN-0FP53P-74261-3AL-0CYU Power Cord: 1.8m Unshielded, with core CE, FCC: DOC
Mouse	Manufacturer: Logitech M/N: M-U0026 P/N: 810-002182 CE, FCC: DOC
USB Flash Disk	: Manufacturer: Sony M/N: USB 8GB

1.6 Test Facility and Location

Listed by FCC, July 03, 2014
The Certificate Registration Number is 665078.
Listed by Industry Canada, June 18, 2014
The Certificate Registration Number is 9743A.

Dongguan NTC Co., Ltd.
(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China
(Full Name: Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207 (a)	AC Power Conducted Emission	Compliance
§15.247(b)(3)	Max. Conducted Output Power	Compliance
§15.247(a)(2)	6dB Bandwidth	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	Compliance
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	Compliance
§15.203	Antenna Requirement	Compliance

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode. The Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested. But only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

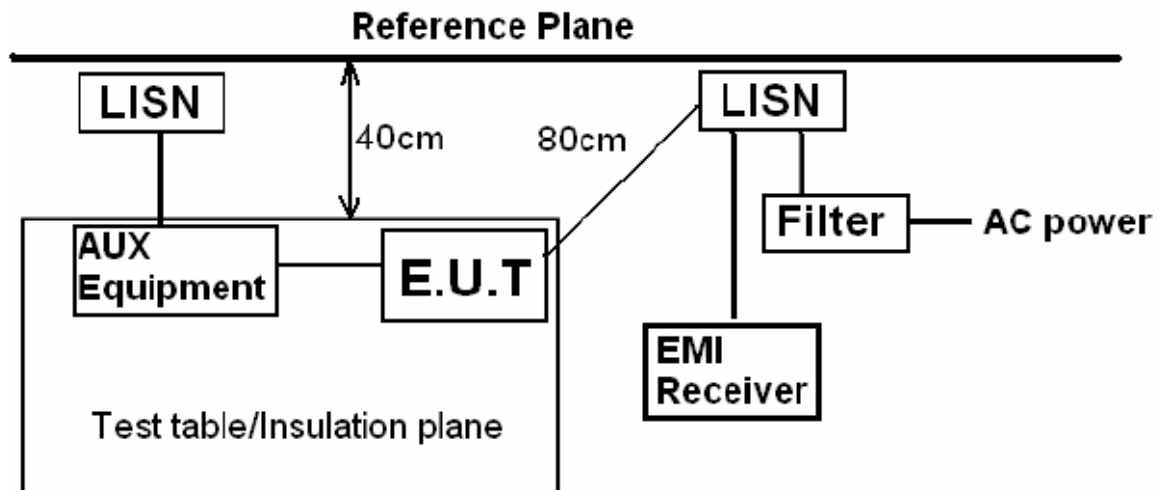

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: WIFI Mode

3.3 Measurement Results


Please refer to following plots of the worst case: 802.11b Lowest channel.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2016-8-18 18:07:32

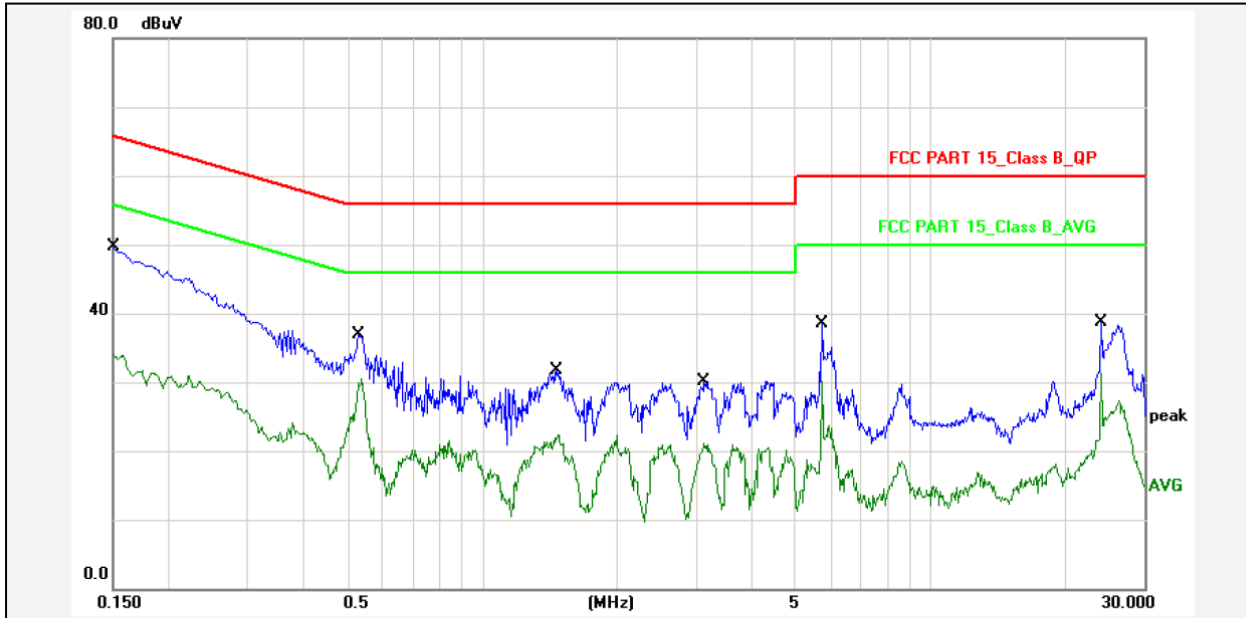

Report No.: TFD-43-CA

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Tvmining(overseas) Holding Limited

Temp.()/Hum.(%): 22(C) / 52 %

Product: Android OTT Box

Power Rating: AC 120V/60Hz


Model No.: TFD-43-CA

Test Engineer: Jerry

Test Mode: WIFI Mode

Remark: 802.11b lowest channel

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	37.00	47.80	65.99	-18.19	QP	P	
2	0.1500	10.80	21.30	32.10	55.99	-23.89	AVG	P	
3	0.5299	10.80	24.10	34.90	56.00	-21.10	QP	P	
4	0.5299	10.80	17.70	28.50	46.00	-17.50	AVG	P	
5	1.4657	10.80	18.90	29.70	56.00	-26.30	QP	P	
6	1.4657	10.80	9.60	20.40	46.00	-25.60	AVG	P	
7	3.1380	10.80	17.30	28.10	56.00	-27.90	QP	P	
8	3.1380	10.80	8.30	19.10	46.00	-26.90	AVG	P	
9	5.7419	10.80	25.70	36.50	60.00	-23.50	QP	P	
10	5.7419	10.80	17.40	28.20	50.00	-21.80	AVG	P	
11	24.0380	10.80	25.80	36.60	60.00	-23.40	QP	P	
12	24.0380	10.80	18.40	29.20	50.00	-20.80	AVG	P	

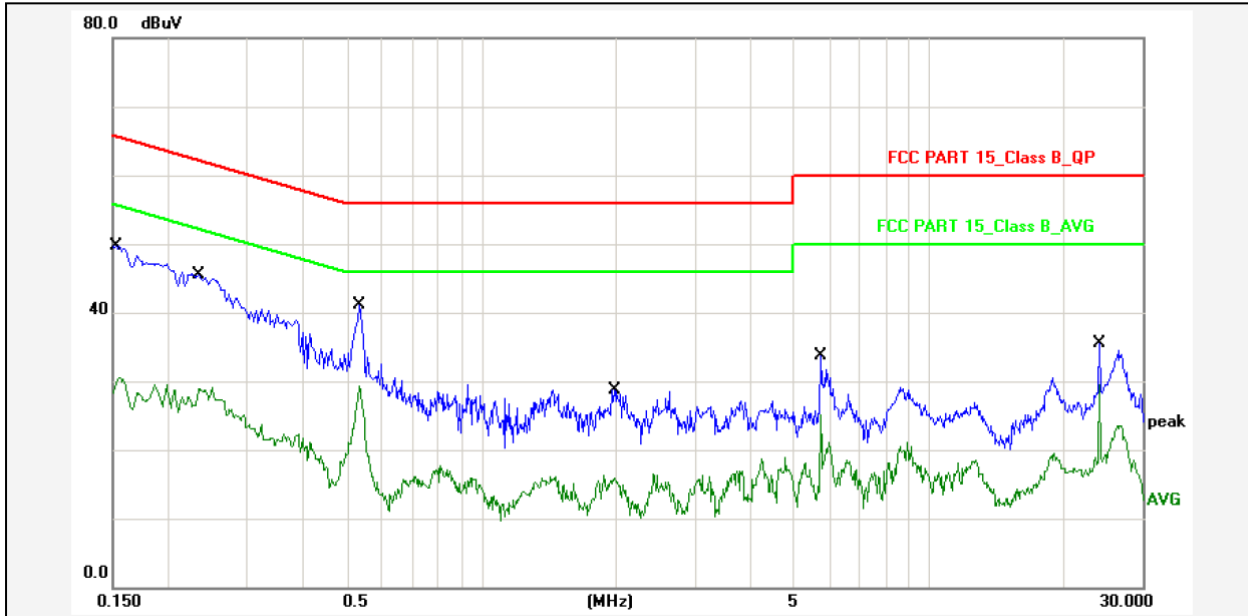

Report No.: TFD-43-CA

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: N

Applicant: Tvmining(overseas) Holding Limited

Temp.()/Hum.(%): 22(C) / 52 %

Product: Android OTT Box

Power Rating: AC 120V/60Hz

Model No.: TFD-43-CA

Test Engineer: Jerry

Test Mode: WIFI Mode

Remark: 802.11b lowest channel

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1524	10.80	35.90	46.70	65.86	-19.16	QP	P	
2	0.1524	10.80	17.70	28.50	55.86	-27.36	AVG	P	
3	0.2340	10.80	32.60	43.40	62.30	-18.90	QP	P	
4	0.2340	10.80	16.10	26.90	52.30	-25.40	AVG	P	
5	0.5340	10.80	28.30	39.10	56.00	-16.90	QP	P	
6	0.5340	10.80	16.50	27.30	46.00	-18.70	AVG	P	
7	1.9820	10.80	15.90	26.70	56.00	-29.30	QP	P	
8	1.9820	10.80	3.70	14.50	46.00	-31.50	AVG	P	
9	5.7419	10.80	20.90	31.70	60.00	-28.30	QP	P	
10	5.7419	10.80	12.30	23.10	50.00	-26.90	AVG	P	
11	24.0380	10.80	22.60	33.40	60.00	-26.60	QP	P	
12	24.0380	10.80	16.70	27.50	50.00	-22.50	AVG	P	

4. Max. Conducted Output Power

4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

$RBW \geq DTS \text{ bandwidth}$

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the $RBW \geq DTS \text{ bandwidth}$;
2. Set $VBW \geq 3 * RBW$;
3. Set $span \geq 3 * RBW$;
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold;
7. Allow trace to fully stabilize;
8. Use peak marker function to determine the peak amplitude level.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Results

Pass

Please refer to following table and plots.

Temperature :	24 °C	Humidity :	50%
Test By:	Sance	Test Date :	August 25, 2016
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	Peak Output Power dBm	Limit dBm
IEEE 802.11b Mode (CCK, Antenna Gain=2dBi)			
Low Channel: 2412	1	7.81	30
Middle Channel: 2437	1	7.13	30
High Channel: 2462	1	6.13	30
IEEE 802.11g Mode (OFDM, Antenna Gain=2dBi)			
Low Channel: 2412	6	6.61	30
Middle Channel: 2437	6	5.87	30
High Channel: 2462	6	4.86	30
IEEE 802.11n(HT20) Mode (OFDM, Antenna Gain=2dBi)			
Low Channel: 2412	6.5	6.31	30
Middle Channel: 2437	6.5	5.81	30
High Channel: 2462	6.5	4.71	30

5. 6dB Bandwidth

5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v03r03):

1. For 6dB bandwidth, Set the RBW = 100KHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Pass

Please refer to following table and plots.


Temperature :	24 °C	Humidity :	50 %
Test By:	Sance	Test Date :	August 25, 2016
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	8.56	>500KHz
Middle Channel: 2437	1	8.08	>500KHz
High Channel: 2462	1	8.03	>500KHz
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	15.43	>500KHz
Middle Channel: 2437	6	15.43	>500KHz
High Channel: 2462	6	15.48	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	17.12	>500KHz
Middle Channel: 2437	6.5	16.15	>500KHz
High Channel: 2462	6.5	16.35	>500KHz

6dB Bandwidth 802.11b Low Channel

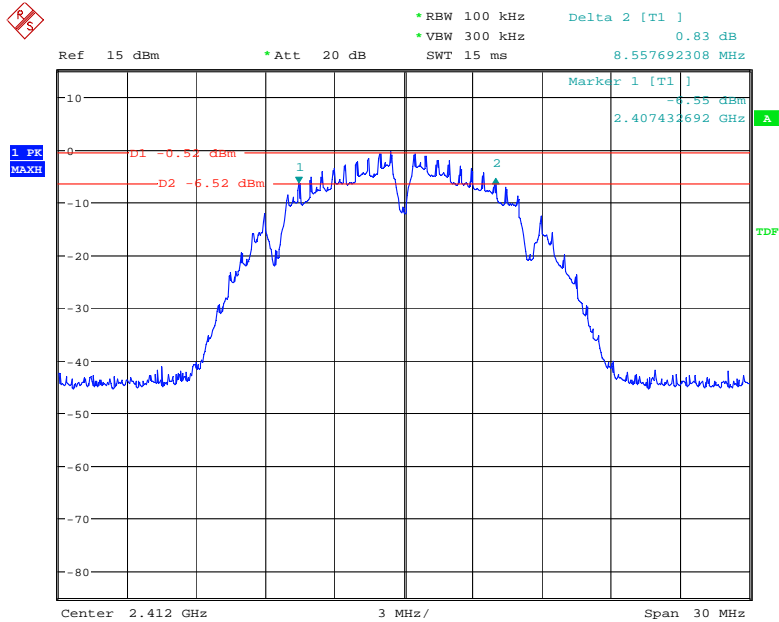


Date: 25.AUG.2016 09:55:43

802.11b Middle Channel

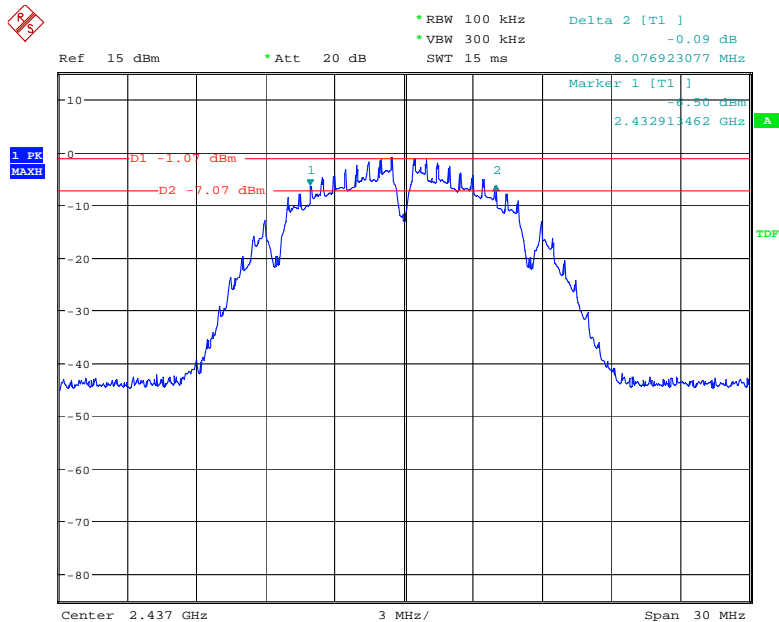

Date: 25.AUG.2016 09:57:09

802.11b High Channel

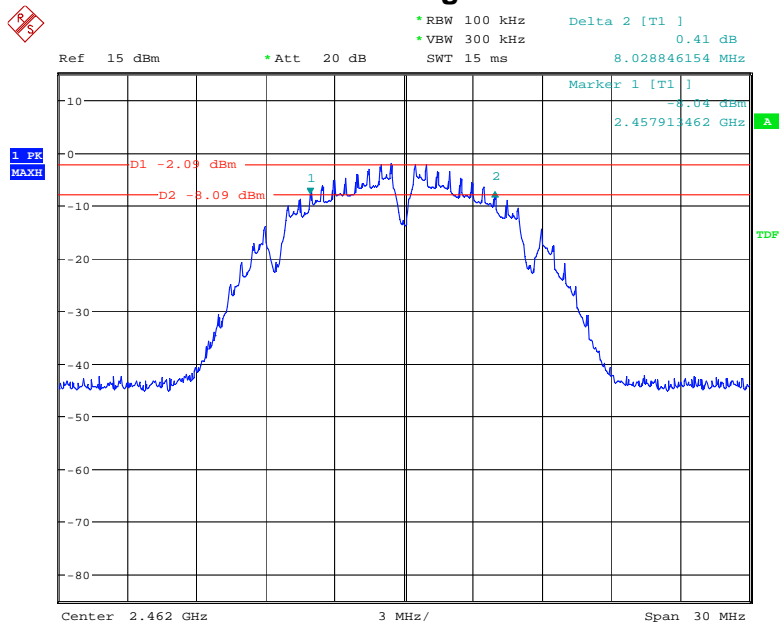


Date: 25.AUG.2016 09:58:25

802.11g Low Channel




Date: 25.AUG.2016 10:01:38

802.11g Middle Channel

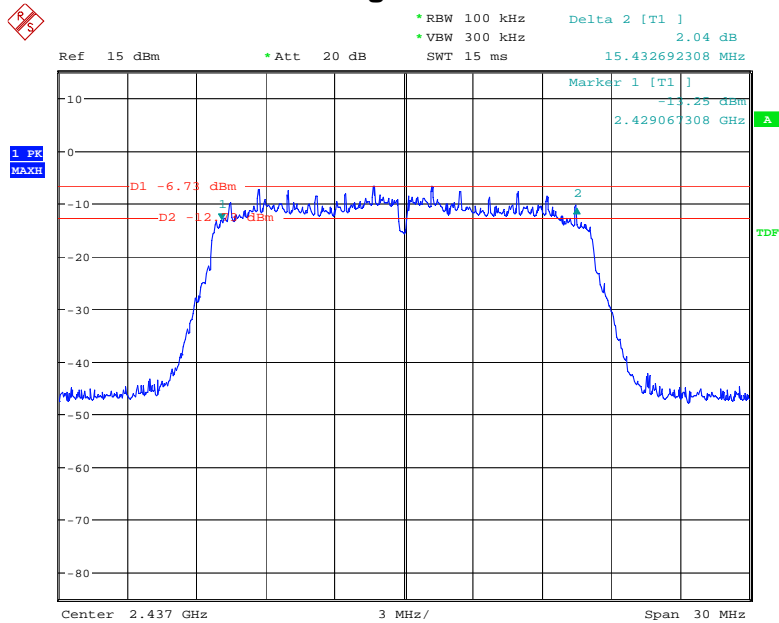


Date: 25.AUG.2016 10:03:25

802.11g High Channel

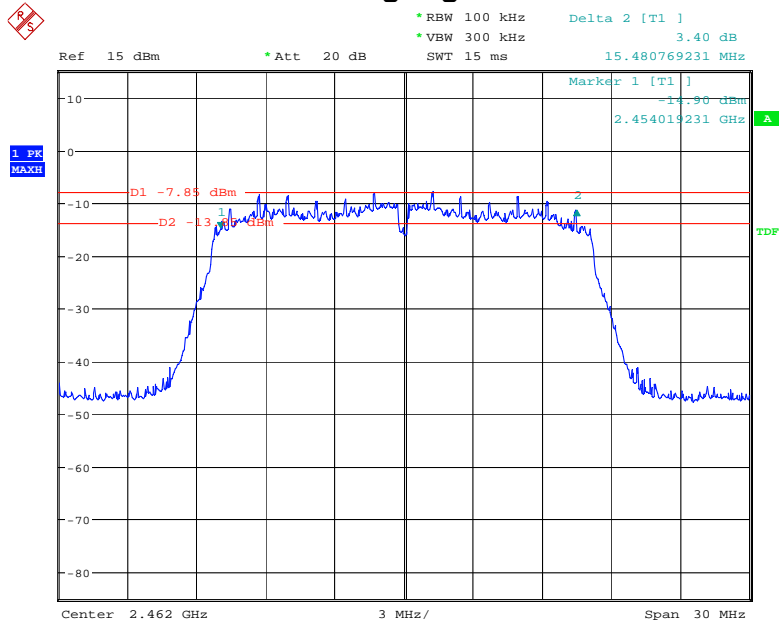


Date: 25.AUG.2016 10:05:57

802.11n(HT20) Low Channel

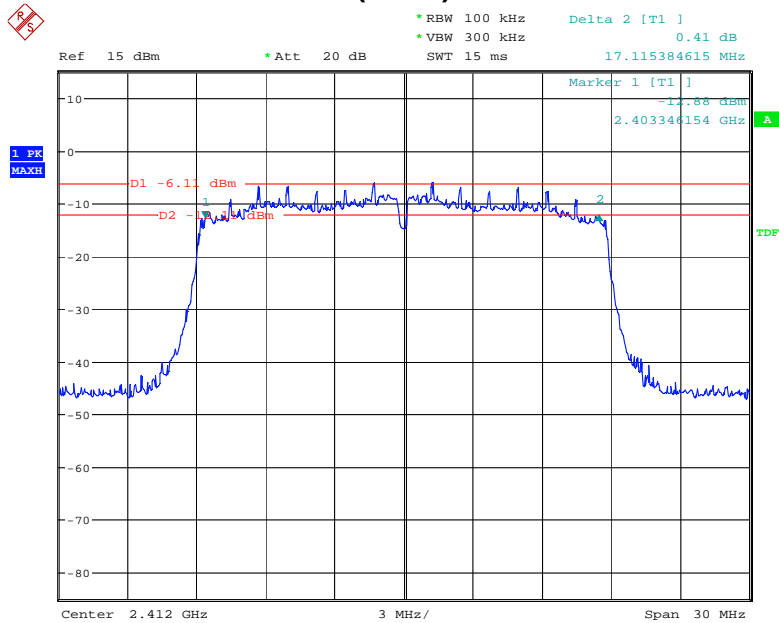


Date: 25.AUG.2016 10:10:08

802.11n(HT20) Middle Channel

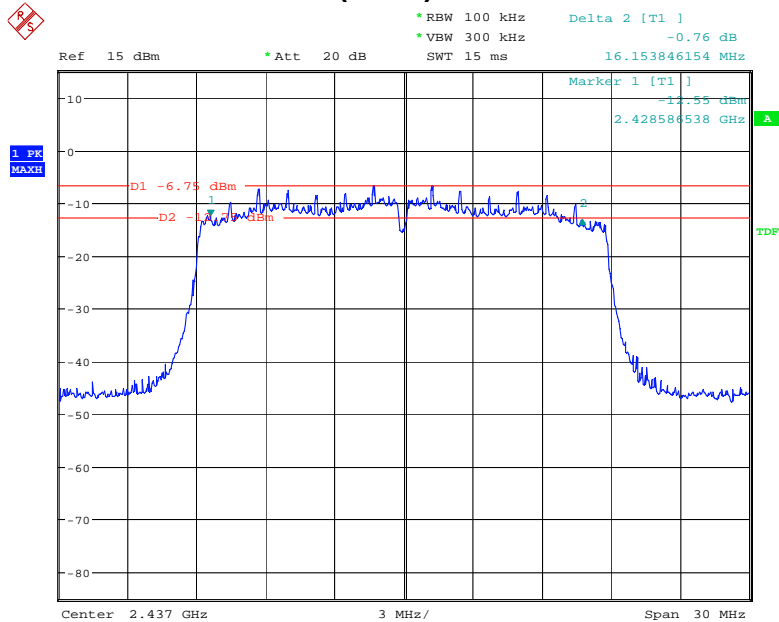

Date: 25.AUG.2016 10:13:14

802.11n(HT20) High Channel

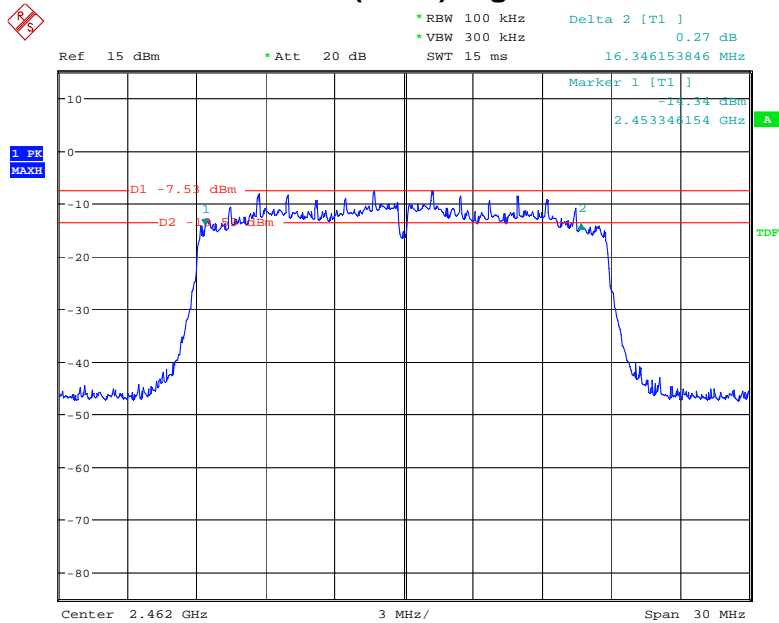

Date: 25.AUG.2016 10:16:30

6. Power Spectral Density


6.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v03r03):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ KHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Pass

Please refer to following table and plots.


Temperature :	24 °C	Humidity :	50 %
Test By:	Sance	Test Date :	August 25, 2016
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm/3kHz	Limit dBm/3kHz
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	-13.71	8
Middle Channel: 2437	1	-15.40	8
High Channel: 2462	1	-17.06	8
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	-19.46	8
Middle Channel: 2437	6	-20.42	8
High Channel: 2462	6	-21.92	8
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	-20.26	8
Middle Channel: 2437	6.5	-21.01	8
High Channel: 2462	6.5	-22.41	8

802.11b Low Channel

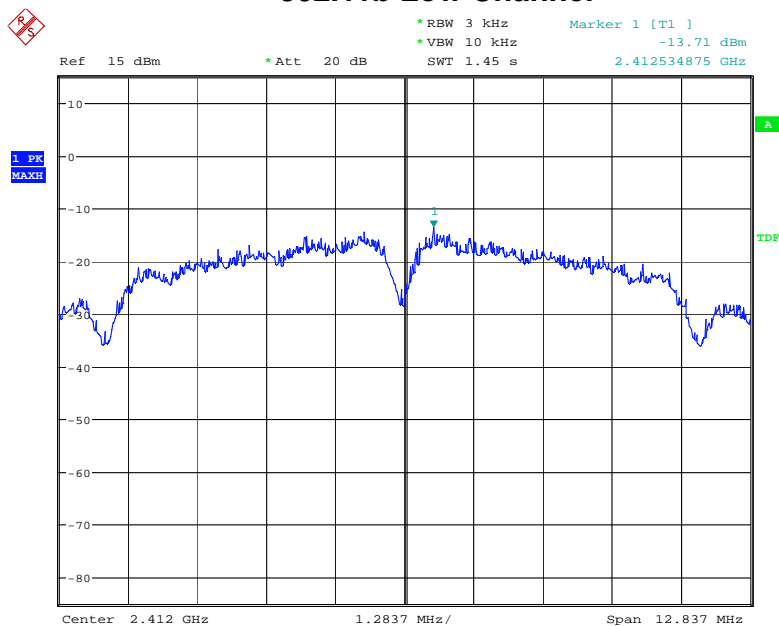


Date: 25.AUG.2016 10:22:25

802.11b Middle Channel

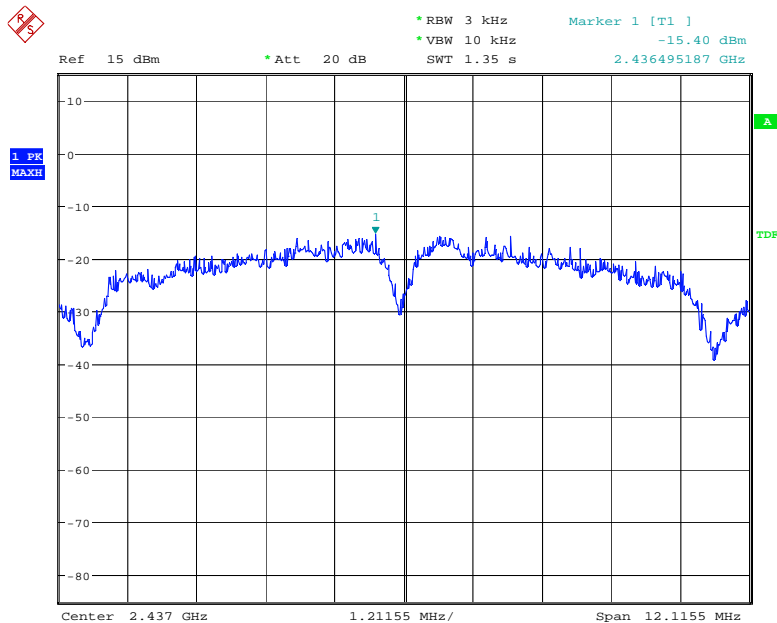


Date: 25.AUG.2016 10:23:14

802.11b High Channel

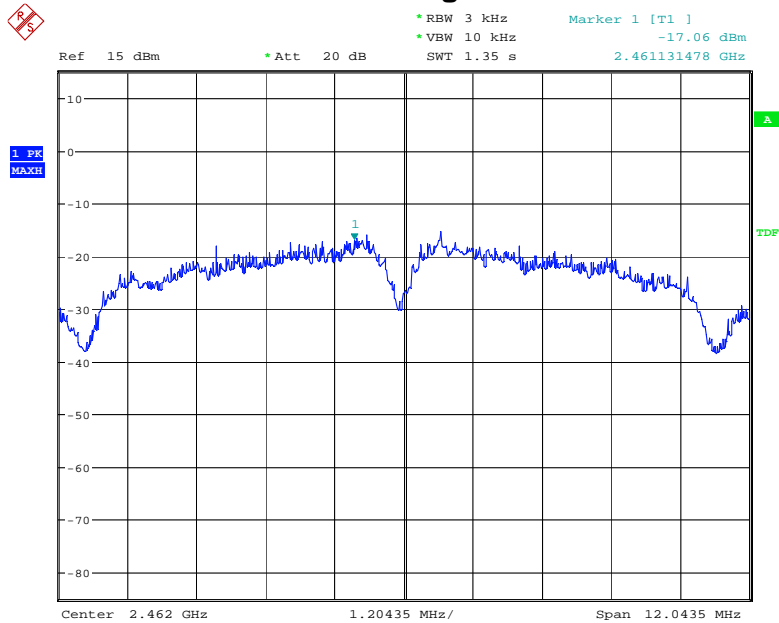


Date: 25.AUG.2016 10:23:49

802.11g Low Channel

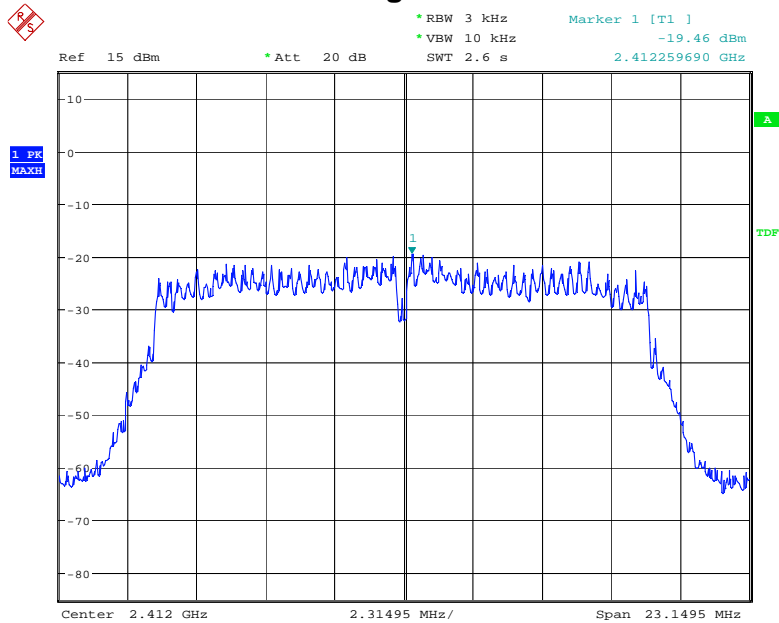


Date: 25.AUG.2016 10:24:45

802.11g Middle Channel

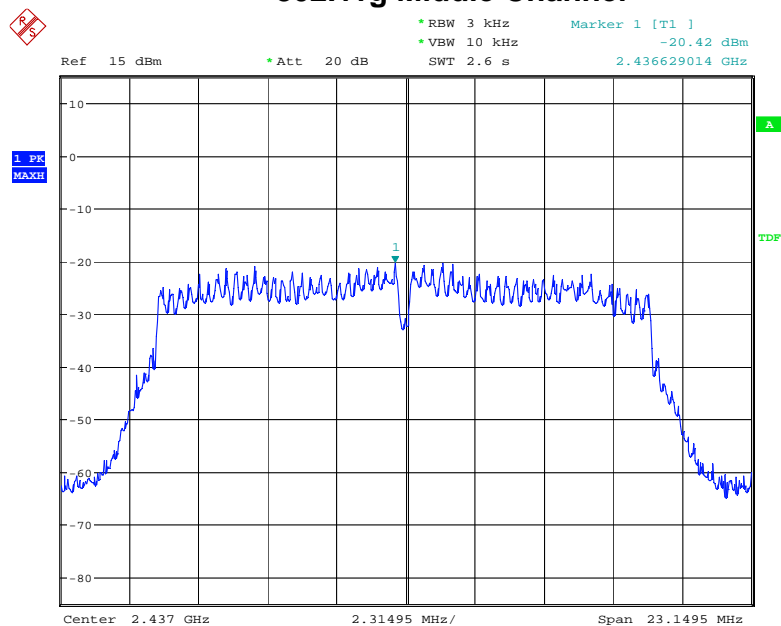


Date: 25.AUG.2016 10:25:17

802.11g High Channel

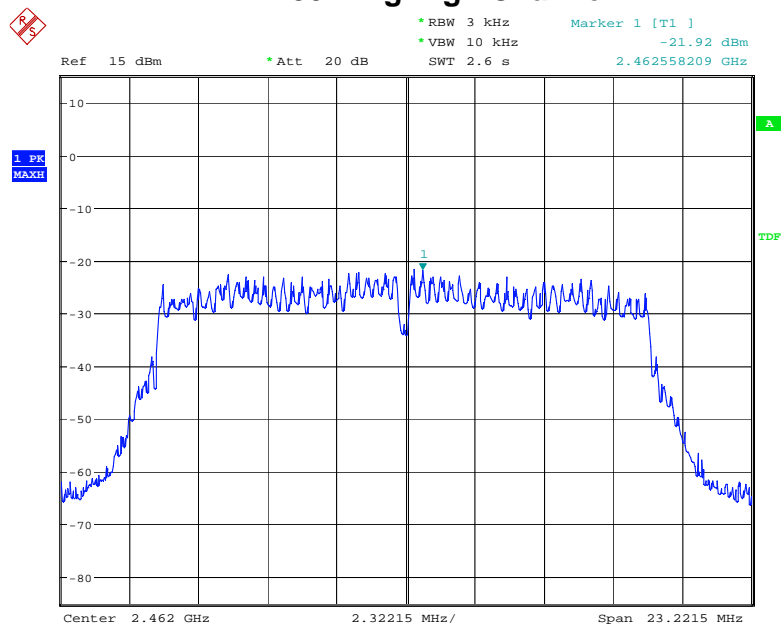


Date: 25.AUG.2016 10:25:55

802.11n(HT20) Low Channel

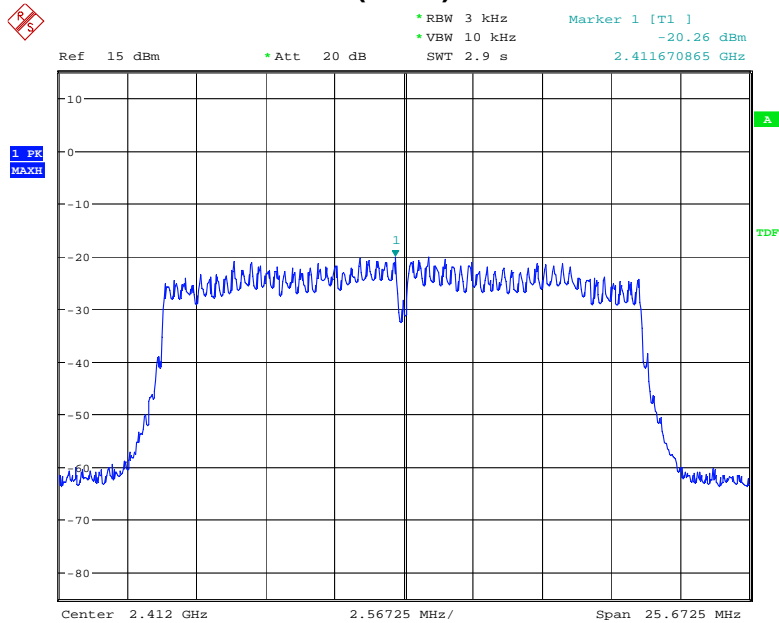


Date: 25.AUG.2016 10:27:18

802.11n(HT20) Middle Channel

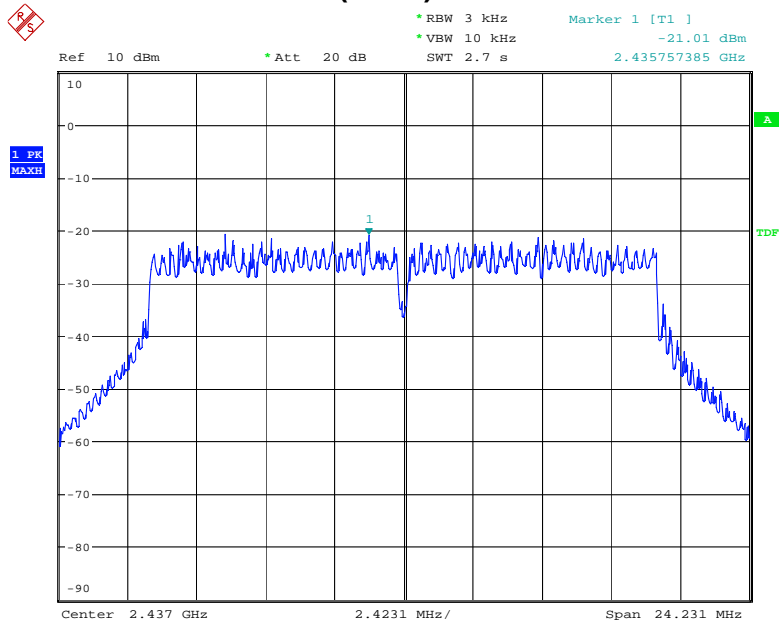

Date: 25.AUG.2016 16:19:05

802.11n(HT20) High Channel

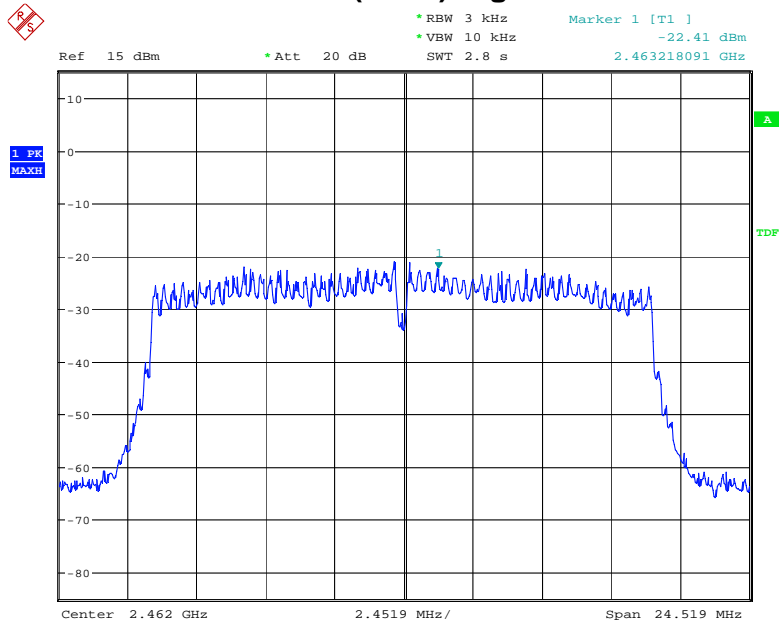

Date: 25.AUG.2016 10:29:08

7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below.

A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Results

The test plots and table showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below plots.


Spurious Emission in restricted band:

Operation Mode:	TX	Test Date :	August 23, 2016
Frequency Range:	Above 1GHz	Temperature :	24 °C
Test Result:	PASS	Humidity :	50 %
Measured Distance:	3m	Test By:	Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
The worst case: Test Mode: 802.11b										
2390.000	H	52.22	40.90	8.06	60.28	48.96	74.00	54.00	-13.72	-5.04
2390.000	V	52.07	41.54	8.06	60.13	49.60	74.00	54.00	-13.87	-4.40
2483.500	H	44.34	34.23	8.36	52.70	42.59	74.00	54.00	-21.30	-11.41
2483.500	V	47.18	37.41	8.36	55.54	45.77	74.00	54.00	-18.46	-8.23


Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : ± 3.7 dB

Band Edge 802.11b Low Channel

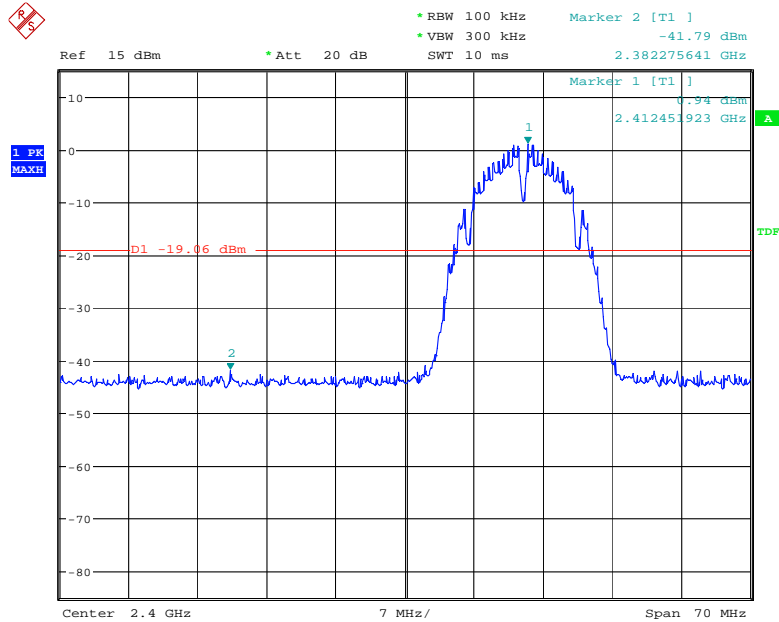


Date: 25.AUG.2016 10:31:34

802.11b High Channel

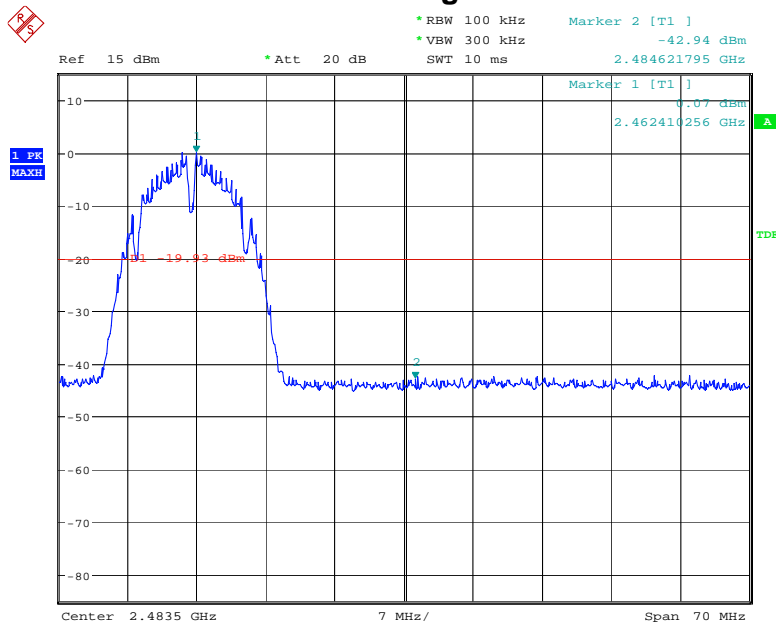


Date: 25.AUG.2016 10:32:51

802.11g Low Channel

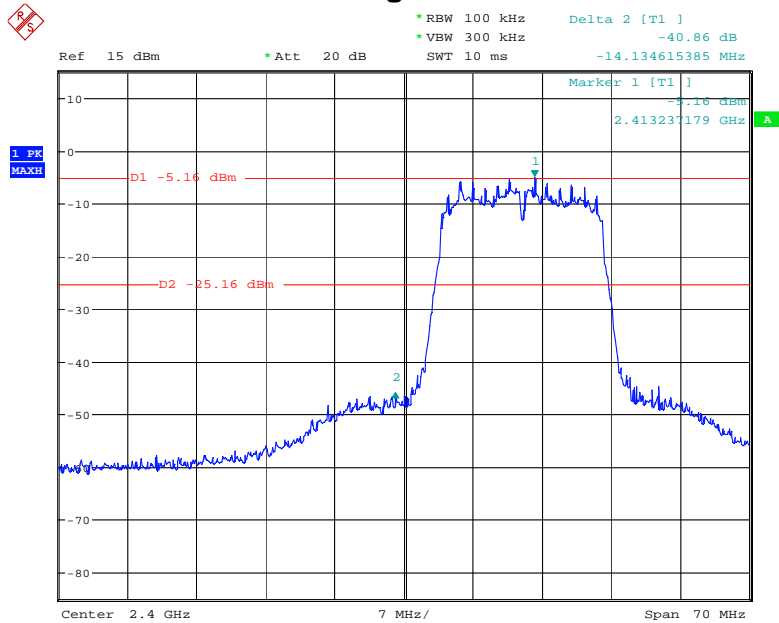


Date: 25.AUG.2016 10:36:09

802.11g High Channel

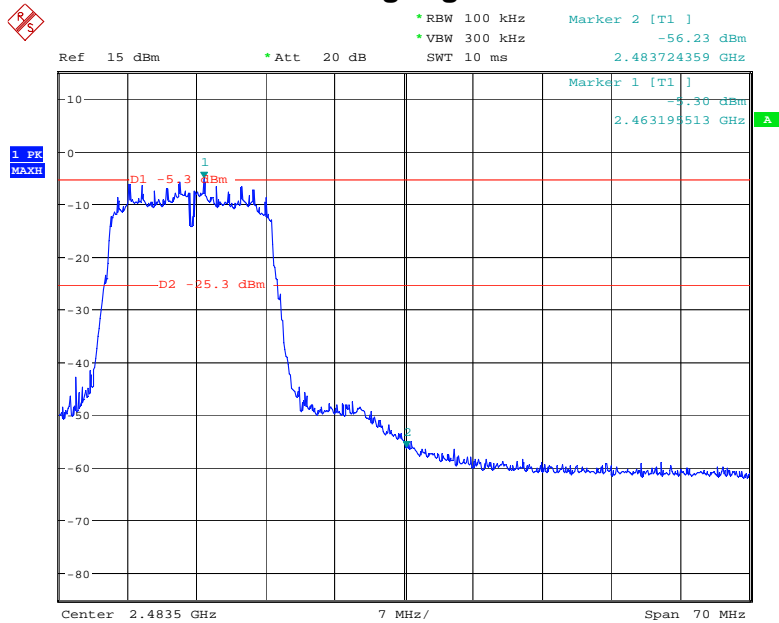


Date: 25.AUG.2016 10:36:58

802.11n(HT20) Low Channel

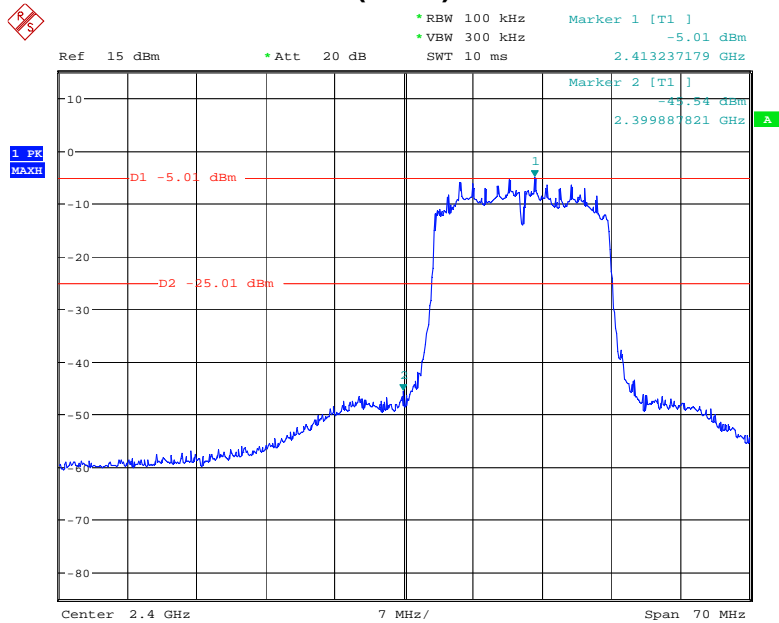

Date: 25.AUG.2016 10:40:20


802.11n(HT20) High Channel

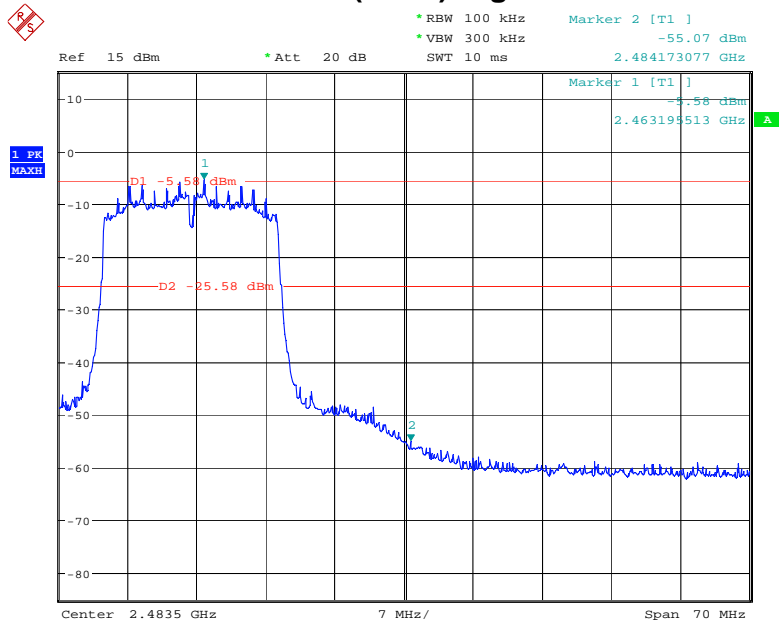

Date: 25.AUG.2016 10:42:05


Conducted Spurious Emissions

The worst case: 802.11b Low Channel

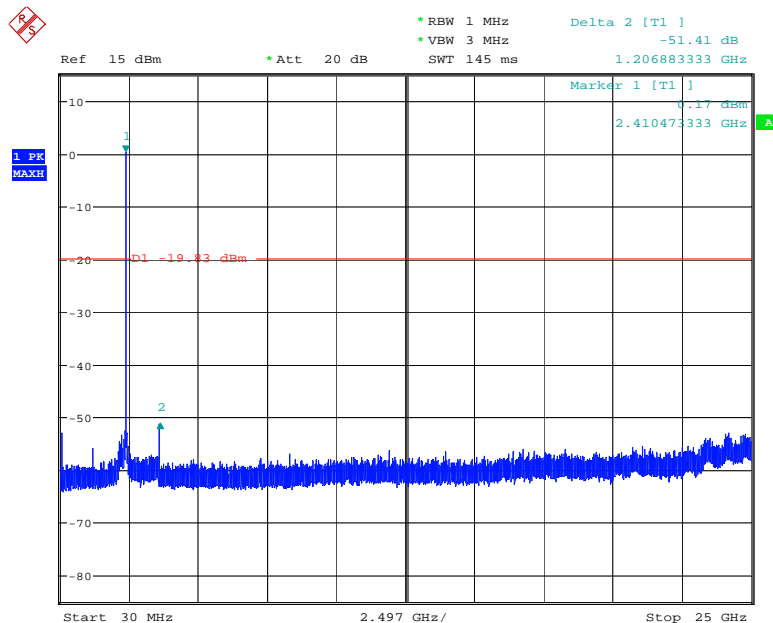


Date: 25.AUG.2016 10:45:48

Middle Channel

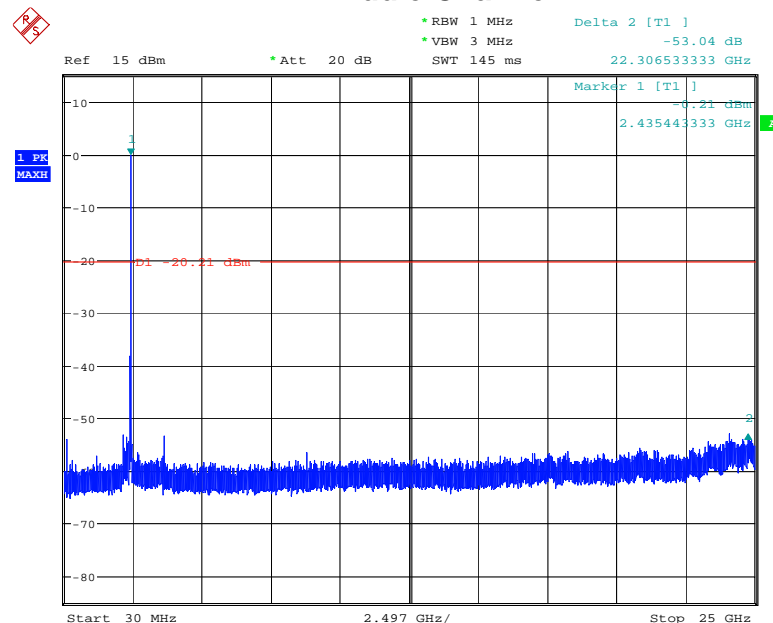

Date: 25.AUG.2016 10:47:15

High Channel

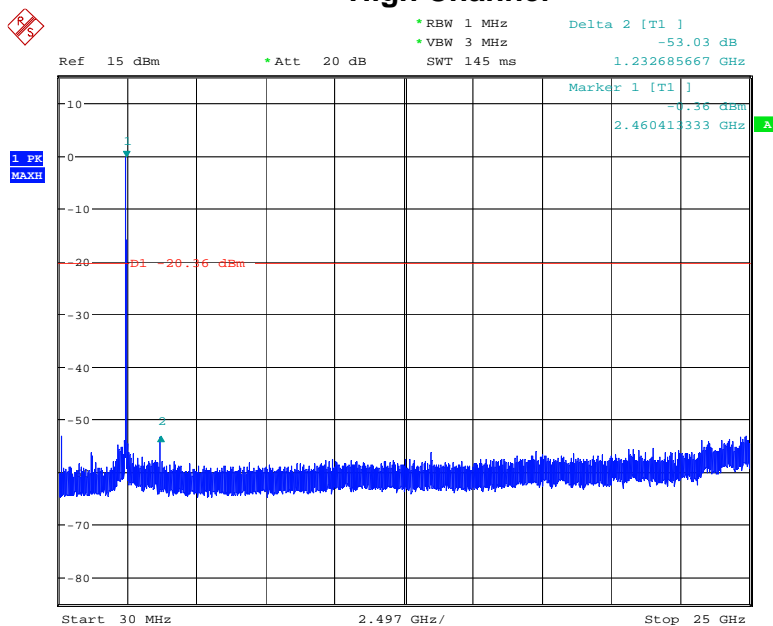


Date: 25.AUG.2016 10:48:56

Note: Sweep points=30001pts


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

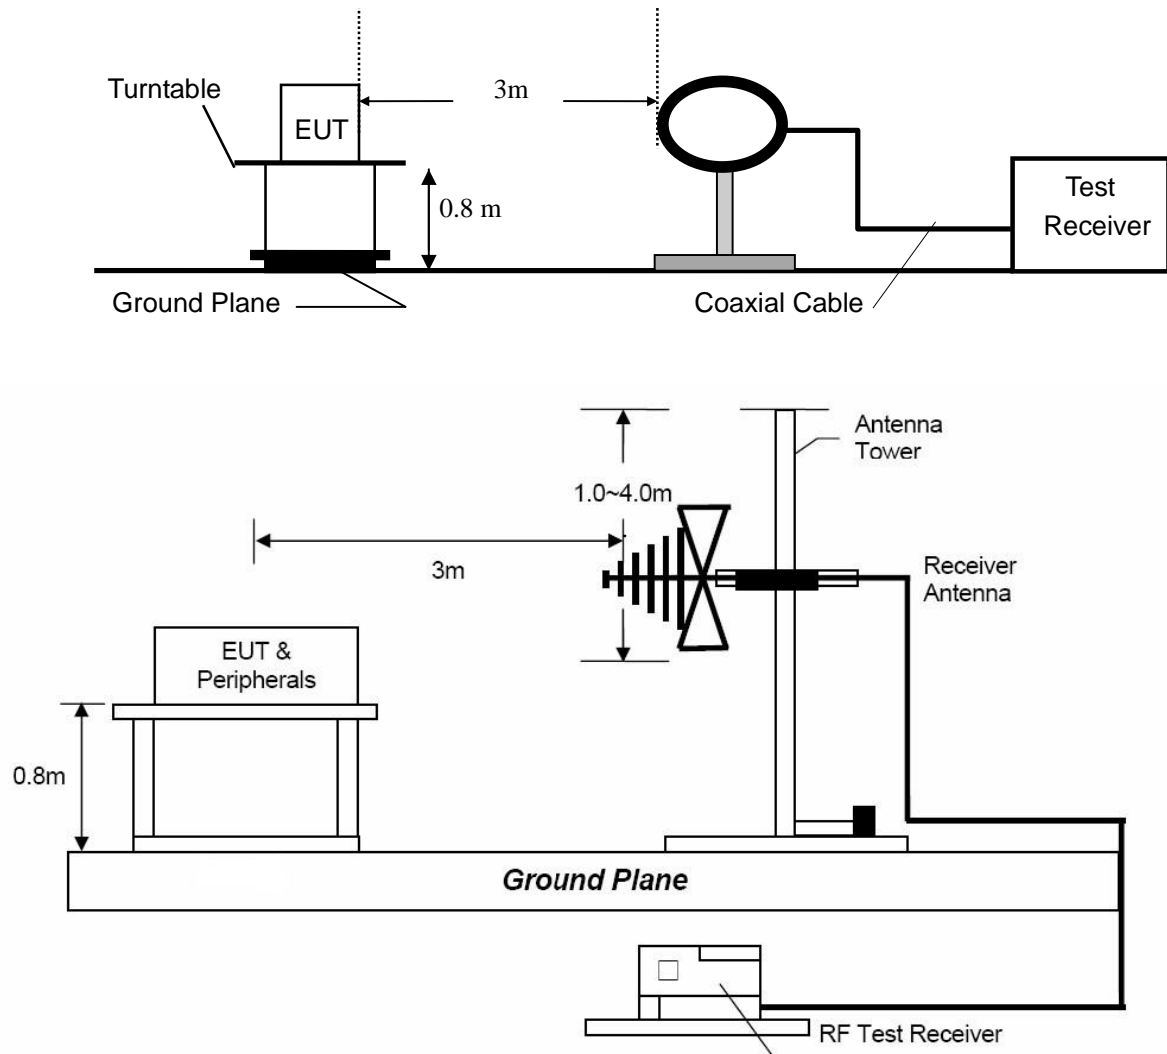

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

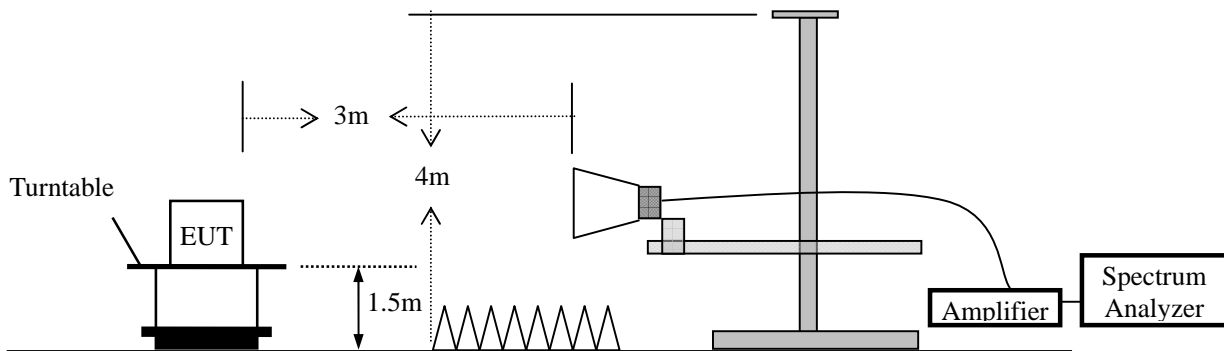

8.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level $(\text{dB})_{\mu\text{V}} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
(5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

8.4

Measurement Results


Please refer to following plots of the worst case: 802.11b lowest channel.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2016-8-23 13:42:52

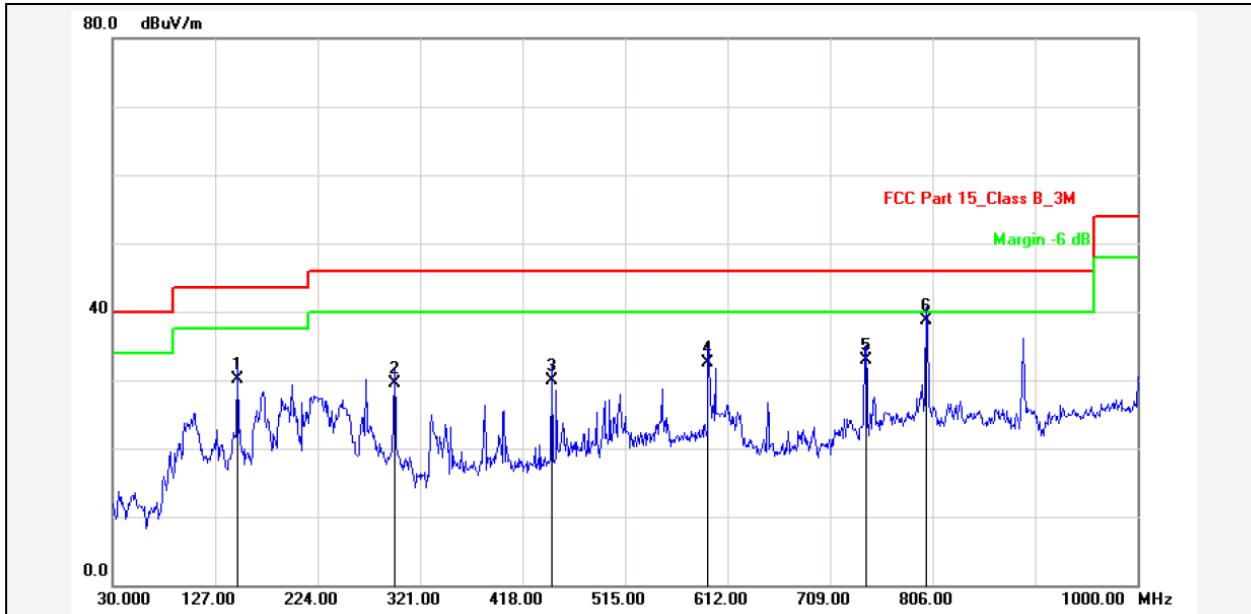

Report No.: TFD-43-CA

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: Tvmining(overseas) Holding Limited

Product: Android OTT Box

Model No.: TFD-43-CA

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: AC 120V/60Hz

Test Engineer: Chilam

Test Mode: WIFI Mode

Remark: 802.11b lowest channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	148.3400	-15.54	45.64	30.10	43.50	-13.40	QP			P	
2	296.7500	-10.56	40.06	29.50	46.00	-16.50	QP			P	
3	446.1299	-8.06	38.06	30.00	46.00	-16.00	QP			P	
4	593.5700	-5.18	37.78	32.60	46.00	-13.40	QP			P	
5	742.9500	-2.76	35.76	33.00	46.00	-13.00	QP			P	
6	800.1798	-1.95	40.65	38.70	46.00	-7.30	QP			P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2016-8-23 13:49:07

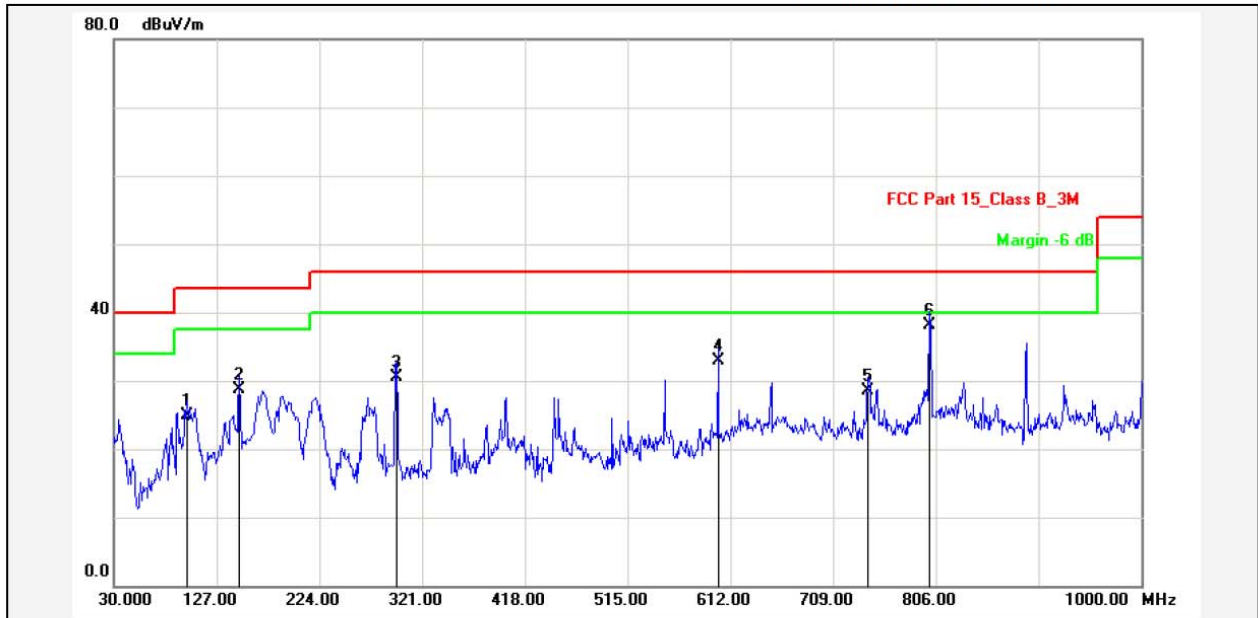

Report No.: TFD-43-CA

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: Tvmining(overseas) Holding Limited

Product: Android OTT Box

Model No.: TFD-43-CA

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: AC 120V/60Hz

Test Engineer: Chilam

Test Mode: WIFI Mode

Remark: 802.11b lowest channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	98.8700	-16.05	41.05	25.00	43.50	-18.50	QP			P	
2	148.3400	-18.54	47.24	28.70	43.50	-14.80	QP			P	
3	296.7500	-12.56	43.16	30.60	46.00	-15.40	QP			P	
4	600.3600	-7.00	40.00	33.00	46.00	-13.00	QP			P	
5	741.9800	-2.78	31.28	28.50	46.00	-17.50	QP			P	
6	800.1798	-1.95	40.05	38.10	46.00	-7.90	QP			P	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Test Mode: 802.11b (The worst case) Test Date : August 23, 2016
Frequency Range: Above 1GHz Temperature : 24°C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4824	V	45.53	35.04	14.72	60.25	49.76	74.00	54.00	-13.75	-4.24
7236	V	39.90	28.46	20.74	60.64	49.20	74.00	54.00	-13.36	-4.80
4824	H	46.16	33.78	14.72	60.88	48.50	74.00	54.00	-13.12	-5.50
7236	H	40.15	27.63	20.74	60.89	48.37	74.00	54.00	-13.11	-5.63

Operation Mode: TX Mode (Mid)										
4874	V	45.64	33.77	14.93	60.57	48.70	74.00	54.00	-13.43	-5.30
7311	V	40.80	28.72	20.88	61.68	49.60	74.00	54.00	-12.32	-4.40
4874	H	45.67	34.93	14.93	60.60	49.86	74.00	54.00	-13.40	-4.14
7311	H	40.48	28.91	20.88	61.36	49.79	74.00	54.00	-12.64	-4.21

Operation Mode: TX Mode (High)										
4924	V	45.51	33.20	15.15	60.66	48.35	74.00	54.00	-13.34	-5.65
7386	V	38.04	28.17	21.04	59.08	49.21	74.00	54.00	-14.92	-4.79
4924	H	44.18	32.36	15.15	59.33	47.51	74.00	54.00	-14.67	-6.49
7386	H	38.98	27.19	21.04	60.02	48.23	74.00	54.00	-13.98	-5.77

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ± 3.7 dB.
 - (6) Horn antenna used for the emission over 1000MHz.

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is FPC antenna that no antenna other than that furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 2.0 dBi, So, the antenna is consider meet the requirement.

10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 23, 2015	Nov. 22, 2016
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 26, 2015	Nov. 25, 2016
Positioning Controller	UC	UC 3000	N/A	0~360° , 1-4m	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 07, 2015	Nov. 06, 2016
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 07, 2015	Nov. 06, 2016
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 06, 2016	Mar. 05, 2017
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 07, 2015	Nov. 06, 2016
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.23, 2015	Oct.22, 2016
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 05, 2015	Nov. 04, 2016
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.10, 2015	Oct.09, 2016
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Sep. 01, 2015	Aug. 31, 2016
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 03, 2015	Nov. 02, 2016
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 07, 2015	Nov. 06, 2016
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 05, 2015	Nov. 04, 2016
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 05, 2015	Nov. 04, 2016

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---