

FCC TEST REPORT  
for  
Haven Technologies, Inc  
Bluetooth Noise-Isolating Earbuds  
Model Number: IT-01  
FCC ID: 2AJRDIT-01

Prepared for : Haven Technologies, Inc  
Address : 1025 Pine Hill Way, Carmel, Indiana 46021 USA

Prepared by : Keyway Testing Technology Co., Ltd.  
Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China



Tel: 86-769-8718 2258  
Fax: 86-769-8718 1058

Report No. : 16KWE094302F  
Date of Test : Aug.16~Sep.02, 2016  
Date of Report : Sep.05, 2016

## TABLE OF CONTENTS

	Page
<b>Test Report Declaration</b>	<b>Page</b>
<b>1. TEST SUMMARY .....</b>	<b>4</b>
<b>2. GENERAL PRODUCT INFORMATION .....</b>	<b>5</b>
2.1. Product Function.....	5
2.2. Description of Device (EUT) .....	5
2.3. Independent Operation Modes.....	6
2.4. TEST SITES.....	6
2.5. List of Test and Measurement Instruments.....	7
<b>3. TEST SET-UP AND OPERATION MODES.....</b>	<b>8</b>
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software.....	8
3.4. Special Accessories and Auxiliary Equipment.....	8
3.5. Countermeasures to Achieve EMC Compliance .....	8
<b>4. EMISSION TEST RESULTS.....</b>	<b>9</b>
4.1. Conducted Emission at the Mains Terminals Test.....	9
4.2. Radiated Emission Test.....	14
<b>5. BAND EDGE COMPLIANCE TEST.....</b>	<b>26</b>
5.1. Limits .....	26
5.2. Test setup .....	26
5.3. TEST Procedure .....	27
<b>6. 6DB OCCUPY BANDWIDTH .....</b>	<b>30</b>
6.1. Limits .....	30
6.2. TEST PROCEDURE .....	30
<b>7. OUTPUT POWER TEST .....</b>	<b>33</b>
7.1. Limits .....	33
7.2. Test setup .....	33
7.3. Test result .....	33
<b>8. POWER SPECTRAL DENSITY TEST.....</b>	<b>34</b>
8.1. Limits .....	34
8.2. Test setup .....	34
8.3. Test result .....	34
<b>9. ANTENNA REQUIREMENTS .....</b>	<b>36</b>
9.1. Limits .....	36
9.2. Result .....	36
<b>10.PHOTOGRAPHS OF TEST SET-UP .....</b>	<b>37</b>
<b>11. PHOTOGRAPHS OF THE EUT .....</b>	<b>39</b>

# Keyway Testing Technology Co., Ltd.

<b>Applicant:</b>	Haven Technologies, Inc 1025 Pine Hill Way,Carmel, Indiana 46021 USA		
<b>Manufacturer:</b>	ASKA Electronics Co.,Ltd 3F,building 19#, Da Ling Bian Road,Shahu Community,Tangxia Town,Dongguan, Guangdong, China		
<b>E.U.T:</b>	Bluetooth Noise-Isolating Earbuds		
<b>Model Number:</b>	IT-01		
<b>Trade Name:</b>	ISOtunes PRO	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Aug.16, 2016	<b>Date of Test:</b>	Aug. 16~Sep.02, 2016
<b>Test Specification:</b>	FCC Part 15, Subpart C Section 15.247: 2015 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r05		
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.		
<b>Issue Date: Sep. 05, 2016</b>			
Tested by:	Reviewed by:	Approved by:	
		 Andy Gao / Supervisor	
Keven Wu / Engineer	Mike Xu / Supervisor		
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed      fail/F=failed      n.a/N=not applicable      E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

## 1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
6dB&99% Bandwidth	15.247(a)(2)	PASS
Power density	15.247(e)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

## 2.GENERAL PRODUCT INFORMATION

### 2.1. Product Function

Refer to Technical Construction Form and User Manual.

### 2.2. Description of Device (EUT)

Product Name:	Bluetooth Noise-Isolating Earbuds
Model No.:	IT-01
Operation Frequency:	BT: 2402MHz~2480MHz
Channel numbers:	BT: 40 Channels
Modulation technology:	BT: GFSK
Antenna Type:	Helical antenna
Antenna gain:	1.0dBi
Power supply:	DC 3.7V from battery

## 2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work BT mode, and Test Mode as below:

Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Link Mode

Remark: According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”

## 2.4. TEST SITES

### 2.4.1. Test Facilities

Lab Qualifications : Certificated by Industry Canada  
 Registration No.: 9868A  
 Date of registration: December 8, 2011

Certificated by FCC, USA  
 Registration No.: 370994  
 Date of registration: February 21, 2012

Certificated by CNAS China  
 Registration No.: CNAS L5783  
 Date of registration: August 8, 2012

## 2.5. List of Test and Measurement Instruments

### 2.5.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,16	Apr. 27,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,16	Apr. 27,17
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,16	Apr. 27,17
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,16	Apr. 27,17

### 2.5.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,16	Apr. 27,17
System Simulator	Agilent	E5515C	GB43130245	Apr. 27,16	Apr. 27,17
Power Splitter	Weinschel	1506A	NW425	Apr. 27,16	Apr. 27,17
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,16	Apr. 27,17
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,16	Apr. 27,17
Spectrum Analyzer	R&S	FSV40	132.1.3008K39-100967	Apr. 27,16	Apr. 27,17
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 27,16	Apr. 27,17
Signal Amplifier	SONOMA	310	187016	Apr. 27,16	Apr. 27,17
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,16	Apr. 27,17
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 27,16	Apr. 27,17
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,16	Apr. 27,17
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,16	Apr. 27,17
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 27,16	Apr. 27,17
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,16	Apr. 27,17
High Pass filter	Micro	HPM50111	324216	Apr. 27,16	Apr. 27,17
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 27,16	Apr. 27,17
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 27,16	Apr. 27,17
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 27,16	Apr. 27,17
DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,16	Apr. 27,17
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,16	Apr. 27,17
Splitter	Agilent	11636B	0025164	Apr. 27,16	Apr. 27,17
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 22,16	Apr. 22,17
Power Meter	Anritsu	ML2495A	1204003	Apr. 24,16	Apr. 24,17
Power Sensor	Anritsu	MA2411B	1126150	Apr. 24,16	Apr. 24,17


### 3. TEST SET-UP AND OPERATION MODES

#### 3.1. Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

#### 3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



#### 3.3. Test Operation Mode and Test Software

None.

#### 3.4. Special Accessories and Auxiliary Equipment

Adapter:	Manufacturer:Cenique Infotainment Group Limited I/P:AC 100~240V 50/60Hz 0.15A O/P:DC 5V 1A DC Line:Unshielded,detachable 1.2m
----------	--

#### 3.5. Countermeasures to Achieve EMC Compliance

N/A.

## 4. EMISSION TEST RESULTS

### 4.1. Conducted Emission at the Mains Terminals Test

#### 4.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### 4.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

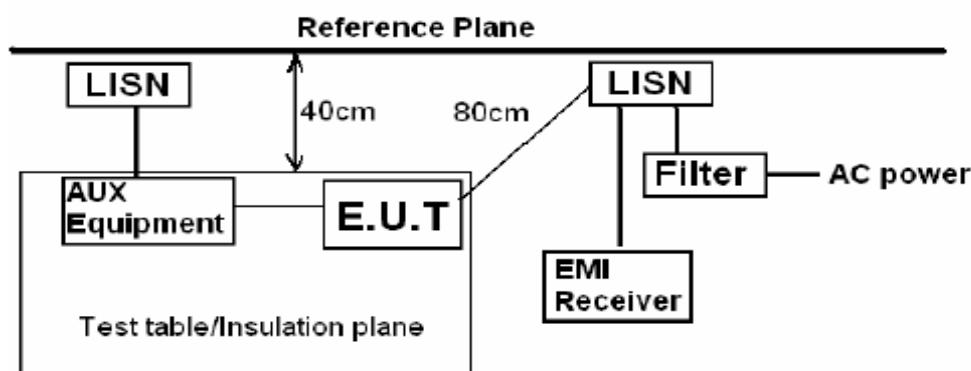


Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m


EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

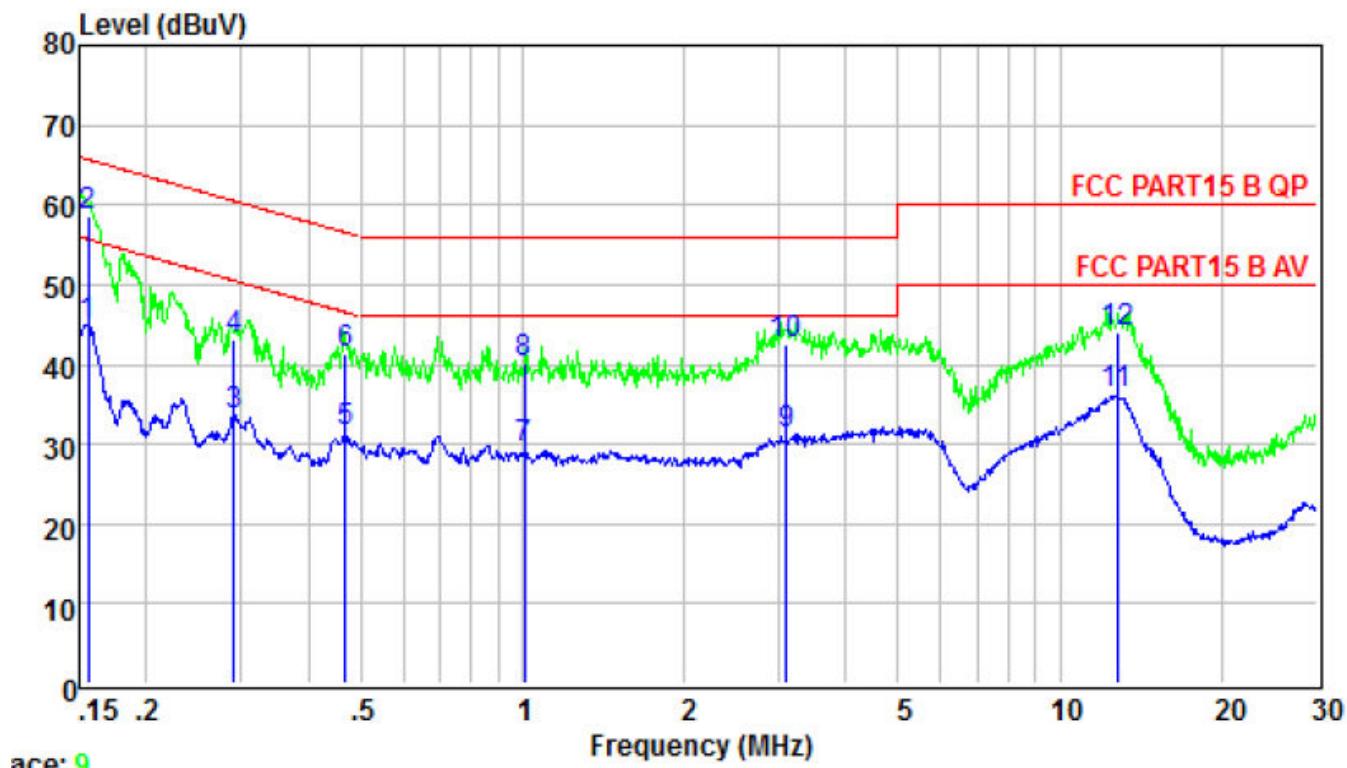

Freq	Level	Limit	Over
MHz	dBuV	dBuV	dB


	Freq	Level	Line	Limit	Over
	MHz	dBuV	dBuV	dB	
1	0.156	45.04	55.69	-10.65	Average
2	0.156	58.63	65.69	-7.06	QP
3	0.291	33.62	50.50	-16.88	Average
4	0.291	43.11	60.50	-17.39	QP
5	0.469	31.62	46.54	-14.92	Average
6	0.469	41.25	56.54	-15.29	QP
7	1.010	29.36	46.00	-16.64	Average
8	1.010	40.06	56.00	-15.94	QP
9	3.090	31.21	46.00	-14.79	Average
10	3.090	42.58	56.00	-13.42	QP
11	12.784	36.23	50.00	-13.77	Average
12	12.784	44.16	60.00	-15.84	QP

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

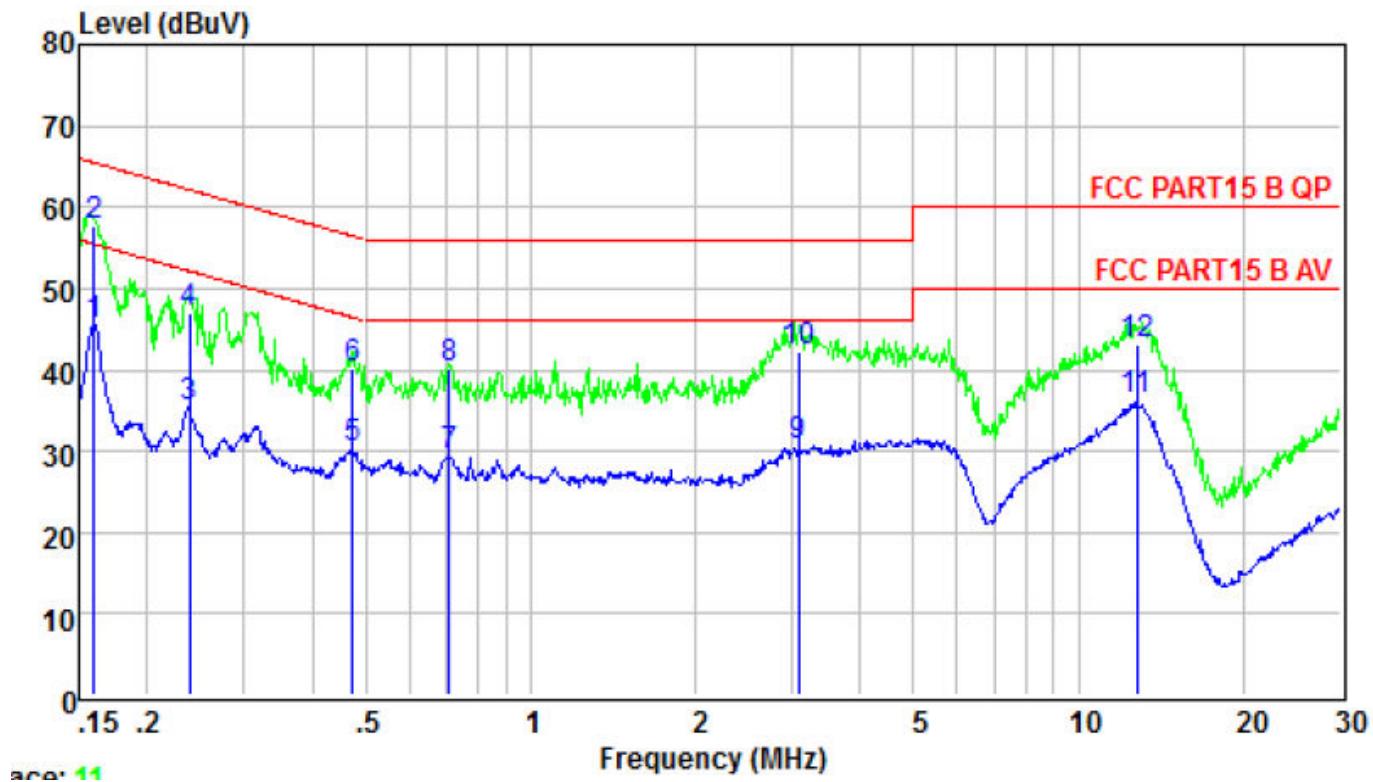


Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
MHz	dBuV	dBuV	dB		
1	0.160	45.56	55.47	-9.91	Average
2	0.160	57.63	65.47	-7.84	QP
3	0.239	35.48	52.13	-16.65	Average
4	0.239	46.96	62.13	-15.17	QP
5	0.474	30.48	46.45	-15.97	Average
6	0.474	40.03	56.45	-16.42	QP
7	0.712	29.59	46.00	-16.41	Average
8	0.712	40.01	56.00	-15.99	QP
9	3.074	30.56	46.00	-15.44	Average
10	3.074	42.15	56.00	-13.85	QP
11	12.784	36.16	50.00	-13.84	Average
12	12.784	43.25	60.00	-16.75	QP

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 4

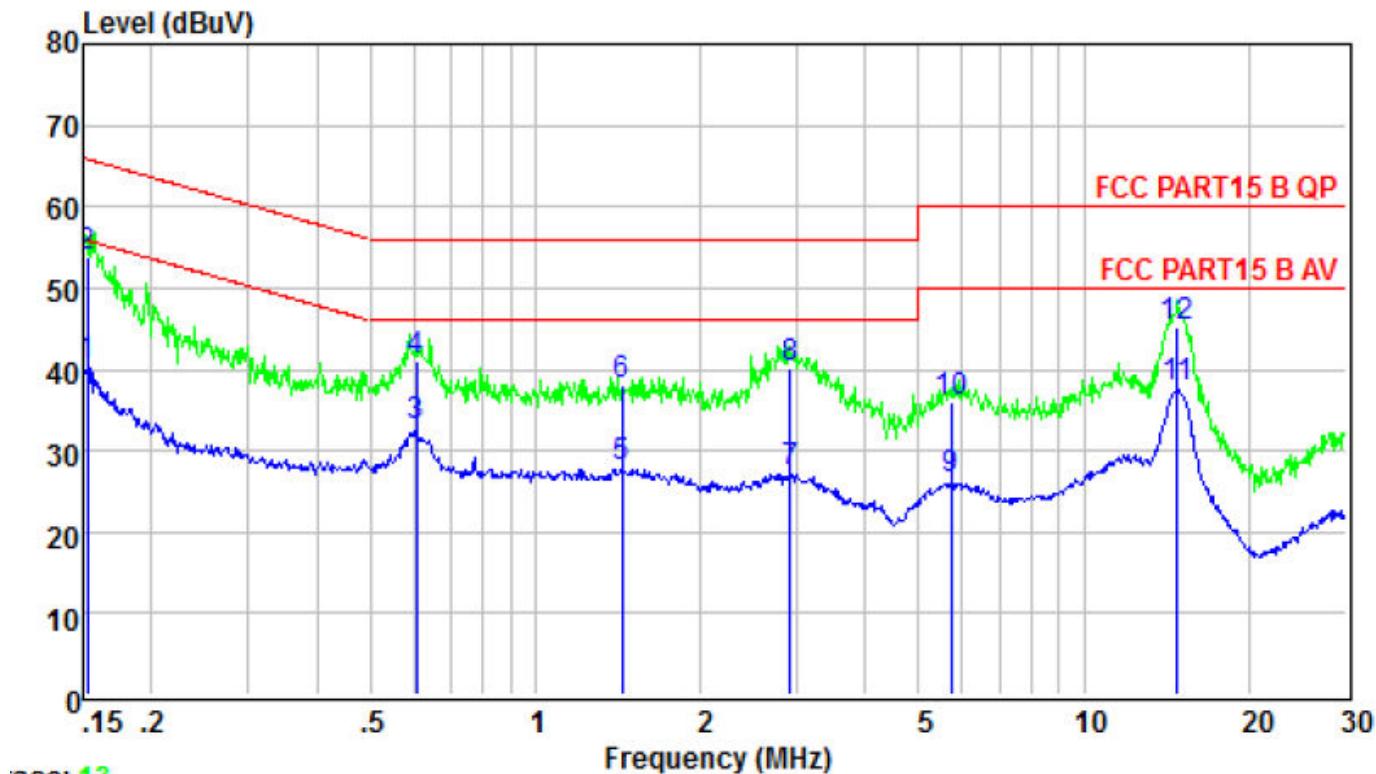

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
MHz	dBuV	dBuV	dB		
1	0.152	40.31	55.87	-15.56	Average
2	0.152	53.69	65.87	-12.18	QP
3	0.608	32.98	46.00	-13.02	Average
4	0.608	41.15	56.00	-14.85	QP
5	1.441	27.82	46.00	-18.18	Average
6	1.441	38.12	56.00	-17.88	QP
7	2.915	27.38	46.00	-18.62	Average
8	2.915	40.10	56.00	-15.90	QP
9	5.713	26.52	50.00	-23.48	Average
10	5.713	36.11	60.00	-23.89	QP
11	14.750	37.80	50.00	-12.20	Average
12	14.750	45.11	60.00	-14.89	QP

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 4

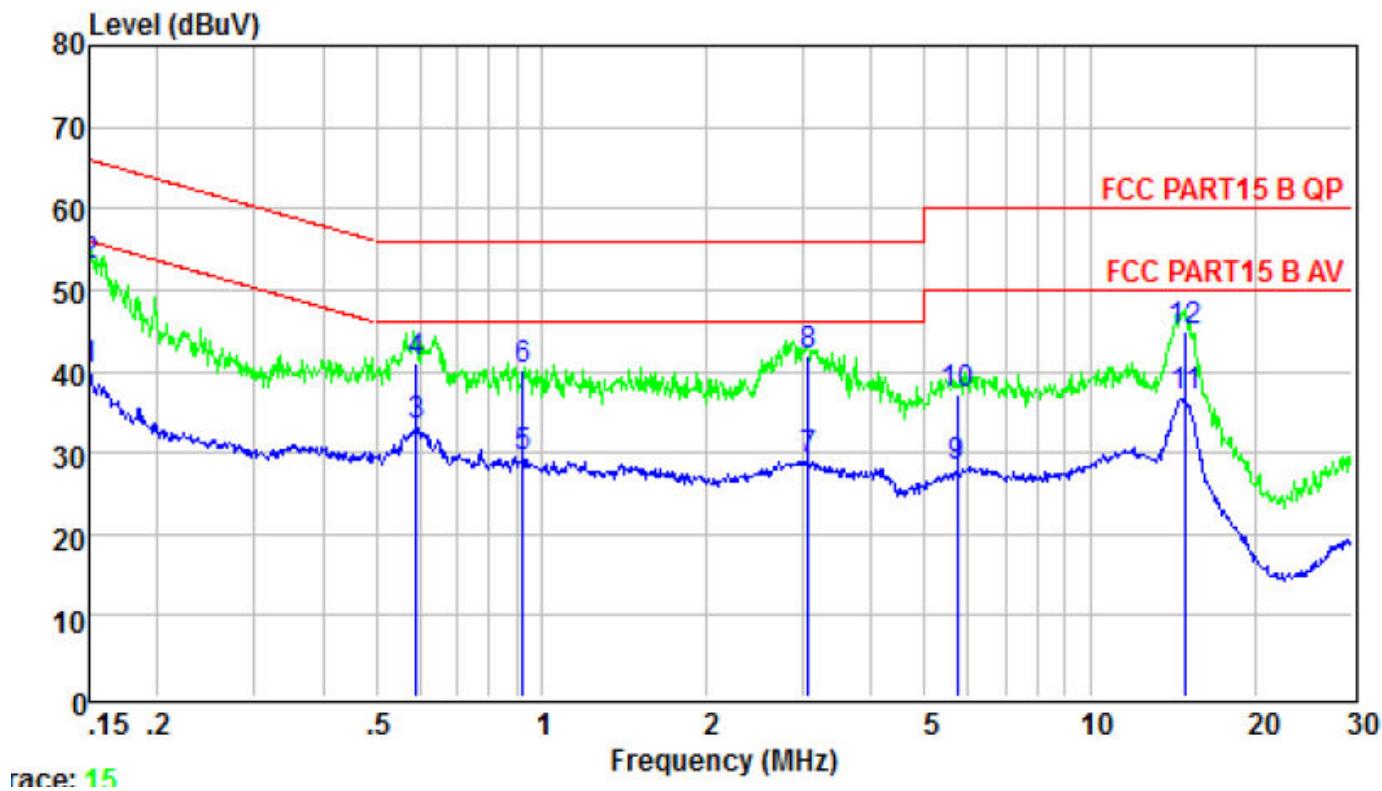

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
MHz	dBuV	dBuV	dB		
1	0.150	40.03	56.00	-15.97	Average
2	0.150	52.96	66.00	-13.04	QP
3	0.592	33.18	46.00	-12.82	Average
4	0.592	40.96	56.00	-15.04	QP
5	0.923	29.50	46.00	-16.50	Average
6	0.923	40.12	56.00	-15.88	QP
7	3.058	29.28	46.00	-16.72	Average
8	3.058	42.06	56.00	-13.94	QP
9	5.713	28.25	50.00	-21.75	Average
10	5.713	37.28	60.00	-22.72	QP
11	14.907	36.93	50.00	-13.07	Average
12	14.907	44.96	60.00	-15.04	QP

## 4.2. Radiated Emission Test

### 4.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

### 4.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m(above 1GHz, the table was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.


The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.


The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

- Notes:
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading+Preamp Factor.
  2. Measurement Uncertainty:  $\pm 3.2$  dB at a level of confidence of 95%.
  3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
  4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.
  5. For Both PK and AV value above 1GHz, PK detector is used.
  6. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).


## Radiated Emission Test-Up Frequency Below 30MHz

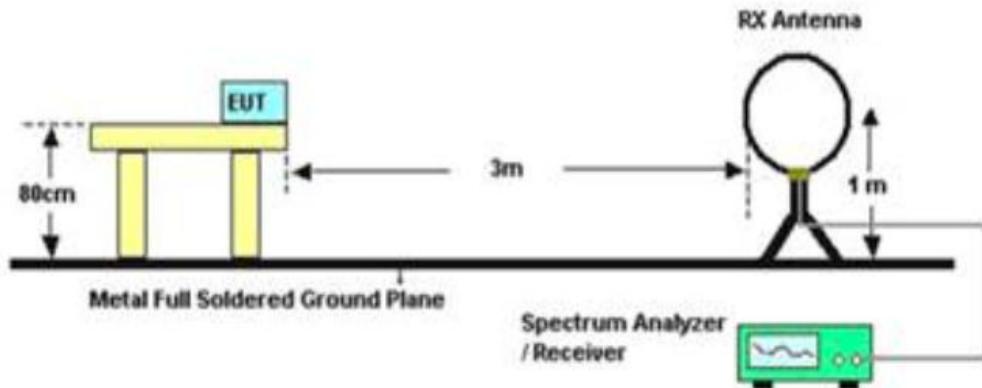

## 30MHz- 1GHz

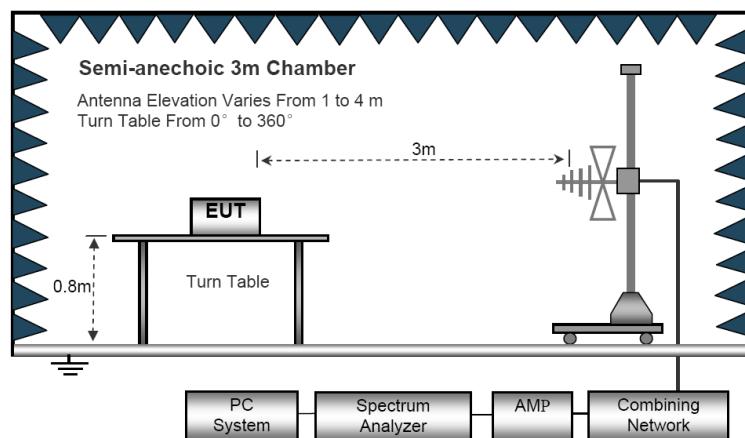

## Above 1GHz

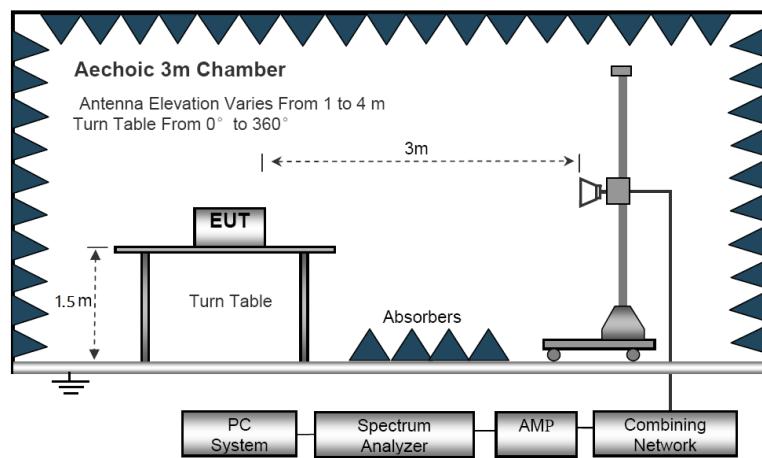

**Below 30MHz**

<b>Freq.</b>	<b>Reading</b>	<b>Limit</b>	<b>Margin</b>	<b>State</b>
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	<b>P</b>
--	--	--	--	<b>P</b>

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuV) + distance extrapolation factor.

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 3.7V		


## 30-1GHz

Horizontal

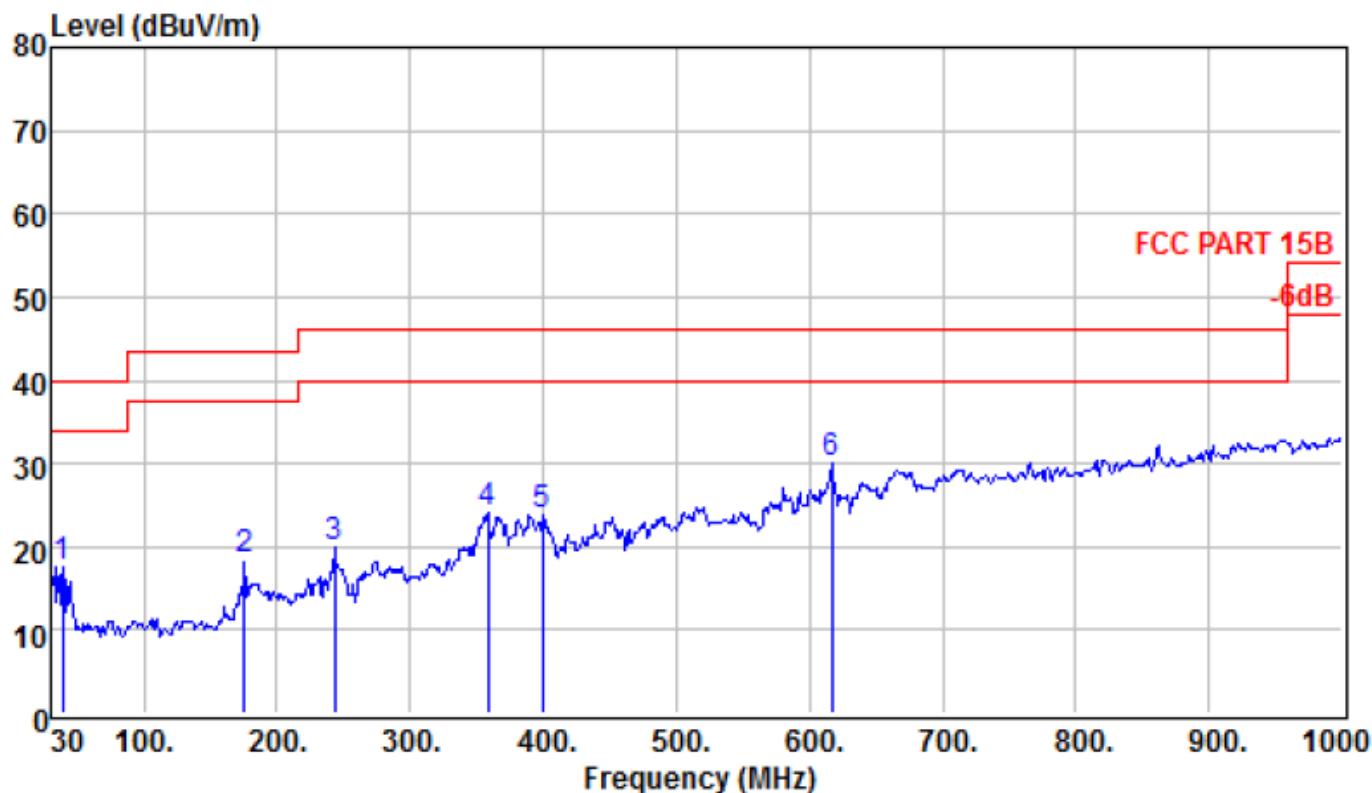

Freq	Read Level		Preamp Factor	Cable Antenna Loss Factor		Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m				
1	38.730	34.75	31.36	0.56	13.65	17.60	40.00	-22.40	QP
2	175.500	37.90	31.17	1.39	10.27	18.39	43.50	-25.11	QP
3	243.400	36.53	30.95	1.61	12.72	19.91	46.00	-26.09	QP
4	358.830	36.39	30.62	2.18	16.11	24.06	46.00	-21.94	QP
5	399.570	35.86	30.63	2.37	16.30	23.90	46.00	-22.10	QP
6	616.850	36.16	30.64	3.38	21.07	29.97	46.00	-16.03	QP

## Vertical

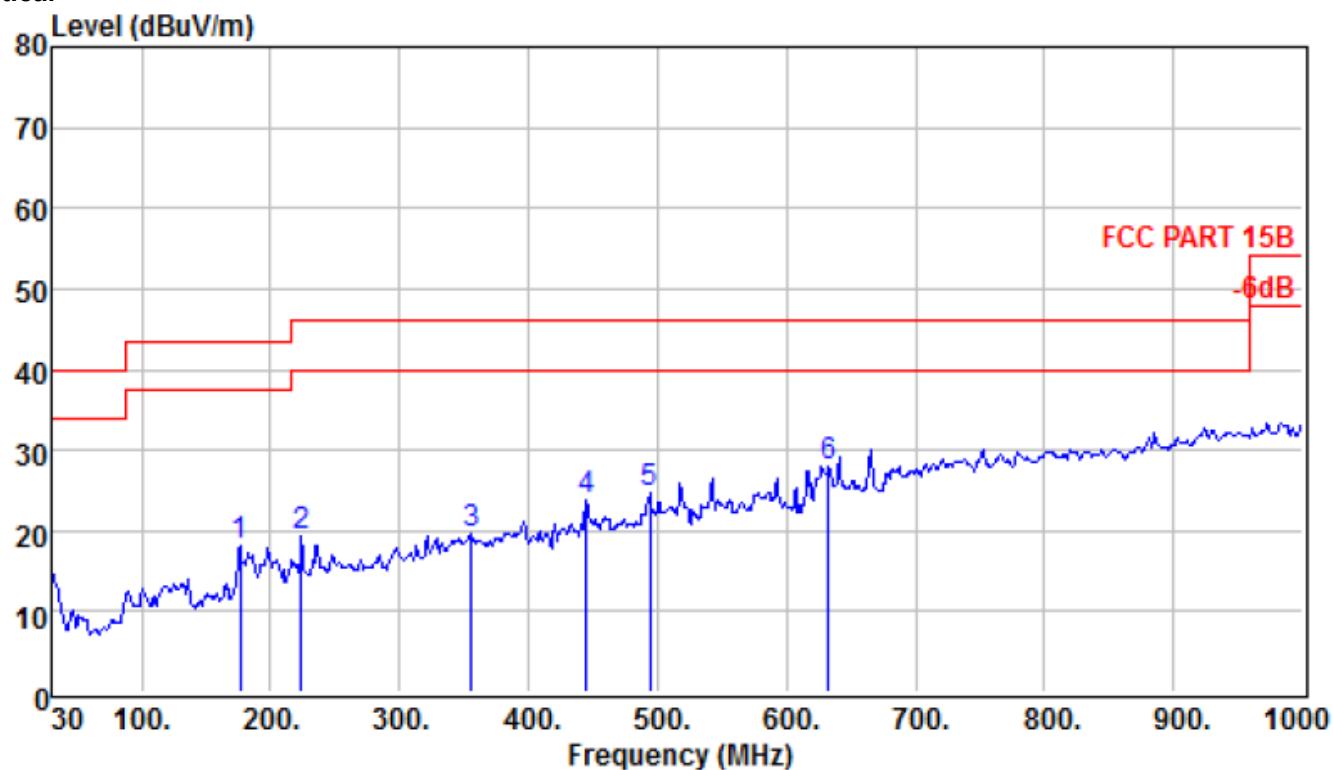

Freq	Read Level		Preamp Factor	Cable Loss		Antenna Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dB	dB/m	dBuV/m				
1	176.470	37.63	31.17	1.39	10.29	18.14	43.50	-25.36	QP	
2	224.000	36.48	30.95	1.53	12.15	19.21	46.00	-26.79	QP	
3	355.920	32.14	30.64	2.18	16.01	19.69	46.00	-26.31	QP	
4	445.160	34.15	30.61	2.62	17.50	23.66	46.00	-22.34	QP	
5	493.660	33.86	30.59	2.77	18.60	24.64	46.00	-21.36	QP	
6	632.370	33.90	30.72	3.47	21.33	27.98	46.00	-18.02	QP	

## NOTE:


Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,

Over Limit= Absolute Level – Limit

Mode 1 is the worst mode. Only worst case is presented in the report .


**Above 1GHz**

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2402
Test Voltage :	DC 3.7V		

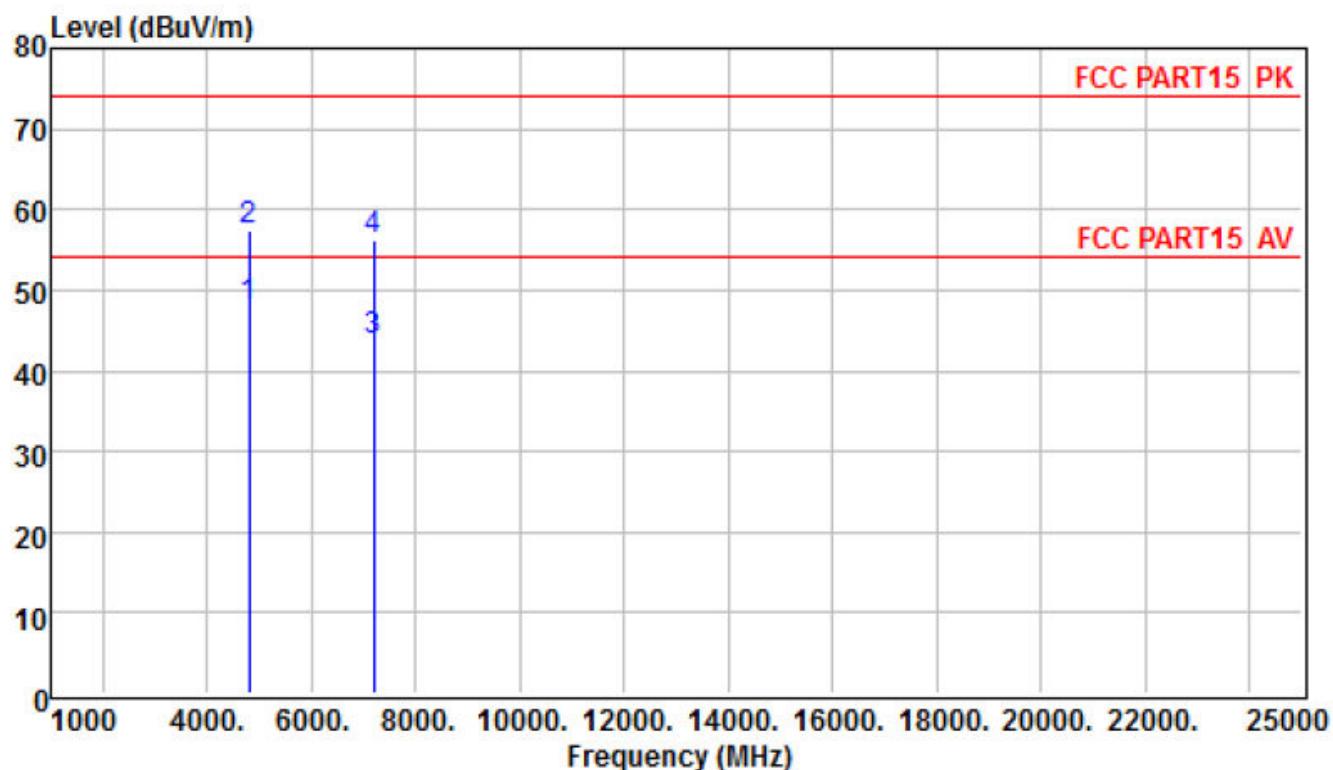**Vertical**


Freq	Read		Preamp		Cable		Antenna		Limit	Over	Line	Limit	Remark
	MHz	dBuV	Level	Factor	Loss	Factor	dB	dB/m	dBuV/m	dBuV/m	dB		
1	4804.000	30.33	27.49	11.96	32.94	47.74	54.00	-6.26	Average				
2	4804.000	40.07	27.49	11.96	32.94	57.48	74.00	-16.52	Peak				
3	7206.000	29.87	27.94	16.61	25.28	43.82	54.00	-10.18	Average				
4	7206.000	42.11	27.94	16.61	25.28	56.06	74.00	-17.94	Peak				

## Horizontal

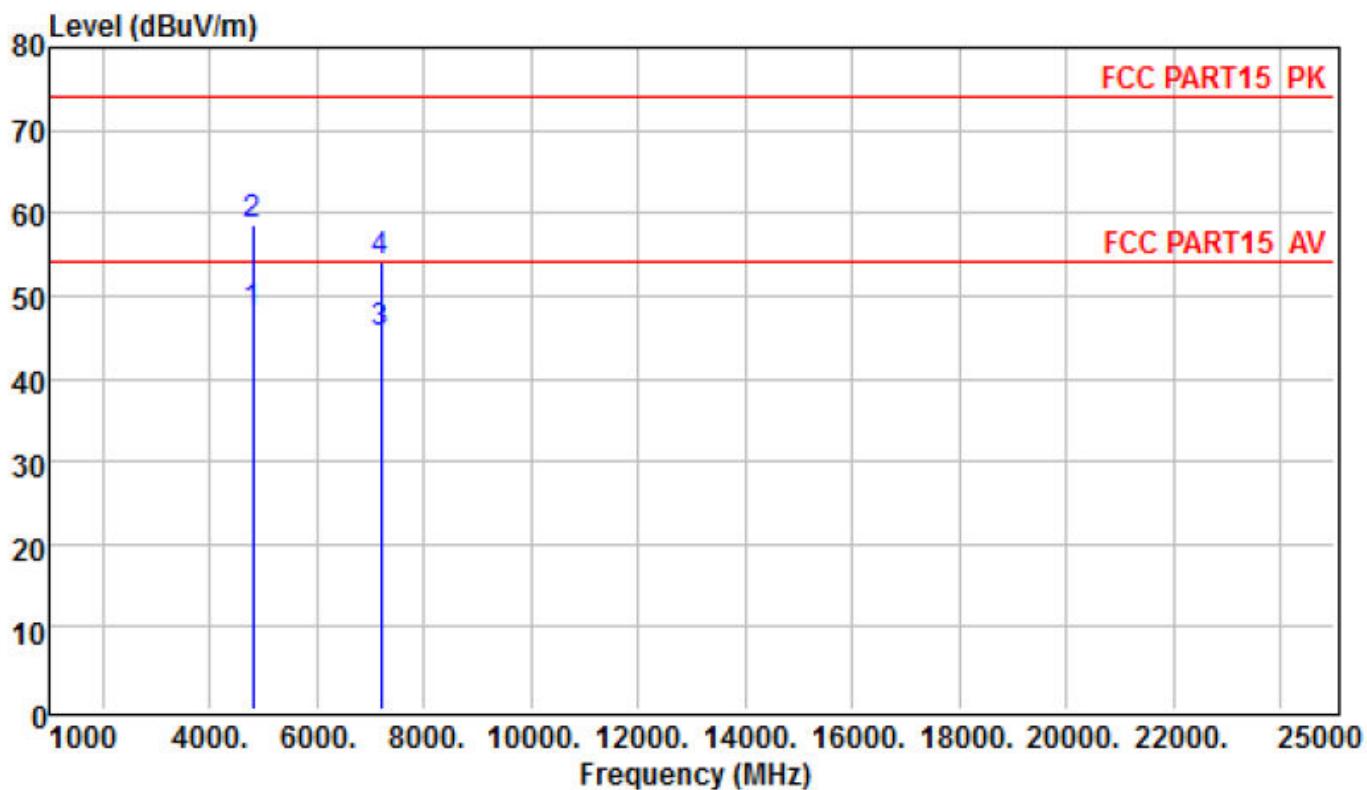


	Read Freq	Preamp Level	Cable Factor	Antenna Loss	Limit Level	Line Limit	Over Line Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB
1	4804.000	30.44	27.49	11.96	32.94	47.85	54.00	-6.15 Average
2	4804.000	41.24	27.49	11.96	32.94	58.65	74.00	-15.35 Peak
3	7206.000	31.54	27.94	16.61	25.28	45.49	54.00	-8.51 Average
4	7206.000	40.05	27.94	16.61	25.28	54.00	74.00	-20.00 Peak

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2440
Test Voltage :	DC 3.7V		

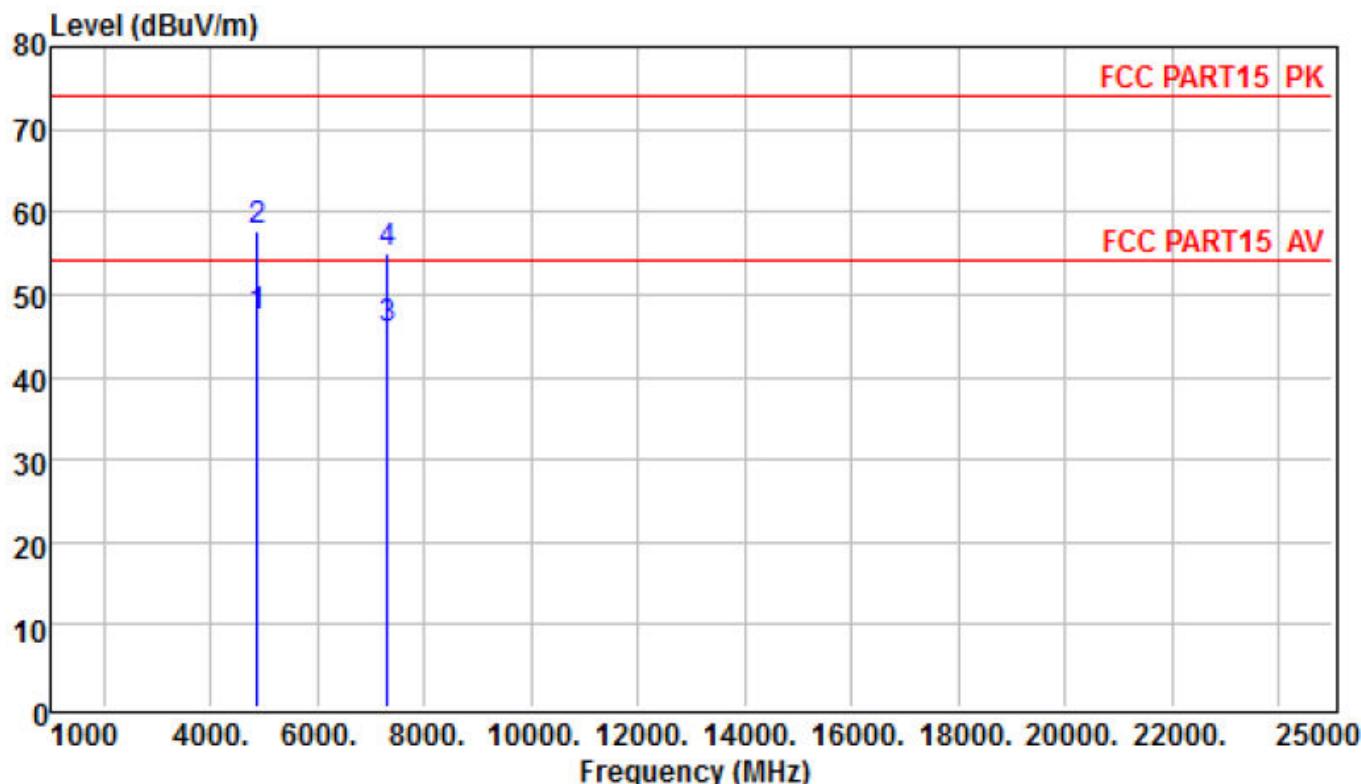**Vertical**


Freq	Read	Preamp	Cable	Antenna	Limit	Over	Remark	
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB
1	4880.000	30.65	27.53	12.14	32.11	47.37	54.00	-6.63
2	4880.000	41.06	27.53	12.14	32.11	57.78	74.00	-16.22
3	7320.000	32.86	27.96	16.62	24.33	45.85	54.00	-8.15
4	7320.000	42.08	27.96	16.62	24.33	55.07	74.00	-18.93

## Horizontal

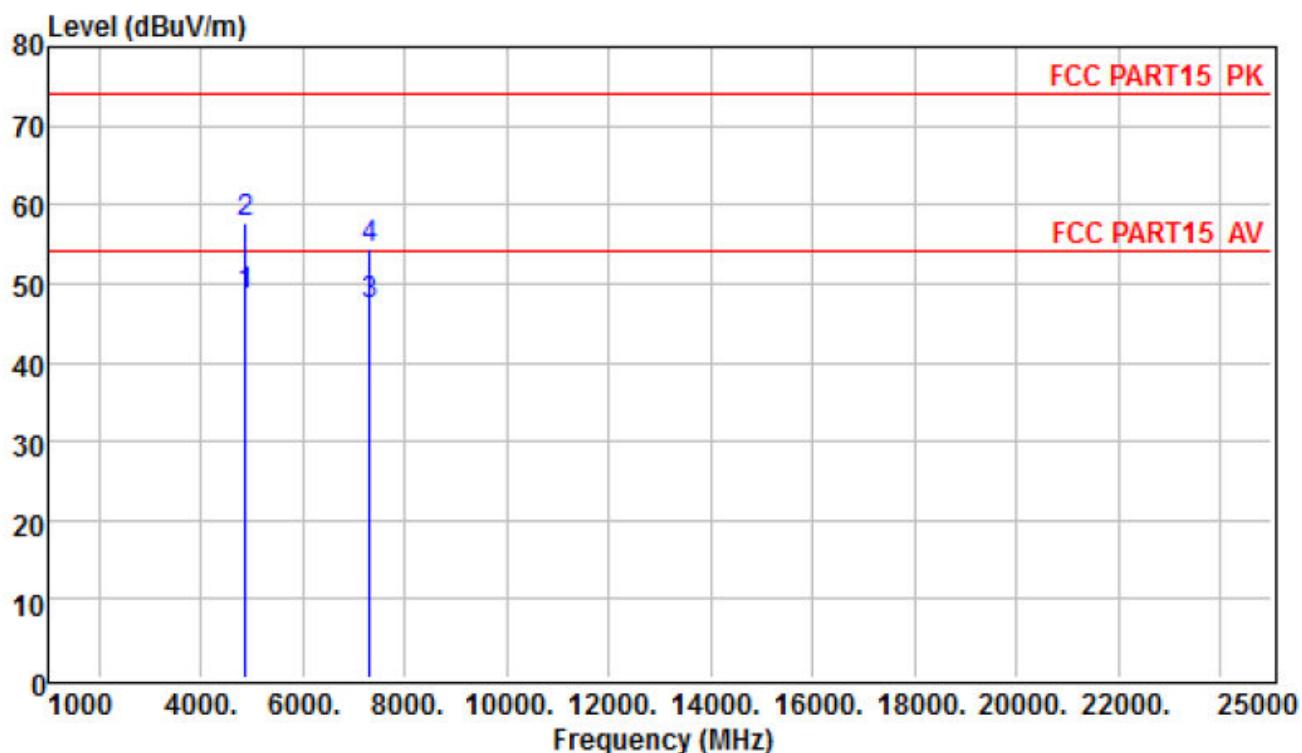


	Read Freq	Preamp Level	Cable Factor	Antenna Loss	Limit Level	Line Level	Over Limit	Remark
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB
1	4880.000	31.65	27.53	12.14	32.11	48.37	54.00	-5.63 Average
2	4880.000	40.98	27.53	12.14	32.11	57.70	74.00	-16.30 Peak
3	7320.000	34.43	27.96	16.62	24.33	47.42	54.00	-6.58 Average
4	7320.000	41.58	27.96	16.62	24.33	54.57	74.00	-19.43 Peak

EUT :	Bluetooth Noise-Isolating Earbuds	Model Name :	IT-01
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2480
Test Voltage :	DC 3.7V		

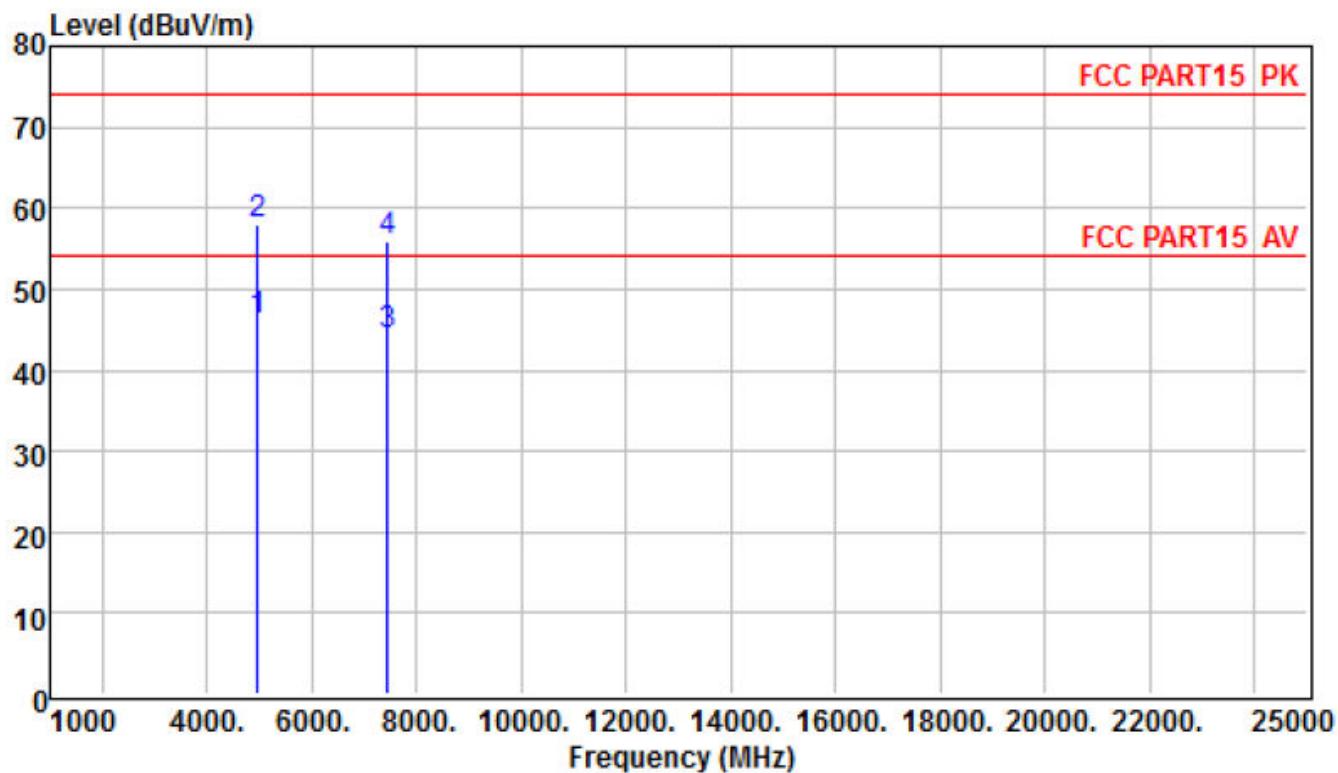**Vertical**

Freq	Read		Preamp		Cable		Antenna		Limit	Over	Over
	Level	Factor	Level	Factor	Loss	Factor	Level	Line			
	MHz	dBuV	dB		dB	dB/m	dBuV/m	dBuV/m		dB	
1	4960.000	29.97	27.58	12.36	31.32	46.07	54.00	-7.93	Average		
2	4960.000	41.97	27.58	12.36	31.32	58.07	74.00	-15.93	Peak		
3	7440.000	31.23	27.99	16.62	24.38	44.24	54.00	-9.76	Average		
4	7440.000	42.96	27.99	16.62	24.38	55.97	74.00	-18.03	Peak		

## Horizontal

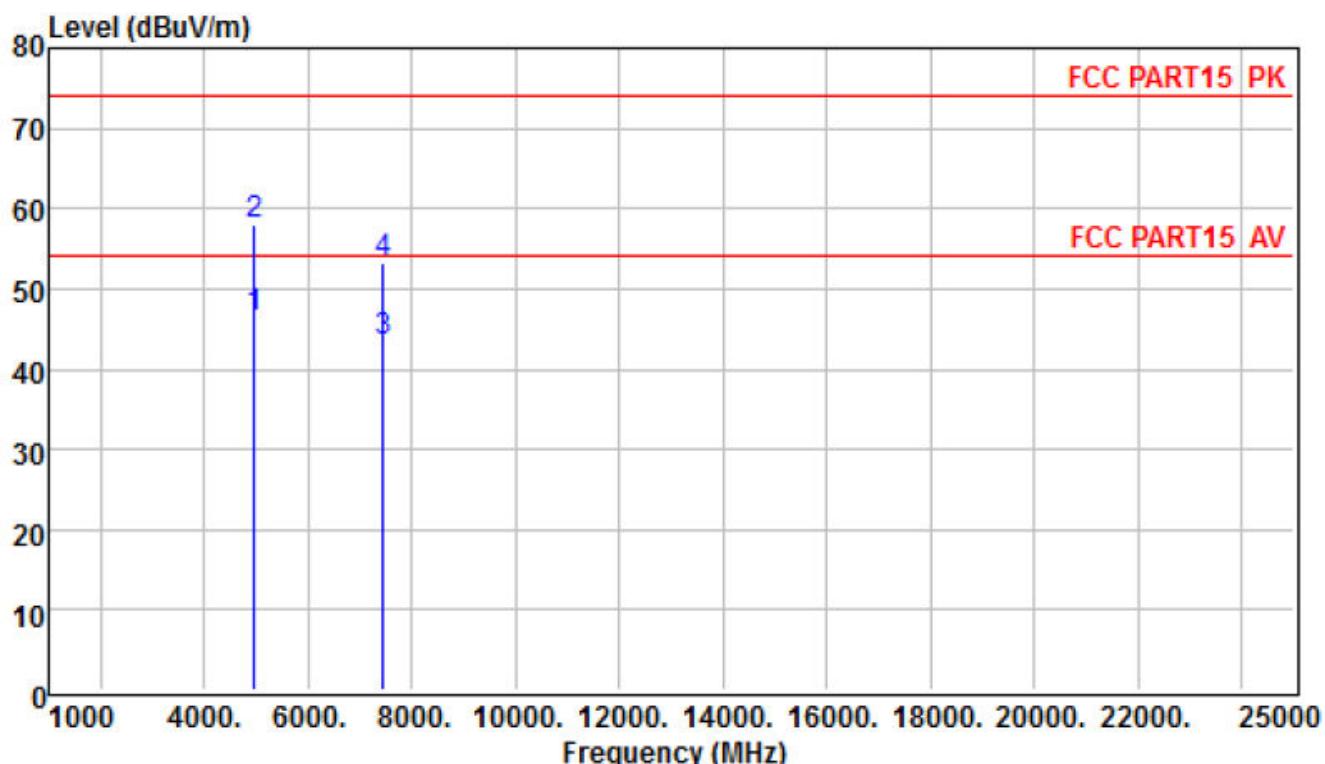

Freq	Read	Preamp	Cable	Antenna	Limit	Over	Over		
	Level	Factor	Loss	Factor				Remark	
	MHz	dBuV	dB	dB	dB/m	dBuV/m	dBuV/m	dB	
1	4960.000	30.32	27.58	12.36	31.32	46.42	54.00	-7.58	Average
2	4960.000	41.87	27.58	12.36	31.32	57.97	74.00	-16.03	Peak
3	7440.000	30.32	27.99	16.62	24.38	43.33	54.00	-10.67	Average
4	7440.000	40.11	27.99	16.62	24.38	53.12	74.00	-20.88	Peak

## NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,

Over Limit= Absolute Level – Limit

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

## 5. BAND EDGE COMPLIANCE TEST

### 5.1. Limits


All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 30dB below the fundamental emissions, or comply with 15.209 limits.

### 5.2. Test setup

For Conducted Test



For Radiated emission Test

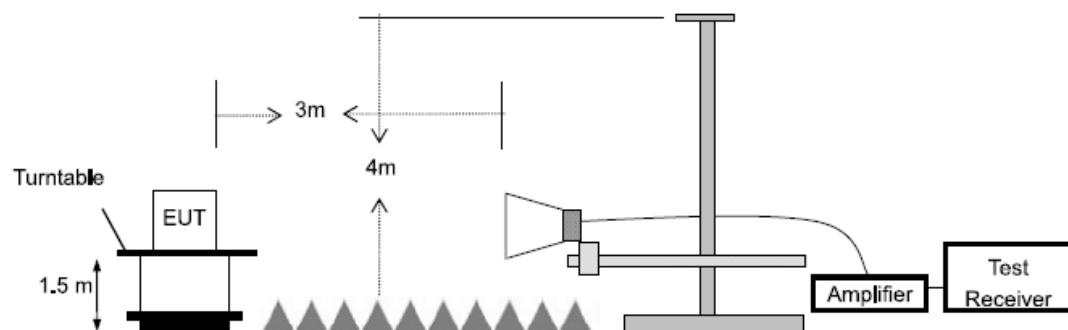

### 5.3. TEST Procedure

#### For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

#### For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold



**For radiated test as follows:**

Frequency (MHz)	Meter Reading (dB $\mu$ V)	antenna Factor (dB)	cable loss (dB)	preamp factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type	Comment
2390	36.51	30.44	8.94	26.32	49.57	74	-24.43	peak	Vertical
2390	36.87	30.44	8.94	26.32	49.93	74	-24.07	peak	Horizontal
2483.5	36.43	30.05	9.07	26.34	49.21	74	-24.79	peak	Vertical
2483.5	37.95	30.05	9.07	26.34	50.73	74	-23.27	peak	Horizontal

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

**conduction band-edge**

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
Left-band	46.57	20	Pass
Right-band	61.22	20	Pass

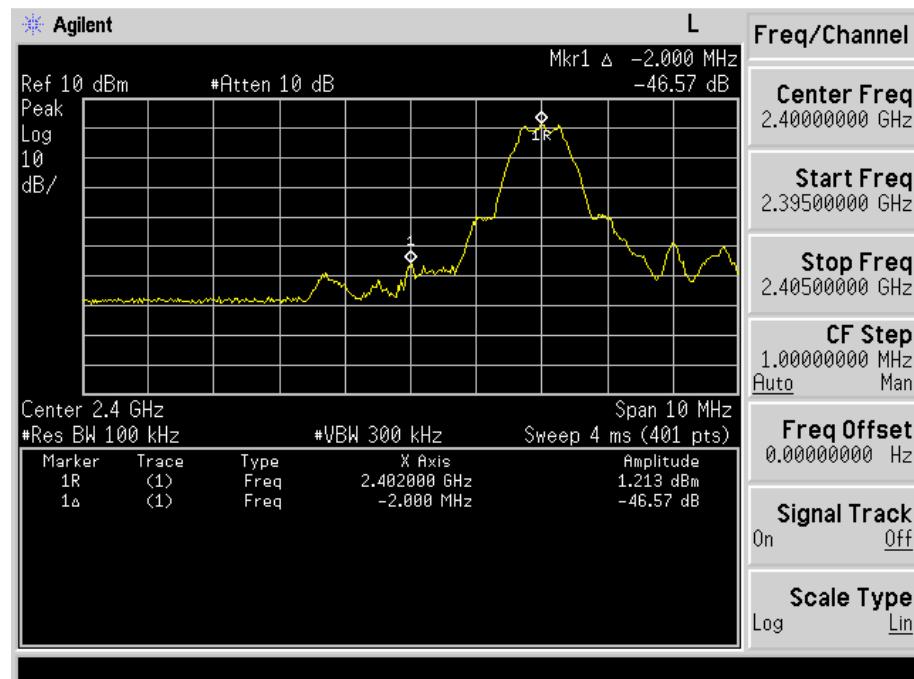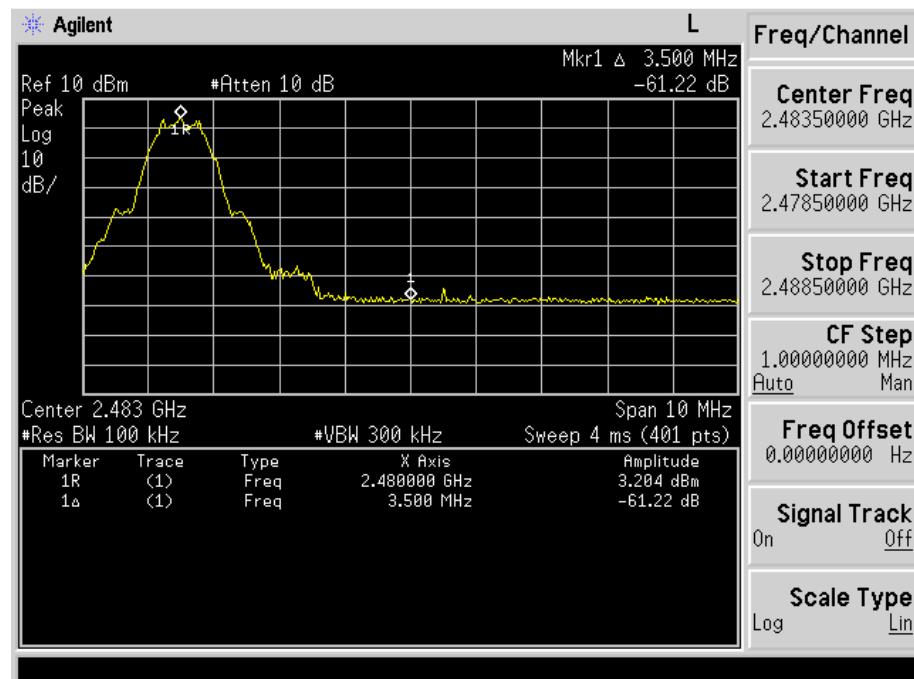**Left Side****Right Side**

## 6. 6DB OCCUPY BANDWIDTH

### 6.1. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz



### 6.2. TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test data:

Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
2402	0.727	500	Pass
2440	0.750	500	Pass
2480	0.733	500	Pass

Test plot as follows:

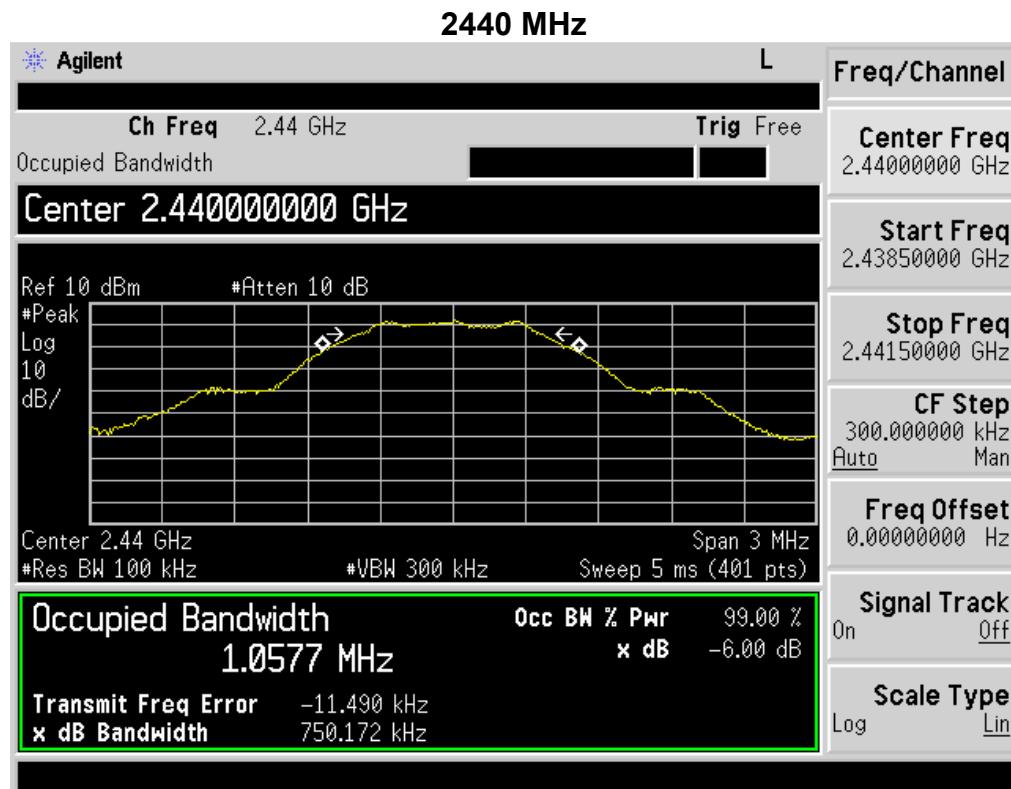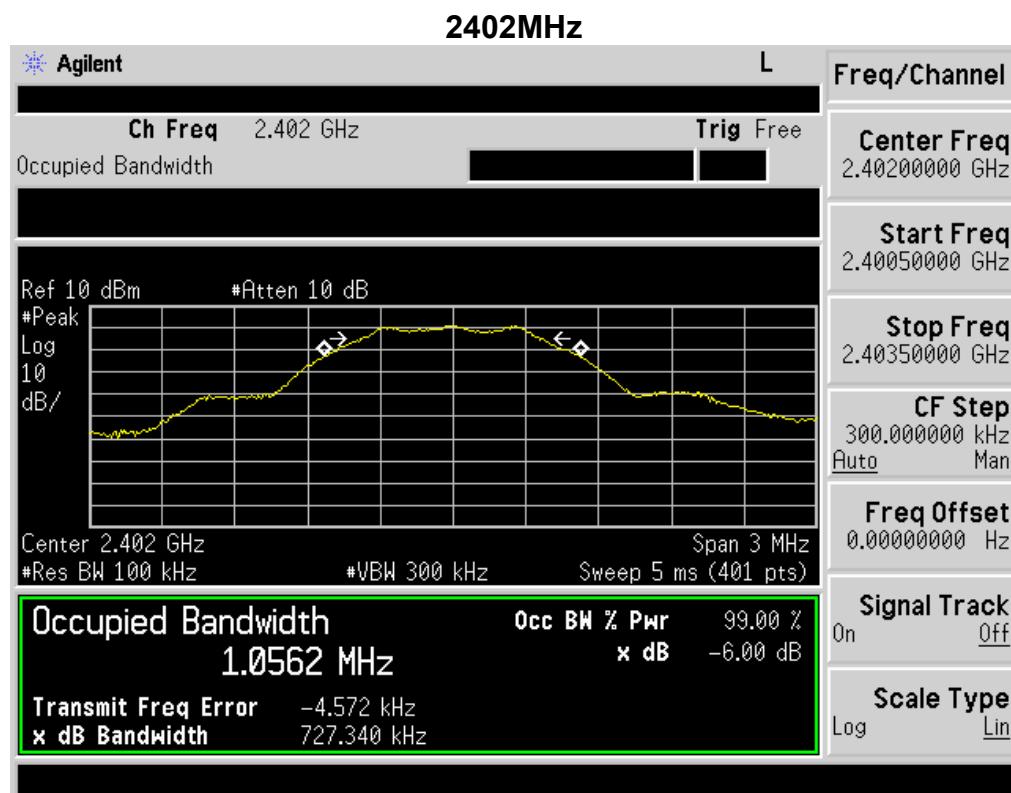

## 2480 MHz

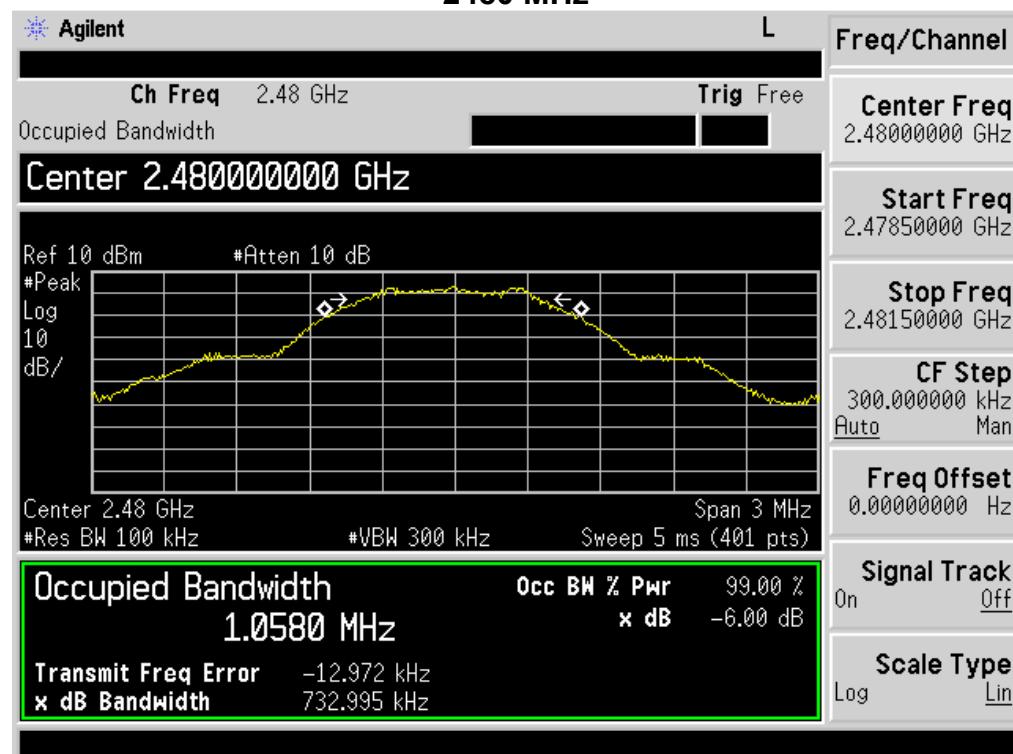

## 7. OUTPUT POWER TEST


### 7.1. Limits

For systems using digital modulation in the 2400~2483.5MHz, The output Power shall not exceed 1W (30dBm)

### 7.2. Test setup

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.



### 7.3. Test result

Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)
2402	1.754	30
2440	2.231	30
2480	2.632	30

## 8. POWER SPECTRAL DENSITY TEST

### 8.1. Limits




For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 8.2. Test setup

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \text{ RBW}$
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 8.3. Test result

Channel Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402	-13.65	8	Pass
2440	-12.47	8	Pass
2480	-11.44	8	Pass

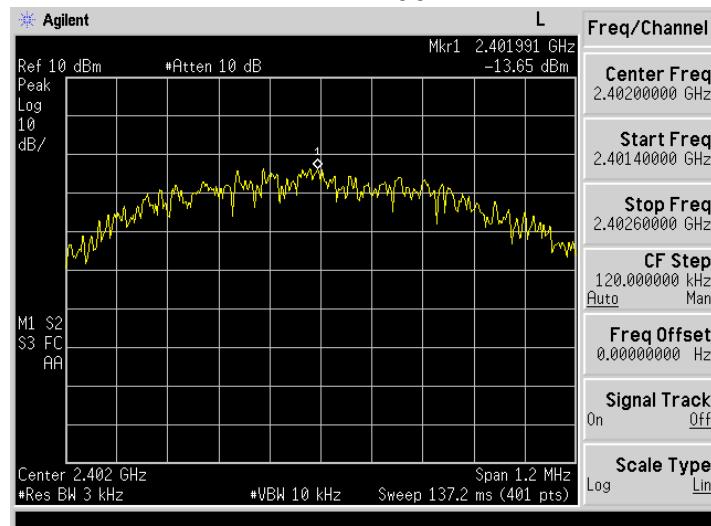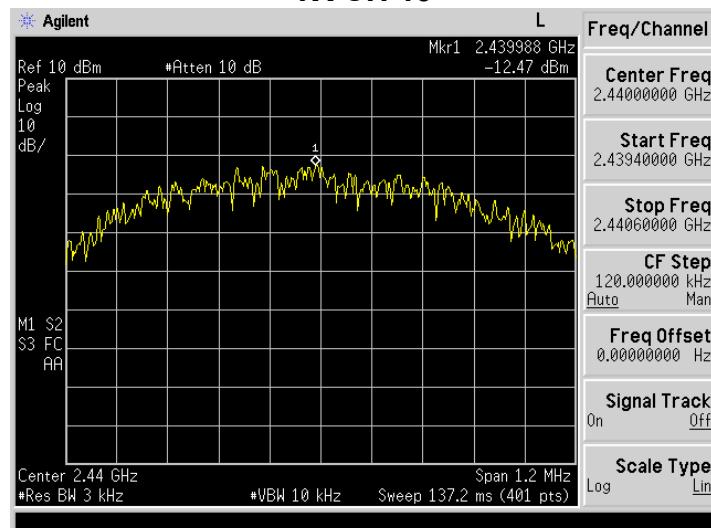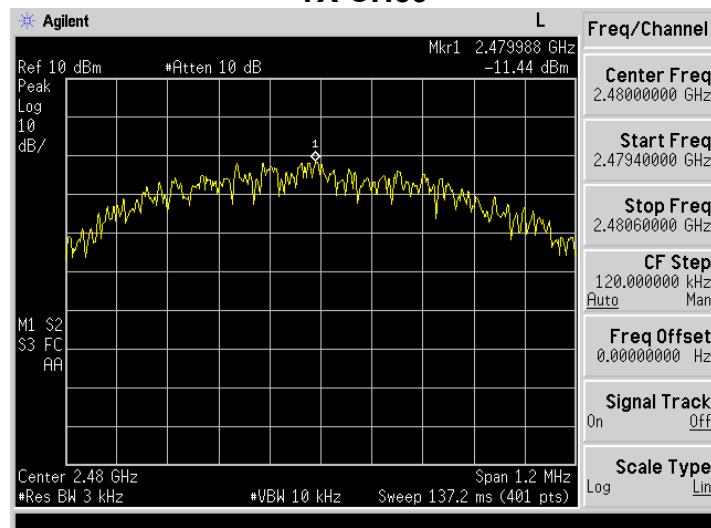**TX CH00****TX CH 19****TX CH39**

## 9. ANTENNA REQUIREMENTS

### 9.1. Limits


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.2. Result

The antennas used for this product is Helical antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.0dBi.

## 10.PHOTOGRAPHS OF TEST SET-UP

Conducted Emission

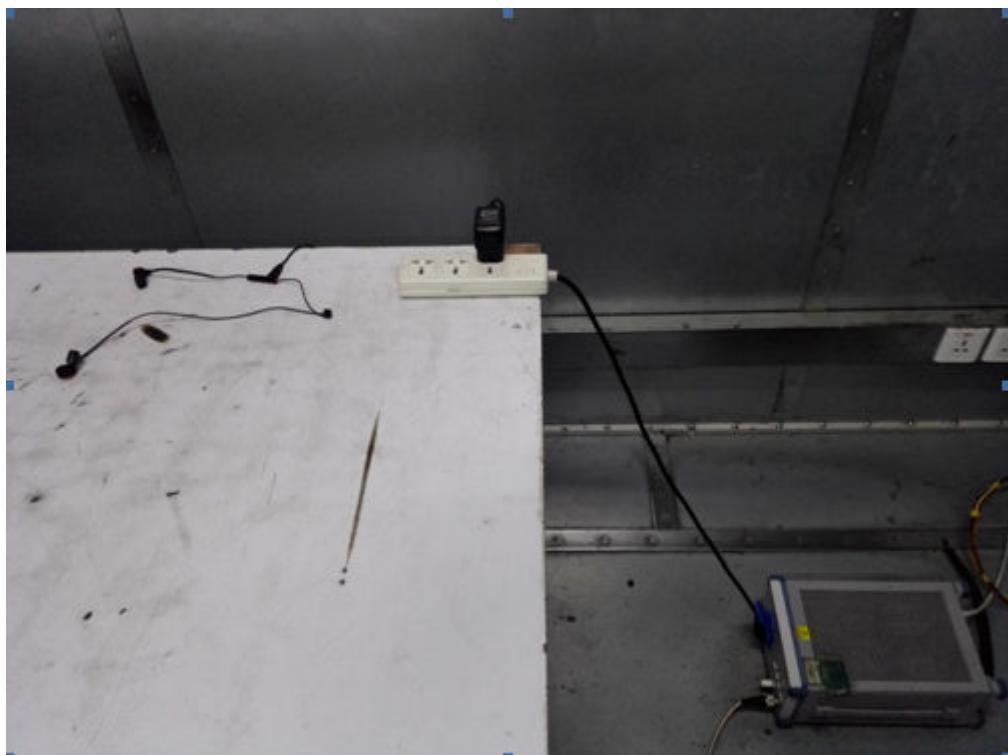

Radiated Emission Test






## 11. PHOTOGRAPHS OF THE EUT








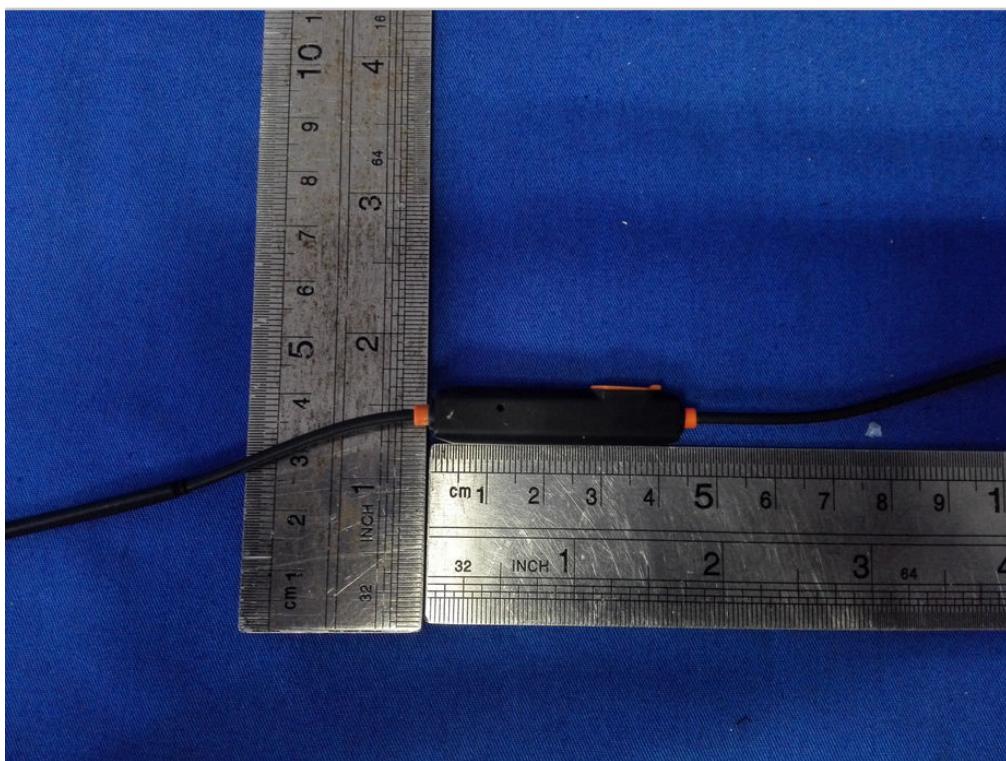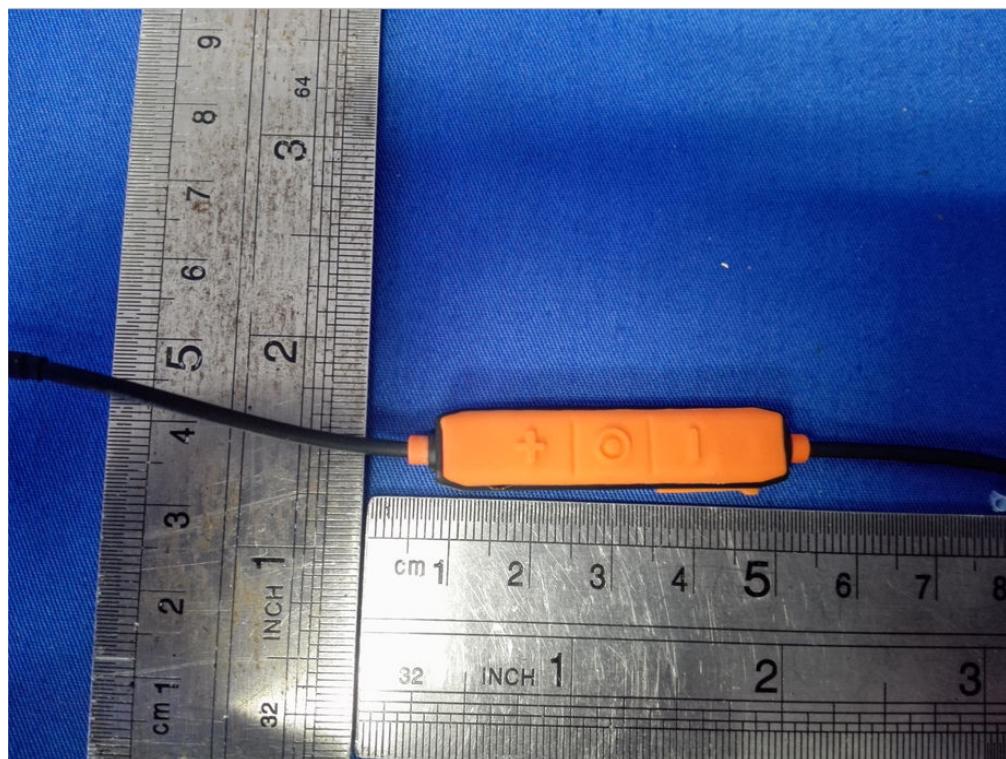

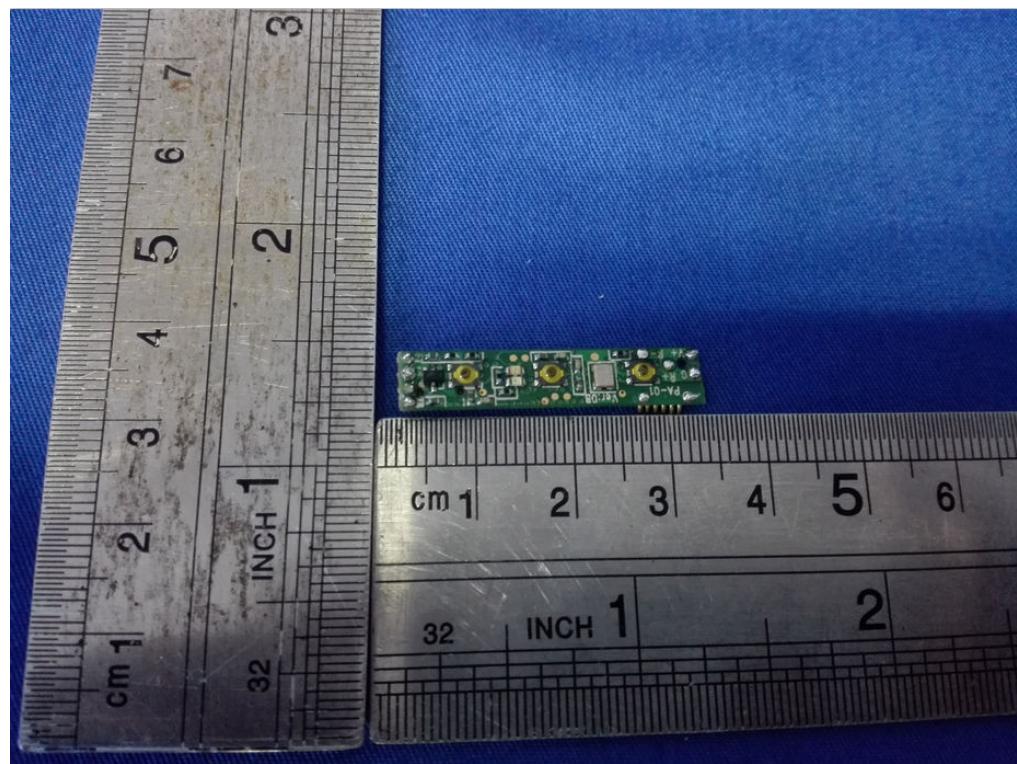

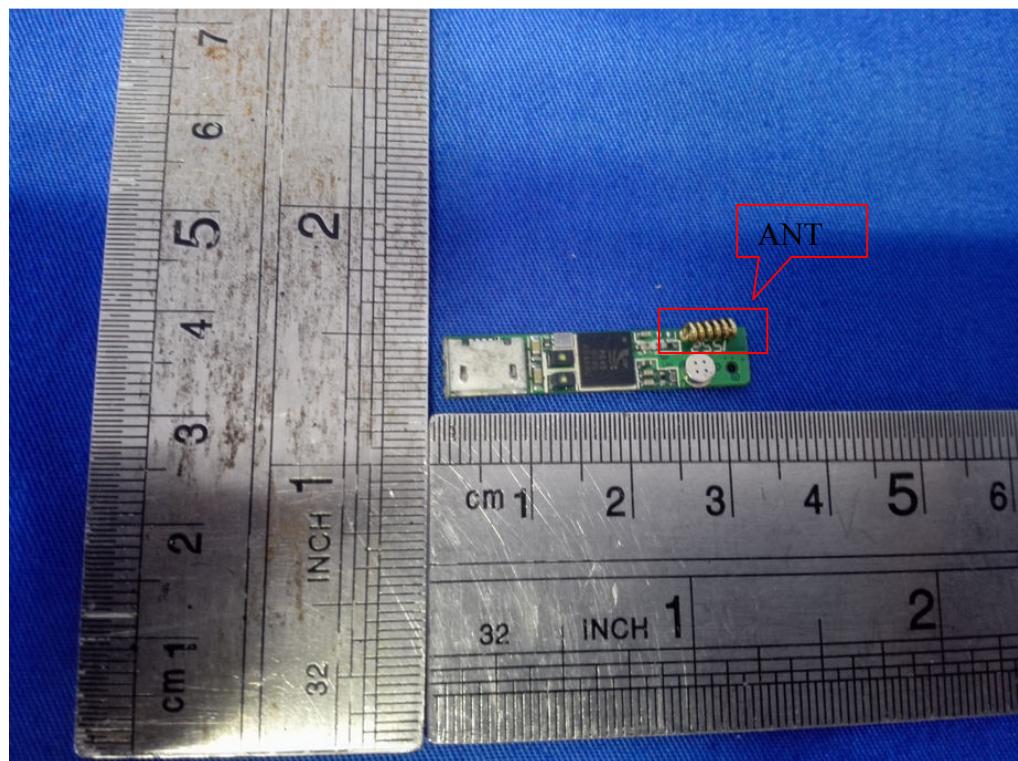

-----END-----