



FCC TEST REPORT

Report No: STS1609169F02

Issued for

VTV Technologies Inc

7055 Veterans Blvd, Burr Ridge, illinois 60527,USA

Product Name:	CastNow
Brand Name:	CastNow
Model Name:	CastNow v1
Series Model:	CastNow v2
FCC ID:	2AJVX-CASTNOWV1
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





TEST RESULT CERTIFICATION

Applicant's name : VTV Technologies Inc

Address : 7055 Veterans Blvd, Burr Ridge, illinois 60527,USA

Manufacture's Name : Shanghai Yage Electronics Ltd.

Address : 3rd floor, office Building No.26, 4855 Guang Fu Lin Road,
Songjiang District, Shanghai,China

Product description

Product name : CastNow

Model and/or type reference : CastNow v1

Series Model : CastNow v2

Standards : FCC Part15.407

Test procedure ANSI C63.10-2013

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC&IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : 24 Sep. 2016 ~10 Oct. 2016

Date of Issue : 11 Oct. 2016

Test Result : **Pass**

Testing Engineer : _____

(Tony Liu)

Technical Manager : _____

(Vita Li)

Authorized Signatory : _____

(Bovey Yang)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	17
4. POWER SPECTRAL DENSITY TEST	33
4.1 APPLIED PROCEDURES / LIMIT	33
5. BANDWIDTH MEASUREMENT	35
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	35
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	36
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	37
6. MAXIMUM CONDUCTED OUTPUT POWER	38
6.1 APPLIED PROCEDURES / LIMIT	38
7. FREQUENCY STABILITY MEASUREMENT	41
7.1 LIMIT OF FREQUENCY STABILITY	41
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	44
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	44
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	44
9. ANTENNA REQUIREMENT	45
9.1 STANDARD REQUIREMENT	45
9.2 EUT ANTENNA	45
APPENDIX - PHOTOS OF TEST SETUP	46

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	11 Oct. 2016	STS1609169F02	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v01r03

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)& 15.209	Spurious Emission	PASS
15.407(a)	Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.203	Antenna Requirement	PASS

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) all tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,

Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334; IC Registration No.: 12108A-1

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.70\text{dB}$
4	Spurious emissions,conducted	$\pm 1.19\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	CastNow	
Trade Name	CastNow	
Model Name	CastNow v1	
Series Model	CastNow v2	
Model Difference	Only different in model name	
Product Description	The EUT is a CastNow	
	Operation Frequency:	IEEE 802.11a/ n/ac(HT20) 5.180GHz-5.240GHz IEEE 802.11n/ac(HT40) 5.190GHz-5.310GHz IEEE 802.11ac(HT80) 5.210GHz IEEE 802.11a/ n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11a/ n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
	Modulation Type:	IEEE for 802.11a/n/ac: OFDM(BPSK/QPSK/16QAM)
	Antenna Designation:	See Note 3
	Max.Output Power(Conducted):	7.89dBm
	The duty cycle of WLAN 802.11a/n were 98 %	
	More details of EUT technical specification, please refer to the User's Manual.	
Test Channel	Please refer to the Note 2.	
Power Rating	DC12 1.5A	
Adapter Information	Input: AC100-240V 50/60Hz Output: DC12 1.5A	
Hardware version number	v1	
Software version number	3.3.9	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5775
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n/ac (HT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n/ac (HT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11ac (HT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	155	5775

Ant	Brand	Model Name	Ant Type	Connect or	Gain (dBi)	NOTE
A	CastNow	CastNow v1	Dipole Ant	N/A	(5 150 -5 350)MHz: 3dBi (5 725 -5 850)MHz: 3dBi	WIFI Ant



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 3	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 4	TX IEEE 802.11ac HT20 CH36&CH40&CH48	NSS1 MCS0
Mode 5	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 6	TX IEEE 802.11ac HT20 CH149&CH157&CH165	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 8	TX IEEE 802.11ac HT40 CH38&CH46	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 10	TX IEEE 802.11ac HT40 CH151&CH159	NSS1 MCS0
Mode 11	TX IEEE 802.11ac HT80 CH42	NSS1 MCS0
Mode 12	TX IEEE 802.11ac HT80 CH155	NSS1 MCS0


- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 60Hz) for which the device is capable of operation.

AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 13: Keeping TX + WLAN Link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

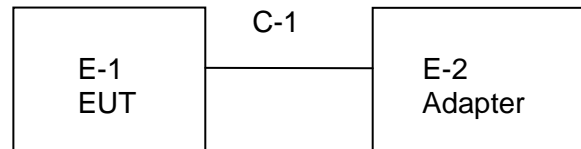

conduction Test Set

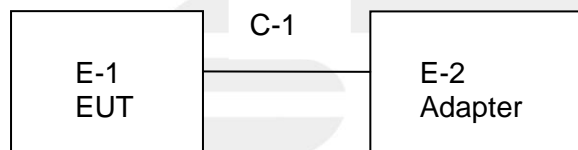



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	CastNow	CastNow	CastNow v1	N/A	EUT
E-2	Adapter	GPD	DC12V/1.5A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable (FTP)	NO	100cm	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2015.10.25	2016.10.24
Spectrum Analyzer	Agilent	AV4051F	Y20141343	2015.10.25	2016.10.24
Test Receiver	R&S	ESCI	101427	2015.10.25	2016.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2015.11.25	2016.11.24
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2016.03.06	2017.03.05
Horn Antenna	Schwarzbeck	BBHA 9170	9170-0741	2016.03.06	2017.03.05
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.06	2017.06.05
PreAmplifier	Agilent	8449B	60538	2015.10.25	2016.10.24
Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07
Low frequency cable	EM	R01	N/A	N/A	N/A
High frequency cable	SCHWARZBECK	AK9515H	SN-96286/96287	N/A	N/A

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	102086	2015.11.20	2016.11.19
LISN	R&S	ENV216	101242	2015.10.25	2016.10.24
LISN	EMCO	3810/2NM	000-23625	2015.10.25	2016.10.24
Conduction Cable	EM	C01	N/A	N/A	N/A

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2015.10.25	2016.10.24
Spectrum Analyzer	Agilent	E4407B	MY50140340	2015.10.25	2016.10.24
Signal Analyzer	Agilent	N9020A	MY49100060	2015.11.18	2016.11.17



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

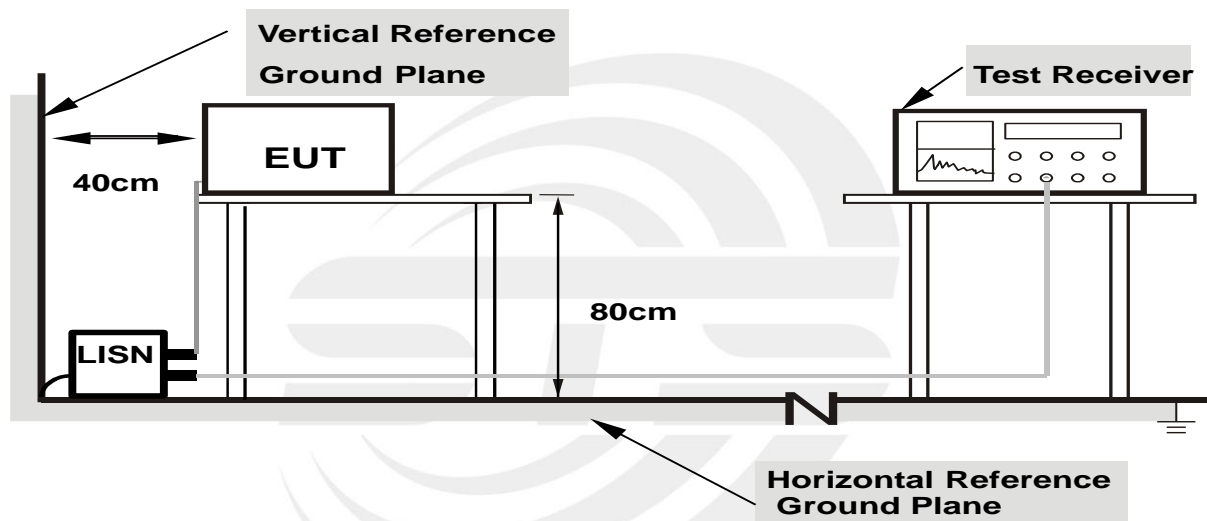

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 13

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1860	46.00	9.23	55.23	64.21	-8.98	QP
0.1860	29.64	9.23	38.87	54.21	-15.34	AVG
0.2500	41.86	9.18	51.04	61.76	-10.72	QP
0.2500	27.96	9.18	37.14	51.76	-14.62	AVG
0.3100	39.51	9.16	48.67	59.97	-11.30	QP
0.3100	27.75	9.16	36.91	49.97	-13.06	AVG
0.5580	38.44	9.17	47.61	56.00	-8.39	QP
0.5580	28.06	9.17	37.23	46.00	-8.77	AVG
1.2020	37.16	9.17	46.33	56.00	-9.67	QP
1.2020	21.75	9.17	30.92	46.00	-15.08	AVG
8.8260	41.72	9.41	51.13	60.00	-8.87	QP
8.8260	25.43	9.41	34.84	50.00	-15.16	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

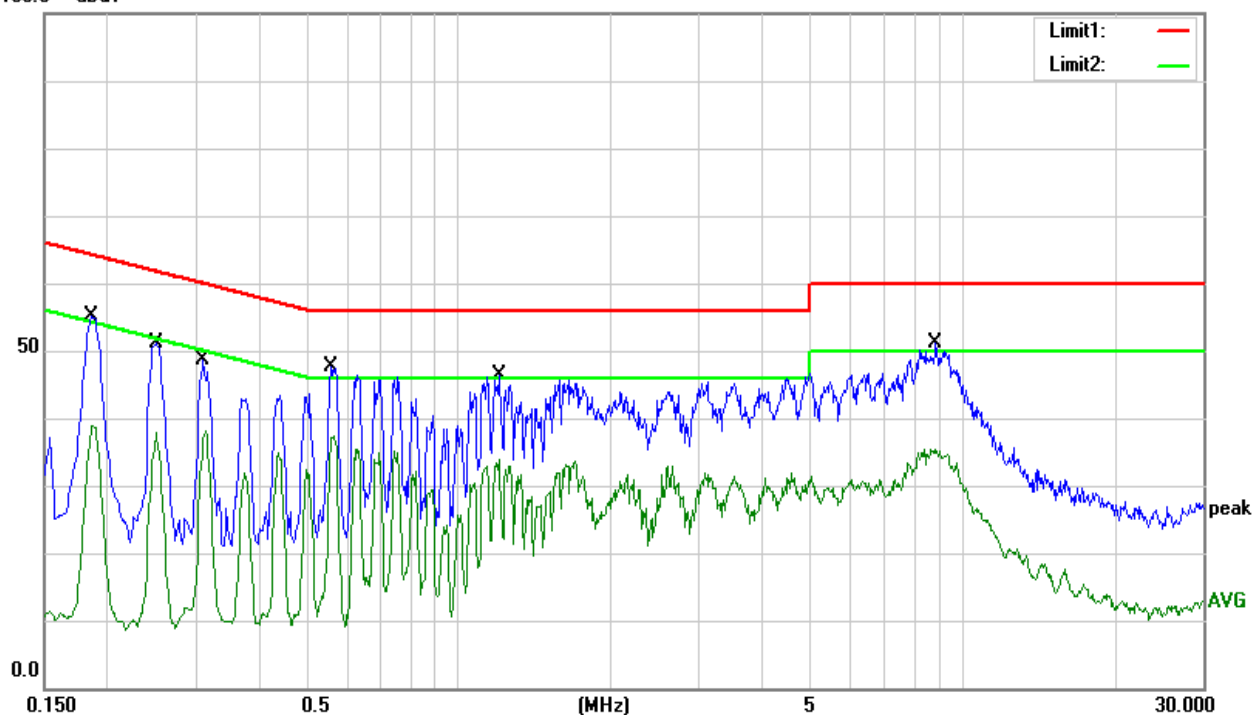




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
Test Voltage	AC 120V/60Hz	Test Mode	Mode 25

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1900	45.47	9.23	54.70	64.04	-9.34	QP
0.1900	28.78	9.23	38.01	54.04	-16.03	AVG
0.2500	41.73	9.18	50.91	61.76	-10.85	QP
0.2500	28.34	9.18	37.52	51.76	-14.24	AVG
0.7460	36.97	9.24	46.21	56.00	-9.79	QP
0.7460	26.30	9.24	35.54	46.00	-10.46	AVG
1.1980	36.74	9.25	45.99	56.00	-10.01	QP
1.1980	21.46	9.25	30.71	46.00	-15.29	AVG
4.4420	37.23	9.27	46.50	56.00	-9.50	QP
4.4420	21.10	9.27	30.37	46.00	-15.63	AVG
9.3700	41.25	9.38	50.63	60.00	-9.37	QP
9.3700	23.84	9.38	33.22	50.00	-16.78	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

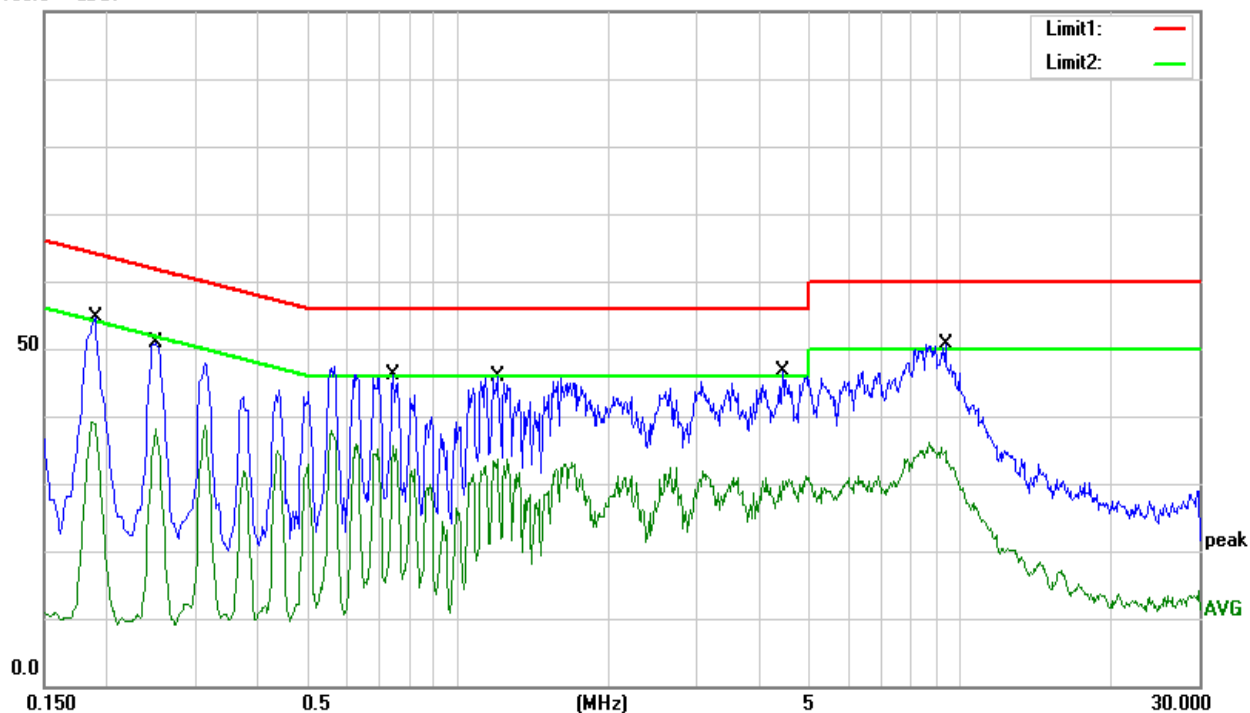



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7& 15.205/209(a), then the (a); limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz RMS detector

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz RMS detector



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

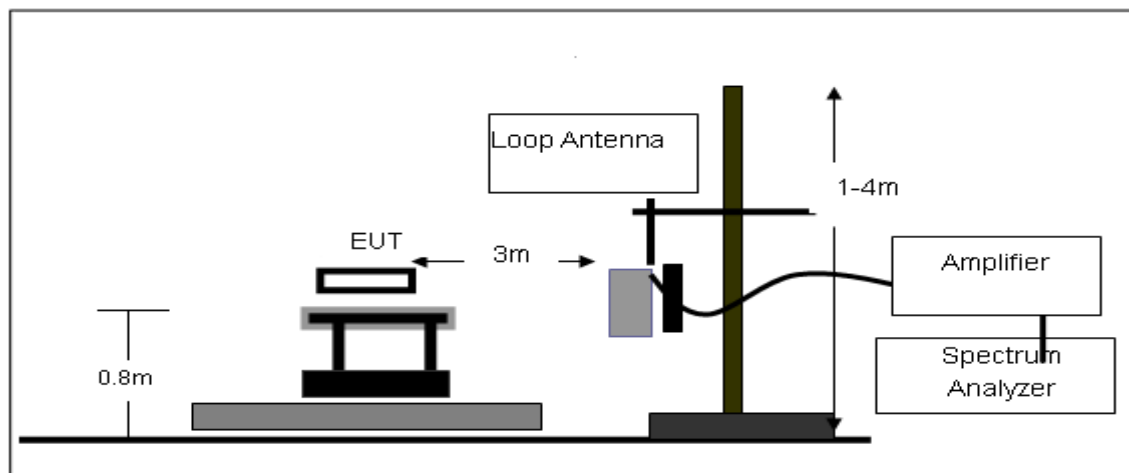

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

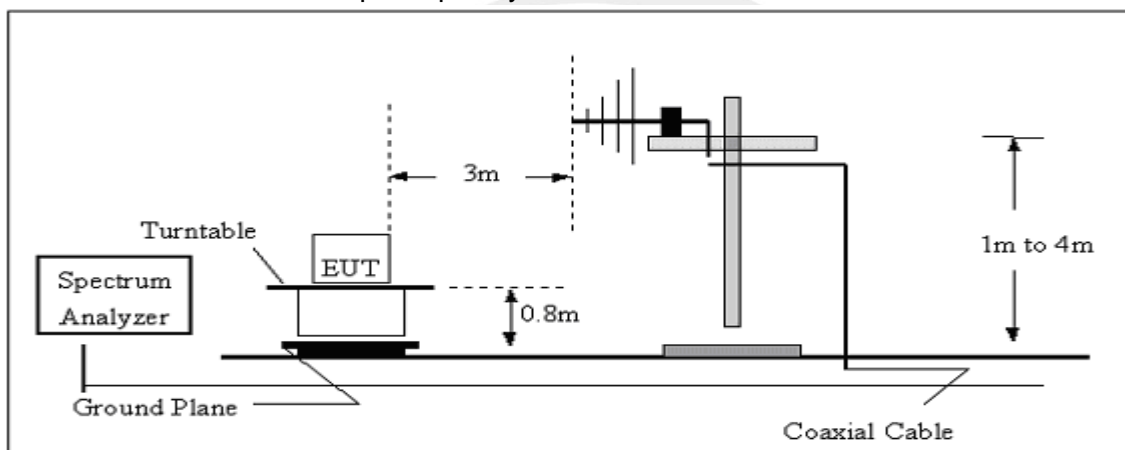

(C) Radiated Emission Test-Up Frequency Above 1GHz

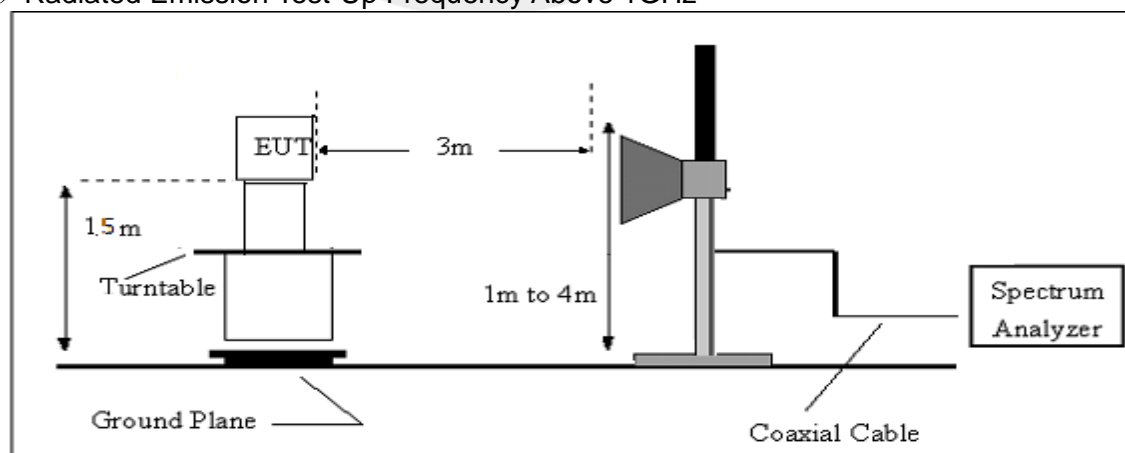

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.5 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.6 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)


Temperature	26 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Voltage	AC 120V/60Hz
Test Mode	Mode 1-12(Mode 1-6M worst mode)	Polarization	Horizontal

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
47.4918	42.47	-20.19	22.28	40.00	-17.72	QP
97.7983	45.33	-19.41	25.92	43.50	-17.58	QP
114.5146	36.70	-18.05	18.65	43.50	-24.85	QP
480.5276	40.97	-9.38	31.59	46.00	-14.41	QP
689.5644	35.74	-5.57	30.17	46.00	-15.83	QP
872.1832	31.02	-2.59	28.43	46.00	-17.57	QP

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit

80.0 dBuV/m

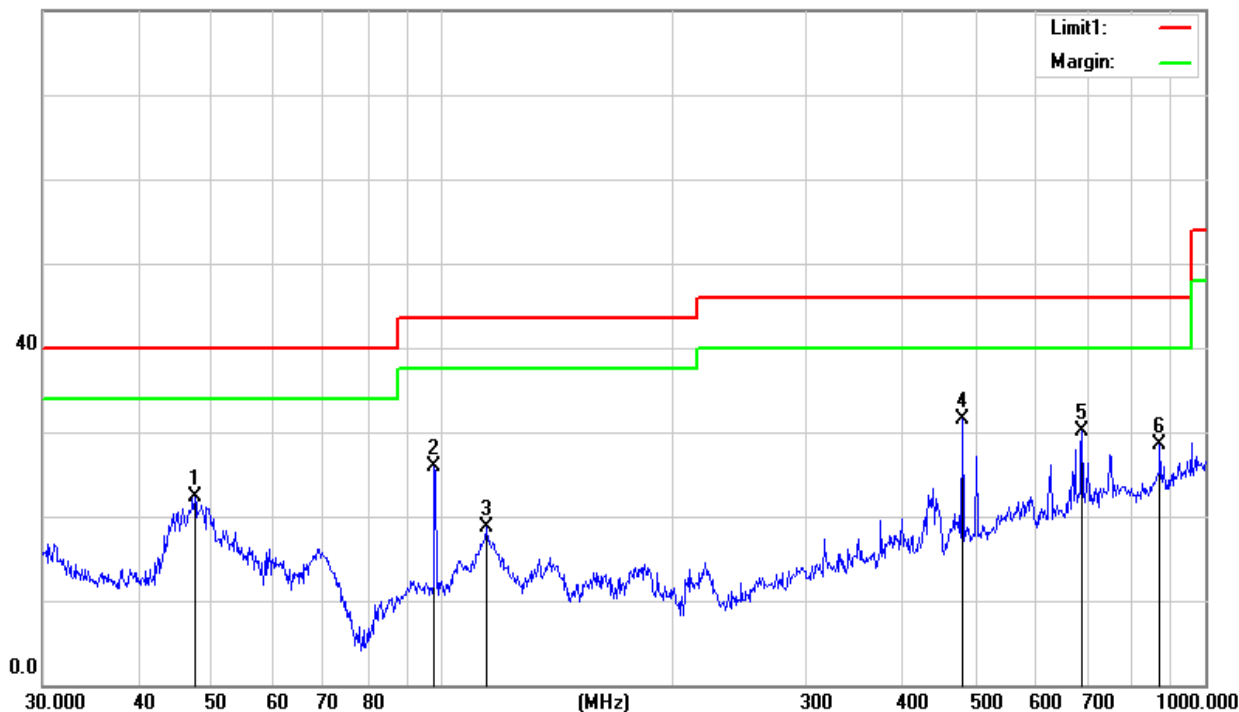




Temperature	26 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Voltage	AC 120V/60Hz
Test Mode	Mode 1-12(Mode 1-6M worst mode)	Polarization	Vertical

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
52.9453	52.70	-22.32	30.38	40.00	-9.62	QP
88.6524	43.59	-20.53	23.06	43.50	-20.44	QP
189.0743	40.92	-20.18	20.74	43.50	-22.76	QP
222.9502	40.79	-18.93	21.86	46.00	-24.14	QP
375.9385	35.01	-12.73	22.28	46.00	-23.72	QP
576.6443	33.50	-6.69	26.81	46.00	-19.19	QP

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

80.0 dBuV/m

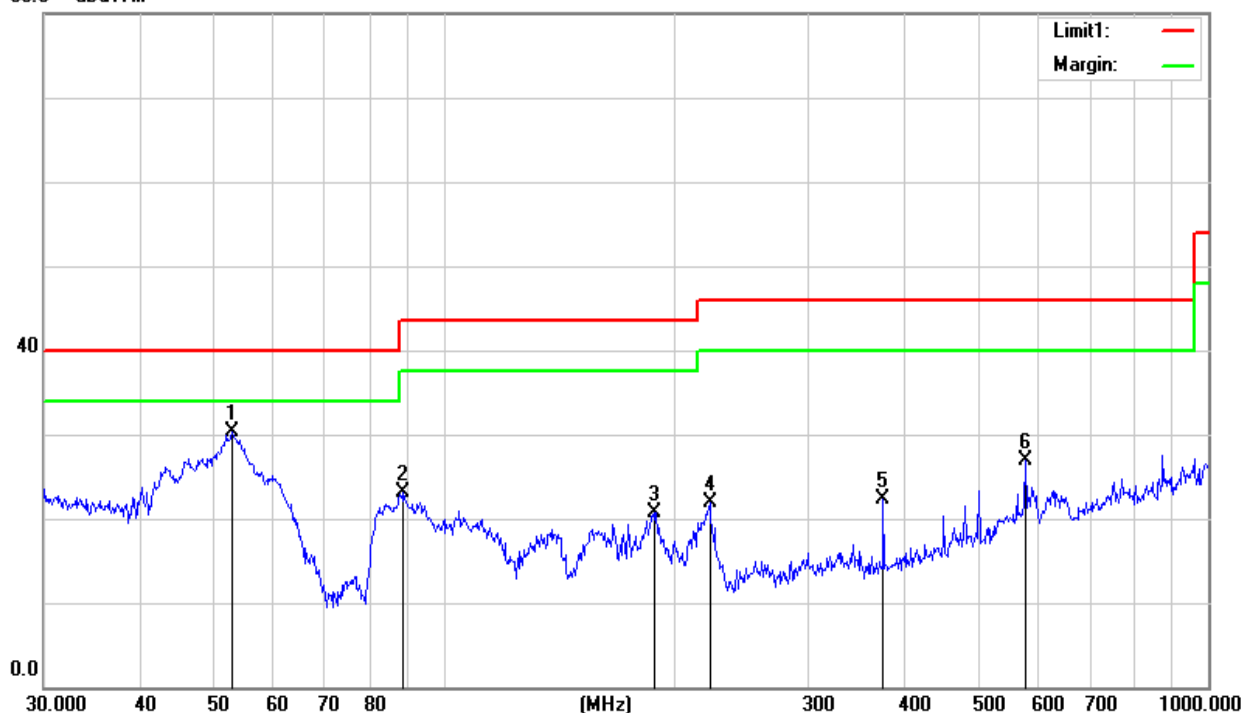



3.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Band I 5150-5250MHz

Band I(5.15-5.25) GHz										
Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11a/ 5180 MHz)										
3258.51	45.01	44.70	6.70	28.20	-9.80	35.21	74.00	-38.79	PK	Vertical
3258.51	40.83	44.70	6.70	28.20	-9.80	31.03	54.00	-22.97	AV	Vertical
3251.07	44.12	44.70	6.70	28.20	-9.80	34.32	74.00	-39.68	PK	Horizontal
3251.07	41.80	44.70	6.70	28.20	-9.80	32.00	54.00	-22.00	AV	Horizontal
3998.15	39.94	44.20	7.90	29.70	-6.60	33.34	74.00	-40.66	PK	Vertical
3998.15	36.34	44.20	7.90	29.70	-6.60	29.74	54.00	-24.26	AV	Vertical
3999.78	40.00	44.20	7.90	29.70	-6.60	33.40	74.00	-40.60	PK	Horizontal
3999.78	35.77	44.20	7.90	29.70	-6.60	29.17	54.00	-24.83	AV	Horizontal
7217.55	37.42	43.50	11.40	35.50	3.40	40.82	74.00	-33.18	PK	Vertical
7217.55	34.27	43.50	11.40	35.50	3.40	37.67	54.00	-16.33	AV	Vertical
7232.73	37.88	43.50	11.40	35.50	3.40	41.28	74.00	-32.72	PK	Horizontal
7232.73	33.67	43.50	11.40	35.50	3.40	37.07	54.00	-16.93	AV	Horizontal
10360.05	39.97	44.50	13.80	38.80	8.10	48.07	74.00	-25.93	PK	Vertical
10360.05	35.78	44.50	13.80	38.80	8.10	43.88	54.00	-10.12	AV	Vertical
10360.18	39.47	44.50	13.80	38.80	8.10	47.57	74.00	-26.43	PK	Horizontal
10360.18	35.69	44.50	13.80	38.80	8.10	43.79	54.00	-10.21	AV	Horizontal
11030.95	33.75	43.60	14.30	39.50	10.20	43.95	74.00	-30.05	PK	Vertical
11030.95	30.58	43.60	14.30	39.50	10.20	40.78	54.00	-13.22	AV	Vertical
11019.39	34.06	43.60	14.30	39.50	10.20	44.26	74.00	-29.74	PK	Horizontal
11019.39	30.81	43.60	14.30	39.50	10.20	41.01	54.00	-12.99	AV	Horizontal
13281.96	31.77	42.60	15.90	38.90	12.20	43.97	74.00	-30.03	PK	Vertical
13281.96	29.40	42.60	15.90	38.90	12.20	41.60	54.00	-12.40	AV	Vertical
13285.48	32.51	42.60	15.90	38.90	12.20	44.71	74.00	-29.29	PK	Horizontal
13285.48	29.08	42.60	15.90	38.90	12.20	41.28	54.00	-12.72	AV	Horizontal
15540.03	31.09	44.10	17.81	39.20	12.91	44.00	74.00	-30.00	PK	Vertical
15540.03	26.64	44.10	17.81	39.20	12.91	39.55	54.00	-14.45	AV	Vertical
15540.12	29.99	44.10	17.81	39.20	12.91	42.90	74.00	-31.10	PK	Horizontal
15540.12	27.45	44.10	17.81	39.20	12.91	40.36	54.00	-13.64	AV	Horizontal



Mid Channel (802.11 a/ 5200 MHz)										
3248.93	44.87	44.70	6.70	28.20	-9.80	35.07	74.00	-38.93	PK	Vertical
3248.93	42.19	44.70	6.70	28.20	-9.80	32.39	54.00	-21.61	AV	Vertical
3257.12	44.83	44.70	6.70	28.20	-9.80	35.03	74.00	-38.97	PK	Horizontal
3257.12	41.70	44.70	6.70	28.20	-9.80	31.90	54.00	-22.10	AV	Horizontal
3988.40	38.87	44.20	7.90	29.70	-6.60	32.27	74.00	-41.73	PK	Vertical
3988.40	37.04	44.20	7.90	29.70	-6.60	30.44	54.00	-23.56	AV	Vertical
3993.70	39.70	44.20	7.90	29.70	-6.60	33.10	74.00	-40.90	PK	Horizontal
3993.70	36.65	44.20	7.90	29.70	-6.60	30.05	54.00	-23.95	AV	Horizontal
7223.82	37.31	43.50	11.40	35.50	3.40	40.71	74.00	-33.29	PK	Vertical
7223.82	33.57	43.50	11.40	35.50	3.40	36.97	54.00	-17.03	AV	Vertical
7225.75	36.51	43.50	11.40	35.50	3.40	39.91	74.00	-34.09	PK	Horizontal
7225.75	34.57	43.50	11.40	35.50	3.40	37.97	54.00	-16.03	AV	Horizontal
10400.01	39.47	44.50	13.80	38.80	8.10	47.57	74.00	-26.43	PK	Vertical
10400.01	35.81	44.50	13.80	38.80	8.10	43.91	54.00	-10.09	AV	Vertical
10399.97	38.82	44.50	13.80	38.80	8.10	46.92	74.00	-27.08	PK	Horizontal
10399.97	35.76	44.50	13.80	38.80	8.10	43.86	54.00	-10.14	AV	Horizontal
11027.14	34.06	43.60	14.30	39.50	10.20	44.26	74.00	-29.74	PK	Vertical
11027.14	30.80	43.60	14.30	39.50	10.20	41.00	54.00	-13.00	AV	Vertical
11022.64	32.91	43.60	14.30	39.50	10.20	43.11	74.00	-30.89	PK	Horizontal
11022.64	30.19	43.60	14.30	39.50	10.20	40.39	54.00	-13.61	AV	Horizontal
13298.69	32.66	42.60	15.90	38.90	12.20	44.86	74.00	-29.14	PK	Vertical
13298.69	28.56	42.60	15.90	38.90	12.20	40.76	54.00	-13.24	AV	Vertical
13287.77	32.41	42.60	15.90	38.90	12.20	44.61	74.00	-29.39	PK	Horizontal
13287.77	29.58	42.60	15.90	38.90	12.20	41.78	54.00	-12.22	AV	Horizontal
15600.08	31.09	42.70	18.00	37.10	12.40	43.49	74.00	-30.51	PK	Vertical
15600.08	26.57	42.70	18.00	37.10	12.40	38.97	54.00	-15.03	AV	Vertical
15600.03	30.98	42.70	18.00	37.10	12.40	43.38	74.00	-30.62	PK	Horizontal
15600.03	27.99	42.70	18.00	37.10	12.40	40.39	54.00	-13.61	AV	Horizontal
17989.48	27.34	42.70	19.40	46.50	23.20	50.54	74.00	-23.46	PK	Vertical
17989.48	25.43	42.70	19.40	46.50	23.20	48.63	54.00	-5.37	AV	Vertical
17998.24	27.10	42.70	19.40	46.50	23.20	50.30	74.00	-23.70	PK	Horizontal
17998.24	19.00	42.70	19.40	46.50	23.20	42.20	54.00	-11.80	AV	Horizontal



Mid Channel (802.11 a/ 5240 MHz)										
3264.91	44.15	44.70	6.70	28.20	-9.80	34.35	74.00	-39.65	PK	Vertical
3264.91	40.82	44.70	6.70	28.20	-9.80	31.02	54.00	-22.98	AV	Vertical
3257.66	44.71	44.70	6.70	28.20	-9.80	34.91	74.00	-39.09	PK	Horizontal
3257.66	40.81	44.70	6.70	28.20	-9.80	31.01	54.00	-22.99	AV	Horizontal
3995.14	39.42	44.20	7.90	29.70	-6.60	32.82	74.00	-41.18	PK	Vertical
3995.14	36.71	44.20	7.90	29.70	-6.60	30.11	54.00	-23.89	AV	Vertical
3994.39	39.65	44.20	7.90	29.70	-6.60	33.05	74.00	-40.95	PK	Horizontal
3994.39	35.99	44.20	7.90	29.70	-6.60	29.39	54.00	-24.61	AV	Horizontal
7230.71	37.91	43.50	11.40	35.50	3.40	41.31	74.00	-32.69	PK	Vertical
7230.71	34.37	43.50	11.40	35.50	3.40	37.77	54.00	-16.23	AV	Vertical
7219.10	37.42	43.50	11.40	35.50	3.40	40.82	74.00	-33.18	PK	Horizontal
7219.10	33.73	43.50	11.40	35.50	3.40	37.13	54.00	-16.87	AV	Horizontal
10480.21	39.55	44.50	13.80	38.80	8.10	47.65	74.00	-26.35	PK	Vertical
10480.21	35.96	44.50	13.80	38.80	8.10	44.06	54.00	-9.94	AV	Vertical
10480.17	39.45	44.50	13.80	38.80	8.10	47.55	74.00	-26.45	PK	Horizontal
10480.17	36.06	44.50	13.80	38.80	8.10	44.16	54.00	-9.84	AV	Horizontal
11019.52	34.19	43.60	14.30	39.50	10.20	44.39	74.00	-29.61	PK	Vertical
11019.52	31.13	43.60	14.30	39.50	10.20	41.33	54.00	-12.67	AV	Vertical
11029.96	34.06	43.60	14.30	39.50	10.20	44.26	74.00	-29.74	PK	Horizontal
11029.96	31.12	43.60	14.30	39.50	10.20	41.32	54.00	-12.68	AV	Horizontal
13280.71	32.18	42.60	15.90	38.90	12.20	44.38	74.00	-29.62	PK	Vertical
13280.71	28.71	42.60	15.90	38.90	12.20	40.91	54.00	-13.09	AV	Vertical
13296.95	31.81	42.60	15.90	38.90	12.20	44.01	74.00	-29.99	PK	Horizontal
13296.95	29.64	42.60	15.90	38.90	12.20	41.84	54.00	-12.16	AV	Horizontal
15719.85	31.09	42.70	19.40	46.50	23.20	54.29	74.00	-19.71	PK	Vertical
15719.85	27.35	42.70	19.40	46.50	23.20	50.55	54.00	-3.45	AV	Vertical
15720.13	30.97	42.70	19.40	46.50	23.20	54.17	74.00	-19.83	PK	Horizontal
15720.13	26.66	42.70	19.40	46.50	23.20	49.86	54.00	-4.14	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (HT-20), 802.11ac (HT-40), 802.11ac (HT-80) the worst case is 802.11a.
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.

**Band IV(5.725-5.850) GHz**

Band IV(5.725-5.85) GHz										
Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11 a/ 5745 MHz)										
3245.61	44.96	44.70	6.70	28.20	-9.80	35.16	74.00	-38.84	PK	Vertical
3245.61	41.02	44.70	6.70	28.20	-9.80	31.22	54.00	-22.78	AV	Vertical
3262.80	44.64	44.70	6.70	28.20	-9.80	34.84	74.00	-39.16	PK	Horizontal
3262.80	41.27	44.70	6.70	28.20	-9.80	31.47	54.00	-22.53	AV	Horizontal
3998.58	39.45	44.20	7.90	29.70	-6.60	32.85	74.00	-41.15	PK	Vertical
3998.58	36.30	44.20	7.90	29.70	-6.60	29.70	54.00	-24.30	AV	Vertical
3981.99	38.92	44.20	7.90	29.70	-6.60	32.32	74.00	-41.68	PK	Horizontal
3981.99	36.45	44.20	7.90	29.70	-6.60	29.85	54.00	-24.15	AV	Horizontal
7221.81	37.02	43.50	11.40	35.50	3.40	40.42	74.00	-33.58	PK	Vertical
7221.81	34.30	43.50	11.40	35.50	3.40	37.70	54.00	-16.30	AV	Vertical
7231.58	37.21	43.50	11.40	35.50	3.40	40.61	74.00	-33.39	PK	Horizontal
7231.58	34.55	43.50	11.40	35.50	3.40	37.95	54.00	-16.05	AV	Horizontal
10520.06	39.87	44.50	13.90	38.80	8.20	48.07	74.00	-25.93	PK	Vertical
10520.06	37.05	44.50	13.90	38.80	8.20	45.25	54.00	-8.75	AV	Vertical
10515.62	39.16	44.50	13.90	38.80	8.20	47.36	74.00	-26.64	PK	Horizontal
10515.62	37.07	44.50	13.90	38.80	8.20	45.27	54.00	-8.73	AV	Horizontal
11400.40	33.07	43.60	14.30	39.50	10.20	43.27	74.00	-30.73	PK	Vertical
11400.40	30.01	43.60	14.30	39.50	10.20	40.21	54.00	-13.79	AV	Vertical
11400.12	33.49	43.60	14.30	39.50	10.20	43.69	74.00	-30.31	PK	Horizontal
11400.12	30.74	43.60	14.30	39.50	10.20	40.94	54.00	-13.06	AV	Horizontal
13286.57	33.01	42.60	15.90	38.90	12.20	45.21	74.00	-28.79	PK	Vertical
13286.57	28.71	42.60	15.90	38.90	12.20	40.91	54.00	-13.09	AV	Vertical
13282.47	32.51	42.60	15.90	38.90	12.20	44.71	74.00	-29.29	PK	Horizontal
13282.47	28.74	42.60	15.90	38.90	12.20	40.94	54.00	-13.06	AV	Horizontal
15780.03	31.09	42.70	18.00	37.10	12.40	43.49	74.00	-30.51	PK	Vertical
15780.03	27.68	42.70	18.00	37.10	12.40	40.08	54.00	-13.92	AV	Vertical
15780.18	30.97	42.70	18.00	37.10	12.40	43.37	74.00	-30.63	PK	Horizontal
15780.18	28.04	42.70	18.00	37.10	12.40	40.44	54.00	-13.56	AV	Horizontal
17234.95	27.81	42.70	19.40	46.50	23.20	51.01	74.00	-22.99	PK	Vertical
17234.95	25.08	42.70	19.40	46.50	23.20	48.28	54.00	-5.72	AV	Vertical
17235.31	27.94	42.70	19.40	46.50	23.20	51.14	74.00	-22.86	PK	Horizontal
17235.31	19.78	42.70	19.40	46.50	23.20	42.98	54.00	-11.02	AV	Horizontal



Mid Channel (802.11 a/ 5785 MHz)										
3252.01	44.58	44.70	6.70	28.20	-9.80	34.78	74.00	-39.22	PK	Vertical
3252.01	41.23	44.70	6.70	28.20	-9.80	31.43	54.00	-22.57	AV	Vertical
3261.99	45.17	44.70	6.70	28.20	-9.80	35.37	74.00	-38.63	PK	Horizontal
3261.99	41.41	44.70	6.70	28.20	-9.80	31.61	54.00	-22.39	AV	Horizontal
3981.49	39.83	44.20	7.90	29.70	-6.60	33.23	74.00	-40.77	PK	Vertical
3981.49	35.89	44.20	7.90	29.70	-6.60	29.29	54.00	-24.71	AV	Vertical
3991.11	39.83	44.20	7.90	29.70	-6.60	33.23	74.00	-40.77	PK	Horizontal
3991.11	35.86	44.20	7.90	29.70	-6.60	29.26	54.00	-24.74	AV	Horizontal
7220.64	36.79	43.50	11.40	35.50	3.40	40.19	74.00	-33.81	PK	Vertical
7220.64	33.90	43.50	11.40	35.50	3.40	37.30	54.00	-16.70	AV	Vertical
7218.16	36.56	43.50	11.40	35.50	3.40	39.96	74.00	-34.04	PK	Horizontal
7218.16	34.27	43.50	11.40	35.50	3.40	37.67	54.00	-16.33	AV	Horizontal
10584.43	39.36	44.50	13.80	38.80	8.10	47.46	74.00	-26.54	PK	Vertical
10584.43	36.11	44.50	13.80	38.80	8.10	44.21	54.00	-9.79	AV	Vertical
10582.37	39.82	44.50	13.80	38.80	8.10	47.92	74.00	-26.08	PK	Horizontal
10582.37	36.09	44.50	13.80	38.80	8.10	44.19	54.00	-9.81	AV	Horizontal
11570.30	32.75	43.60	14.30	39.50	10.20	42.95	74.00	-31.05	PK	Vertical
11570.30	30.41	43.60	14.30	39.50	10.20	40.61	54.00	-13.39	AV	Vertical
11570.25	33.63	43.60	14.30	39.50	10.20	43.83	74.00	-30.17	PK	Horizontal
11570.25	30.10	43.60	14.30	39.50	10.20	40.30	54.00	-13.70	AV	Horizontal
13283.35	31.70	42.60	15.90	38.90	12.20	43.90	74.00	-30.10	PK	Vertical
13283.35	28.63	42.60	15.90	38.90	12.20	40.83	54.00	-13.17	AV	Vertical
13294.32	31.80	42.60	15.90	38.90	12.20	44.00	74.00	-30.00	PK	Horizontal
13294.32	29.45	42.60	15.90	38.90	12.20	41.65	54.00	-12.35	AV	Horizontal
15892.74	31.09	42.70	18.00	37.10	12.40	43.49	74.00	-30.51	PK	Vertical
15892.74	27.21	42.70	18.00	37.10	12.40	39.61	54.00	-14.39	AV	Vertical
15590.68	29.88	42.70	18.00	37.10	12.40	42.28	74.00	-31.72	PK	Horizontal
15590.68	27.04	42.70	18.00	37.10	12.40	39.44	54.00	-14.56	AV	Horizontal
17354.99	28.17	41.80	19.20	42.80	20.20	48.37	74.00	-25.63	PK	Vertical
17354.99	25.20	41.80	19.20	42.80	20.20	45.40	54.00	-8.60	AV	Vertical
17355.23	26.97	41.80	19.20	42.80	20.20	47.17	74.00	-26.83	PK	Horizontal
17355.23	19.83	41.80	19.20	42.80	20.20	40.03	54.00	-13.97	AV	Horizontal



Mid Channel (802.11 a/ 5825 MHz)										
3256.24	43.97	44.70	6.70	28.20	-9.80	34.17	74.00	-39.83	PK	Vertical
3256.24	40.74	44.70	6.70	28.20	-9.80	30.94	54.00	-23.06	AV	Vertical
3257.19	44.50	44.70	6.70	28.20	-9.80	34.70	74.00	-39.30	PK	Horizontal
3257.19	41.72	44.70	6.70	28.20	-9.80	31.92	54.00	-22.08	AV	Horizontal
3989.35	38.82	44.20	7.90	29.70	-6.60	32.22	74.00	-41.78	PK	Vertical
3989.35	36.73	44.20	7.90	29.70	-6.60	30.13	54.00	-23.87	AV	Vertical
3987.22	39.22	44.20	7.90	29.70	-6.60	32.62	74.00	-41.38	PK	Horizontal
3987.22	36.82	44.20	7.90	29.70	-6.60	30.22	54.00	-23.78	AV	Horizontal
7220.52	37.25	43.50	11.40	35.50	3.40	40.65	74.00	-33.35	PK	Vertical
7220.52	34.09	43.50	11.40	35.50	3.40	37.49	54.00	-16.51	AV	Vertical
7221.80	37.00	43.50	11.40	35.50	3.40	40.40	74.00	-33.60	PK	Horizontal
7221.80	34.05	43.50	11.40	35.50	3.40	37.45	54.00	-16.55	AV	Horizontal
10638.85	39.11	44.50	13.80	38.80	8.10	47.21	74.00	-26.79	PK	Vertical
10638.85	36.41	44.50	13.80	38.80	8.10	44.51	54.00	-9.49	AV	Vertical
10640.33	38.93	44.50	13.80	38.80	8.10	47.03	74.00	-26.97	PK	Horizontal
10640.33	36.20	44.50	13.80	38.80	8.10	44.30	54.00	-9.70	AV	Horizontal
11650.36	33.68	43.60	14.30	39.50	10.20	43.88	74.00	-30.12	PK	Vertical
11650.36	29.87	43.60	14.30	39.50	10.20	40.07	54.00	-13.93	AV	Vertical
11650.15	32.74	43.60	14.30	39.50	10.20	42.94	74.00	-31.06	PK	Horizontal
11650.15	30.89	43.60	14.30	39.50	10.20	41.09	54.00	-12.91	AV	Horizontal
13287.07	32.58	42.70	18.00	37.10	12.40	44.98	74.00	-29.02	PK	Vertical
13287.07	29.49	42.70	18.00	37.10	12.40	41.89	54.00	-12.11	AV	Vertical
13284.59	32.69	42.70	18.00	37.10	12.40	45.09	74.00	-28.91	PK	Horizontal
13284.59	29.41	42.70	18.00	37.10	12.40	41.81	54.00	-12.19	AV	Horizontal
17475.27	31.09	41.80	19.20	42.80	20.20	51.29	74.00	-22.71	PK	Vertical
17475.27	26.86	41.80	19.20	42.80	20.20	47.06	54.00	-6.94	AV	Vertical
17474.84	30.11	41.80	19.20	42.80	20.20	50.31	74.00	-23.69	PK	Horizontal
17474.84	27.06	41.80	19.20	42.80	20.20	47.26	54.00	-6.74	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (HT-20), 802.11ac (HT-40), 802.11ac (HT-80) the worst case is 802.11a.

3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



3.2.8 BAND EDGE

Band I&II(5.15-5.35)GHz

Band I(5.15-5.35) GHz										
Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11a BW20MHz										
5150	39.98	44.20	8.98	31.60	-3.62	36.36	74	-37.64	Peak	Vertical
5150	29.87	44.20	8.98	31.60	-3.62	26.25	54	-27.75	AVG	Vertical
5150	41.77	44.20	8.98	31.60	-3.62	38.15	74	-35.85	Peak	Horizontal
5150	27.56	44.20	8.98	31.60	-3.62	23.94	54	-30.06	AVG	Horizontal
5350	46.43	44.20	9.35	31.60	-3.25	43.18	74	-30.82	Peak	Vertical
5350	31.69	44.20	9.35	31.60	-3.25	28.44	54	-25.56	AVG	Vertical
5350	40.66	44.20	9.35	31.60	-3.25	37.41	74	-36.59	Peak	Horizontal
5350	28.50	44.20	9.35	31.60	-3.25	25.25	54	-28.75	AVG	Horizontal
802.11n BW20MHz										
5150	39.41	44.20	8.98	31.60	-3.62	35.79	74	-38.21	Peak	Vertical
5150	31.47	44.20	8.98	31.60	-3.62	27.85	54	-26.15	AVG	Vertical
5150	41.44	44.20	8.98	31.60	-3.62	37.82	74	-36.18	Peak	Horizontal
5150	28.94	44.20	8.98	31.60	-3.62	25.32	54	-28.68	AVG	Horizontal
5350	45.52	44.20	9.35	31.60	-3.25	42.27	74	-31.73	Peak	Vertical
5350	27.65	44.20	9.35	31.60	-3.25	24.40	54	-29.60	AVG	Vertical
5350	41.63	44.20	9.35	31.60	-3.25	38.38	74	-35.62	Peak	Horizontal
5350	31.33	44.20	9.35	31.60	-3.25	28.08	54	-25.92	AVG	Horizontal
802.11n BW40MHz										
5150	41.07	44.20	8.98	31.60	-3.62	37.45	74	-36.55	Peak	Vertical
5150	29.10	44.20	8.98	31.60	-3.62	25.48	54	-28.52	AVG	Vertical
5150	41.91	44.20	8.98	31.60	-3.62	38.29	74	-35.71	Peak	Horizontal
5150	30.49	44.20	8.98	31.60	-3.62	26.87	54	-27.13	AVG	Horizontal
5350	46.26	44.20	9.35	31.60	-3.25	43.01	74	-30.99	Peak	Vertical
5350	29.45	44.20	9.35	31.60	-3.25	26.20	54	-27.80	AVG	Vertical
5350	40.21	44.20	9.35	31.60	-3.25	36.96	74	-37.04	Peak	Horizontal
5350	28.34	44.20	9.35	31.60	-3.25	25.09	54	-28.91	AVG	Horizontal



802.11ac BW20MHz										
5150	40.29	44.20	8.98	31.60	-3.62	36.67	74	-37.33	Peak	Vertical
5150	29.46	44.20	8.98	31.60	-3.62	25.84	54	-28.16	AVG	Vertical
5150	41.94	44.20	8.98	31.60	-3.62	38.32	74	-35.68	Peak	Horizontal
5150	28.21	44.20	8.98	31.60	-3.62	24.59	54	-29.41	AVG	Horizontal
5350	44.97	44.20	9.35	31.60	-3.25	41.72	74	-32.28	Peak	Vertical
5350	30.85	44.20	9.35	31.60	-3.25	27.60	54	-26.40	AVG	Vertical
5350	39.67	44.20	9.35	31.60	-3.25	36.42	74	-37.58	Peak	Horizontal
5350	30.47	44.20	9.35	31.60	-3.25	27.22	54	-26.78	AVG	Horizontal
802.11ac BW40MHz										
5150	41.37	44.20	8.98	31.60	-3.62	37.75	74	-36.25	Peak	Vertical
5150	29.40	44.20	8.98	31.60	-3.62	25.78	54	-28.22	AVG	Vertical
5150	39.78	44.20	8.98	31.60	-3.62	36.16	74	-37.84	Peak	Horizontal
5150	28.12	44.20	8.98	31.60	-3.62	24.50	54	-29.50	AVG	Horizontal
5350	44.22	44.20	9.35	31.60	-3.25	40.97	74	-33.03	Peak	Vertical
5350	31.76	44.20	9.35	31.60	-3.25	28.51	54	-25.49	AVG	Vertical
5350	39.23	44.20	9.35	31.60	-3.25	35.98	74	-38.02	Peak	Horizontal
5350	31.49	44.20	9.35	31.60	-3.25	28.24	54	-25.76	AVG	Horizontal
802.11ac BW80MHz										
5150	40.55	44.20	8.98	31.60	-3.62	36.93	74	-37.07	Peak	Vertical
5150	30.32	44.20	8.98	31.60	-3.62	26.70	54	-27.30	AVG	Vertical
5150	39.19	44.20	8.98	31.60	-3.62	35.57	74	-38.43	Peak	Horizontal
5150	30.19	44.20	8.98	31.60	-3.62	26.57	54	-27.43	AVG	Horizontal
5350	45.95	44.20	9.35	31.60	-3.25	42.70	74	-31.30	Peak	Vertical
5350	31.15	44.20	9.35	31.60	-3.25	27.90	54	-26.10	AVG	Vertical
5350	38.59	44.20	9.35	31.60	-3.25	35.34	74	-38.66	Peak	Horizontal
5350	31.49	44.20	9.35	31.60	-3.25	28.24	54	-25.76	AVG	Horizontal

**Band IV(5.725-5.85 GHz)**

Band IV(5.725-5.85 GHz)										
Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
802.11a BW20MHz										
5725	40.00	44.20	10.00	32.00	-2.20	37.80	74	-36.20	Peak	Vertical
5725	29.27	44.20	10.00	32.00	-2.20	27.07	54	-26.93	AVG	Vertical
5725	37.87	44.20	10.00	32.00	-2.20	35.67	74	-38.33	Peak	Horizontal
5725	30.62	44.20	10.00	32.00	-2.20	28.42	54	-25.58	AVG	Horizontal
5850	45.02	44.20	10.20	32.00	-2.00	43.02	74	-30.98	Peak	Vertical
5850	27.72	44.20	10.20	32.00	-2.00	25.72	54	-28.28	AVG	Vertical
5850	38.63	44.20	10.20	32.00	-2.00	36.63	74	-37.37	Peak	Horizontal
5850	31.14	44.20	10.20	32.00	-2.00	29.14	54	-24.86	AVG	Horizontal
802.11n BW20MHz										
5725	41.28	44.20	10.00	32.00	-2.20	39.08	74	-34.92	Peak	Vertical
5725	30.55	44.20	10.00	32.00	-2.20	28.35	54	-25.65	AVG	Vertical
5725	41.86	44.20	10.00	32.00	-2.20	39.66	74	-34.34	Peak	Horizontal
5725	30.29	44.20	10.00	32.00	-2.20	28.09	54	-25.91	AVG	Horizontal
5850	46.53	44.20	10.20	32.00	-2.00	44.53	74	-29.47	Peak	Vertical
5850	30.60	44.20	10.20	32.00	-2.00	28.60	54	-25.40	AVG	Vertical
5850	40.31	44.20	10.20	32.00	-2.00	38.31	74	-35.69	Peak	Horizontal
5850	27.84	44.20	10.20	32.00	-2.00	25.84	54	-28.16	AVG	Horizontal
802.11n BW40MHz										
5725	41.39	44.20	10.00	32.00	-2.20	39.19	74	-34.81	Peak	Vertical
5725	31.19	44.20	10.00	32.00	-2.20	28.99	54	-25.01	AVG	Vertical
5725	39.64	44.20	10.00	32.00	-2.20	37.44	74	-36.56	Peak	Horizontal
5725	30.47	44.20	10.00	32.00	-2.20	28.27	54	-25.73	AVG	Horizontal
5850	45.41	44.20	10.20	32.00	-2.00	43.41	74	-30.59	Peak	Vertical
5850	31.08	44.20	10.20	32.00	-2.00	29.08	54	-24.92	AVG	Vertical
5850	38.50	44.20	10.20	32.00	-2.00	36.50	74	-37.50	Peak	Horizontal
5850	28.73	44.20	10.20	32.00	-2.00	26.73	54	-27.27	AVG	Horizontal



802.11ac BW20MHz										
5725	41.53	44.20	10.00	32.00	-2.20	39.33	74	-34.67	Peak	Vertical
5725	30.17	44.20	10.00	32.00	-2.20	27.97	54	-26.03	AVG	Vertical
5725	37.90	44.20	10.00	32.00	-2.20	35.70	74	-38.30	Peak	Horizontal
5725	29.83	44.20	10.00	32.00	-2.20	27.63	54	-26.37	AVG	Horizontal
5850	44.15	44.20	10.20	32.00	-2.00	42.15	74	-31.85	Peak	Vertical
5850	31.81	44.20	10.20	32.00	-2.00	29.81	54	-24.19	AVG	Vertical
5850	38.21	44.20	10.20	32.00	-2.00	36.21	74	-37.79	Peak	Horizontal
5850	28.40	44.20	10.20	32.00	-2.00	26.40	54	-27.60	AVG	Horizontal
802.11ac BW40MHz										
5725	40.34	44.20	10.00	32.00	-2.20	38.14	74	-35.86	Peak	Vertical
5725	28.52	44.20	10.00	32.00	-2.20	26.32	54	-27.68	AVG	Vertical
5725	39.25	44.20	10.00	32.00	-2.20	37.05	74	-36.95	Peak	Horizontal
5725	31.13	44.20	10.00	32.00	-2.20	28.93	54	-25.07	AVG	Horizontal
5850	46.55	44.20	10.20	32.00	-2.00	44.55	74	-29.45	Peak	Vertical
5850	28.81	44.20	10.20	32.00	-2.00	26.81	54	-27.19	AVG	Vertical
5850	38.70	44.20	10.20	32.00	-2.00	36.70	74	-37.30	Peak	Horizontal
5850	31.63	44.20	10.20	32.00	-2.00	29.63	54	-24.37	AVG	Horizontal
802.11ac BW80MHz										
5725	40.37	44.20	10.00	32.00	-2.20	38.17	74	-35.83	Peak	Vertical
5725	28.12	44.20	10.00	32.00	-2.20	25.92	54	-28.08	AVG	Vertical
5725	40.85	44.20	10.00	32.00	-2.20	38.65	74	-35.35	Peak	Horizontal
5725	31.79	44.20	10.00	32.00	-2.20	29.59	54	-24.41	AVG	Horizontal
5850	45.29	44.20	10.20	32.00	-2.00	43.29	74	-30.71	Peak	Vertical
5850	29.37	44.20	10.20	32.00	-2.00	27.37	54	-26.63	AVG	Vertical
5850	41.20	44.20	10.20	32.00	-2.00	39.20	74	-34.80	Peak	Horizontal
5850	30.24	44.20	10.20	32.00	-2.00	28.24	54	-25.76	AVG	Horizontal



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.1.1 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHZ}$ is available on nearly all spectrum analyzers.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

Data see Appendix B





5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

See list of measuring instruments of this test report.


5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW \geq RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM

STANDARD No deviation.

5.1.3 TEST SETUP

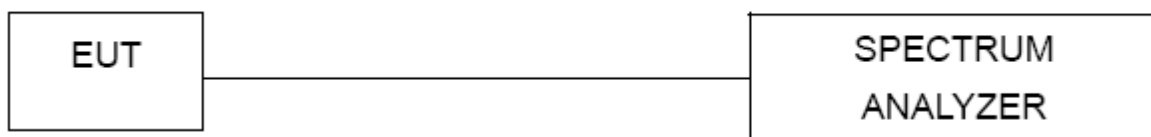

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Data see Appendix C



5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth:

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v01r03.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5 TEST RESULTS

Data See Appendix C

5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v01r03.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

Data see Appendix D

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
15.407(a) (3)		1 watt	5725-5825	

6.1.1 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS Band I (5.15-5.25GHz)**

Band I (5.15-5.25GHz)			
Test Channel	Frequency (MHz)	PK Power (dBm)	LIMIT (dBm)
802.11a			
36	5180	7.89	23.98
40	5200	7.19	23.98
48	5240	6.61	23.98
802.11n(HT20)			
36	5180	7.40	23.98
40	5200	6.78	23.98
48	5240	6.30	23.98
802.11n(HT40)			
38	5190	7.74	23.98
46	5230	6.87	23.98
802.11ac(HT20)			
36	5180	5.23	23.98
40	5200	4.48	23.98
48	5240	3.50	23.98
802.11ac(HT40)			
38	5190	4.79	23.98
46	5230	3.76	23.98
802.11ac(HT80)			
42	5210	4.28	23.98

Note:

1. For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W.

**Band IV (5.725-5.85GHz)**

Band IV (5.725-5.85GHz)			
Test Channel	Frequency (MHz)	PK Power (dBm)	LIMIT (dBm)
802.11a			
149	5745	4.02	30
157	5785	2.84	30
165	5825	1.32	30
802.11n(HT20)			
149	5745	3.270	30
157	5785	2.530	30
165	5825	1.140	30
802.11n(HT40)			
151	5755	3.380	30
159	5795	2.440	30
802.11ac(HT20)			
149	5745	0.070	30
157	5785	-0.490	30
165	5825	-1.960	30
802.11ac(HT40)			
151	5755	0.170	30
159	5795	-0.890	30
802.11ac(HT80)			
155	5775	-0.220	30

Note:

1. For the band 5.745-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W.

7. FREQUENCY STABILITY MEASUREMENT

7.1 LIMIT OF FREQUENCY STABILITY

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an Emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.1.1 MEASURING INSTRUMENTS

See list of measuring instruments of this test report.

7.1.2 TEST PROCEDURES

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

7.1.3 TEST SETUP





7.1.4 TEST RESULTS

NOTE: 1. all bandwidth and mode been test, Only the worst data.

Voltage	Band I (5.15-5.25GHz) Measurement Frequency(MHz)
AC (V)	5200
138VAC	5199.9216
120VAC	5199.9260
102VAC	5199.9248
Max.Deviation(MHz)	0.0784
Max.Deviation(ppm)	15.08

Temperature Vs. Frequency Stability:

Temperature	Measurement Frequency(MHz)
(°C)	5200
-30	5199.9312
-20	5199.9283
-10	5199.9254
0	5199.9241
10	5199.9253
20	5199.9282
30	5199.9280
40	5199.9264
50	5199.9246
Max.Deviation(MHz)	0.0759
Max.Deviation(ppm)	14.60



Voltage	Band IV (5.725-5.85GHz) Measurement Frequency(MHz)
AC (V)	5785
138VAC	5784.9260
120VAC	5784.9231
102VAC	5784.9250
Max.Deviation(MHz)	0.0769
Max.Deviation(ppm)	14.79

Temperature Vs. Frequency Stability:

Temperature	Measurement Frequency(MHz)
(°C)	5785
-30	5784.9307
-20	5784.9267
-10	5784.9234
0	5784.9252
10	5784.9244
20	5784.9230
30	5784.9233
40	5784.9258
50	5784.9250
Max.Deviation(MHz)	0.0770
Max.Deviation(ppm)	13.31



8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission





9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



9.2 EUT ANTENNA

The EUT antenna is Dipole Antenna. It comply with the standard requirement.



APPENDIX - PHOTOS OF TEST SETUP

Radiated Measurement Photos

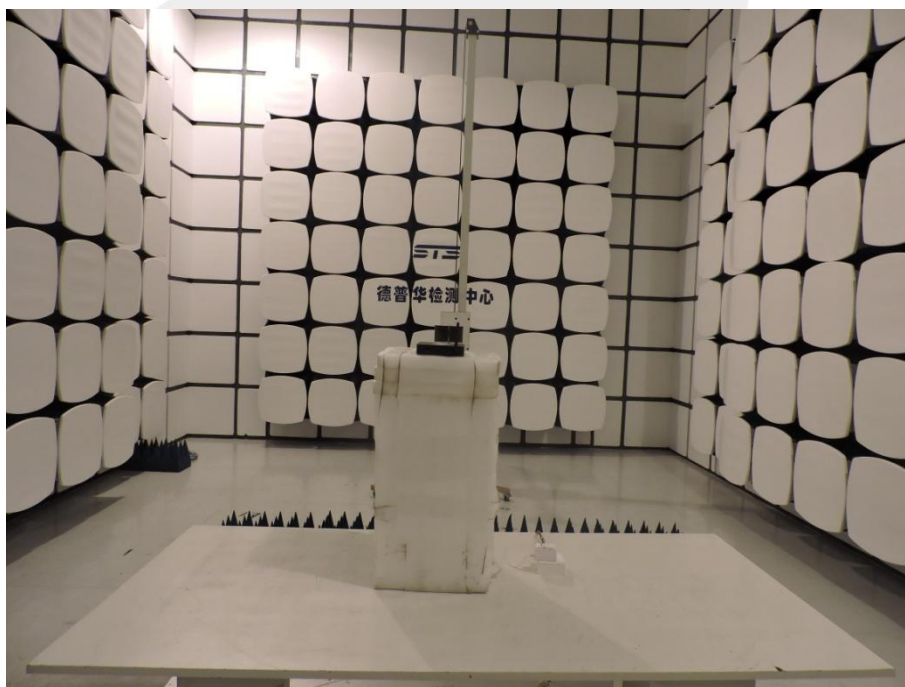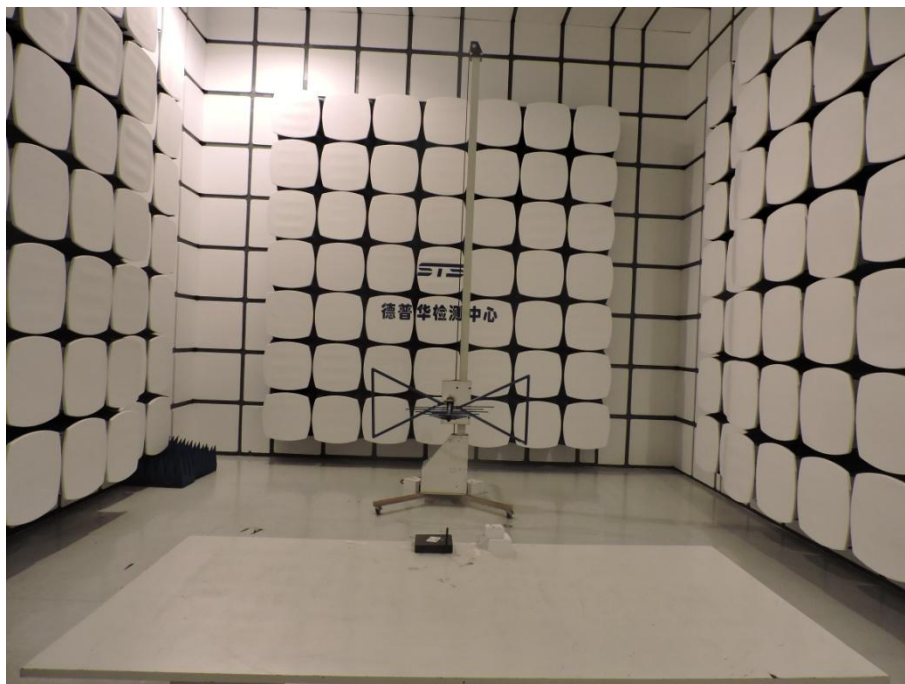

Conducted Measurement Photos



※※※※※END OF THE REPORT※※※※※