

# FCC Part 22H & 24E Measurement and Test Report

For

Tekview Limited

Unit 8 George Holmes Business Centre George Holmes Way Swadlincote

Derbyshire DE11 9DF United Kingdom

**FCC ID: 2AJWI-POWERTXT**

**FCC Rules:** FCC Part 22H, FCC Part 24E

**Product Description:** 3G power socket

**Tested Model:** POWERTXT USA

**Report No.:** STR16088315I

**Tested Date:** 2016-08-31 to 2016-09-22

**Issued Date:** 2016-09-23

**Tested By:** Neil Wang / Engineer

*Neil Wang.*

**Reviewed By:** Silin Chen / EMC Manager

*Silin Chen*

**Approved & Authorized By:** Jandy So / PSQ Manager

*Jandy So*

**Prepared By:**

**Shenzhen SEM.Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>3. RF EXPOSURE.....</b>	<b>9</b>
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
<b>4. RF OUTPUT POWER.....</b>	<b>10</b>
4.1 STANDARD APPLICABLE.....	10
4.2 TEST PROCEDURE.....	10
4.3 ENVIRONMENTAL CONDITIONS.....	10
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	11
<b>5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....</b>	<b>16</b>
5.1 STANDARD APPLICABLE.....	16
5.2 TEST PROCEDURE.....	16
5.3 ENVIRONMENTAL CONDITIONS.....	16
5.4 SUMMARY OF TEST RESULTS.....	17
<b>6. EMISSION BANDWIDTH.....</b>	<b>19</b>
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 ENVIRONMENTAL CONDITIONS.....	19
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	20
<b>7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....</b>	<b>31</b>
7.1 STANDARD APPLICABLE.....	31
7.2 TEST PROCEDURE.....	31
7.3 ENVIRONMENTAL CONDITIONS.....	31
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	32
<b>8. SPURIOUS RADIATED EMISSIONS.....</b>	<b>56</b>
8.1 STANDARD APPLICABLE.....	56
8.2 TEST PROCEDURE.....	56
8.3 ENVIRONMENTAL CONDITIONS.....	56
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	56
<b>9. FREQUENCY STABILITY.....</b>	<b>67</b>
9.1 STANDARD APPLICABLE.....	67
9.2 TEST PROCEDURE.....	67
9.3 ENVIRONMENTAL CONDITIONS.....	67
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	68

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Tekview Limited  
Address of applicant: Unit 8 George Holmes Business Centre George Holmes Way  
Swadlincote Derbyshire DE11 9DF United Kingdom

Manufacturer: Xiamen SimPal Communication Technology Co., Ltd.  
Address of manufacturer: 3F, No 2208, Dianqian Group II, Gaodian Village, Huli District,  
Xiamen

General Description of EUT:	
Product Name:	3G power socket
Brand Name:	POWRRTXT
Model No.:	POWERTXT USA
Hardware version:	T400-V0.3
Software version:	T4-3G(ENG)20160805
Rated Voltage:	AC 110-230V
Battery:	/
Device Category:	Fixed Device
Note: The test data is gathered from a production sample provided by the manufacturer.	

Technical Characteristics of EUT:	
<b>2G</b>	
Support Networks:	GPRS
Support Band:	GSM850/PCS1900
Uplink Frequency:	GPRS 850: 824~849MHz, GPRS 1900: 1850~1910MHz
Downlink Frequency:	GPRS 850: 869~894MHz, GPRS 1900: 1930~1990MHz
Max RF Output Power:	GPRS850: 33.04dBm, GPRS1900: 28.20dBm
Type of Emission:	GSM850: 249KGXW, GSM1900: 250KGXW
Type of Modulation:	GMSK
Type of Antenna:	Integral Antenna
Antenna Gain:	2.0dBi
GPRS Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.73dBm, WCDMA Band 5: 22.61dBm
Type of Emission:	WCDMA Band 2: 4M16F9W WCDMA Band 5: 4M19F9W
Type of Modulation:	BPSK, QPSK
Antenna Type:	Integral Antenna
Antenna Gain:	2.0dBi

## 1.2 Test Standards

The following report is prepared on behalf of the Tekview Limited in accordance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI/TIA-603-D: 2010 and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 971168 D01 Power Meas License Digital Systems v02r02 shall be performed also.

## 1.4 Test Facility

- **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

- **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101)

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GPRS 850	Low, Middle, High Channels
TM2	GPRS 1900	Low, Middle, High Channels
TM3	WCDMA Band 5	Low, Middle, High Channels
TM4	HSDPA Band 5	Low, Middle, High Channels
TM5	WCDMA Band 2	Low, Middle, High Channels
TM6	HSDPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

## Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2016-06-04	2017-06-03
SEMT-1034	GSM Tester	Rohde & Schwarz	CMU200	104036	2016-06-04	2017-06-03
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2016-06-04	2017-06-03
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2016-06-04	2017-06-03
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2016-06-04	2017-06-03
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2016-06-04	2017-06-03
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c)	RF Output Power	Compliant
§ 24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b)	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a)	Out of Band Emissions	Compliant
§ 22.355, § 24.235	Frequency Stability	Compliant



### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF exposure report.

## 4. RF Output Power

### 4.1 Standard Applicable


According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

### 4.2 Test Procedure

Conducted output power test method:



Radiated power test method:

- 1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### 4.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### 4.4 Summary of Test Results/Plots

##### Max. Radiated Power

##### ERP For GPRS Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	23.88	1.5	0	H	1.5	0	22.38	38.45
824.2	23.45	1.5	0	V	1.5	0	21.95	38.45
Middle Channel								
836.4	24.89	1.5	0	H	1.5	0	23.39	38.45
836.4	23.5	1.5	0	V	1.5	0	22	38.45
High Channel								
848.8	22.85	1.5	0	H	1.5	0	21.35	38.45
848.8	23.74	1.5	0	V	1.5	0	22.24	38.45

##### EIRP For GPRS Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	13.58	1.5	0	H	1.9	7.7	19.38	33
1850.2	12.94	1.5	0	V	1.9	7.7	18.74	33
Middle Channel								
1880	14.96	1.5	0	H	1.9	7.7	20.76	33
1880	13.27	1.5	0	V	1.9	7.7	19.07	33
High Channel								
1909.8	14.55	1.5	0	H	1.9	7.7	20.35	33
1909.8	12.14	1.5	0	V	1.9	7.7	17.94	33

## ERP For WCDMA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	24.02	1.5	0	H	1.5	0	22.52	38.45
826.4	22.01	1.5	0	V	1.5	0	20.51	38.45
Middle Channel								
836.6	23.25	1.5	0	H	1.5	0	21.75	38.45
836.6	22.89	1.5	0	V	1.5	0	21.39	38.45
High Channel								
846.6	22.08	1.5	0	H	1.5	0	20.58	38.45
846.6	23.53	1.5	0	V	1.5	0	22.03	38.45

## ERP For HSDPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	20.67	1.5	0	H	1.5	0	19.17	38.45
826.4	22.68	1.5	0	V	1.5	0	21.18	38.45
Middle Channel								
836.6	19.17	1.5	0	H	1.5	0	17.67	38.45
836.6	20.3	1.5	0	V	1.5	0	18.8	38.45
High Channel								
846.6	19.6	1.5	0	H	1.5	0	18.1	38.45
846.6	22.14	1.5	0	V	1.5	0	20.64	38.45

## EIRP For WCDMA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	15.31	1.5	0	H	1.9	7.7	21.11	33
1852.4	13.84	1.5	0	V	1.9	7.7	19.64	33
Middle Channel								
1880	15.99	1.5	0	H	1.9	7.7	21.79	33
1880	14.68	1.5	0	V	1.9	7.7	20.48	33
High Channel								
1907.6	14.45	1.5	0	H	1.9	7.7	20.25	33
1907.6	13.76	1.5	0	V	1.9	7.7	19.56	33

## EIRP For HSDPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	14.48	1.5	0	H	1.9	7.7	20.28	33
1852.4	12.5	1.5	0	V	1.9	7.7	18.3	33
Middle Channel								
1880	13.27	1.5	0	H	1.9	7.7	19.07	33
1880	12.11	1.5	0	V	1.9	7.7	17.91	33
High Channel								
1907.6	15.03	1.5	0	H	1.9	7.7	20.83	33
1907.6	14.7	1.5	0	V	1.9	7.7	20.5	33

Note: Result = Substitute - Cable loss + Antenna Gain

## Max. Conducted Output Power

For Cellular Band (GPRS850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GPRS(1 Slot)	Low Channel	824.2	32.97	38.45
	Middle Channel	836.6	32.85	38.45
	High Channel	848.8	33.04	38.45

For PCS Band (GPRS1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GPRS(1 Slot)	Low Channel	1850.2	28.20	33.0
	Middle Channel	1880.0	28.20	33.0
	High Channel	1909.8	28.14	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	22.53	38.45
	Middle Channel	836.6	21.79	38.45
	High Channel	846.6	22.02	38.45
HSDPA	Low Channel	826.4	22.38	38.45
	Middle Channel	836.6	22.61	38.45
	High Channel	846.6	21.95	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	22.73	33
	Middle Channel	1880.0	21.35	33
	High Channel	1907.6	21.95	33
HSDPA	Low Channel	1852.4	22.11	33
	Middle Channel	1880.0	21.45	33
	High Channel	1907.6	22.5	33

## 5. Peak-to-average Ratio (PAR) of Transmitter

### 5.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

### 5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

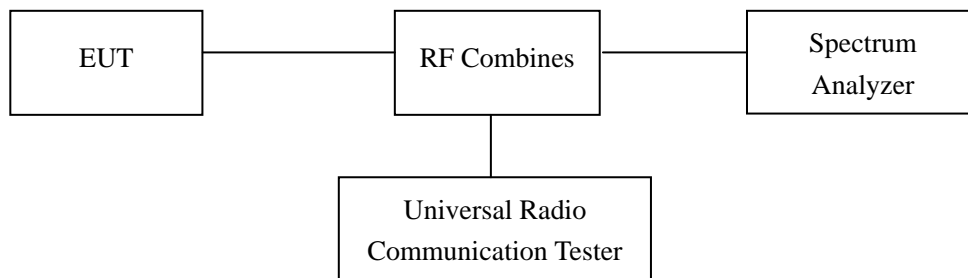

### 5.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar



## 5.4 Summary of Test Results

Only the worst case was selected to record


For PCS Band

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GPRS(1 Slot)	661	1880	2.62	13


For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	7.33	13
HSDPA	9262	1852.4	7.36	13


GPRS Low Channel:

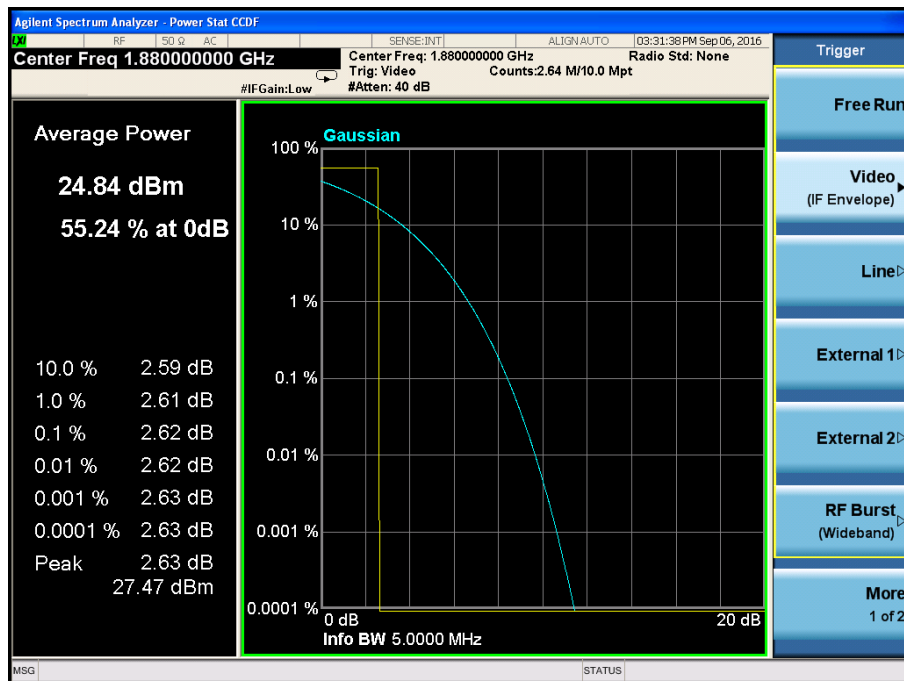

WCDMA Band 2 Low Channel:

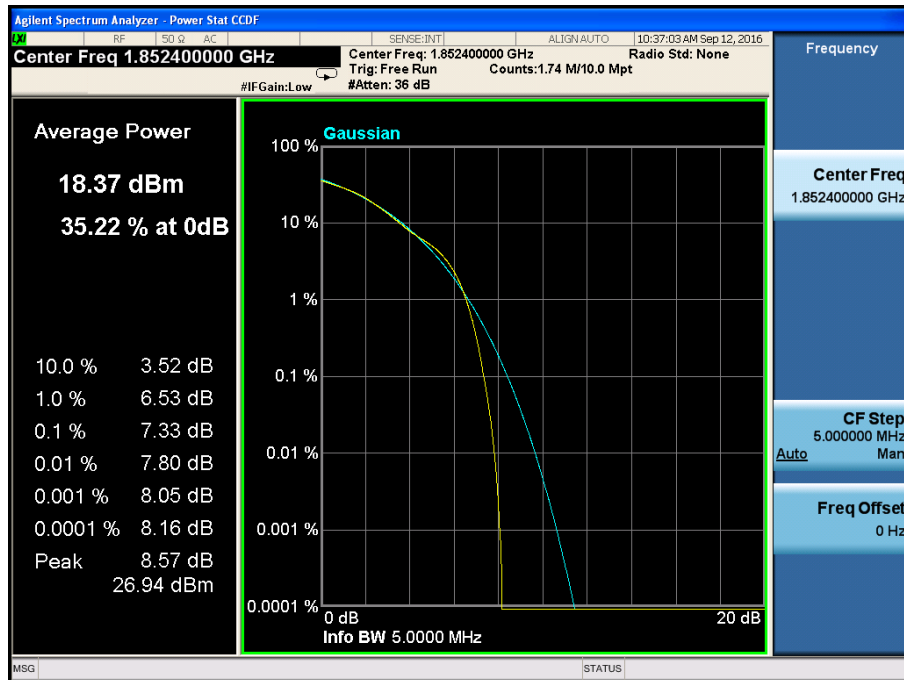

HSDPA Band 2 Low Channel:

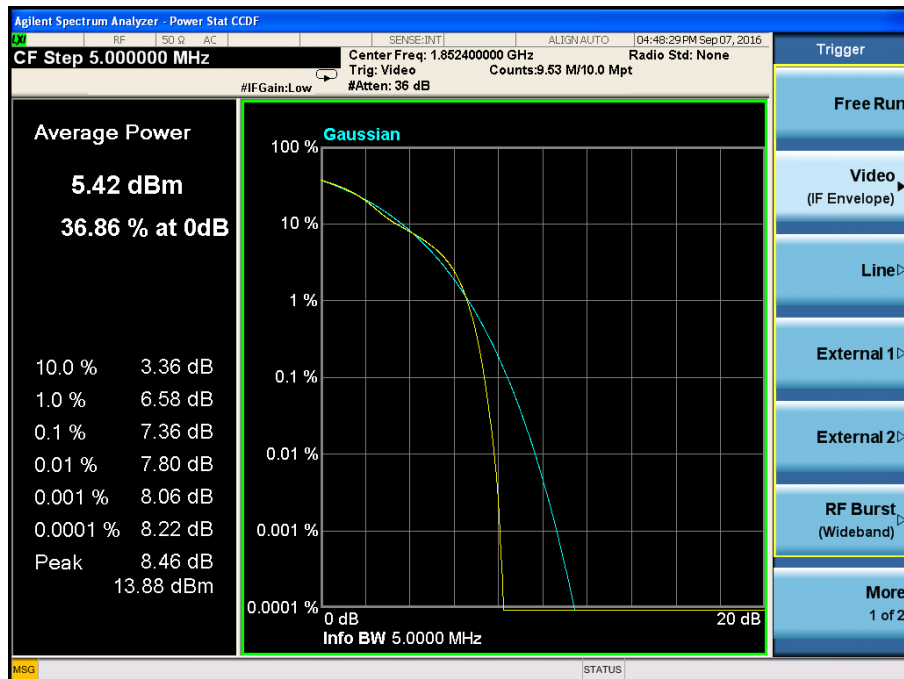

## 6. Emission Bandwidth

### 6.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

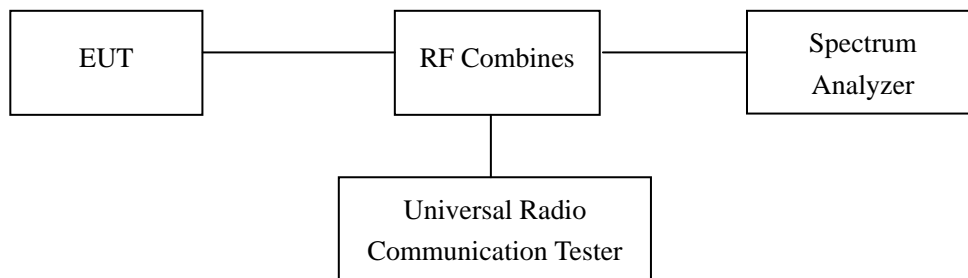

### 6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 6.4 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GPRS	128	824.2	248.42	332.5
	190	836.6	248.85	336.2
	251	848.8	248.38	332.3

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GPRS	512	1850.2	247.66	334.1
	661	1880.0	249.26	335.3
	810	1909.8	250.46	334.7


For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	4132	826.4	4.1913	4.625
	4183	836.6	4.1383	4.619
	4233	846.6	4.1624	4.613
HSDPA	4132	826.4	4.1586	4.611
	4183	836.6	4.1726	4.644
	4233	846.6	4.1726	4.629


For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	9262	1852.4	4.1541	4.617
	9400	1880	4.1600	4.576
	9538	1907.6	4.1225	4.604
HSDPA	9262	1852.4	4.1647	4.608
	9400	1880	4.1487	4.625
	9538	1907.6	4.1362	4.597


For Cellular Band  
GPRS Low Channel

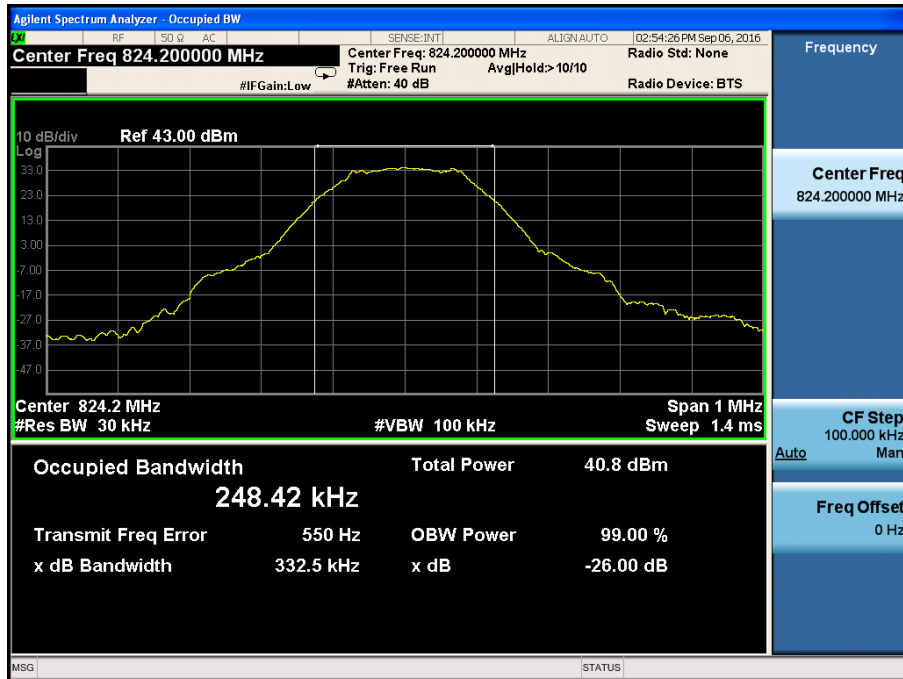

GPRS Middle Channel

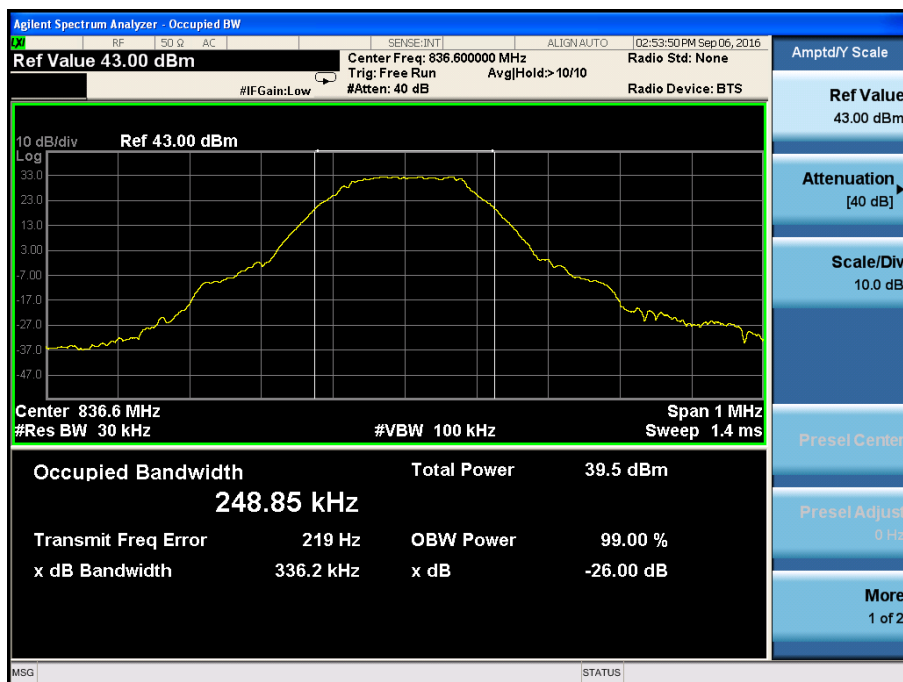


## GPRS High Channel

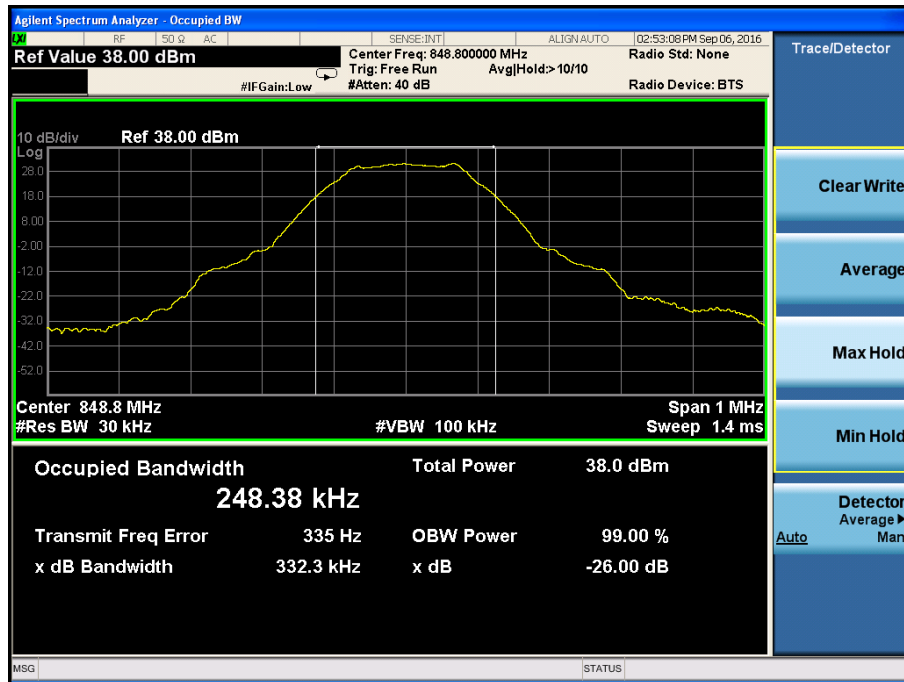


## For PCS Band


## GPRS Low Channel

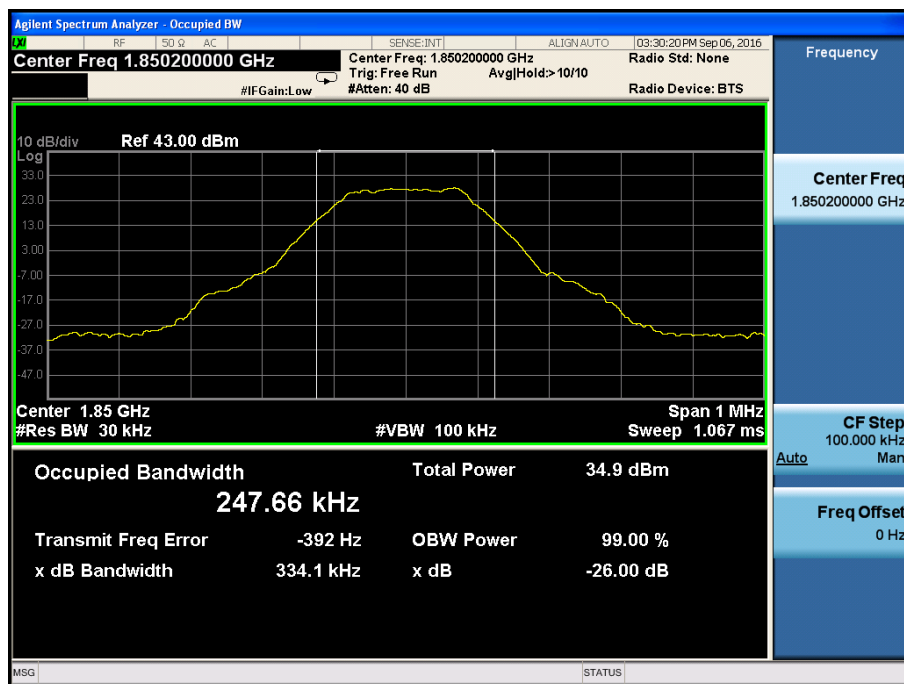

### GPRS Middle Channel

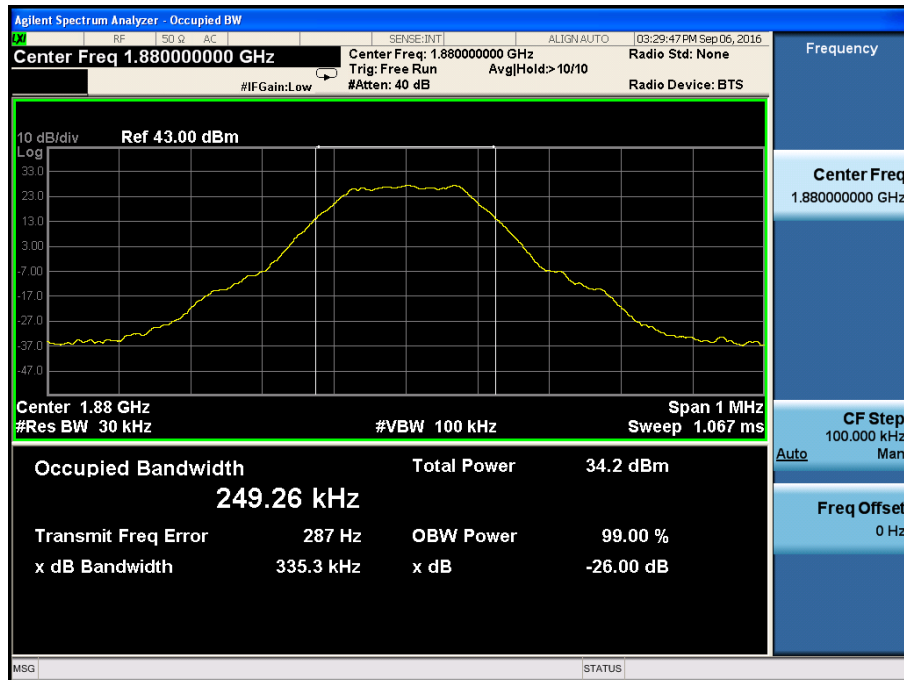


### GPRS High Channel

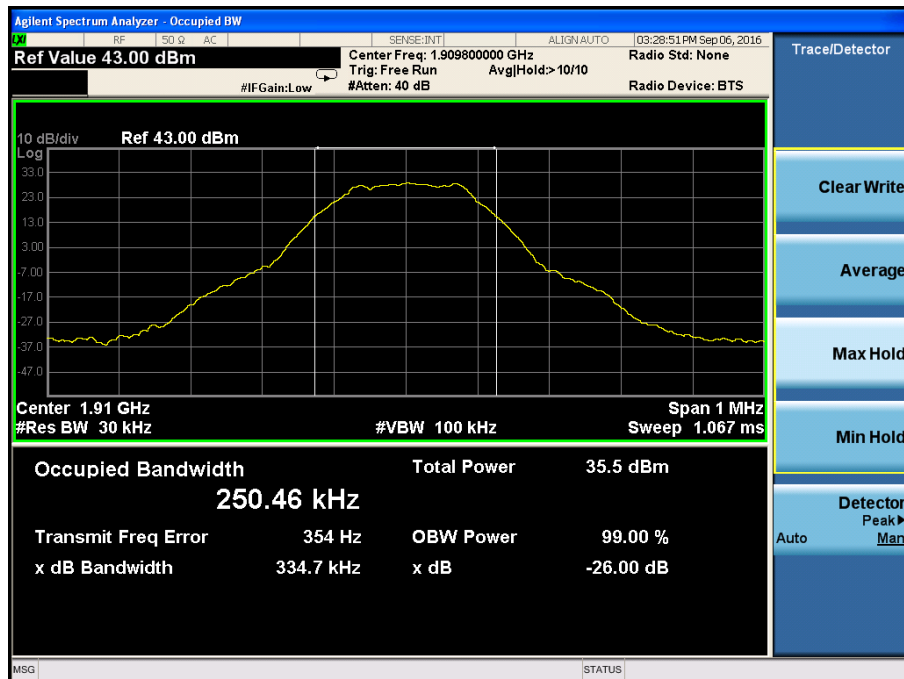





For Band V  
WCDMA Low Channel

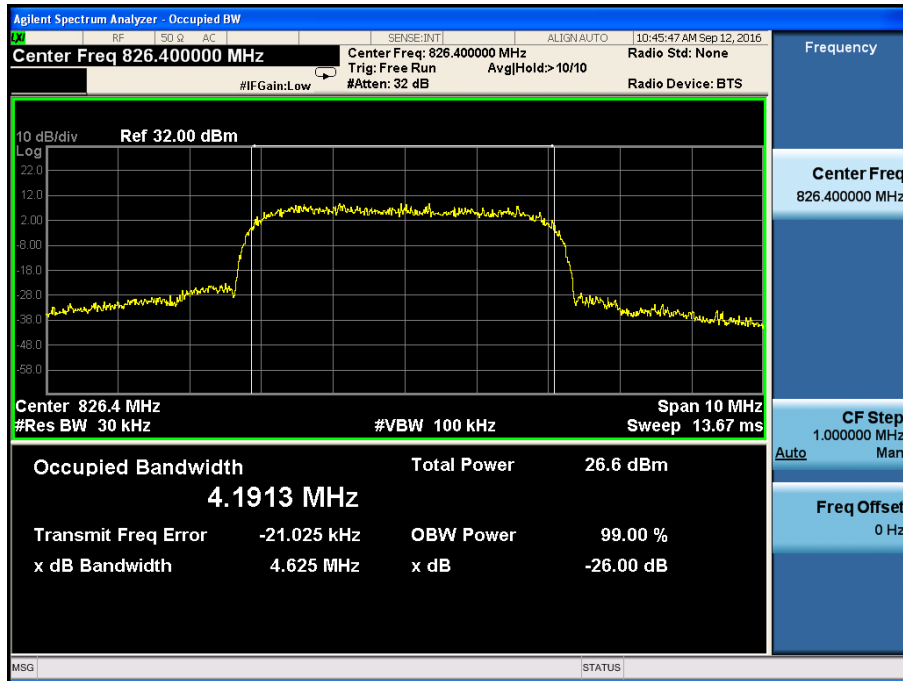


WCDMA Middle Channel

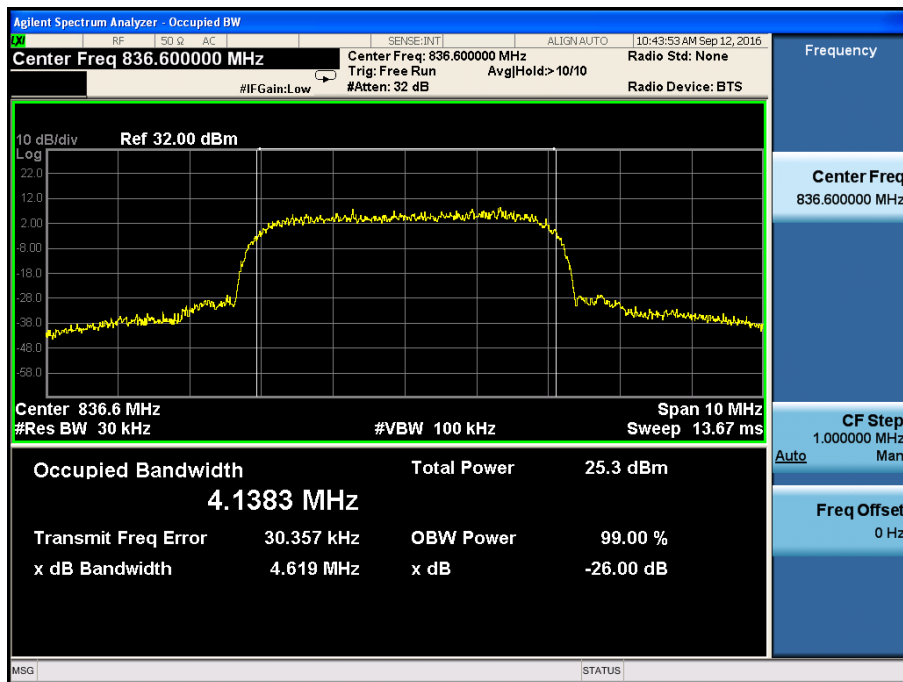


### WCDMA High Channel

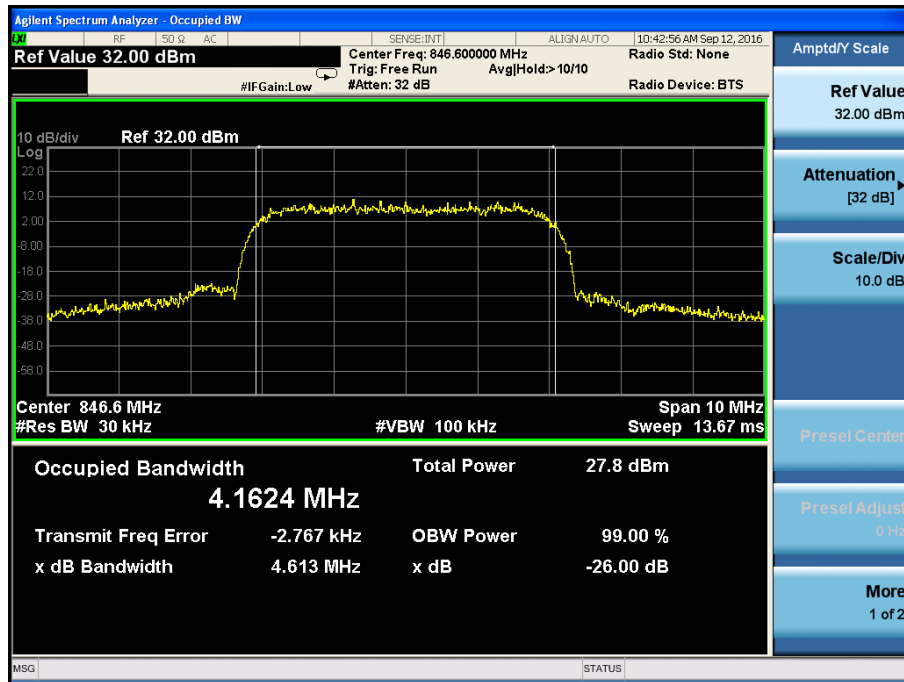


### HSDPA Low Channel

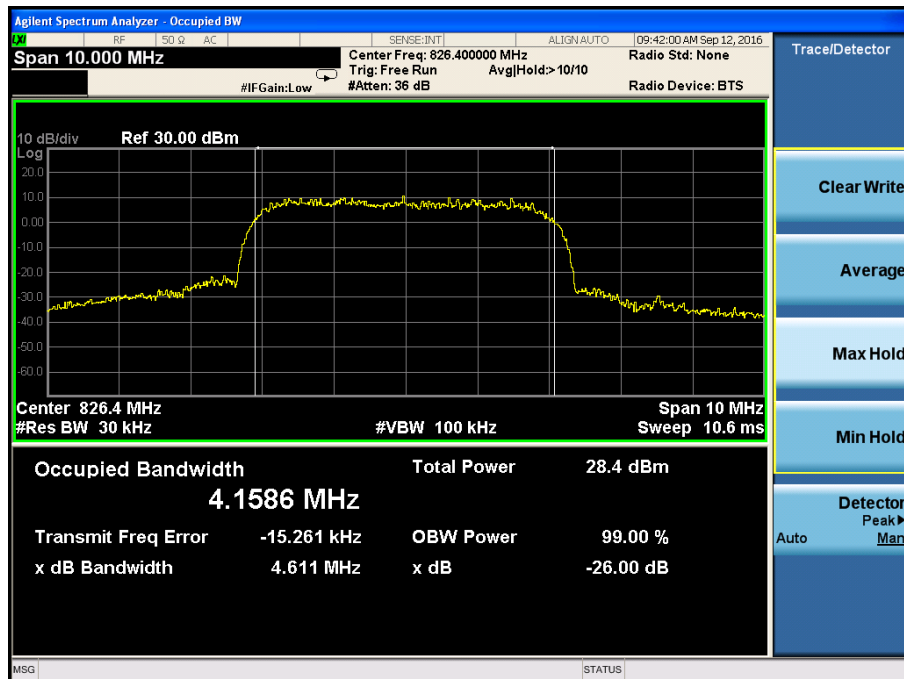

## HSDPA Middle Channel

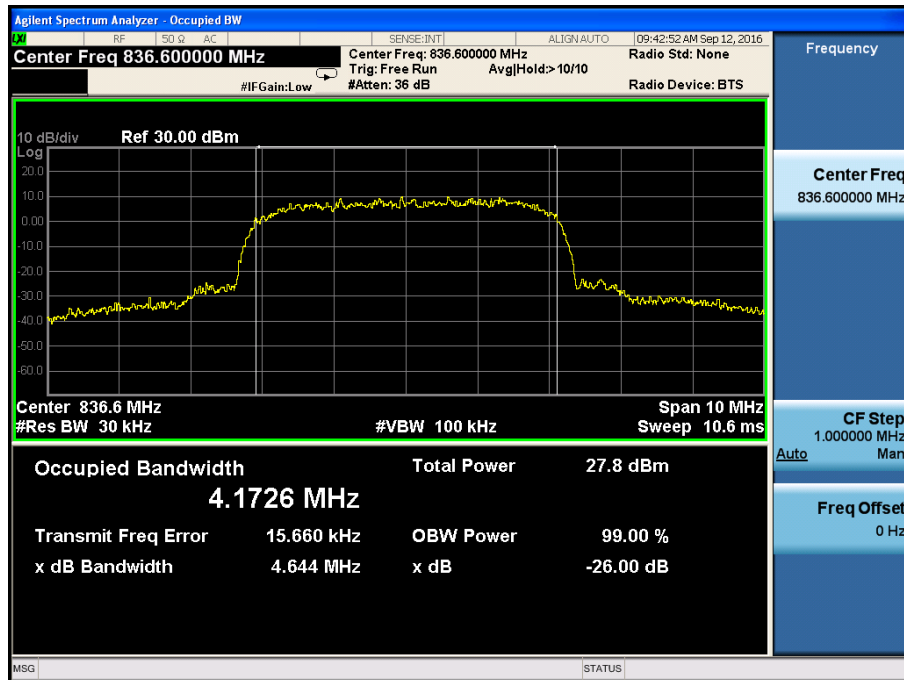


## HSDPA High Channel

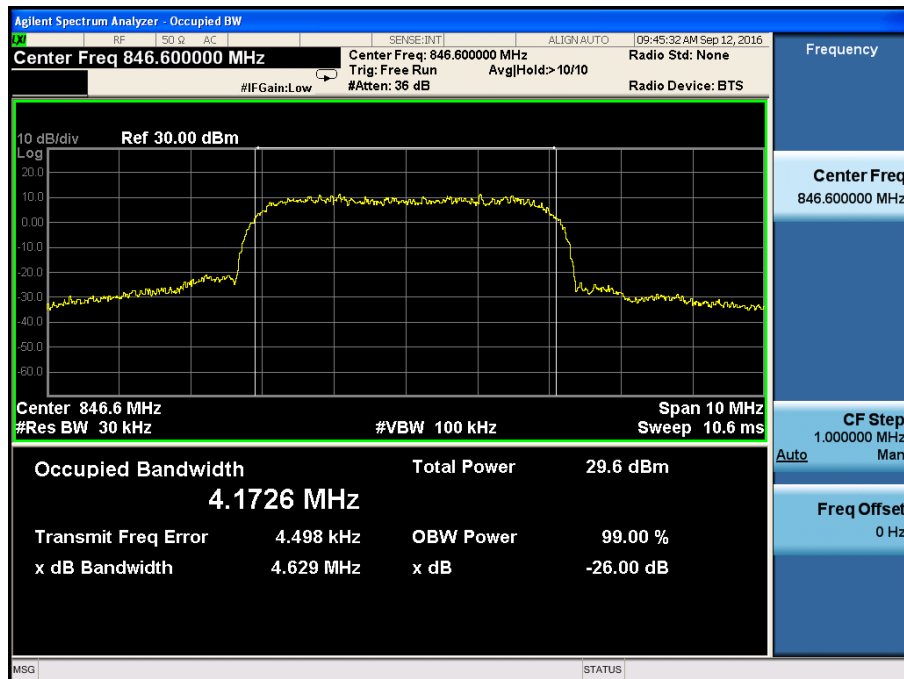


For Band II


WCDMA Low Channel

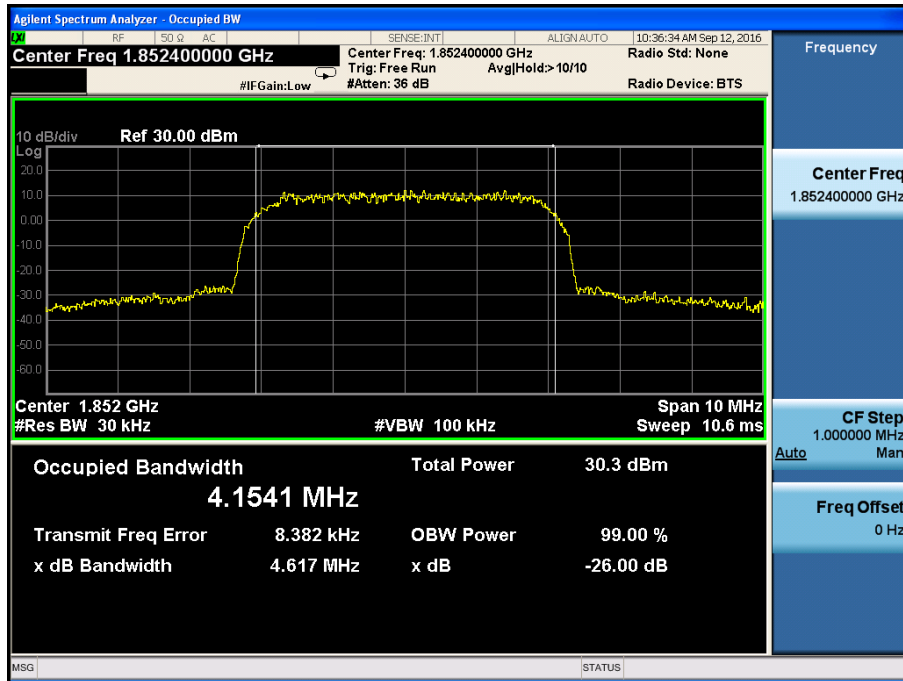


WCDMA Middle Channel

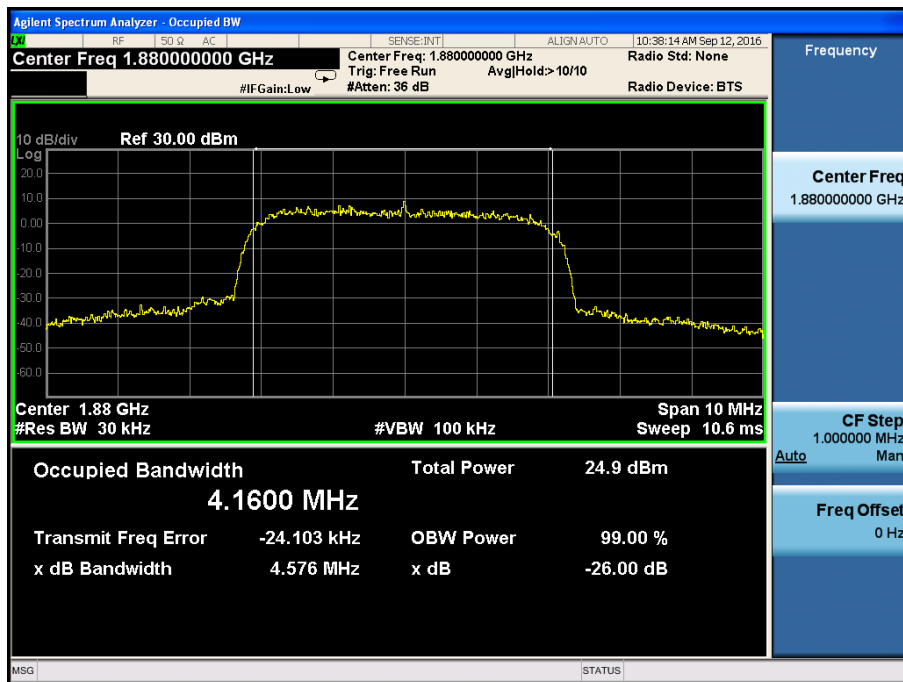


### WCDMA High Channel

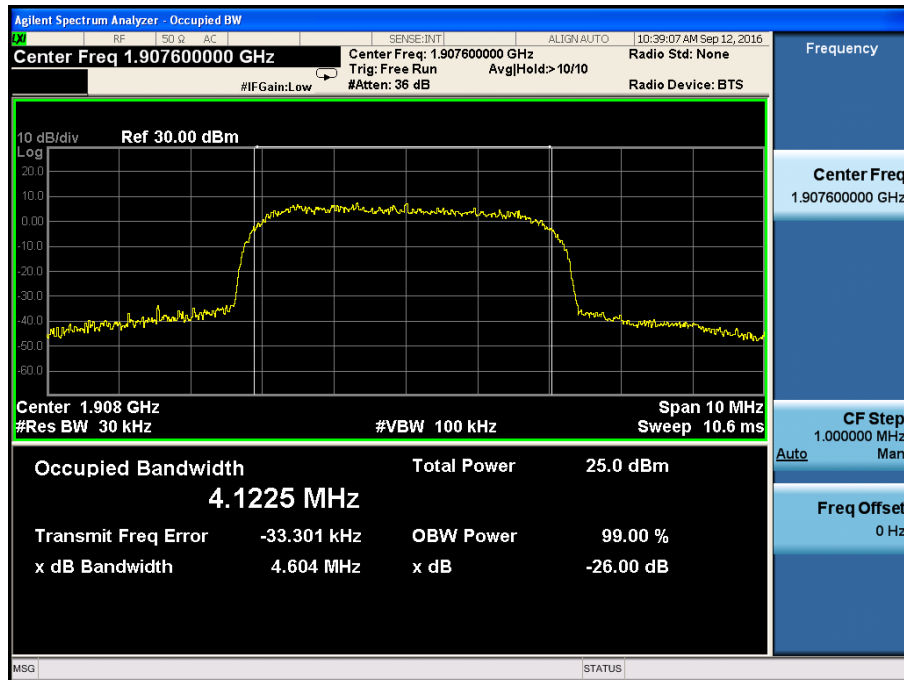


### HSDPA Low Channel

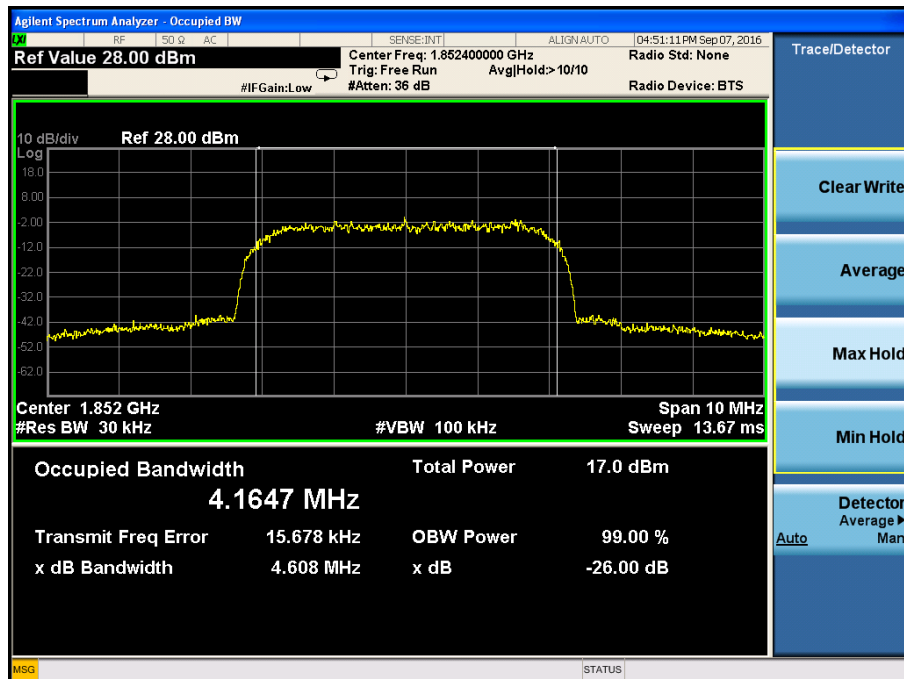

## HSDPA Middle Channel

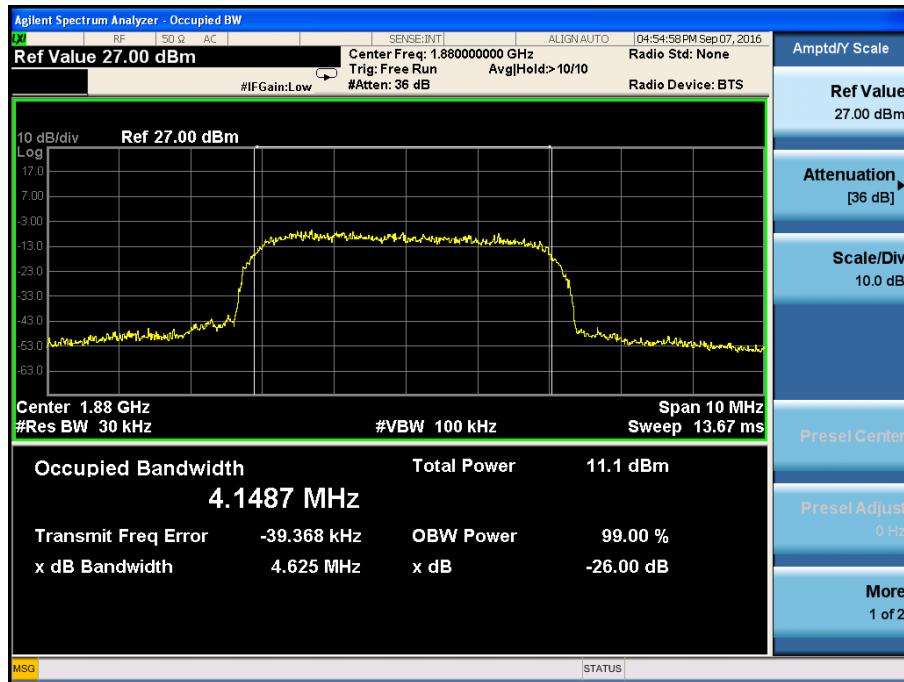

## HSDPA High Channel

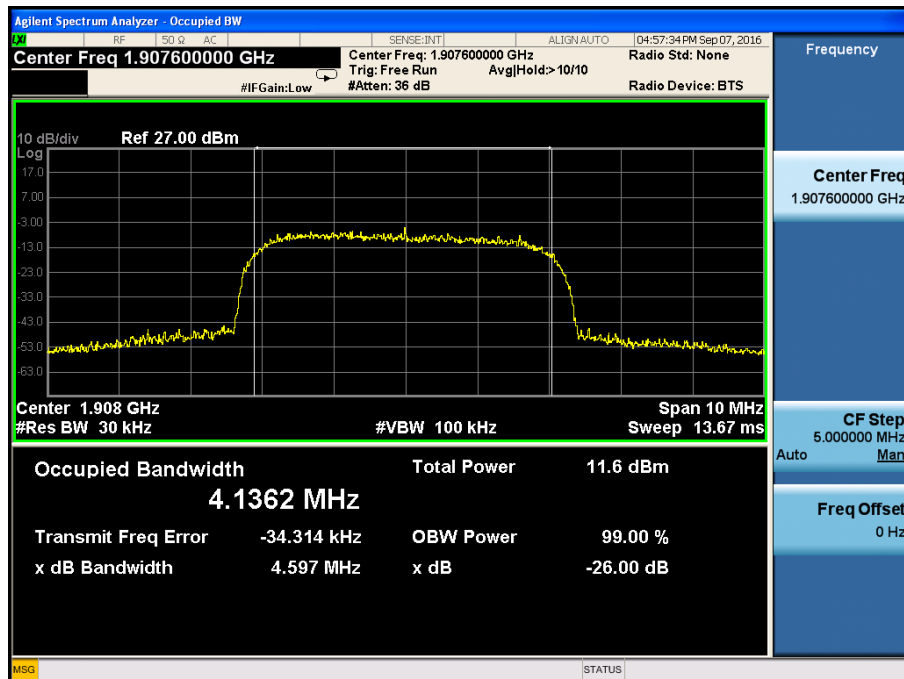

## 7. Out of Band Emissions at Antenna Terminal

### 7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

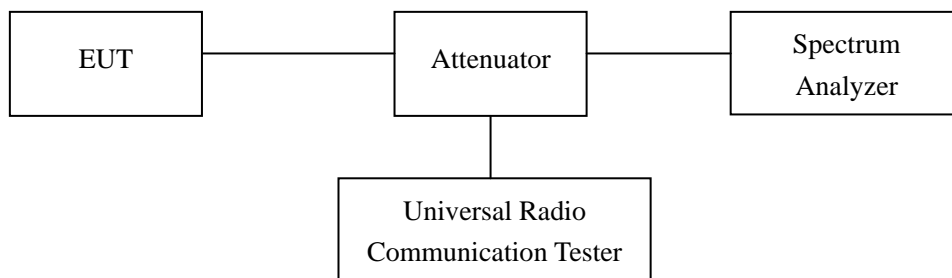



### 7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

## 7.4 Summary of Test Results/Plots



Please refer to the following test plots For Cellular Band

GPRS Low Channel

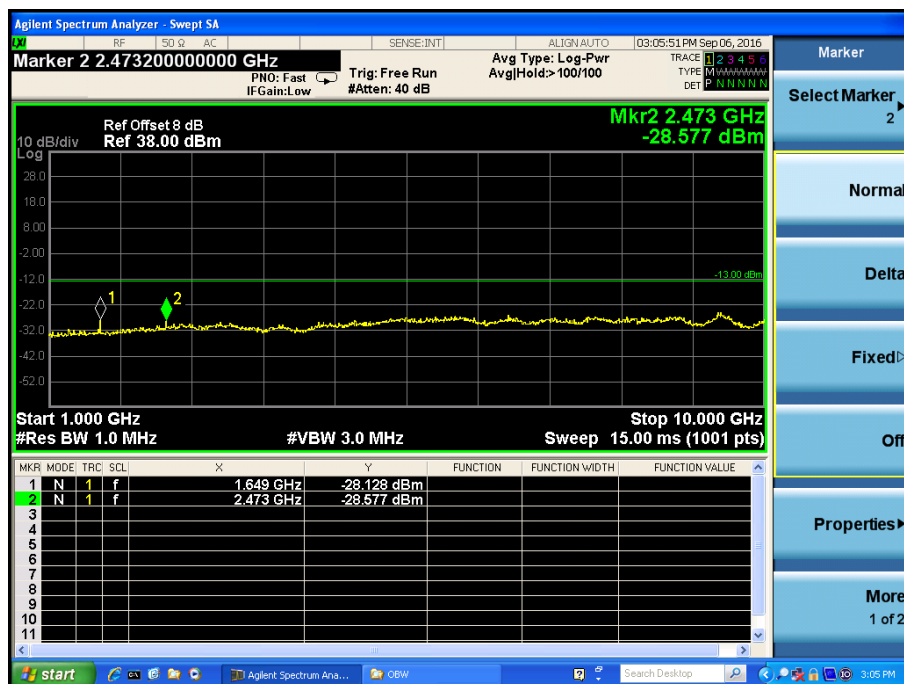
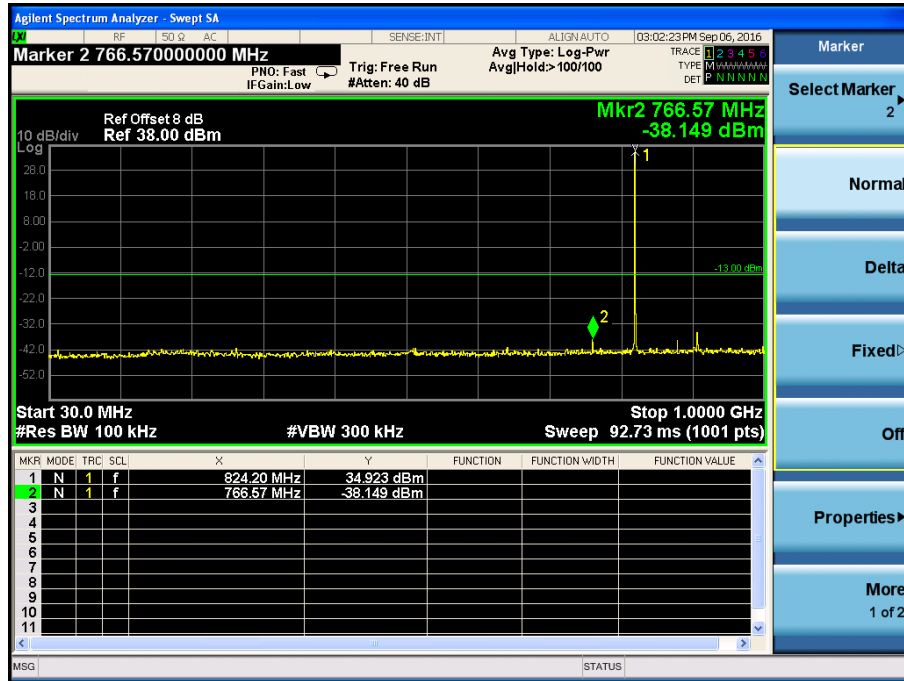





## GPRS Middle Channel

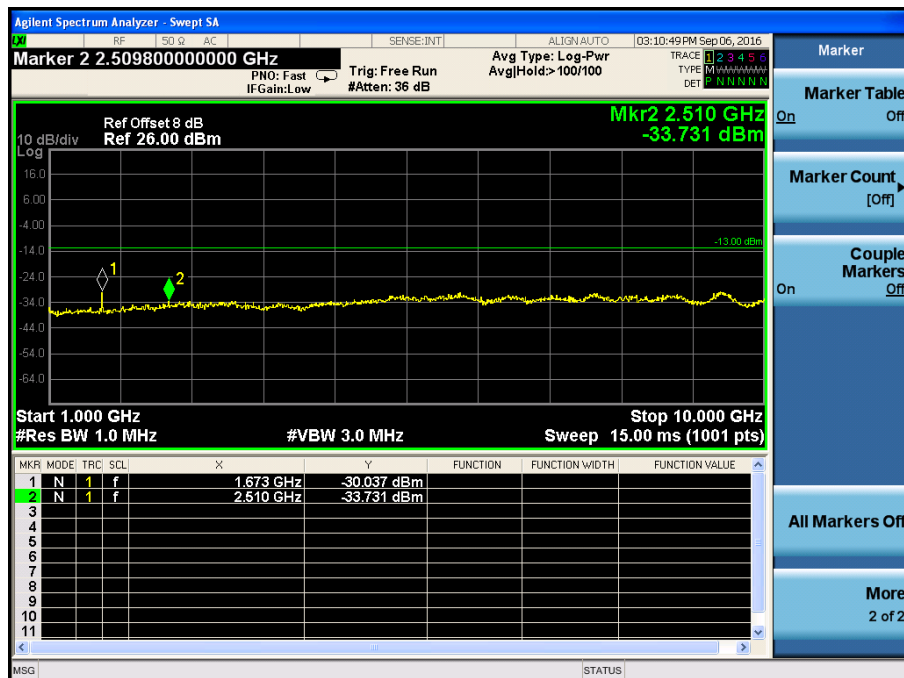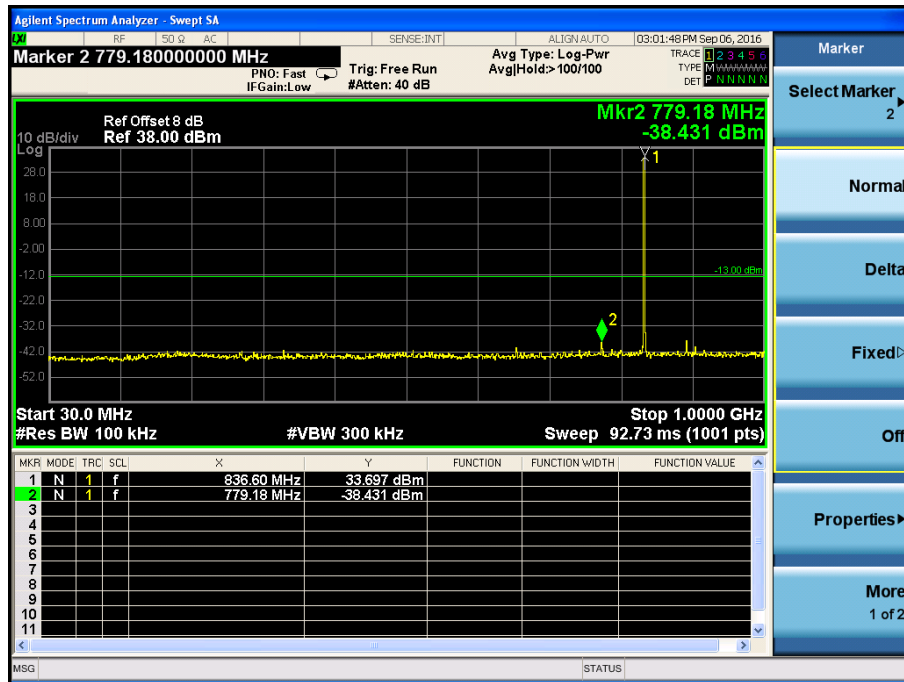


## GPRS High Channel

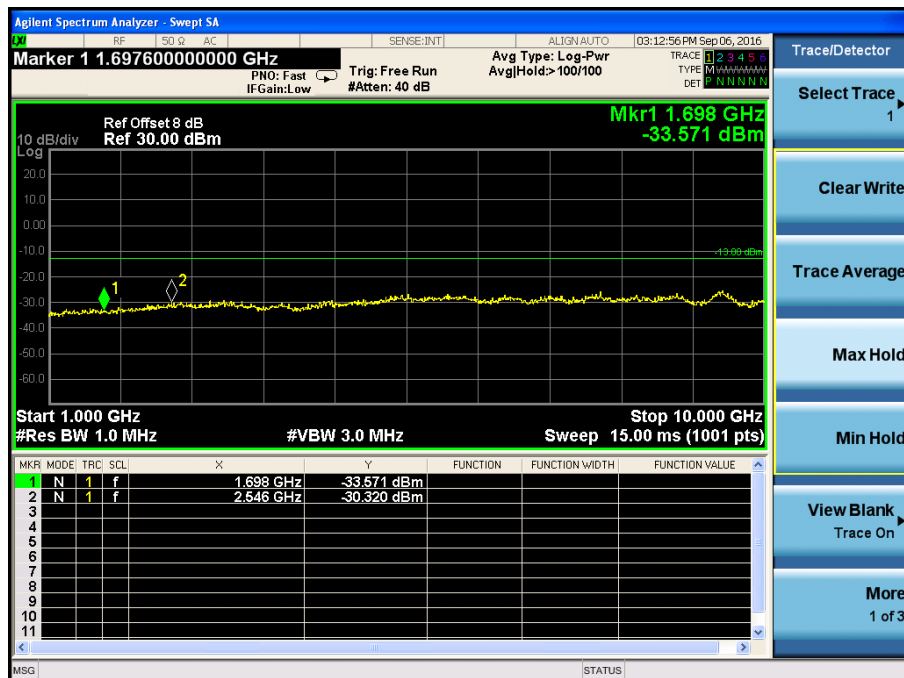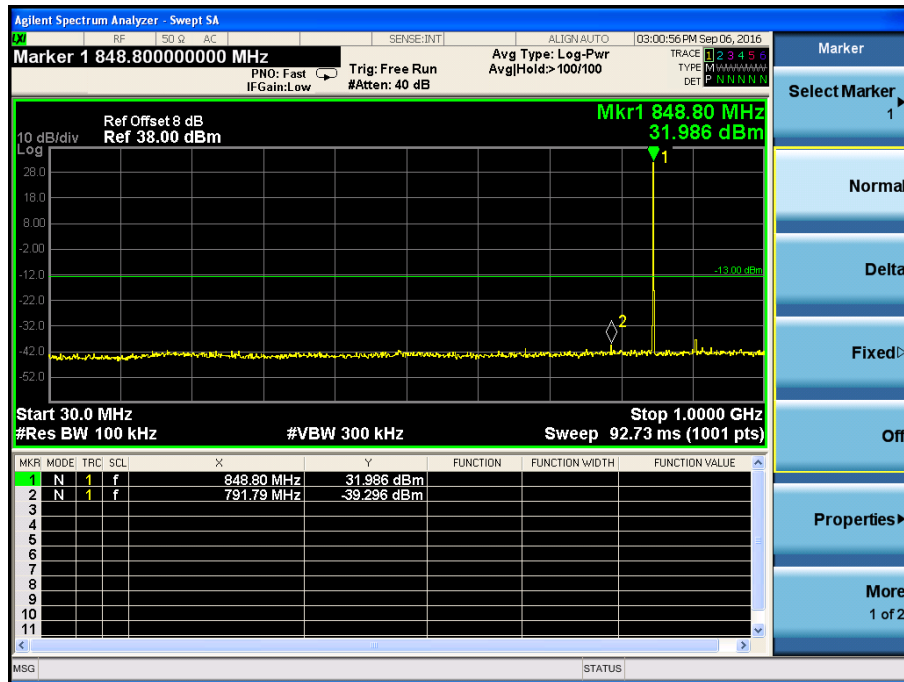



## GPRS Low Band Emission

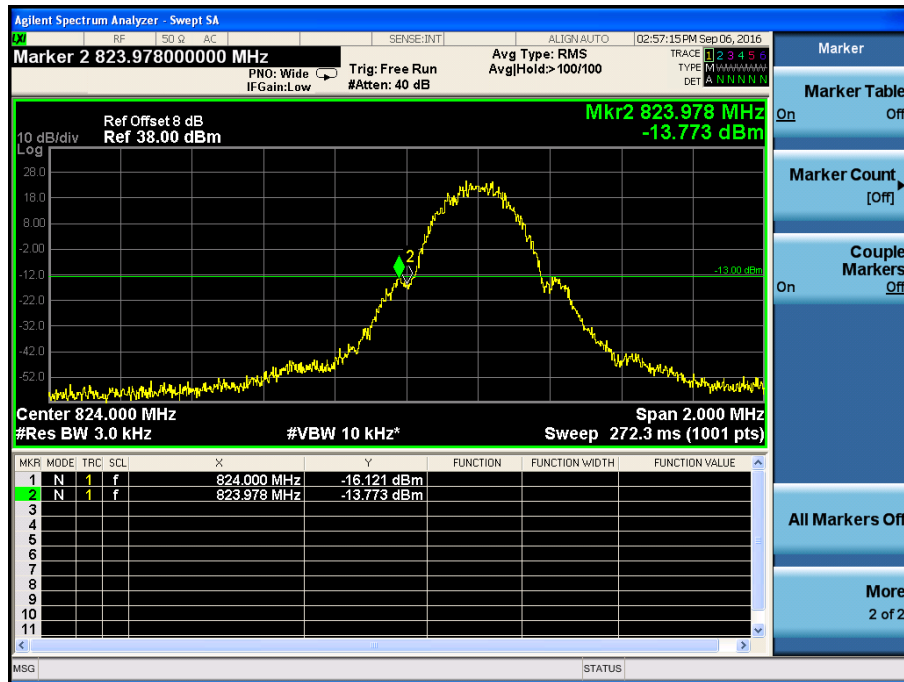



## GPRS High Band Emission

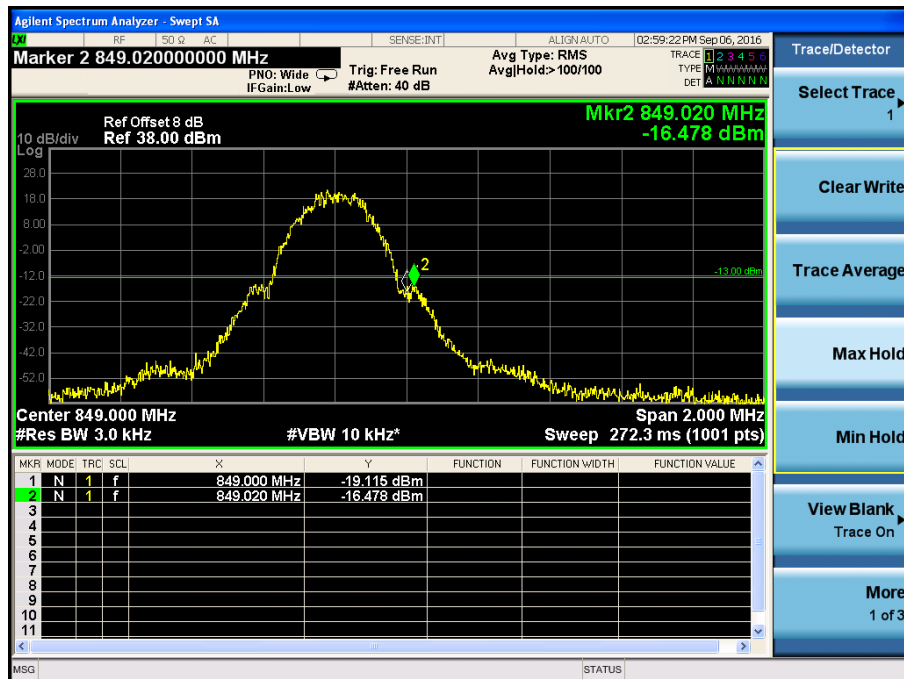



For PCS Band  
GPRS Low Channel

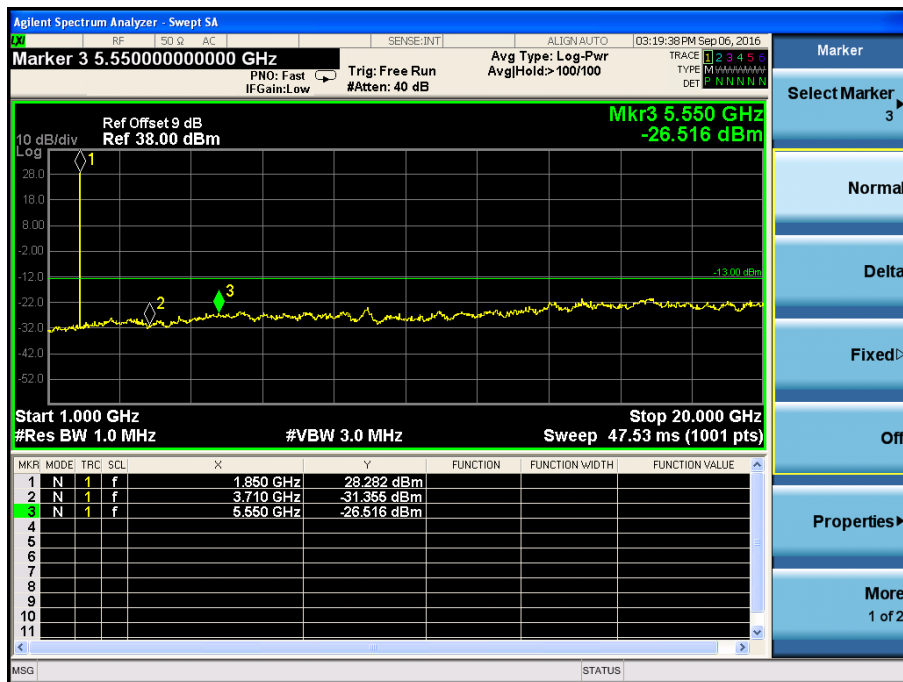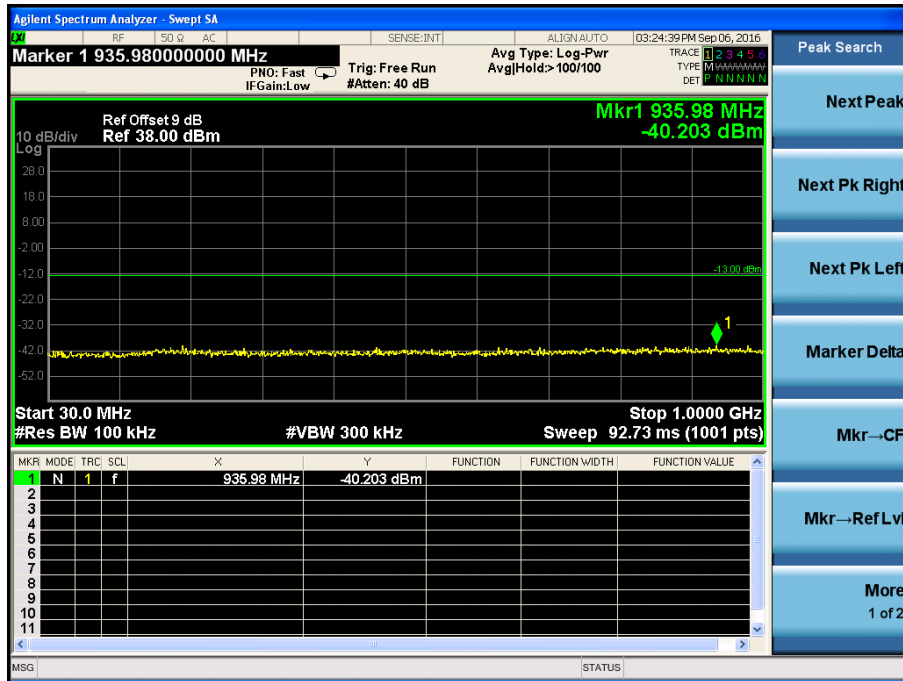


## GPRS Middle Channel

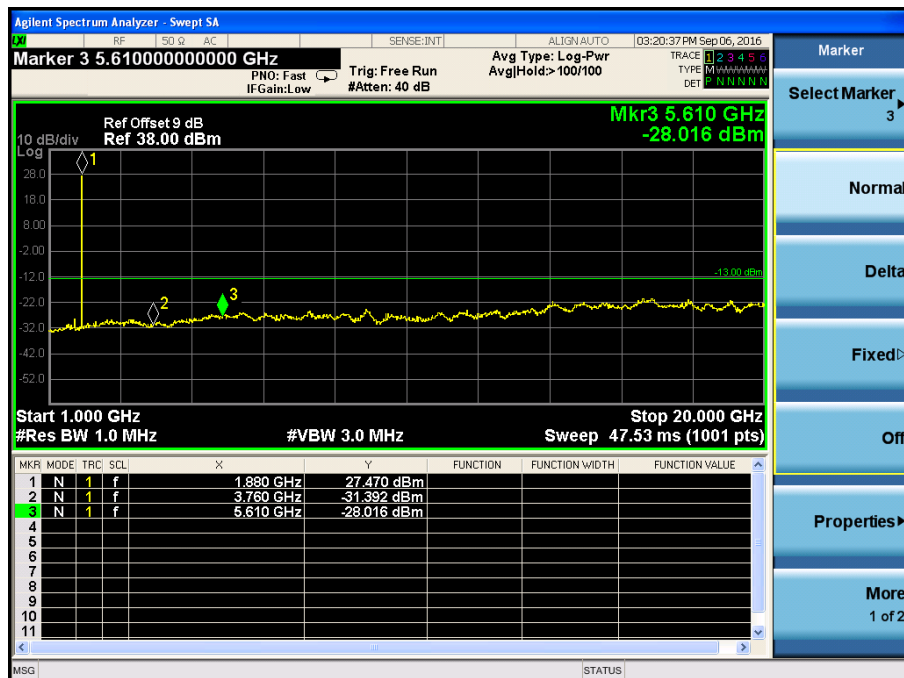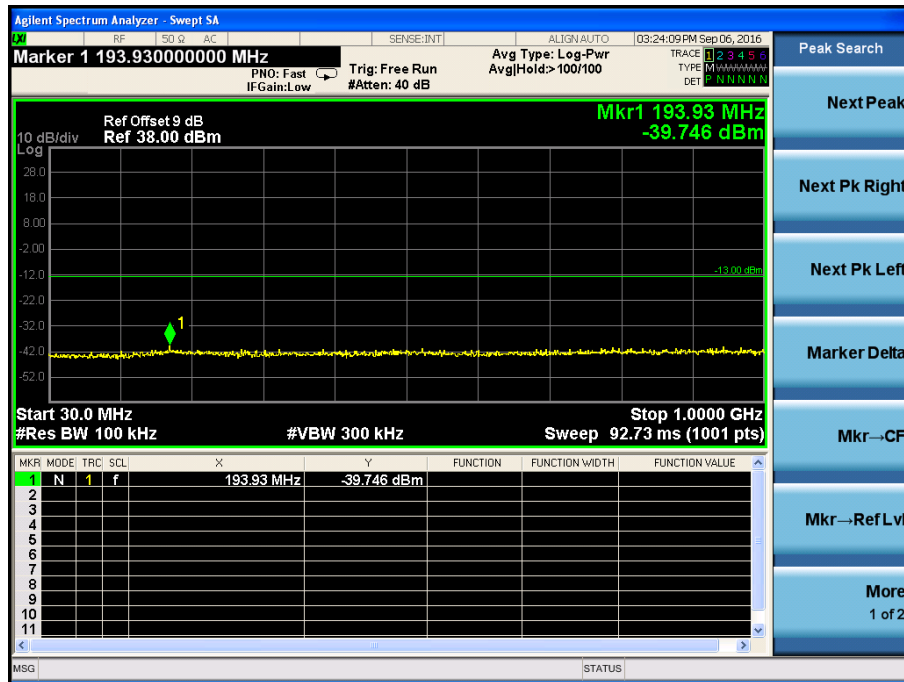


## GPRS High Channel

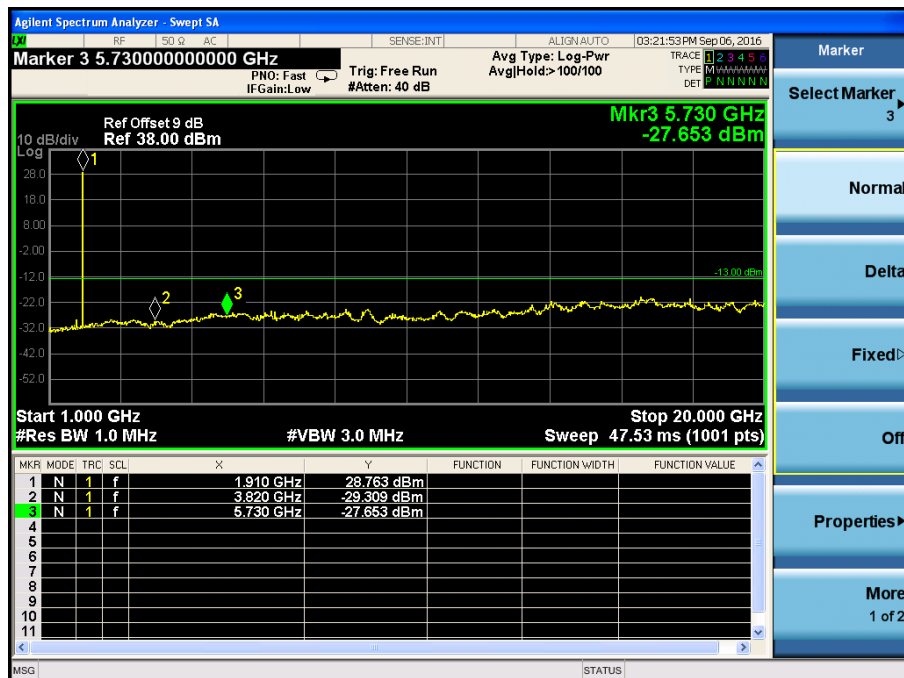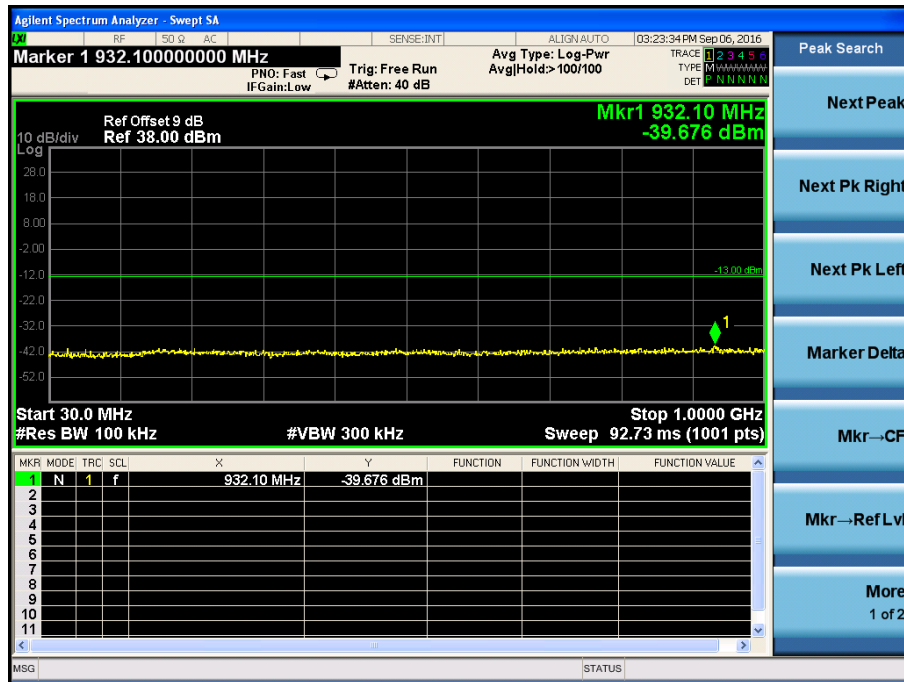

## GPRS Low Band Emission


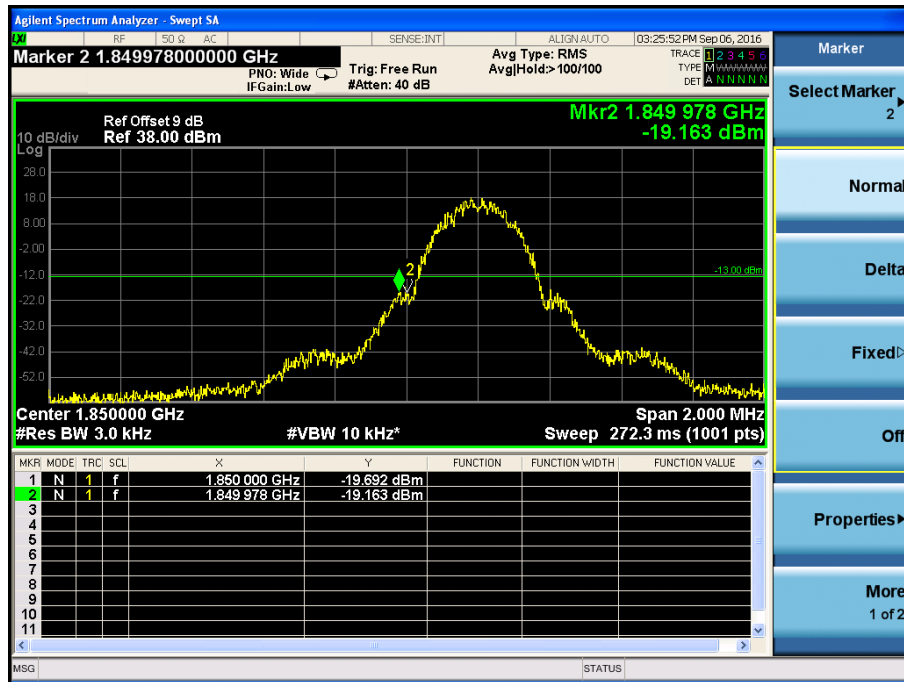


## GPRS High Band Emission

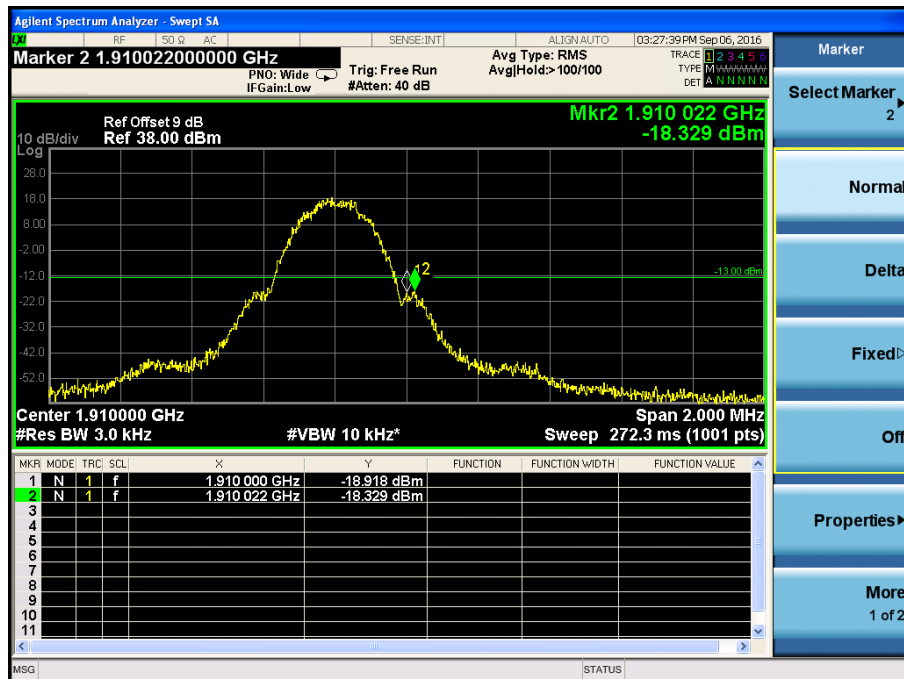



## For Band V

### WCDMA Low Channel

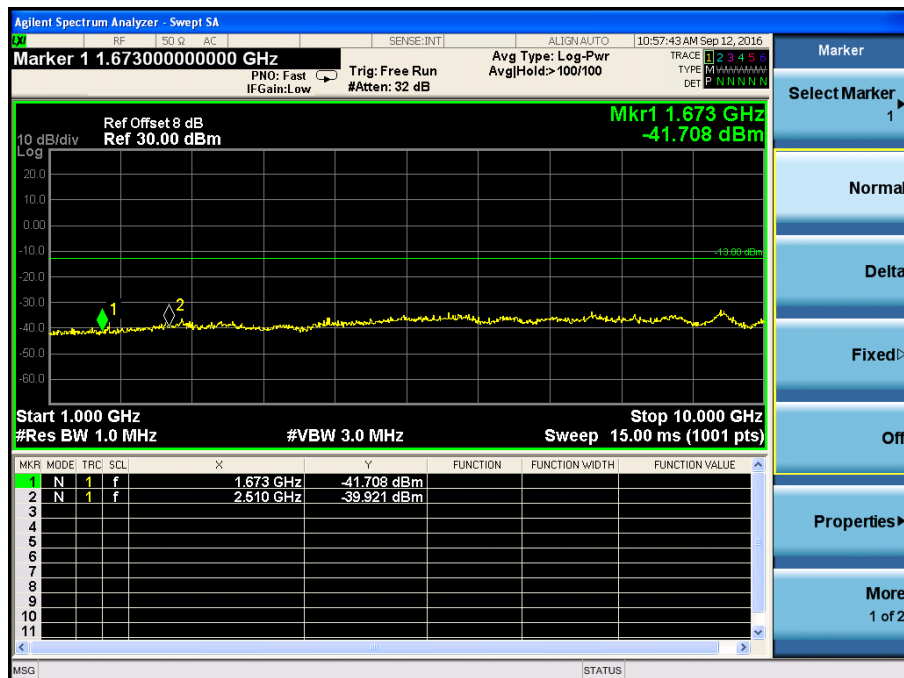
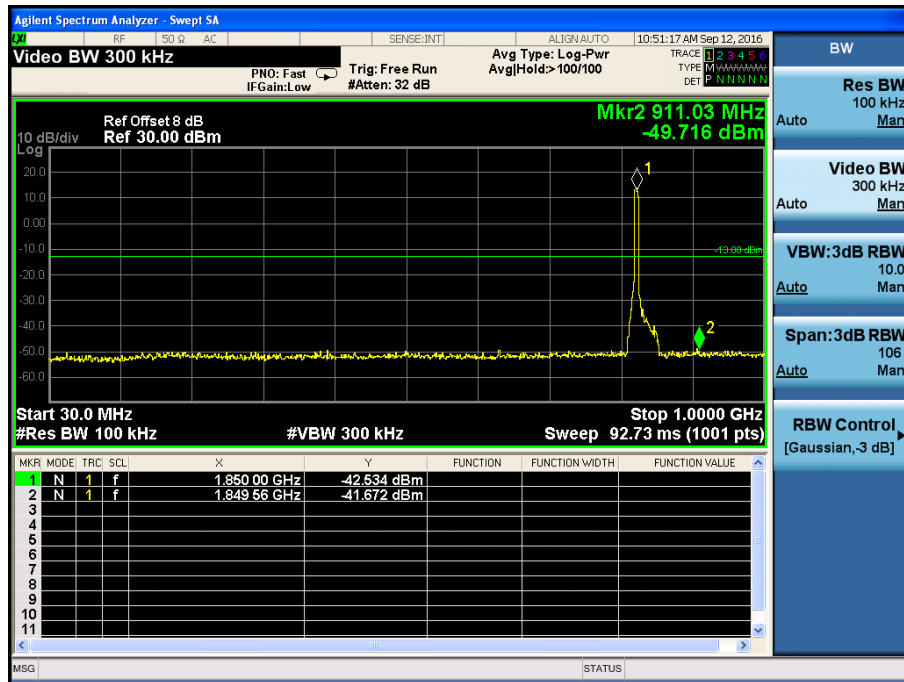





## WCDMA Middle Channel

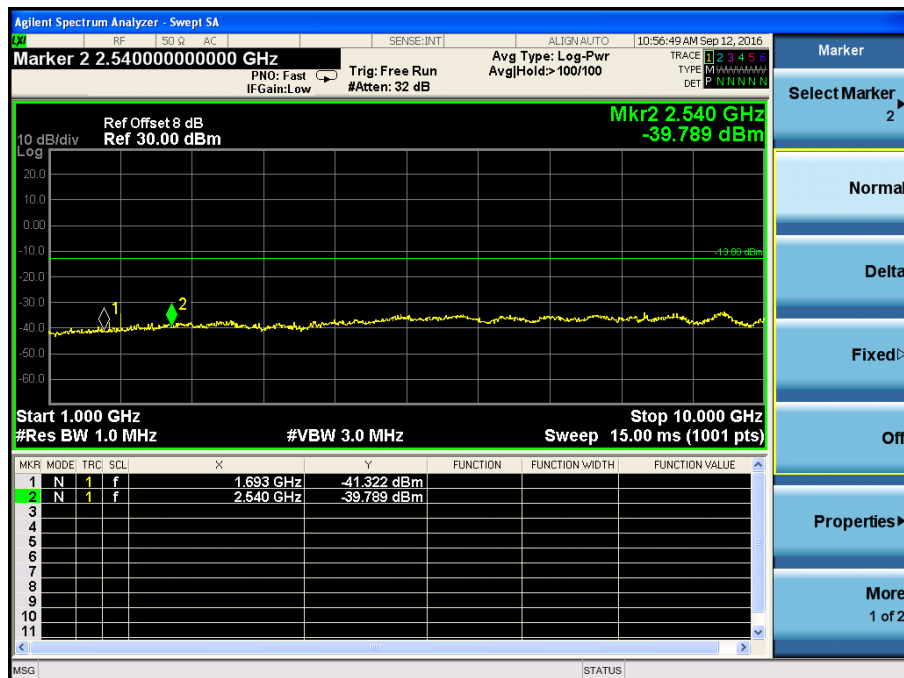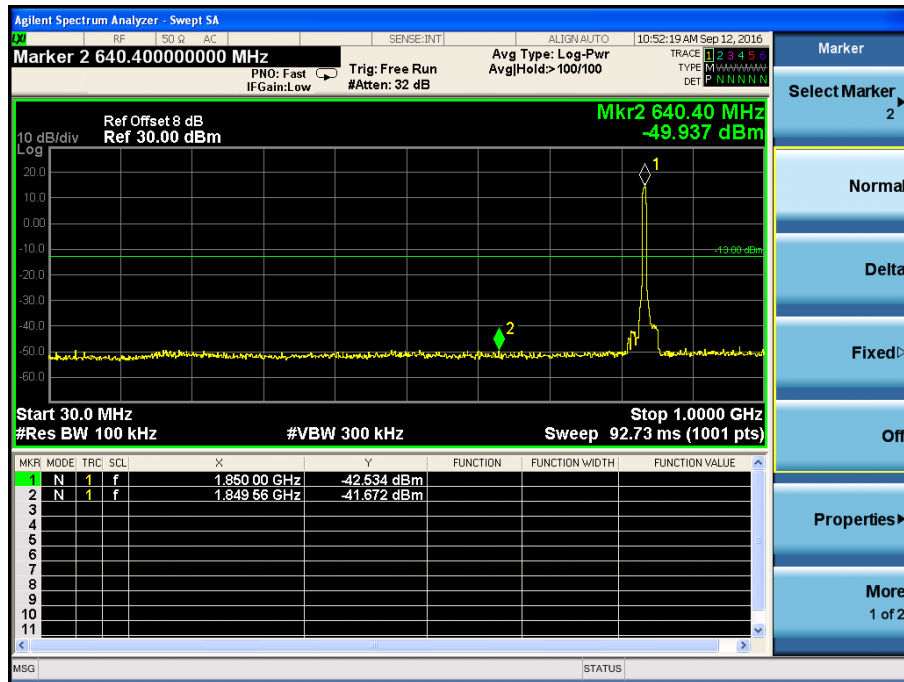

## WCDMA High Channel

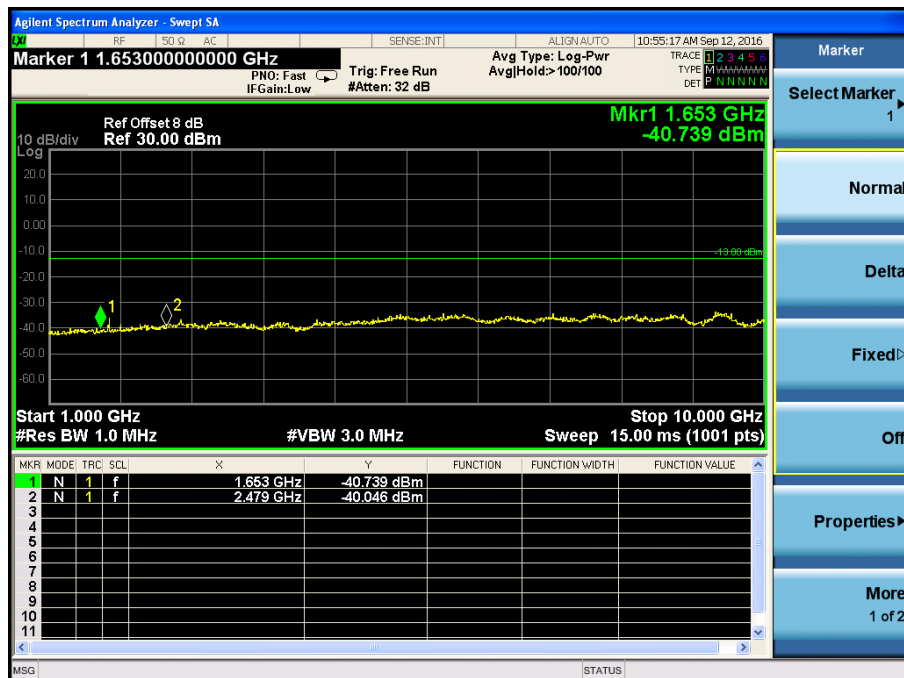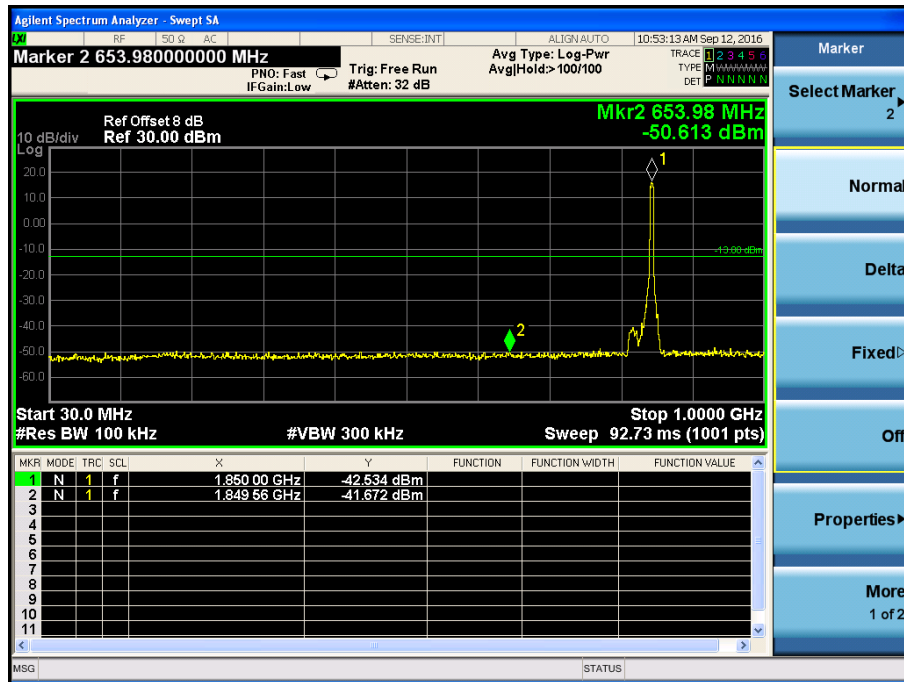



### WCDMA Low Band Spurious Emission

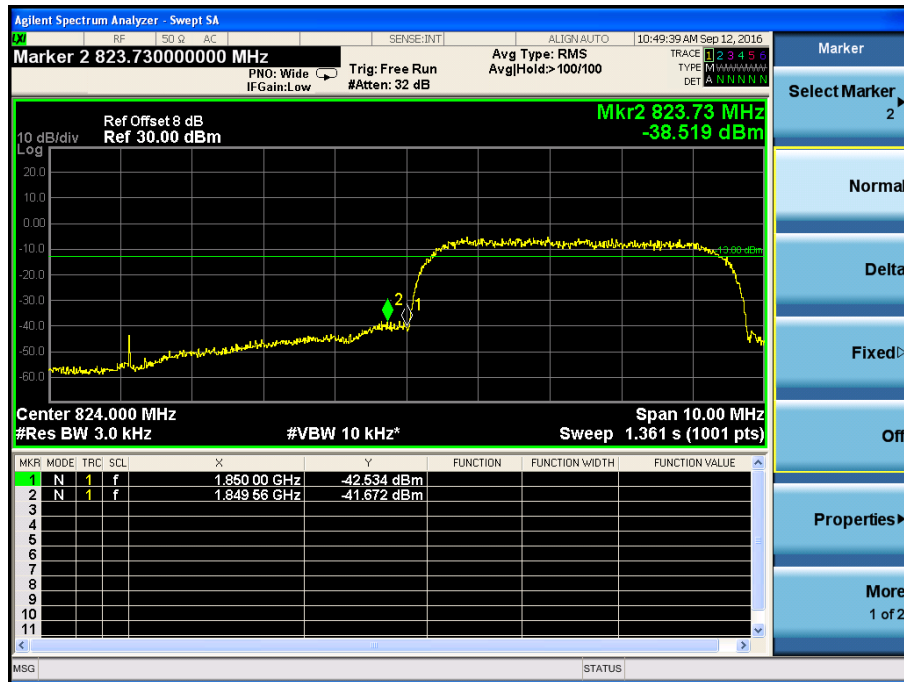



### WCDMA High Band Spurious Emission





## HSDPA Low Channel

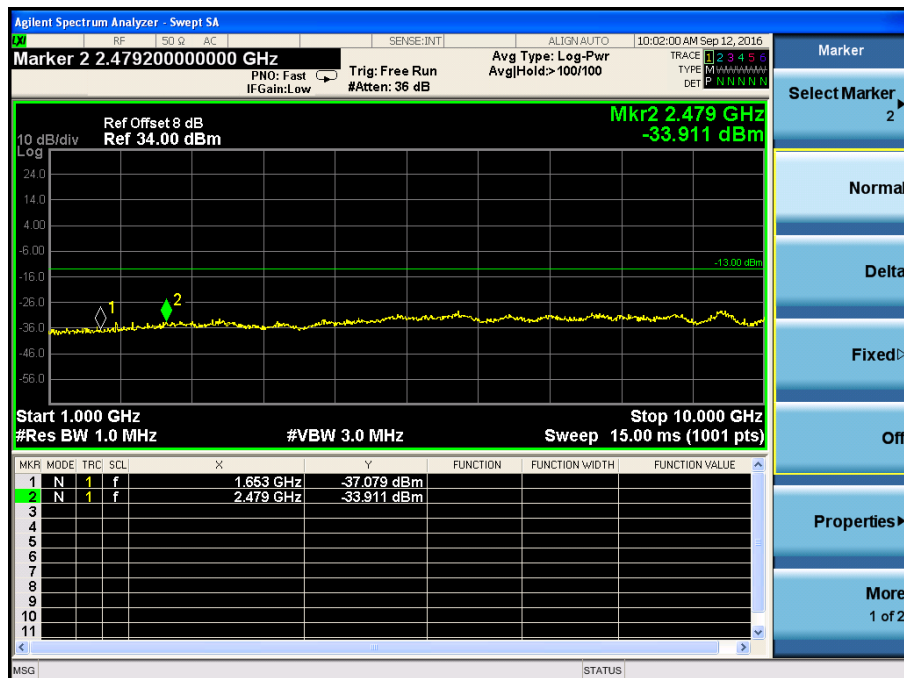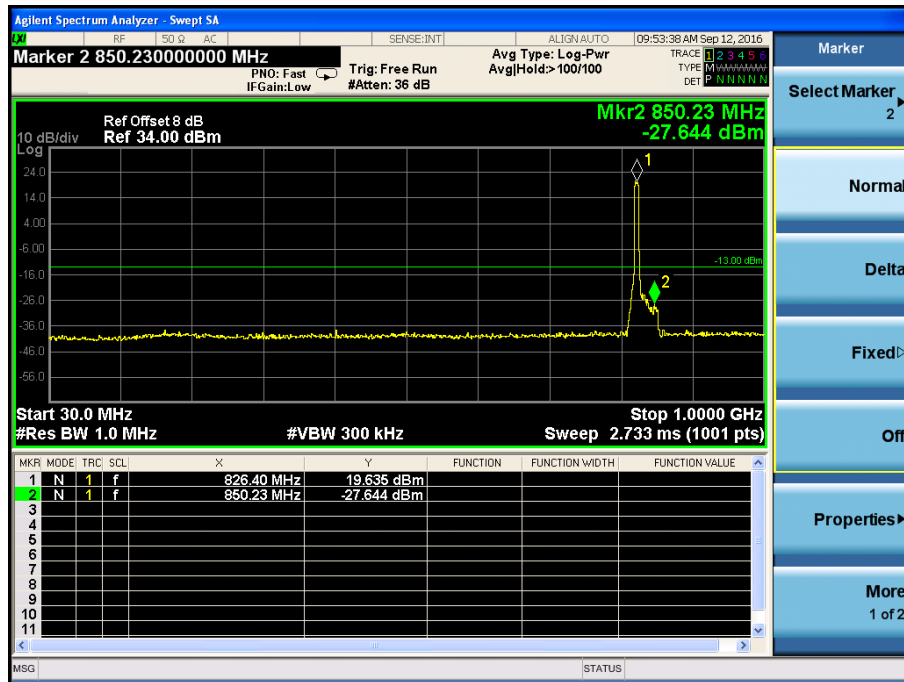


## HSDPA Middle Channel

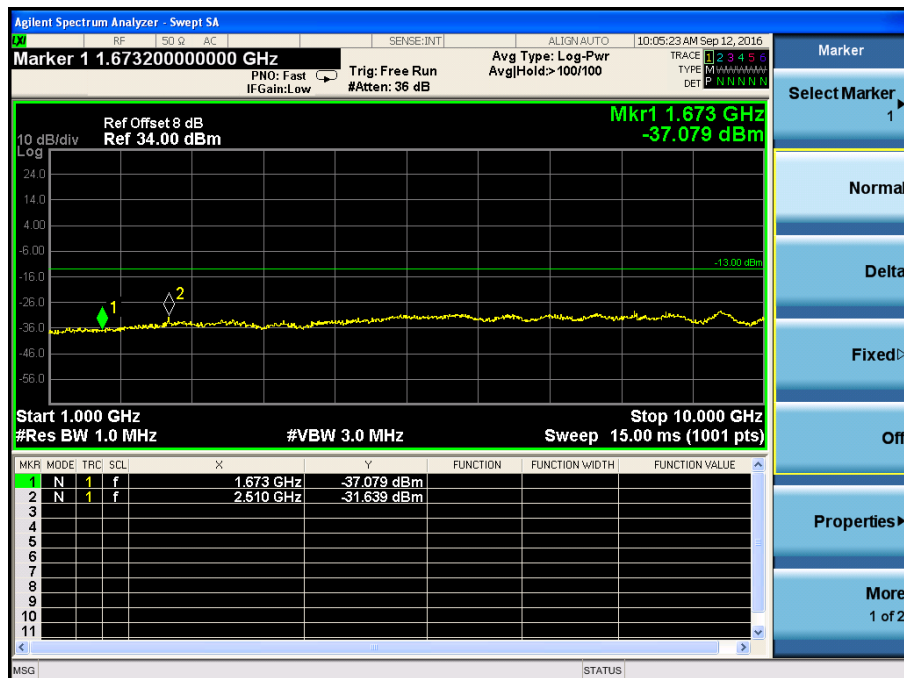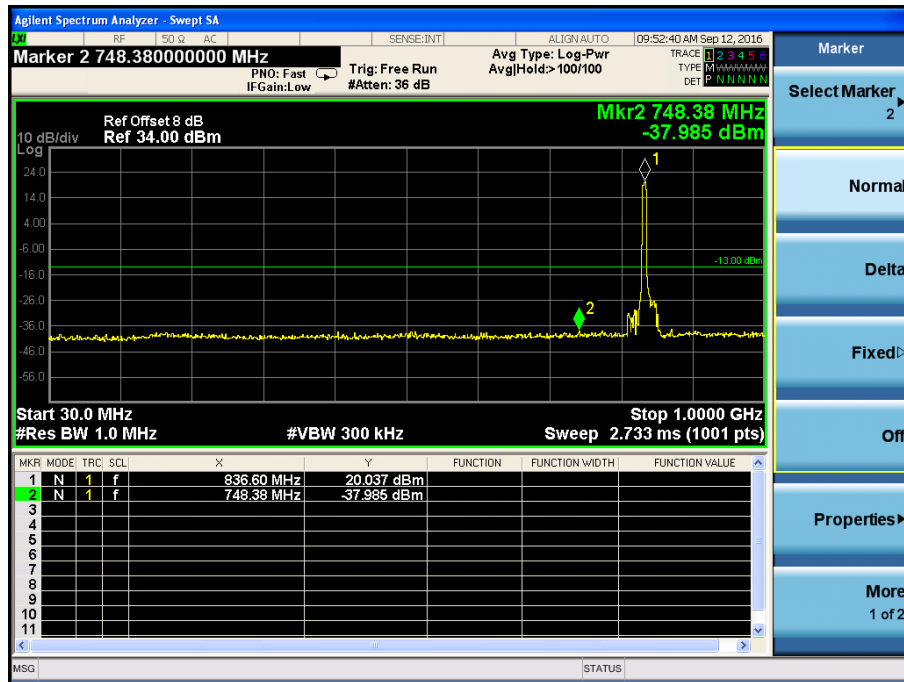

## HSDPA High Channel

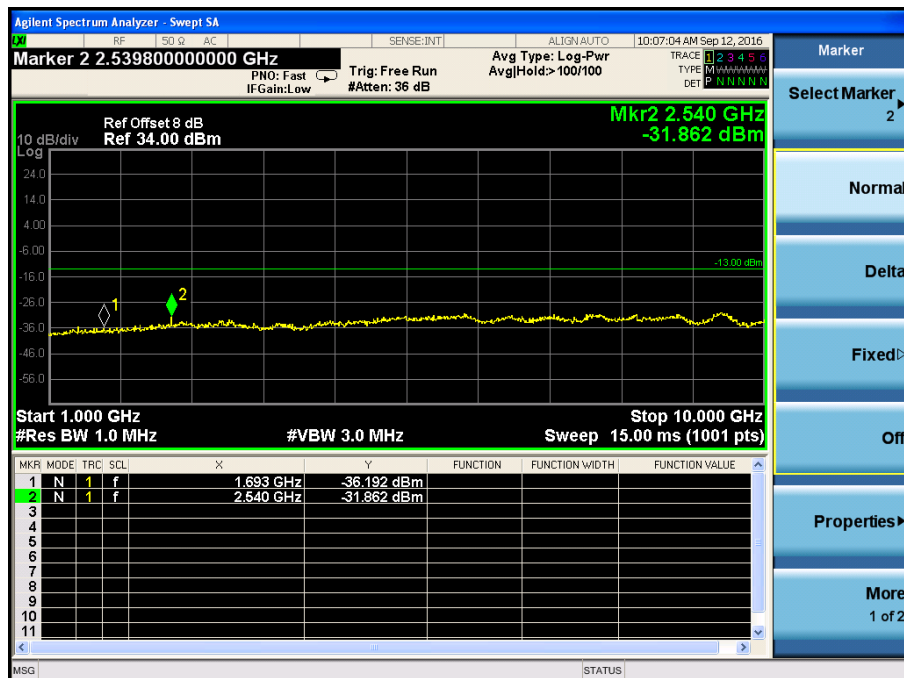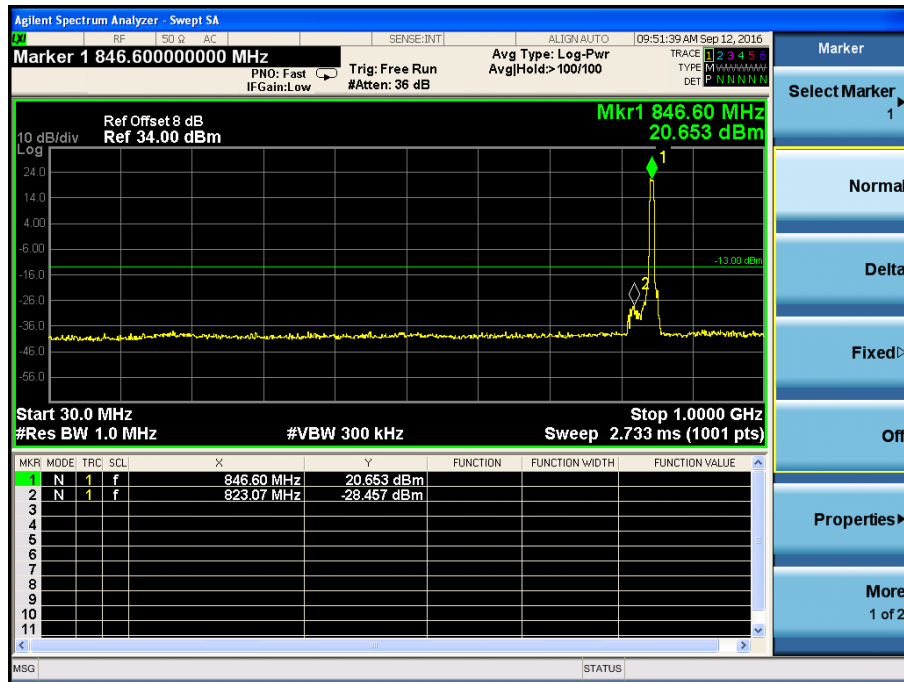

## HSDPA Low Band Spurious Emission


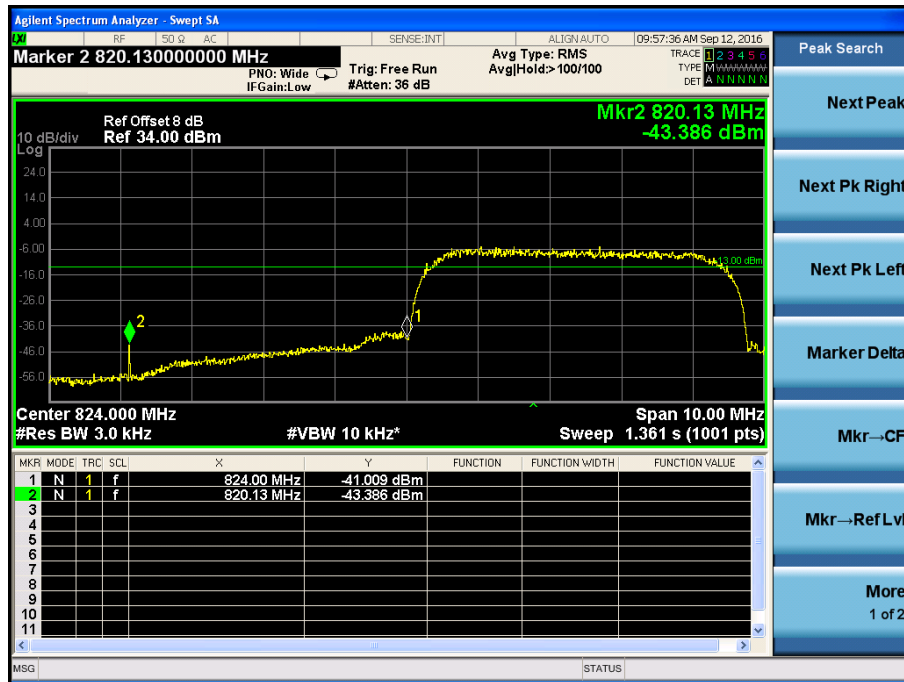


## HSDPA High Band Spurious Emission





## For Band II

### WCDMA Low Channel

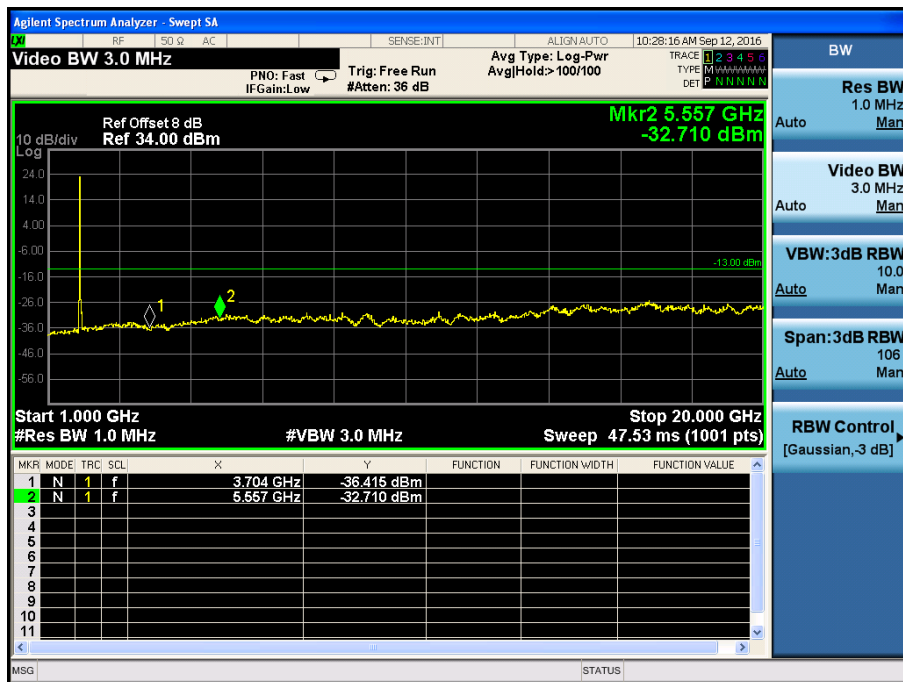
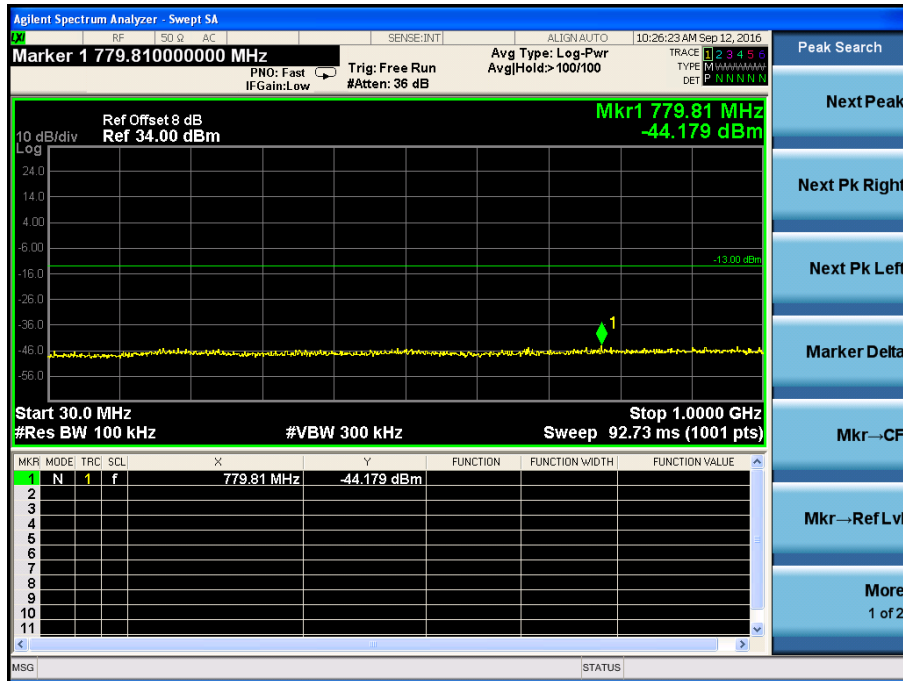





## WCDMA Middle Channel

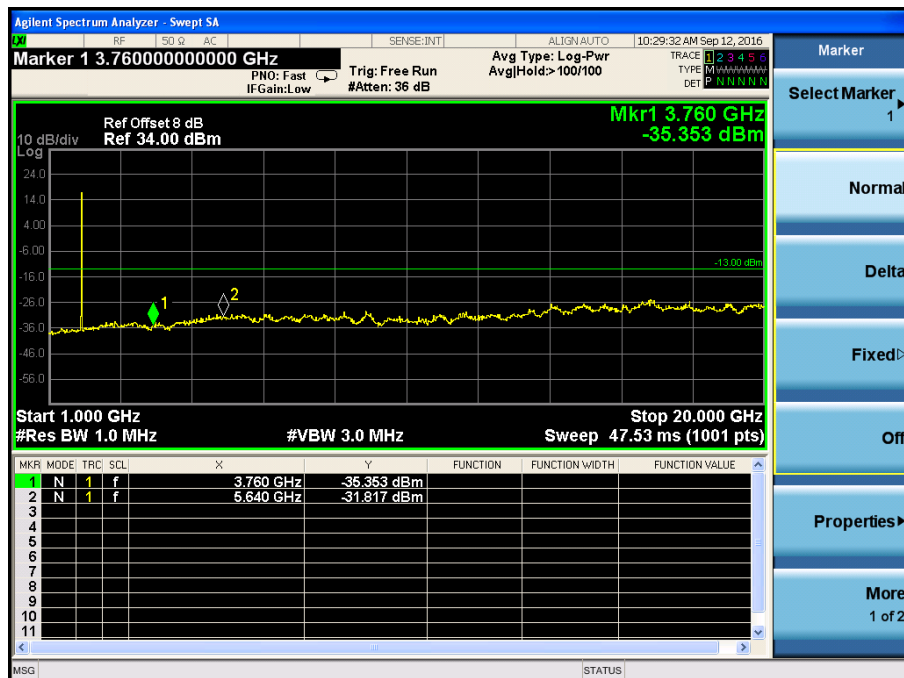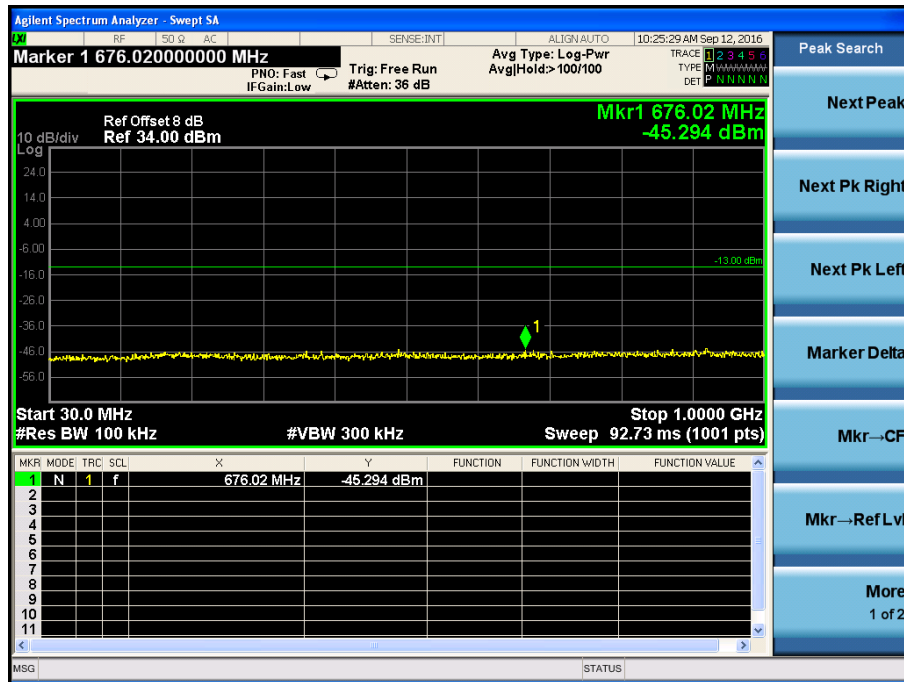


## WCDMA High Channel

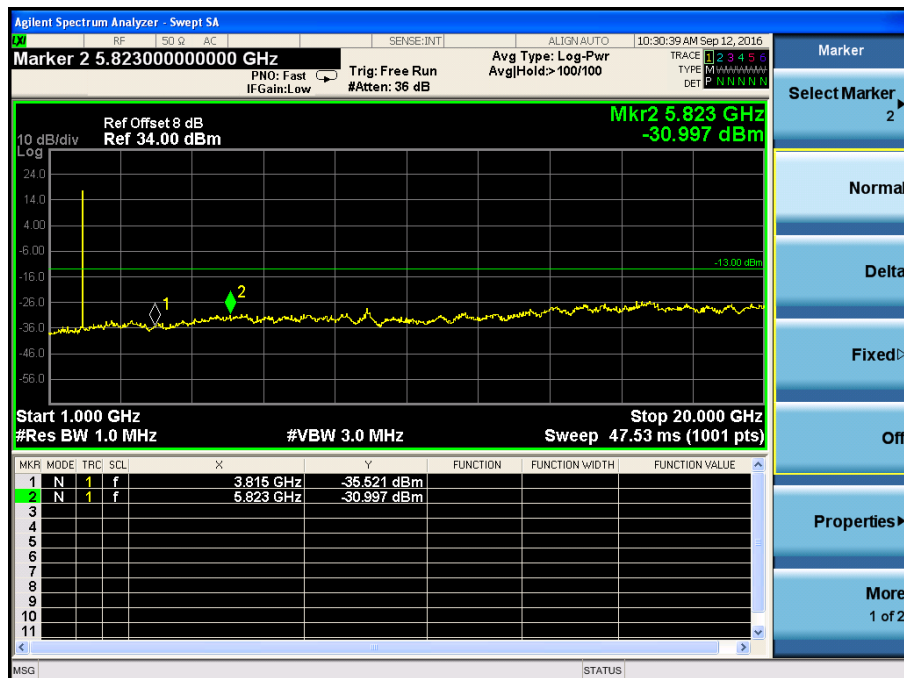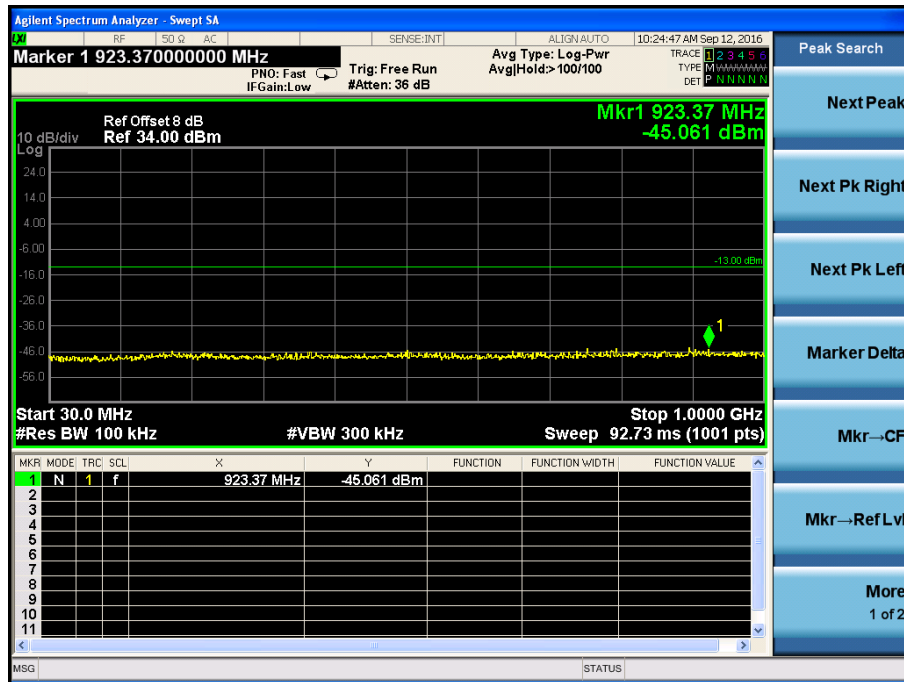



### WCDMA Low Band Spurious Emission

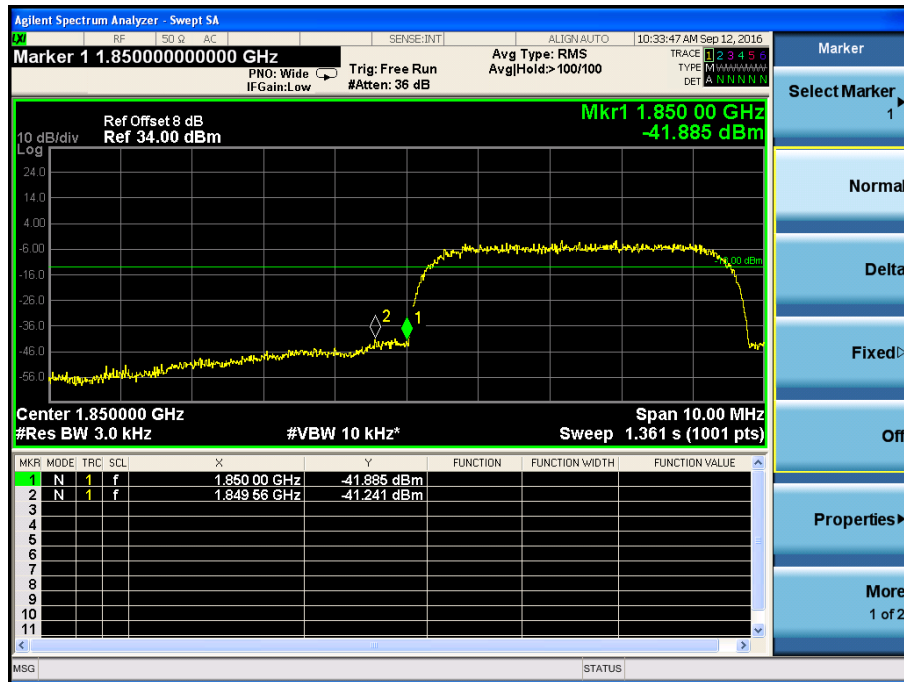



### WCDMA High Band Spurious Emission

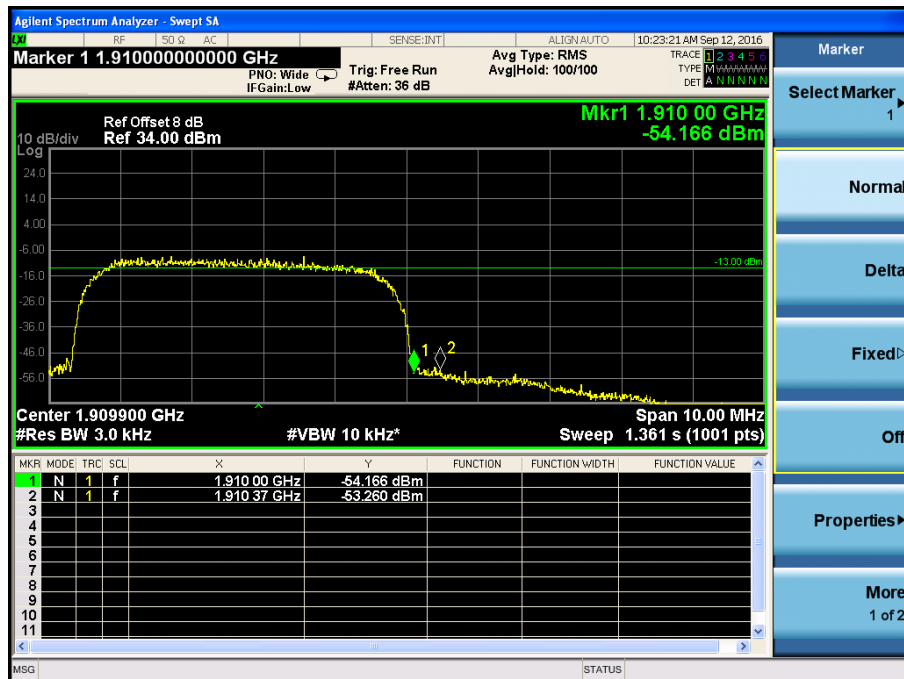


## HSDPA Low Channel

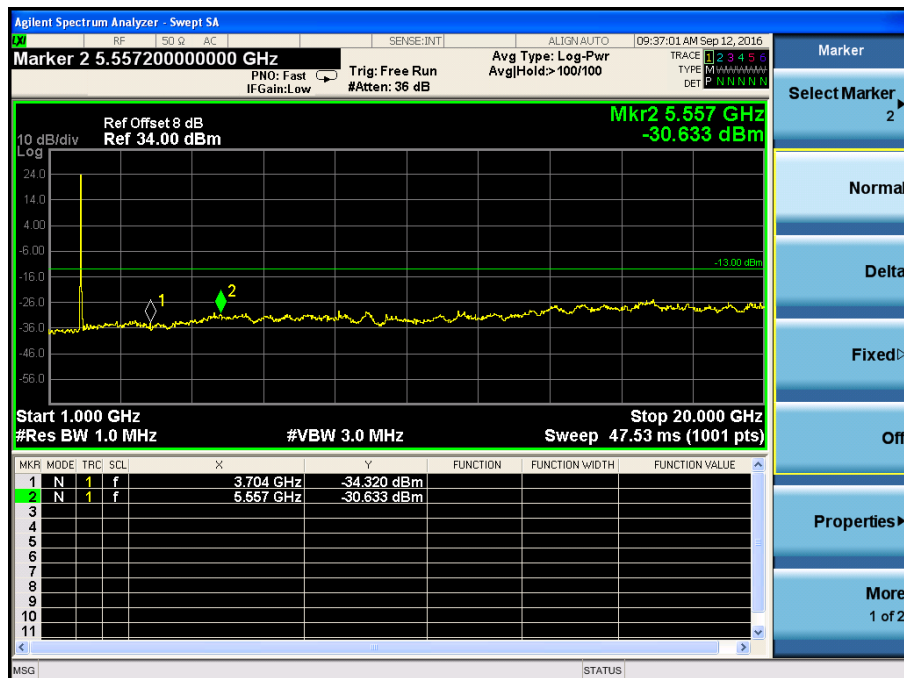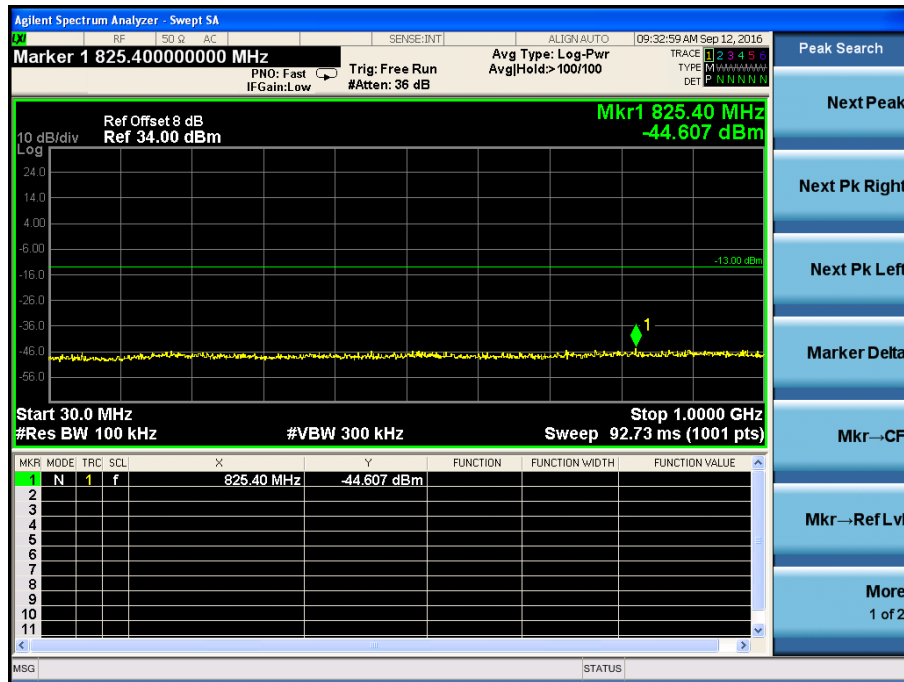


## HSDPA Middle Channel

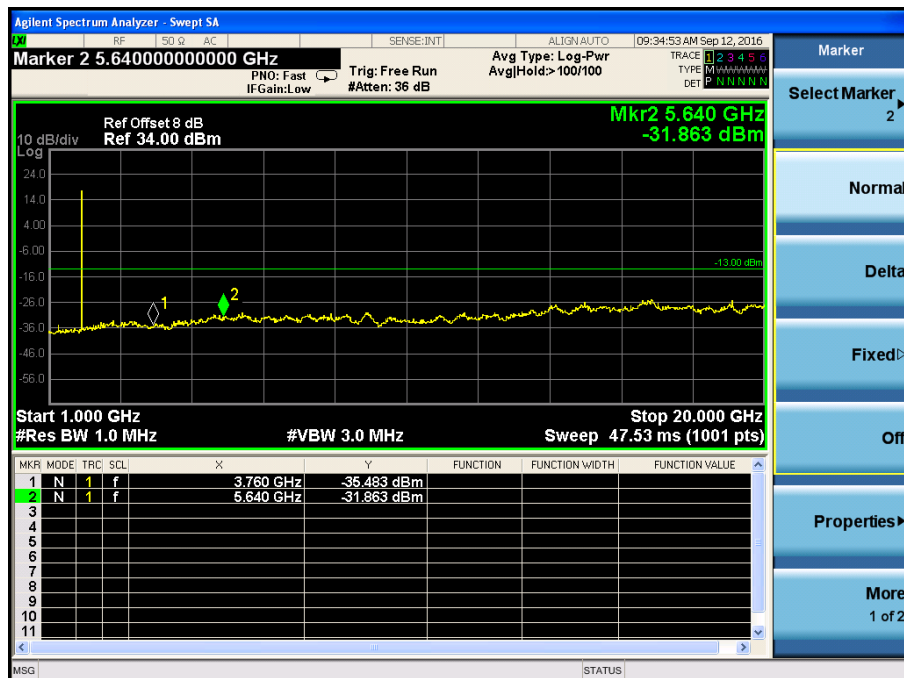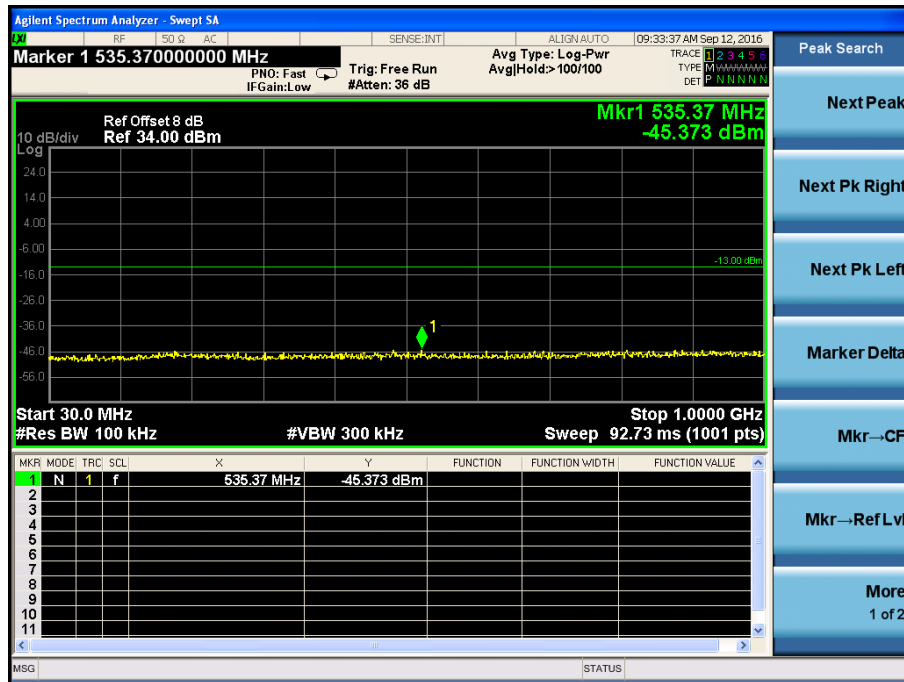

## HSDPA High Channel

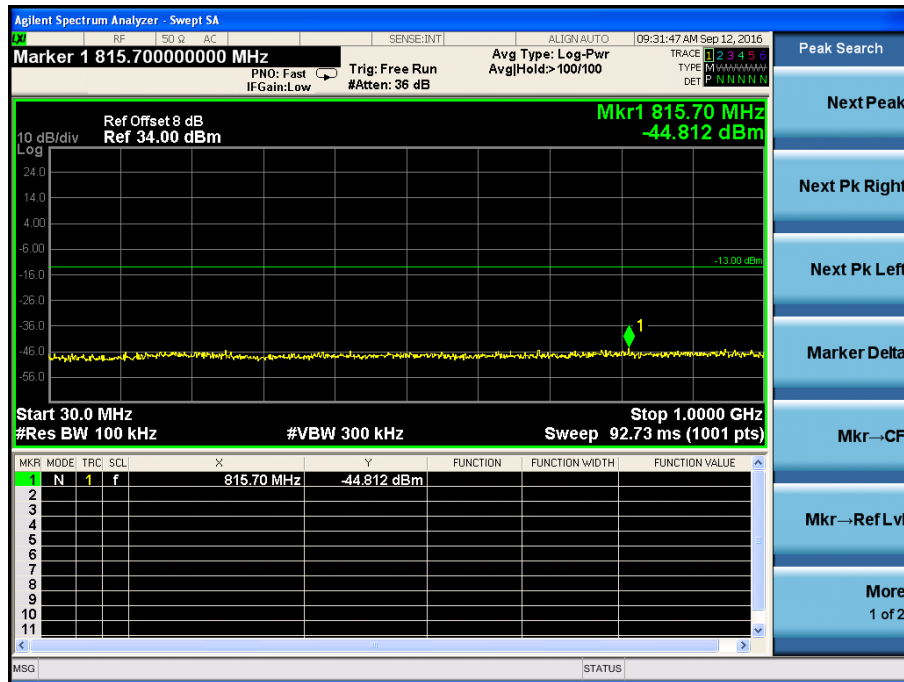

## HSDPA Low Band Spurious Emission

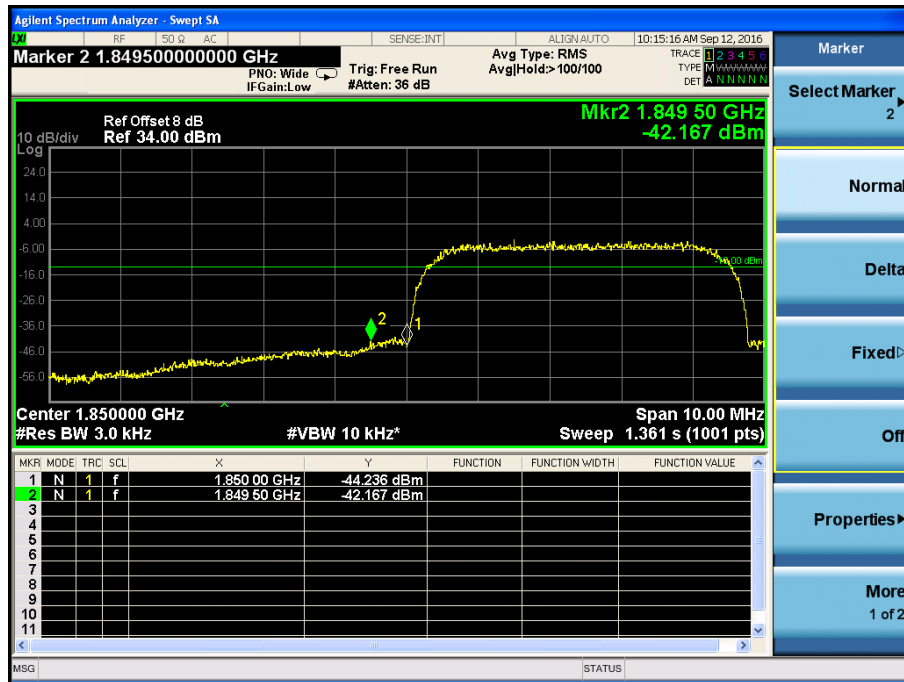

## HSDPA High Band Spurious Emission



## 8. Spurious Radiated Emissions

### 8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB =  $43 + 10 \log_{10}(\text{power out in Watts})$

### 8.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 8.4 Summary of Test Results/Plots

According to the data below, the FCC Part 22.917 and 24.238 standards, and had the worst margin of:


*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*



Spurious Emission From 30MHz to 1GHz


For Cellular Band\_ GPRS850 Mode

Horizontal:

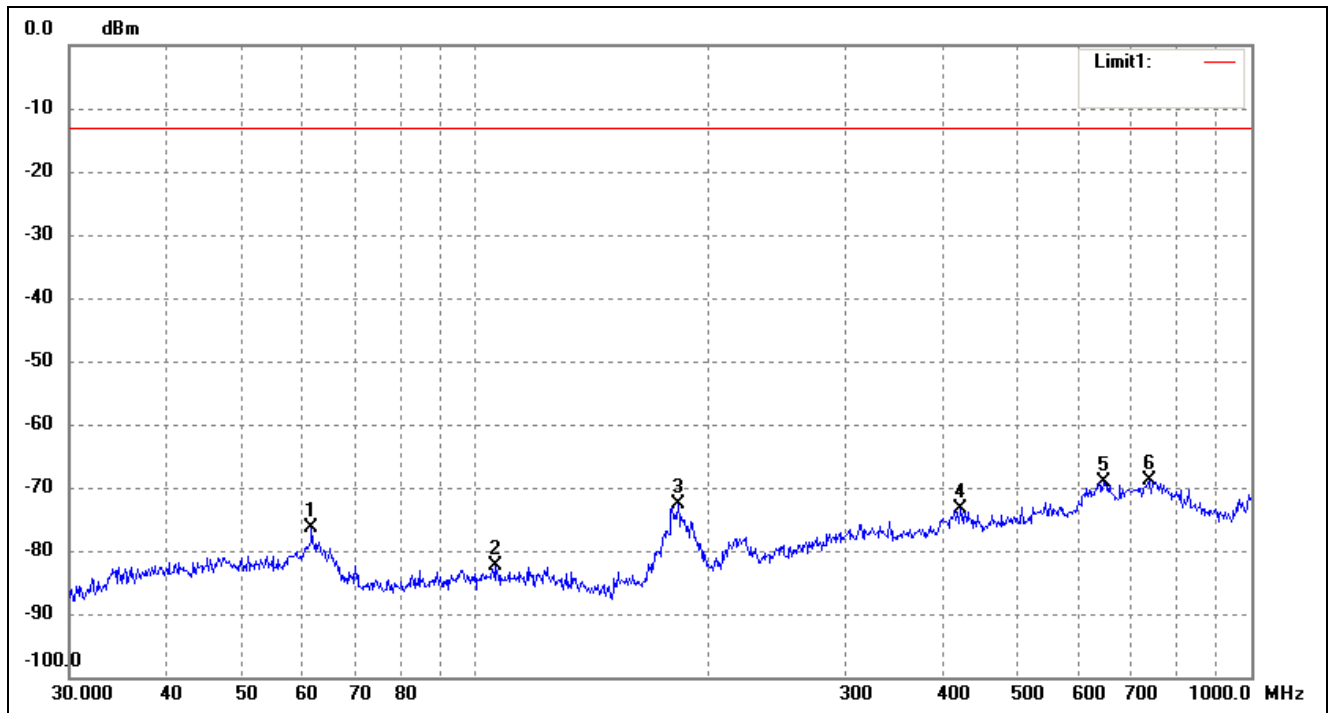

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	61.5617	-81.00	4.72	-76.28	-13.00	-63.28	ERP
2	106.3850	-87.37	4.89	-82.48	-13.00	-69.48	ERP
3	182.5592	-75.27	2.55	-72.72	-13.00	-59.72	ERP
4	422.0577	-85.41	11.95	-73.46	-13.00	-60.46	ERP
5	645.1195	-86.99	17.94	-69.05	-13.00	-56.05	ERP
6	739.6604	-87.77	19.00	-68.77	-13.00	-55.77	ERP


Vertical:

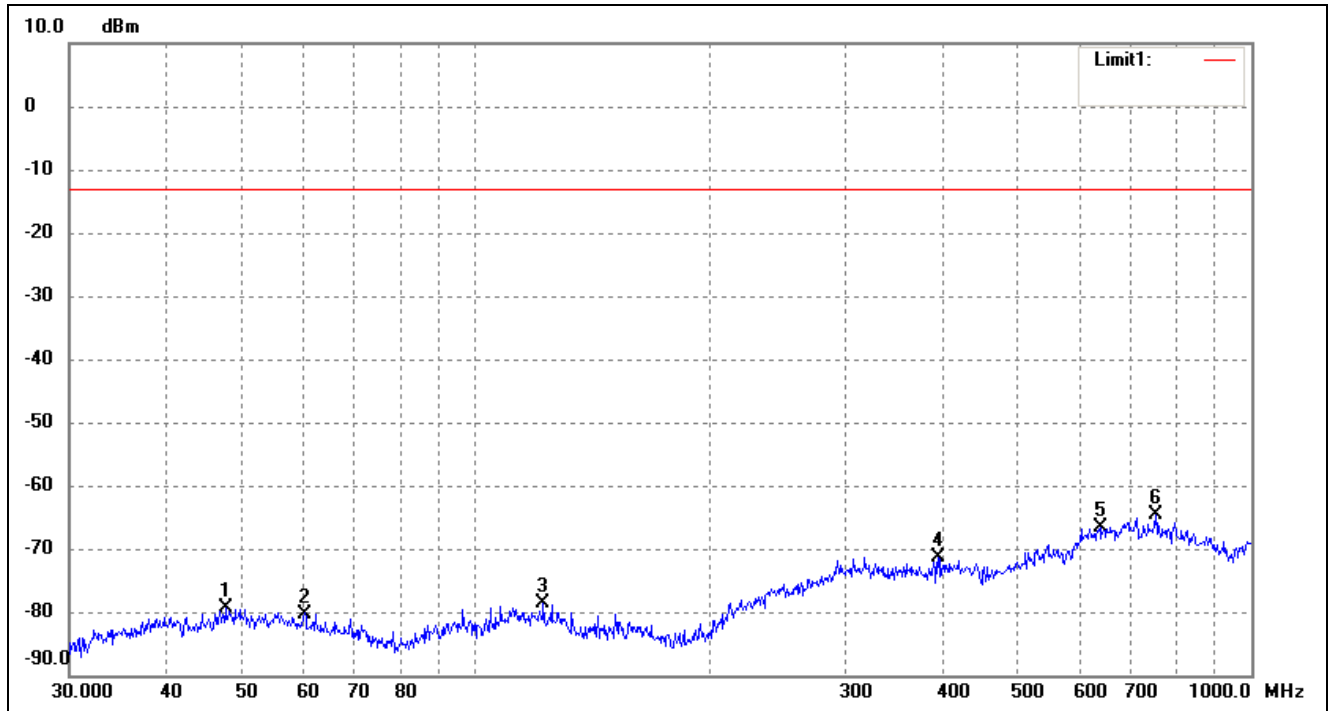

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.6586	-84.34	4.96	-79.38	-13.00	-66.38	ERP
2	60.2801	-85.23	4.98	-80.25	-13.00	-67.25	ERP
3	122.4040	-83.19	4.62	-78.57	-13.00	-65.57	ERP
4	394.8545	-83.82	12.46	-71.36	-13.00	-58.36	ERP
5	638.3686	-84.66	18.01	-66.65	-13.00	-53.65	ERP
6	752.7432	-83.19	18.47	-64.72	-13.00	-51.72	ERP


For Cellular Band\_ GPRS1900 Mode

Horizontal:

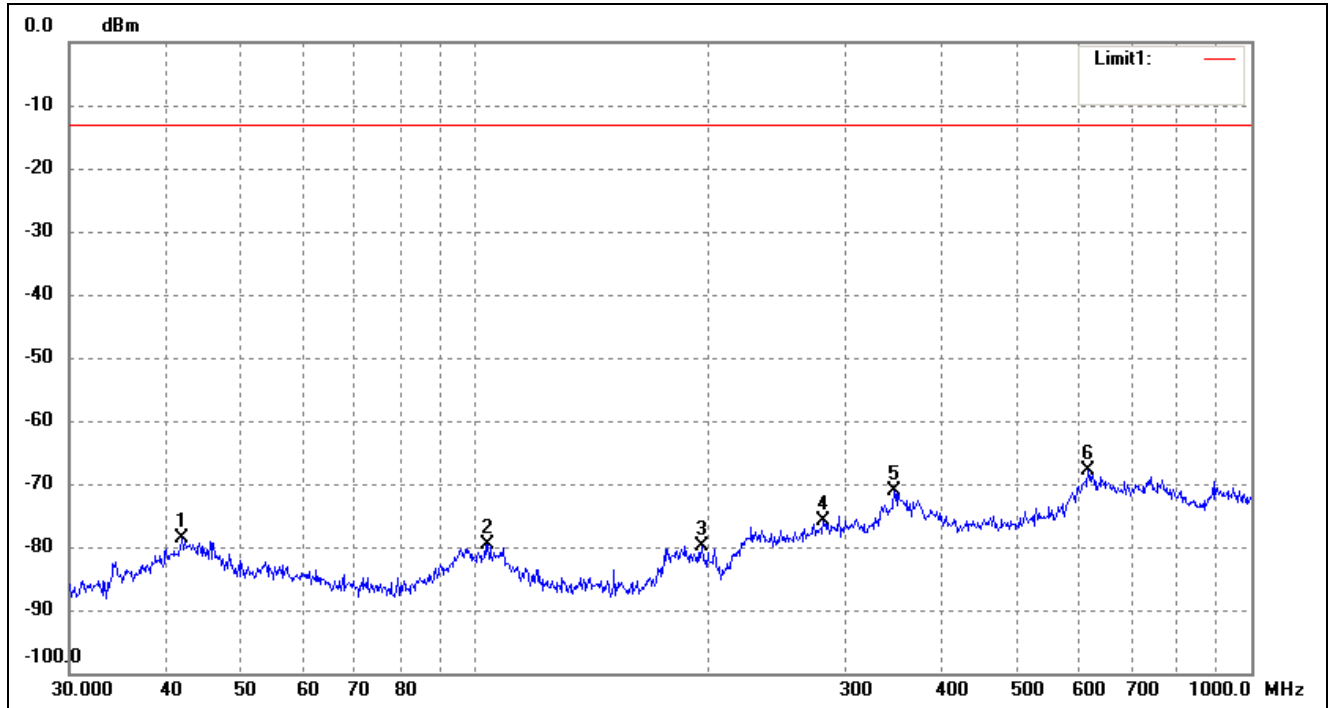

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	41.8596	-83.67	4.93	-78.74	-13.00	-65.74	ERP
2	103.8055	-84.58	4.89	-79.69	-13.00	-66.69	ERP
3	195.8220	-83.14	3.16	-79.98	-13.00	-66.98	ERP
4	281.0075	-86.98	11.18	-75.80	-13.00	-62.80	ERP
5	346.8092	-82.68	11.56	-71.12	-13.00	-58.12	ERP
6	616.3718	-85.44	17.61	-67.83	-13.00	-54.83	ERP

Vertical:

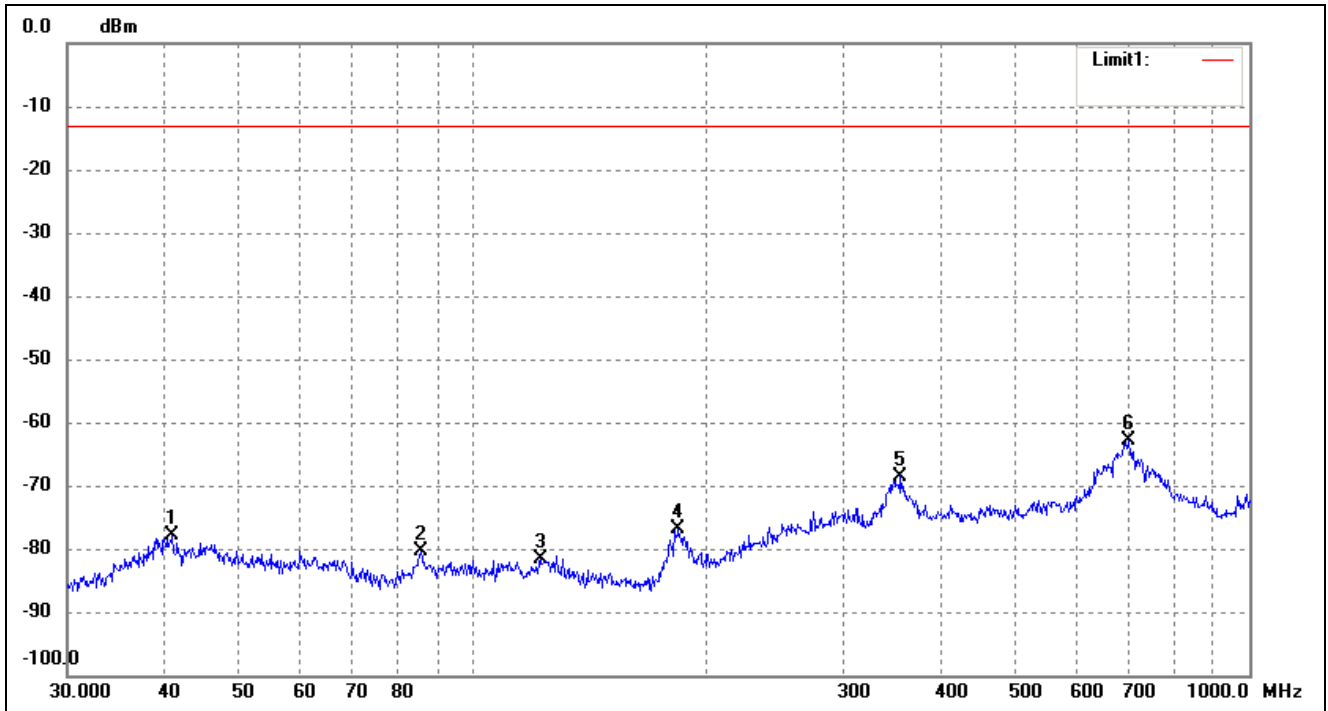


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	40.9881	-82.76	4.93	-77.83	-13.00	-64.83	ERP
2	85.5977	-83.15	2.66	-80.49	-13.00	-67.49	ERP
3	121.9755	-86.15	4.65	-81.50	-13.00	-68.50	ERP
4	183.8440	-79.60	2.61	-76.99	-13.00	-63.99	ERP
5	355.4273	-80.28	11.78	-68.50	-13.00	-55.50	ERP
6	699.3046	-80.20	17.23	-62.97	-13.00	-49.97	ERP

Note: Margin= (Reading+ Correct)- Limit


For band 5 Mode

Horizontal:

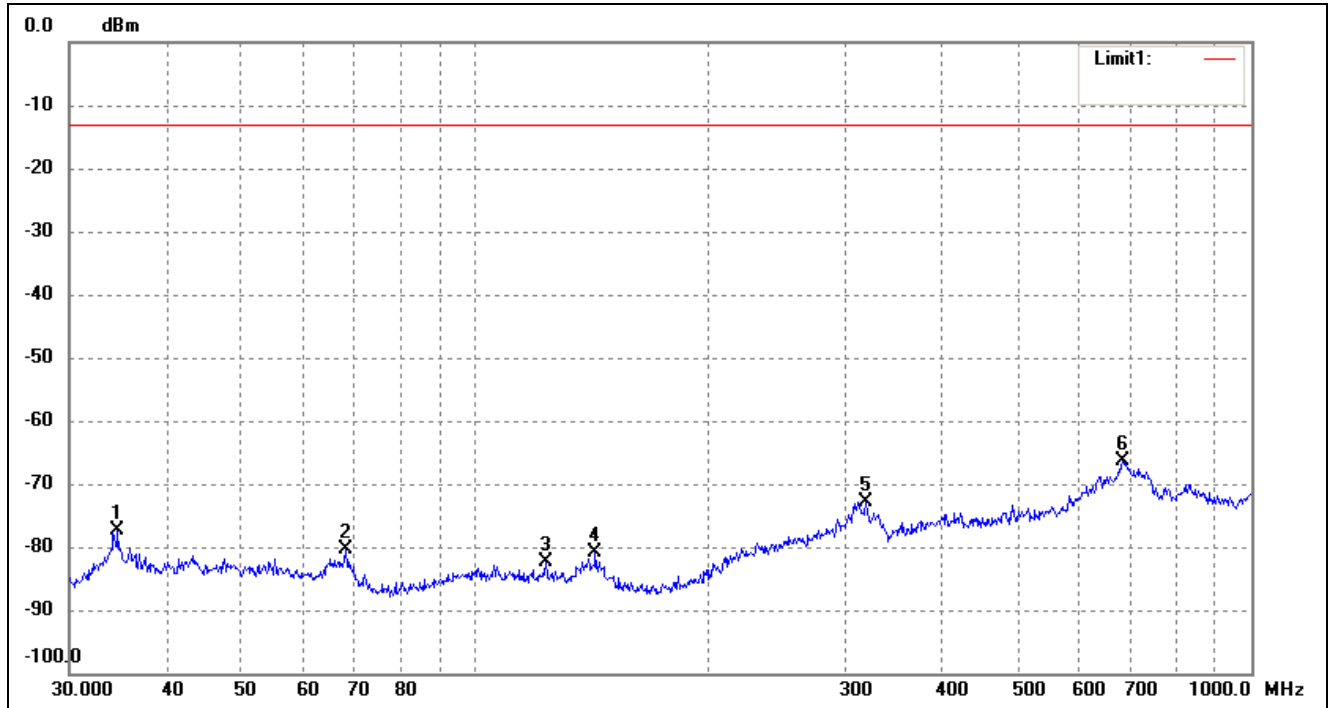

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	34.6385	-81.60	4.13	-77.47	-13.00	-64.47	ERP
2	68.1514	-83.72	3.29	-80.43	-13.00	-67.43	ERP
3	123.2655	-86.95	4.55	-82.40	-13.00	-69.40	ERP
4	142.8244	-83.95	3.04	-80.91	-13.00	-67.91	ERP
5	318.8170	-84.88	11.95	-72.93	-13.00	-59.93	ERP
6	682.3485	-84.75	18.50	-66.25	-13.00	-53.25	ERP


Vertical:

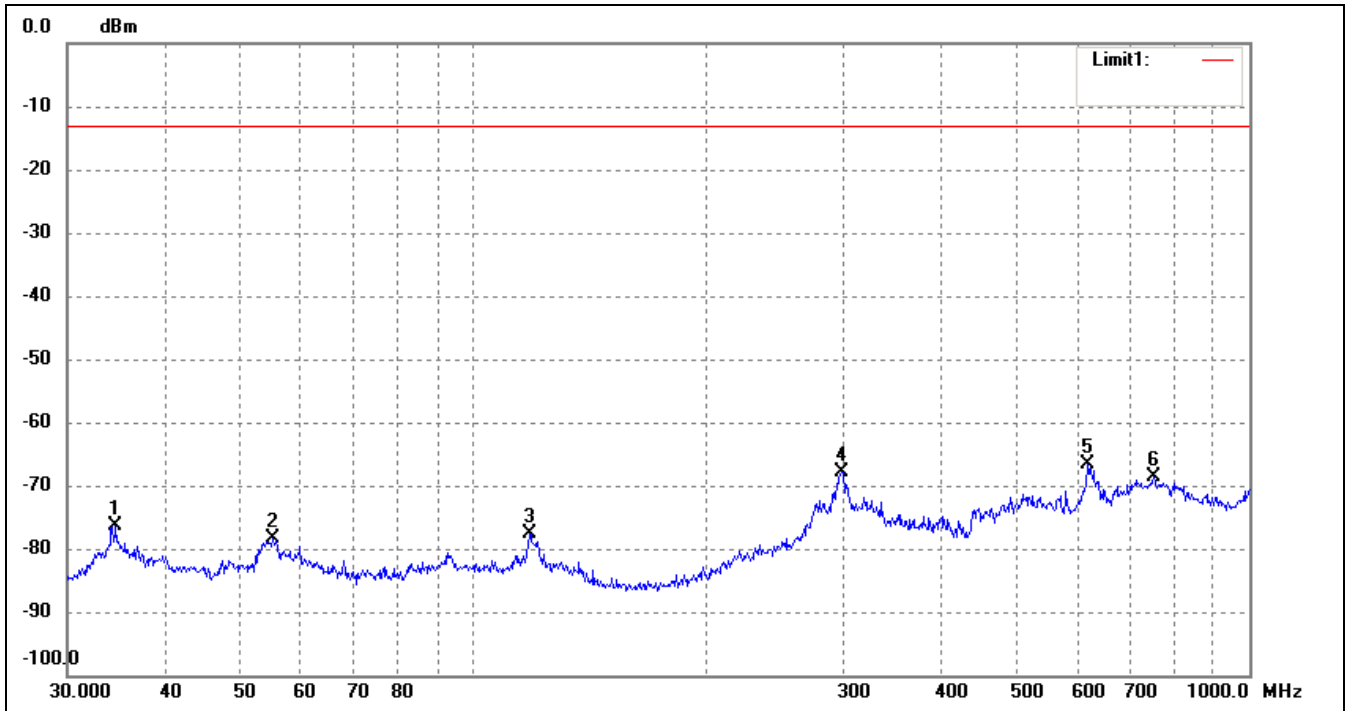

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	34.6385	-80.60	4.13	-76.47	-13.00	-63.47	ERP
2	55.2207	-83.43	5.02	-78.41	-13.00	-65.41	ERP
3	118.1862	-82.35	4.82	-77.53	-13.00	-64.53	ERP
4	298.2681	-79.64	11.89	-67.75	-13.00	-54.75	ERP
5	618.5369	-84.10	17.46	-66.64	-13.00	-53.64	ERP
6	752.7432	-87.16	18.47	-68.69	-13.00	-55.69	ERP


For band 2 Mode

Horizontal:

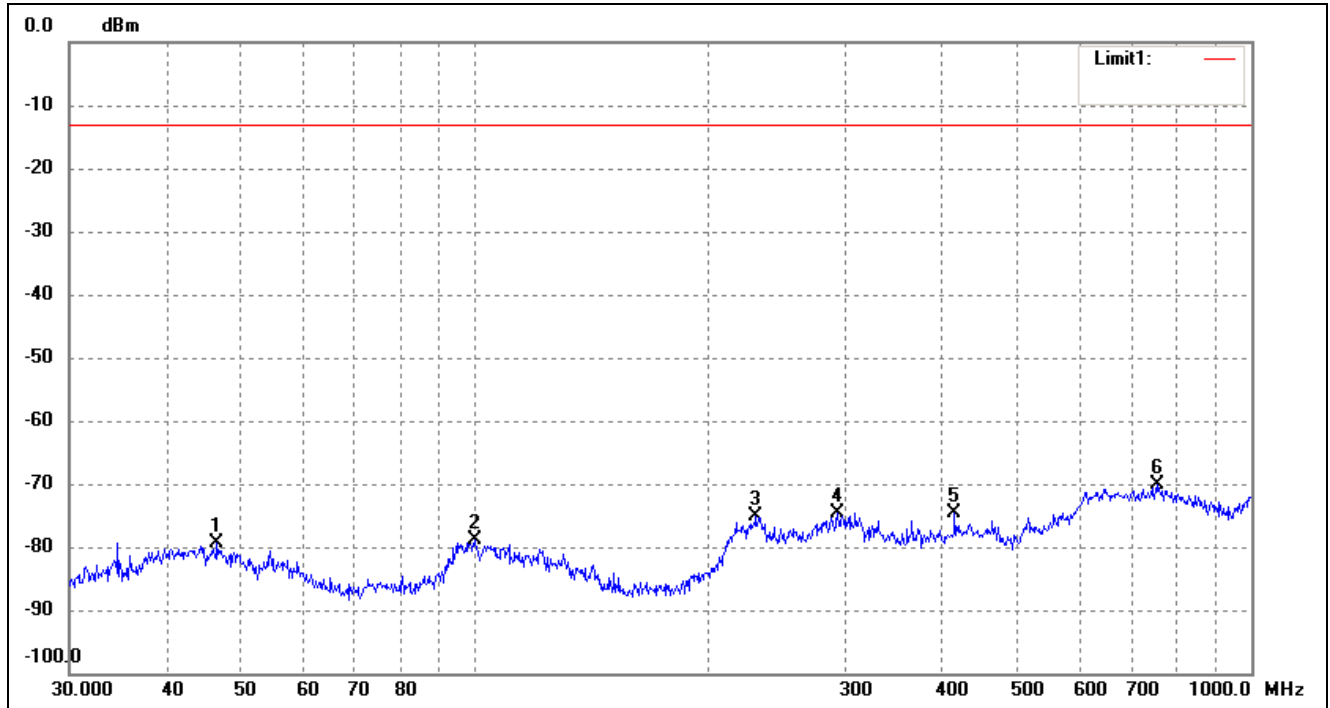

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.5030	-84.30	4.96	-79.34	-13.00	-66.34	ERP
2	99.8777	-83.87	4.91	-78.96	-13.00	-65.96	ERP
3	230.0985	-83.50	8.31	-75.19	-13.00	-62.19	ERP
4	293.0842	-86.29	11.69	-74.60	-13.00	-61.60	ERP
5	414.7223	-86.83	12.10	-74.73	-13.00	-61.73	ERP
6	758.0408	-88.47	18.23	-70.24	-13.00	-57.24	ERP

Vertical:

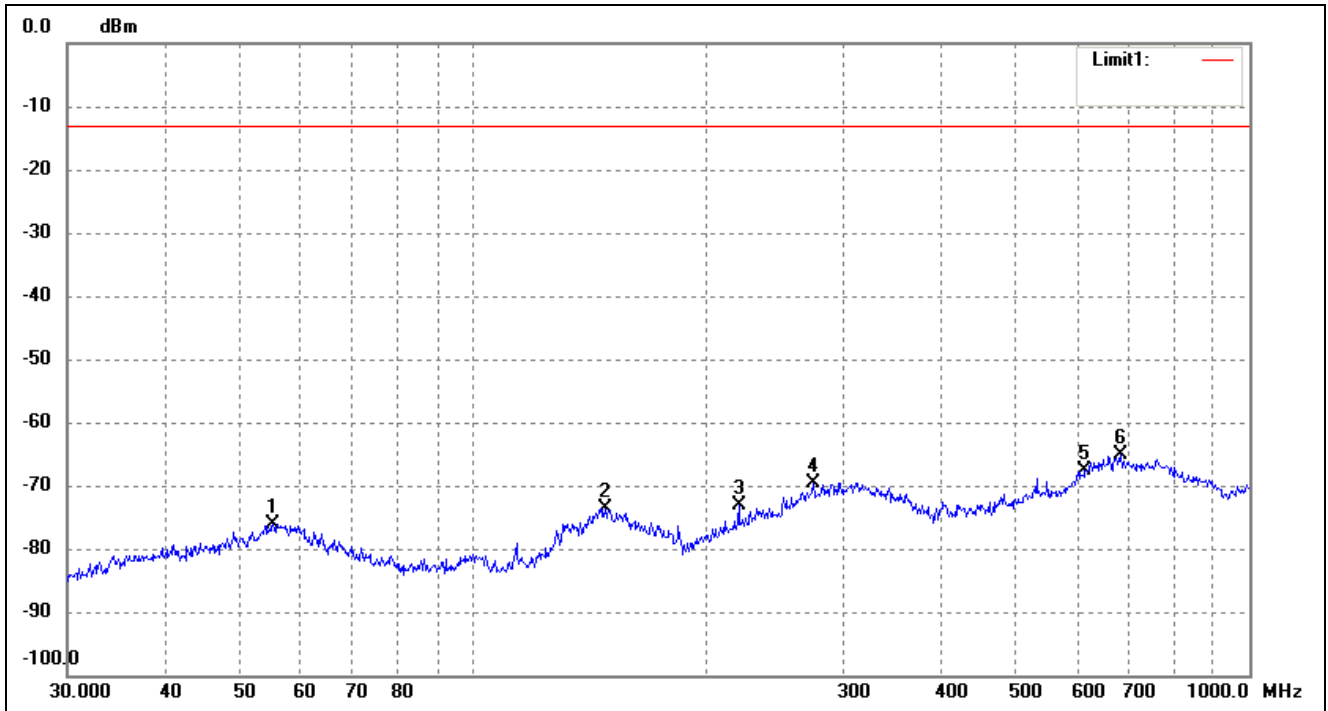

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	55.2207	-81.17	5.02	-76.15	-13.00	-63.15	ERP
2	147.9214	-76.38	2.84	-73.54	-13.00	-60.54	ERP
3	219.8449	-80.66	7.64	-73.02	-13.00	-60.02	ERP
4	274.1939	-80.24	10.72	-69.52	-13.00	-56.52	ERP
5	614.2142	-85.45	17.76	-67.69	-13.00	-54.69	ERP
6	682.3485	-83.57	18.50	-65.07	-13.00	-52.07	ERP

Note: Margin= (Reading+ Correct)- Limit



*Spurious Emissions Above 1GHz*

*For Cellular Band\_GPRS850 Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.52	4.94	-32.58	-13	-19.58	H
2472.6	-42.29	8.46	-33.83	-13	-20.83	H
1648.4	-39.97	4.94	-35.03	-13	-22.03	V
2472.6	-41.29	8.46	-32.83	-13	-19.83	V
Middle Channel (836.6MHz)						
1673.2	-36.28	5.11	-31.17	-13	-18.17	H
2509.8	-42.95	8.54	-34.41	-13	-21.41	H
1673.2	-37.62	5.11	-32.51	-13	-19.51	V
2509.8	-42.39	8.54	-33.85	-13	-20.85	V
High Channel (848.8MHz)						
1697.6	-36.75	5.29	-31.46	-13	-18.46	H
2546.4	-44.6	8.59	-36.01	-13	-23.01	H
1697.6	-36.45	5.29	-31.16	-13	-18.16	V
2546.4	-41.97	8.59	-33.38	-13	-20.38	V

*For PCS Band\_GPRS1900 Mode*

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-38.79	10.54	-28.25	-13	-15.25	H
5550.6	-43.33	13.37	-29.96	-13	-16.96	H
3700.4	-39.63	10.54	-29.09	-13	-16.09	V
5550.6	-42.3	13.37	-28.93	-13	-15.93	V
Middle Channel (1880MHz)						
3760.0	-36.17	10.64	-25.53	-13	-12.53	H
5640.0	-43.21	13.54	-29.67	-13	-16.67	H
3760.0	-39.16	10.64	-28.52	-13	-15.52	V
5640.0	-44.36	13.54	-30.82	-13	-17.82	V
High Channel (1909.8MHz)						
3819.6	-39.45	10.74	-28.71	-13	-15.71	H
5729.4	-43.28	13.71	-29.57	-13	-16.57	H
3819.6	-37.17	10.74	-26.43	-13	-13.43	V
5729.4	-43.05	13.71	-29.34	-13	-16.34	V

## For Band 5 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-38.7	4.94	-33.76	-13	-20.76	H
2479.2	-41.41	8.46	-32.95	-13	-19.95	H
1652.8	-37.36	4.94	-32.42	-13	-19.42	V
2479.2	-41.24	8.46	-32.78	-13	-19.78	V
Middle Channel (836.6MHz)						
1672.8	-39.66	5.11	-34.55	-13	-21.55	H
2509.2	-41.25	8.54	-32.71	-13	-19.71	H
1672.8	-38.94	5.11	-33.83	-13	-20.83	V
2509.2	-42.27	8.54	-33.73	-13	-20.73	V
High Channel (846.6MHz)						
1693.2	-37.1	5.29	-31.81	-13	-18.81	H
2539.8	-43.96	8.59	-35.37	-13	-22.37	H
1693.2	-38.75	5.29	-33.46	-13	-20.46	V
2539.8	-43.67	8.59	-35.08	-13	-22.08	V

## For Band 2 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-51.18	10.17	-41.01	-13	-28.01	H
5557.2	-51.43	14.69	-36.74	-13	-23.74	H
3704.8	-51.5	10.17	-41.33	-13	-28.33	V
5557.2	-53.07	14.69	-38.38	-13	-25.38	V
Middle Channel (1880MHz)						
3760.0	-53.27	10.26	-43.01	-13	-30.01	H
5640.0	-51.16	14.78	-36.38	-13	-23.38	H
3760.0	-51.12	10.26	-40.86	-13	-27.86	V
5640.0	-51	14.78	-36.22	-13	-23.22	V
High Channel (1907.6MHz)						
3815.2	-51.17	10.59	-40.58	-13	-27.58	H
5722.8	-52.4	15.03	-37.37	-13	-24.37	H
3815.2	-52.17	10.59	-41.58	-13	-28.58	V
5722.8	-51.77	15.03	-36.74	-13	-23.74	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Testing is carried out with frequency rang 9kHz to 20GHz, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so the data is not display.

## 9. Frequency Stability

### 9.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

Temperature:	Supply Voltage
20°C	AC 102-138
-30°C to +50°C	Normal

### 9.3 Environmental Conditions

Temperature:	20°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 9.4 Summary of Test Results/Plots

For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	120	68	0.0813
40	120	55	0.0657
30	120	45	0.0538
20	120	40	0.0478
10	120	35	0.0418
0	120	32	0.0383
-10	120	38	0.0454
-20	120	45	0.0538
-30	120	52	0.0622

For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	120	64	0.0340
40	120	55	0.0293
30	120	51	0.0271
20	120	47	0.0250
10	120	41	0.0218
0	120	37	0.0197
-10	120	44	0.0234
-20	120	48	0.0255
-30	120	56	0.0298

For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	120	58	0.0693
40	120	52	0.0622
30	120	42	0.0502
20	120	38	0.0454
10	120	33	0.0394
0	120	28	0.0335
-10	120	35	0.0418
-20	120	41	0.0490
-30	120	48	0.0574

For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	120	65	0.0346
40	120	61	0.0324
30	120	56	0.0298
20	120	50	0.0266
10	120	42	0.0223
0	120	36	0.0191
-10	120	41	0.0218
-20	120	48	0.0255
-30	120	56	0.0298

For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	120	53	0.0634
40	120	39	0.0466
30	120	35	0.0418
20	120	28	0.0335
10	120	22	0.0263
0	120	18	0.0215
-10	120	26	0.0311
-20	120	32	0.0383
-30	120	37	0.0442

For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	120	62	0.0330
40	120	56	0.0298
30	120	45	0.0239
20	120	38	0.0202
10	120	34	0.0181
0	120	29	0.0154
-10	120	35	0.0186
-20	120	43	0.0229
-30	120	47	0.0250

So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	102	44	0.0526
	120	40	0.0478
	138	36	0.0430
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	102	39	0.020
	120	47	0.0250
	138	39	0.0209

Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	102	45	0.0538
	120	38	0.0454
	138	40	0.0478
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	102	33	0.0176
	120	50	0.0266
	138	32	0.0170

Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	102	38	0.0454
	120	28	0.0335
	138	46	0.0550
Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	102	38	0.0202
	120	38	0.0202
	138	30	0.0160

\*\*\*\*\* END OF REPORT \*\*\*\*\*