




TEST REPORT

Report No. : CHTEW19090010 Report verification : 

Project No. : SHT1905090003EW

FCC ID..... : 2AK8ZPG19

Applicant's name..... : Shenzhen CarYa Interactive Technology Co., LTD

Address..... : 3003, Chuangxingda Business Center, No. 38, Liuxian 2nd Road, Bao'an District, Shenzhen, China

Manufacturer..... : PGEAR INTERACTIVE MOTORSPORT INC

Address..... : 6646 S Boom Town Dr, Las Vegas, NV 89122

Test item description : P-GEAR Laptimer

Trade Mark : P-GEAR

Model/Type reference..... : P610

Listed Model(s) : P610S, P520, P520S, P620, P650, P660, P800, P810, P820, P830

Standard : 47 CFR FCC Part 15 Subpart B

Date of receipt of test sample..... : Aug.06, 2019

Date of testing..... : Aug.06, 2019- Sept.02, 2019

Date of issue..... : Sept.03, 2019

Result..... : Pass

Compiled by
(position+printed name+signature).. : File administrators Echo Wei

Echo Wei

Supervised by
(position+printed name+signature).. : Project Engineer Edward Pan

Edward Pan

Approved by
(position+printed name+signature).. : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION.....</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	EUT operation mode	5
3.4.	Configuration of Tested System	5
3.5.	Support unit used in test configuration	5
<u>4.</u>	<u>TEST ENVIRONMENT.....</u>	<u>6</u>
4.1.	Address of the test laboratory	6
4.2.	Test Facility	6
4.3.	Environmental conditions	7
4.4.	Statement of the measurement uncertainty	7
4.5.	Equipments Used during the Test	8
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
5.1.	Conducted Emissions Test	9
5.2.	Radiated Emissions Test	12
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>16</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>17</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2019-09-03	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Emissions	15.107(a)	PASS	Kang Yang
Radiated Emissions	15.109(a)	PASS	Tony Duan

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Shenzhen CarYa Interactive Technology Co., LTD
Address:	3003, Chuangxingda Business Center, No. 38, Liuxian 2nd Road, Bao'an District, Shenzhen, China
Manufacturer:	PGEAR INTERACTIVE MOTORSPORT INC
Address:	6646 S Boom Town Dr, Las Vegas, NV 89122

3.2. Product Description

Name of EUT:	P-GEAR Laptimer
Trade Mark:	P-GEAR
Model No.:	P610
Listed Model(s)	P610S, P520, P520S, P620, P650, P660, P800, P810, P820, P830
Power supply:	DC 3.7V

3.3. EUT operation mode

Test mode	Description
GPS mode	Keep the EUT works at GPS receiving status.

3.4. Configuration of Tested System

N/A.

3.5. Support unit used in test configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	Adapter	Manufacturer:	Panasonic
		Model No.:	SAE00120
	/	Manufacturer:	/
		Model No.:	/

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

IC-Registration No.: 5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emissions	30~1000MHz	4.90 dB	(1)
Radiated Emissions	1~18GHz	4.96 dB	(1)
Conducted Disturbance	0.15~30MHz	3.02 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

● Conducted Emission						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
●	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
●	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
●	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
○	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
○	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
○	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
○	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
○	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
○	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26

● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
●	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
●	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

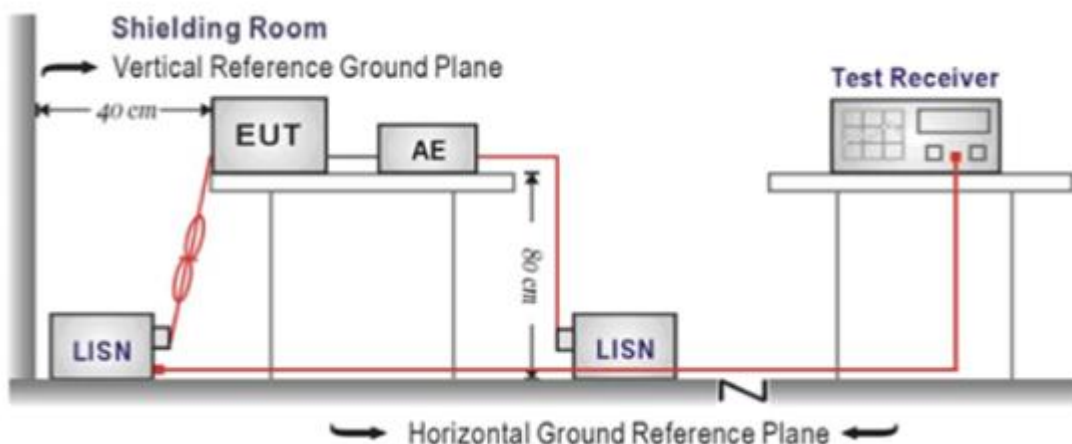

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:

L

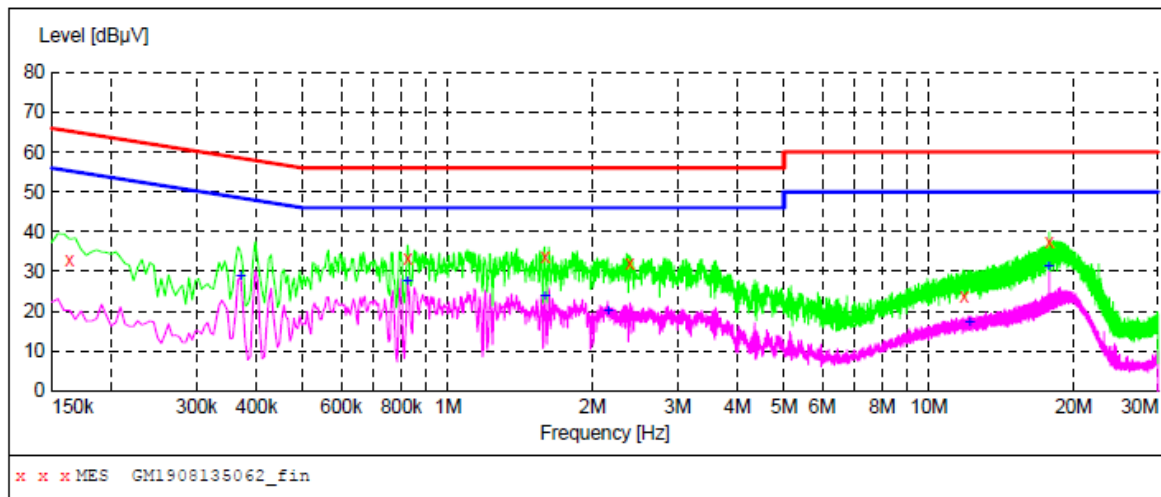**MEASUREMENT RESULT: "GM1908135062_fin"**

8/13/2019 4:13PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	32.70	9.9	65	32.6	QP	L1	GND
0.825000	33.40	9.9	56	22.6	QP	L1	GND
1.590000	33.80	9.9	56	22.2	QP	L1	GND
2.386500	32.20	9.9	56	23.8	QP	L1	GND
11.845500	23.70	10.1	60	36.3	QP	L1	GND
17.812500	37.40	10.2	60	22.6	QP	L1	GND


MEASUREMENT RESULT: "GM1908135062_fin2"

8/13/2019 4:13PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.370500	28.70	9.9	49	19.8	AV	L1	GND
0.825000	27.40	9.9	46	18.6	AV	L1	GND
1.590000	23.90	9.9	46	22.1	AV	L1	GND
2.152500	20.00	9.9	46	26.0	AV	L1	GND
12.142500	17.10	10.1	50	32.9	AV	L1	GND
17.812500	31.10	10.2	50	18.9	AV	L1	GND

Test Line:

N

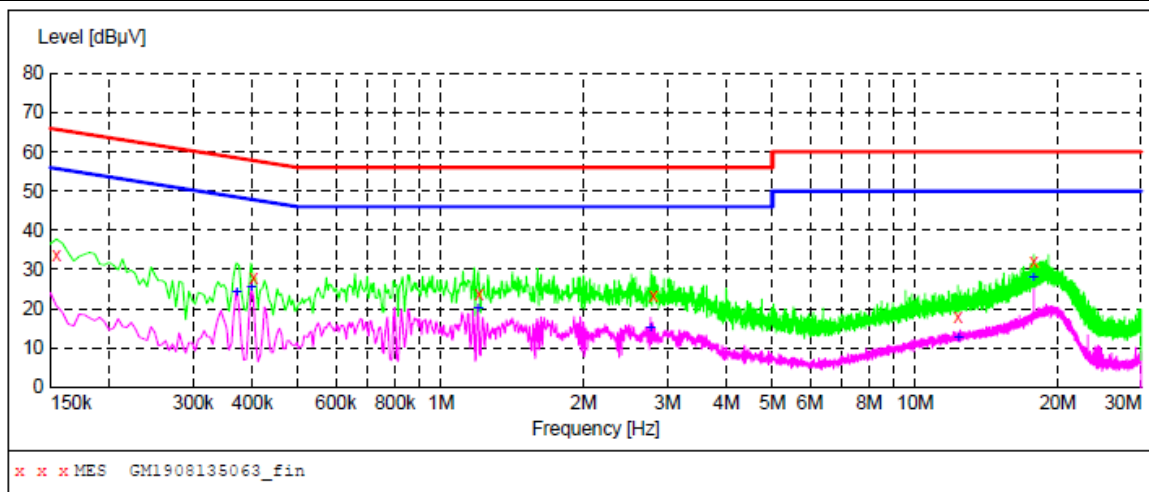**MEASUREMENT RESULT: "GM1908135063_fin"**

8/13/2019 4:15PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	33.70	9.9	66	32.1	QP	N	GND
0.402000	27.70	9.9	58	30.1	QP	N	GND
1.203000	23.60	9.9	56	32.4	QP	N	GND
2.800500	23.20	9.9	56	32.8	QP	N	GND
12.309000	17.80	10.1	60	42.2	QP	N	GND
17.812500	32.00	10.2	60	28.0	QP	N	GND

MEASUREMENT RESULT: "GM1908135063_fin2"

8/13/2019 4:15PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.370500	24.10	9.9	49	24.4	AV	N	GND
0.397500	25.50	9.9	48	22.4	AV	N	GND
1.198500	20.00	9.9	46	26.0	AV	N	GND
2.764500	15.10	9.9	46	30.9	AV	N	GND
12.349500	12.70	10.1	50	37.3	AV	N	GND
17.812500	27.70	10.2	50	22.3	AV	N	GND

5.2. Radiated Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

➤ 30MHz ~ 1GHz

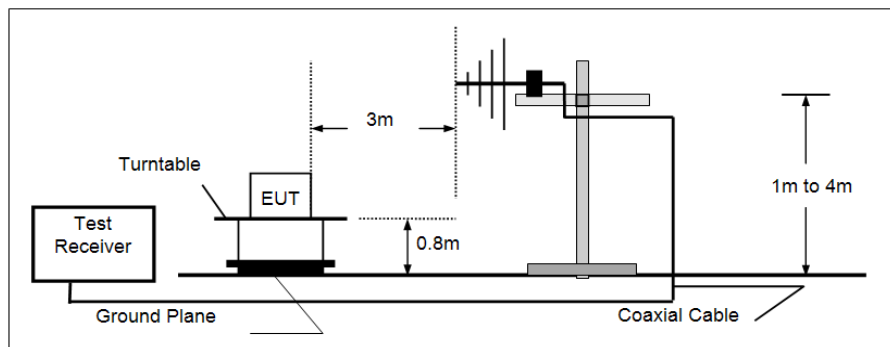

➤ Above 1GHz

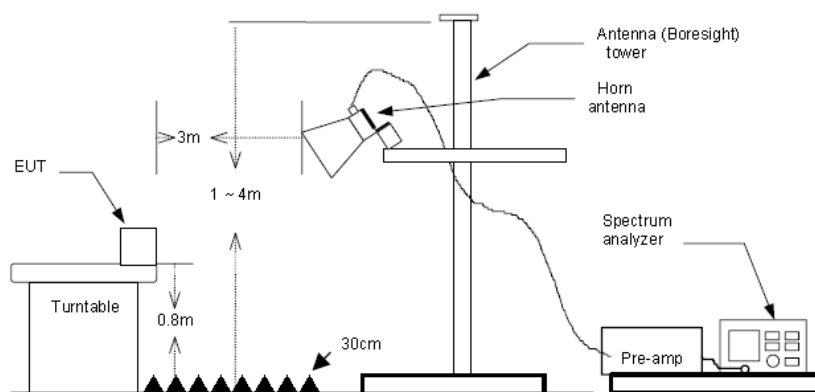

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz,
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


Polarization:

Horizontal

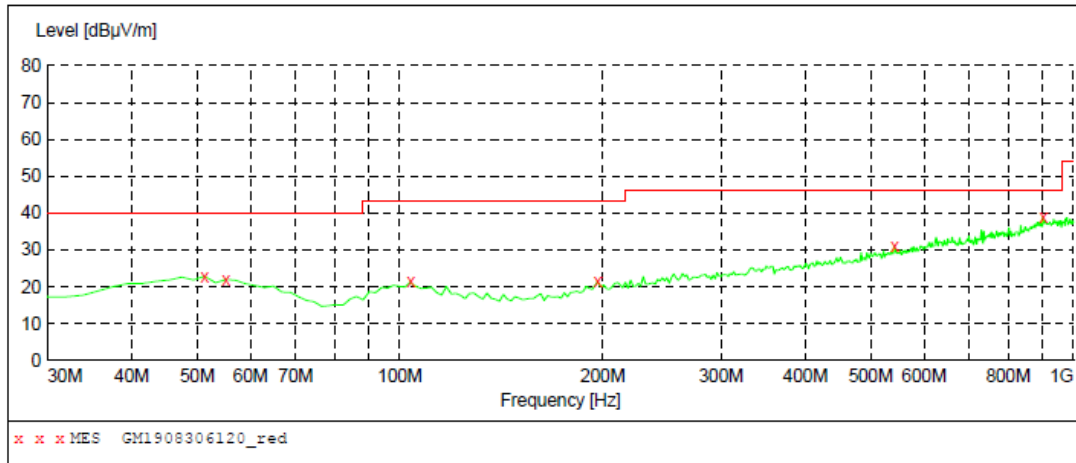**MEASUREMENT RESULT: "GM1908306120_red"**

8/30/2019 9:46PM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
51.340000	22.90	-4.9	40.0	17.1	QP	100.0	351.00	HORIZONTAL
55.220000	22.00	-5.3	40.0	18.0	QP	100.0	188.00	HORIZONTAL
103.720000	21.30	-6.6	43.5	22.2	QP	300.0	159.00	HORIZONTAL
196.840000	21.40	-5.9	43.5	22.1	QP	300.0	270.00	HORIZONTAL
542.160000	30.90	2.8	46.0	15.1	QP	100.0	335.00	HORIZONTAL
901.060000	38.80	10.5	46.0	7.2	QP	300.0	283.00	HORIZONTAL

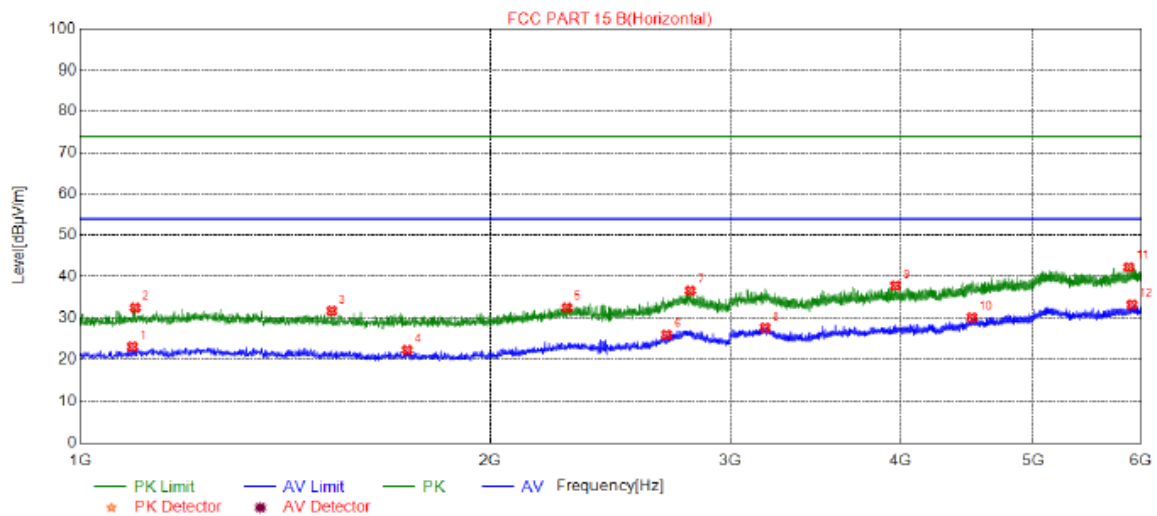

Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1092.500	29.94	-6.94	23.00	54.00	31.00	Horizontal	AV
1097.500	39.38	-6.91	32.47	74.00	41.53	Horizontal	PK
1529.375	37.51	-5.82	31.69	74.00	42.31	Horizontal	PK
1737.500	28.22	-5.99	22.23	54.00	31.77	Horizontal	AV
2275.625	34.98	-2.49	32.49	74.00	41.51	Horizontal	PK
2692.500	25.49	0.45	25.94	54.00	28.06	Horizontal	AV
2802.500	34.57	2.05	36.62	74.00	37.38	Horizontal	PK
3181.250	26.87	0.74	27.61	54.00	26.39	Horizontal	AV
3965.000	34.89	2.90	37.79	74.00	36.21	Horizontal	PK
4512.500	24.73	5.40	30.13	54.00	23.87	Horizontal	AV
5880.625	32.41	9.90	42.31	74.00	31.69	Horizontal	PK
5913.125	23.13	10.04	33.17	54.00	20.83	Horizontal	AV


Polarization:

Vertical

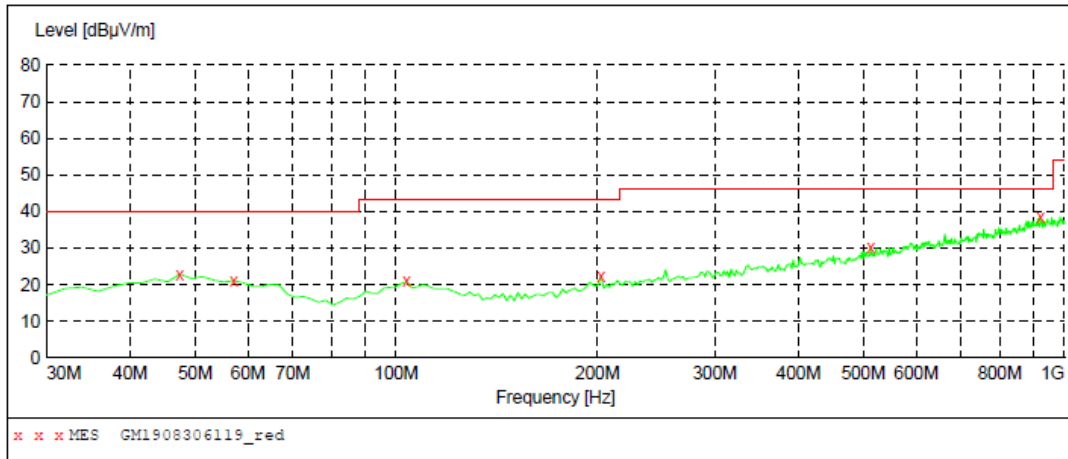**MEASUREMENT RESULT: "GM1908306119_red"**

8/30/2019 9:42PM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	22.90	-4.9	40.0	17.1	QP	100.0	236.00	VERTICAL
57.160000	21.10	-5.5	40.0	18.9	QP	100.0	248.00	VERTICAL
103.720000	20.90	-6.6	43.5	22.6	QP	100.0	207.00	VERTICAL
202.660000	22.20	-6.2	43.5	21.3	QP	100.0	33.00	VERTICAL
513.060000	30.30	2.3	46.0	15.7	QP	100.0	0.00	VERTICAL
920.460000	38.60	10.7	46.0	7.4	QP	100.0	265.00	VERTICAL

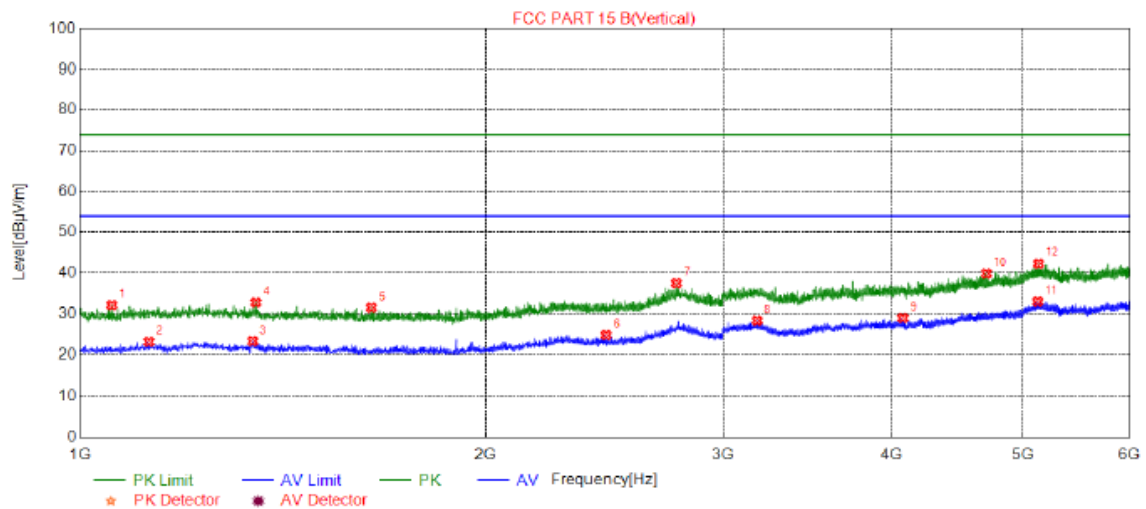

Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
1056.250	39.35	-7.21	32.14	74.00	41.86	Vertical	PK
1125.000	29.74	-6.63	23.11	54.00	30.89	Vertical	AV
1343.125	28.84	-5.57	23.27	54.00	30.73	Vertical	AV
1350.625	38.34	-5.58	32.76	74.00	41.24	Vertical	PK
1645.000	37.72	-6.20	31.52	74.00	42.48	Vertical	PK
2456.250	26.99	-2.24	24.75	54.00	29.25	Vertical	AV
2768.750	35.87	1.62	37.49	74.00	36.51	Vertical	PK
3178.125	27.60	0.73	28.33	54.00	25.67	Vertical	AV
4075.625	25.73	3.19	28.92	54.00	25.08	Vertical	AV
4701.250	33.50	6.39	39.89	74.00	34.11	Vertical	PK
5130.625	24.11	8.86	32.97	54.00	21.03	Vertical	AV
5138.750	33.44	8.87	42.31	74.00	31.69	Vertical	PK

6. TEST SETUP PHOTOS OF THE EUT

Conducted Emissions (AC Mains)

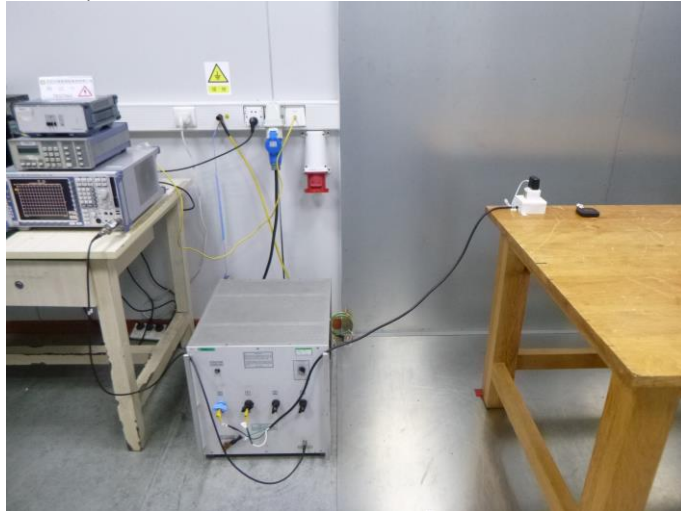


Radiated Emissions (30MHz-1GHz)



Radiated Emissions (Above 1GHz)



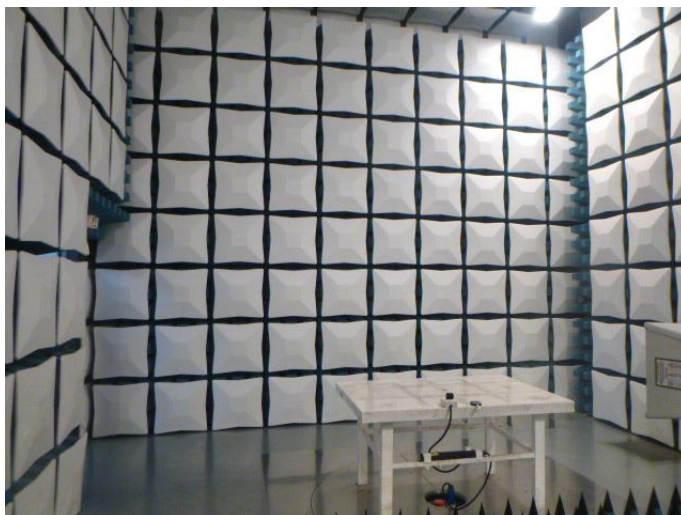

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No.: CHTEW19090009

-----End of Report-----