



Report No.: FCC 1610105
File reference No.: 2016-10-26

Applicant: Shenzhen KIVOS Technology Co.,Ltd.

Product: Wireless Door Viewer--monitor

Model No.: KDB307-I, KDB307A-I, KDB308-I, KDB309-I

Trademark: KIVOS

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: 26,October 2016

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (+86 755)8344 8688 Fax (+86 755)8344 2996 E-Mail:info@timeway-lab.com

Report No.: FCC1610105 Page 2 of 56

Date: 2016-10-26



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 56

Report No.: FCC1610105

Date: 2016-10-26



Test Report Conclusion

	Content	
1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth Measurement.	22
8.0	Maximum Peak Output Power	26
9.0	Carrier Frequency Separation.	28
10.0	Number of Hopping Channel.	30
11.0	Time of Occupancy (Dwell Time).	32
12.0	Out of Band Measurement.	36
13.0	Antenna Requirement.	41
14.0	FCC Label	42

15.0

Photo of Test Setup and EUT View.

Report No.: FCC1610105

Date: 2016-10-26



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES

Address: Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong, China

Telephone: +86 755 83448688 Fax: +86 755 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen KIVOS Technology Co.,Ltd.

Address: Building 4,No.6 Industrial Park, Yulv Village, Gongming Town, Guangming New District,

Shenzhen, China.

Telephone: 0755-27150848 Fax: 0755-27151938

1.3 Description of EUT

Product: Wireless Door Viewer--monitor

Manufacturer: Shenzhen KIVOS Technology Co.,Ltd.

Address: Building 4,No.6 Industrial Park,Yulv Village,Gongming Town,Guangming New

District, Shenzhen, China.

Brand Name: KIVOS
Model Number: KDB307-I

Additional Model Name KDB307A-I, KDB308-I, KDB309-I

Additional Trade Name N/A
Type of Modulation BPSK

Frequency Channel List: (MHz)

	<u> </u>	,					
CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
2410.875	2424.375	2441.25	2458.125	2427.75	2444.625	2461.5	2414.25
СН9	CH10	CH11	CH12	CH13	CH14	CH15	CH16
2431.125	2448	2464.875	2417.625	2434.5	2451.375	2468.25	2421
CH17	CH18	CH19					
2437.875	2454.75	2471.625					

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1610105 Page 5 of 56

Date: 2016-10-26

TING LASON

Frequency Selection By software

Antenna type Integral Antenna used, the antenna gain is 2.0dBi

Power Supply: BSG0501000, Input: 100-240V, 50/60Hz; Output: 5V, 1000mA

1.4 Submitted Sample: 2 Sample

1.5 Test Duration:

2016-09-26 to 2016-10-25

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 56

Report No.: FCC1610105

Date: 2016-10-26



2.0	Test Equipments								
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date				
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2016-08-19	2017-08-18				
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2016-08-20	2017-08-29				
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2016-08-20	2017-08-19				
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2016-08-24	2017-08-23				
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2016-08-22	2017-08-21				
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2016-08-19	2017-08-20				
System Controller	CT	SC100	-						
Printer	EPSON	РНОТО ЕХЗ	CFNH234850						
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-				
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22				
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2016-08-19	2017-08-20				
3m OATS			N/A	2016-08-24	2017-08-23				
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23				
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2016-08-24	2017-08-23				
Power meter	Anritsu	ML2487A	6K00003613	2016-08-19	2017-08-18				
Power sensor	Anritsu	MA2491A	32263	2016-08-19	2017-08-18				
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-24	2017-08-23				
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21				
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-20	2017-08-19				
9*6*6 Anechoic			N/A	2016-08-24	2017-08-23				
EMI Test Receiver	RS	ESCS30	100139	2016-08-19	2017-08-20				

Report No.: FCC1610105 Page 7 of 56

Date: 2016-10-26



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and	15.247(d),15.205(a),	PASS	Complies
Restricted bands	15.209 (a),15.109		
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Page 8 of 56


Date: 2016-10-26

Report No.: FCC1610105



5. Power Line Conducted Emission Test

5.1 Schematics of the test

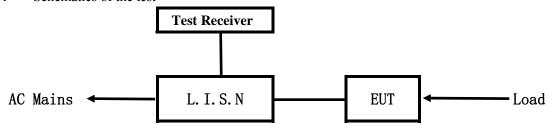


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2014.

Test Voltage: 120V~60Hz Block diagram of Test setup

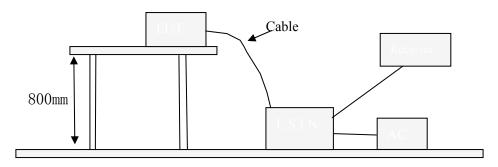

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

19 channels are provided to the EUT

Report No.: FCC1610105 Page 9 of 56

Date: 2016-10-26



A. EUT

Device	Manufacturer	Model	FCC ID
Wireless Door	Shenzhen KIVOS Technology	KDB307-I,KDB307A-I,	2AKAJ308
Viewermonitor	Co.,Ltd.	KDB308-I, KDB309-I	

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2016-10-26



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keeping Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

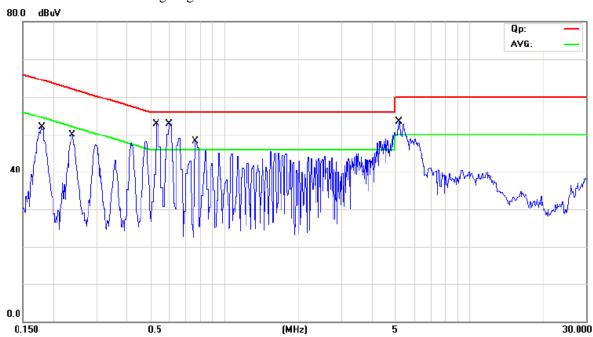

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∀	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1784	36.30	11.03	47.33	64.56	-17.23	QP	
2		0.1784	24.50	11.03	35.53	54.56	-19.03	AVG	
3		0.2373	35.30	11.09	46.39	62.19	-15.80	QP	
4		0.2373	25.30	11.09	36.39	52.19	-15.80	AVG	
5		0.5336	38.50	11.41	49.91	56.00	-6.09	QP	
6	*	0.5336	33.00	11.41	44.41	46.00	-1.59	AVG	
7		0.5936	38.10	11.47	49.57	56.00	-6.43	QP	
8		0.5936	30.60	11.47	42.07	46.00	-3.93	AVG	
9		0.7690	31.60	11.66	43.26	56.00	-12.74	QP	
10		0.7690	23.10	11.66	34.76	46.00	-11.24	AVG	
11		5.2121	33.90	13.41	47.31	60.00	-12.69	QP	
12		5.2121	25.20	13.41	38.61	50.00	-11.39	AVG	
									-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: FCC1610105 Page 11 of 56

Date: 2016-10-26



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keeping Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

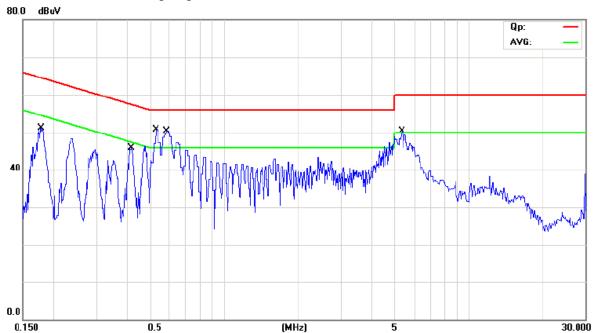

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1773	37.30	11.03	48.33	64.61	-16.28	QP	
2		0.1773	28.00	11.03	39.03	54.61	-15.58	AVG	
3		0.4137	29.90	11.28	41.18	57.57	-16.39	QP	
4		0.4137	22.50	11.28	33.78	47.57	-13.79	AVG	
5		0.5302	36.30	11.40	47.70	56.00	-8.30	QP	
6	*	0.5302	30.80	11.40	42.20	46.00	-3.80	AVG	
7		0.5861	36.50	11.46	47.96	56.00	-8.04	QP	
8		0.5861	29.30	11.46	40.76	46.00	-5.24	AVG	
9		5.3072	31.40	13.37	44.77	60.00	-15.23	QP	
10		5.3072	22.80	13.37	36.17	50.00	-13.83	AVG	

Report No.: FCC1610105 Page 12 of 56


Date: 2016-10-26



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

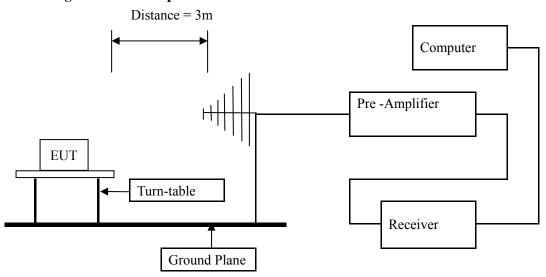

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: FCC1610105 Page 13 of 56

Date: 2016-10-26



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.109. 15.209

	-	3 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: FCC1610105 Page 14 of 56

Date: 2016-10-26



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/ In Vertical (30MHz----1000MHz)

EUT set Condition: Keeping Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
125.160	33.58	Н	43.50
992.320	39.93	Н	54.00
420.000	35.08	Н	46.00
84.000	33.66	Н	40.00
31.680	32.63	V	40.00
948.000	39.10	V	46.00
114.920	35.93	V	43.50
77.400	34.15	V	40.00

Report No.: FCC1610105 Page 15 of 56

Date: 2016-10-26


dΒμV

1 PK MAXH

/m



Test Figure:

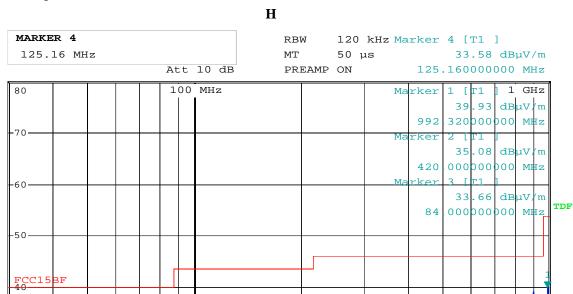

6DB

1 GHz

Date: 25.OCT.2016 15:57:13


30 MHz

Report No.: FCC1610105 Page 16 of 56

Date: 2016-10-26



Test Figure:

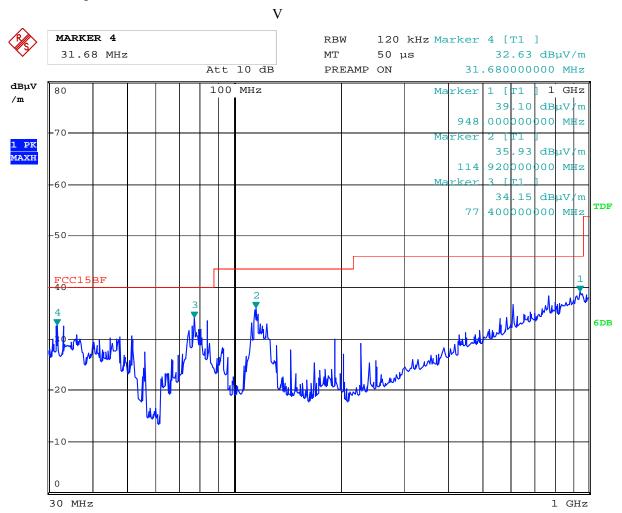

Date: 25.OCT.2016 15:53:25

Report No.: FCC1610105 Page 17 of 56

Date: 2016-10-26



Operation Mode: Transmitting under Low Channel (2410.875MHz)

	Ü		
Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
	•	-	
4821.750		Н	74(Peak)/ 54(AV)
4821.750		V	74(Peak)/ 54(AV)
7232.625		H/V	74(Peak)/ 54(AV)
9643.500		H/V	74(Peak)/ 54(AV)
12054.375		H/V	74(Peak)/ 54(AV)
14465.250		H/V	74(Peak)/ 54(AV)
16876.125		H/V	74(Peak)/ 54(AV)
19287.000		H/V	74(Peak)/ 54(AV)
21697.875		H/V	74(Peak)/ 54(AV)
24108.750		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441.25MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \) V/m)
		•	
		<u> </u>	<u> </u>
4882.50		Н	74(Peak)/ 54(AV)
4882.50		V	74(Peak)/ 54(AV)
7323.75		H/V	74(Peak)/ 54(AV)
9765.00	-	H/V	74(Peak)/ 54(AV)
12206.25		H/V	74(Peak)/ 54(AV)
14647.50		H/V	74(Peak)/ 54(AV)
17088.75	-	H/V	74(Peak)/ 54(AV)
19530.00	-	H/V	74(Peak)/ 54(AV)
21971.25	1	H/V	74(Peak)/ 54(AV)
24412.50		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1610105 Page 18 of 56

Date: 2016-10-26



Operation Mode: Transmitting under High Channel (2471.625MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
		-	
4943.250	-	Н	74(Peak)/ 54(AV)
4943.250		V	74(Peak)/ 54(AV)
7414.875		H/V	74(Peak)/ 54(AV)
9886.500		H/V	74(Peak)/ 54(AV)
12358.125		H/V	74(Peak)/ 54(AV)
14829.750		H/V	74(Peak)/ 54(AV)
17301.375		H/V	74(Peak)/ 54(AV)
19773.000		H/V	74(Peak)/ 54(AV)
22244.625		H/V	74(Peak)/ 54(AV)
24716.250		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured


Report No.: FCC1610105

Date: 2016-10-26




Please refer to the following test plots for details:

Low Channel: Horizontal

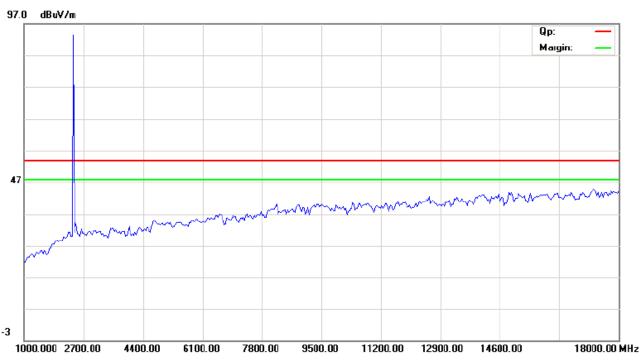

Low Channel: Vertical

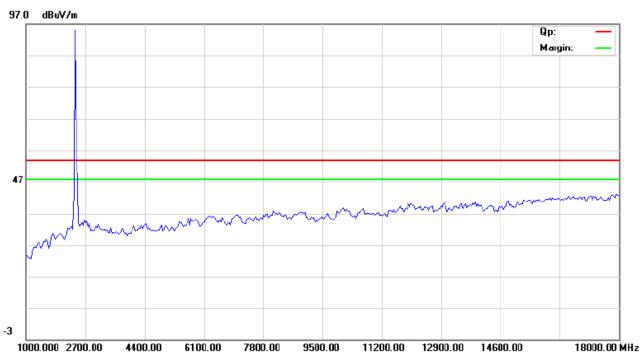

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 20 of 56


Report No.: FCC1610105

Date: 2016-10-26




Middle Channel: Horizontal



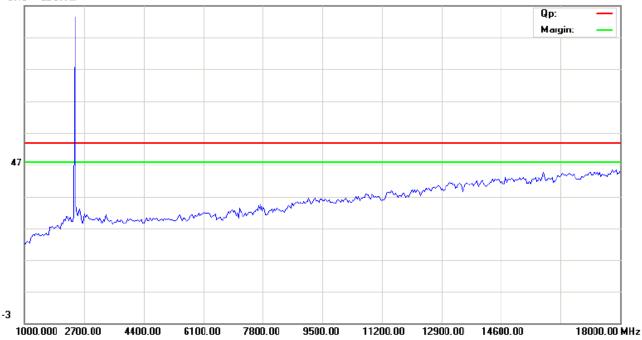

Middle Channel: Vertical



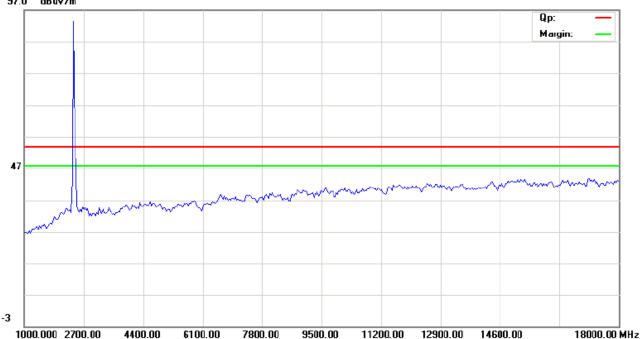


Page 21 of 56

Report No.: FCC1610105


Date: 2016-10-26



High Channel: Horizontal

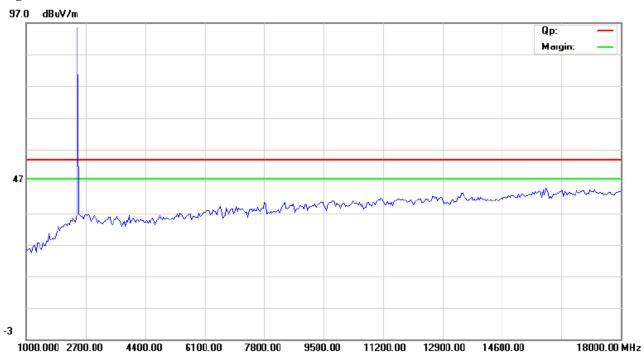

High Channel: Vertical

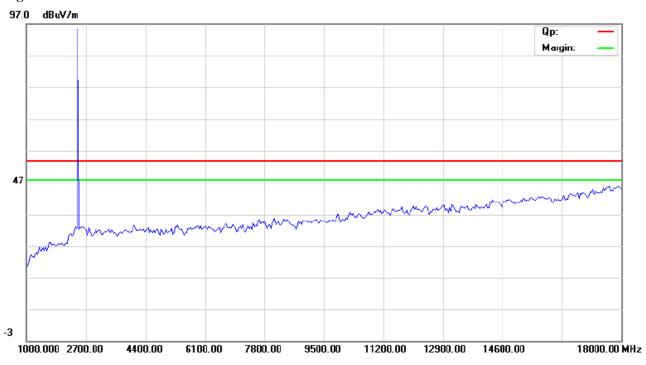

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1610105 Page 22 of 56

Date: 2016-10-26



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =10MHz, RBW =50kHz, VBW=100kHz, Sweep = auto Detector function = peak , $Trace = max \ hold$
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

EUT	Wireless	Wireless Door Viewermonitor		KDB307-I				
Mode	Ke	Keep Transmitting		Keep Transmitting		Keep Transmitting Input Voltage		DC3.7V
Temperat	cure 24 deg. C,		Humidity	56% RH				
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail				
Low	2410.875	3226		Pass				
Middle	2441.250 3246			Pass				
High	2471.625	2471.625 3287		Pass				


Report No.: FCC1610105 Page 23 of 56

Date: 2016-10-26



Test Figure:

1. Condition: Low Channel

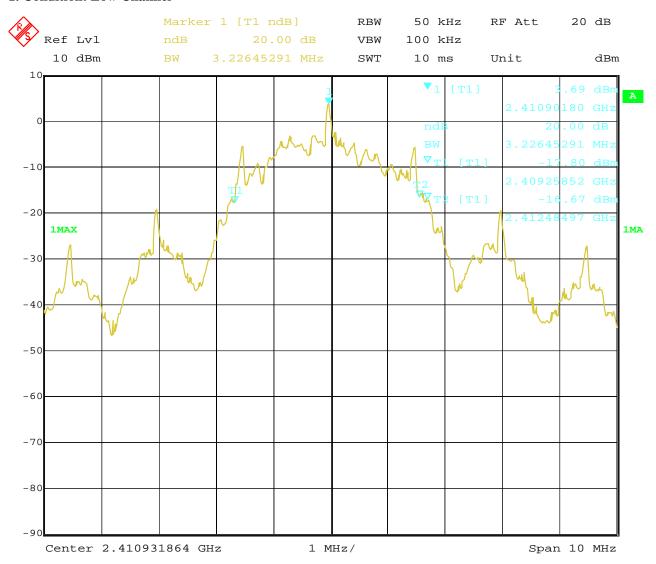


Date: 26.SEP.2016 17:37:03

Report No.: FCC1610105 Page 24 of 56

Date: 2016-10-26



2. Condition: Middle Channel

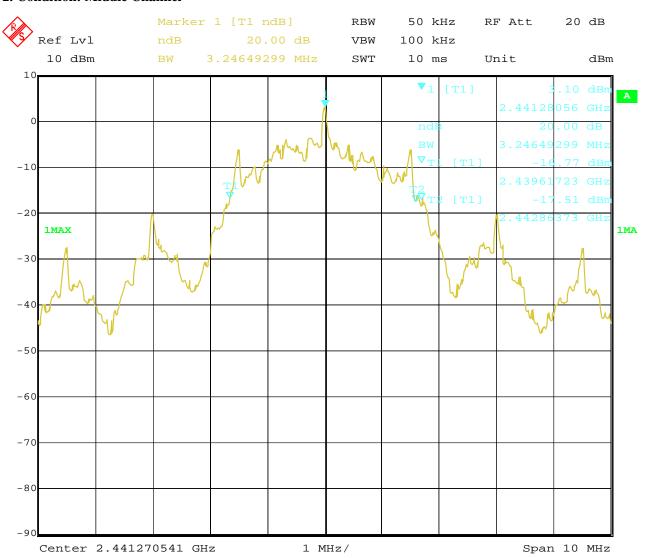


Date: 26.SEP.2016 17:31:01

Report No.: FCC1610105 Page 25 of 56

Date: 2016-10-26



3. High Channel

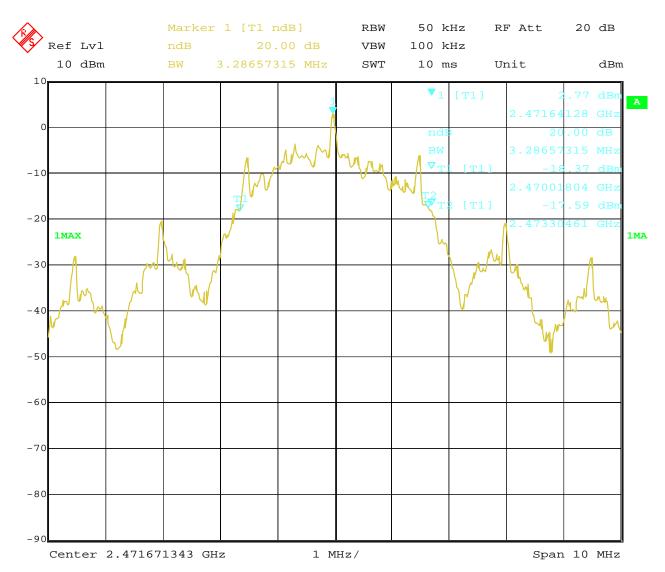

Date: 26.SEP.2016 17:26:13

Report No.: FCC1610105 Page 26 of 56

Date: 2016-10-26




8. Maximum Peak Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Test Setup



8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Page 27 of 56 Report No.: FCC1610105

Date: 2016-10-26



8.4Test Results

EUT		Wireless Door Viewermonitor		Model		KDB307-I	
Mode		Ke	Keep Transmitting		t Voltage	DC3.7V	
Temperatur	re	24 deg. C,		24 deg. C, Humidity		56% RH	
Channel	Cł	nannel Frequency (MHz)	Peak Power Output (dBm)		Peak Power Limit (dBm)	Pass/ Fail	
Low		2410.875	4.21		21	Pass	
Middle		2441.250	3.65		21	Pass	
High		2471.625	3.37		21	Pass	

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. Worse case was recorded

Report No.: FCC1610105

Date: 2016-10-26



Page 28 of 56

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The minimum Carrier Frequency Separation is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1610105 Page 29 of 56


Date: 2016-10-26



9.4Test Result

EUT	Wireless Door Viewe	Model	KDB307-I		
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail
3380kHz		≥ 25 kHz or 2/3 of 20 dB bandwidth		Pass	

Test Plots

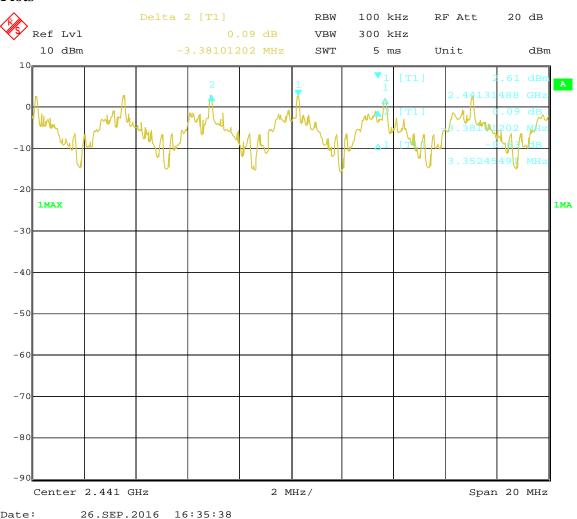

Report No.: FCC1610105

Date: 2016-10-26



Page 30 of 56

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW= 300 kHz;

Sweep = auto; Detector function = peak; Trace = max hold

3. Record the number of hopping channels.

Report No.: FCC1610105 Page 31 of 56


Date: 2016-10-26



10.4Test Result

EUT	Wireless Door Viewermonitor		l	Model		KDB307-I
Mode	Hopping On			Input		DC3.7V
			Voltage			
Temperature	24 deg. C,		Н	umidity		56% RH
Operating Frequency		Number of hopping channels		Limit		Pass/ Fail
2410.875-2471.625MHz		19	≥ 15		.5	Pass

Test Plot

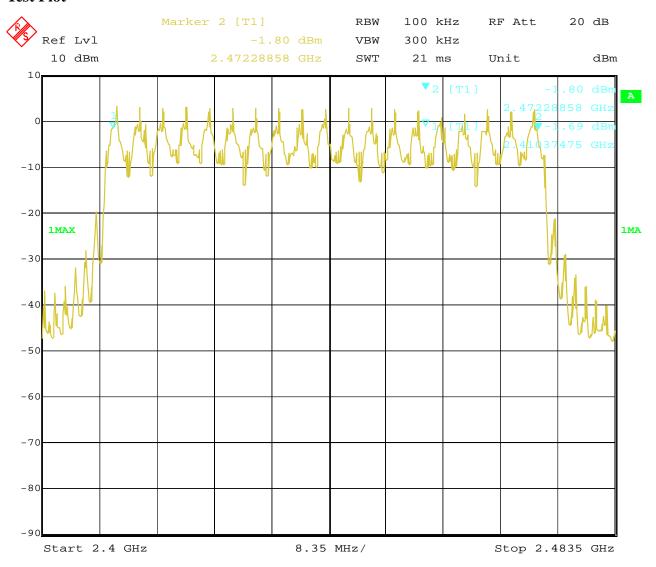

Date: 26.SEP.2016 16:21:27

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1610105

Date: 2016-10-26



Page 32 of 56

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW
- ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1610105 Page 33 of 56

Date: 2016-10-26



11.4 Test Result


EUT		Wireless Door Viewermonitor	Model		KDB307-I
Mode		Keep Transmitting	Input Voltage		DC3.7V
Temperature	e	24 deg. C,	Humidity		56% RH
Channel		Actual		Limit	
Middle		0.0513S		0.4s	

Actual = (0.4*19/1) * 24 * 0.281 = 51.3 ms

Page 34 of 56

Report No.: FCC1610105 Date: 2016-10-26


Test Plots:

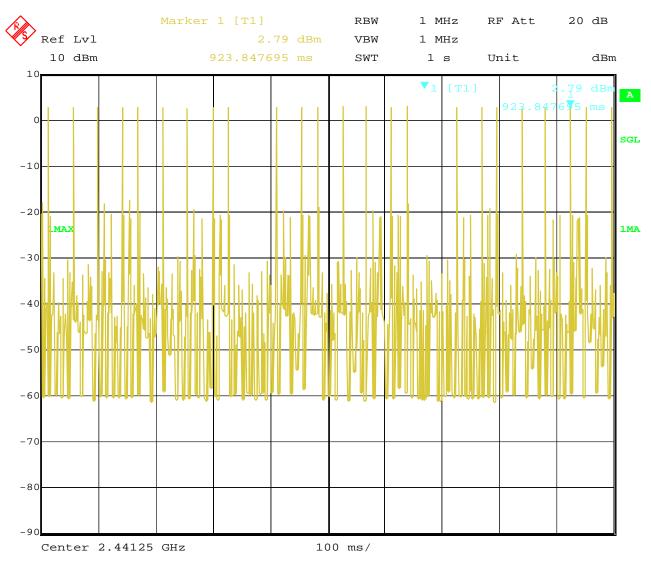

28.SEP.2016 Date: 12:17:21 Report No.: FCC1610105 Page 35 of 56

Date: 2016-10-26



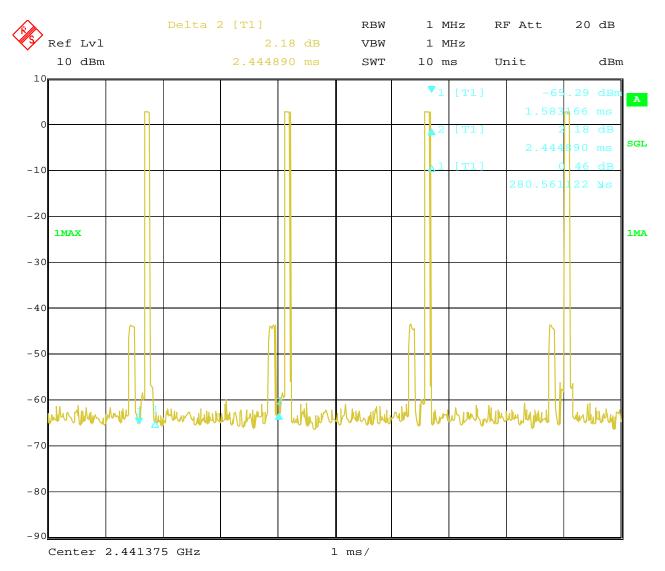

Date: 27.SEP.2016 11:14:13


Report No.: FCC1610105 Page 36 of 56

Date: 2016-10-26



12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Report No.: FCC1610105 Page 37 of 56


Date: 2016-10-26



12.4 Out of Band Test Result

Product:	Wireless Door Viewermonitor		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	47.3		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:

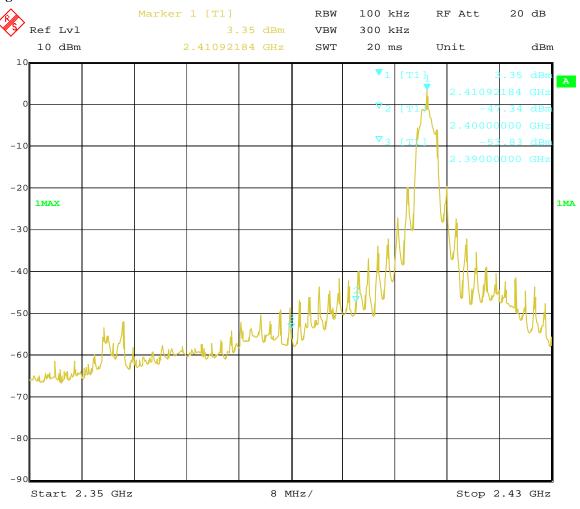

Date: 26.SEP.2016 17:21:14 Report No.: FCC1610105 Page 38 of 56


Date: 2016-10-26



12.4 Out of Band Test Result

Product:	Wireless Door Viewermonitor		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	120V~
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	48.2		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

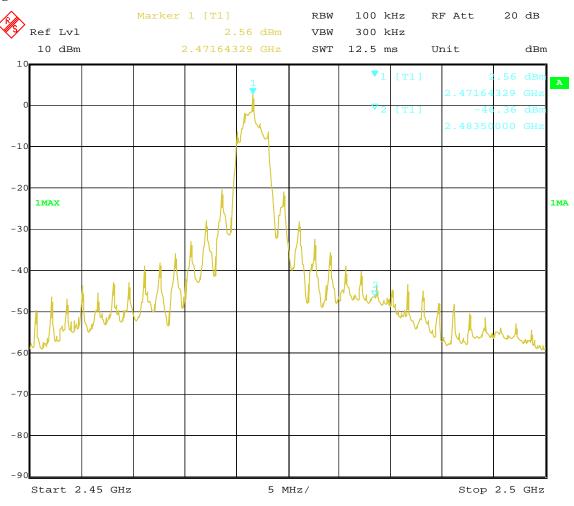

Date: 26.SEP.2016 17:23:20

Report No.: FCC1610105 Page 39 of 56


Date: 2016-10-26



12.4 Out of Band Test Result

Product:	Wireless Door Viewermonitor		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	45.9		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:

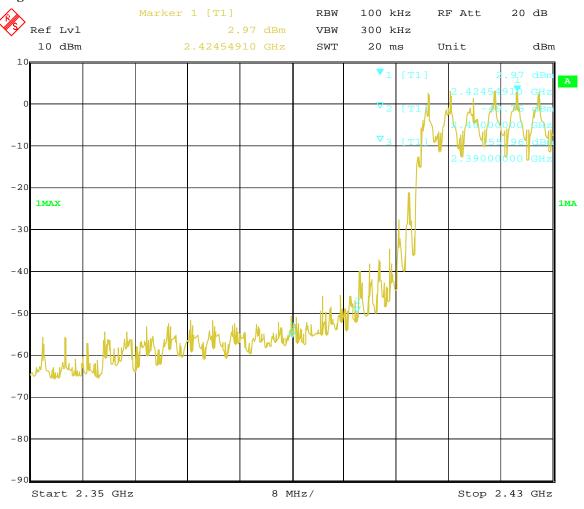

Date: 26.SEP.2016 16:59:42

Report No.: FCC1610105 Page 40 of 56


Date: 2016-10-26



12.4 Out of Band Test Result

Product:	Wireless Door Viewermonitor		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	47.1		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

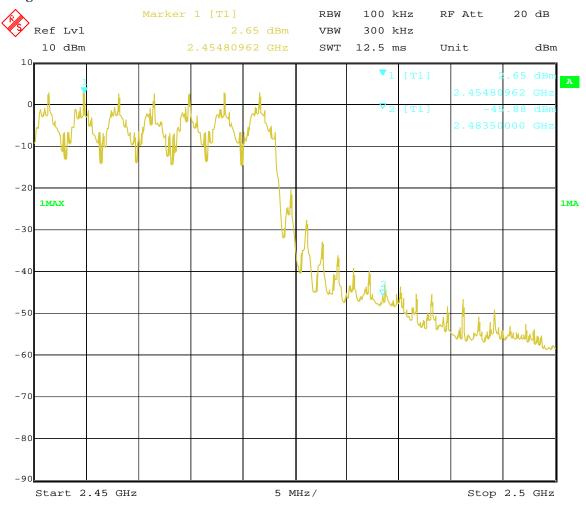

Date: 26.SEP.2016 16:51:19

Report No.: FCC1610105 Page 41 of 56

Date: 2016-10-26



13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral Antenna used. The maximum Gain of this antenna is 2.0dBi

Report No.: FCC1610105 Page 42 of 56

Date: 2016-10-26



14.0 FCC ID Label

FCC ID: 2AKAJ308

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Report No.: FCC1610105 Page 43 of 56

Date: 2016-10-26



15.0 Photo of testing

Conducted Emission Test Setup:



Page 44 of 56

Report No.: FCC1610105

Date: 2016-10-26



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 45 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 46 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 47 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 48 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 49 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





Page 50 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





Page 51 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 52 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any


Page 53 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT

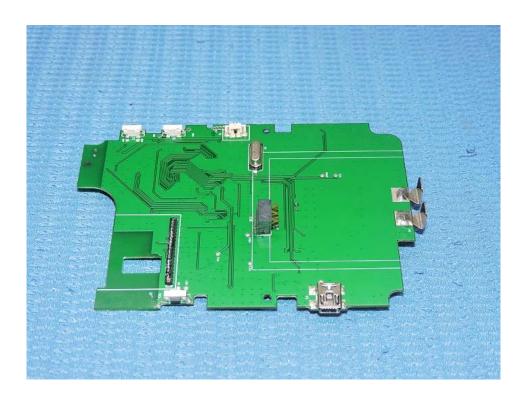



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 54 of 56


Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT



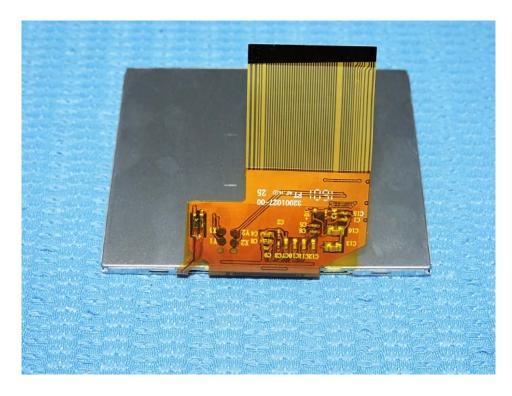

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Page 55 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any


Page 56 of 56

Report No.: FCC1610105

Date: 2016-10-26



Photo for the EUT

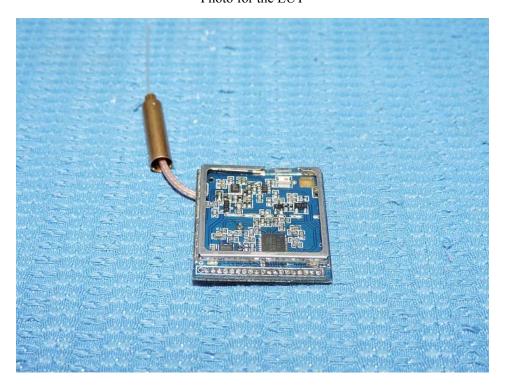



End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any