



# Test Report

## FCC Part15 Subpart C & Industry Canada RSS-247 Issue 2

Product Name : A19 Color  
Model No. : 74484  
FCC ID : 2AKGT-LDVA19C  
IC : 22089-LDVA19C

Applicant : LEDVANCE LLC  
Address : 200 Ballardvale, Wilmington, MA, 01887

Date of Receipt : Mar. 21st, 2017  
Test Date : Mar. 21st, 2017~ May. 19th, 2017  
Issued Date : May. 23rd, 2017  
Report No. : 1732093R-RF-US-P06V01  
Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

# Test Report Certification


Issued Date : May. 23rd, 2017

Report No. : 1732093R-RF-US-P06V01



Product Name : A19 Color  
Applicant : LEDVANCE LLC  
Address : 200 Ballardvale, Wilmington, MA, 01887  
Manufacturer : LEDVANCE LLC  
Address : 200 Ballardvale, Wilmington, MA, 01887  
Model No. : 74484  
FCC ID : 2AKGT-LDVA19C  
IC : 22089-LDVA19C  
EUT Voltage : DC 3V ~ 3.6V  
Test Voltage : AC 120V/60Hz  
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2015  
ANSI C63.4:2014; ANSI C63.10:2013;  
KDB 558074 D01v04  
Industry Canada RSS-Gen Issue 4 / RSS-247 Issue 2  
Test Result : Complied  
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.  
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,  
Jiangsu, China  
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098  
FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By :



(Adm. Specialist: Kathy Feng)

Reviewed By :



(Senior Engineer: Frank He )

Approved By :



(Engineering Manager: Harry Zhao )

## TABLE OF CONTENTS

Description	Page
1. General Information .....	6
1.1. EUT Description .....	6
1.2. Working Frequency of Each Channel: .....	7
1.3. Antenna information .....	7
1.4. Mode of Operation .....	8
1.5. Tested System Details .....	8
1.6. Configuration of Tested System .....	9
1.7. EUT Exercise Software .....	10
2. Technical Test .....	11
2.1. Summary of Test Result .....	11
2.2. Test Frequency configuration: .....	13
2.3. Test Environment .....	14
2.4. Measurement Uncertainty .....	14
3. AC Power Line Conducted Emission .....	15
3.1. Test Equipment .....	15
3.2. Test Setup .....	15
3.3. Limit .....	16
3.4. Test Procedure .....	16
3.5. Test Result .....	17
4. Emissions in restricted frequency bands .....	19
4.1. Test Equipment .....	19
4.2. Test Setup .....	20
4.3. Limit .....	21
4.4. Test Procedure .....	24
4.5. EUT test Axis definition .....	25
4.6. Test Result .....	26
5. Emissions in non-restricted frequency bands .....	29
5.1. Test Equipment .....	29
5.2. Test Setup .....	29
5.3. Limit .....	30
5.4. Test Procedure .....	31
5.5. EUT test Axis definition .....	32
5.6. Test Result .....	33
6. Radiated Emission Band Edge .....	34
6.1. Test Equipment .....	34
6.2. Test Setup .....	35
6.3. Limit .....	35

6.4.	Test Procedure .....	36
6.5.	EUT test definition .....	37
6.6.	Duty Cycle .....	38
6.7.	Test Result .....	39
7.	Occupied Bandwidth .....	51
7.1.	Test Equipment.....	51
7.2.	Test Setup.....	51
7.3.	Limit.....	52
7.4.	Test Procedure .....	52
7.5.	EUT test definition .....	53
7.6.	Test Result.....	54
8.	Fundamental emission output power .....	55
8.1.	Test Equipment.....	55
8.2.	Test Setup.....	55
8.3.	Limit.....	56
8.4.	Test Procedure .....	57
8.5.	EUT test definition .....	58
8.6.	Test Result.....	59
9.	Power Spectral Density .....	60
9.1.	Test Equipment.....	60
9.2.	Test Setup.....	60
9.3.	Limit.....	60
9.4.	Test Procedure .....	61
9.5.	EUT test definition .....	62
9.6.	Test Result.....	63

## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1732093R-RF-US-P06V01	V1.0	Initial Issued Report	May. 23rd, 2017

## 1. General Information

### 1.1. EUT Description

Product Name	A19 Color
Model No.	74484
EUT Voltage	DC 3V ~ 3.6V
Test Voltage	AC 120V/60Hz
Bluetooth Specification	V4.2
Frequency Range	2402- 2480 MHz
Channel Number	V4.2: 40
Channel Separation	V4.2: 2MHz
Type of Modulation	V4.2: GFSK
Data Rate	V4.2: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

## 1.2. Working Frequency of Each Channel:

Bluetooth Working Frequency of Each Channel: (For V4.2)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

## 1.3. Antenna information

Model No.	N/A				
Antenna manufacturer	N/A				
Antenna Delivery	<input checked="" type="checkbox"/> 1*TX+1*RX	<input type="checkbox"/> 2*TX+2*RX	<input type="checkbox"/> 3*TX+3*RX		
Antenna technology	<input checked="" type="checkbox"/> SISO				
	<input type="checkbox"/> MIMO	<input type="checkbox"/> Basic			
		<input type="checkbox"/> CDD			
		<input type="checkbox"/> Sectorized			
		<input type="checkbox"/> Beam-forming			
Antenna Type	<input type="checkbox"/> External	<input type="checkbox"/> Dipole			
		<input type="checkbox"/> Sectorized			
	<input checked="" type="checkbox"/> Internal	<input type="checkbox"/> PIFA			
		<input type="checkbox"/> PCB			
		<input type="checkbox"/> Ceramic Chip Antenna			
		<input checked="" type="checkbox"/> Metal housing Antenna			
Antenna Technology	Ant Gain (dBi)				
<input checked="" type="checkbox"/> SISO	0.5				

#### 1.4. Mode of Operation

Test Mode
Mode 1: Transmit-1Mbps(GFSK_BLE)

#### 1.5. Tested System Details


The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
N/A	N/A	N/A	N/A	N/A	N/A




## 1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

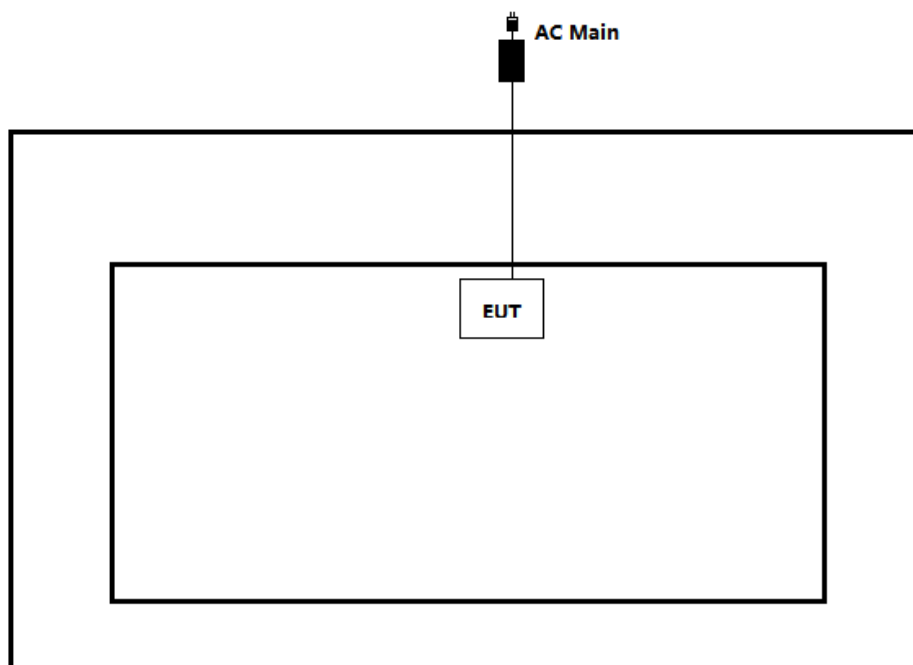

Test setup Diagram- Radiated Emission

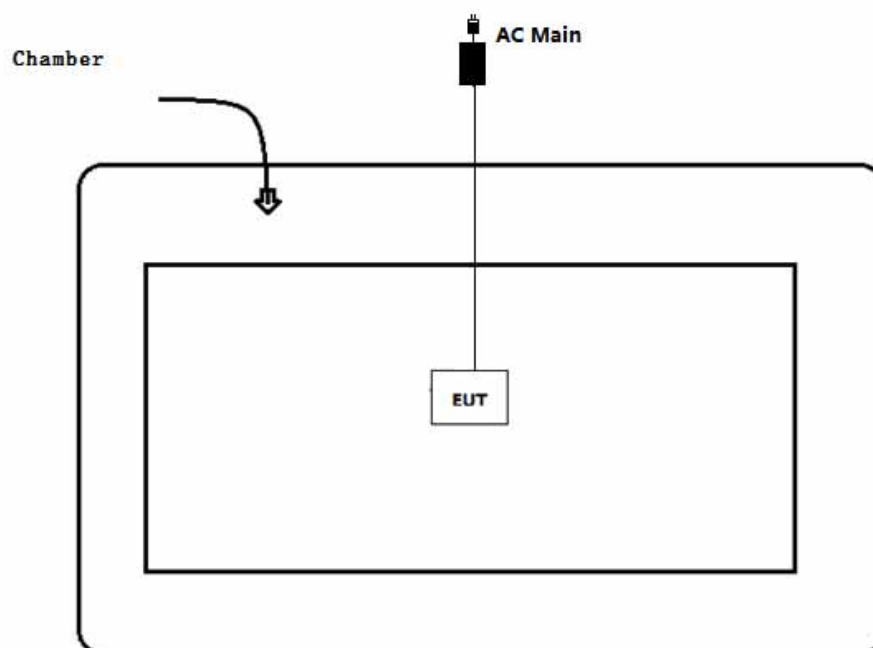

### **1.7. EUT Exercise Software**

1	Setup the EUT as shown on above.
2	Turn on the power of all equipment.
3	Press the button, and set the test mode and channel, then press OK to start continue receive.

## 2. Technical Test

### 2.1. Summary of Test Result

Performed Test Item	Normative References	Worst case mode	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	Mode 1	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Mode 1	FCC 15.209	PASS
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	Mode 1	20dBc	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	Mode 1	FCC 15.209	PASS
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(2)	Mode 1	500kHz	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	Mode 1	30dBm	PASS
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(e)	Mode 1	8dBm/3kHz	PASS
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	N/A	FCC 15.203	PASS

Performed Test Item	Normative References	Worst case mode	Limit	Result
AC Power Line Conducted Emission	RSS-Gen Issue 4 Section 8.8	Mode 1	RSS-Gen	PASS
Emissions in restricted frequency bands	RSS-Gen Issue 4 Section 8.9	Mode 1	RSS-Gen	PASS
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	Mode 1	20dBc	PASS
Radiated Emission Band Edge	RSS-Gen Issue 4 Section 8.10	Mode 1	RSS-Gen	PASS
Occupied Bandwidth	RSS-Gen Issue 4 Section 6.6 RSS-247 Issue 2 Section 5.2(a)	Mode 1	500kHz	PASS
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	Mode 1	30dBm	PASS

Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	Mode 1	8dBm/3kHz	PASS
Antenna Requirement	RSS-Gen Issue 4 Section 8.3	N/A	RSS-Gen Issue 4	PASS

## 2.2. Test Frequency configuration:

Modulation Mode	Channel	Frequency	Channel	Frequency	Channel	Frequency
BLE	00	2402 MHz	19	2440 MHz	39	2480MHz

## 2.3. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

## 2.4. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


### 3. AC Power Line Conducted Emission

#### 3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2017.03.05	2018.03.04
Two-Line V-Network	R&S	ENV 216	101189	2016.07.16	2017.07.15
Two-Line V-Network	R&S	ENV 216	101044	2016.09.16	2017.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2016.09.16	2017.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2017.01.04	2018.01.03

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

#### 3.2. Test Setup

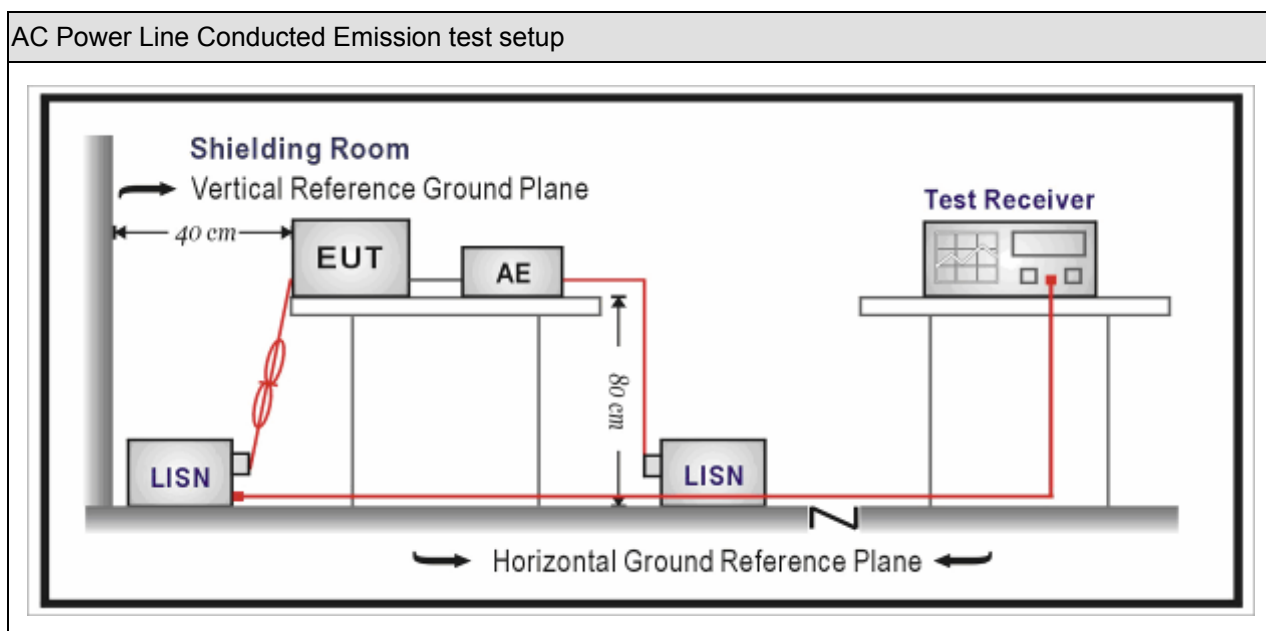

### 3.3. Limit

Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		


### 3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
<input checked="" type="checkbox"/>	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
<input checked="" type="checkbox"/>	ANSI C63.4-2014	7	AC power-line conducted emission measurements



### 3.5. Test Result

Engineer: Derrick	
Site: TR1	Time: 2017/03/28
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Line
EUT: A19 Color	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

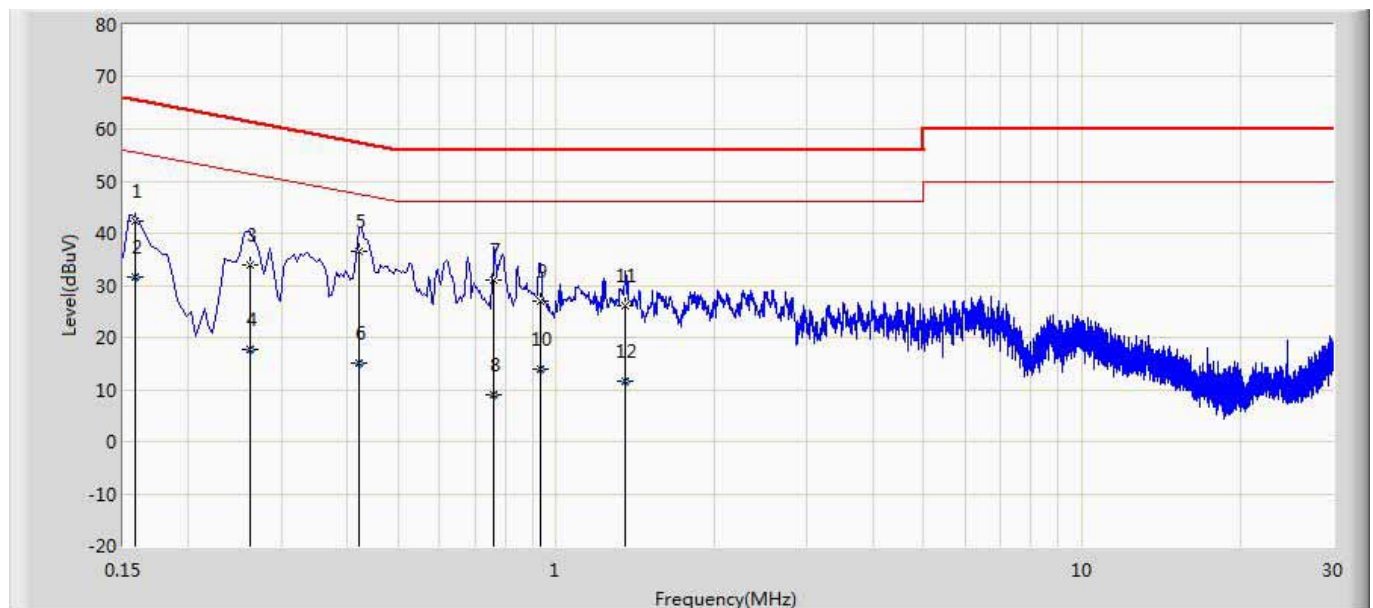


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.158	42.461	32.840	-23.108	65.568	9.598	0.022	0.000	QP
2		0.158	31.630	22.010	-23.938	55.568	9.598	0.022	0.000	AV
3		0.262	33.909	24.287	-27.459	61.368	9.590	0.032	0.000	QP
4		0.262	17.670	8.048	-33.698	51.368	9.590	0.032	0.000	AV
5	*	0.422	36.482	26.852	-20.927	57.409	9.590	0.040	0.000	QP
6		0.422	15.172	5.542	-32.237	47.409	9.590	0.040	0.000	AV
7		0.762	31.139	21.495	-24.861	56.000	9.592	0.052	0.000	QP
8		0.762	9.025	-0.618	-36.975	46.000	9.592	0.052	0.000	AV
9		0.934	26.970	17.318	-29.030	56.000	9.598	0.054	0.000	QP
10		0.934	13.918	4.266	-32.082	46.000	9.598	0.054	0.000	AV
11		1.354	26.113	16.441	-29.887	56.000	9.604	0.068	0.000	QP
12		1.354	11.499	1.827	-34.501	46.000	9.604	0.068	0.000	AV

Note:

1. " \* ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Derrick	
Site: TR1	Time: 2017/03/28
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Neutral
EUT: A19 Color	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

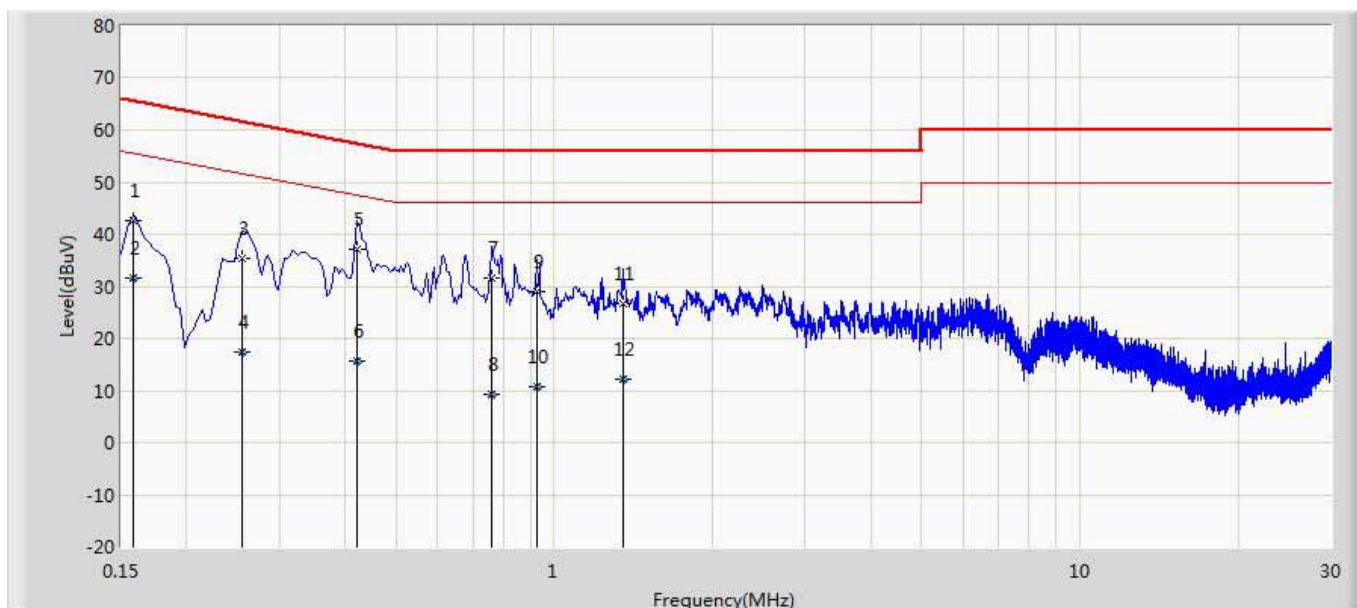

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.158	42.470	32.869	-23.099	65.568	9.578	0.022	0.000	QP
2		0.158	31.687	22.086	-23.882	55.568	9.578	0.022	0.000	AV
3		0.254	35.301	25.698	-26.324	61.625	9.572	0.031	0.000	QP
4		0.254	17.508	7.905	-34.118	51.625	9.572	0.031	0.000	AV
5	*	0.422	37.106	27.488	-20.303	57.409	9.578	0.040	0.000	QP
6		0.422	15.764	6.147	-31.644	47.409	9.578	0.040	0.000	AV
7		0.758	31.518	21.863	-24.482	56.000	9.604	0.051	0.000	QP
8		0.758	9.263	-0.392	-36.737	46.000	9.604	0.051	0.000	AV
9		0.926	28.983	19.345	-27.017	56.000	9.587	0.051	0.000	QP
10		0.926	10.837	1.199	-35.163	46.000	9.587	0.051	0.000	AV
11		1.350	26.777	17.126	-29.223	56.000	9.584	0.067	0.000	QP
12		1.350	12.062	2.411	-33.938	46.000	9.584	0.067	0.000	AV

Note:

1. " \* ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

## 4. Emissions in restricted frequency bands


### 4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2017.03.29	2018.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2016.11.16	2017.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2016.10.16	2017.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2016.03.02	2018.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2017.01.03	2018.01.02
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.04	2018.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2017.05.06	2018.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2017.05.06	2018.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2017.01.22	2018.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2016.11.25	2017.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2017.03.02	2018.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2016.06.10	2017.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2017.01.04	2018.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

## 4.2. Test Setup


Below 30MHz Test Setup:

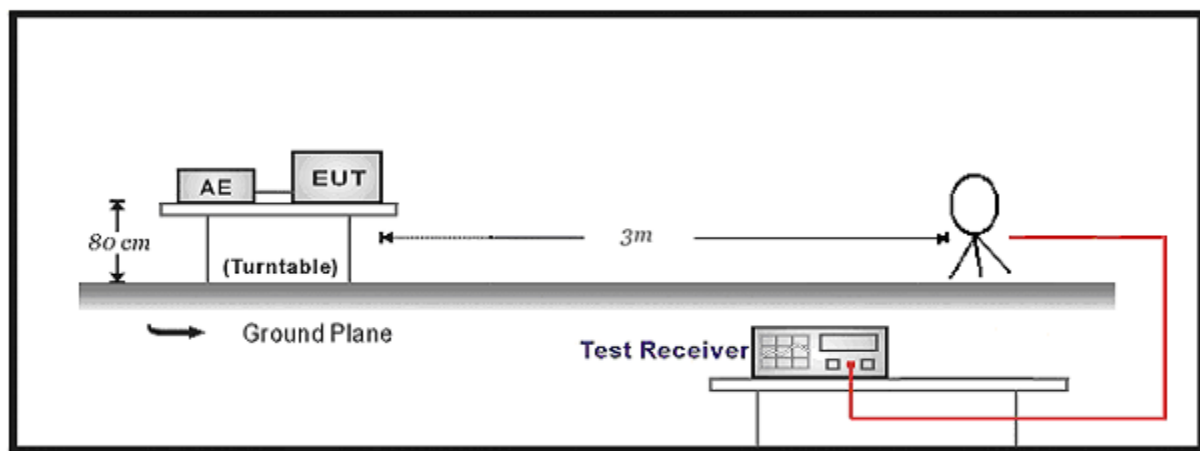

30MHz-1GHz Test Setup:

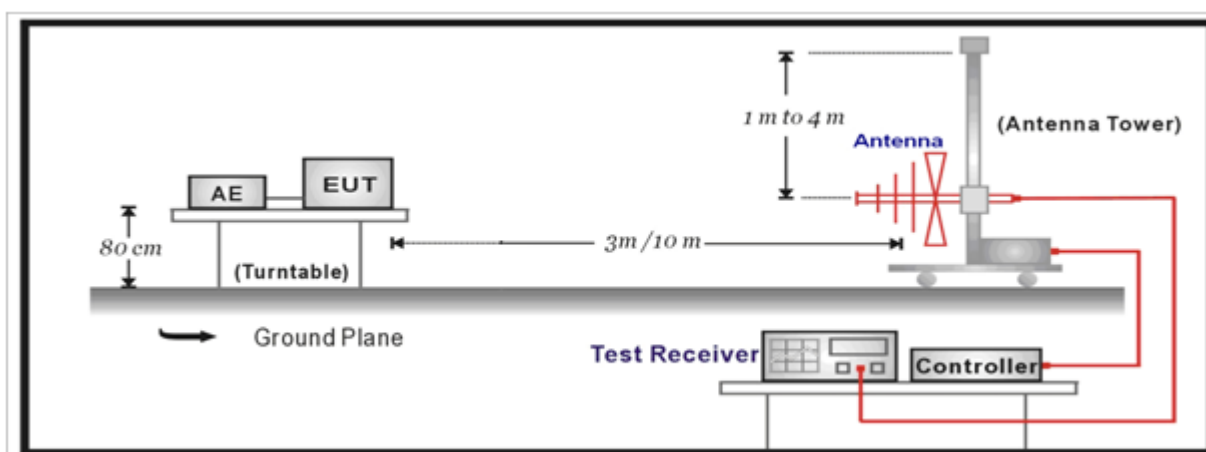

Above 1GHz Test Setup:

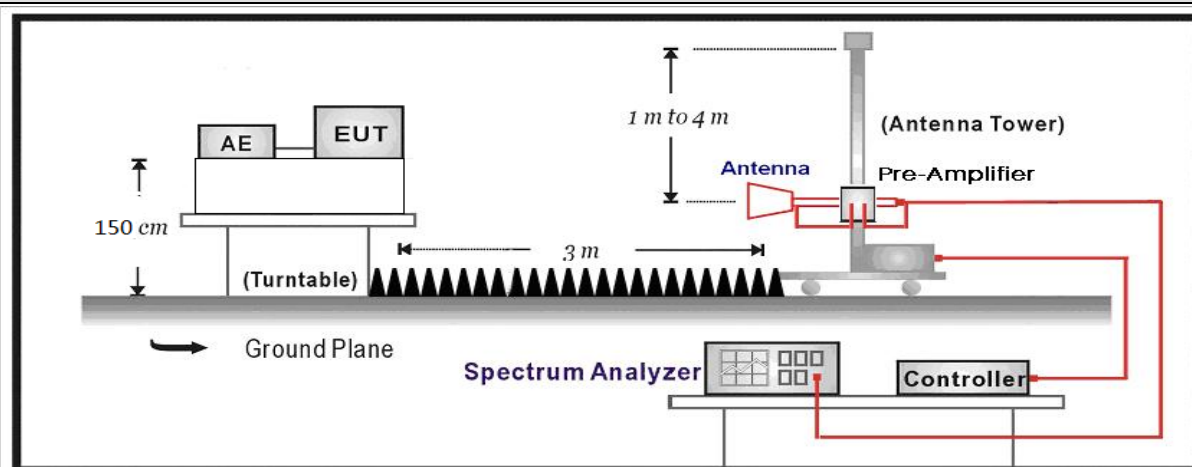

### 4.3. Limit

#### For FCC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

**For IC:**

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090-0.110	13.36-13.41	1645.5-1646.5	9.0-9.2
2.1735-2.1905	16.42-16.423	1660-1710	9.3-9.5
3.020-3.026	16.69475-16.69525	1718.8-1722.2	10.6-12.7
4.125-4.128	16.80425-16.80475	2200-2300	13.25-13.4
4.17725-4.17775	25.5-25.67	2310-2390	14.47-14.5
4.20725-4.20775	37.5-38.25	2655-2900	15.35-16.2
5.677-5.683	73-74.6	3260-3267	17.7-21.4
6.215-6.218	74.8-75.2	3332-3339	22.01-23.12
6.26775-6.26825	108-138	3345.8-3358	23.6-24.0
6.31175-6.31225	156.52475-156.52525	3500-4400	31.2-31.8
8.291-8.294	156.7-156.9	4500-5150	36.43-36.5
8.362-8.366	240-285	5350-5460	Above 38.6
8.37625-8.38675	322-335.4	7250-7750	
8.41425-8.41475	399.9-410	8025-8500	
12.29-12.293	608-614		
12.51975-12.52025	960-1427		
12.57675-12.57725	1435-1626.5		

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength ( $\mu$ V/m)	Field strength (dB $\mu$ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 <sub>(Note 1)</sub>
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 <sub>(Note 1)</sub>
1.705 - 30	30	29.5	30 <sub>(Note 1)</sub>
30 - 88	100	40	3 <sub>(Note 2)</sub>
88 - 216	150	43.5	3 <sub>(Note 2)</sub>
216 - 960	200	46	3 <sub>(Note 2)</sub>
Above 960	500	54	3 <sub>(Note 2)</sub>

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).







Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

#### 4.4. Test Procedure

Test Method						
	References Rule		Chapter	Description		
<input type="checkbox"/>	ANSI C63.10		11.11	Emissions in non-restricted frequency bands		
	<input type="checkbox"/>	ANSI C63.10	11.11.2	Reference level measurement		
	<input type="checkbox"/>	ANSI C63.10	11.11.3	Emission level measurement		
<input checked="" type="checkbox"/>	ANSI C63.10		11.12	Emissions in restricted frequency bands		
	<input checked="" type="checkbox"/>	ANSI C63.10	11.12.1	Radiated emission measurements		
	<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.7	Radiated spurious emission test		
		<input checked="" type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
		<input checked="" type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
		<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		<input type="checkbox"/>	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			<input type="checkbox"/>	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			<input type="checkbox"/>	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold



#### 4.5. EUT test Axis definition

Item	Emissions in restricted frequency bands			
Device Category	<input type="checkbox"/>	Fixed point-to-point		
	<input type="checkbox"/>	Emit multiple directional beams, simultaneously or sequentially		
	<input checked="" type="checkbox"/>	Other cases		
Test mode	Mode 1			
Test method	<input checked="" type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input checked="" type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input type="checkbox"/>	Conducted		
	<input type="checkbox"/>	Chain 0		
				
	<input type="checkbox"/>	Chain 0	Chain 1	
				
	<input type="checkbox"/>	Chain 0	Chain 1	Chain 2
				

#### 4.6. Test Result

Product Name	: A19 Color	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: AC-5
Test Date	: 2017.05.16		

Chain	CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector
Ant 0	0	H	4808.000	46.248	4.929	51.177	54(Note3)	-2.823	PK
		H	7206.000	37.402	9.096	46.498	54(Note3)	-7.502	PK
		V	4808.000	46.756	4.929	51.685	54(Note3)	-2.315	PK
		V	7205.000	40.121	9.093	49.214	54(Note3)	-4.786	PK
	19	H	4876.000	46.466	5.218	51.684	54(Note3)	-2.316	PK
		H	7315.500	40.341	9.092	49.433	54(Note3)	-4.567	PK
		V	4876.000	46.363	5.218	51.581	54(Note3)	-2.419	PK
		V	7320.000	36.577	9.226	45.803	54(Note3)	-8.197	PK
	39	H	4961.000	42.886	5.359	48.245	54(Note3)	-5.755	PK
		H	7440.000	37.263	9.792	47.055	54(Note3)	-6.945	PK
		V	4961.000	42.405	5.359	47.764	54(Note3)	-6.236	PK
		V	7440.000	36.421	9.792	46.213	54(Note3)	-7.787	PK

Note: 1. Measure Level = Reading Level + Factor.


Note: 2. The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.

Note: 3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Note: 4. The RBW set up, see Clause 6.6.

### The worst case of Radiated Emission below 1GHz:

Engineer: Derrick	
Site: AC2	Time: 2017/03/27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: A19 Color	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

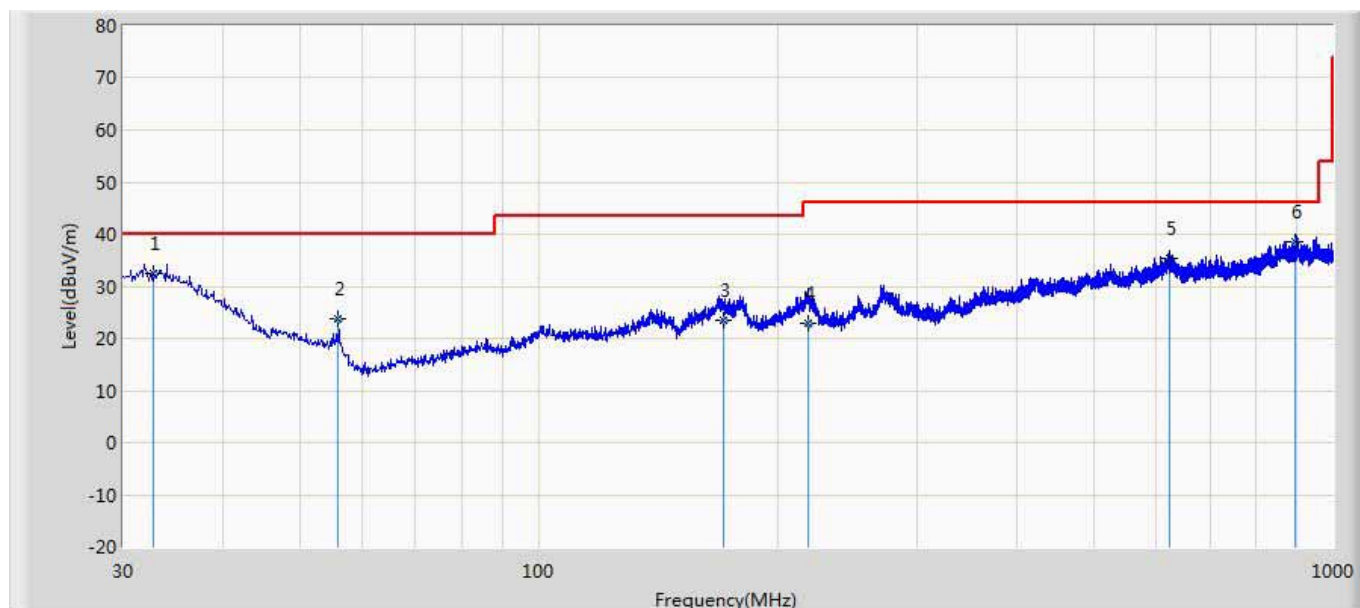


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		32.757	32.367	4.995	-7.633	40.000	20.723	6.648	0.000	100	340	QP
2		55.802	23.753	10.843	-16.247	40.000	6.265	6.645	0.000	100	63	QP
3		170.738	23.582	6.213	-19.918	43.500	10.093	7.276	0.000	200	327	QP
4		218.240	22.989	5.564	-23.011	46.000	10.001	7.424	0.000	200	289	QP
5		623.534	35.323	4.572	-10.677	46.000	22.186	8.566	0.000	200	356	QP
6	*	898.025	38.661	5.789	-7.339	46.000	23.627	9.245	0.000	100	357	QP

#### Note:

1. " \* ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Derrick	
Site: AC2	Time: 2017/03/27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: A19 Color	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by BLE	

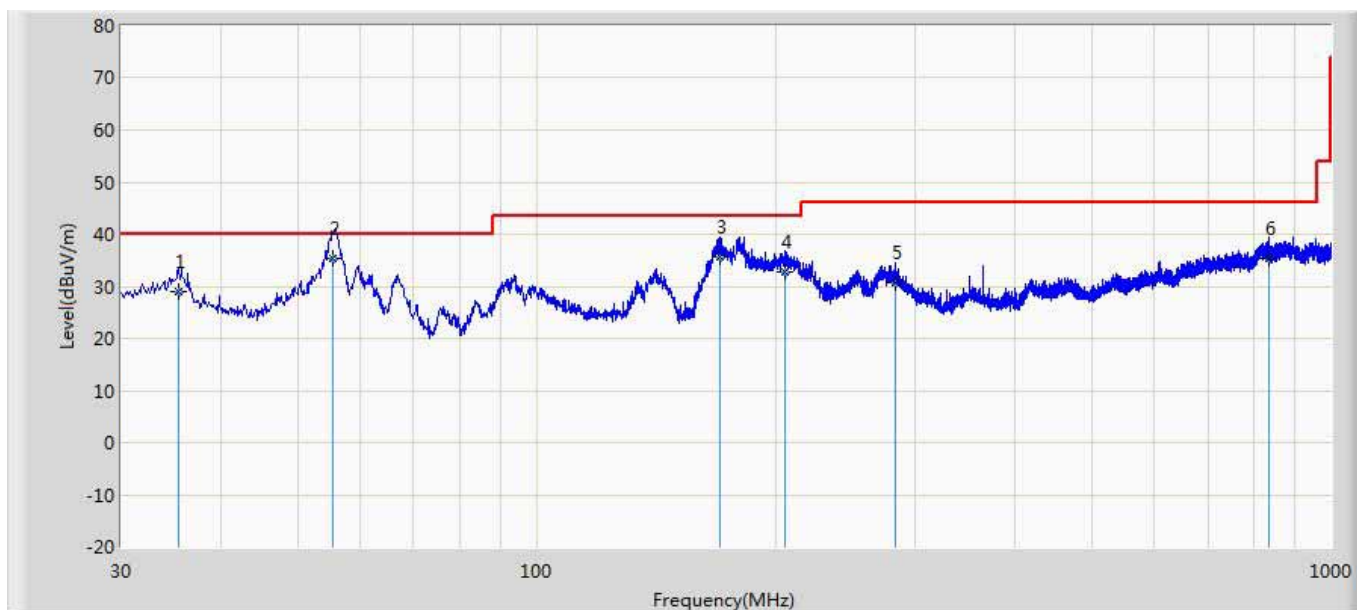

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		35.426	28.981	6.413	-11.019	40.000	15.910	6.658	0.000	100	126	QP
2	*	55.526	35.324	17.900	-4.676	40.000	10.784	6.640	0.000	100	299	QP
3		170.543	35.568	16.543	-7.932	43.500	11.749	7.276	0.000	200	350	QP
4		205.427	32.705	9.127	-10.795	43.500	16.211	7.366	0.000	100	295	QP
5		283.243	30.614	5.426	-15.386	46.000	17.585	7.603	0.000	200	360	QP
6		836.453	35.412	2.543	-10.588	46.000	23.772	9.097	0.000	100	160	QP

**Note:**


1. " \* ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

## 5. Emissions in non-restricted frequency bands

### 5.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

### 5.2. Test Setup

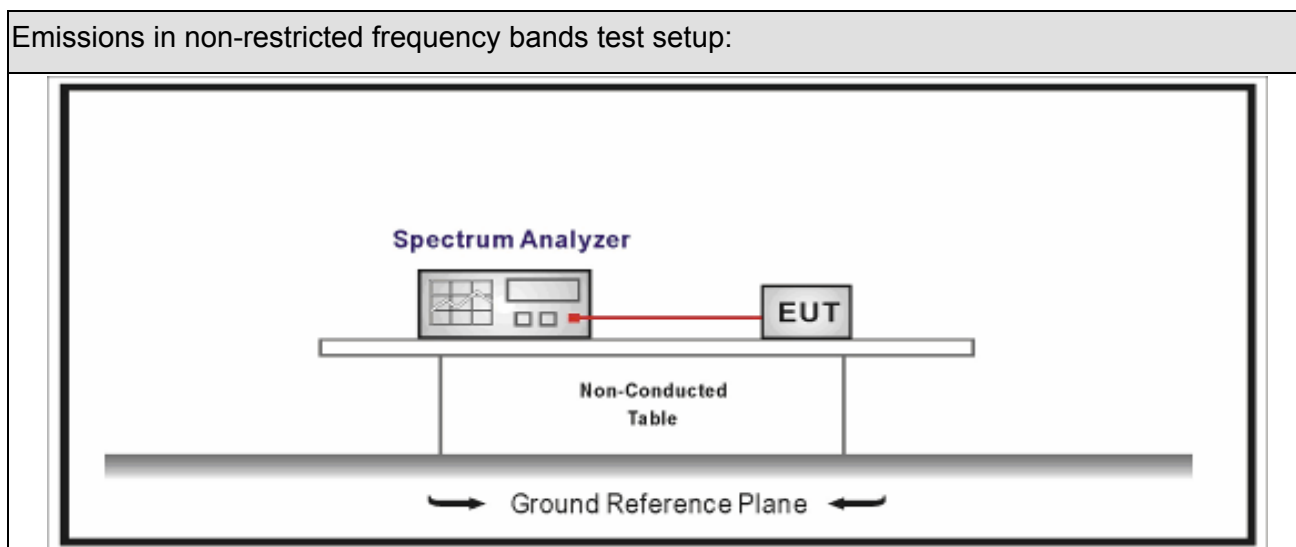







### 5.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
<p>Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p>Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).</p>	

## 5.4. Test Procedure

Test Method					
	References Rule		Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10		11.11	Emissions in non-restricted frequency bands	
	<input checked="" type="checkbox"/>	ANSI C63.10	11.11.2	Reference level measurement	
	<input checked="" type="checkbox"/>	ANSI C63.10	11.11.3	Emission level measurement	
<input type="checkbox"/>	ANSI C63.10		11.12	Emissions in restricted frequency bands	
	<input type="checkbox"/>	ANSI C63.10	11.12.1	Radiated emission measurements	
	<input type="checkbox"/>	ANSI C63.10	11.12.2.7	Radiated spurious emission test	
<input type="checkbox"/>	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
<input type="checkbox"/>	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
<input type="checkbox"/>	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
	<input checked="" type="checkbox"/>	ANSI C63.10		11.12.2	Antenna-port conducted measurements
		<input type="checkbox"/>	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.4	Peak power measurement procedure
		<input type="checkbox"/>	ANSI C63.10	11.12.2.5	Average power measurement procedures
		<input type="checkbox"/>	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		<input type="checkbox"/>	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		<input type="checkbox"/>	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

## 5.5. EUT test Axis definition

Item	Emissions in non-restricted frequency bands			
Device Category	<input type="checkbox"/>	Fixed point-to-point		
	<input type="checkbox"/>	Emit multiple directional beams, simultaneously or sequentially		
	<input checked="" type="checkbox"/>	Other cases		
Test mode	Mode 1			
Test method	<input type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input checked="" type="checkbox"/>	Conducted		
	<input checked="" type="checkbox"/>	Chain 0		
				
	<input type="checkbox"/>	Chain 0	Chain 1	
				
	<input type="checkbox"/>	Chain 0	Chain 1	Chain 2
				




## 5.6. Test Result

Product Name	: A19 Color	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2017.05.19		

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	-0.690	2400.00	-49.296	48.606	>20	Pass
1	39	2480	-1.012	2500.00	-64.945	63.933	>20	Pass

Note: The worst case of Emissions in non-restricted frequency bands as below:

Mode 1 CH00 (2402MHz)

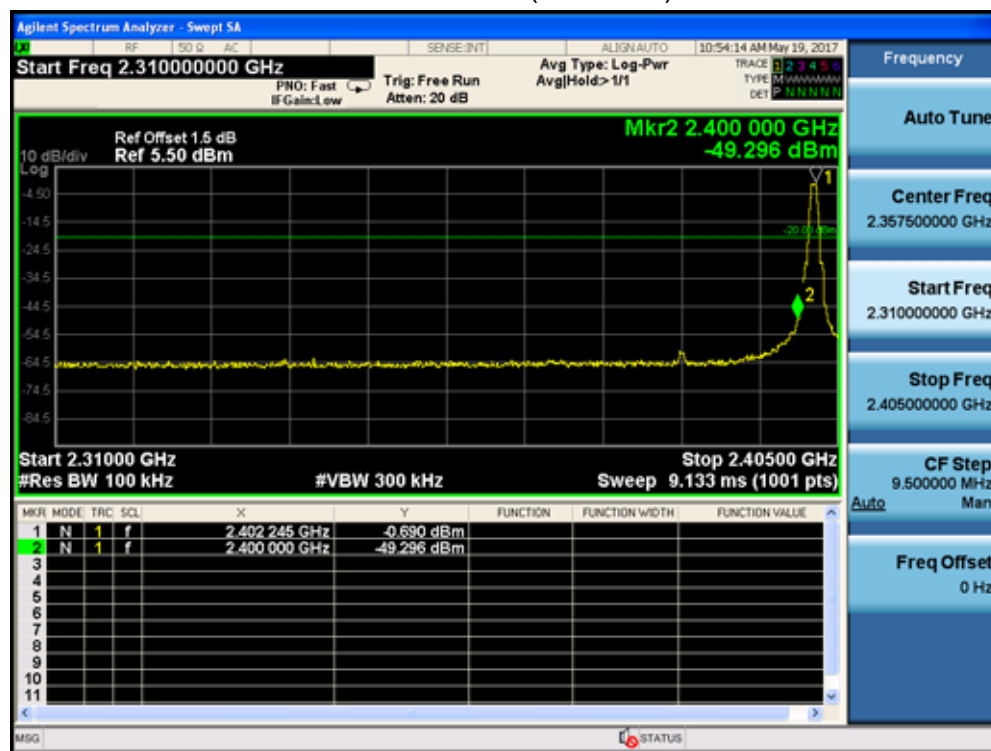


## 6. Radiated Emission Band Edge

### 6.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2016.07.16	2017.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2017.05.03	2018.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2016.07.12	2017.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2016.09.18	2017.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.02.28	2018.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.02.28	2018.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2017.01.05	2018.01.04

## 6.2. Test Setup

Above 1GHz Test Setup:

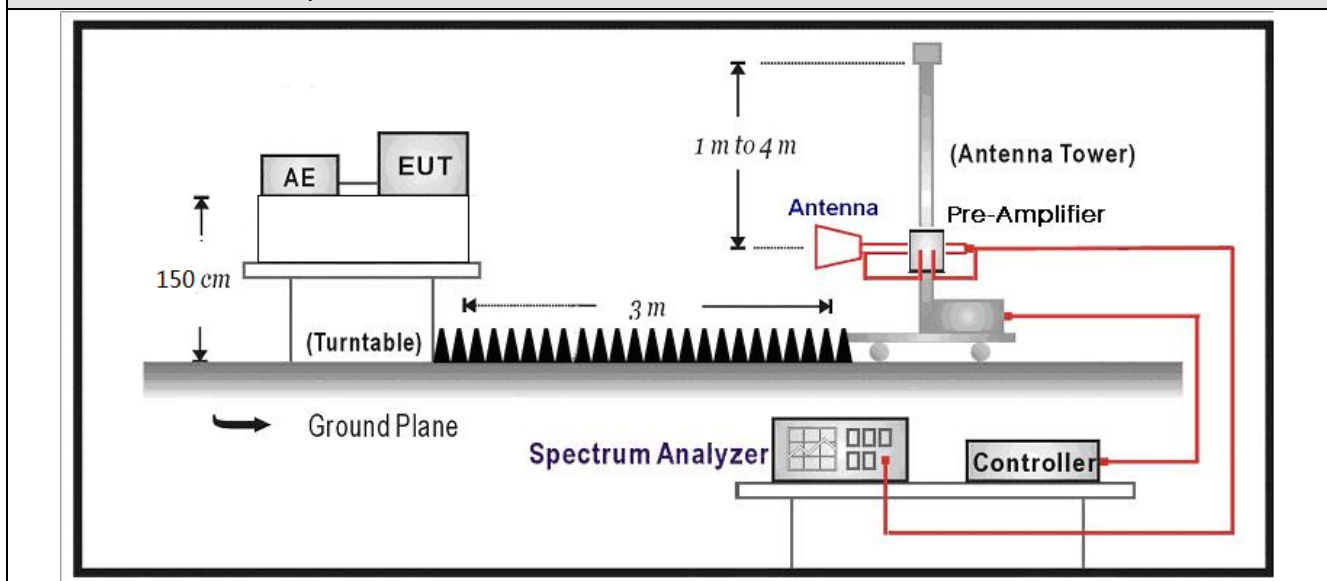

## 6.3. Limit

Band edge Limit







Frequency bands (MHz)	Detector	Limit (dB $\mu$ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

## 6.4. Test Procedure

Test Method						
	References Rule			Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10			6.10	Band-edge testing	
	<input checked="" type="checkbox"/>	ANSI C63.10		6.10.5	Restricted-band band-edge measurements	
	<input type="checkbox"/>	ANSI C63.10		6.10.6	Marker-delta method	
<input checked="" type="checkbox"/>	ANSI C63.10			11.12	Emissions in restricted frequency bands	
	<input checked="" type="checkbox"/>	ANSI C63.10		11.12.1	Radiated emission measurements	
	<input checked="" type="checkbox"/>	ANSI C63.10		11.12.2.7	Radiated spurious emission test	
<input type="checkbox"/>	ANSI C63.10			6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
<input type="checkbox"/>	ANSI C63.10			6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
<input checked="" type="checkbox"/>	ANSI C63.10			6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		<input type="checkbox"/>	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			<input type="checkbox"/>	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			<input type="checkbox"/>	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			<input checked="" type="checkbox"/>	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


## 6.5. EUT test definition

Item	Radiated Emission Band Edge			
Device Category	<input type="checkbox"/>	Fixed point-to-point		
	<input type="checkbox"/>	Emit multiple directional beams, simultaneously or sequentially		
	<input checked="" type="checkbox"/>	Other cases		
Test mode	Mode 1			
Test method	<input checked="" type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input checked="" type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input type="checkbox"/>	Conducted		
	<input type="checkbox"/>	Chain 0		
				
	<input type="checkbox"/>	Chain 0	Chain 1	
				
	<input type="checkbox"/>	Chain 0	Chain 1	Chain 2
				

## 6.6. Duty Cycle


Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (kHz)	Tx On + Tx Off (ms)	Duty Cycle
BLE	0.435	0.816	3	1.251	34.77%

### BLE

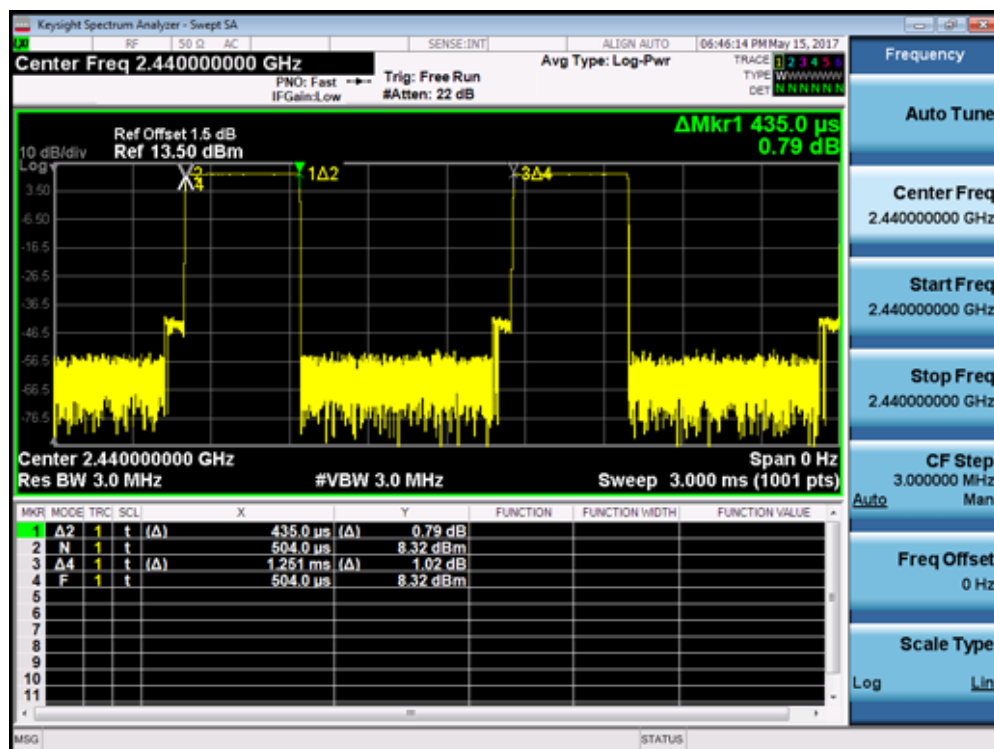


## 6.7 Test Result

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2402MHz by BLE	

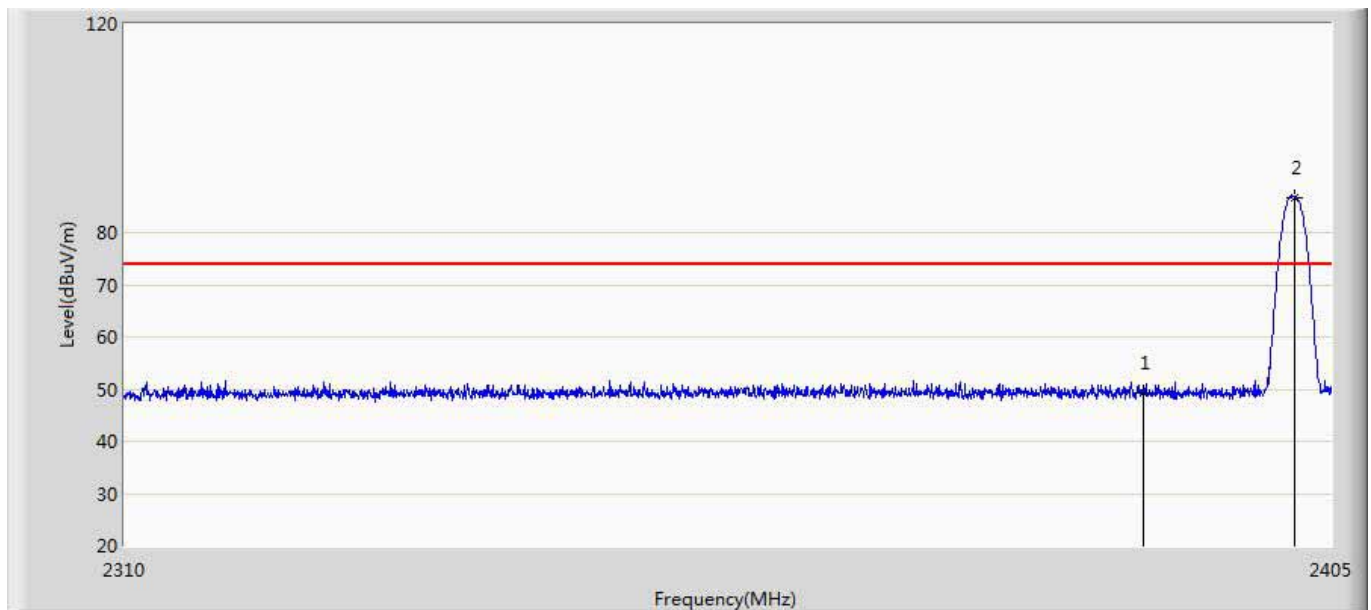

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	49.280	13.598	-24.720	74.000	35.682	PK
2	*	2402.055	86.746	51.033	12.746	74.000	35.712	PK


Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2402MHz by BLE	

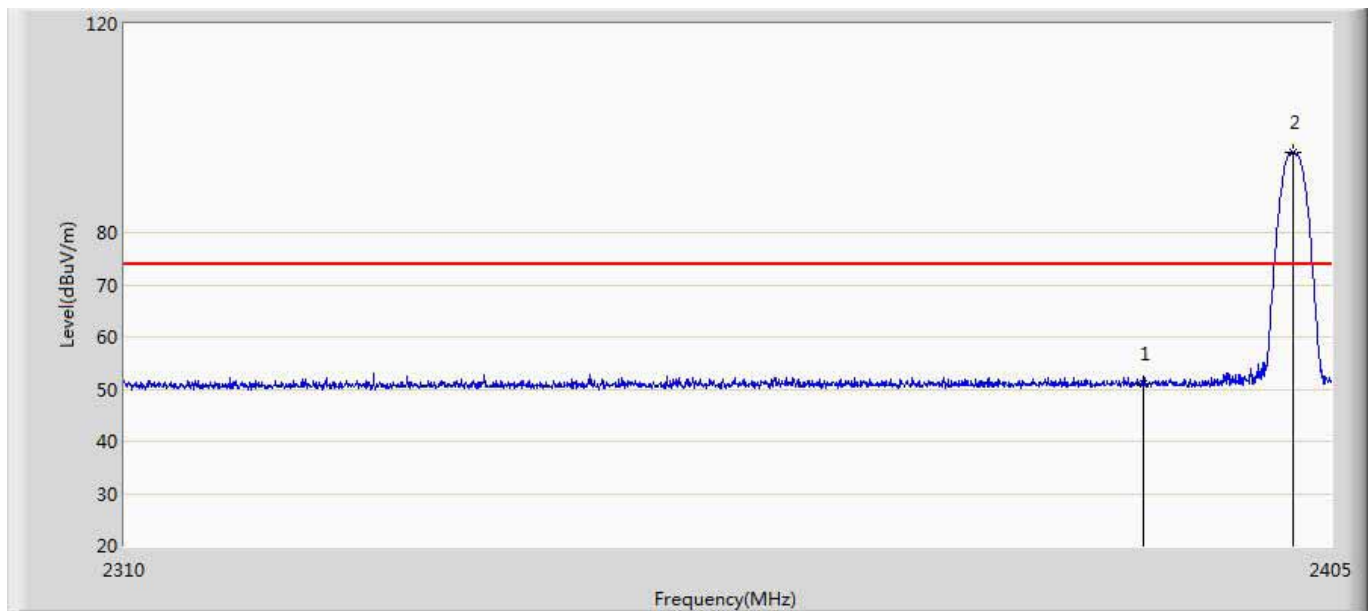

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.061	15.379	-22.939	74.000	35.682	PK
2	*	2402.000	95.369	59.656	21.369	74.000	35.712	PK




Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2402MHz by BLE	

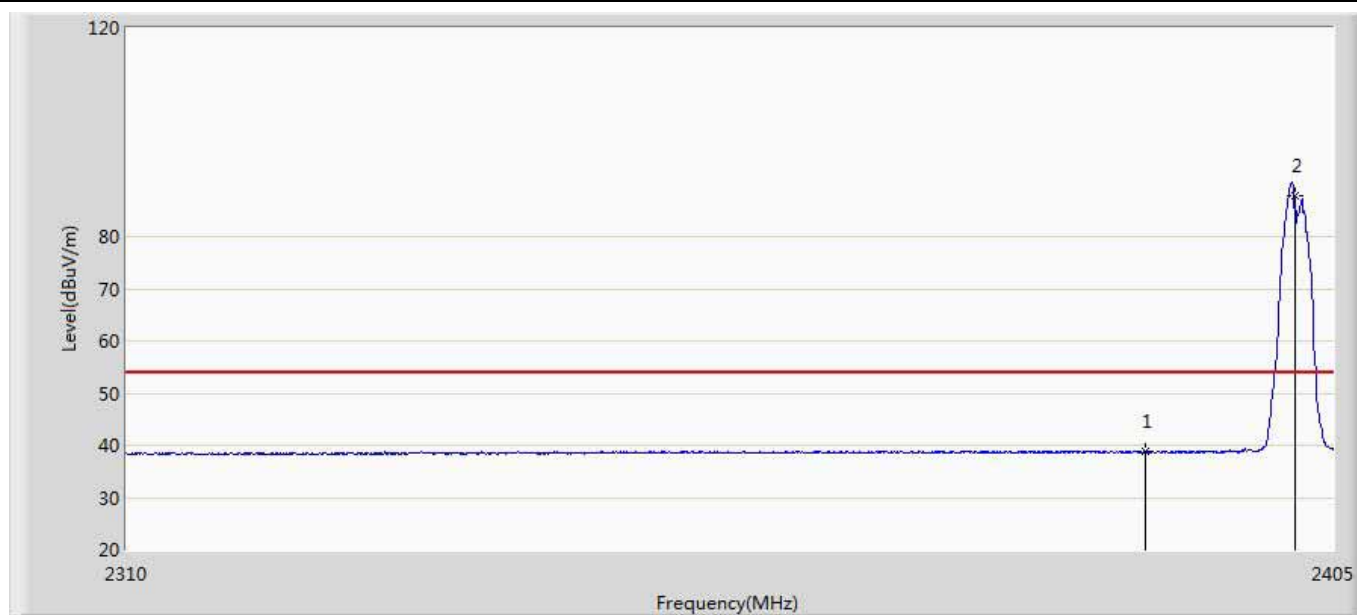


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.820	3.138	-15.180	54.000	35.682	AV
2	*	2402.000	87.705	51.992	33.705	54.000	35.712	AV

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2402MHz by BLE	

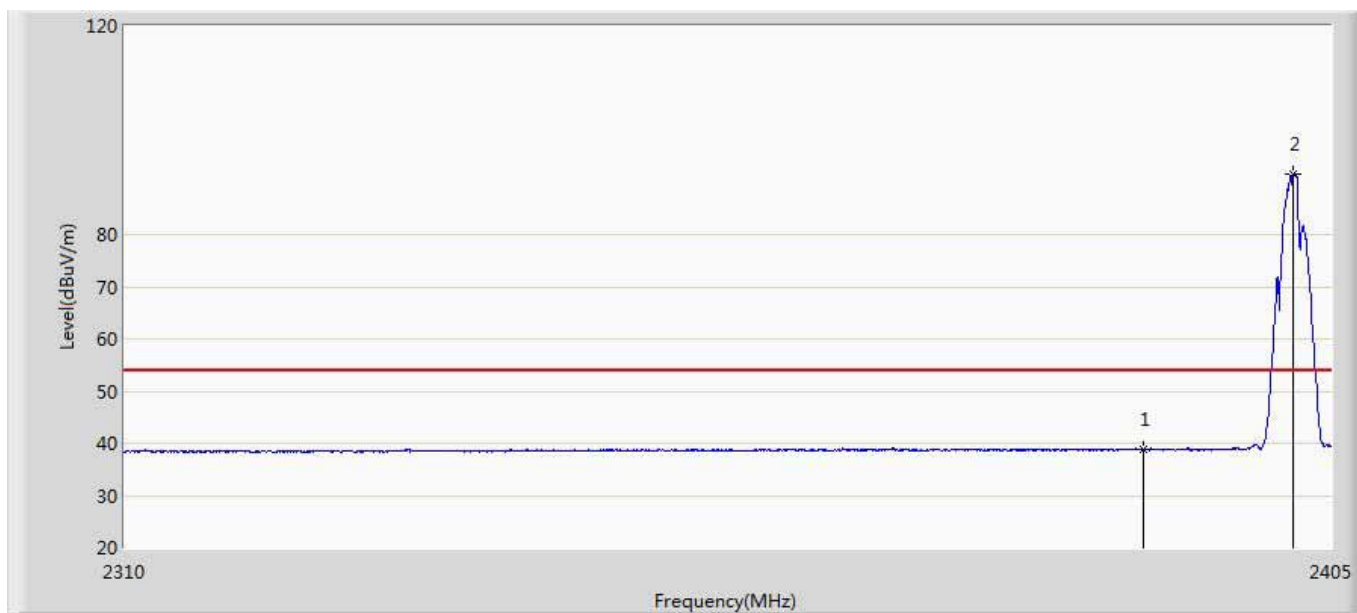


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.793	3.111	-15.207	54.000	35.682	AV
2	*	2402.000	91.477	55.764	37.477	54.000	35.712	AV

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2440MHz by BLE	

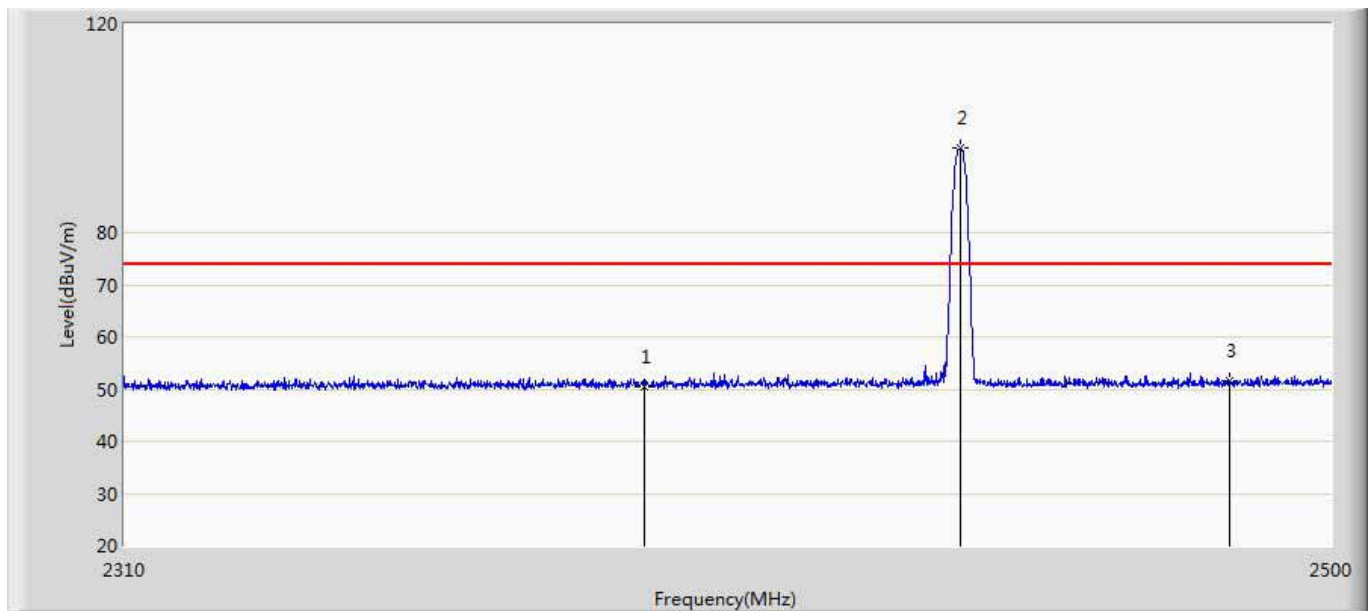


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.559	14.877	-23.441	74.000	35.682	PK
2	*	2440.000	96.162	60.357	22.162	74.000	35.805	PK
3		2483.500	51.486	15.594	-22.514	74.000	35.891	PK

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2440MHz by BLE	

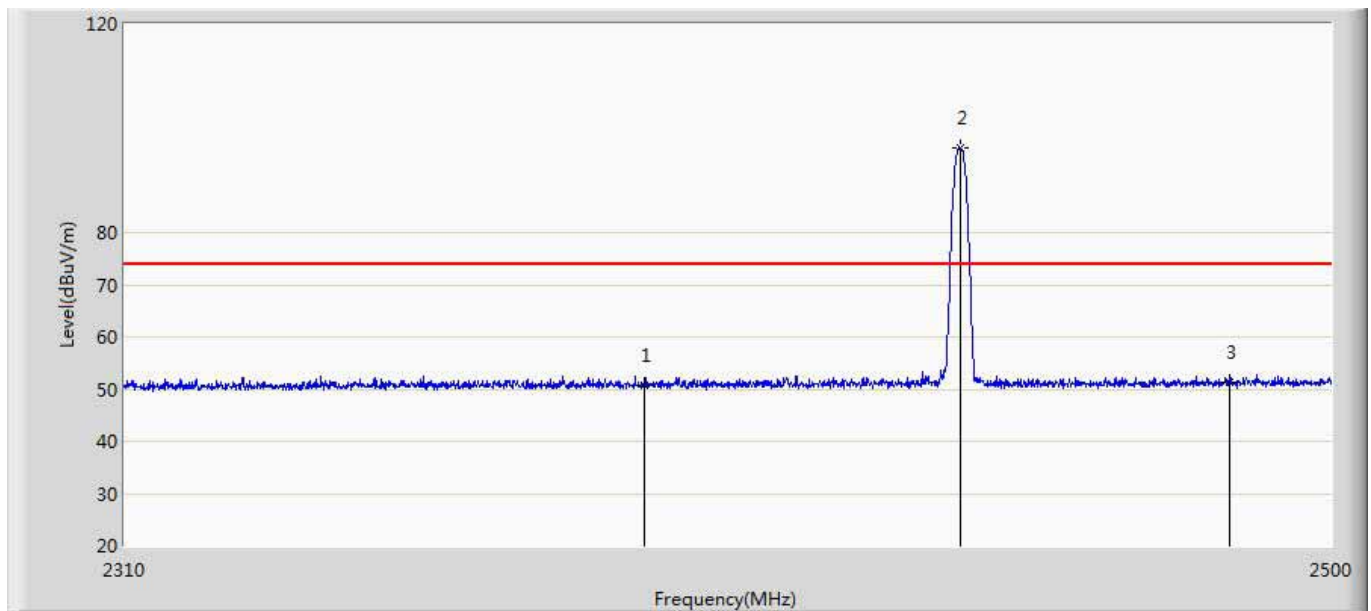


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.701	15.019	-23.299	74.000	35.682	PK
2	*	2440.000	96.166	60.361	22.166	74.000	35.805	PK
3		2483.500	51.308	15.416	-22.692	74.000	35.891	PK

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2440MHz by BLE	

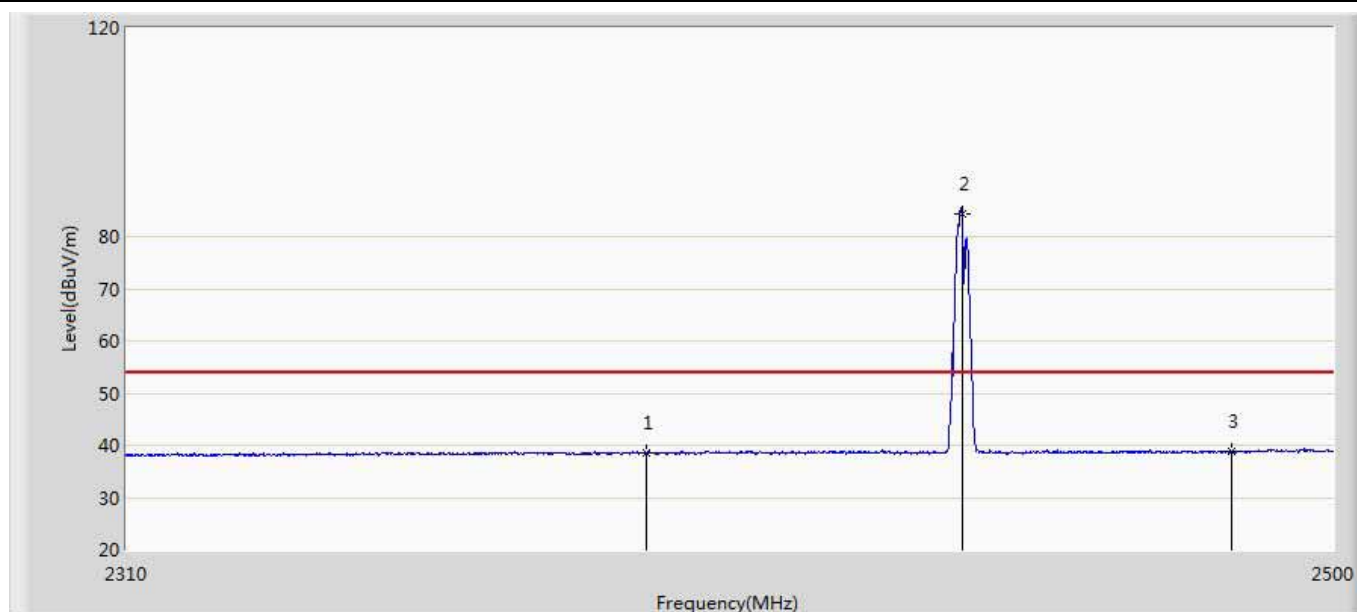


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.414	2.732	-15.586	54.000	35.682	AV
2	*	2440.000	84.275	48.470	30.275	54.000	35.805	AV
3		2483.500	38.887	2.995	-15.113	54.000	35.891	AV

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2440MHz by BLE	

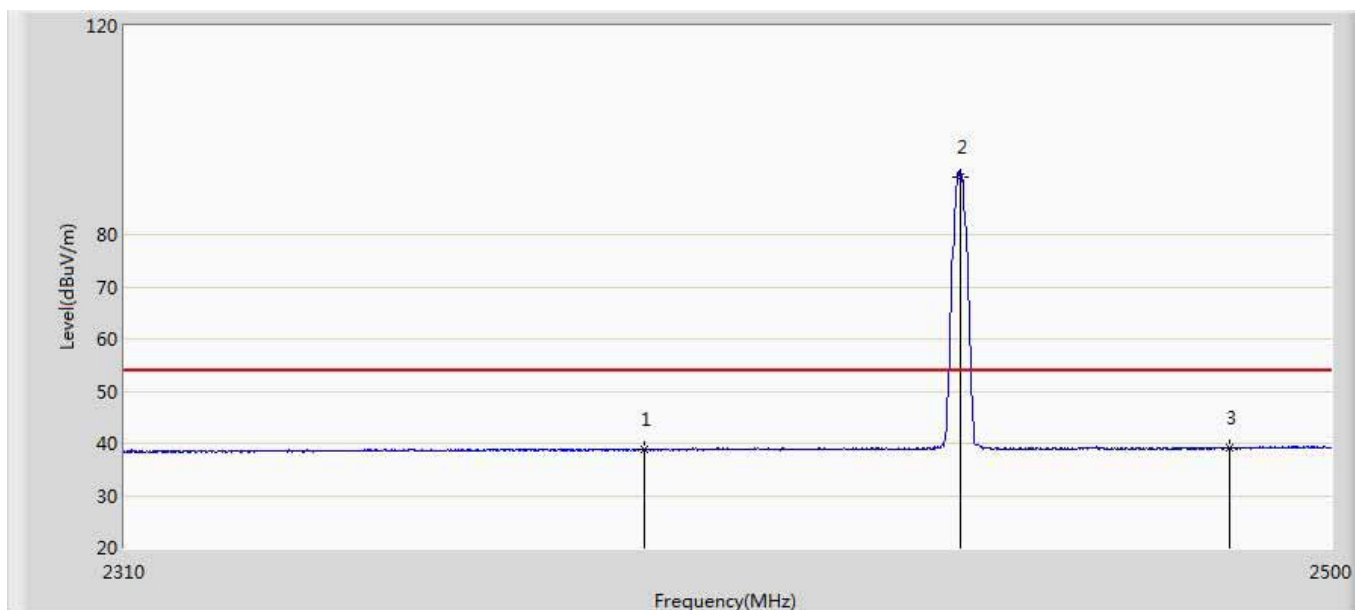


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	38.886	3.204	-15.114	54.000	35.682	AV
2	*	2440.000	90.945	55.140	36.945	54.000	35.805	AV
3		2483.500	39.006	3.114	-14.994	54.000	35.891	AV

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2480MHz by BLE	

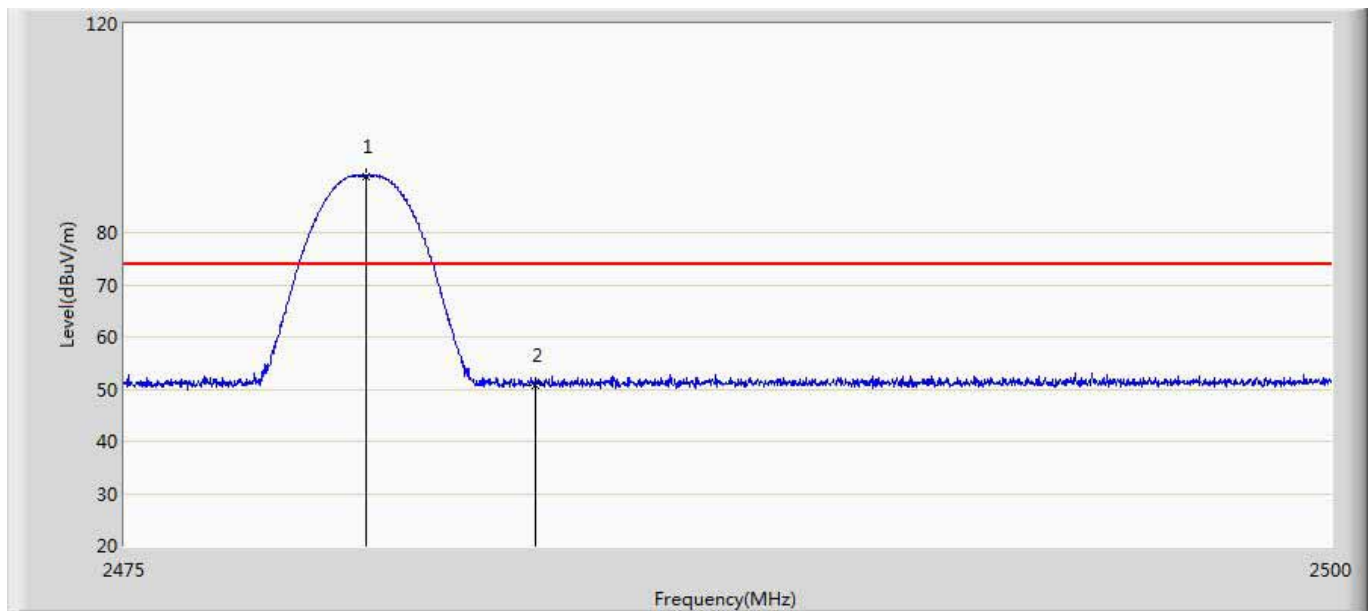

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.000	90.835	54.969	16.835	74.000	35.866	PK
2		2483.500	50.757	14.865	-23.243	74.000	35.891	PK


Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2480MHz by BLE	

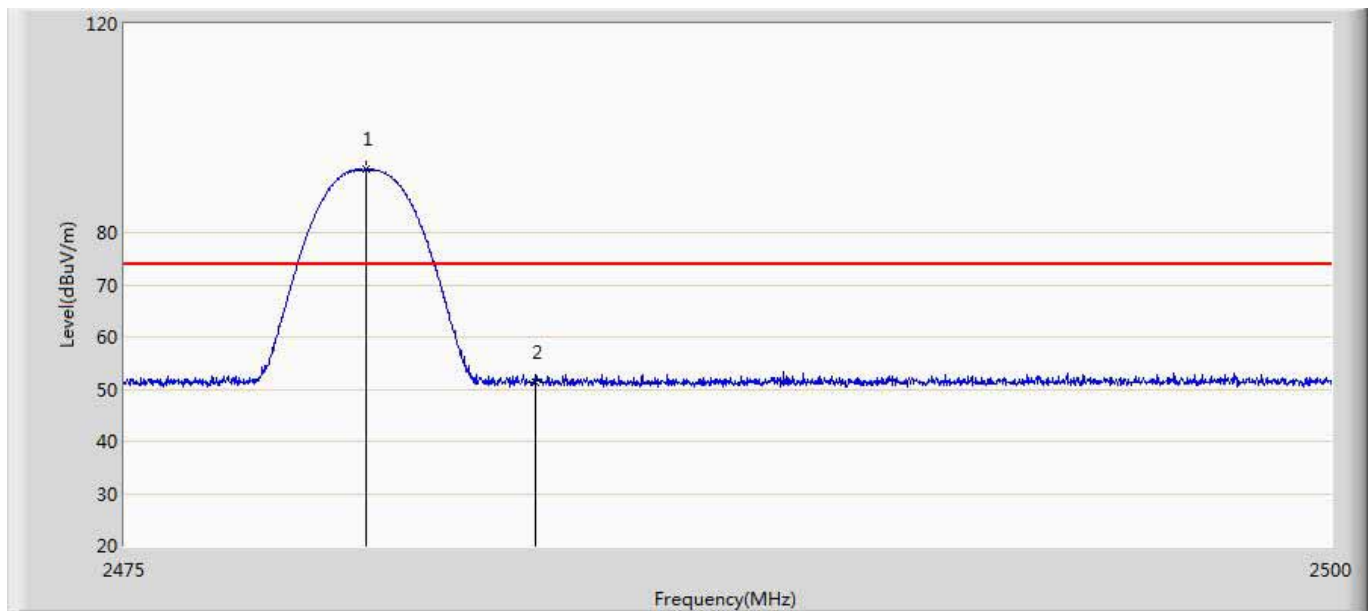

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.000	92.045	56.179	18.045	74.000	35.866	PK
2		2483.500	51.347	15.455	-22.653	74.000	35.891	PK




Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2480MHz by BLE	

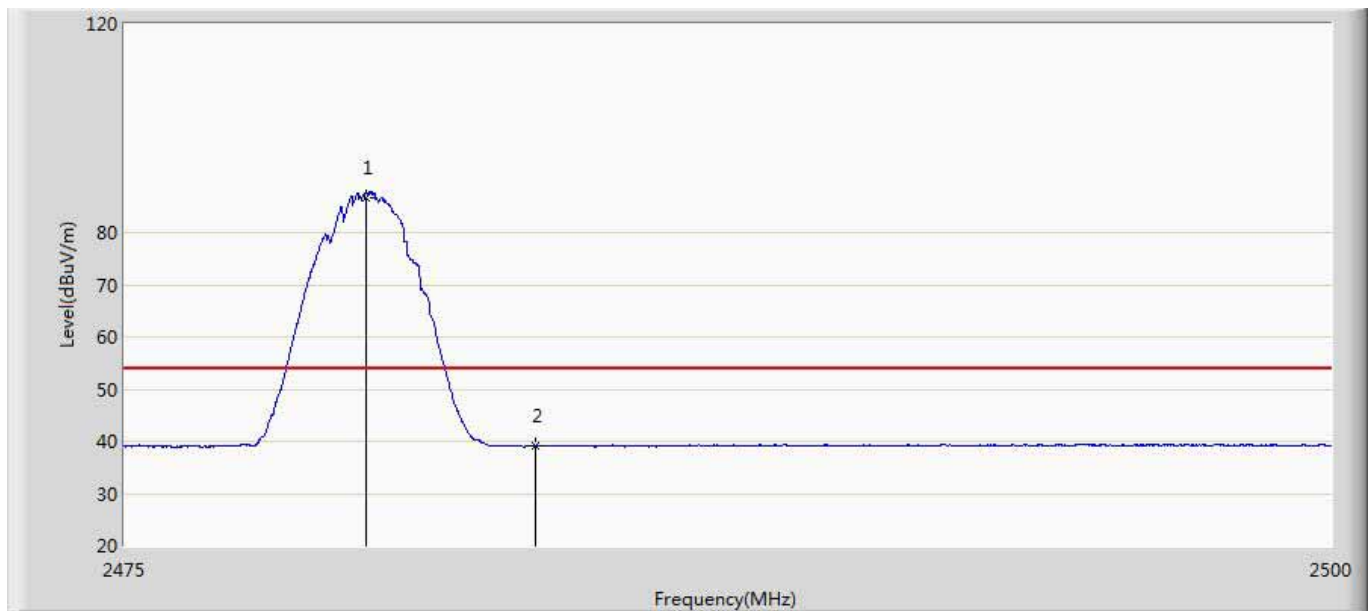

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.000	86.702	50.836	32.702	54.000	35.866	AV
2		2483.500	39.207	3.315	-14.793	54.000	35.891	AV

Engineer: Vic	
Site: AC5	Time: 2017/05/12 - 17:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: A19 Color	Power: 120V/60Hz
Note: Mode1:Transmit 2480MHz by BLE	

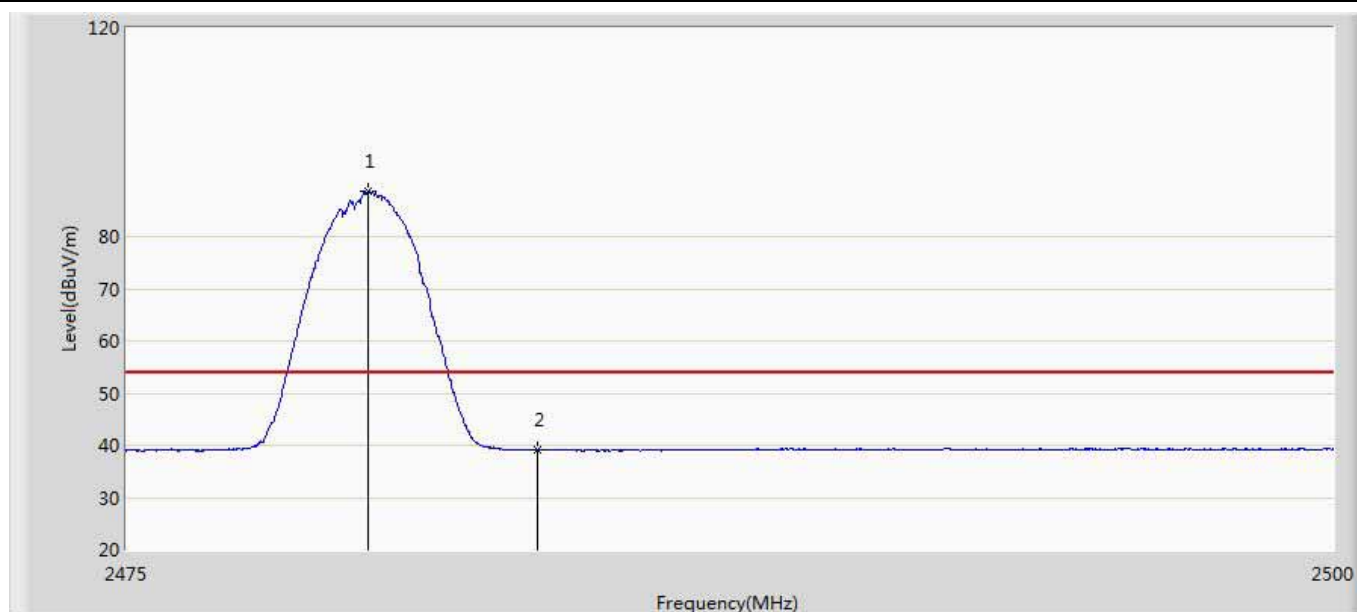


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.000	88.682	52.816	34.682	54.000	35.866	AV
2		2483.500	39.096	3.204	-14.904	54.000	35.891	AV

## 7. Occupied Bandwidth

### 7.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

### 7.2. Test Setup

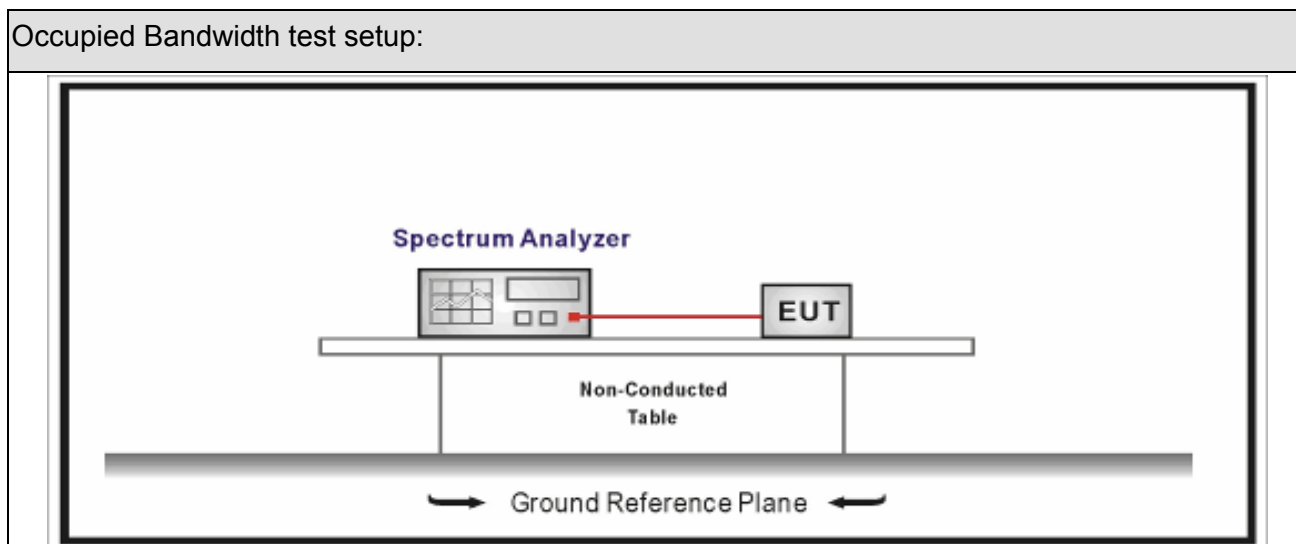

### 7.3. Limit







#### Occupied Bandwidth

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

### 7.4. Test Procedure

Test Method				
	Reference Rule		Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10		11.8	DTS bandwidth
	<input type="checkbox"/>	ANSI C63.10	11.8.1	Option 1
	<input checked="" type="checkbox"/>	ANSI C63.10	11.8.2	Option 2

## 7.5. EUT test definition

Item	Occupied Bandwidth			
Device Category	<input type="checkbox"/>	Fixed point-to-point		
	<input type="checkbox"/>	Emit multiple directional beams, simultaneously or sequentially		
	<input checked="" type="checkbox"/>	Other cases		
Test mode	Mode 1			
Test method	<input type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input checked="" type="checkbox"/>	Conducted		
	<input checked="" type="checkbox"/>	Chain 0		
				
	<input type="checkbox"/>	Chain 0	Chain 1	
				
	<input type="checkbox"/>	Chain 0	Chain 1	Chain 2
				


## 7.6. Test Result

Product Name	: A19 Color	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2017.05.15		

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	00	2402	506.2	>500	Pass
1	19	2440	507.1	>500	Pass
1	39	2480	506.1	>500	Pass

Note : The worst case of Occupied Bandwidth as below:

### Mode 1 CH39 (2480MHz)

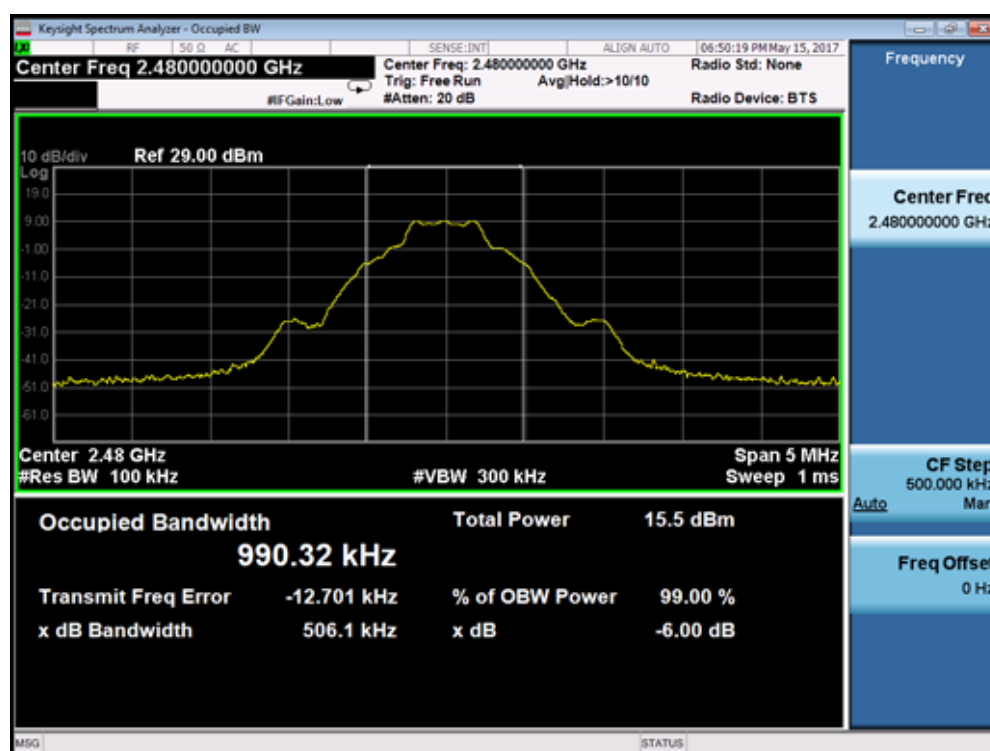


## 8. Fundamental emission output power

### 8.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.04	2018.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.01.04	2018.01.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2016.10.14	2017.10.13
Power Sensor	Anritsu	MA2411B	0846014	2016.10.14	2017.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

### 8.2. Test Setup

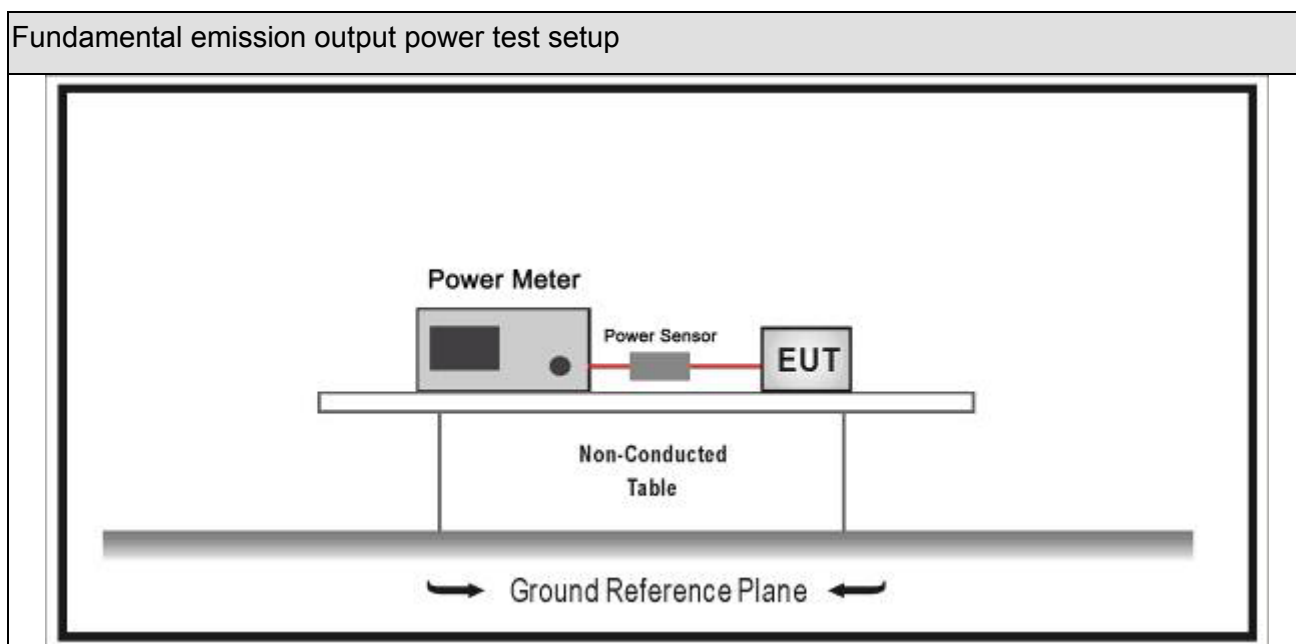

### 8.3. Limit







Fundamental emission output power Limit			
<input checked="" type="checkbox"/>	$G_{TX} < 6\text{dBi}$		$P_{out} \leq 30\text{dBm}$
<input type="checkbox"/>	$G_{TX} > 6\text{dBi}$		
	<input type="checkbox"/>	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
	<input type="checkbox"/>	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	<input type="checkbox"/>	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
	<input type="checkbox"/>	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	<input type="checkbox"/>	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : $G_{TX}$ directional gain of transmitting antennas.			
Note 2 : $P_{out}$ is maximum peak conducted output power .			



## 8.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10			11.9	Fundamental emission output power	
	<input checked="" type="checkbox"/>	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		<input type="checkbox"/>	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		<input type="checkbox"/>	ANSI C63.10	11.9.1.2	Integrated band power method	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	<input type="checkbox"/>	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		<input type="checkbox"/>	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle 98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle 98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle 98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle 98%)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		<input type="checkbox"/>	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			<input type="checkbox"/>	ANSI C63.10	11.9.2.3.1	Method AVGPM
			<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

## 8.5. EUT test definition

Item	Fundamental emission output power			
Device Category	<input type="checkbox"/>	Fixed point-to-point		
	<input type="checkbox"/>	Emit multiple directional beams, simultaneously or sequentially		
	<input checked="" type="checkbox"/>	Other cases		
Test mode	Mode 1			
Test method	<input type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input checked="" type="checkbox"/>	Conducted		
	<input checked="" type="checkbox"/>	Chain 0		
				
	<input type="checkbox"/>	Chain 0	Chain 1	
				
	<input type="checkbox"/>	Chain 0	Chain 1	Chain 2
				

## 8.6. Test Result

Product Name	:	A19 Color	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2017.05.15			


Mode	Channel	Test Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	00	2402	6.73	30	Pass
1	19	2440	7.99	30	Pass
1	39	2480	7.91	30	Pass

## 9. Power Spectral Density

### 9.1. Test Equipment

Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

### 9.2. Test Setup

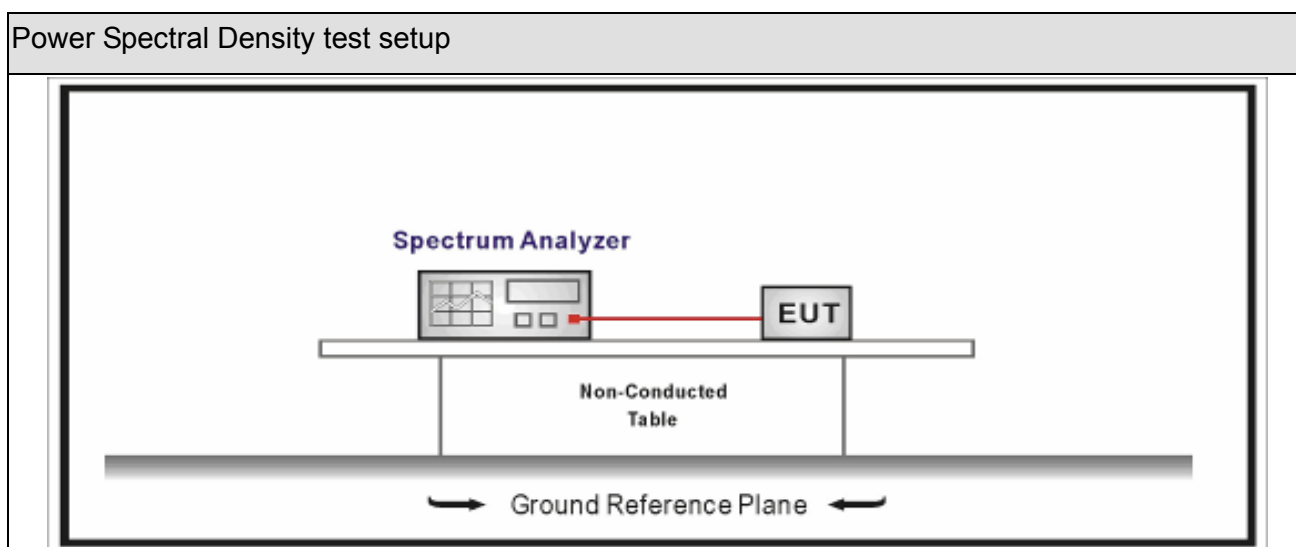







### 9.3. Limit

Power Spectral Density Limit	
Power Spectral Density	8dBm/3kHz

#### 9.4. Test Procedure

Power Spectral Density Test Method				
	References Rule		Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	<input checked="" type="checkbox"/>	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	<input type="checkbox"/>	ANSI C63.10	11.10.3	Method AVGPS-1(Duty cycle 98%)
	<input type="checkbox"/>	ANSI C63.10	11.10.4	Method AVGPS-1A(Duty cycle 98%)
	<input type="checkbox"/>	ANSI C63.10	11.10.5	Method AVGPS-2(Duty cycle < 98%)
	<input type="checkbox"/>	ANSI C63.10	11.10.6	Method AVGPS-2A(Duty cycle < 98%)
	<input type="checkbox"/>	ANSI C63.10	11.10.7	Method AVGPS-3
	<input type="checkbox"/>	ANSI C63.10	11.10.8	Method AVGPS-3A

## 9.5. EUT test definition

Item	Power Spectral Density Test Method			
Device Category	<input type="checkbox"/>	Fixed point-to-point		
	<input type="checkbox"/>	Emit multiple directional beams, simultaneously or sequentially		
	<input checked="" type="checkbox"/>	Other cases		
Test mode	Mode 1			
Test method	<input type="checkbox"/>	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>	Worst Axis <input type="checkbox"/>
	<input checked="" type="checkbox"/>	Conducted		
	<input checked="" type="checkbox"/>	Chain 0		
				
	<input type="checkbox"/>	Chain 0	Chain 1	
				
	<input type="checkbox"/>	Chain 0	Chain 1	Chain 2
				


## 9.6. Test Result

Product Name	: A19 Color	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2017.04.18		

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	00	2402	-3.758	-3.758	8	Pass
1	19	2440	-2.443	-2.443	8	Pass
1	39	2480	-2.545	-2.545	8	Pass

Note : The worst case of Power Spectral Density as below:

**Mode 1 CH19(2440MHz)**

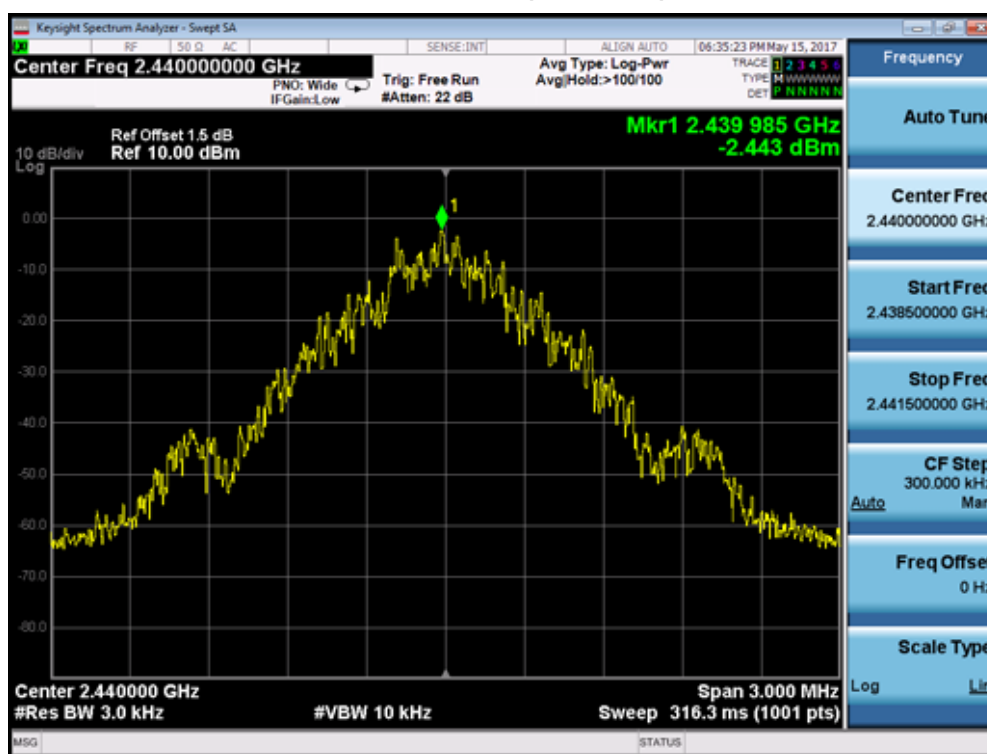

## 10. Antenna Requirement

### 10.1. Limit

Antenna Requirement Limit	
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>	

### 10.2. Antenna Connector Construction

Antenna Connector Construction	
<input checked="" type="checkbox"/>	The use of a permanently attached antenna
<input type="checkbox"/>	The antenna use of a unique coupling to the intentional radiator
<input type="checkbox"/>	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

\_\_\_\_\_ The End \_\_\_\_\_