




Graphs




Bertezzolo 19190505

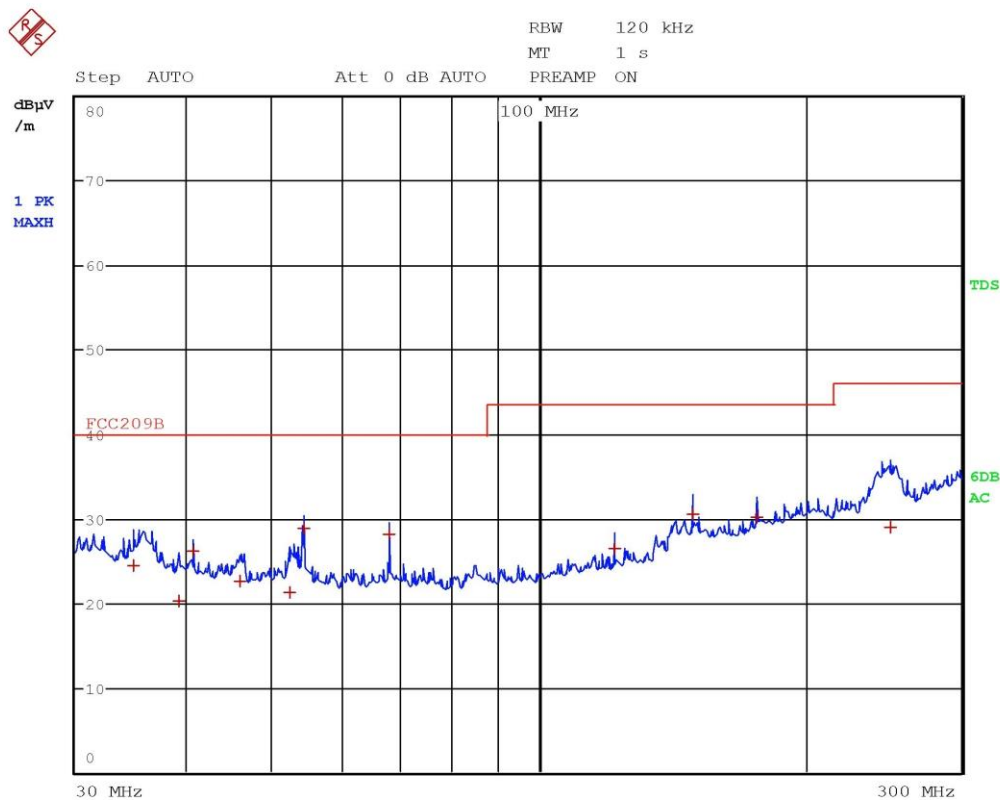

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	34.92 MHz	24.53	-15.46
1 Quasi Peak	39.28 MHz	20.21	-19.78
1 Quasi Peak	40.68 MHz	26.20	-13.79
1 Quasi Peak	46 MHz	22.68	-17.31
1 Quasi Peak	52.4 MHz	21.31	-18.69
1 Quasi Peak	54.24 MHz	28.88	-11.11
1 Quasi Peak	67.8 MHz	28.14	-11.85
1 Quasi Peak	122.04 MHz	26.50	-17.01
1 Quasi Peak	149.16 MHz	30.53	-12.98
1 Quasi Peak	176.278333333 MHz	30.21	-13.30
1 Quasi Peak	249.32 MHz	28.96	-17.05

Bertezzolo 19190505

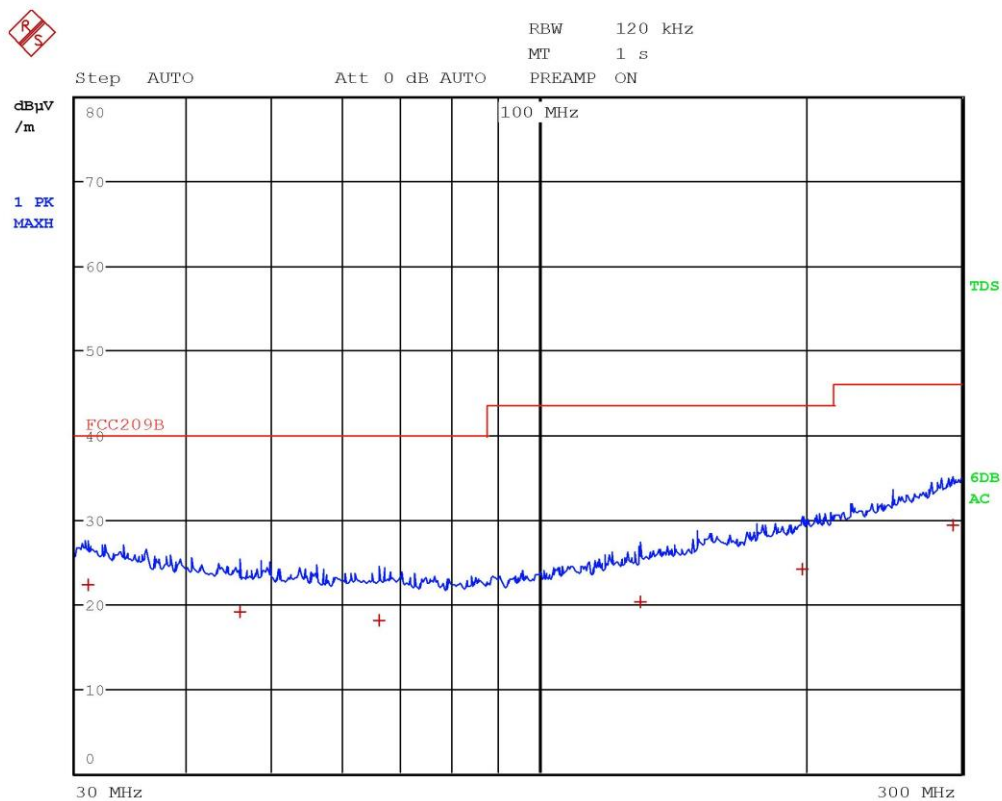


Bertezzolo 19190506



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	30.96 MHz	22.24	-17.75
1 Quasi Peak	45.96 MHz	19.01	-20.98
1 Quasi Peak	65.96 MHz	18.00	-21.99
1 Quasi Peak	130.2 MHz	20.23	-23.28
1 Quasi Peak	198.52 MHz	24.06	-19.45
1 Quasi Peak	293.36 MHz	29.33	-16.68

Bertezzolo 19190506

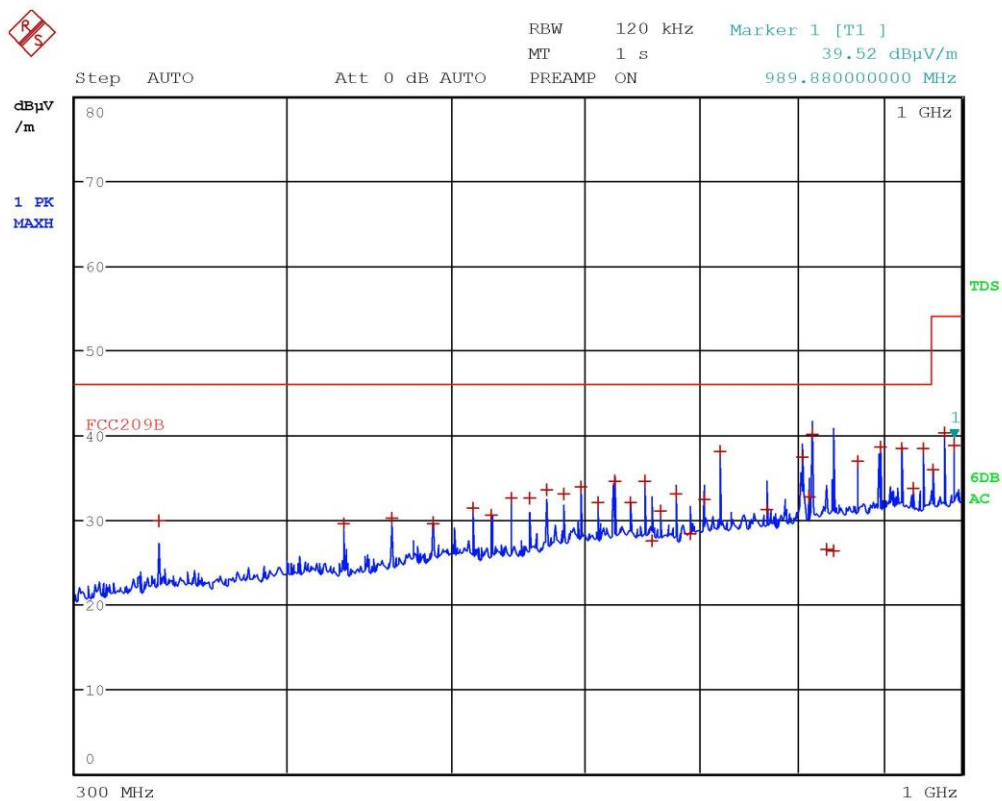

Bertezzolo 19190507




EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL, dBµV/m	DELTA LIMIT dB
1 Quasi Peak	336 MHz	29.79	-16.22
1 Quasi Peak	432 MHz	29.54	-16.47
1 Quasi Peak	461.04 MHz	30.21	-15.80
1 Quasi Peak	488.16 MHz	29.42	-16.59
1 Quasi Peak	515.28 MHz	31.31	-14.71
1 Quasi Peak	528 MHz	30.56	-15.45
1 Quasi Peak	542.4 MHz	32.51	-13.50
1 Quasi Peak	555.96 MHz	32.53	-13.48
1 Quasi Peak	569.52 MHz	33.48	-12.53
1 Quasi Peak	583.08 MHz	32.97	-13.04
1 Quasi Peak	596.64 MHz	33.91	-12.10
1 Quasi Peak	610.2 MHz	32.06	-13.95
1 Quasi Peak	624 MHz	34.56	-11.46
1 Quasi Peak	637.32 MHz	32.08	-13.93
1 Quasi Peak	650.88 MHz	34.49	-11.52
1 Quasi Peak	656.04 MHz	27.42	-18.59
1 Quasi Peak	664.44 MHz	30.93	-15.09
1 Quasi Peak	678 MHz	33.03	-12.98
1 Quasi Peak	691.52 MHz	28.32	-17.69
1 Quasi Peak	705.12 MHz	32.30	-13.71

Bertezzolo 19190507



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	720 MHz	38.04	-7.97
1 Quasi Peak	767.96 MHz	31.18	-14.83
1 Quasi Peak	805.04 MHz	37.32	-8.70
1 Quasi Peak	813.6 MHz	32.64	-13.37
1 Quasi Peak	816.04 MHz	40.16	-5.85
1 Quasi Peak	833 MHz	26.40	-19.61
1 Quasi Peak	841.16 MHz	26.31	-19.70
1 Quasi Peak	867.84 MHz	36.82	-9.19
1 Quasi Peak	894.96 MHz	38.54	-7.47
1 Quasi Peak	922.08 MHz	38.46	-7.55
1 Quasi Peak	935.64 MHz	33.69	-12.32
1 Quasi Peak	949.2 MHz	38.37	-7.64
1 Quasi Peak	962.76 MHz	35.86	-18.11
1 Quasi Peak	976.32 MHz	40.26	-13.71
1 Quasi Peak	989.88 MHz	38.79	-15.18

Bertezzolo 19190507

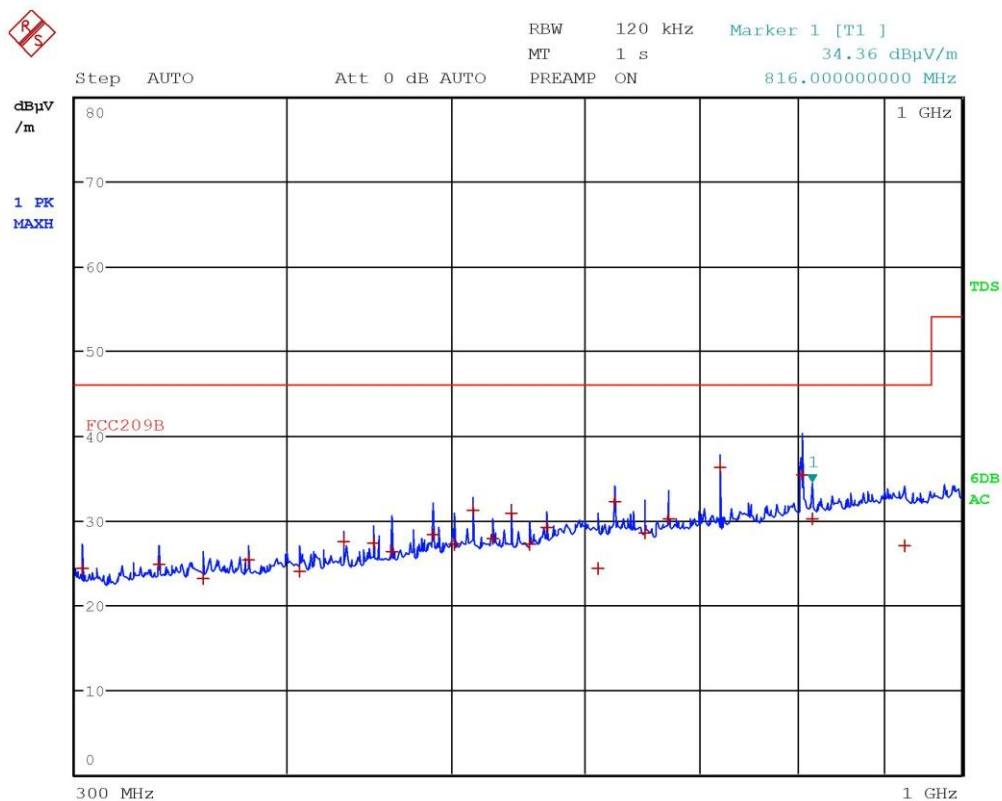

Bertezzolo 19190508




EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	303 MHz	24.21	-21.80
1 Quasi Peak	336 MHz	24.78	-21.23
1 Quasi Peak	356.92 MHz	23.12	-22.89
1 Quasi Peak	379.68 MHz	25.31	-20.70
1 Quasi Peak	406.8 MHz	23.93	-22.08
1 Quasi Peak	432 MHz	27.53	-18.48
1 Quasi Peak	450 MHz	27.35	-18.66
1 Quasi Peak	461.04 MHz	26.36	-19.65
1 Quasi Peak	488.16 MHz	28.33	-17.68
1 Quasi Peak	501.72 MHz	27.16	-18.85
1 Quasi Peak	515.28 MHz	31.19	-14.82
1 Quasi Peak	528.84 MHz	27.82	-18.19
1 Quasi Peak	542.4 MHz	30.79	-15.22
1 Quasi Peak	555.96 MHz	27.14	-18.87
1 Quasi Peak	569.52 MHz	29.07	-16.94
1 Quasi Peak	610.2 MHz	24.21	-21.80
1 Quasi Peak	624 MHz	32.20	-13.82
1 Quasi Peak	650.88 MHz	28.54	-17.47
1 Quasi Peak	672 MHz	30.21	-15.80
1 Quasi Peak	720 MHz	36.20	-9.81

Bertezzolo 19190508



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	FCC209B		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	804.96 MHz	35.33	-10.68
1 Quasi Peak	816 MHz	30.20	-15.81
1 Quasi Peak	924.8 MHz	27.00	-19.01

Bertezzolo 19190508

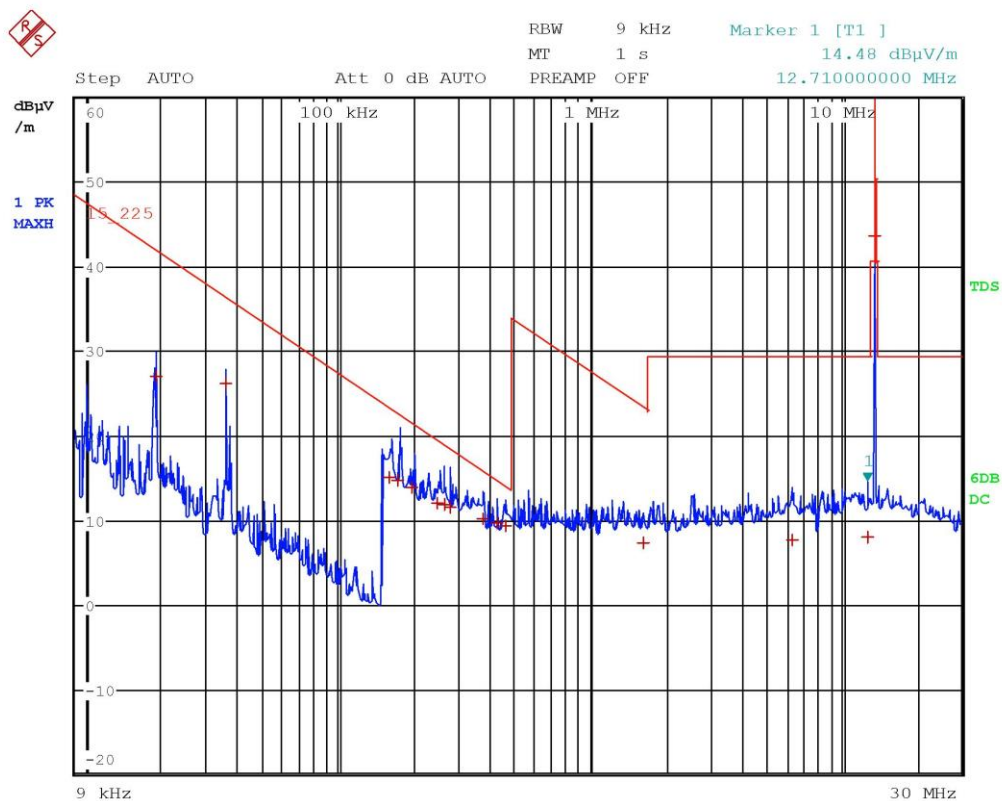

Bertezzolo 19190509



EDIT PEAK LIST (Final Measurement Results)			
Trace1:	15_225		
Trace2:	---		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV/m	DELTA LIMIT dB
1 Quasi Peak	18.76 kHz	27.00	-15.14
1 Quasi Peak	35.56 kHz	26.17	-10.41
1 Quasi Peak	162 kHz	15.11	-8.29
1 Quasi Peak	174 kHz	14.67	-8.12
1 Quasi Peak	198 kHz	13.79	-7.87
1 Quasi Peak	250 kHz	11.99	-7.65
1 Quasi Peak	262 kHz	11.82	-7.40
1 Quasi Peak	274 kHz	11.57	-7.27
1 Quasi Peak	370 kHz	10.08	-6.15
1 Quasi Peak	422 kHz	9.62	-5.47
1 Quasi Peak	458 kHz	9.34	-5.03
1 Quasi Peak	1.634 MHz	7.25	-16.08
1 Quasi Peak	6.39 MHz	7.64	-21.89
1 Quasi Peak	12.71 MHz	7.99	-21.54
1 Quasi Peak	13.558 MHz	43.65	-40.34

Bertezzolo 19190509


9.4 Field strength with the assigned band

Tested by	A. Bertezolo
Test date	27.01.2020
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 and 15.225 ANSI C63.10
Supplementary test set-up description	EUT – antenna distance: 10 m
Supplementary information.....	--

Acceptance limits

- The field strength of any emissions within the band 13,553 – 13,567 MHz shall not exceed 15,848 microvolts/meter at 30 meters
- Within the bands 13,410 – 13,553 MHz and 13,567 – 13,710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters
- Within the bands 13,110 – 13,410 MHz and 13,710 – 14,010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters
- The field strength of any emissions appearing outside of the 13,110 – 14,010 MHz band shall not exceed the general radiated emission limits in §15.209

Test setup

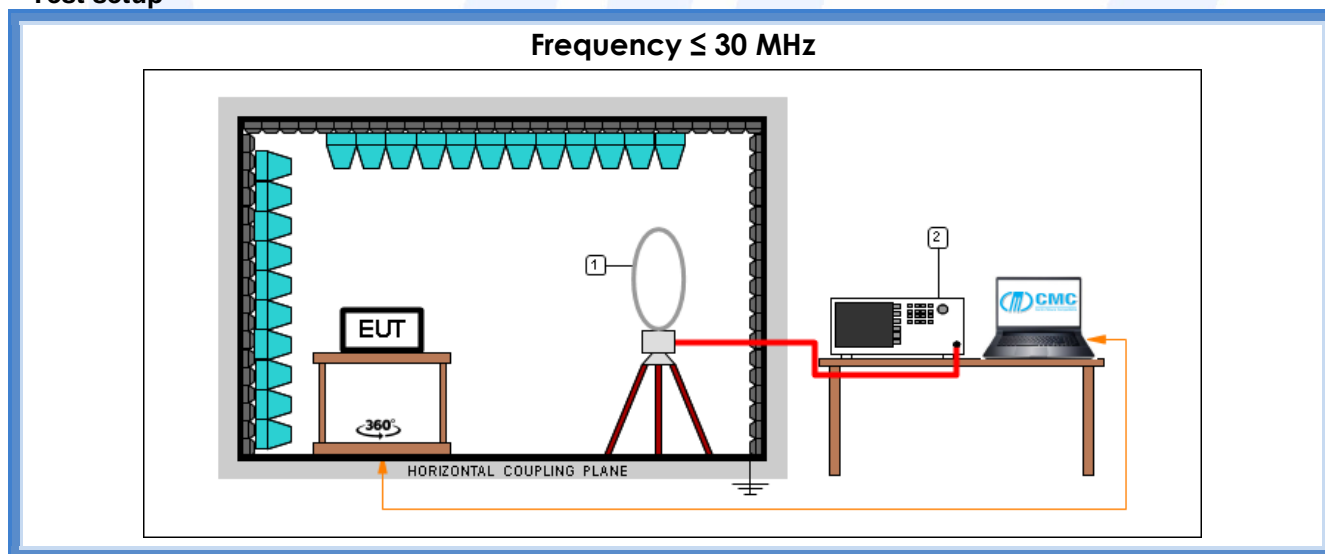

Test setup PE004_01				
Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz



Result


Frequency band (MHz)	Graphs	Measured level (dB μ V/m)	Limit (dB μ V/m)
13,553 – 13,567	G19190510	45,06	84,00
	G19190511		

Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard.






Graphs

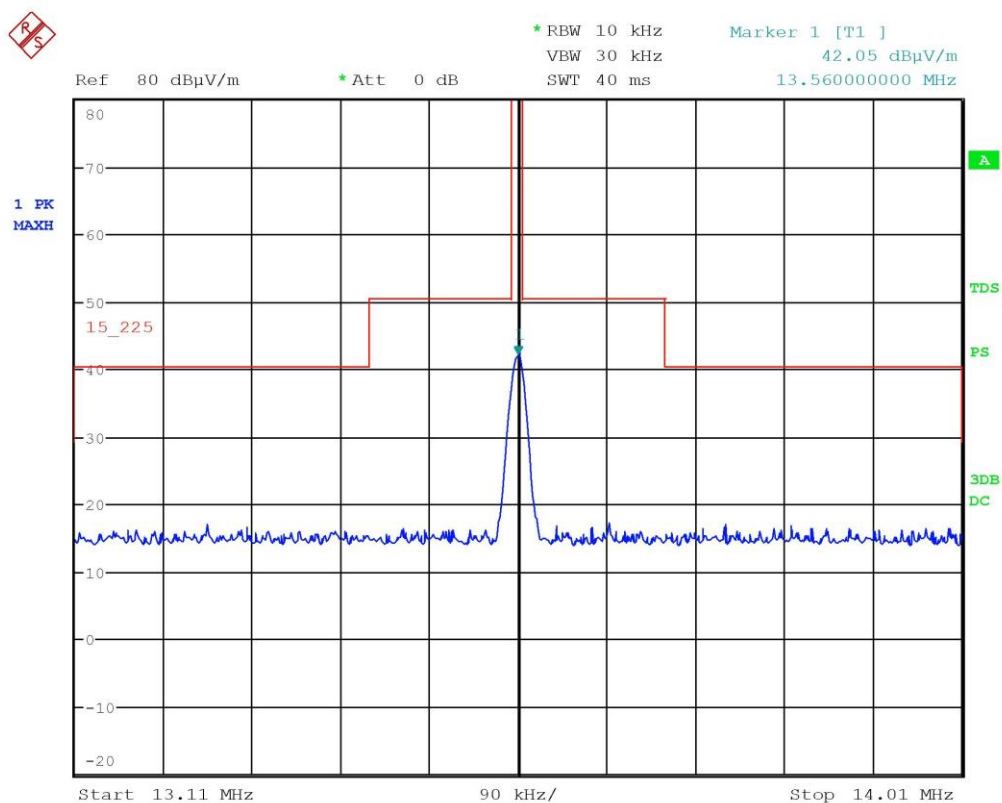

Bertezzo 19190510

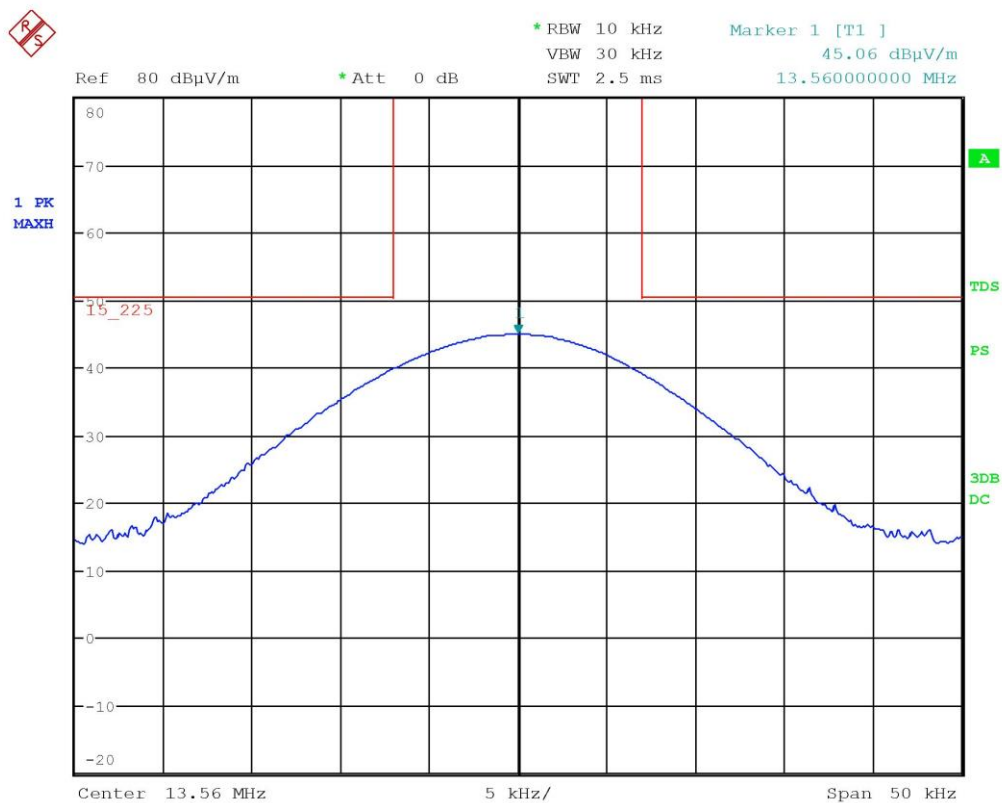

Bertezzo 19190511




9.5 Frequency tolerance

Tested by	A. Bertezolo
Test date	23.01.2020
Test location (stand)	Climatic chamber (CMC B069)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.225 e) ANSI C63.10
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0,01\%$ of the operating frequency over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20°C . For battery operated equipment, the equipment tests shall be performed using a new battery

Test setup

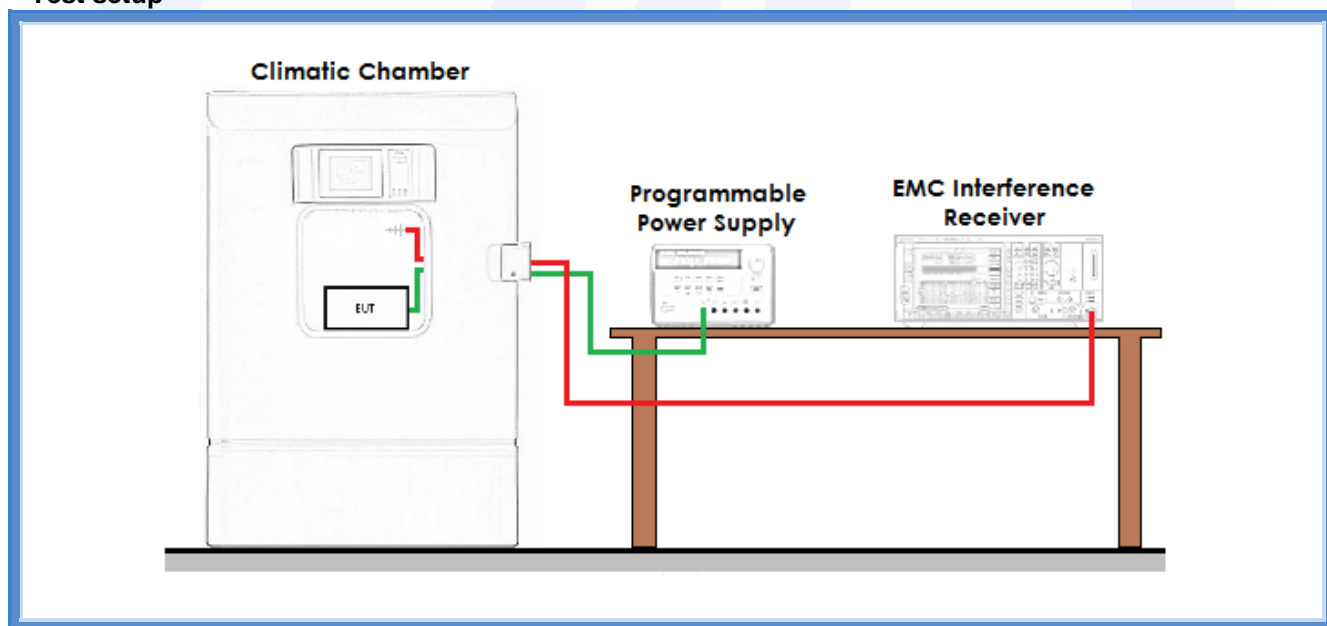

<i>Id. Number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz
CMC B069	Angelantoni	CH 600C	Climatic chamber



Result

Test conditions		Measured frequency	Frequency limits
Temperature (°C)	Voltage level (V)	(MHz)	(MHz)
-20	Nominal supply voltage	13,560000	13,55864 – 13,56136
-10	Nominal supply voltage	13,560018	13,55864 – 13,56136
0	Nominal supply voltage	13,560026	13,55864 – 13,56136
10	Nominal supply voltage	13,560014	13,55864 – 13,56136
20	Nominal supply voltage	13,559992	13,55864 – 13,56136
30	Nominal supply voltage	13,559946	13,55864 – 13,56136
40	Nominal supply voltage	13,559920	13,55864 – 13,56136
50	Nominal supply voltage	13,559896	13,55864 – 13,56136

No variation of transmission power and frequency during a continuous voltage variation between 7,65 V (0,85x9, where 9 is the minimum level of the supply voltage range 9-42 Vdc) and 42 V (the highest absolute value of the supply voltage range 9-42 Vdc)




9.6 20 dB bandwidth

Tested by	A. Bertezolo
Test date	27.01.2020
Test location (stand)	Semi-anechoic chamber (CMC A070)
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.215 ANSI C63.10 cl. 7.8.7
Supplementary test set-up description	--
Supplementary information.....	--

Acceptance limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

Test setup

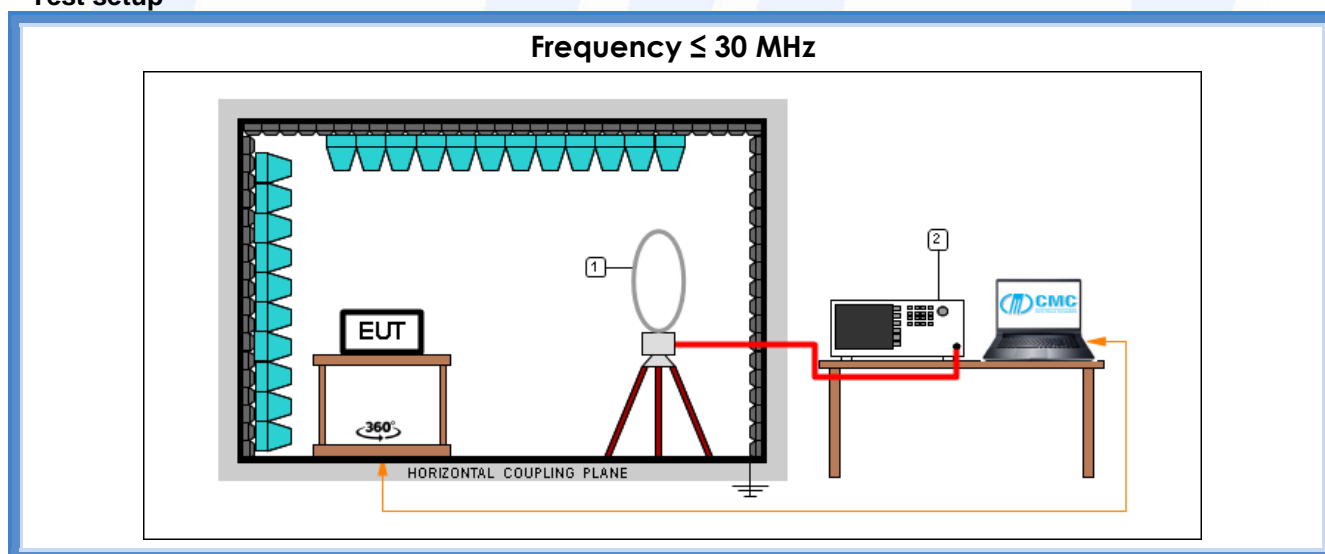

Test setup PE004_01


Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S164	Rohde & Schwarz	ESU26	Receiver 20 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

Result

f (MHz)	20 dB bandwidth (MHz)		Graph	Results
	F_L	F_H		
13,56	13,559806	13,560070	G19190513	Complies



Graphs

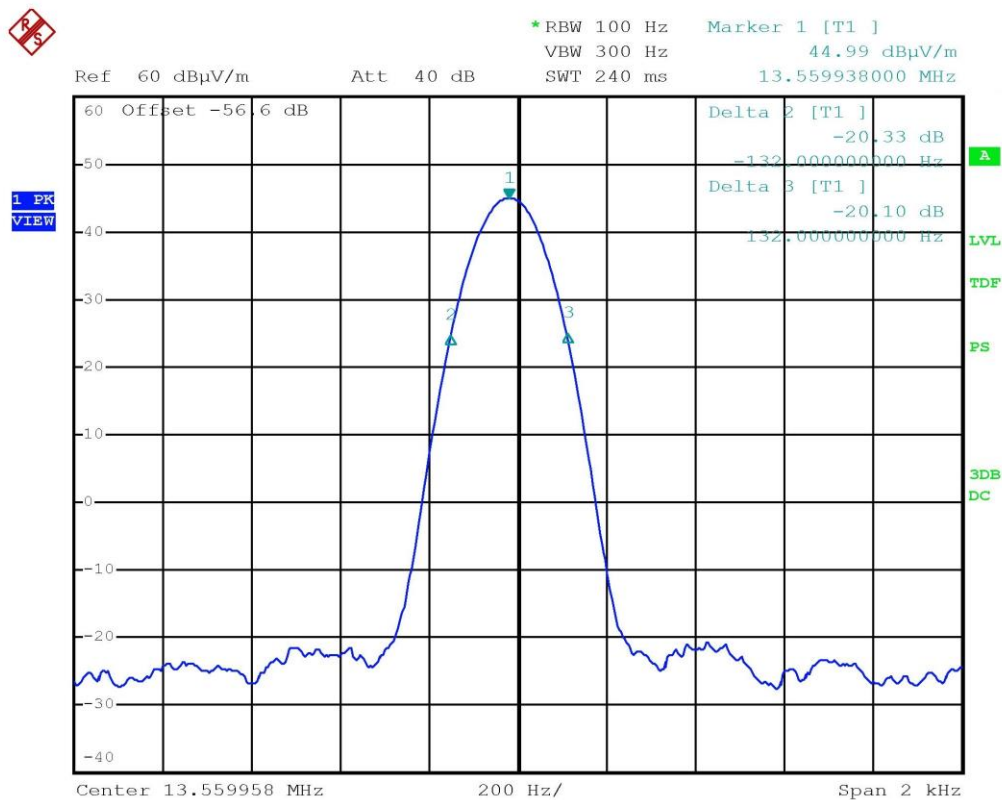

Bertezzo 19190513



Attachment 1

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	- - -	January '20	January '21
CMC S108	EMCO	3115	Horn Antenna	9811-5622	June '19	June '22
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	November '18	November '23
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '20	January '21
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '20	January '21
CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz	100781	January '20	January '21
CMC S260	CMC	Wfr_N	Shielded Cable	Wfr_ant10-1	November '19	November '20
CMC S261	CMC	Wfr_N	Shielded Cable	Wfr_ant20-1	November '19	November '20
CMC S262	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix32-1	November '19	November '20
CMC S263	CMC	Wfr_N_fix	Shielded Cable	Wfr_fix31-1	November '19	November '20
CMC S264	CMC	Wfr_N	Shielded Cable	Wfr_ext03-1	November '19	November '20
CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Biconical Antenna (30-300MHz)	831	June '19	June '22
CMC S287	Schwarzbeck	VUSLP 9111B	Log-periodic Antenna (200 MHz-3Ghz)	9111B-203	June '19	June '22
CMC S288	CMC	W_sma_white	Joint Shielded Cable	W_001	November '19	November '20
CMC S295	Rohde & Schwarz	FSW43	Spectrum Analyzer 43GHz	104059	November '19	November '22



Attachment 1

Measurement uncertainty

Test	Test Setup	Expanded uncertainty	Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150MHz	PE001_01	3,4 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_01	3,0 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30MHz	PE001_02	2,9 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30MHz	PE001_03	2,6 dB	1
Conducted emission CISPR 16 ISN 0,15-30MHz	PE001_04	4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0MHz	PE001_05	3,1 dB	1
Disturbance Power 30-300 MHz	PE002_01	3,6 dB	1
Radiated Emission LAS 0,15-30MHz	PE003_01	2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30MHz	PE004_01	4,0 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300MHz	PE004_02	3,9 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000MHz	PE004_03	3,8 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18GHz	PE004_04	4,2 dB	1
Human Exposure to electromagnetic fields	PE005_01	23,6 %	1
Harmonic current emissions test	PE006_01	10 mA + 2,6 %	1
Voltage fluctuation and flicker test	PE007_01	4,8 %	1
Radiated Immunity 80MHz-6GHz	PE102_XX	2,1 dB 0,82 V/m a 3V/m	1
Conducted Immunity 0,15-230MHz	PE105_XX	1,2 dB 0,44 V a 3V	1
AC Magnetic field	PE106_01	1,55 % 0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,25 % 18,7 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,25 % 1,87 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,21 % 0,22 V a 10V	1



Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,0 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,7 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,4 dB	1
Frequency error	PR002_01+02	$< 1 \times 10^{-7}$	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	$< 1 \times 10^{-7}$	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev_20_01 date 16/01/2020			

Note 1:

The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of $K=2$, providing a level of confidence of $p = 95\%$

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor $k = 2$



Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
The sample complies with the requirements. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	The sample complies with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	The sample does not comply with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	The sample does not comply with the requirements. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 3.0 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 9.1 (Quality Manual)	Measurement uncertainty calculation