

FCC RF Test Report


APPLICANT : Baigong LLC
EQUIPMENT : Wireless Remote
MODEL NAME : PE59CV
FCC ID : 2ALBK-0445
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was completed on Mar. 02, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : 2ALBK-0445

Page Number : 1 of 64

Report Issued Date : Mar. 13, 2017

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT Version 1.1



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Descriptions of Test Mode	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system	10
2.6 EUT Operation Test Setup	10
2.7 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement.....	21
3.4 20dB and 99% Bandwidth Measurement	24
3.5 Peak Output Power Measurement	37
3.6 Conducted Band Edges Measurement.....	39
3.7 Conducted Spurious Emission Measurement	46
3.8 Radiated Band Edges and Spurious Emission Measurement	56
3.9 Antenna Requirements.....	62
4 LIST OF MEASURING EQUIPMENT.....	63
5 UNCERTAINTY OF EVALUATION.....	64
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. RADIATED SPURIOUS EMISSION PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR710302-01	Rev. 01	Initial issue of report	Mar. 13, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass
3.4	-	99% Bandwidth	-	Pass
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass
-	15.207	AC Conducted Emission	15.207(a)	Not Required
3.9	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass

Note: Not required means after assessing, test items are not necessary to carry out.



1 General Description

1.1 Applicant

Baigong LLC

159 Crocker Park Blvd. Suite 400 Westlake, Ohio 44145

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Remote
Model Name	PE59CV
FCC ID	2ALBK-0445
EUT supports Radios application	Bluetooth BR/EDR

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 7.93 dBm (0.0062 W) Bluetooth EDR (2Mbps) : 9.82 dBm (0.0096 W) Bluetooth EDR (3Mbps) : 10.28 dBm (0.0107 W)
99% Occupied Bandwidth	Bluetooth BR(1Mbps) : 0.844MHz Bluetooth EDR (2Mbps) : 1.156MHz Bluetooth EDR (3Mbps) : 1.156MHz
Antenna Type / Gain	Fixed Internal Antenna Type with gain 2.38 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH06-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	7.61 dBm	9.63 dBm	10.00 dBm
Ch39	2441MHz	7.93 dBm	9.82 dBm	10.28 dBm
Ch78	2480MHz	7.86 dBm	9.71 dBm	10.10 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.


2.3 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
Remark:			
For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and the conducted spurious emissions and conducted band edge measurement for each data rate are no worse than 3Mbps, and no other significantly frequencies found in conducted spurious emission.			

2.4 Connection Diagram of Test System

<Bluetooth Tx Mode>

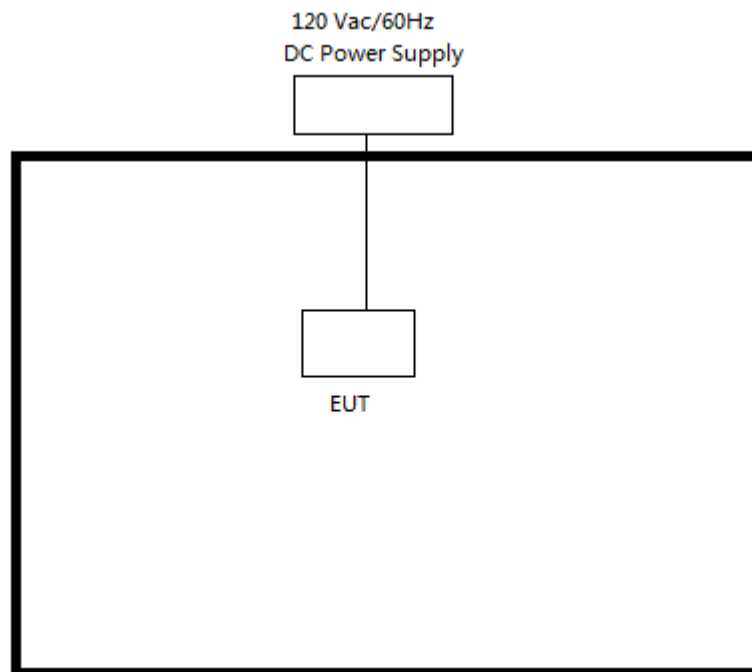

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	Topward	3303D	N/A	N/A	Unshielded, 1.8 m

2.6 EUT Operation Test Setup

The RF test items, an engineering test program was provided and enabled to make EUT transmitting and receiving signals.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.


3.1.4 Test Setup

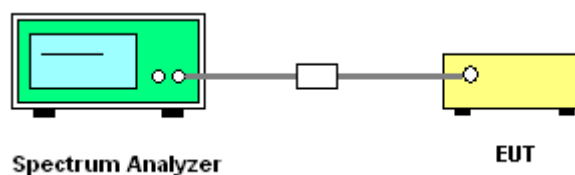


3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	3Mbps	Temperature :	24~6°C
Test Engineer :	Kai Liao	Relative Humidity :	48~51%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

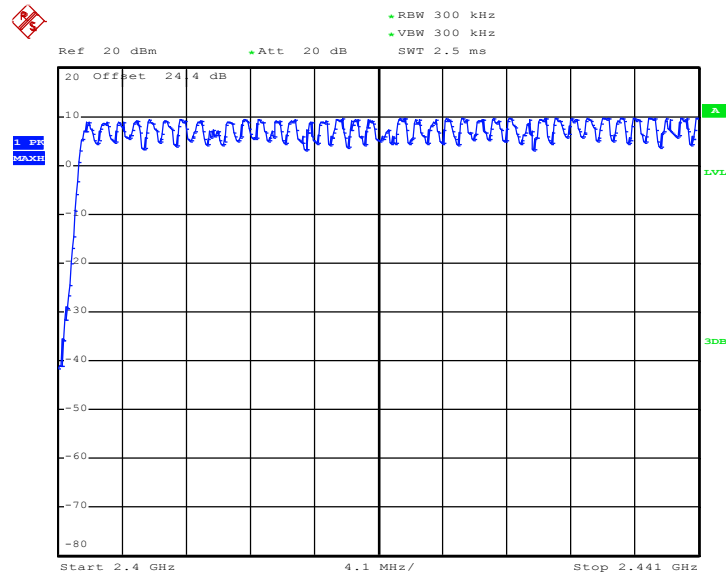

Date: 1.MAR.2017 19:32:08

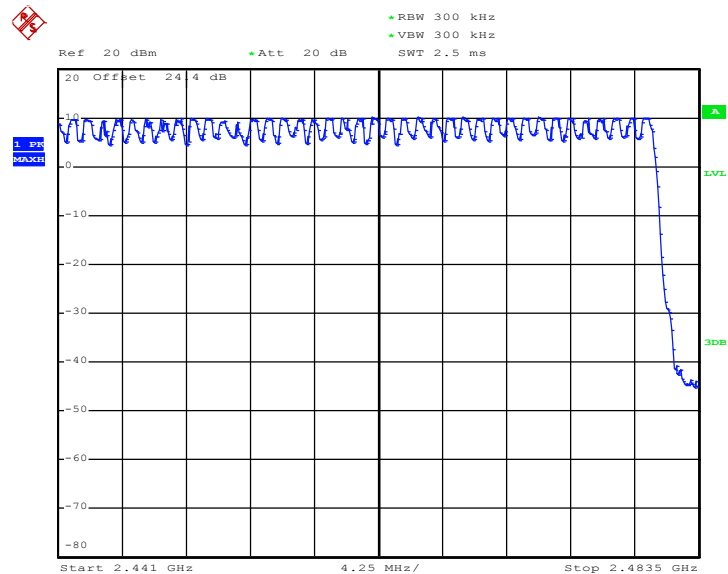

Date: 1.MAR.2017 19:33:59

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.


3.2.4 Test Setup

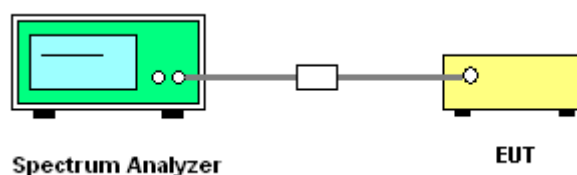

**3.2.5 Test Result of Hopping Channel Separation**

Test Mode :	1Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.5867	Pass
39	2441	1.002	0.6160	Pass
78	2480	1.008	0.6187	Pass

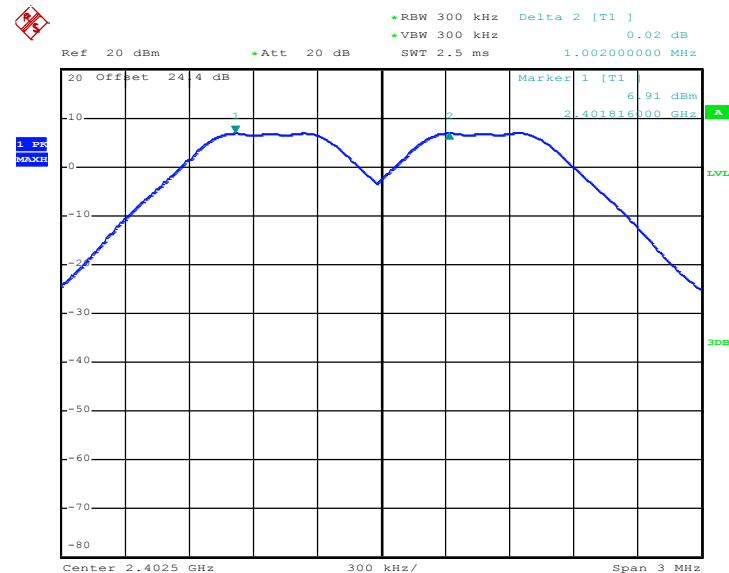Channel Separation Plot on Channel 00 - 01

Date: 1.MAR.2017 19:52:22




Channel Separation Plot on Channel 39 - 40

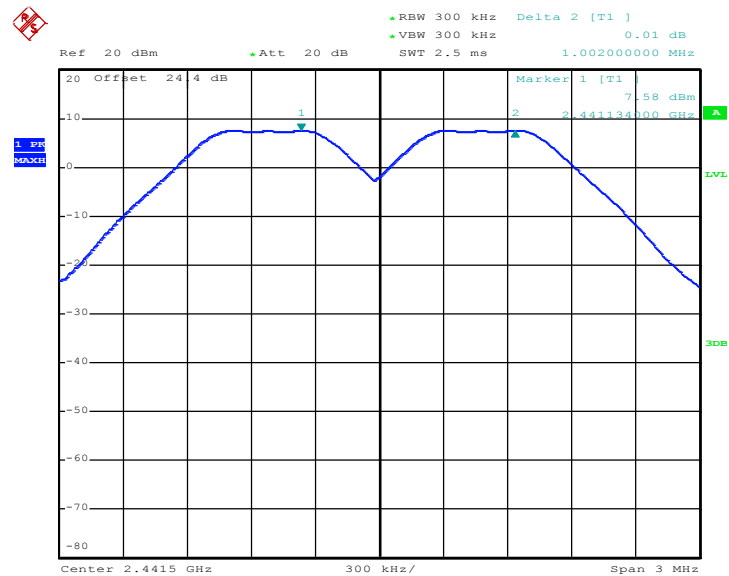

Date: 1.MAR.2017 20:04:10

Channel Separation Plot on Channel 77 - 78

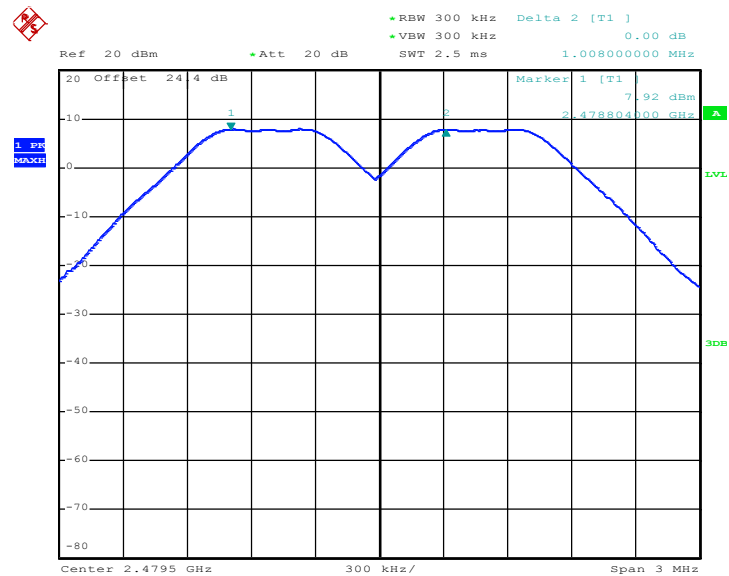


Date: 1.MAR.2017 20:09:13



Test Mode :	2Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8400	Pass
39	2441	1.002	0.8320	Pass
78	2480	1.008	0.8360	Pass

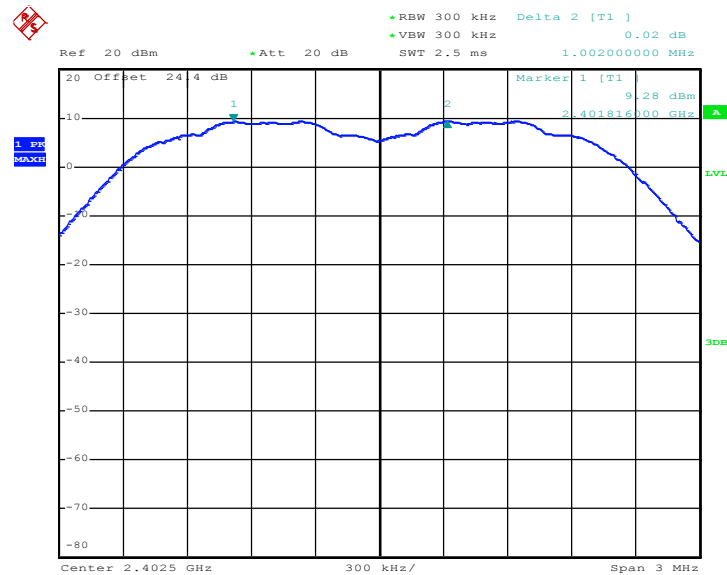Channel Separation Plot on Channel 00 - 01

Date: 1.MAR.2017 20:19:39




Channel Separation Plot on Channel 39 - 40

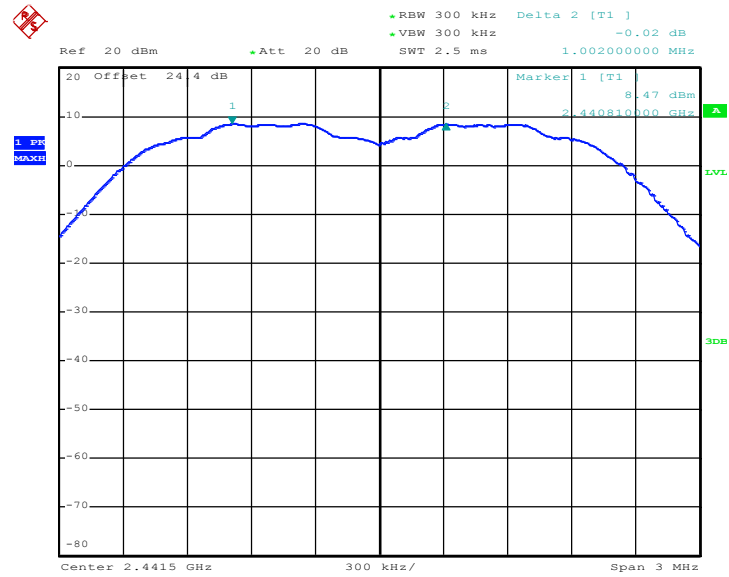

Date: 1.MAR.2017 20:40:43

Channel Separation Plot on Channel 77 - 78

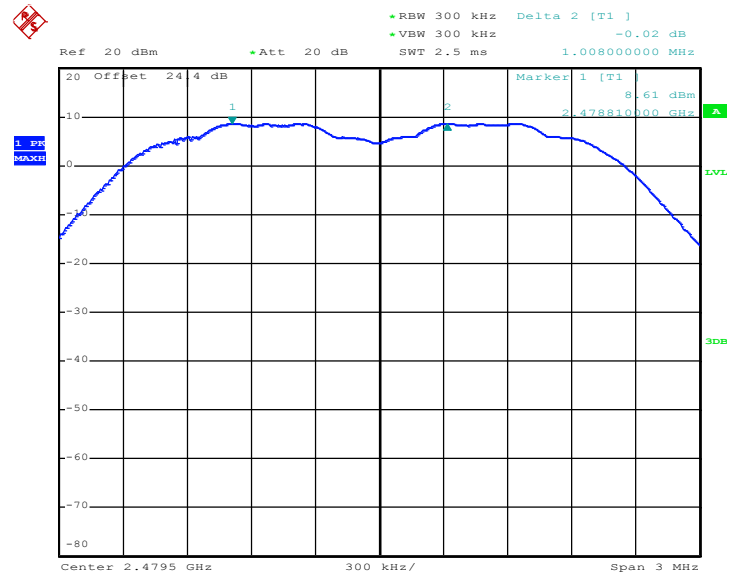


Date: 1.MAR.2017 20:47:56



Test Mode :	3Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8400	Pass
39	2441	1.002	0.8360	Pass
78	2480	1.002	0.8360	Pass

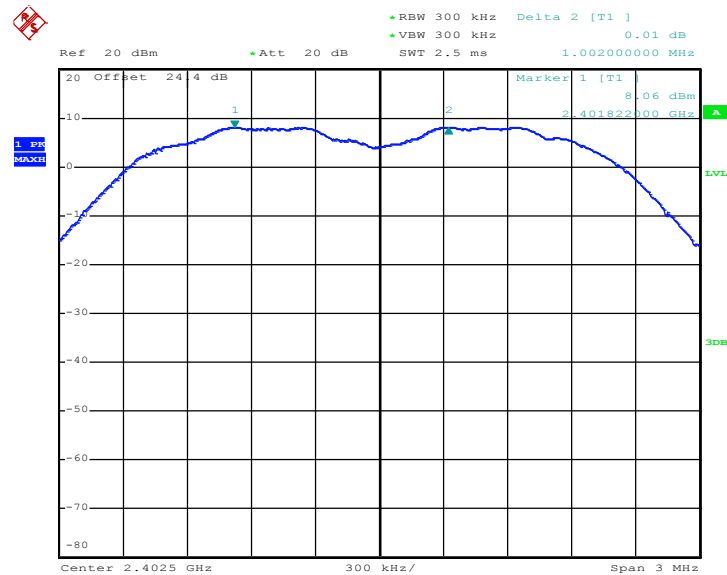Channel Separation Plot on Channel 00 - 01

Date: 1.MAR.2017 20:56:17




Channel Separation Plot on Channel 39 - 40

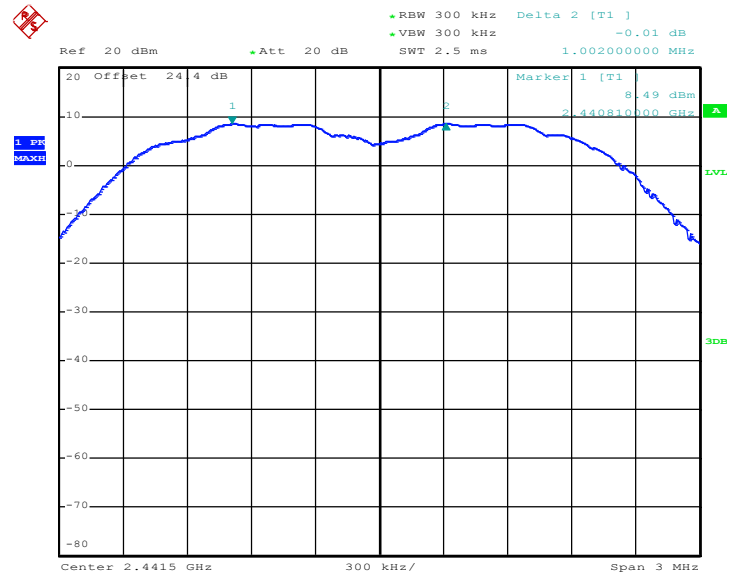

Date: 1.MAR.2017 21:14:32

Channel Separation Plot on Channel 77 - 78

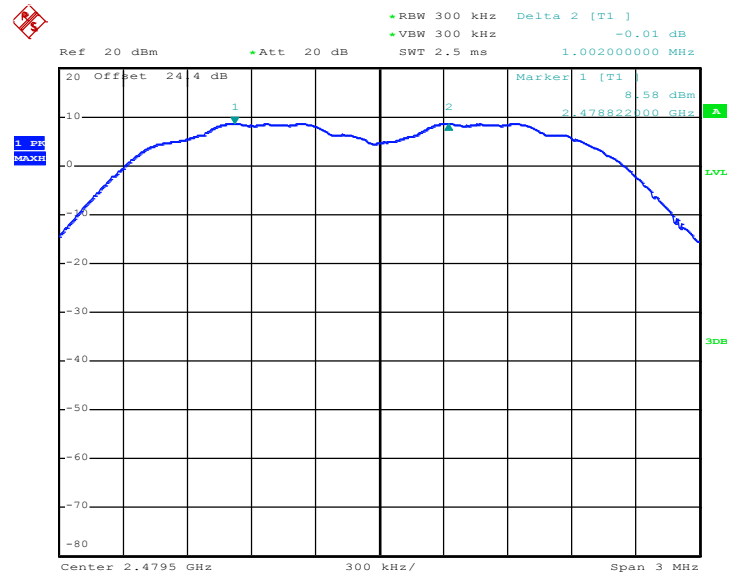

Date: 1.MAR.2017 21:38:25

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.34	2.90	0.15	0.4	Pass

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

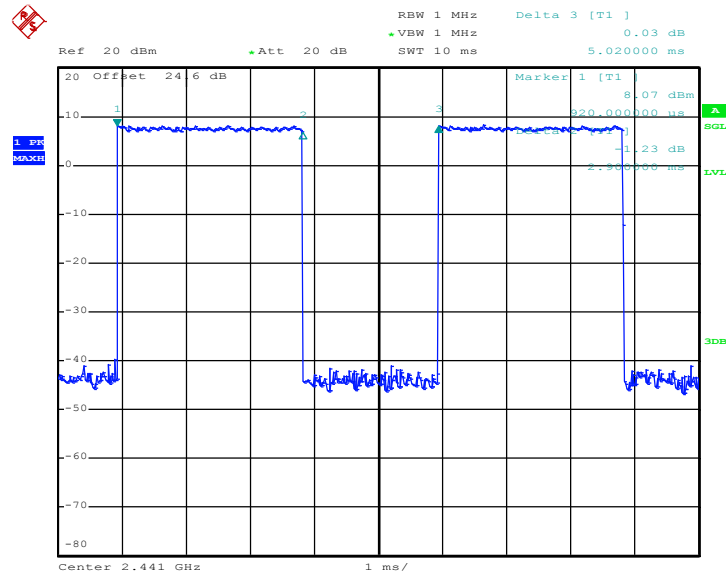

Date: 27.FEB.2017 14:36:34

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1% of the 99% bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.


3.4.4 Test Setup

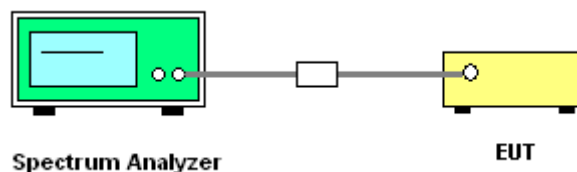

**3.4.5 Test Result of 20dB Bandwidth**


Test Mode :	1Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.880
39	2441	0.924
78	2480	0.928

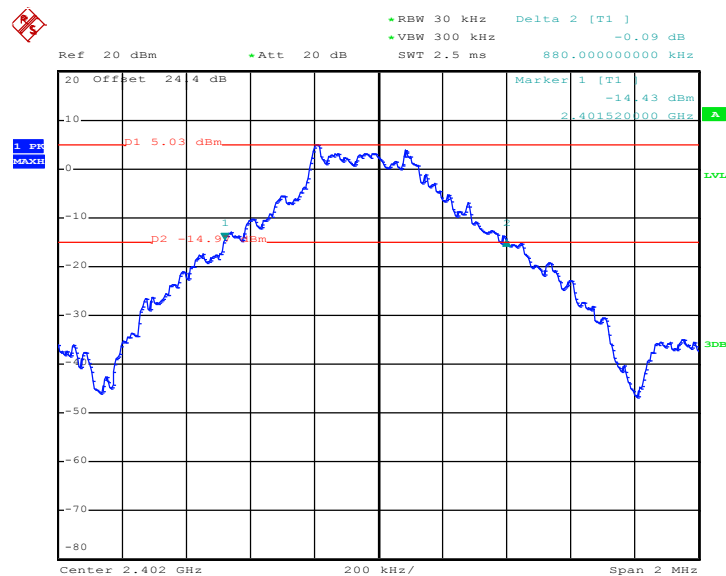20 dB Bandwidth Plot on Channel 00


Date: 1.MAR.2017 19:48:05

20 dB Bandwidth Plot on Channel 39

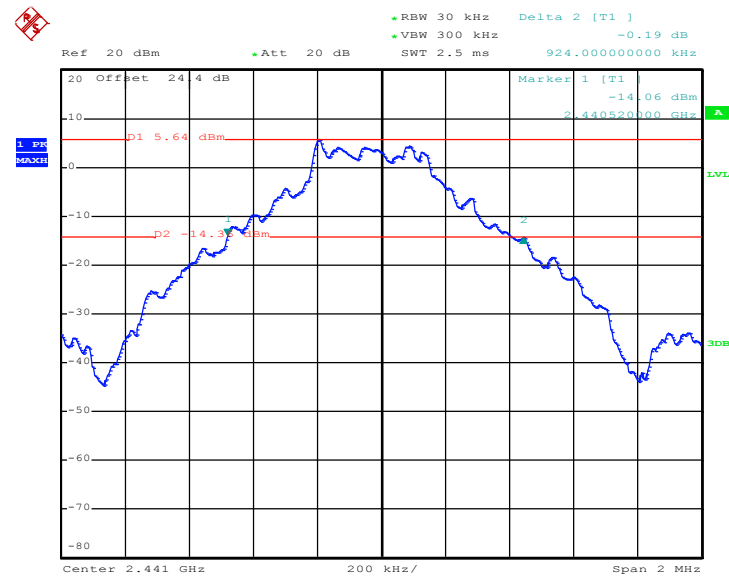

Date: 1.MAR.2017 19:53:35

20 dB Bandwidth Plot on Channel 78

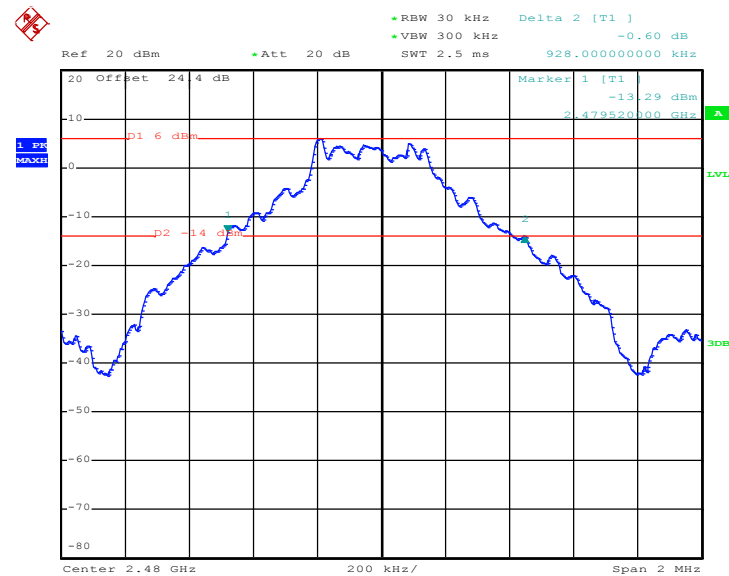


Date: 1.MAR.2017 20:05:31

Test Mode :	2Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.260
39	2441	1.248
78	2480	1.254


20 dB Bandwidth Plot on Channel 00

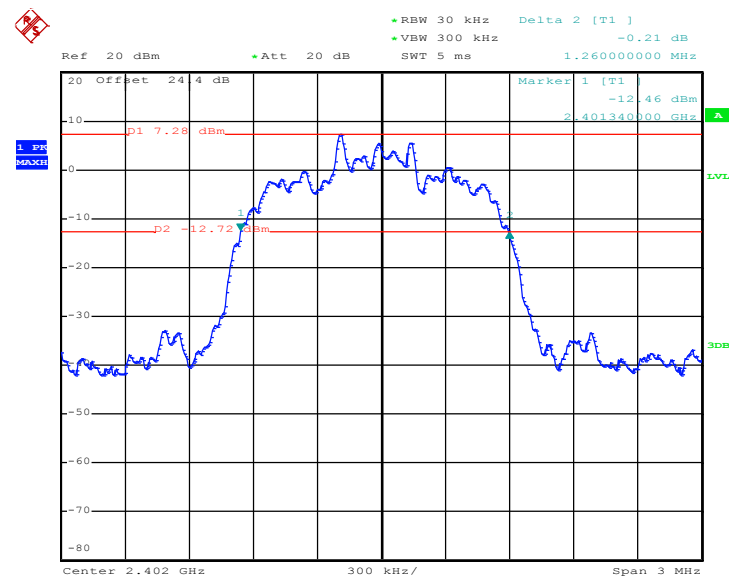

Date: 1.MAR.2017 20:12:19




20 dB Bandwidth Plot on Channel 39

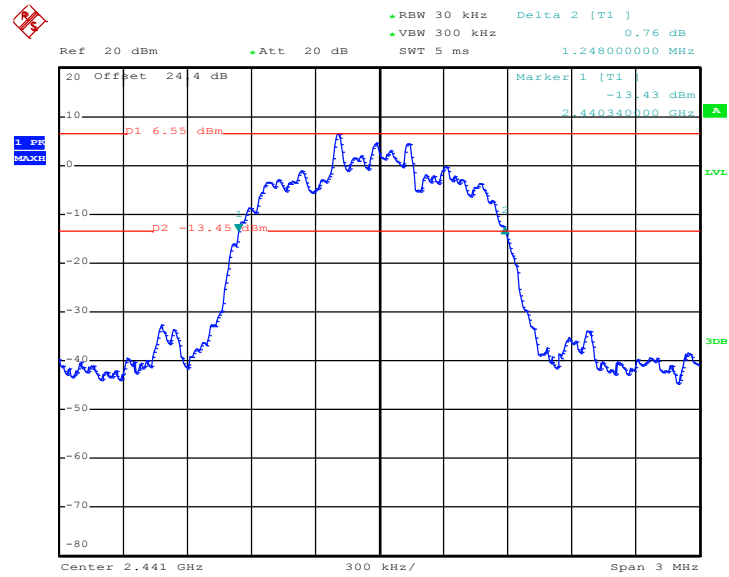

Date: 1.MAR.2017 21:06:02

20 dB Bandwidth Plot on Channel 78

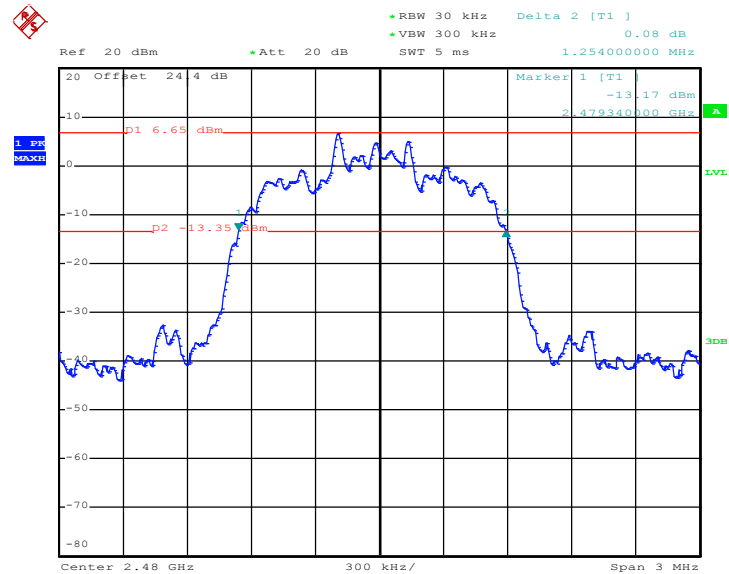


Date: 1.MAR.2017 20:44:10

Test Mode :	3Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.260
39	2441	1.254
78	2480	1.254


20 dB Bandwidth Plot on Channel 00

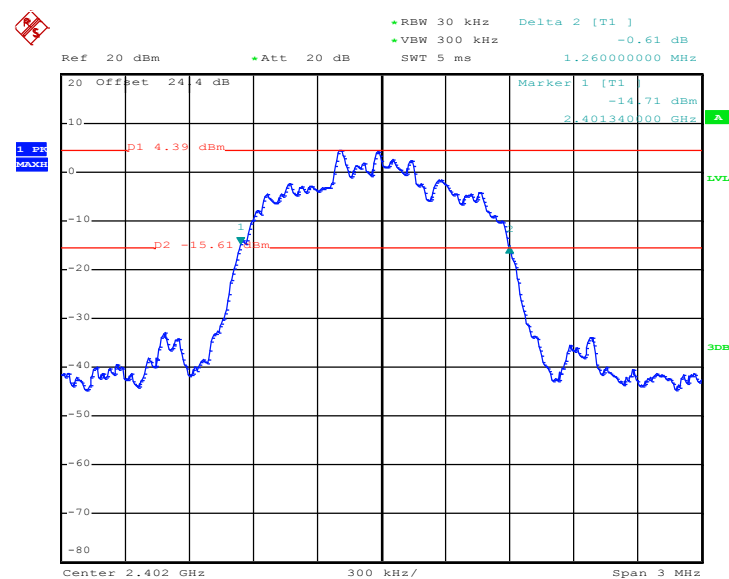

Date: 1.MAR.2017 20:51:00




20 dB Bandwidth Plot on Channel 39

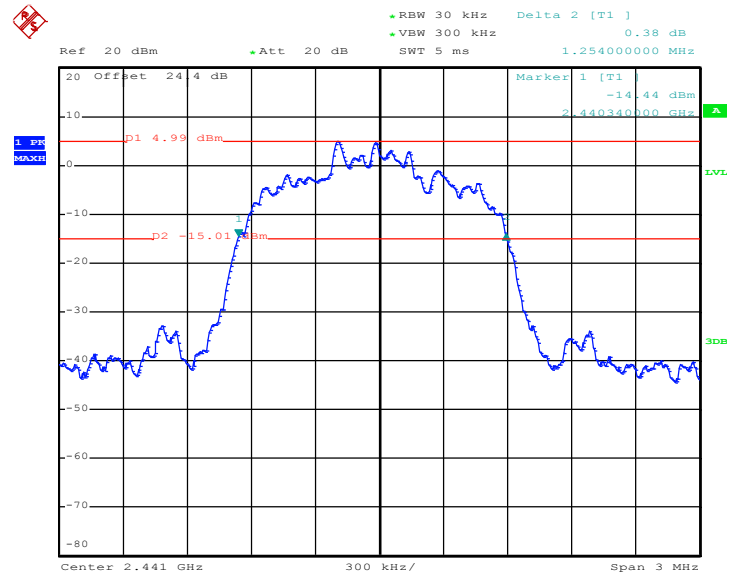

Date: 1.MAR.2017 21:40:22

20 dB Bandwidth Plot on Channel 78

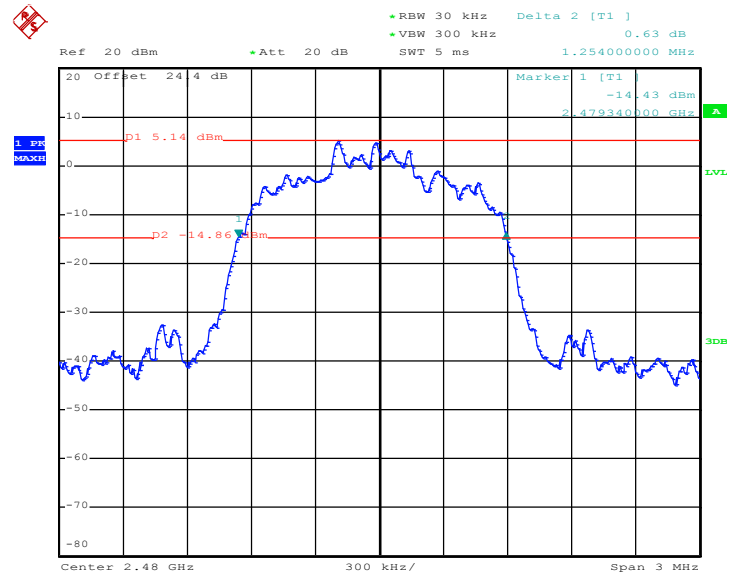


Date: 1.MAR.2017 21:17:19

3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	1Mbps	Temperature :	24~6°C
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.844
39	2441	0.844
78	2480	0.844


99% Occupied Bandwidth Plot on Channel 00

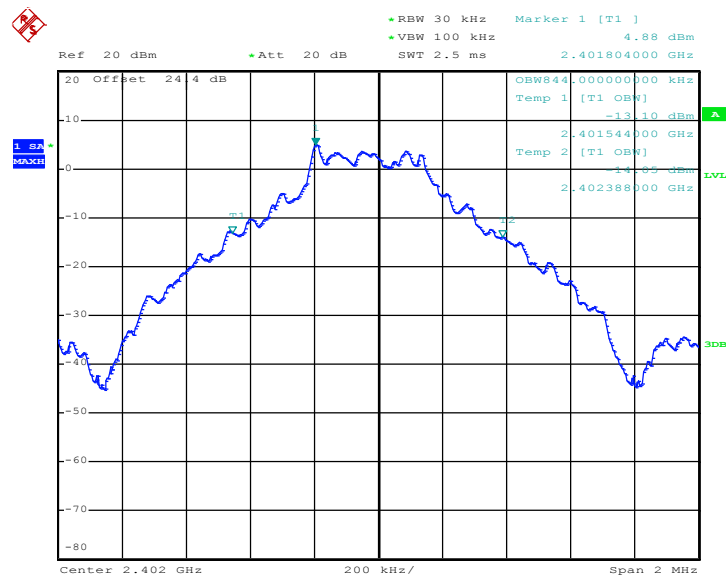

Date: 1.MAR.2017 19:50:01




99% Occupied Bandwidth Plot on Channel 39

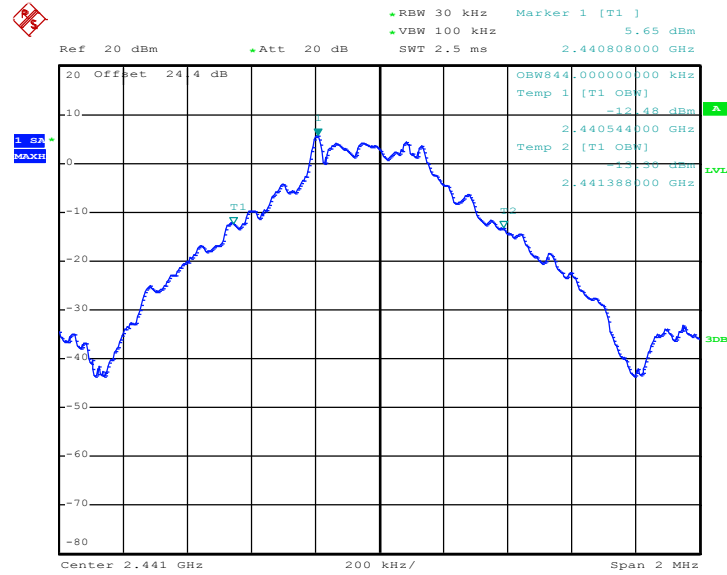

Date: 1.MAR.2017 19:57:58

99% Occupied Bandwidth Plot on Channel 78

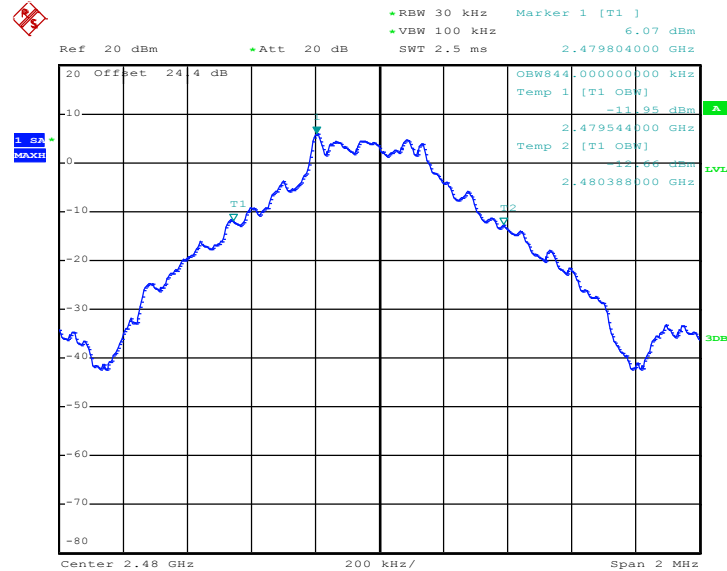


Date: 1.MAR.2017 20:07:05



Test Mode :	2Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.156
39	2441	1.156
78	2480	1.156

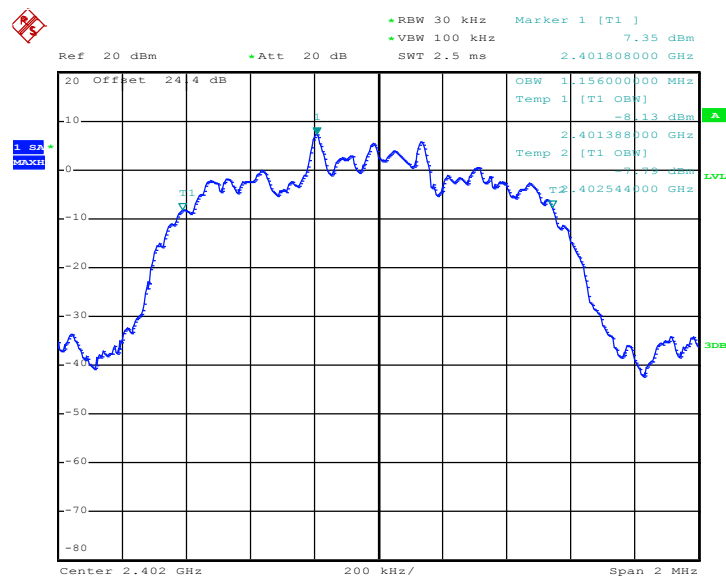99% Occupied Bandwidth Plot on Channel 00

Date: 1.MAR.2017 20:13:48




99% Occupied Bandwidth Plot on Channel 39

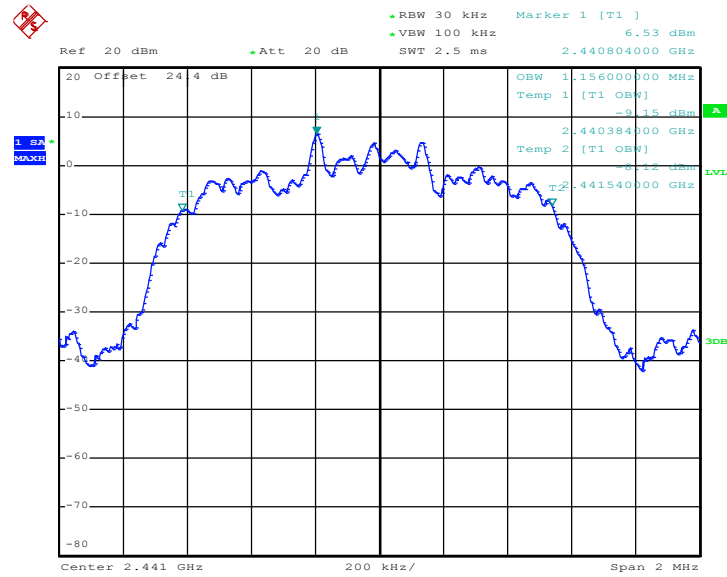

Date: 1.MAR.2017 20:33:05

99% Occupied Bandwidth Plot on Channel 78

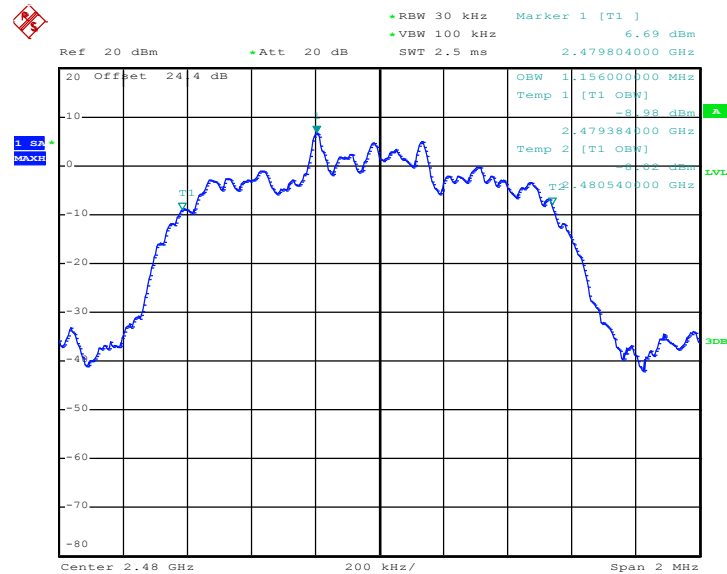


Date: 1.MAR.2017 20:44:57




Test Mode :	3Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.156
39	2441	1.152
78	2480	1.152

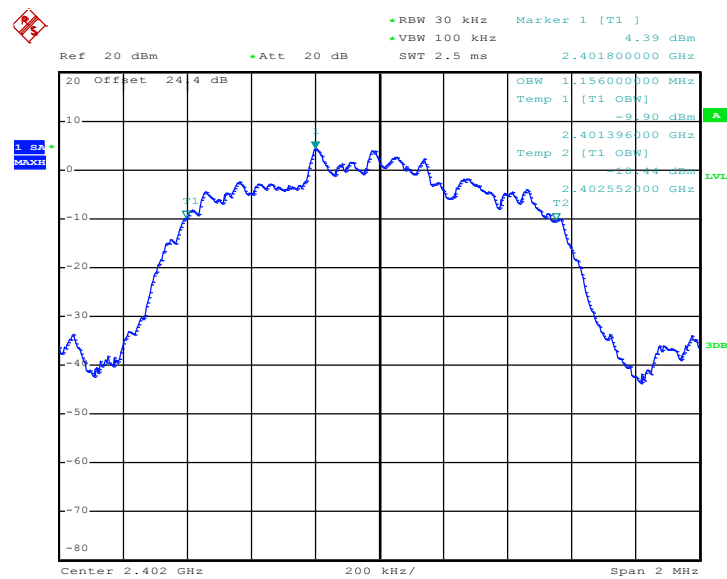99% Occupied Bandwidth Plot on Channel 00

Date: 1.MAR.2017 20:54:17

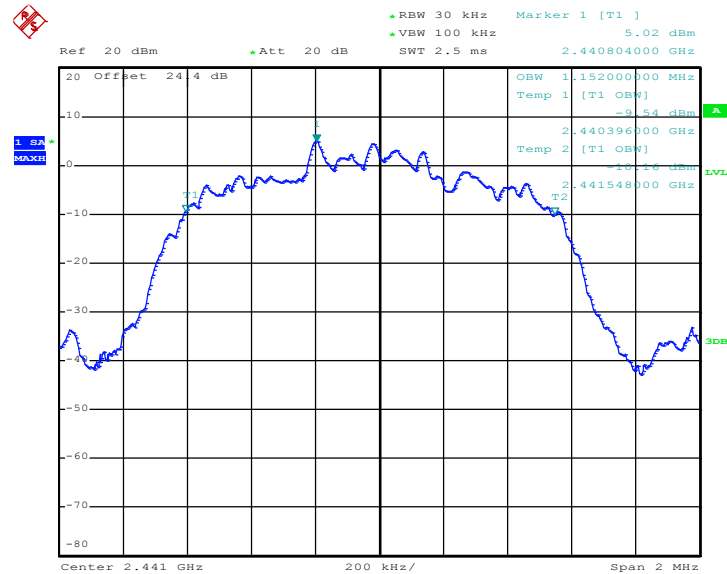99% Occupied Bandwidth Plot on Channel 39


Date: 1.MAR.2017 21:08:06

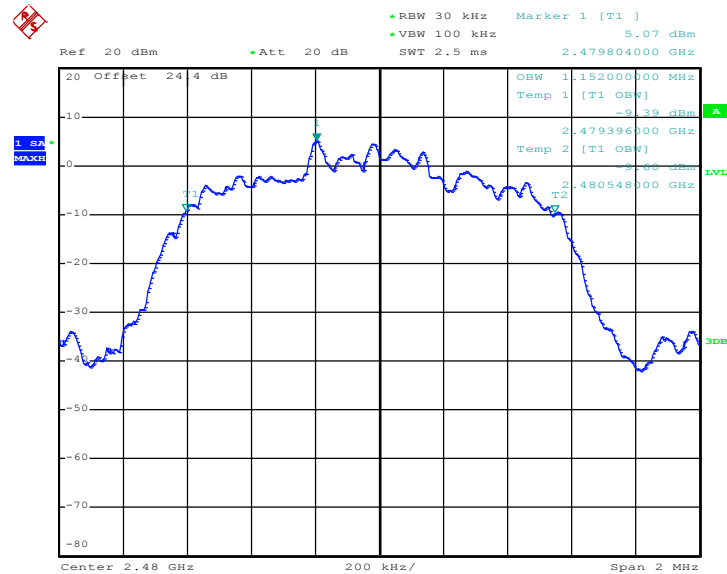99% Occupied Bandwidth Plot on Channel 78


Date: 1.MAR.2017 21:18:48

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

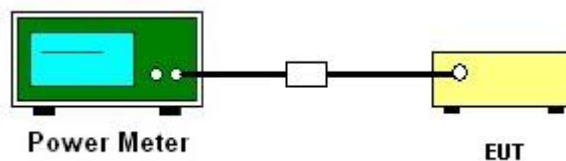

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	7.61	20.97	Pass
39	2441	7.93	20.97	Pass
78	2480	7.86	20.97	Pass

Note: For AFH mode using 20 hopping channels, the maximum output power limit is 20.97dBm.

Test Mode :	2Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	9.63	20.97	Pass
39	2441	9.82	20.97	Pass
78	2480	9.71	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	10.00	20.97	Pass
39	2441	10.28	20.97	Pass
78	2480	10.10	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.


3.6.4 Test Setup

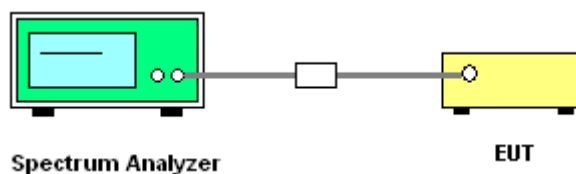

3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~6°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

Low Band Edge Plot on Channel 00

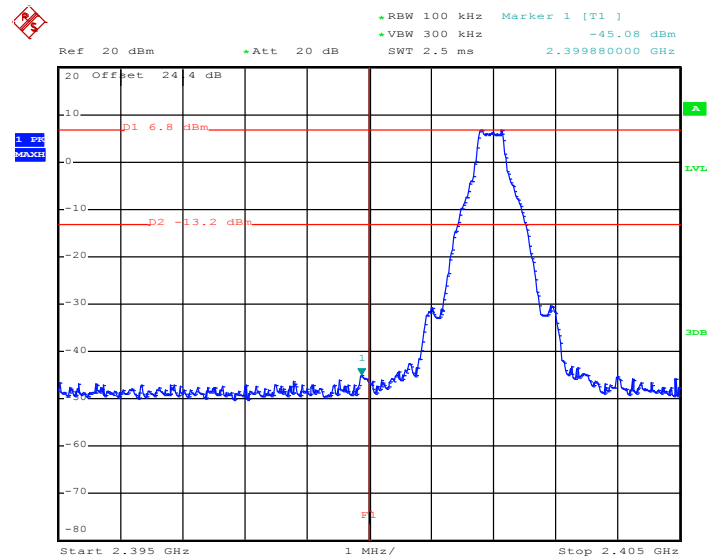

Date: 1.MAR.2017 19:49:22


High Band Edge Plot on Channel 78

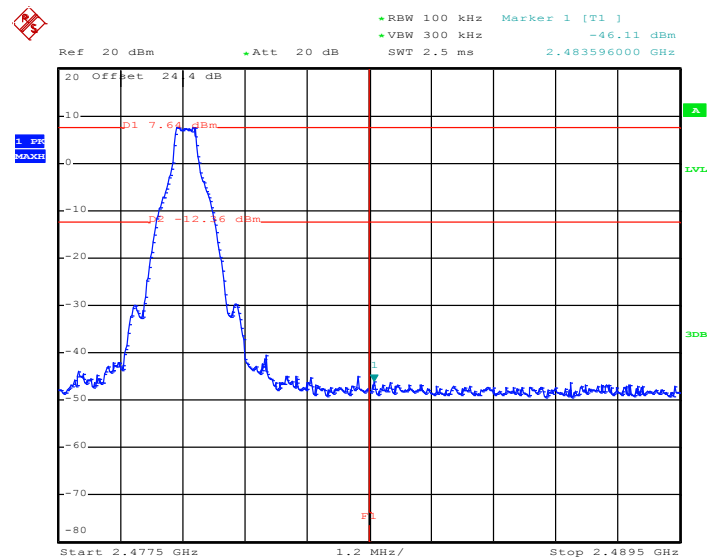


Date: 1.MAR.2017 20:06:25



Test Mode :	2Mbps	Temperature :	24~6°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

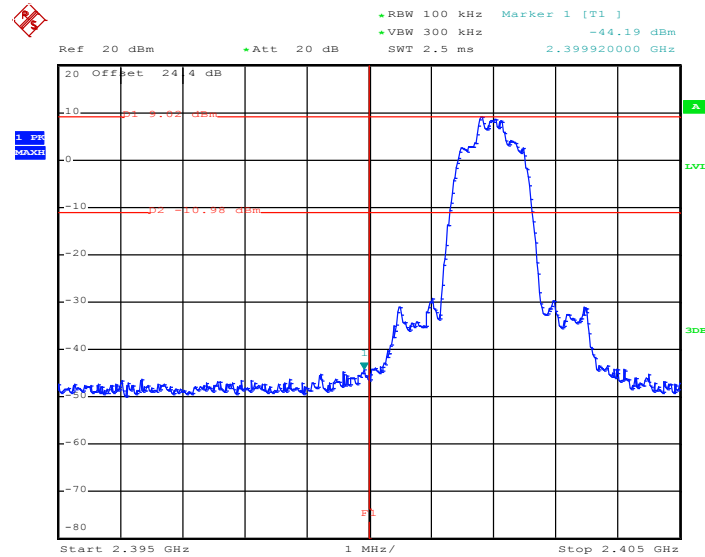Low Band Edge Plot on Channel 00


Date: 1.MAR.2017 20:13:13

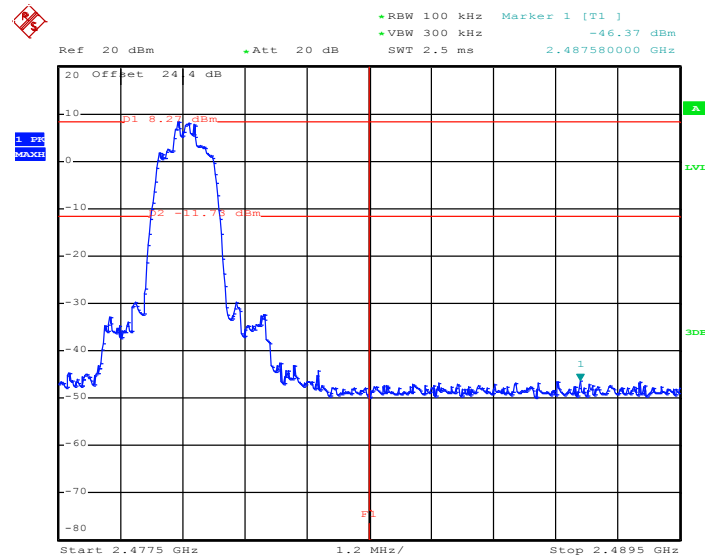High Band Edge Plot on Channel 78


Date: 1.MAR.2017 20:43:02



Test Mode :	3Mbps	Temperature :	24~6°C
Test Channel :	00 and 78	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

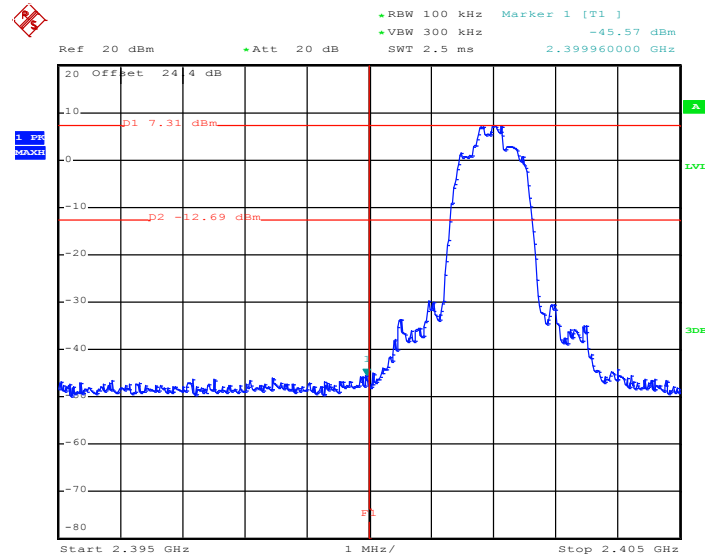Low Band Edge Plot on Channel 00


Date: 1.MAR.2017 20:51:38

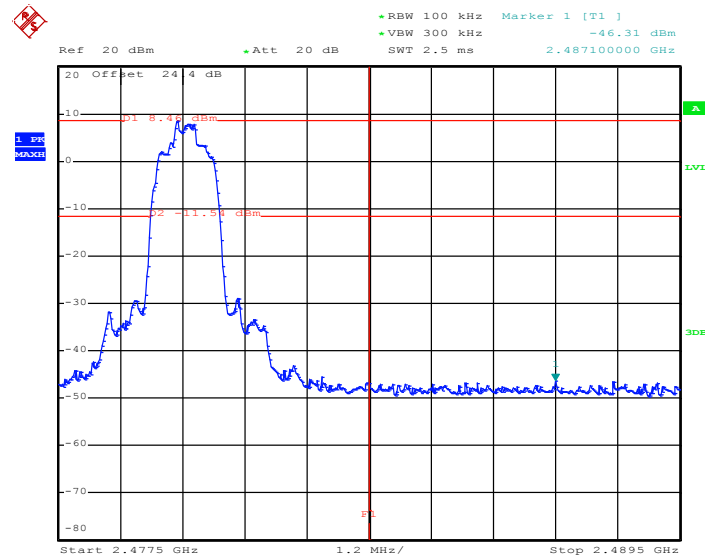High Band Edge Plot on Channel 78


Date: 1.MAR.2017 21:43:15

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	1Mbps	Temperature :	24~6°C
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

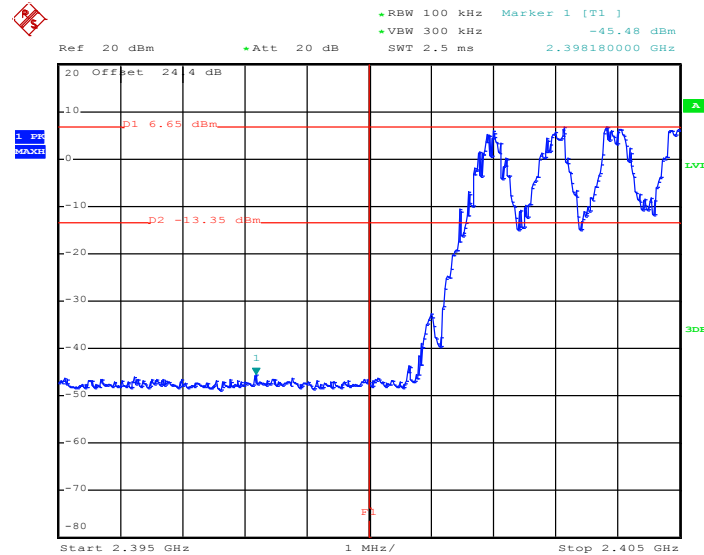1Mbps Hopping Mode Low Band Edge Plot


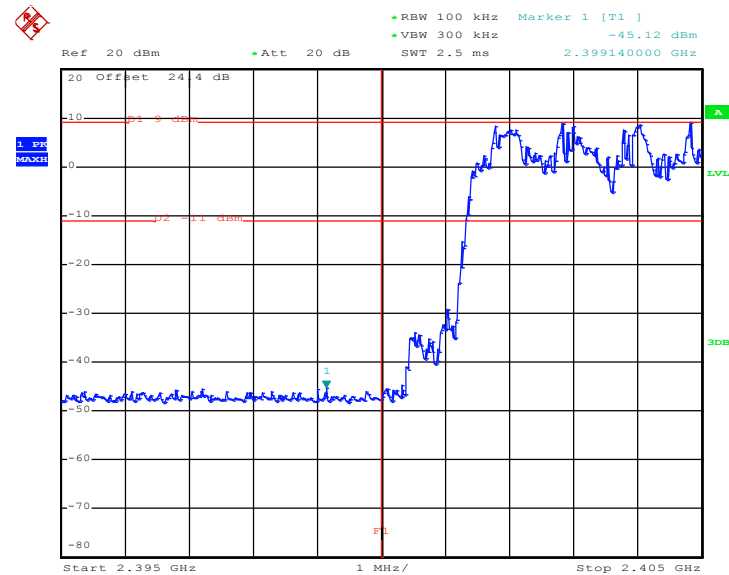
Date: 1.MAR.2017 19:44:00

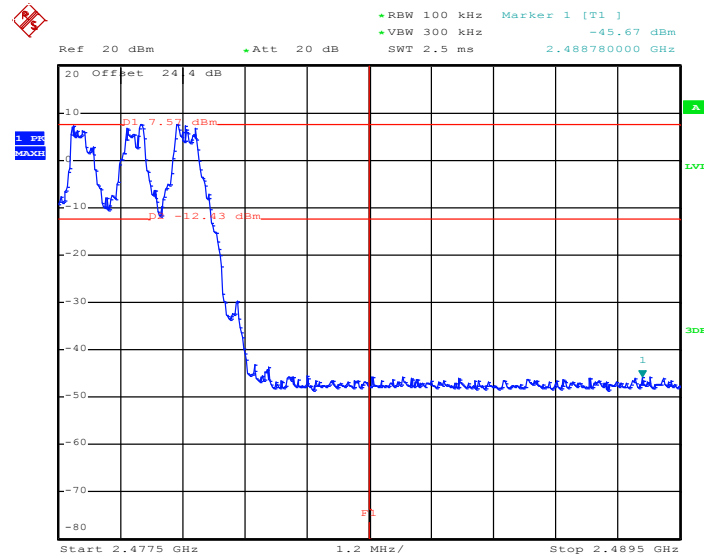1Mbps Hopping Mode High Band Edge Plot


Date: 1.MAR.2017 19:45:16


Test Mode :	2Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

2Mbps Hopping Mode Low Band Edge Plot



Date: 1.MAR.2017 19:39:32


2Mbps Hopping Mode High Band Edge Plot

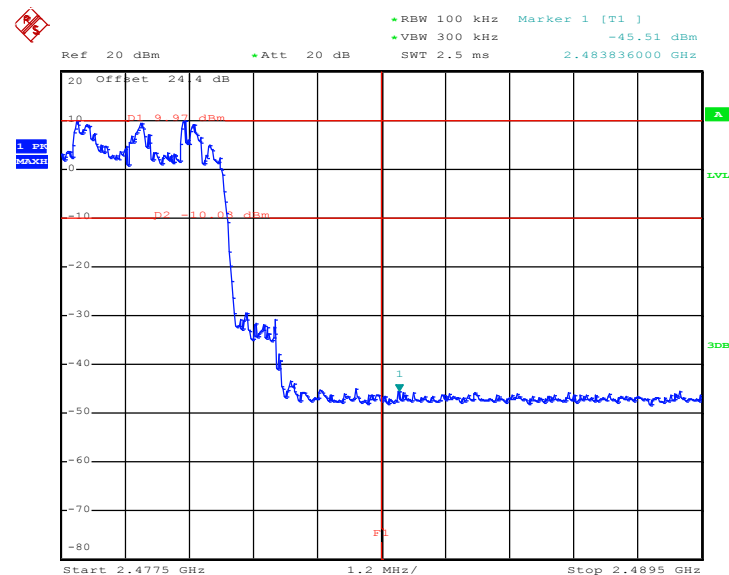

Date: 1.MAR.2017 19:42:08


Test Mode :	3Mbps	Temperature :	24~6℃
Test Engineer :	Kai Liao	Relative Humidity :	48~51%

3Mbps Hopping Mode Low Band Edge Plot

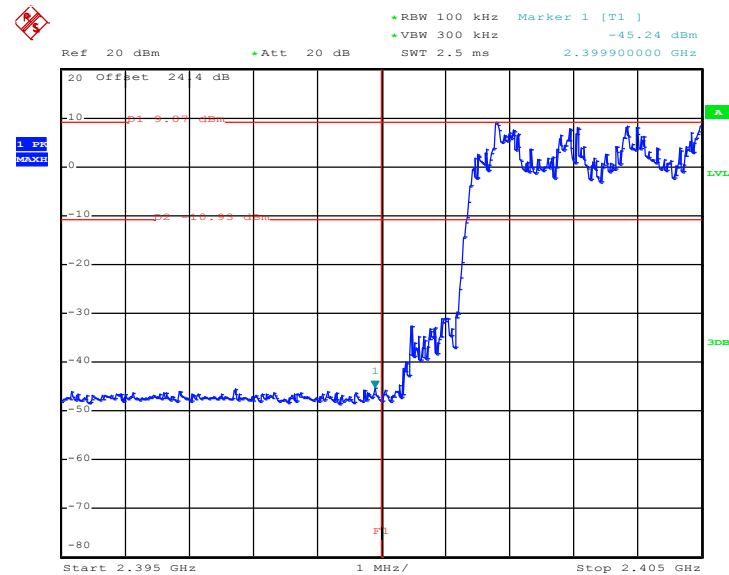

Date: 1.MAR.2017 19:35:37

3Mbps Hopping Mode High Band Edge Plot

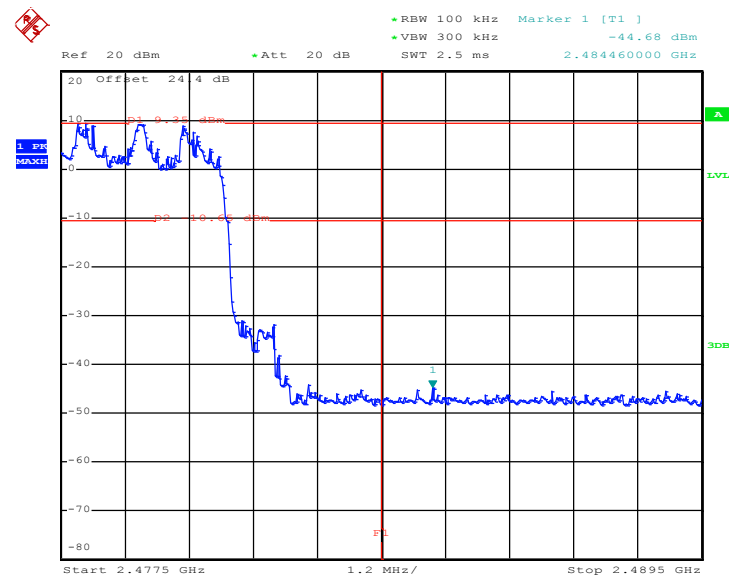

Date: 1.MAR.2017 19:37:19

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

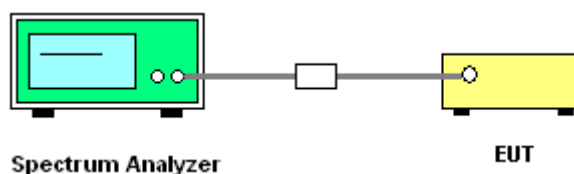

3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~6°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

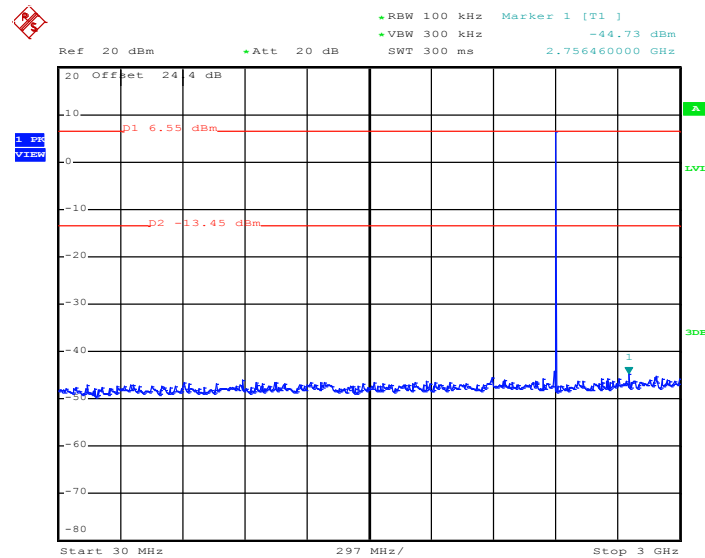

Date: 1.MAR.2017 19:50:45


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

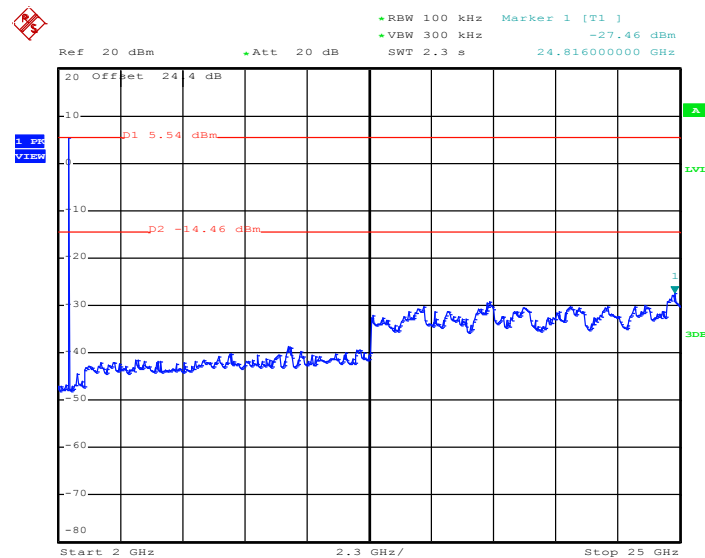


Date: 1.MAR.2017 19:51:07



Test Mode :	1Mbps	Temperature :	24~6°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

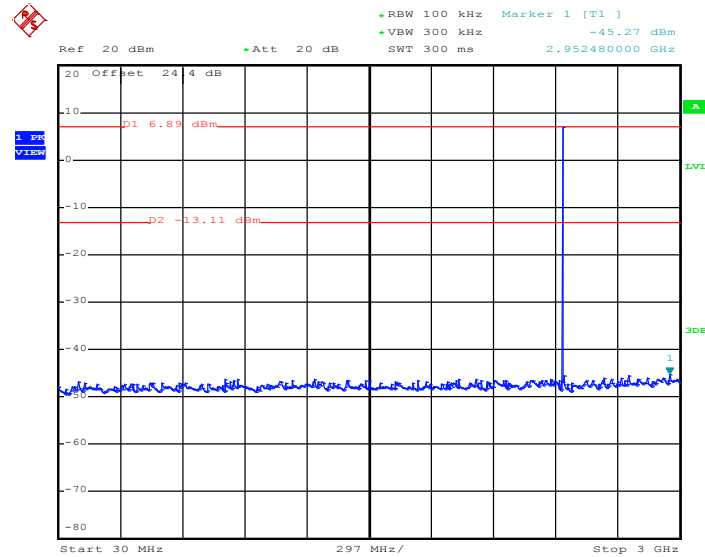1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 1.MAR.2017 20:00:02

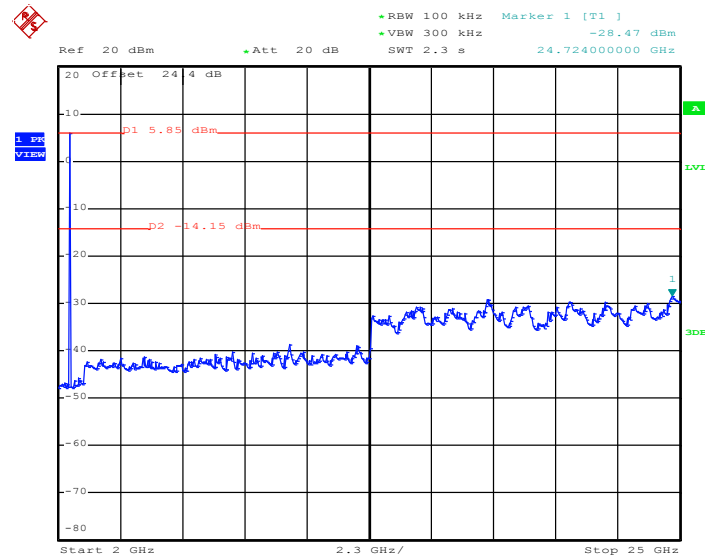1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 1.MAR.2017 20:02:30



Test Mode :	1Mbps	Temperature :	24~6°C
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

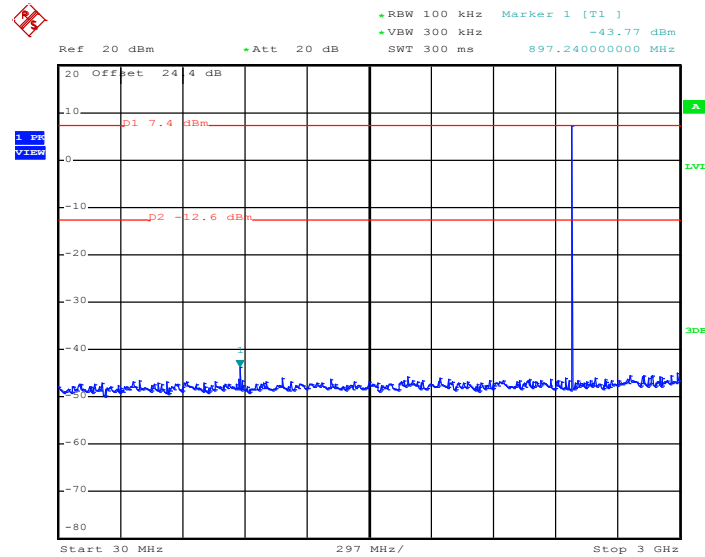1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz


Date: 1.MAR.2017 20:07:41

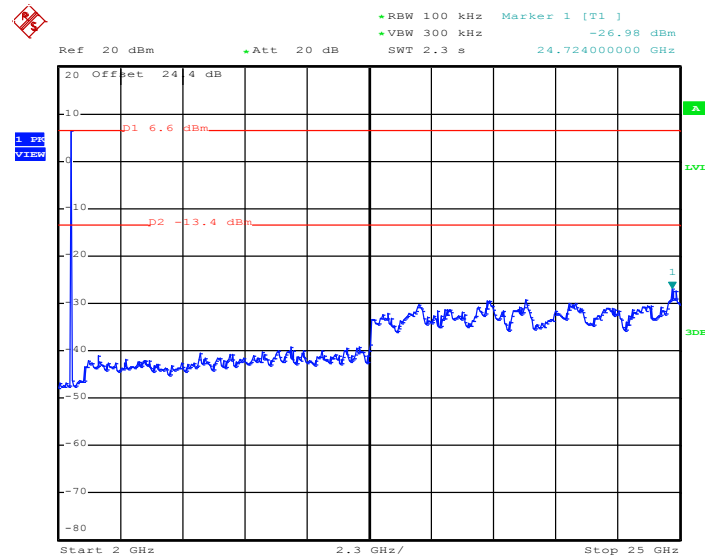1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 1.MAR.2017 20:08:02


Test Mode :	2Mbps	Temperature :	24~6℃
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

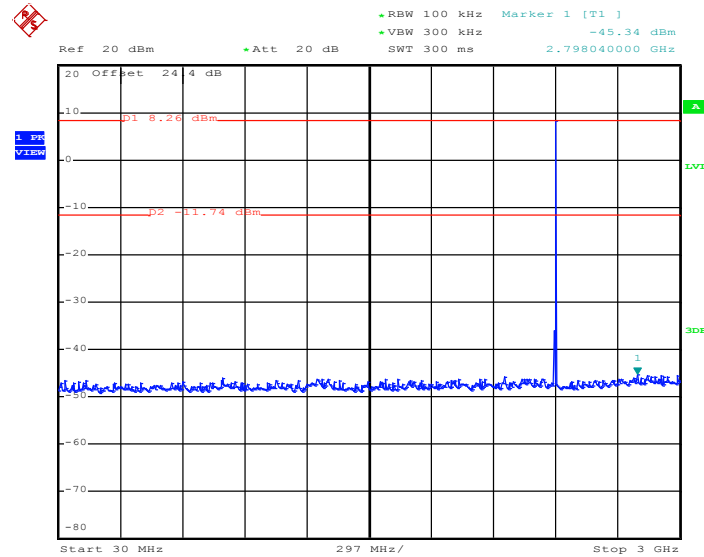

Date: 1.MAR.2017 20:14:14


2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

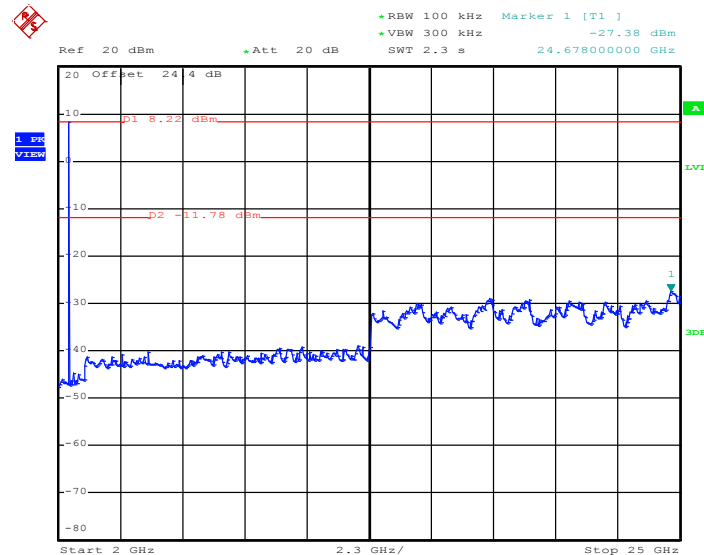

Date: 1.MAR.2017 20:16:33


Test Mode :	2Mbps	Temperature :	24~6℃
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

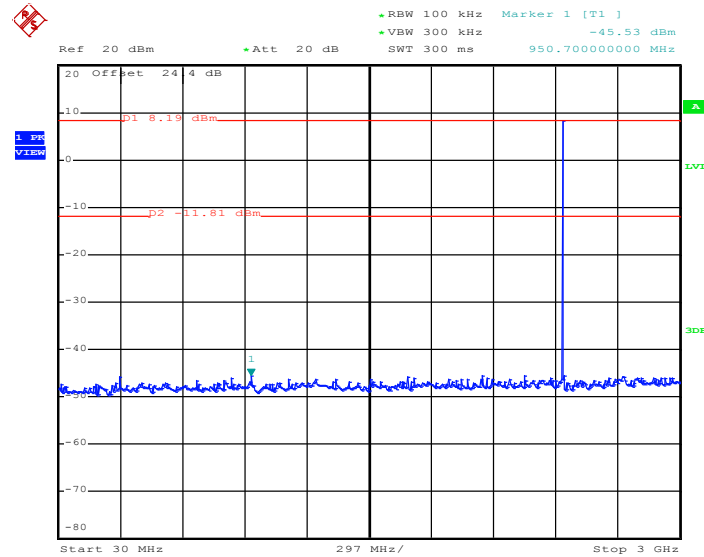

Date: 1.MAR.2017 20:56:54


2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

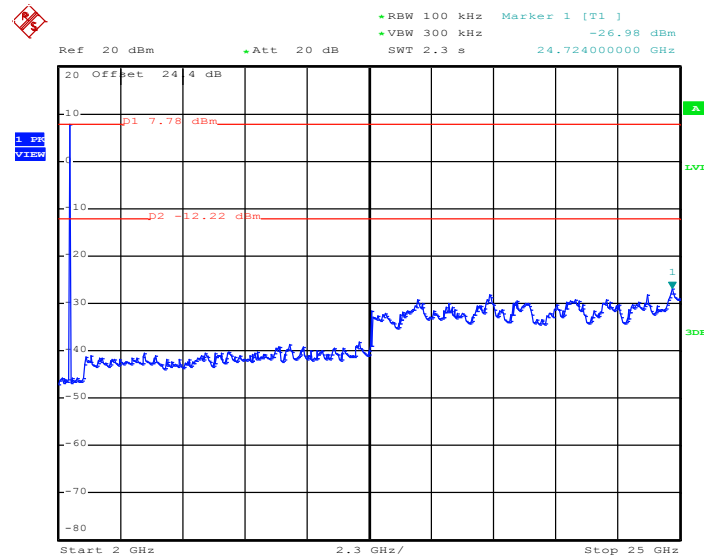

Date: 1.MAR.2017 21:02:02


Test Mode :	2Mbps	Temperature :	24~6℃
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

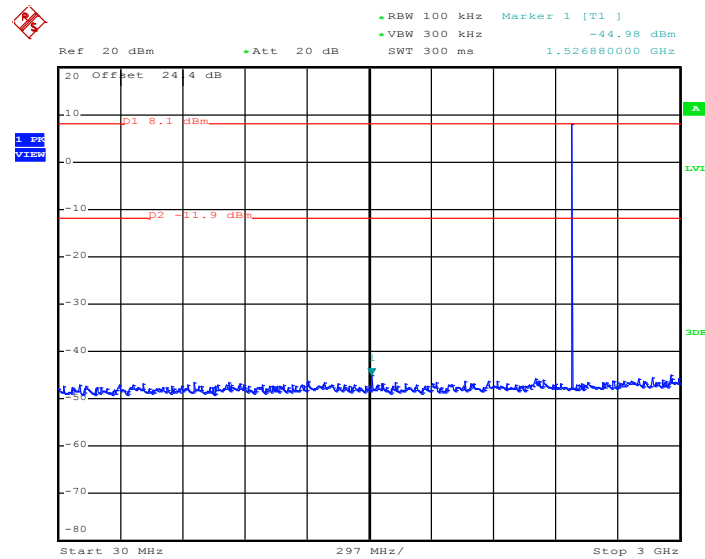

Date: 1.MAR.2017 20:45:40


2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

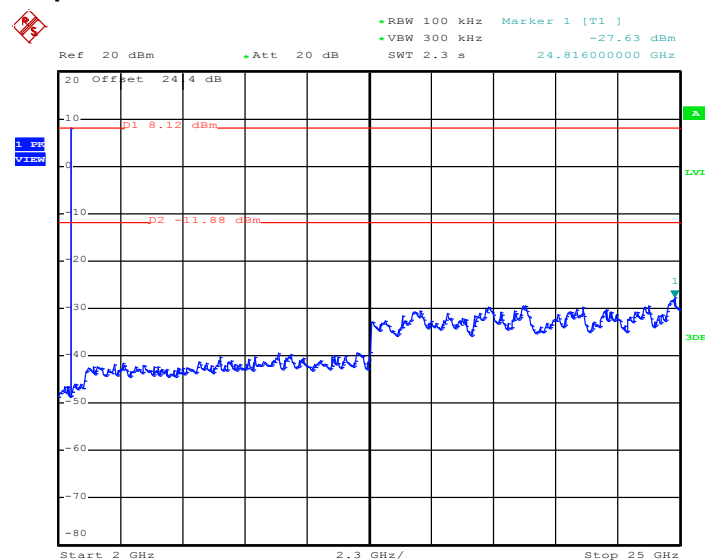


Date: 1.MAR.2017 20:46:02



Test Mode :	3Mbps	Temperature :	24~6°C
Test Channel :	00	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

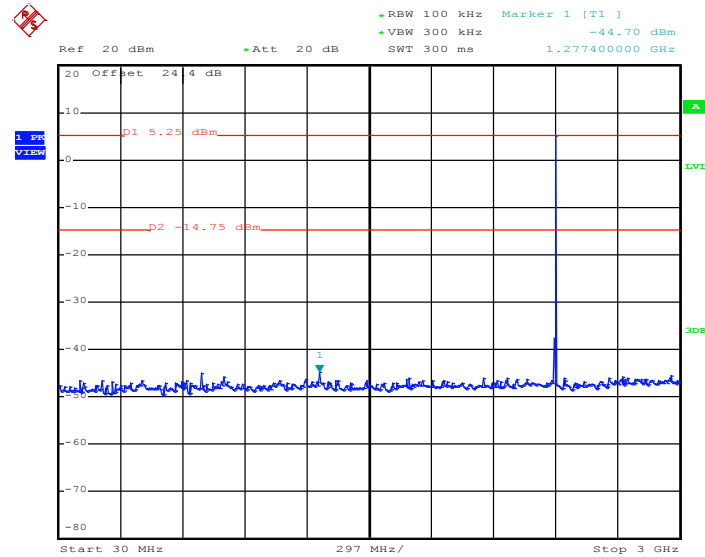3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz


Date: 1.MAR.2017 20:54:56

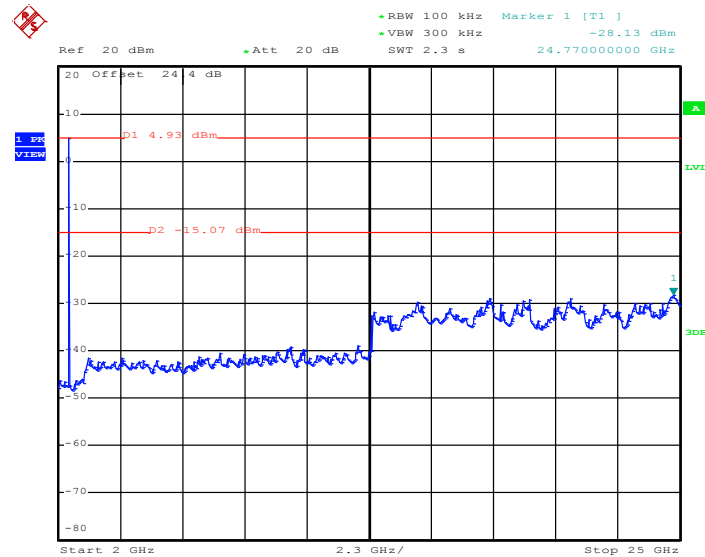3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 1.MAR.2017 20:55:18



Test Mode :	3Mbps	Temperature :	24~6°C
Test Channel :	39	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

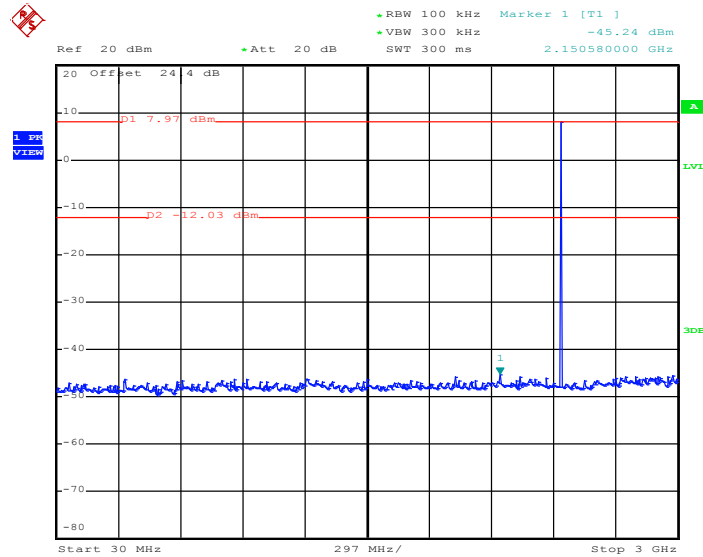3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 1.MAR.2017 21:11:48

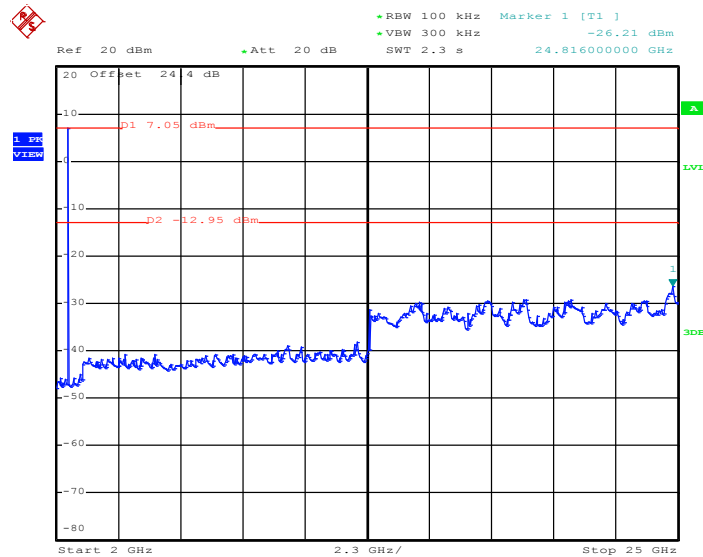3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

Date: 1.MAR.2017 21:13:32


Test Mode :	3Mbps	Temperature :	24~6℃
Test Channel :	78	Relative Humidity :	48~51%
		Test Engineer :	Kai Liao

3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

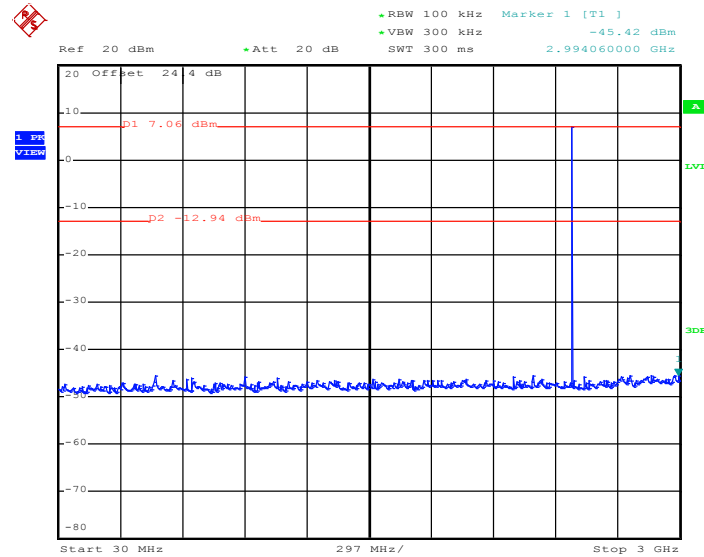

Date: 1.MAR.2017 21:19:16

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

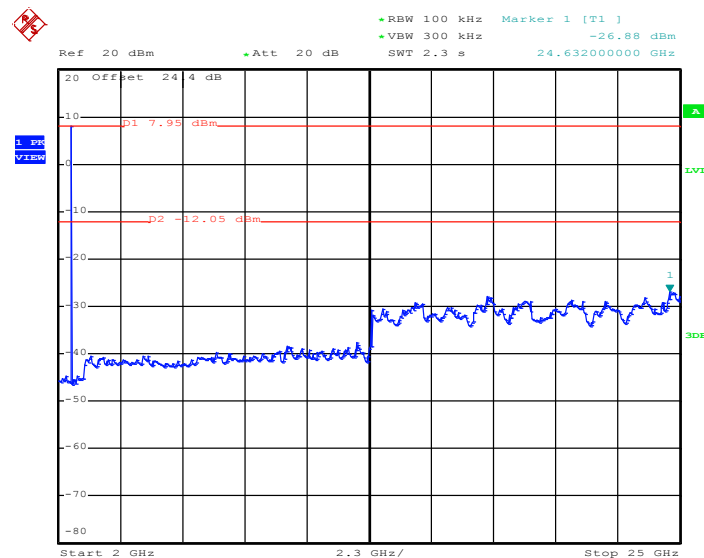

Date: 1.MAR.2017 21:36:44

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1 \text{ GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

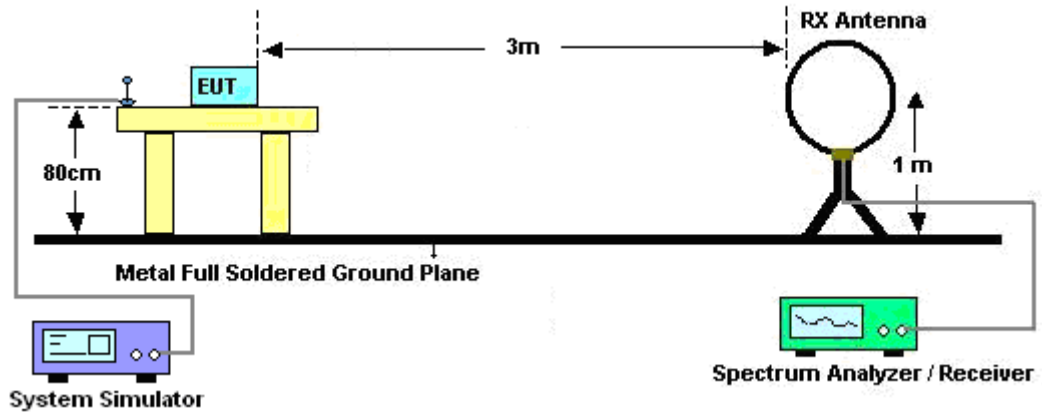

For radiated emissions from 30MHz to 1GHz

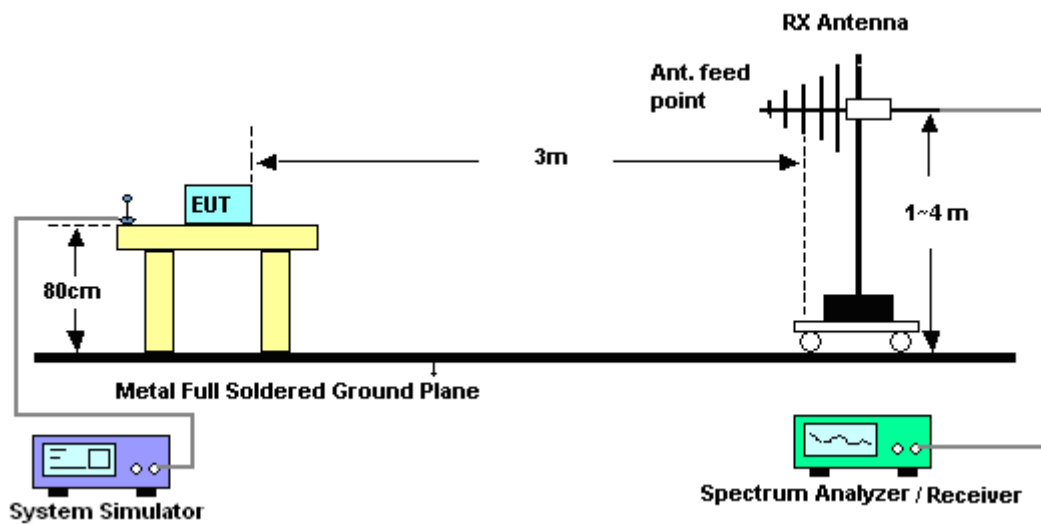

For radiated emissions above 1GHz

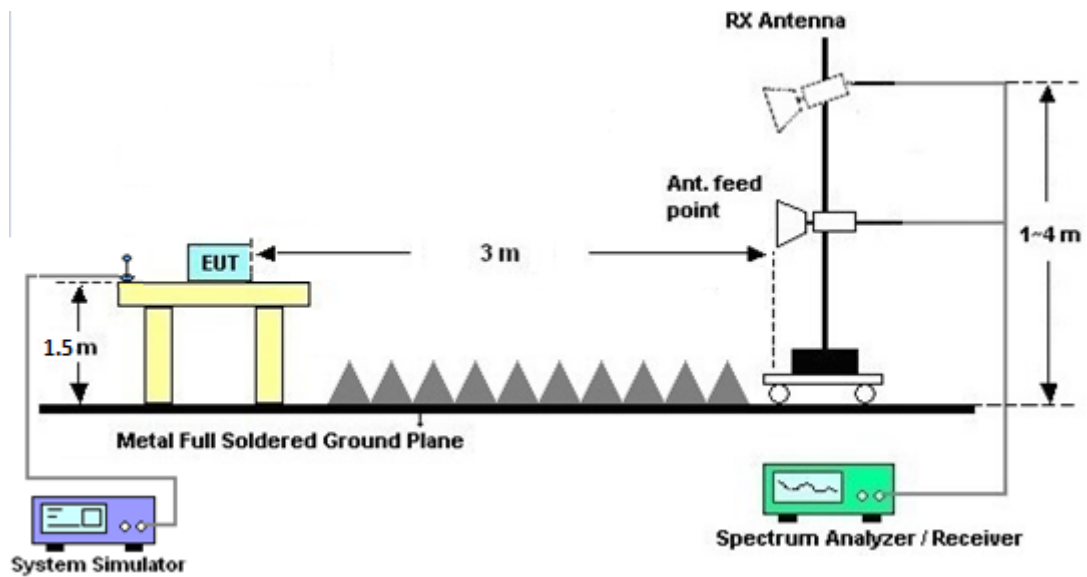


3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.8.6 Duty cycle correction factor for average measurement

3DH5 on time (One Pulse) Plot on Channel 39

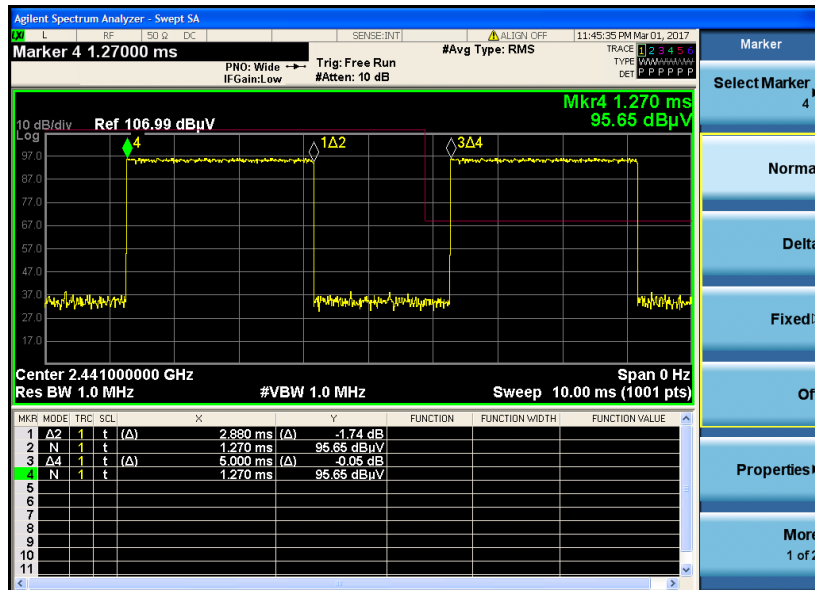

3DH5 on time (Count Pulses) Plot on Channel 39

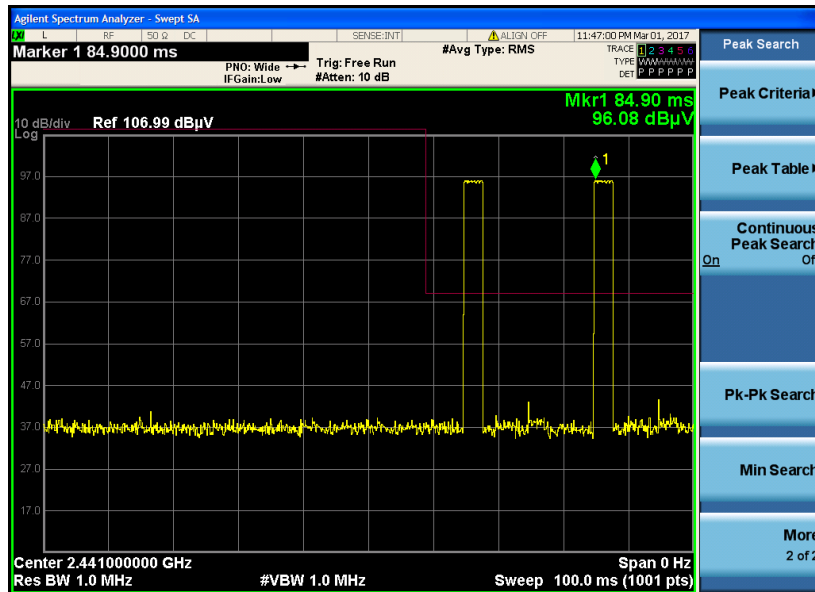

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -22.79 \text{ dB}$$

3.8.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.9 Antenna Requirements

3.9.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.9.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.9.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Dec. 26, 2016	Feb. 27, 2017 ~ Mar. 01 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Dec. 26, 2016	Feb. 27, 2017 ~ Mar. 01 2017	Dec. 25, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jul. 17, 2016	Feb. 27, 2017 ~ Mar. 01 2017	Jul. 16, 2017	Conducted (TH05-HY)
DC Power Supply	Agilent	E3610A	MY40010395	N/A	Jul. 31, 2016	Feb. 27, 2017 ~ Mar. 01 2017	Jul. 30, 2017	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Jan. 07, 2017	Mar. 01, 2017 ~ Mar. 02, 2017	Jan. 06, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Aug. 18, 2017	Radiation (03CH07-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20Hz ~ 8.4GHz	Oct. 26, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Oct. 25, 2017	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Mar. 01, 2017 ~ Mar. 02, 2017	Sep. 01, 2017	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 15, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Apr. 14, 2017	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 18, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Mar. 17, 2017	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 12, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Oct. 11, 2017	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 21, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Mar. 20, 2017	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Mar. 01, 2017 ~ Mar. 02, 2017	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Mar. 01, 2017 ~ Mar. 02, 2017	N/A	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Jun. 13, 2017	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Mar. 01, 2017 ~ Mar. 02, 2017	Nov. 07, 2017	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5
--	-----



Appendix A. Radiated Spurious Emission

Test Engineer :	Jesse Wang and James Chiu	Temperature :	21~22°C
		Relative Humidity :	44~48%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2388.855	46.02	-27.98	74	41.49	32.19	7.31	34.97	324	112	P	H
		2388.855	21.23	-32.77	54	-	-	-	-	-	-	A	H
	*	2402	102.45	-	-	97.93	32.19	7.31	34.98	324	112	P	H
	*	2402	77.66	-	-	-	-	-	-	-	-	A	H
		2389.59	43.83	-30.17	74	39.3	32.19	7.31	34.97	359	38	P	V
		2389.59	19.04	-34.96	54	-	-	-	-	-	-	A	V
	*	2402	98.95	-	-	94.43	32.19	7.31	34.98	359	38	P	V
	*	2402	74.16	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2349.2	44.03	-29.97	74	39.73	32.03	7.24	34.97	345	322	P	H
		2349.2	19.24	-34.76	54	-	-	-	-	-	-	A	H
	*	2441	104.18	-	-	99.47	32.34	7.36	34.99	345	322	P	H
	*	2441	79.39	-	-	-	-	-	-	-	-	A	H
		2485.86	44.15	-29.85	74	39.3	32.45	7.4	35	345	322	P	H
		2485.86	19.36	-34.64	54	-	-	-	-	-	-	A	H
		2373.28	43.54	-30.46	74	39.13	32.14	7.24	34.97	274	281	P	V
		2373.28	18.75	-35.25	54	-	-	-	-	-	-	A	V
	*	2441	100.6	-	-	95.89	32.34	7.36	34.99	274	281	P	V
	*	2441	75.81	-	-	-	-	-	-	-	-	A	V
		2494.75	43.97	-30.03	74	39.08	32.5	7.4	35.01	274	281	P	V
		2494.75	19.18	-34.82	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	104.98	-	-	100.13	32.45	7.4	35	334	358	P	H
	*	2480	80.19	-	-	-	-	-	-	-	-	A	H
		2484.76	52.73	-21.27	74	47.88	32.45	7.4	35	334	358	P	H
		2484.76	27.94	-26.06	54	-	-	-	-	-	-	A	H
	*	2480	99.08	-	-	94.23	32.45	7.4	35	300	44	P	V
	*	2480	74.29	-	-	-	-	-	-	-	-	A	V
		2486.08	47.94	-26.06	74	43.09	32.45	7.4	35	300	44	P	V
		2486.08	23.15	-30.85	54	-	-	-	-	-	-	A	V
Remark	<ol style="list-style-type: none">1. No other spurious found.2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4806	39.21	-34.79	74	52.78	33.68	11.83	59.08	100	0	P	H
		4806	14.42	-39.58	54	-	-	-	-	-	-	A	H
		4806	41.58	-32.42	74	55.15	33.68	11.83	59.08	100	0	P	V
		4806	16.79	-37.21	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	37.7	-36.3	74	51.57	33.54	11.53	58.94	100	0	P	H
		4882	12.91	-41.09	54	-	-	-	-	-	-	A	H
		7323	37.7	-36.3	74	47.2	34.65	13.81	57.96	100	0	P	H
		7323	12.91	-41.09	54	-	-	-	-	-	-	A	H
		4882	39.63	-34.37	74	53.5	33.54	11.53	58.94	100	0	P	V
		4882	14.84	-39.16	54	-	-	-	-	-	-	A	V
		7323	37.64	-36.36	74	47.14	34.65	13.81	57.96	100	0	P	V
		7323	12.85	-41.15	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4962	39.87	-34.13	74	54.05	33.37	11.22	58.77	100	0	P	H
		4962	15.08	-38.92	54	-	-	-	-	-	-	A	H
		7440	37.13	-36.87	74	46.88	34.33	14.05	58.13	100	0	P	H
		7440	12.34	-41.66	54	-	-	-	-	-	-	A	H
		4962	40.28	-33.72	74	54.46	33.37	11.22	58.77	100	0	P	V
		4962	15.49	-38.51	54	-	-	-	-	-	-	A	V
		7440	37.03	-36.97	74	46.78	34.33	14.05	58.13	100	0	P	V
		7440	12.24	-41.76	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Emission below 1GHz****2.4GHz BT (LF)**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		30.27	27.13	-12.87	40	31.41	26	1.07	31.35	100	0	P	H
		81.84	17.85	-22.15	40	34.1	14.02	1.28	31.55			P	H
		261.93	20.66	-25.34	46	29.81	19.88	2.32	31.35			P	H
		514.9	25.76	-20.24	46	29.29	24.32	3.14	30.99			P	H
		722.1	28.67	-17.33	46	28.86	26.76	3.74	30.69			P	H
		951.7	32.45	-13.55	46	28.71	30.2	4.07	30.53			P	H
		30.27	26.23	-13.77	40	30.51	26	1.07	31.35			P	V
		86.97	17.85	-22.15	40	33.37	14.74	1.28	31.54			P	V
		262.47	20.83	-25.17	46	30.04	19.82	2.32	31.35			P	V
		614.3	27.11	-18.89	46	29.02	25.54	3.36	30.81			P	V
		801.9	31.11	-14.89	46	30.06	27.74	3.9	30.59			P	V
		957.3	32.55	-13.45	46	28.79	30.22	4.07	30.53	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix B. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang and James Chiu	Temperature :	21~22°C
		Relative Humidity :	44~48%



Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)


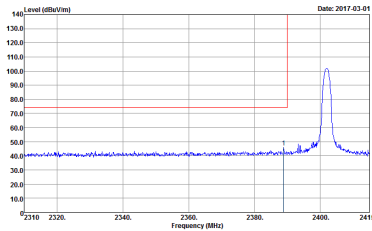
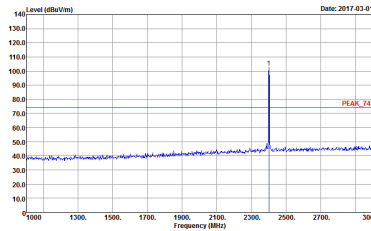
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Site Condition</p> <p>03CH07.HY PEAK_BE_74 3m HF ANT 130829 HORIZONTAL RBW 1000.0000kHz VBW 3000.0000kHz SWT Auto</p>	 <p>Site Condition</p> <p>03CH07.HY PEAK_74 3m HF ANT 130829 HORIZONTAL RBW 1000.0000kHz VBW 3000.0000kHz SWT Auto</p>

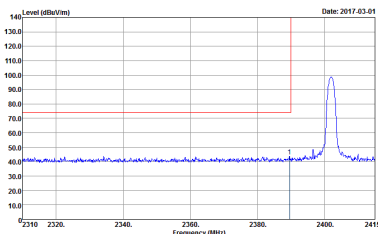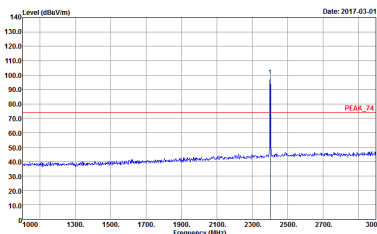



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH67-HY Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL : REW:1000.000kHz VEW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH67-HY Condition : PEAK_74 3m HF-ANT_130829 VERTICAL : REW:1000.000kHz VEW:3000.000kHz SWT:Auto</p>



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF-ANT 130829 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF-ANT 130829 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF-ANT 130829 HORIZONTAL Detector : Peak Project : F710302-01 Mode : 2</p>	Left blank

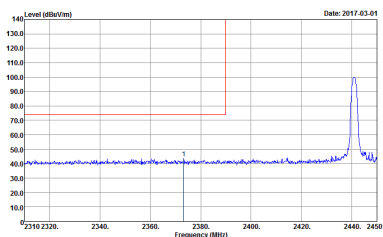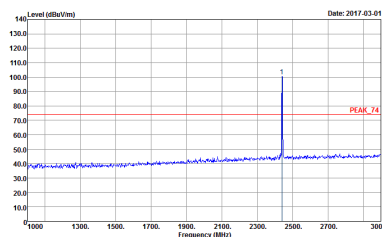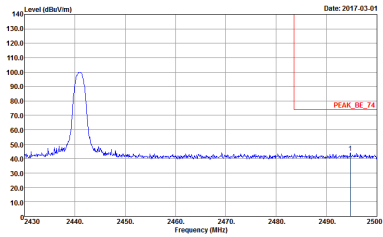BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF-ANT_130829 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF-ANT_130829 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank

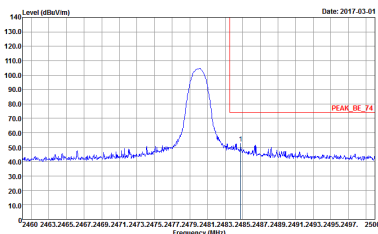
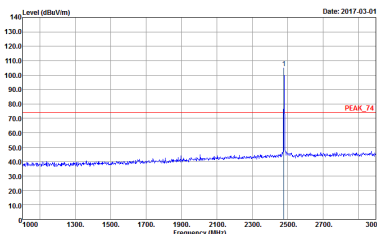


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH67-HY Condition : PEAK_BE_74 3m HF-ANT 130829 HORIZONTAL : REW:1000.000KHz VIEW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH67-HY Condition : PEAK_74 3m HF-ANT 130829 HORIZONTAL : REW:1000.000KHz VIEW:3000.000KHz SWT:Auto</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH67-HY Condition : PEAK_BE_74 3m HF-ANT 130829 VERTICAL : REW:1000.000kHz VEW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH67-HY Condition : PEAK_74 3m HF-ANT 130829 VERTICAL : REW:1000.000kHz VEW:3000.000kHz SWT:Auto</p>

2.4GHz 2400~2483.5MHz
BT (Harmonic @ 3m)

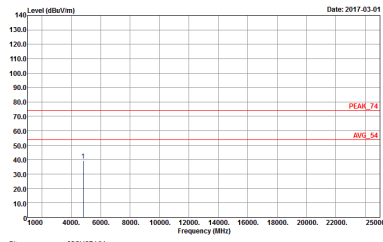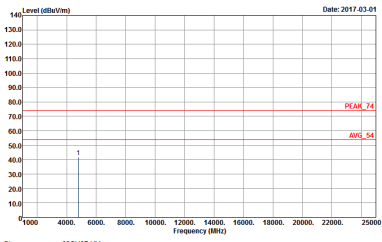BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

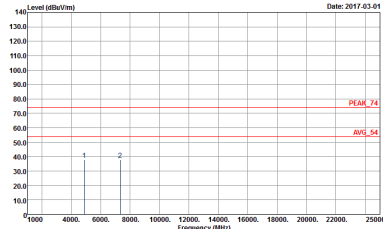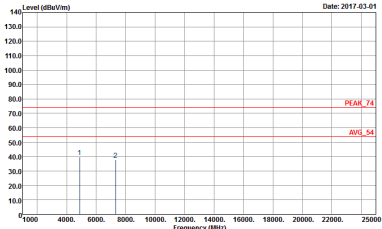

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH67-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH67-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH67-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH67-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak</p>

Emission below 1GHz
2.4GHz BT (LF)

BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	