

# FCC TEST REPORT

For

Smart Devices Ltd.

Z-Wave prototyping board

Model No.: ZMEUZUNO

Prepared For : Smart Devices Ltd.  
Address : Build. 15, constr. 1-2-3, Dolgorukovskaya str., Moscow, 127006, Russian Federation

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited  
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China  
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217030051W  
Date of Test : Mar. 14~ Apr. 10, 2017  
Date of Report : Apr. 11, 2017

# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	7
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	17
5. 20dB Bandwidth Test.....	25
5.1. Test Standard and Limit.....	25
5.2. Test Setup.....	25
5.3. Test Procedure.....	25
5.4. Test Data.....	25
6. Antenna Requirement.....	27
6.1. Test Standard and Requirement.....	27
6.2. Antenna Connected Construction.....	27
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	28
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	30
APPENDIX III -- INTERNAL PHOTOGRAPH.....	33

## TEST REPORT

Applicant : Smart Devices Ltd.  
Manufacturer : Smart Devices Ltd.  
Product Name : Z-Wave prototyping board  
Model No. : ZMEUZUNO  
Trade Mark : Z-Wave.Me Z-Uno  
Rating(s) : DC 5V

**Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Mar. 14~ Apr. 10, 2017

Prepared by :



*Kyle Xu*

(Test Engineer / Kyle Xu)

Reviewer :

*Brown Lu*

(Project Manager / Brown Lu)

Approved & Authorized Signer :

*Tom Chen*

(Manager / Tom Chen)

## 1. General Information

### 1.1. Client Information

Applicant	:	Smart Devices Ltd.
Address	:	Build. 15, constr. 1-2-3, Dolgorukovskaya str., Moscow, 127006, Russian Federation
Manufacturer	:	Smart Devices Ltd.
Address	:	Build. 15, constr. 1-2-3, Dolgorukovskaya str., Moscow, 127006, Russian Federation
Factory	:	Smart Devices Ltd.
Address	:	Build. 15, constr. 1-2-3, Dolgorukovskaya str., Moscow, 127006, Russian Federation

### 1.2. Description of Device (EUT)

Product Name	:	Z-Wave prototyping board	
Model No.	:	ZMEUZUNO	
Trade Mark	:	Z-Wave.Me Z-Uno	
Test Power Supply	:	AC 120V, 60Hz and AC 240V, 60Hz for adapter	
Product Description	:	Operation Frequency:	908.4MHz/916MHz
		Number of Channel:	2 Channels
		Modulation Type:	FSK
		Antenna Type:	Wire Antenna
		Antenna Gain(Peak):	0 dBi
<b>Remark:</b> 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: LJS-186 Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5V, 2A
---------	---	--

## 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH02
Mode 3	Keeping TX mode



For Conducted Emission	
Final Test Mode	Description
Mode 3	Keeping TX mode

For Radiated Emission    Conducted Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH02

## 1.5. List of Channels

Channel	Frequency (MHz)
01	908.4
02	916.0

## 1.6. Description of Test Setup

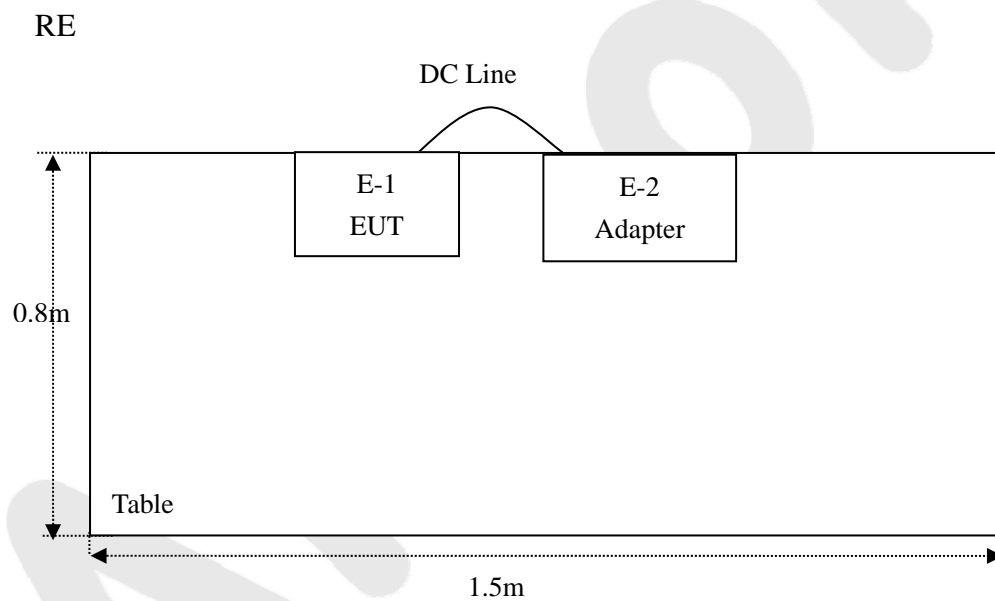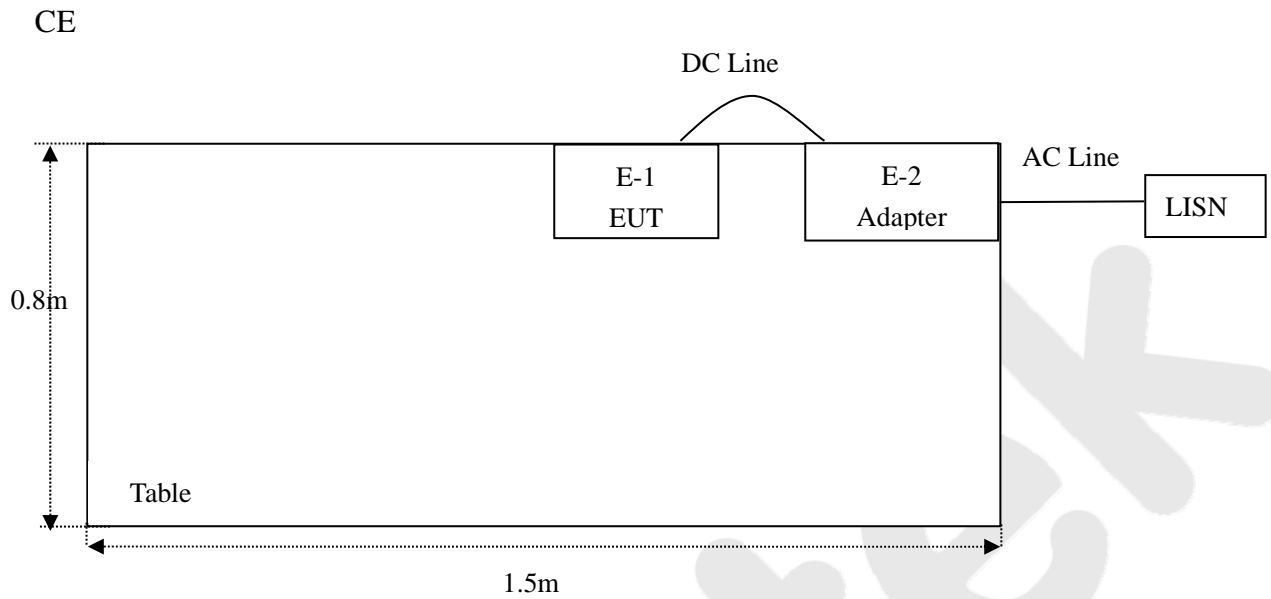

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Jul. 19, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Jun. 17, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Jun. 17, 2016	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Jul. 12, 2016	1 Year
5	Preamplifier	Instruments corporation	EMC011830	980100	Jun. 17, 2016	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Jun. 17, 2016	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 06, 2016	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 06, 2016	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519	012	May 11, 2016	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Jun. 17, 2016	1 Year
11	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	Agilent	KFSW150502	15I00041SN045	Jun. 17, 2016	1 Year
13.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun. 17, 2016	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun. 17, 2016	1 Year
15	Signal Generator	Agilent	E4421B	MY41000743	Jun. 17, 2016	1 Year
16.	DC Power supply	IV	IV-8080	YQSB0096	Jun. 17, 2016	1 Year
17.	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150 M8	SE-0137	Jun. 17, 2016	1 Year

## 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

## 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 752021**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

### **IC-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

### **Test Location**

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China



## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Spurious Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
<b>Remark:</b> “N/A” is an abbreviation for Not Applicable.		


### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequency.

#### 3.2. Test Setup

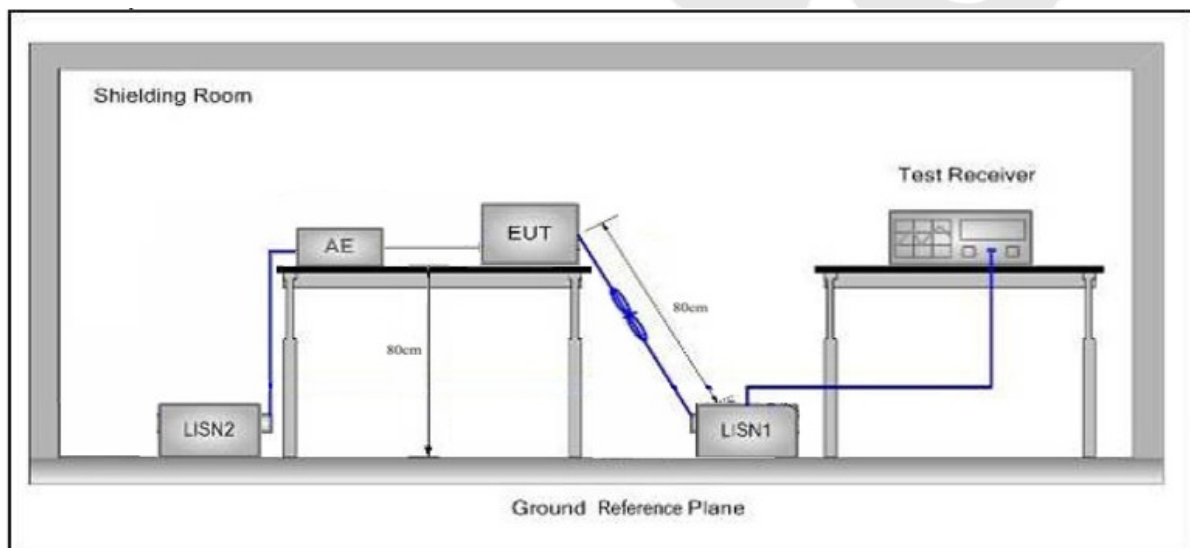

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

## Conducted Emission Test Data


Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Live Line  
Tem.:25℃ Hum.:50%

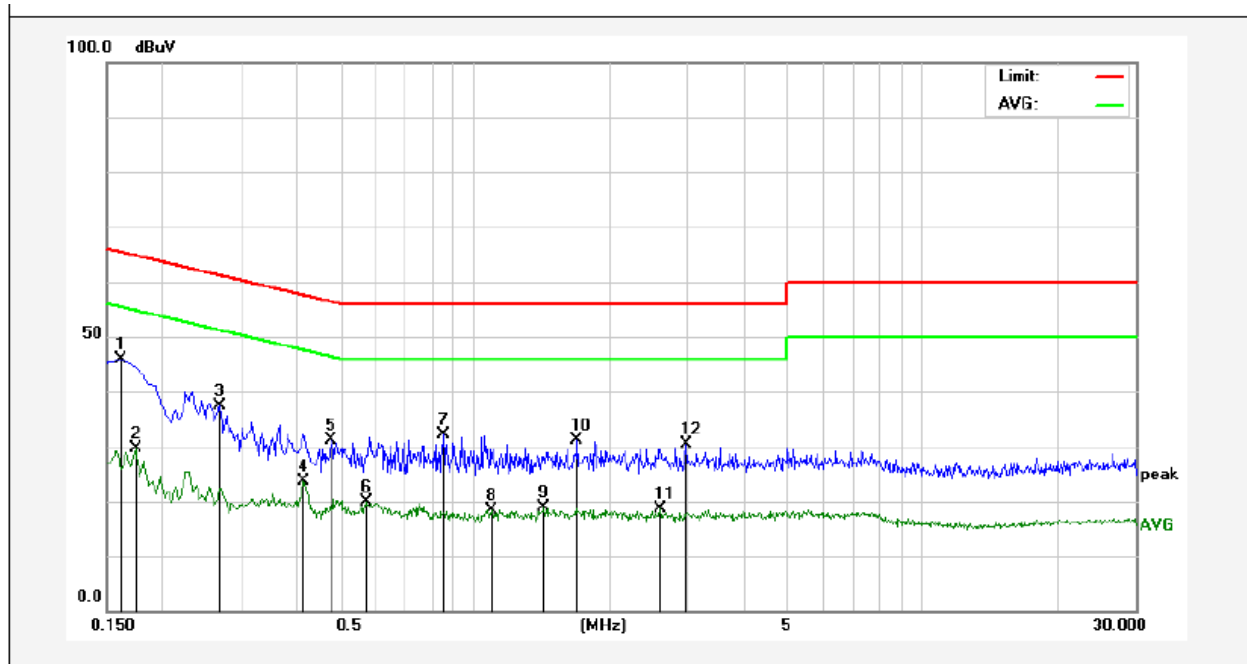

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1620	25.86	19.90	45.76	65.36	-19.60	peak	
2	0.1740	9.65	19.90	29.55	54.76	-25.21	AVG	
3	0.2700	17.52	19.89	37.41	61.12	-23.71	peak	
4	0.4140	3.60	19.94	23.54	47.57	-24.03	AVG	
5	0.4780	11.14	19.97	31.11	56.37	-25.26	peak	
6	0.5740	-0.14	20.00	19.86	46.00	-26.14	AVG	
7	0.8500	11.93	20.08	32.01	56.00	-23.99	peak	
8	1.0900	-1.64	20.12	18.48	46.00	-27.52	AVG	
9	1.4299	-1.17	20.13	18.96	46.00	-27.04	AVG	
10	1.6940	11.00	20.13	31.13	56.00	-24.87	peak	
11	2.6020	-1.64	20.15	18.51	46.00	-27.49	AVG	
12	2.9660	10.20	20.16	30.36	56.00	-25.64	peak	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:25℃ Hum.:50%

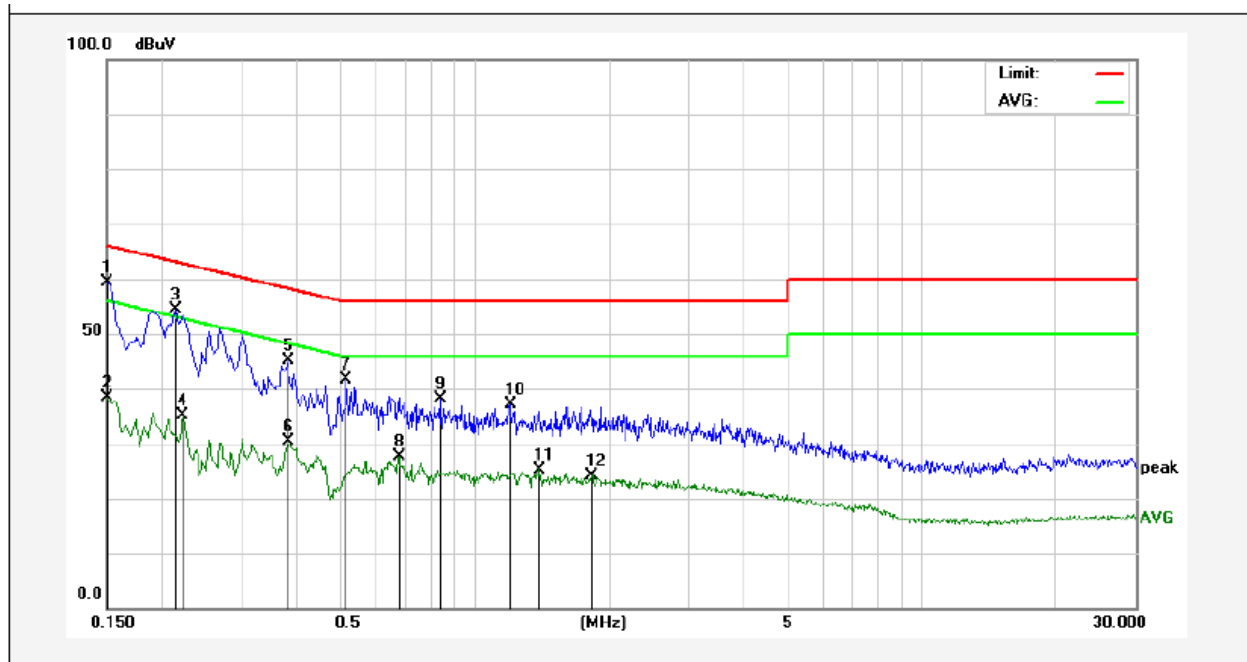

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	39.38	19.90	59.28	65.99	-6.71	QP	
2	0.1500	18.46	19.90	38.36	55.99	-17.63	AVG	
3	0.2140	34.40	19.90	54.30	63.04	-8.74	QP	
4	0.2220	15.34	19.89	35.23	52.74	-17.51	AVG	
5	0.3820	25.28	19.93	45.21	58.23	-13.02	QP	
6	0.3820	10.41	19.93	30.34	48.23	-17.89	AVG	
7	0.5180	21.66	19.99	41.65	56.00	-14.35	QP	
8	0.6780	7.56	20.03	27.59	46.00	-18.41	AVG	
9	0.8380	17.96	20.08	38.04	56.00	-17.96	QP	
10	1.1980	17.04	20.12	37.16	56.00	-18.84	QP	
11	1.3900	5.12	20.13	25.25	46.00	-20.75	AVG	
12	1.8220	4.04	20.14	24.18	46.00	-21.82	AVG	


### Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Live Line  
Tem.:25℃ Hum.:50%

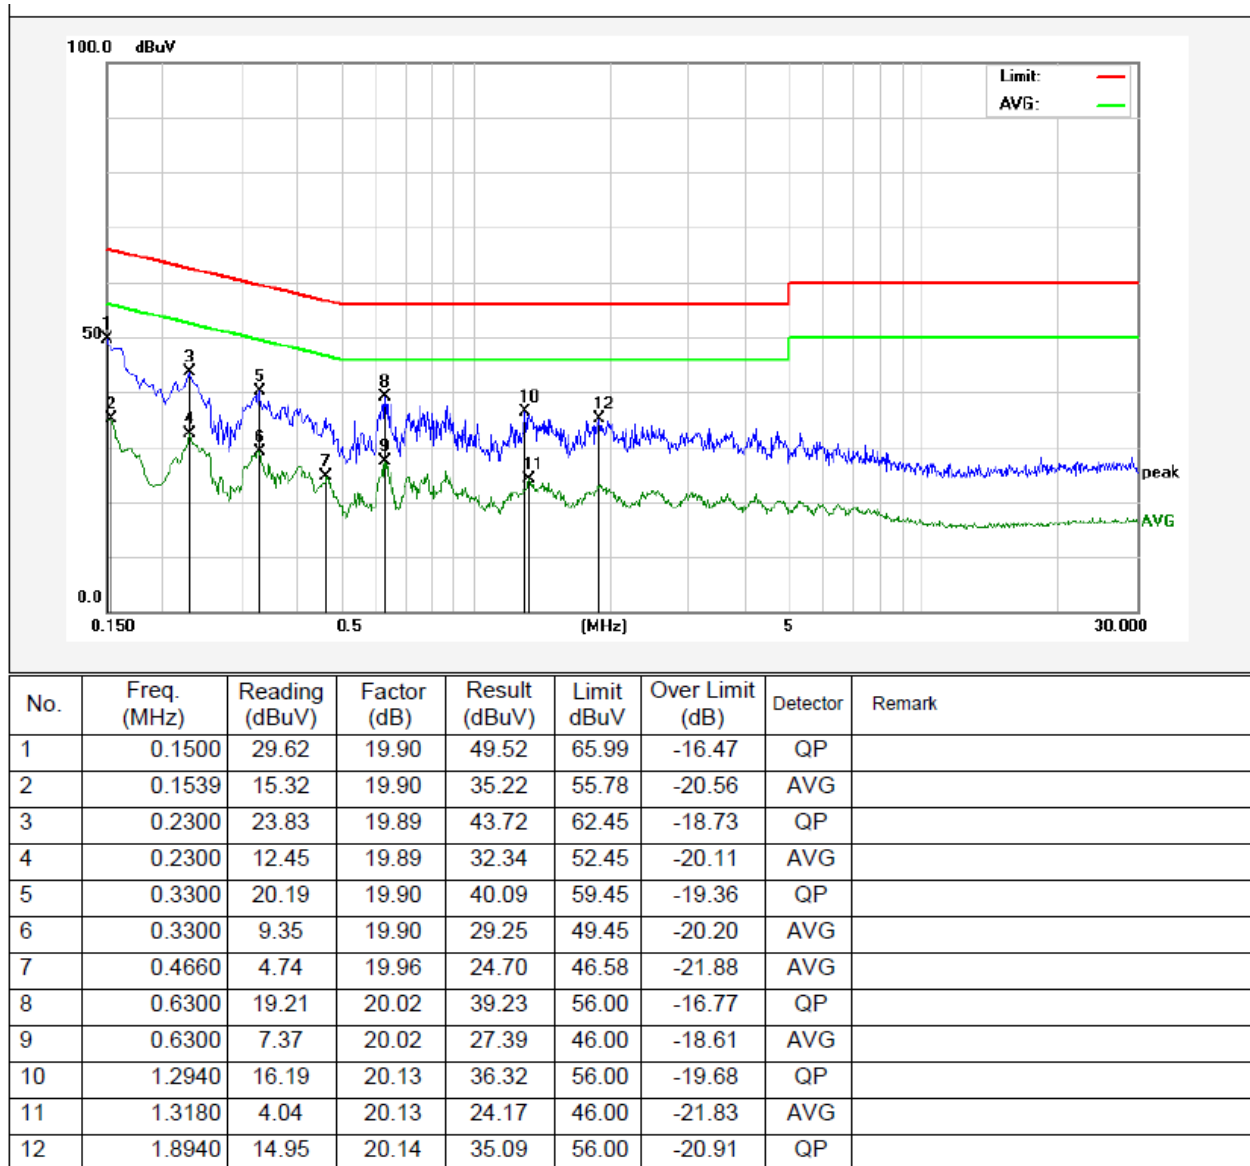

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
Operating Condition: Keeping TX mode  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:25℃ Hum.:50%

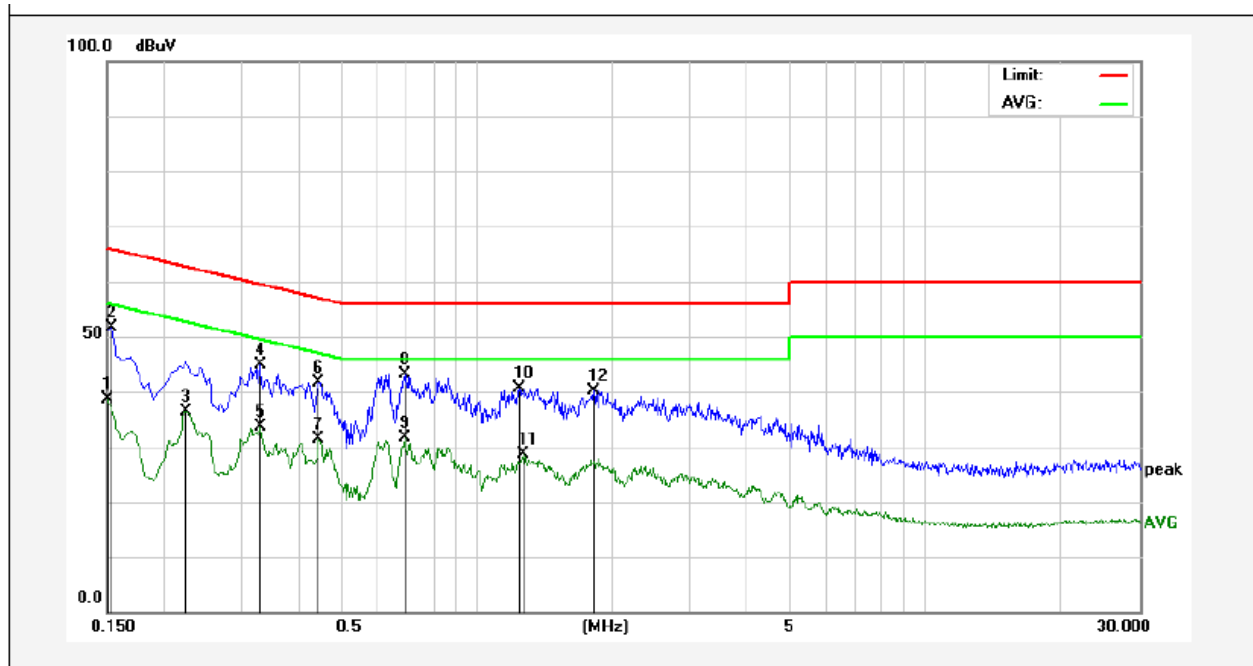

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	18.73	19.90	38.63	55.99	-17.36	AVG	
2	0.1539	31.83	19.90	51.73	65.78	-14.05	QP	
3	0.2260	16.46	19.89	36.35	52.59	-16.24	AVG	
4	0.3300	24.97	19.90	44.87	59.45	-14.58	QP	
5	0.3300	13.77	19.90	33.67	49.45	-15.78	AVG	
6	0.4460	21.72	19.96	41.68	56.95	-15.27	QP	
7	0.4460	11.35	19.96	31.31	46.95	-15.64	AVG	
8	0.6900	23.13	20.04	43.17	56.00	-12.83	QP	
9	0.6900	11.52	20.04	31.56	46.00	-14.44	AVG	
10	1.2460	20.48	20.12	40.60	56.00	-15.40	QP	
11	1.2740	8.61	20.13	28.74	46.00	-17.26	AVG	
12	1.8220	19.94	20.14	40.08	56.00	-15.92	QP	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	902~908	50	-	94.0	Quasi-peak	3

**Remark:**

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

## 4.2. Test Setup

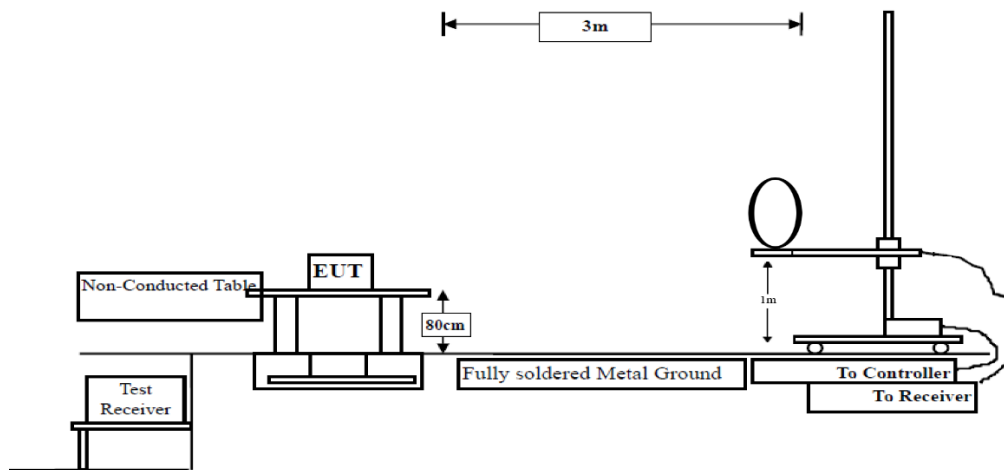


Figure 1. Below 30MHz

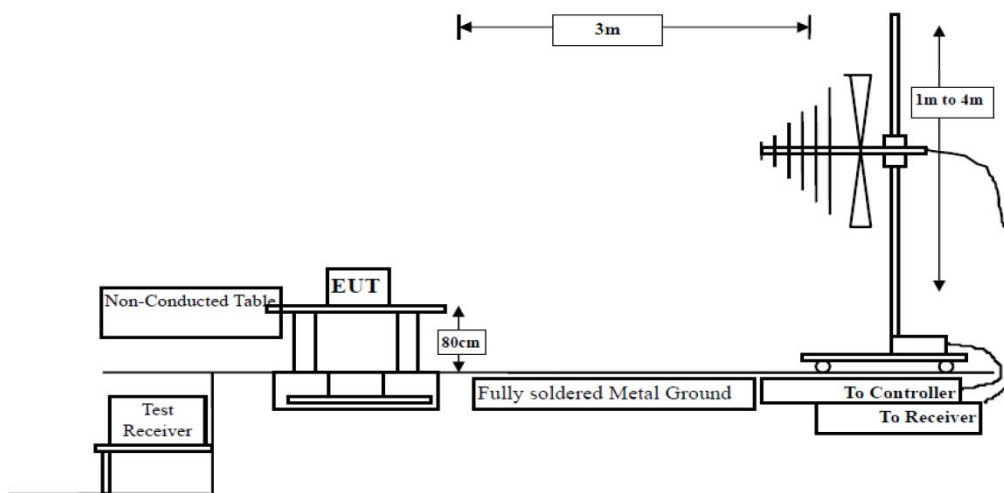


Figure 2. 30MHz to 1GHz

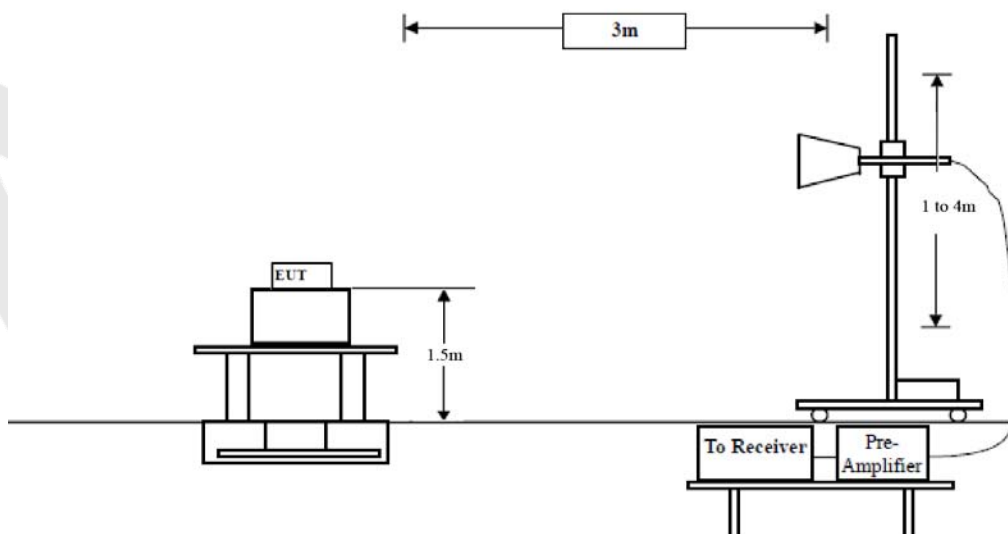


Figure 3. Above 1 GHz



### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 120KHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =10Hz, Detector= peak, Trace mode= Max hold, Sweep- auto couple.

### 4.4. Test Data

#### PASS


During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.


Test Results (30~1000MHz)

Job No.: 0217030051W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
Standard: FCC PART 15C Power Source: AC 120V, 60Hz  
for adapter

Test Mode: Mode 1 Polarization: Horizontal

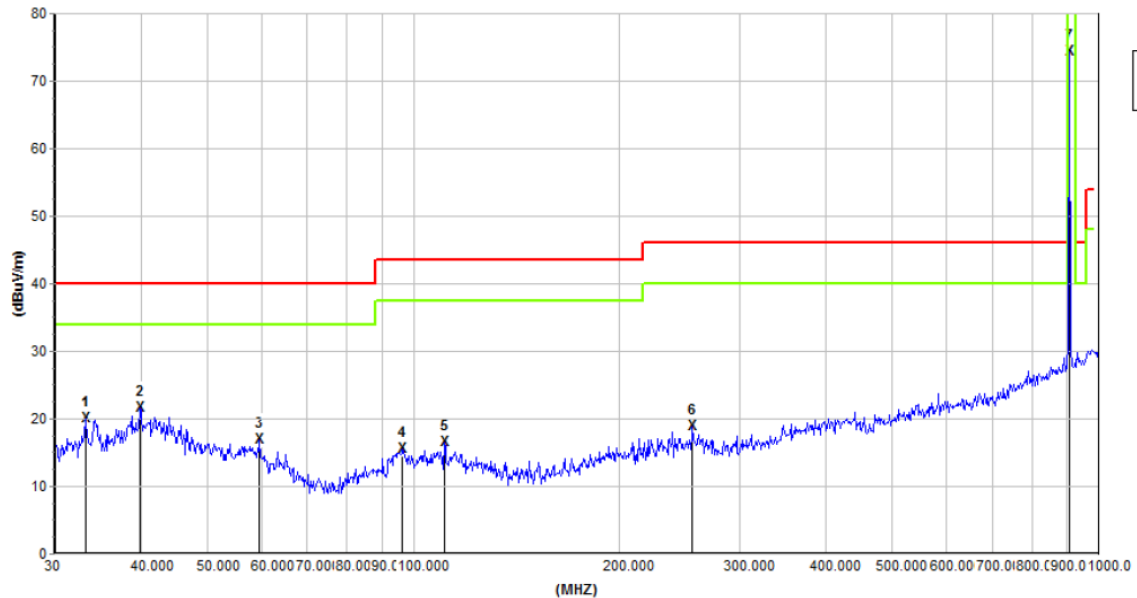

Test Mode: Mode 1 Polarization: Vertical

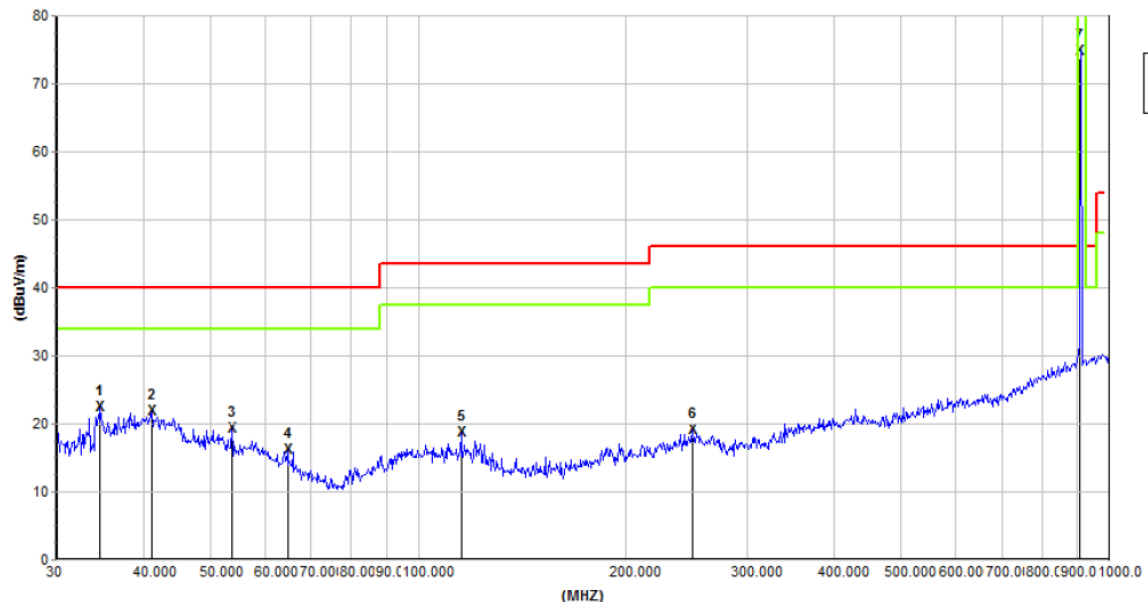

### Fundamental Emission

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	Mode
908.40	H	79.02	7.94	18.14	30.72	74.38	94.00	-19.62	QP
908.40	V	78.33	7.94	18.14	30.72	73.69	94.00	-20.31	QP

Remark: Level = Reading + Cable Loss+ Ant Factor-Amplifier


### Radiated Emission

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
33.21	H	35.25	1.98	12.31	29.53	20.01	40	-19.99	PK
39.85	H	32.08	2.05	13.54	26.08	21.59	40	-18.41	PK
59.65	H	32.14	2.23	12.71	30.3	16.78	40	-23.22	PK
96.44	H	36.48	2.59	7.93	31.47	15.53	43.5	-27.97	PK
110.96	H	37.08	3.82	7.08	31.59	16.39	43.5	-27.11	PK
255.62	H	37.62	5.53	7.28	31.61	18.82	46	-27.18	PK
34.64	V	36.77	2	12.3	28.79	22.28	40	-17.72	PK
41.13	V	32.52	2.07	13.57	26.45	21.71	40	-18.29	PK
53.69	V	34.02	2.2	13.08	30.12	19.18	40	-20.82	PK
64.66	V	33.47	2.29	10.84	30.46	16.14	40	-23.86	PK
115.32	V	34.67	4.29	11.31	31.6	18.67	43.5	-24.83	PK
249.43	V	33.14	5.5	12.07	31.62	19.09	46	-26.91	PK


Remark: Level = Reading + Cable Loss+ Ant Factor-Amplifier

Job No.: 0217030051W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH  
Standard: FCC PART 15C Power Source: AC 120V, 60Hz  
for adapter

Test Mode: Mode 2 Polarization: Horizontal

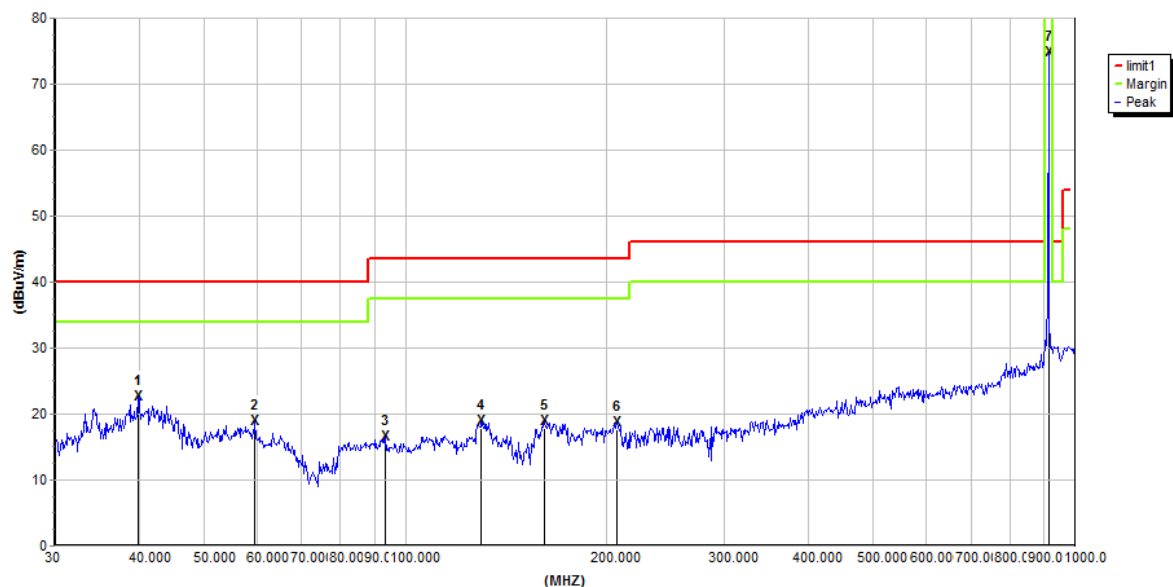

Test Mode: Mode 2 Polarization: Vertical

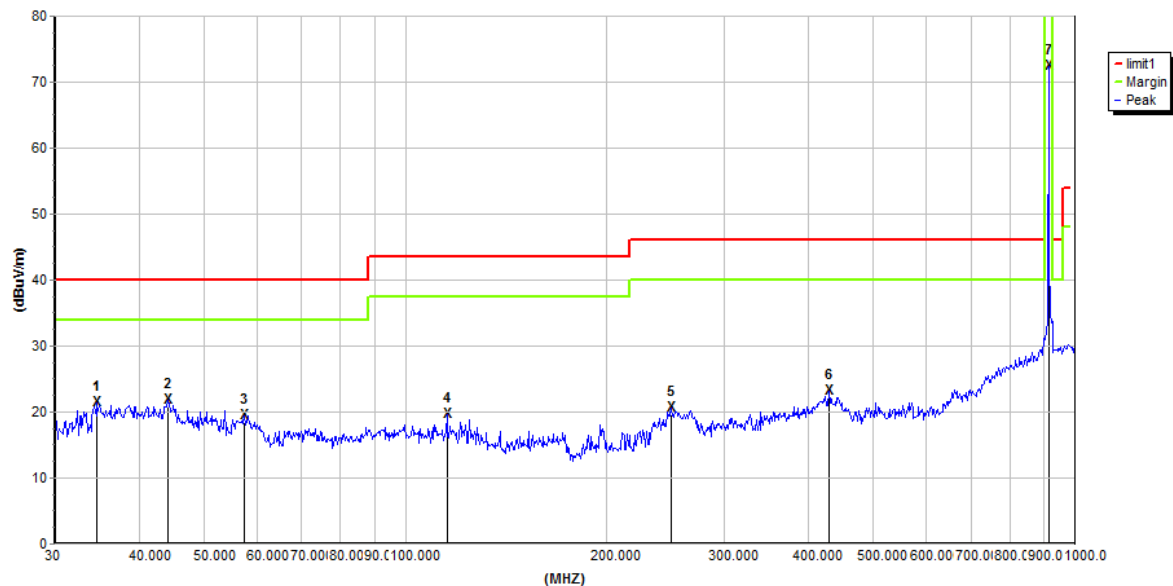

## Fundamental Emission

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	Mode
916.00	H	79.29	7.96	18.19	30.67	74.77	94.00	-19.23	QP
916.00	V	75.84	7.96	18.19	30.67	71.32	94.00	-22.68	QP

Remark: Level = Reading + Cable Loss+ Ant Factor-Amplifier

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
39.85	H	33.08	2.05	13.54	26.08	22.59	40	-17.41	PK
59.65	H	34.14	2.23	12.71	30.3	18.78	40	-21.22	PK
93.44	H	38.09	2.54	7.23	31.37	16.49	43.5	-27.01	PK
129.92	H	41.59	4.87	3.94	31.61	18.79	43.5	-24.71	PK
161.47	H	41.58	5.11	3.71	31.65	18.75	43.5	-24.75	PK
207.12	H	39.3	5.29	5.79	31.68	18.7	43.5	-24.8	PK
34.64	V	35.77	2	12.3	28.79	21.28	40	-18.72	PK
44.28	V	33.91	2.11	13.55	27.71	21.86	40	-18.14	PK
57.39	V	34.55	2.22	12.86	30.23	19.4	40	-20.6	PK
115.32	V	35.67	4.29	11.31	31.6	19.67	43.5	-23.83	PK
249.43	V	34.64	5.5	12.07	31.62	20.59	46	-25.41	PK
429.52	V	34.39	6.34	13.57	31.15	23.15	46	-22.85	PK

Remark: Level = Reading + Cable Loss+ Ant Factor-Amplifier

## Harmonics Emissions

### Low channel

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1816.80	H	45.52	7.39	28.73	26.32	55.32	74.00	-18.68	PK
1816.80	H	30.58	7.39	28.73	26.32	40.38	54.00	-13.62	AV
2725.20	H	44.35	8.08	29.71	27.01	55.13	74.00	-18.87	PK
2725.20	H	30.54	8.08	29.71	27.01	41.32	54.00	-12.68	AV
3633.60	H	--	--	--	--	--	--	--	PK
3633.60	H	--	--	--	--	--	--	--	AV
1816.80	V	46.22	7.39	28.73	26.32	56.02	74.00	-17.98	PK
1816.80	V	30.45	7.39	28.73	26.32	40.25	54.00	-13.75	AV
2725.20	V	44.35	8.08	29.71	27.01	55.13	74.00	-18.87	PK
2725.20	V	30.57	8.08	29.71	27.01	41.35	54.00	-12.65	AV
3633.60	V	--	--	--	--	--	--	--	PK
3633.60	V	--	--	--	--	--	--	--	AV

Remark :

1. Level = Reading + Cable Loss+Ant Factor-Amplifier
2. “ -- ” Mark indicated Background Noise Level

## High Channel

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1832.00	H	45.87	7.45	28.85	26.41	55.76	74	-18.24	PK
1832.00	H	30.55	7.45	28.85	26.41	40.44	54	-13.56	AV
2748.00	H	43.25	8.11	29.77	27.32	53.81	74	-20.19	PK
2748.00	H	30.05	8.11	29.77	27.32	40.61	54	-13.39	AV
3664.00	H	--	--	--	--	--	--	--	PK
3664.00	H	--	--	--	--	--	--	--	AV
1832.00	V	47.68	7.45	28.85	26.41	57.57	74	-16.43	PK
1832.00	V	32.55	7.45	28.85	26.41	42.44	54	-11.56	AV
2748.00	V	46.58	8.11	29.77	27.32	57.14	74	-16.86	PK
2748.00	V	30.25	8.11	29.77	27.32	40.81	54	-13.19	AV
3664.00	V	--	--	--	--	--	--	--	PK
3664.00	V	--	--	--	--	--	--	--	AV

### Remark :

1. Level = Reading + Cable Loss+Ant Factor-Amplifier
2. “ -- ” Mark indicated Background Noise Level

**Radiated Band Edge:**

Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Det.
902.00	35.22	18.02	7.89	30.33	30.8	46.00	-15.2	H	QP
928.00	34.52	18.33	8.02	30.35	30.52	46.00	-15.48	H	QP
902.00	37.22	18.02	7.89	30.33	32.8	46.00	-13.2	V	QP
928.00	36.05	18.33	8.02	30.35	32.05	46.00	-13.95	V	QP




## 5. 20dB Bandwidth Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

### 5.2. Test Setup

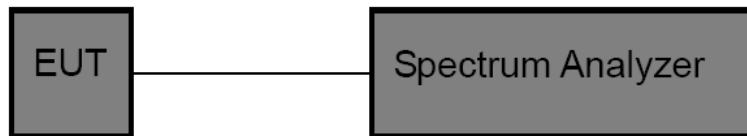

### 5.3. Test Procedure


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
 RBW = 10kHz, VBW  $\geq$  3\*RBW =30kHz,  
 Detector= CISPR quasi-peak  
 Trace mode= Max hold.  
 Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 5.4. Test Data


Test Item	: 20dB Bandwidth	Test Mode	: TX Mode
Test Voltage	: AC 120V, 60Hz for adapter	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Frequency (MHz)	Bandwidth (kHz)	Result
908.40	108.8	PASS
916.00	122.8	PASS

908.4MHz

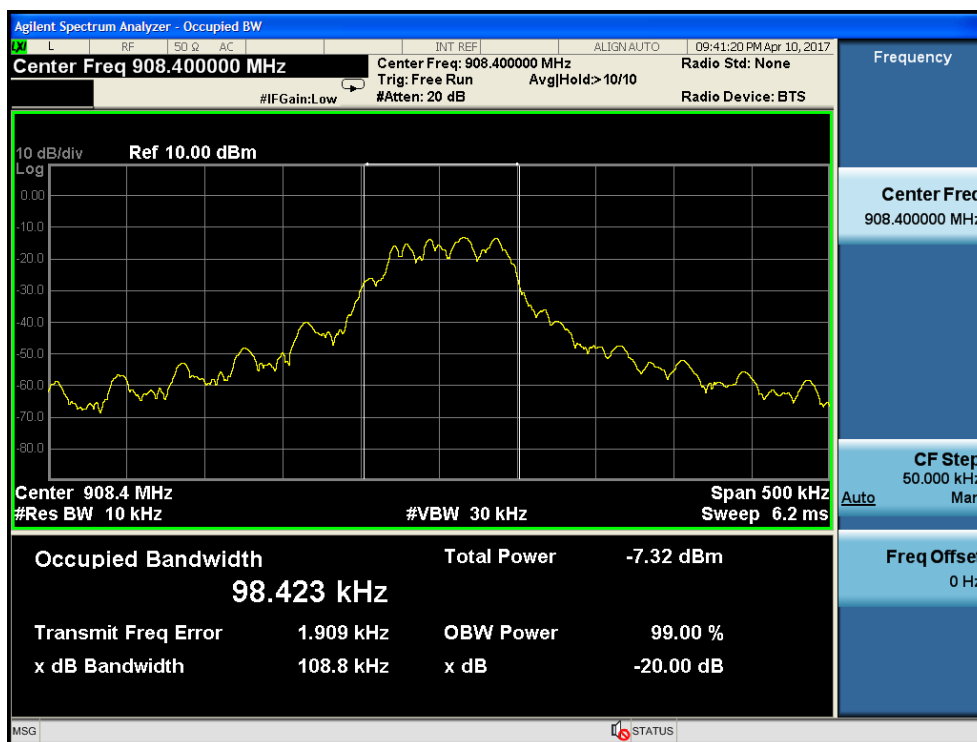

916.00MHz

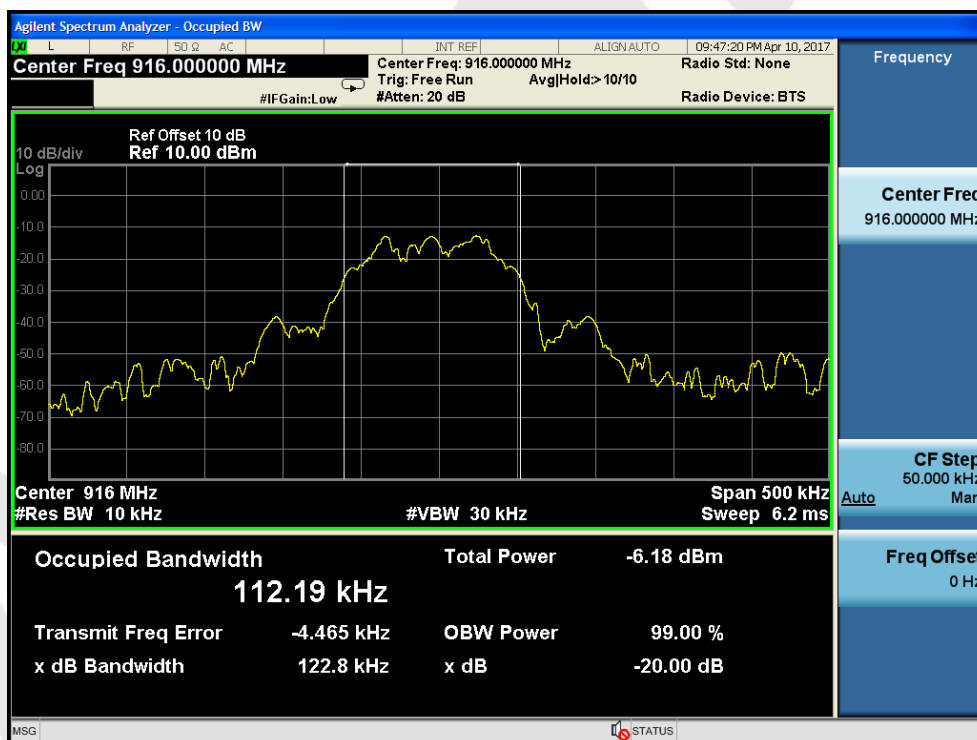


## 6. Antenna Requirement

### 6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	<p>1) 15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>

### 6.2. Antenna Connected Construction

The antenna is a wire antenna which permanently attached, and the best case gain of the antenna is 0dBi. It complies with the standard requirement.

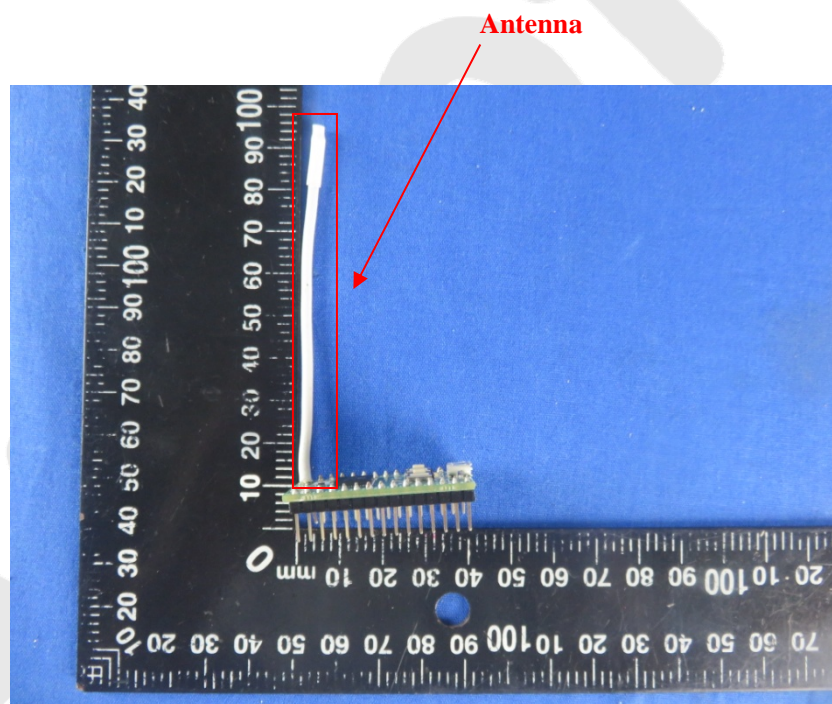

## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



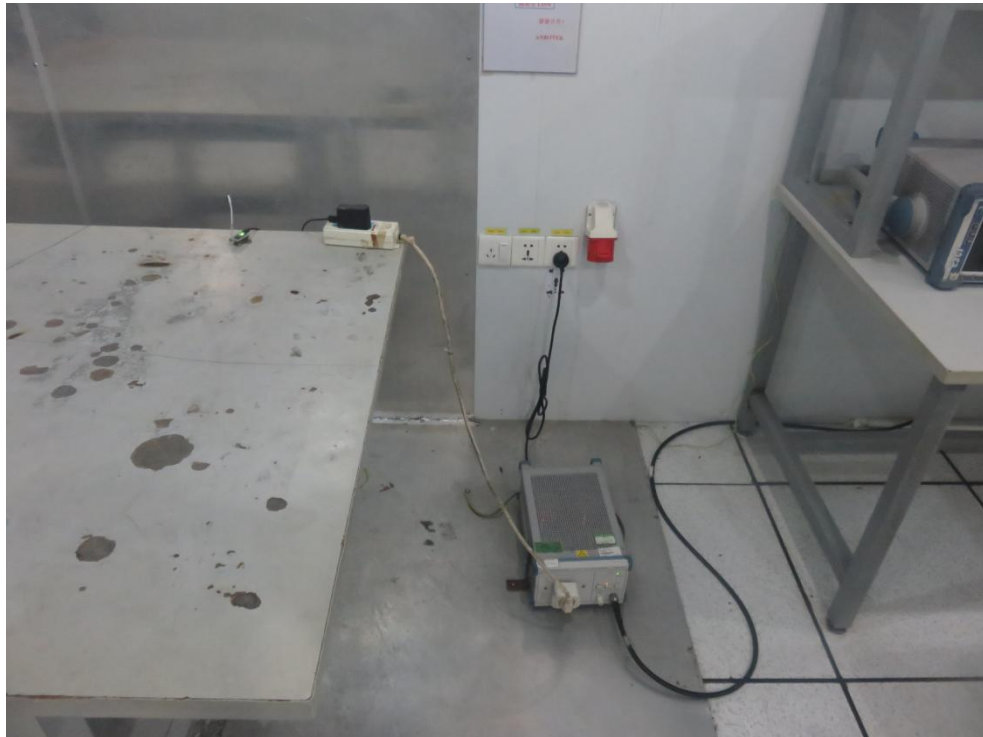




Photo of Radiation Emission Test





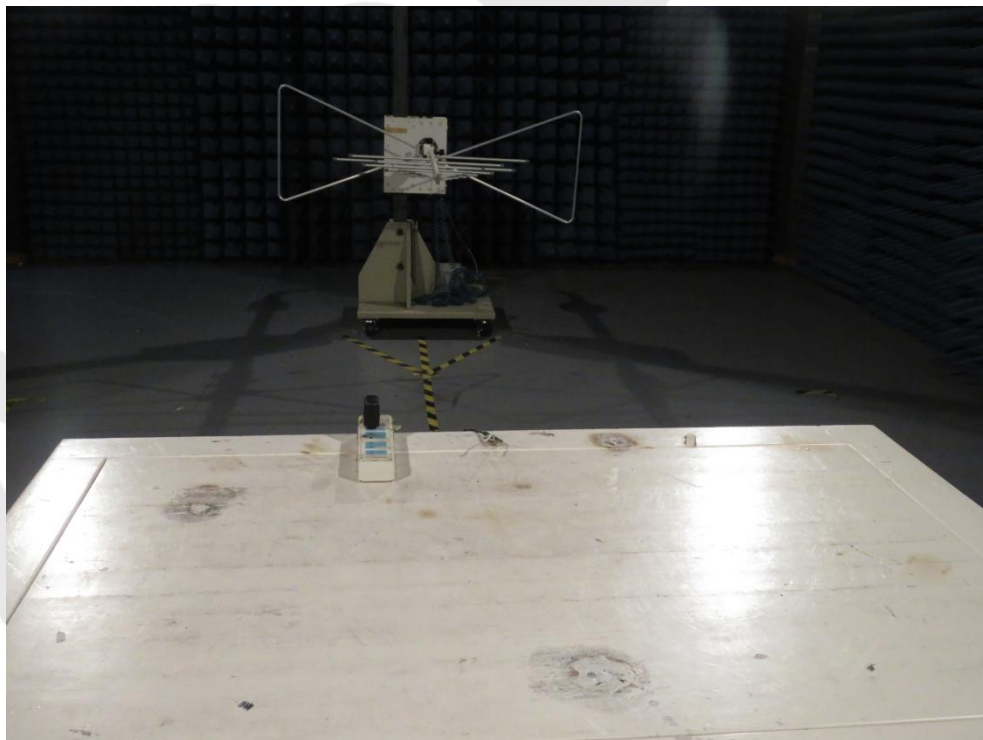


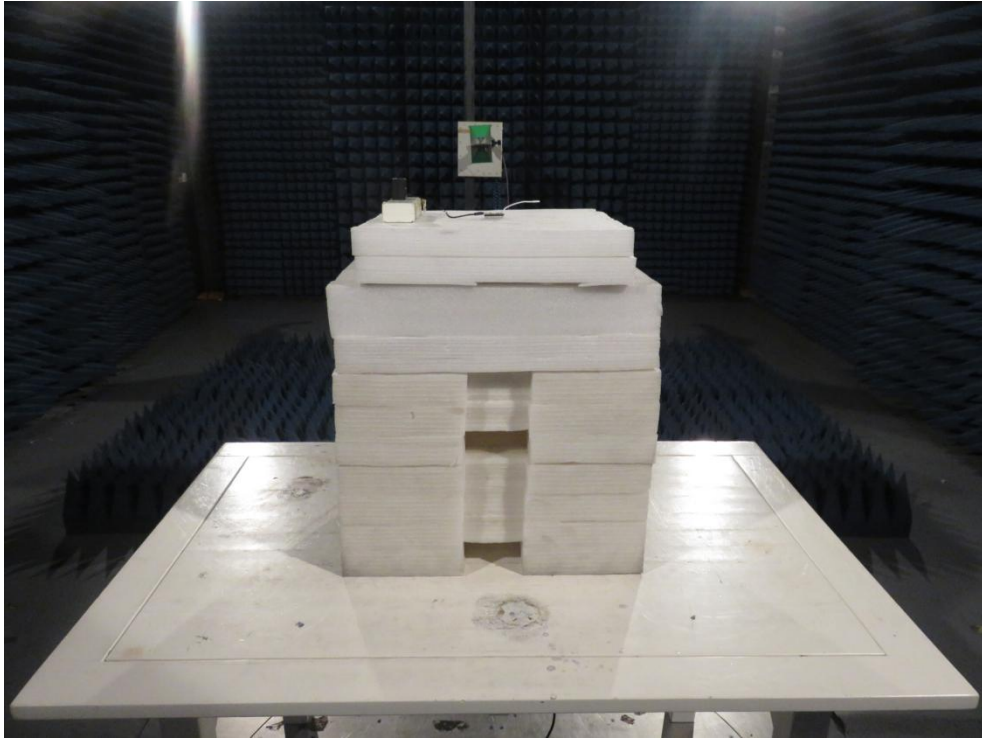


## APPENDIX II -- EXTERNAL PHOTOGRAPH

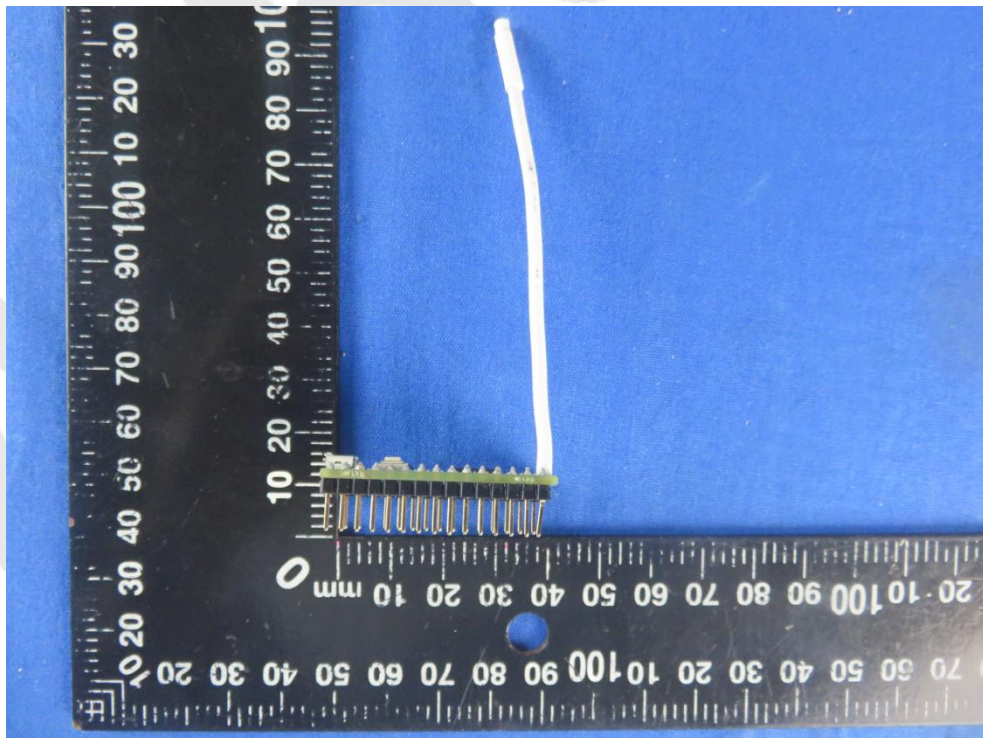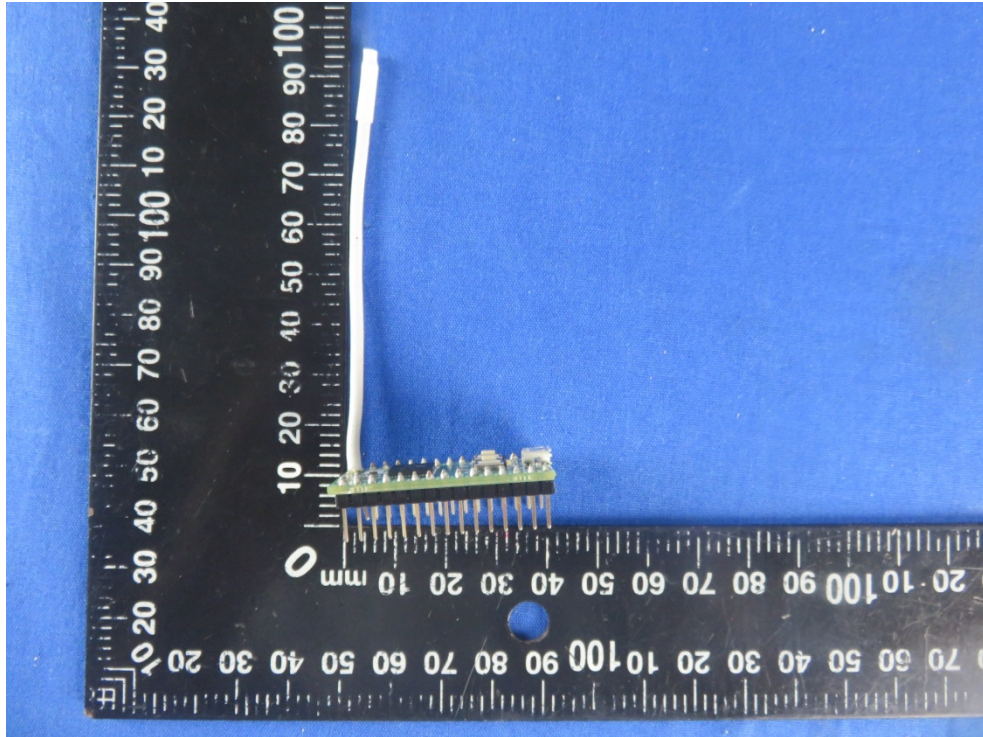

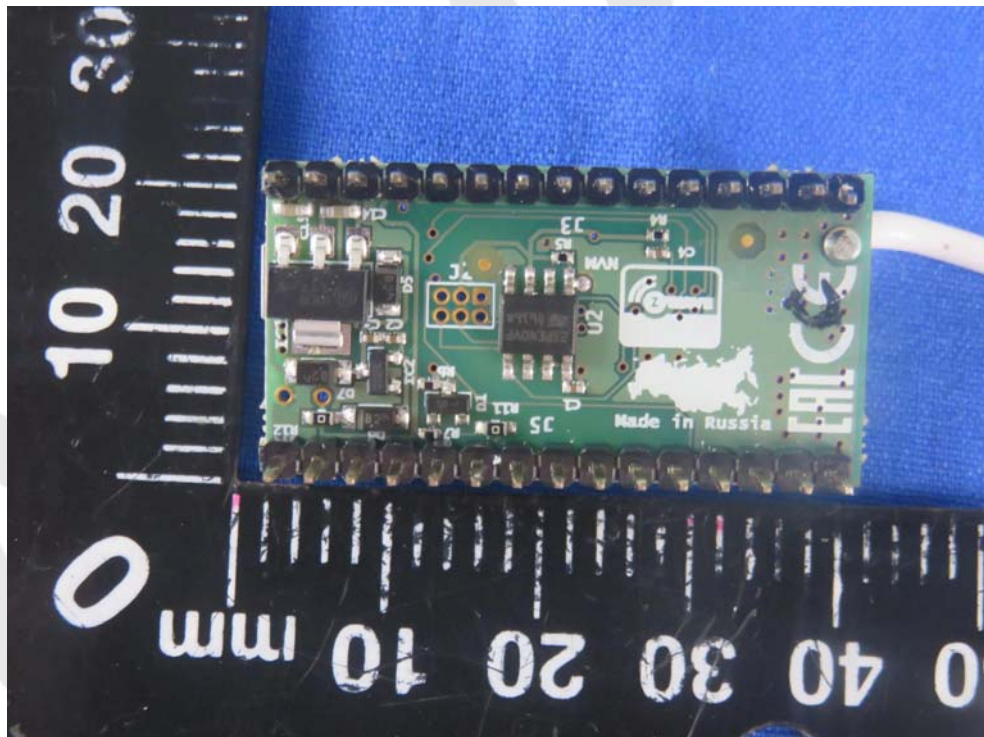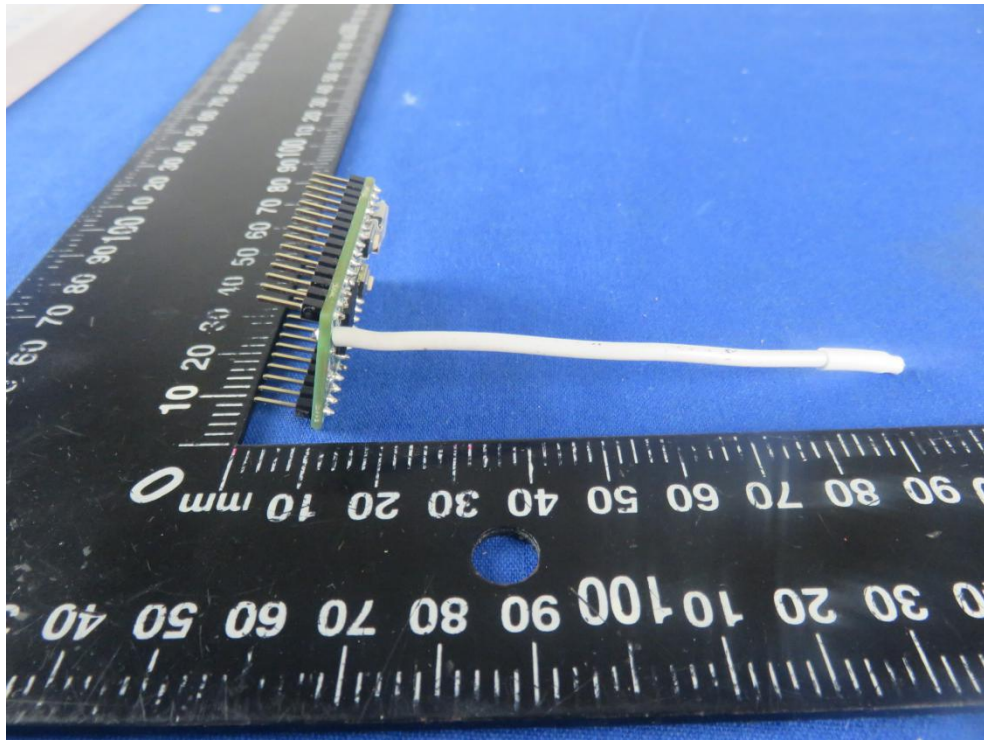



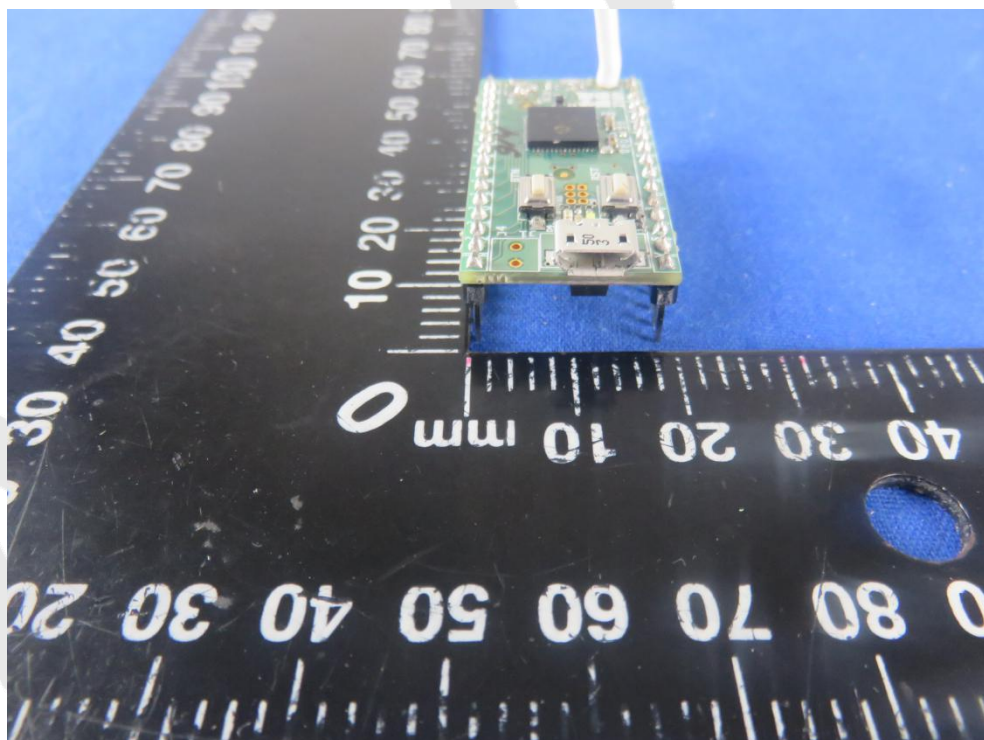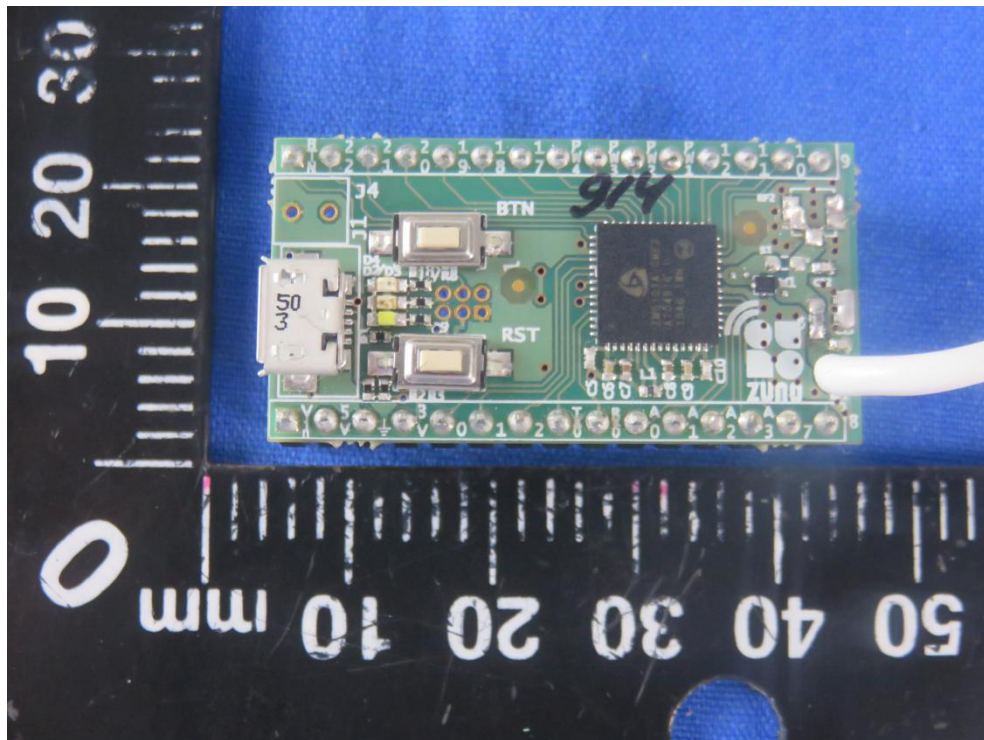



### APPENDIX III -- INTERNAL PHOTOGRAPH

