



## **Annex A: System Check**

**Tested Model : JD-GP20**

**Report Number:  
FCC17030204A-3**

### **I. RESULTS**

<b><u>TYPE</u></b>	<b><u>BAND</u></b>	<b><u>PARAMETERS</u></b>
<b>Validation</b>	<b>CW835</b>	<u>Measurement 1</u> : Validation Plane with Dipole device position on Middle Channel in CW mode
<b>Validation</b>	<b>CW1900</b>	<u>Measurement 2</u> : Validation Plane with Dipole device position on Middle Channel in CW mode

## MEASUREMENT 1

### BODY

Type: Validation measurement (Complete)

Date of measurement: 16/4/2017

Measurement duration: 11 minutes 54 seconds

#### **A. Experimental conditions.**


<b><u>Area Scan</u></b>	<u>dx=8mm dy=8mm</u>
<b><u>ZoomScan</u></b>	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete</u>
<b><u>Phantom</u></b>	<u>Validation plane</u>
<b><u>Device Position</u></b>	<u>Dipole</u>
<b><u>Band</u></b>	<u>CW835</u>
<b><u>Channels</u></b>	<u>Middle</u>
<b><u>Signal</u></b>	<u>CW (Crest factor: 1.0)</u>

#### **B. SAR Measurement Results**


Middle Band SAR (Channel -1):

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	53.927799
<b>Relative permittivity (imaginary part)</b>	21.281300
<b>Conductivity (S/m)</b>	0.987216
<b>Variation (%)</b>	0.120000

## SURFACE SAR

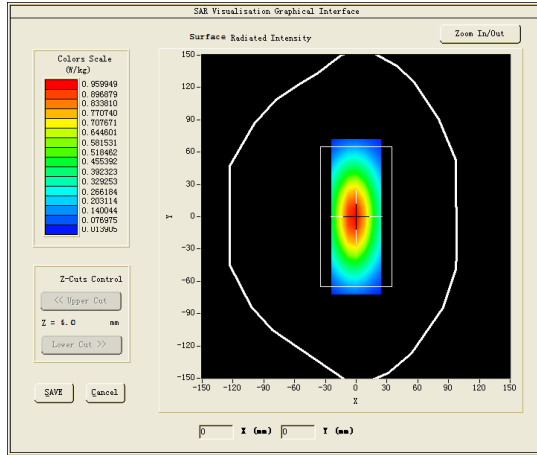

## VOLUME SAR

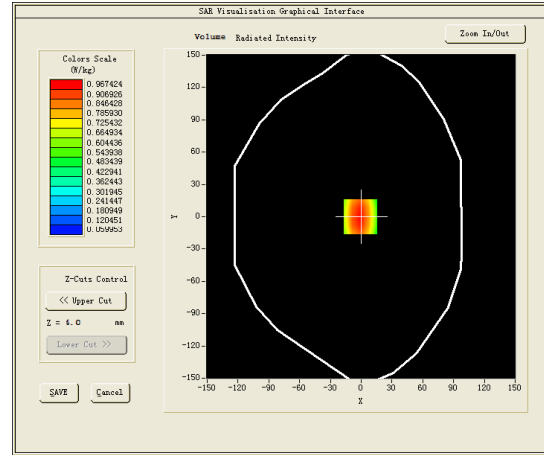


**Maximum location: X=-1.00, Y=0.00**


**SAR Peak: 1.44 W/kg**

<b>SAR 10g (W/Kg)</b>	6.44746
<b>SAR 1g (W/Kg)</b>	10.14583


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.3418	0.9674	0.6426	0.4358	0.2947	0.1989	0.1326

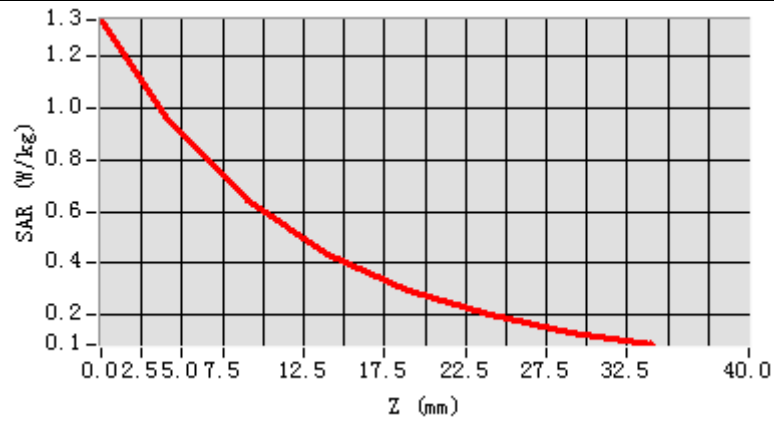

**3D screen shot**

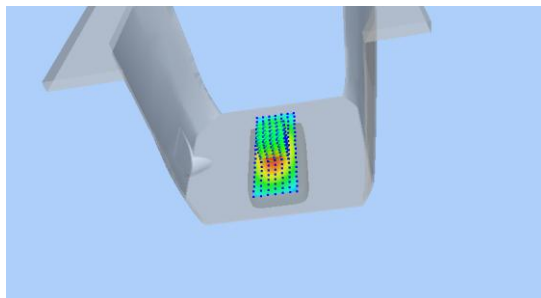

**Hot spot position**

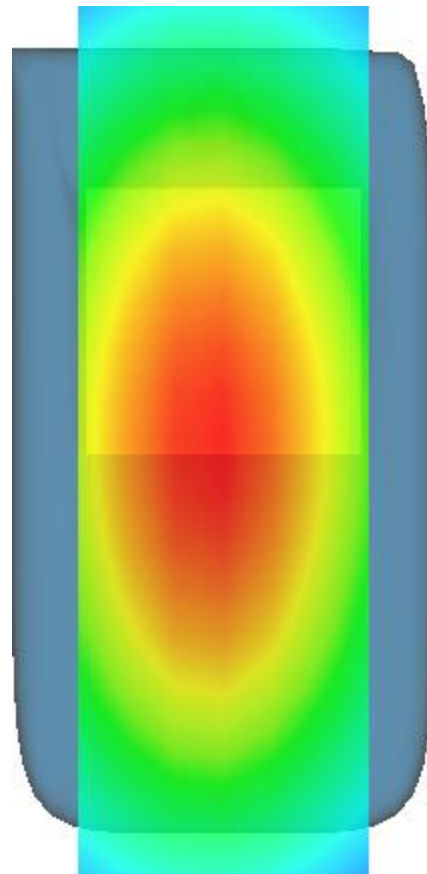

## MEASUREMENT 2

### BODY

Type: Validation measurement (Complete)

Date of measurement: 18/4/2017

Measurement duration: 10 minutes 57 seconds

### A. Experimental conditions.


<b><u>Area Scan</u></b>	<u>dx=8mm dy=8mm</u>
<b><u>ZoomScan</u></b>	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete</u>
<b><u>Phantom</u></b>	<u>Validation plane</u>
<b><u>Device Position</u></b>	<u>Dipole</u>
<b><u>Band</u></b>	<u>CW1900</u>
<b><u>Channels</u></b>	<u>Middle</u>
<b><u>Signal</u></b>	<u>CW (Crest factor: 1.0)</u>

### B. SAR Measurement Results


Middle Band SAR (Channel -1):

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	53.365299
<b>Relative permittivity (imaginary part)</b>	14.757600
<b>Conductivity (S/m)</b>	1.557747
<b>Variation (%)</b>	-0.450000

## SURFACE SAR

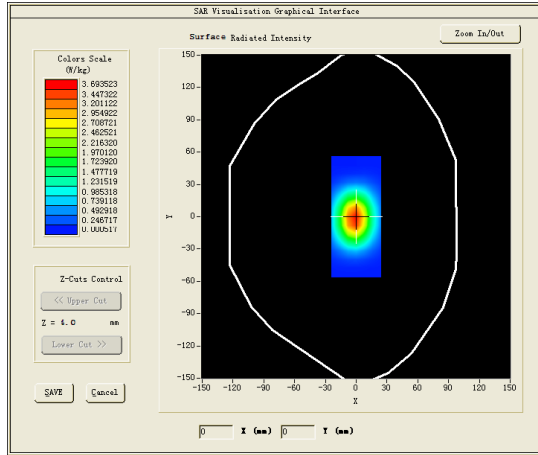

## VOLUME SAR

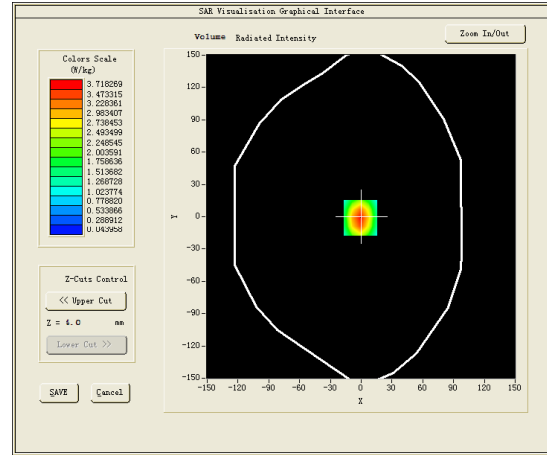


**Maximum location: X=-1.00, Y=-1.00**

**SAR Peak: 6.26 W/kg**

<b>SAR 10g (W/Kg)</b>	20.93533
<b>SAR 1g (W/Kg)</b>	39.32904

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	5.7034	3.7183	2.1347	1.2560	0.7338	0.4260	0.2429

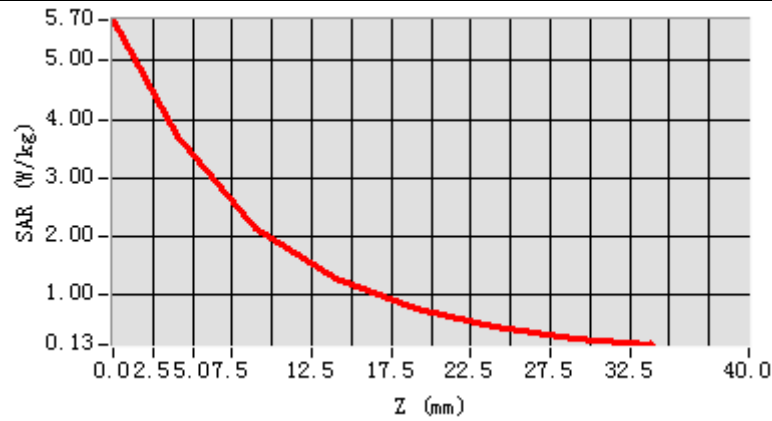

3D screen shot	Hot spot position
