



Annex A: System Check

Tested Model: JD-GP11

Report Number: FCC17030205A-3

I. RESULTS

<u>TYPE</u>	BAND	<u>PARAMETERS</u>
Validation	CW835	Measurement 1: Validation Plane with Dipole device position on Middle Channel in CW mode
Validation	CW1900	Measurement 2: Validation Plane with Dipole device position on Middle Channel in CW mode



MEASUREMENT 1

BODY

Type: Validation measurement (Complete)

Date of measurement: 16/4/2017

Measurement duration: 11 minutes 54 seconds

A. Experimental conditions.


<u>Area Scan</u>	dx=8mm dy=8mm
<u>ZoomScan</u>	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	CW (Crest factor: 1.0)

B. SAR Measurement Results

Middle Band SAR (Channel -1):

Frequency (MHz)	835.000000
Relative permittivity (real part)	53.927799
Relative permittivity (imaginary part)	21.281300
Conductivity (S/m)	0.987216
Variation (%)	0.120000



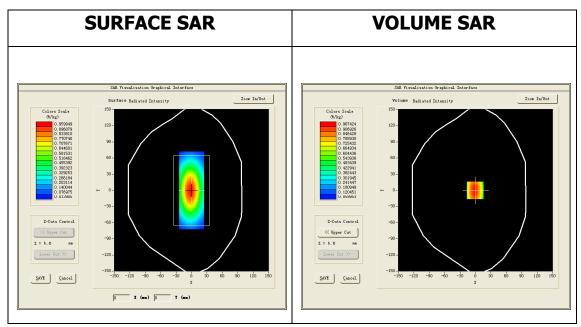



Maximum location: X=-1.00, Y=0.00

SAR Peak: 1.44 W/kg

SAR 10g (W/Kg)	6.44746
SAR 1g (W/Kg)	10.14583



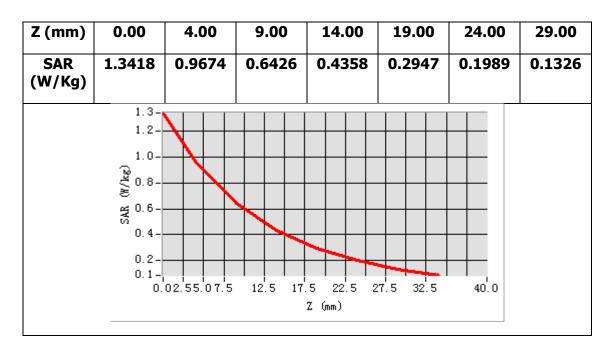

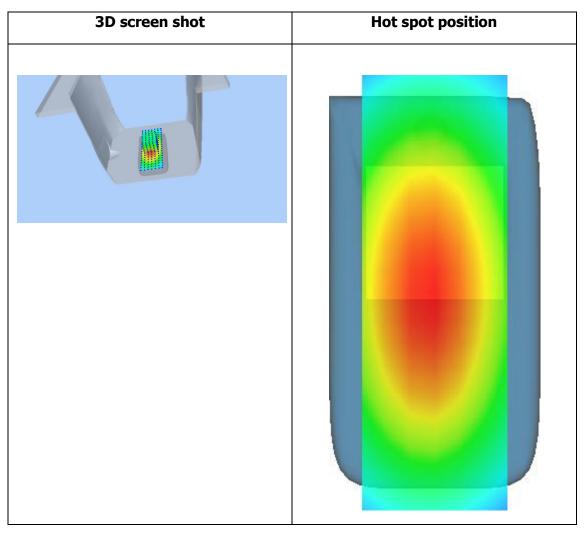



MEASUREMENT 2

BODY

Type: Validation measurement (Complete)

Date of measurement: 18/4/2017

Measurement duration: 10 minutes 57 seconds

A. Experimental conditions.


<u>Area Scan</u>	dx=8mm dy=8mm
<u>ZoomScan</u>	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
<u>Phantom</u>	<u>Validation plane</u>
Device Position	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	CW (Crest factor: 1.0)

B. SAR Measurement Results

Middle Band SAR (Channel -1):

Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.365299
Relative permittivity (imaginary part)	14.757600
Conductivity (S/m)	1.557747
Variation (%)	-0.450000



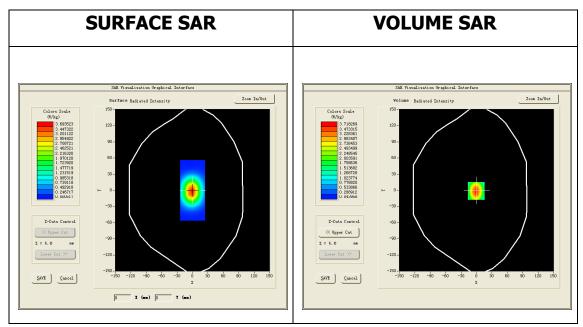

Maximum location: X=-1.00, Y=-1.00

SAR Peak: 6.26 W/kg

SAR 10g (W/Kg)	20.93533
SAR 1g (W/Kg)	39.32904



