

Report No.: DDT-RQ17081502-03E4

Issued Date: Sep. 15, 2017

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Shanghai Conwood International Co., Ltd	
Address	:	Rom301-306, Building No.1, No.2112 Yanggao Middle Road, Free Trade Pilot Zone, Shanghai, China	
Equipment under Test	•	Smart luggage system	
Model No. ONG		PCXXX-Y (PC is the box body material, XXX=000-999, can be different serial number for marketing purpose, Y=S, M, L, can be different box size, S means 20 inch, M means 24 inch, L means 28 inch.)	
Trade Mark	••	Echolac Since 1964	
FCC ID	•	2ANK9-PC108	
Manufacturer	•	Shanghai Conwood International Co., Ltd	
Address	:	Rom301-306, Building No.1, No.2112 Yanggao Middle Road, Free Trade Pilot Zone, Shanghai, China	

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel: +86-0769-22891499 <u>Http://www.dgddt.com</u>



TABLE OF CONTENTS

	Test report declares	4
1.	Summary of test results	5
2.	General test information	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	6
2.3.	Assistant equipment used for test	6
2.4.	Block diagram of EUT configuration for test	6
2.5.	Test environment conditions	7
2.6.	Deviations of test standard	7
2.7.	Test laboratory	7
2.8.	Measurement uncertainty	7
3.	Equipment used during test	8
4.	6dB Bandwidth and 99% Bandwidth	9
4.1.	Block diagram of test setup	9
4.2.	Limits	9
4.3.	Test Procedure	9
4.4.	Test Result	9
4.5.	Original test data	10
5.	Maximum Peak Output Power	11
5.1.	Block diagram of test setup	11
5.2.	Limits	11
5.3.	Test Procedure	11
5.4.	Test Result	11
6.	Power Spectral Density	12
6.1.	Block diagram of test setup	12
6.2.	Limits	12
6.3.	Test Procedure	12
6.4.	Test Result	12
6.5.	Original test data	13
7.	Emissions in non-restricted frequency bands	14
7.1.	Block diagram of test setup	14
7.2.	Limits	14
7.3.	Test Procedure	14
7.4.	Test Result	15
7.5.	Original test data	15
8.	Emissions in restricted frequency bands	16

8.1.	Block diagram of test setup	16
8.2.	Limit	17
8.3.	Test Procedure	18
8.4.	Test result	19
9.	Band Edge Compliance	23
9.1.	Block diagram of test setup	23
9.2.	Limit	23
9.3.	Test Procedure	23
9.4.	Test result	23
10.	Power Line Conducted Emission	28
10.1.	Block diagram of test setup	28
10.2.	Power Line Conducted Emission Limits	28
10.3.	Test Procedure	28
10.4.	Test Result	29
11.	Antenna Requirements	30
11.1.	Limit	30
11.2.	Result	30

TEST REPORT DECLARE

Applicant	:	Shanghai Conwood International Co., Ltd	
Address	:	Rom301-306, Building No.1, No.2112 Yanggao Middle Road, Free Trade Pilot Zone, Shanghai, China	
Equipment under Test	:	Smart luggage system	
Model No.	:	PCXXX-Y (PC is the box body material, XXX=000-999, can be different serial number for marketing purpose, Y=S, M, L, can be different box size, S means 20 inch, M means 24 inch, L means 28 inch.)	
Trade Mark	:	Echolac Since 1964	
Manufacturer	:	Shanghai Conwood International Co., Ltd	
Address	:	Rom301-306, Building No.1, No.2112 Yanggao Middle Road, Free Trade Pilot Zone, Shanghai, China	

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C: 2017, Part 15.247

Test procedure used:

ANSI C63.10:2013

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-RQ17081502-03E4		
Date of Test:	Aug. 30, 2017 ~ Sep. 15, 2017	Date of Report:	Sep. 15, 2017

Prepared By:

Leo Liu/Engineer

Approved B.

Appro

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.				
Description of Test Item	Standard	Results		
(ID D = 1 ' M = 1000/ D = 1 ' M	FCC Part 15: 15.247	PASS		
6dB Bandwidth and 99% Bandwidth	ANSI C63.10:2013			
Post O to A Post	FCC Part 15: 15.247	DACC		
Peak Output Power	ANSI C63.10:2013	PASS		
Danier Construit Danieles	FCC Part 15:15.247	PASS		
Power Spectral Density	ANSI C63.10:2013			
F	FCC Part 15: 15.247	PASS		
Emissions in non-restricted frequency bands	ANSI C63.10:2013			
	FCC Part 15: 15.209			
Transmitter spurious emission	FCC Part 15: 15.247	PASS		
D 151 G "	FCC Part 15: 15.209	D.A.G.G.		
Band Edge Compliance	FCC Part 15: 15.247	PASS		
Power Line Conducted Emission	FCC Part 15: 15.207	N/A		
Antenna requirement	FCC Part 15: 15.203	PASS		

2. General test information

2.1. Description of EUT

EUT* Name	:	Smart luggage system	
		PCXXX-Y (PC is the box body material, XXX=000-999, can be different	
Model Number	:	serial number for marketing purpose, Y=S, M, L, can be different box size, S	
		means 20 inch, M means 24 inch, L means 28 inch.)	
EUT function description	:	Please reference user manual of this device	
Power supply	:	DC 3.0V (2*1.5 "AAA" batteries)	
Radio Specification	:	Bluetooth V4.0-LE	
Operation frequency	:	2402MHz -2480MHz	
Modulation	:	GFSK	
Data rate	:	1Mbps	
Antenna Type	:	Integrated PCB antenna, maximum PK gain: -1dBi	
Sample Type	:	Series production	

Note: EUT is the ab. of equipment under test.

2.2. Accessories of EUT

 scription of ccessories	Brand	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Brand	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test

EUT

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode as blow table:

Tested mode, channel, information				
Mode	Channel	Frequency (MHz)		
	CH0	2402		
GFSK	CH19	2440		
	CH39	2480		
Note: New battery is used during all test				

2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25℃
Humidity range:	40-75%
Pressure range:	86-106kPa

2.6. Deviations of test standard

No Deviation.

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong

Province, China, 523808 Tel: +86-0769-89201699 http://www.dgddt.com

FCC Registration Number: 270092

Industry Canada site registration number: 10288A-1

CNAS Accreditation No. L6451 A2LA Accreditation No. 3870.01

2.8. Measurement uncertainty

Test Item	Uncertainty		
Bandwidth	1.1%		
Dools Output Douge (Conducted) (Speetman and system)	0.86 dB(10 MHz $\leq f < 3.6$ GHz);		
Peak Output Power(Conducted)(Spectrum analyzer)	$1.38 dB(3.6GHz \leqslant f < 8GHz)$		
Peak Output Power(Conducted)(Power Sensor)	0.74dB		
Dower Spectral Density	0.74 dB(10 MHz $\leq f < 3.6$ GHz);		
Power Spectral Density	$1.38 dB(3.6GHz \leqslant f < 8GHz)$		
	0.86 dB(10 MHz $\leq f < 3.6$ GHz);		
Conducted spurious emissions	$1.40 dB(3.6GHz \leqslant f < 8GHz)$		
	1.66dB(8GHz≤ f < 22GHz)		
Uncertainty for radio frequency (RBW<20KHz)	3×10-8		
Temperature	0.4℃		
Humidity	2%		
Uncertainty for Radiation Emission test	4.70 dB (Antenna Polarize: V)		
(30MHz-1GHz)	4.84 dB (Antenna Polarize: H)		
Uncertainty for Radiation Emission test	4.10dB(1-6GHz)		
(1GHz-18GHz)	4.40dB (6GHz-18Gz)		
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)		
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95%			


confidence level using a coverage factor of k=2.

3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test					
Spectrum analyzer	R&S	FSU26	1166.1660.26	Oct. 16, 2016	1Year
Vector Signal Generator	Agilent	E8267D	E8267D MY52098743		1Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jul. 05, 2017	1Year
Power Sensor	Agilent	U2021XA	MY55150010	Apr. 18, 2017	1Year
Power Sensor	Agilent	U2021XA	MY55150011	Apr. 19, 2017	1Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Oct. 24, 2016	1Year
Attenuator	Mini-Circuits	BW-S10W2	101109	Aug. 18, 2017	1Year
RF Cable	Micable	C10-01-01-1	100309	Aug. 18, 2017	1Year
Test Software	JS Tonscend	JS1120-2	Ver.2.5	N/A	N/A
USB Data acquisition	Agilent	U2531A	TW55043503	N/A	N/A
Auto control Unit	JS Tonscend	JS0806-2	158060010	N/A	N/A
Radiated Emission Tes	st				•
EMI Test Receiver	R&S	ESU8	100316	Oct. 16, 2016	1Year
Spectrum analyzer	R&S	FSU26	1166.1660.26	Oct. 16, 2016	1Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Oct. 27, 2016	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Oct. 16, 2016	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Oct. 12, 2016	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Oct. 16, 2016	1 Year
RF Cable	HUBSER	CP-X2	W11.03	Oct. 16, 2016	1Year
RF Cable	HUBSER	CP-X1	W12.02	Oct. 16, 2016	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Oct. 16, 2016	1 Year
Test software	Audix	E3	V 6.11111b	/	/
Power Line Conducted	Emissions Test				•
Test Receiver	R&S	ESU8	100316	Oct. 16, 2016	1 Year
LISN 1	R&S	ENV216	101109	Oct. 16, 2016	1 Year
LISN 2	R&S	ESH2-Z5	100309	Oct. 16, 2016	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Oct. 16, 2016	1 Year
CE Cable 1	HUBSER	ESU8/RF2	W10.01	Oct. 16, 2016	1 Year
Test software	Audix	E3	V 6.11111b	/	/

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

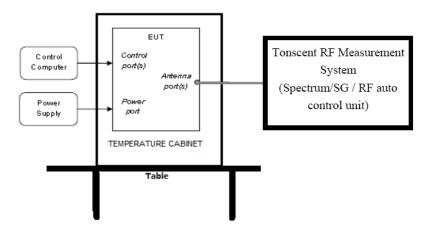

4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 KHz

4.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


RBW: 100KHz
VBW: 300KHz
Detector Mode: Peak
Sweep time: auto
Trace mode Max hold

(3) Allow the trace to stabilize, measure the 6dB and 99% bandwith of signal.

4.4. Test Result

Mode	Channel	6dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	6 dB width Limit (MHz)	Conclusion
	CH0	0.712	1.076	>0.5	PASS
GFSK	CH19	0.708	1.084	>0.5	PASS
	CH39 0.708 1.076		>0.5	PASS	
Test Date: Sep. 06, 2017 Test Engineer: Toby Ren					

4.5. Original test data

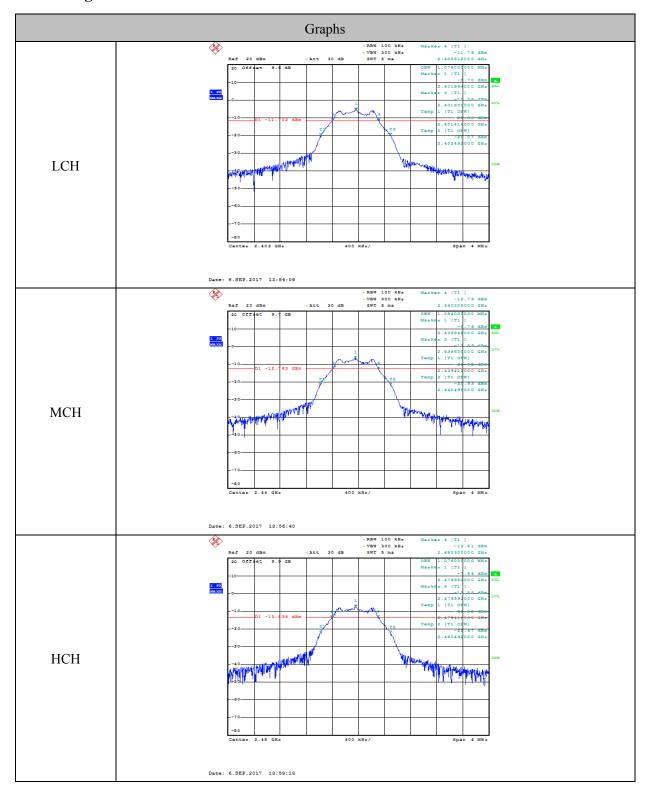

5. Maximum Peak Output Power

5.1. Block diagram of test setup

Same with 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:

RBW: 1MHz VBW: 3MHz

Span >1.5x 6dB bandwidth

Detector Mode: Peak
Sweep time: auto
Trace mode Max hold

(3) Allow the trace to stabilize, Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges measure out the PK output power.

5.4. Test Result

Mode	Freq (MHz)	Peak Output Power (dBm)	Limit (dBm)	Conclusion
	2402	-4.560	30	PASS
GFSK	2440	-5.660	30	PASS
	2480	-6.340	30	PASS
Test Date : Sep	. 06, 2017	Test Engineer	: Toby Ren	

6. Power Spectral Density

6.1. Block diagram of test setup

Same with 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:

Center frequency DTS Channel center frequency

RBW: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$

VBW: $\geq 3RBW$

Span 1.5times the DTS bandwidth


Detector Mode: Peak
Sweep time: auto
Trace mode Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test Result

EUT Set Mode	Channel	Result (dBm)			
	СН0	-5.610			
GFSK	CH19	-6.820			
	CH39	-7.540			
Limit: <8dBm/3KHz	Limit: <8dBm/3KHz Conclusion: PASS				
Test Date: Sep. 06, 2017 Test Engineer: Toby Ren					

6.5. Original test data

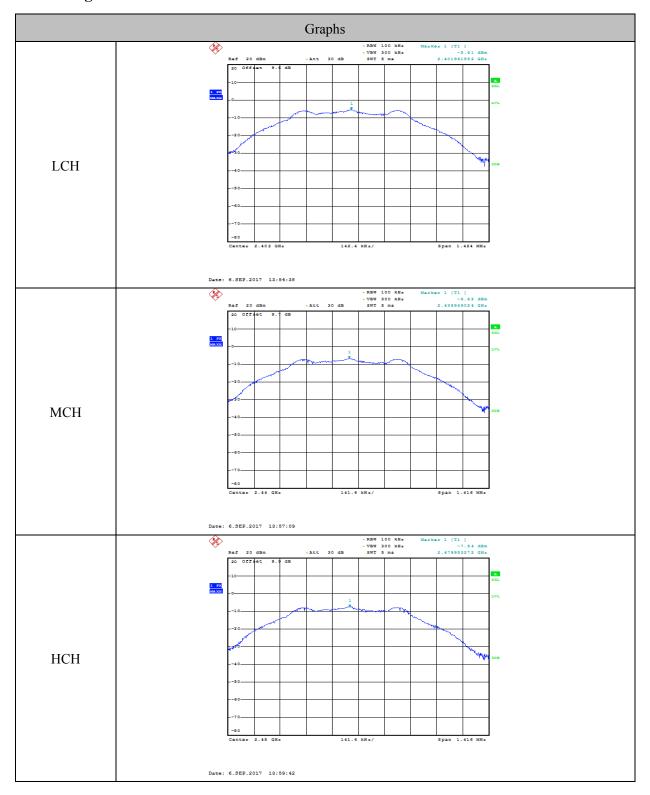

7. Emissions in non-restricted frequency bands

7.1. Block diagram of test setup

Same with 4.1

7.2. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Report No.: DDT-RQ17081502-03E4

7.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency DTS Channel center frequency

RBW: 100KHz VBW: 300KHz

Span 1.5times the DTS bandwidth

Detector Mode: Peak
Sweep time: auto

Trace mode Max hold

- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW: 100KHz VBW: 300KHz

Span Encompass frequency range to be measured

Number of measurement points $\geq \text{span/RBW}$

Detector Mode: Peak
Sweep time: auto


Trace mode Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

7.4. Test Result

EUT Set Mode	CH or Frequency	Measured Range	Result (dBm)		
GFSK	CH0	2.375GHz-2.405GHz	PASS		
	CH39	2.476GHz-2.506GHz	PASS		
Test Date : Sep. 06, 2017 Test Engineer : Toby Ren					


7.5. Original test data

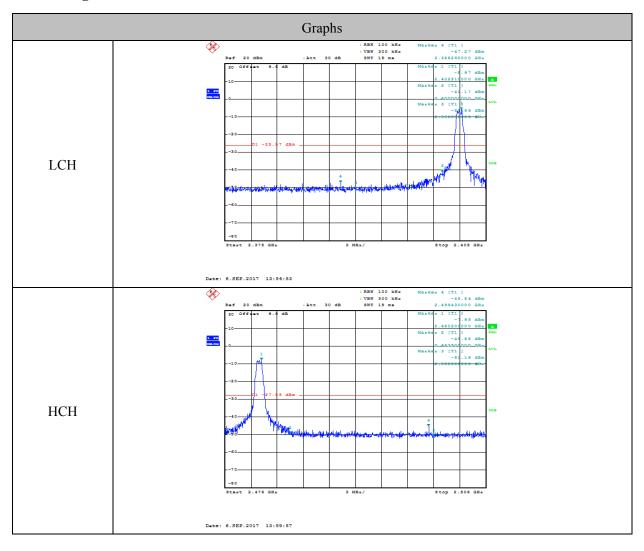


8. Emissions in restricted frequency bands

8.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz-30MHz

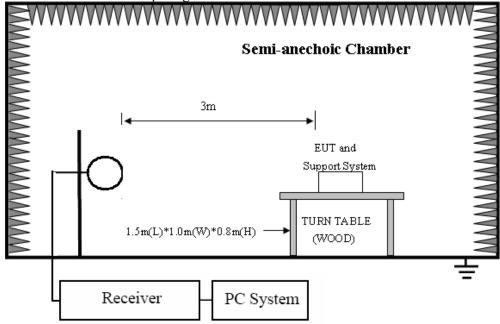

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

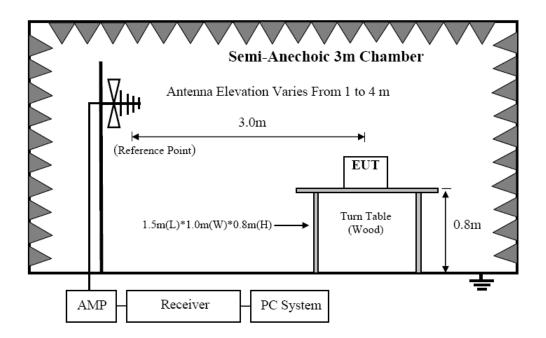

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

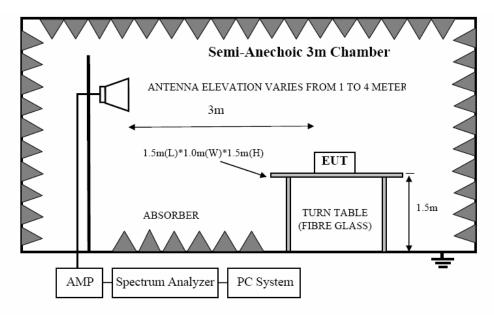

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)

8.2.2 FCC 15.209 Limit.

FREQUENCY	DISTANCE	FIELD STRENG	FIELD STRENGTHS LIMIT		
MHz	Meters	$\mu V/m$	dB(μV)/m		
$0.009 \sim 0.490$	300	2400/F(KHz)	67.6-20log(F)		
$0.490 \sim 1.705$	30	24000/F(KHz)	87.6-20log(F)		
$1.705 \sim 30.0$	30	30	29.54		
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3	200	46.0		
960 ~ 1000	3	500	54.0		
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)			

Note: (1)The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz.Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer then that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$Limit_{3m}(dBuV/m) = Limit_{30m}(dBuV/m) + 40Log(30m/3m)$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for blow 1G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1G
- (2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used		
9KHz-30MHz	Active Loop antenna		
30MHz-1GHz	Trilog Broadband Antenna		
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)		
18GHz-40GHz	Horn Antenna(18GHz-40GHz)		

According ANSI C63.10:2013 clause 6.4.4.2 and 6,5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9KHz to 25GHz:
- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)
 - (b) Change work frequency or channel of device if practicable.
 - (c) Change modulation type of device if practicable.
 - (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated,

- and no any obvious emission were detected from 9KHz to 30MHz and 18GHz to 25GHzso below final test was performed with frequency range from 30MHz to 18GHz.
- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (5) The emissions from 9KHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz, for emissions from 9KHz-90KHz,110KHz-490KHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.
- (6)The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW		
9KHz-150KHz	200Hz		
150KHz-30MHz	9KHz		
30MHz-1GHz	120KHz		

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

8.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9KHz to 25GHz were comply with 15.209 limit. Note1: According exploratory test no any obvious emission were detected from 9KHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in GFSK, Tx 2440MHz mode.

Note3: For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2# E:\2017 RE2# Report Data\Q17081502-03O\RE.EM6


EUT : Smart luggage system Model Number :

Power Supply : DC 3.0V **Test Mode** : TX mode

Condition : Temp:24.5'C,Humi:55%, Press:100.1kPa : 2016 VULB9163 2#/3m/HORIZONTAL

Memo :

Data: 2

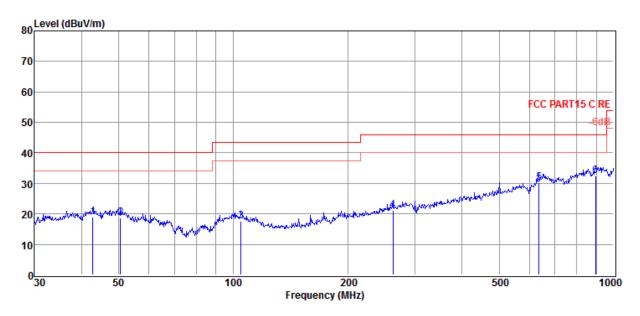

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	42.75	2.45	13.07	3.51	19.03	40.00	-20.97	QP	HORIZONTAL
2	50.59	1.90	13.21	3.64	18.75	40.00	-21.25	QP	HORIZONTAL
3	104.90	2.27	11.28	4.03	17.58	43.50	-25.92	QP	HORIZONTAL
4	262.90	4.05	12.44	4.70	21.19	46.00	-24.81	QP	HORIZONTAL
5	636.13	3.34	20.85	5.95	30.14	46.00	-15.86	QP	HORIZONTAL
6	897.00	2.96	22.89	6.66	32.51	46.00	-13.49	QP	HORIZONTAL

- 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
- 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Test Site : DDT 3m Chamber 2# E:\2017 RE2# Report Data\Q17081502-03O\RE.EM6

Test Date : 2017-08-30 Tested By : Jerry


EUT : Smart luggage system Model Number :

Power Supply : DC 3.0V **Test Mode** : TX mode

Condition : Temp:24.5'C,Humi:55%, Press:100.1kPa : Antenna/Distance : 2016 VULB9163 2#/3m/VERTICAL

Memo :

Data: 1

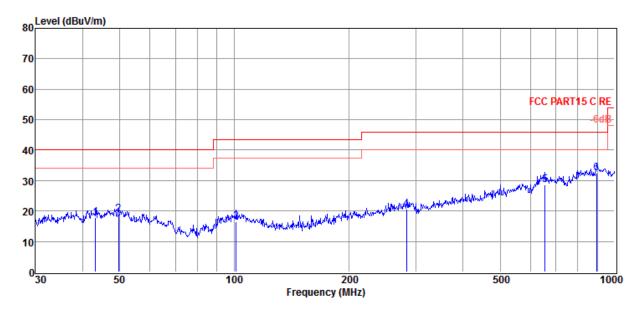

Item	Freq.	Read Level	Antenna Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBµV)	(dB/m)	dB	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)		
1	43.20	1.16	13.12	3.52	17.80	40.00	-22.20	QP	VERTICAL
2	49.71	2.11	13.25	3.63	18.99	40.00	-21.01	QP	VERTICAL
3	101.29	1.31	11.08	4.01	16.40	43.50	-27.10	QP	VERTICAL
4	283.98	3.01	12.88	4.79	20.68	46.00	-25.32	QP	VERTICAL
5	656.53	1.24	21.45	6.00	28.69	46.00	-17.31	QP	VERTICAL
6	897.00	2.96	22.89	6.66	32.51	46.00	-13.49	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

^{2.} If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.


Radiated Emission test (above 1GHz)

Radiated Emission test (above IGHz)									
Freq.	Read	Antenna	PRM	Cable	Result	Limit	Margin	Detector	Polarization
(MHz)	level	Factor	Factor	Loss	Level	(dBµ	(dB)	type	
	$(dB\mu V)$	(dB/m)	(dB)	(dB)	$\left(dB\mu V/m\right)$	V/m)			
GFSK Tx mode 2402MHz									
4179.00	34.32	33.55	29.07	7.81	46.61	74.00	-27.39	Peak	HORIZONTAL
5471.00	32.55	34.64	29.27	9.16	47.08	74.00	-26.92	Peak	HORIZONTAL
7256.00	34.17	36.41	30.54	10.65	50.69	74.00	-23.31	Peak	HORIZONTAL
9160.00	33.86	37.14	32.39	12.01	50.62	74.00	-23.38	Peak	HORIZONTAL
10044.00	33.23	36.86	32.94	12.46	49.61	74.00	-24.39	Peak	HORIZONTAL
12084.00	33.27	37.72	34.85	14.30	50.44	74.00	-23.56	Peak	HORIZONTAL
6474.00	34.59	35.76	29.78	9.93	50.50	74.00	-23.50	Peak	VERTICAL
7171.00	35.26	36.34	30.48	10.57	51.69	74.00	-22.31	Peak	VERTICAL
9007.00	34.43	37.48	32.33	11.83	51.41	74.00	-22.59	Peak	VERTICAL
10571.00	33.63	36.60	33.33	12.80	49.70	74.00	-24.30	Peak	VERTICAL
12050.00	33.51	37.67	34.82	14.26	50.62	74.00	-23.38	Peak	VERTICAL
12985.00	33.93	38.79	35.70	14.67	51.69	74.00	-22.31	Peak	VERTICAL
				GFSK 7	Tx mode 2440	MHz			
4060.00	34.79	33.45	29.05	7.67	46.86	74.00	-27.14	Peak	HORIZONTAL
5505.00	32.62	34.70	29.26	9.18	47.24	74.00	-26.76	Peak	HORIZONTAL
7154.00	33.56	36.33	30.45	10.56	50.00	74.00	-24.00	Peak	HORIZONTAL
8004.00	35.11	36.69	31.13	11.13	51.80	74.00	-22.20	Peak	HORIZONTAL
9058.00	33.18	37.37	32.35	11.89	50.09	74.00	-23.91	Peak	HORIZONTAL
11030.00	32.56	37.73	34.03	13.49	49.75	74.00	-24.25	Peak	HORIZONTAL
4774.00	33.15	33.74	29.31	8.44	46.02	74.00	-27.98	Peak	VERTICAL
6270.00	33.24	35.44	29.44	9.82	49.06	74.00	-24.94	Peak	VERTICAL
7936.00	34.51	36.69	31.11	11.10	51.19	74.00	-22.81	Peak	VERTICAL
8956.00	33.18	37.31	32.28	11.79	50.00	74.00	-24.00	Peak	VERTICAL
10401.00	34.20	36.50	33.20	12.65	50.15	74.00	-23.85	Peak	VERTICAL
12169.00	32.14	37.84	34.90	14.36	49.44	74.00	-24.56	Peak	VERTICAL
				GFSK 7	Tx mode 2480	MHz			
5216.00	34.03	34.14	29.33	8.91	47.75	74.00	-26.25	Peak	HORIZONTAL
7154.00	33.91	36.33	30.45	10.56	50.35	74.00	-23.65	Peak	HORIZONTAL
7970.00	34.58	36.69	31.12	11.12	51.27	74.00	-22.73	Peak	HORIZONTAL
9211.00	33.52	37.03	32.42	12.05	50.18	74.00	-23.82	Peak	HORIZONTAL
11251.00	33.40	37.24	34.28	13.53	49.89	74.00	-24.11	Peak	HORIZONTAL
13036.00	34.24	38.84	35.67	14.68	52.09	74.00	-21.91	Peak	HORIZONTAL
4961.00	36.50	33.71	29.35	8.63	49.49	74.00	-24.51	Peak	VERTICAL
7001.00	35.47	36.20	30.39	10.44	51.72	74.00	-22.28	Peak	VERTICAL
8820.00	34.32	36.72	32.18	11.75	50.61	74.00	-23.39	Peak	VERTICAL
10605.00	33.08	36.70	33.37	12.88	49.29	74.00	-24.71	Peak	VERTICAL
12050.00	34.09	37.67	34.82	14.26	51.20	74.00	-22.80	Peak	VERTICAL
13155.00	33.58	38.96	35.57	14.71	51.68	74.00	-22.32	Peak	VERTICAL
Result: Pas	SS								

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

9. Band Edge Compliance

9.1. Block diagram of test setup

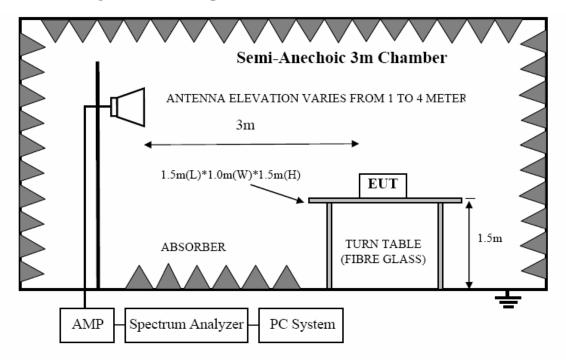

9.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz and 5725MHz to 5850MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310MHz to 2415MHz and 2475MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.

9.4. Test result

PASS. (See below detailed test result)

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17081502-03O\RF-FCC ID

1G-18G.EM6


Test Date : 2017-09-06 Tested By : Sunny

EUT : Smart luggage system **Model Number** :

Power Supply: DC 3.0V **Test Mode**: TX mode 2402MHz

Memo : BLE

Data: 2

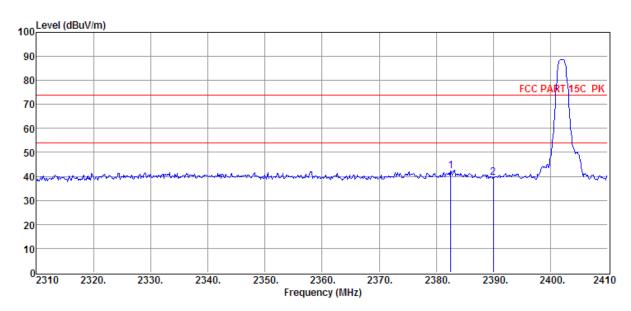

Item	Freq.	Read	Antenna	PRM	Cable	Result	Limit	Over	Detector	Polarization
		Level	Factor	Factor	Loss	Level	Line	Limit		
(Mark)	(MHz)	(dBµV)	(dB/m)	dB	dB	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)		
1	2382.50	35.79	29.75	29.41	6.01	42.14	74.00	-31.86	Peak	HORIZONTAL
2	2390.00	33.26	29.78	29.42	6.03	39.65	74.00	-34.35	Peak	HORIZONTAL

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17081502-03O\RF-FCC ID

1G-18G.EM6


Test Date : 2017-09-06 Tested By : Sunny

EUT : Smart luggage system Model Number :

Power Supply : DC 3.0V **Test Mode** : TX mode 2402MHz

Memo : BLE

Data: 1

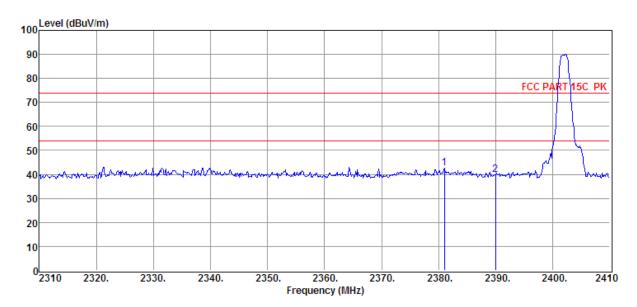

Item	Freq.	Read	Antenna	PRM	Cable	Result	Limit	Over	Detector	Polarization
		Level	Factor	Factor	Loss	Level	Line	Limit		
(Mark)	(MHz)	$(dB\mu V)$	(dB/m)	dB	dB	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)		
1	2381.00	36.35	29.74	29.41	6.01	42.69	74.00	-31.31	Peak	VERTICAL
2	2390.00	33.43	29.78	29.42	6.03	39.82	74.00	-34.18	Peak	VERTICAL

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17081502-03O\RF-FCC ID

1G-18G.EM6


Test Date : 2017-09-06 Tested By : Sunny

EUT : Smart luggage system **Model Number** :

Power Supply: DC 3.0V **Test Mode**: TX mode 2480MHz

Memo : BLE

Data: 9

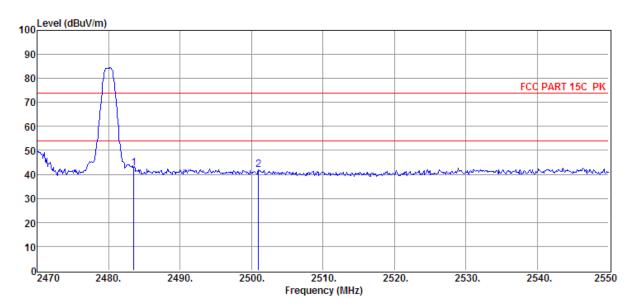

Iten	Freq.	Read	Antenna	PRM	Cable	Result	Limit	Over	Detector	Polarization
		Level	Factor	Factor	Loss	Level	Line	Limit		
(Marl	(MHz)	(dBµV)	(dB/m)	dB	dB	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)		
1	2483.50	36.14	30.14	29.71	6.13	42.70	74.00	-31.30	Peak	HORIZONTAL
2	2500.96	35.35	30.20	29.75	6.17	41.97	74.00	-32.03	Peak	HORIZONTAL

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Site : DDT 3m Chamber 1# D:\2017 RE1# Report Data\Q17081502-03O\RF-FCC ID

1G-18G.EM6


Test Date : 2017-09-06 Tested By : Sunny

EUT : Smart luggage system **Model Number** :

Power Supply: DC 3.0V **Test Mode**: TX mode 2480MHz

Memo : BLE

Data: 10

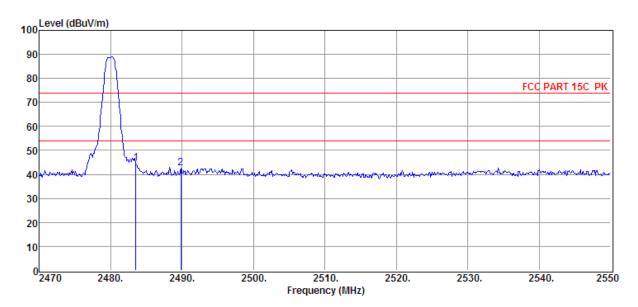


ľ	Item	Freq.	Read	Antenna	PRM	Cable	Result	Limit	Over	Detector	Polarization
			Level	Factor	Factor	Loss	Level	Line	Limit		
ı	(Mark)	(MHz)	(dBµV)	(dB/m)	dB	dB	$(dB\mu V/m)$	$(dB\mu V/m)$	(dB)		
ſ	1	2483.50	38.01	30.14	29.71	6.13	44.57	74.00	-29.43	Peak	VERTICAL
ſ	2	2489.84	35.83	30.16	29.71	6.17	42.45	74.00	-31.55	Peak	VERTICAL

- 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

10. Power Line Conducted Emission

10.1. Block diagram of test setup

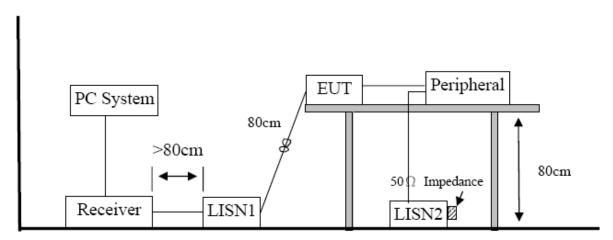

10.2. Power Line Conducted Emission Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)		
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*		
500kHz ~ 5MHz	56	46		
5MHz ~ 30MHz	60	50		

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

Report No.: DDT-RQ17081502-03E4

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

10.4. Test Result

Not Applicable, since the EUT is only battery-operated device.

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antennas used for this product is integrated antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only -1dBi.

END OF REPORT